

材质:铜版纸

规格:80x125mm



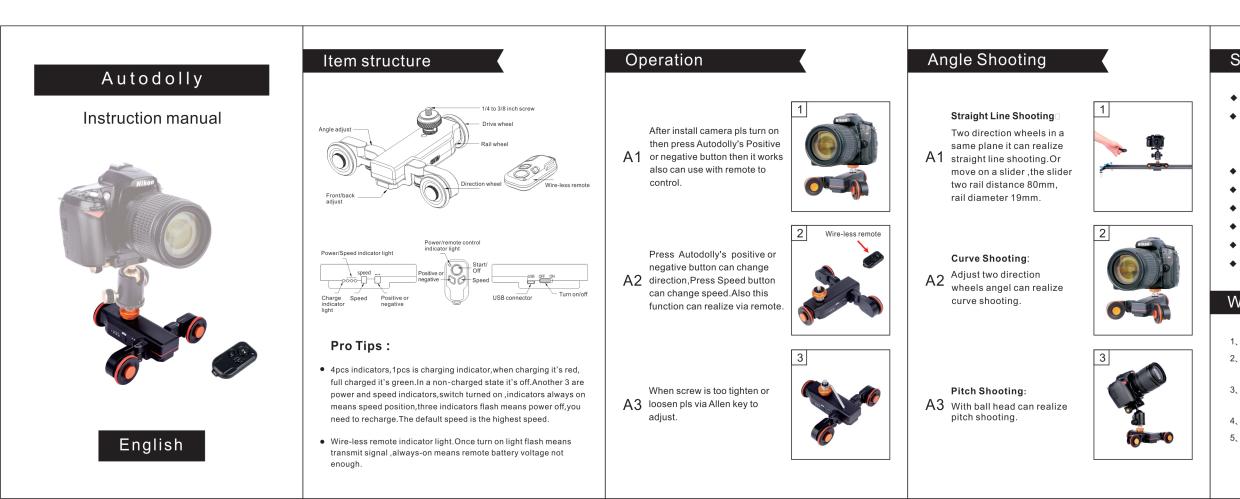

Specification

- Max Load: 3kgs.
- Speed: Approx.1.4cm/S Approx.2.4cm/S Approx.3.0cm/S (Camera weight is 3kgs,full power,move on a horizontal space in straight line).
- Remote control distance: Approx.6M.
- Autodolly battery life: Approx.6H.
- Autodolly charge time: ≤3H.
- Remote battery model: CR2032 (included battery).
- Remote battery life: 18H.
- The times of remote control normal use:60000 times.

Warning

- 1、Do not spin wheels by force.
- Do not exceed the Autodolly's maximum load capacity of 3kgs.
- Remove remote battery out when Autodolly don't work.
- 4、Ensure that all ground is smooth when necessary.
- Do not attempt to use when camera or center of gravity not fixed.

FCC warning:

1. This device should be installed and operated with minimum distance 0mm between the radiator&your body.

2. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

3. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

4. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.