

FCC Test Report

Report No.: AGC00408231003FR02

FCC ID	: 2A3DR-M92G
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: 2G Feature phone
BRAND NAME	: AGM
MODEL NAME	: M9_2G
APPLICANT	: AGM MOBILE LIMITED
DATE OF ISSUE	: Nov. 01, 2023
STANDARD(S)	: FCC Part 22 Subpart H
REPORT VERSION	: V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/ Nov. 01, 2023		Valid	Initial Release



Report No.: AGC00408231003FR02 Page 3 of 57

Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Related Submittal(S) / Grant (S)	
2.3 Test Methodology	
2.4 Device Capabilities	
2.5 Special Accessories	
2.6 Equipment Modifications	
2.7 Emission Designator	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Test Equipment	
4. System Test Configuration	
4.1 EUT Configuration	14
4.2 EUT Exercise	
4.3 Configuration of EUT System	
4.4 Equipment Used in Tested System	
5. Summary of Test Results	
5.1 Test Condition: Conducted Test	
5.2 Test Condition: Radiated Test	
6. Description of Test Modes	
7. Conducted Output Power	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup	
7.4 Measurement Result	
8. Radiated Output Power	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup	
8.4 Measurement Result	
9. Peak-to-Average Ratio	
	05



9.2 Measurement Procedure	
9.3 Measurement Setup	
9.4 Measurement Result	
10. 99% Occupied Bandwidth and 26dB Emission Bandwidth	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup	
10.4 Measurement Result	
11. Band Edge Emissions at Antenna Terminal	
11.1 Provisions Applicable	
11.2 Measurement Procedure	
11.3 Measurement Setup	
11.4 Measurement Result	
12. Spurious Emissions at Antenna Terminal	
12.1 Provisions Applicable	
12.2 Measurement Procedure	
12.3 Measurement Setup	
12.4 Measurement Result	
13. Radiated Spurious Emission	
13.1. Provisions Applicable	
13.2. Measurement Procedure	
13.3. Measurement Setup	
13.4 Measurement Result	
14. Frequency Stability / Variation of Ambient Temperature	
14.1 Provisions Applicable	
14.2 Measurement Procedure	
14.3 Measurement Setup	
14.4 Measurement Result	51
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of EUT	



1. General Information

Applicant	AGM MOBILE LIMITED		
Address	FLAT/RM 2253 22/F HOI TAI FACTORY ESTATE TSING YEUNG CIRCUIT TUEN MUN NT HONG KONG, CHINA		
Manufacturer	SHENZHEN AIJIEMO SCIENCE AND TECHNOLOGY CO., LTD		
Address	201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen China		
Factory	SHENZHEN AIJIEMO SCIENCE AND TECHNOLOGY CO., LTD		
Address	201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen China		
Product Designation	2G Feature phone		
Brand Name	AGM		
Test Model	M9_2G		
Date of receipt of test item	Oct. 17, 2023		
Date of Test	Oct. 17, 2023~Oct. 31, 2023		
Deviation from Standard	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Test Report Form No	AGCER-FCC-GSM&WCDMA-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By Bibo Zhang (Project Engineer) Reviewed By Calvin Liu (Reviewer) Oct. 31, 2023

Approved By

ax Tha

Max Zhang Authorized Officer

Oct. 31, 2023



2. Product Information

2.1 Product Technical Description

Support Networks	GSM, GPRS			
Hardware Version	FF257V4.0			
Software Version	FF257 V4.0			
Support Fraguency Dond	GPRS 850	⊠PCS1900		
Support Frequency Band	⊠GSM 900	DCS 1800		
	824.2MHz-848.8MHz (GS	SM/GPRS 850)		
Frequency Range	1850.2MHz-1909.8MHz (GSM/GPRS 1900)		
Type of Modulation	GMSK/8PSK Modulation For GSM/GPRS			
Emission Designator	GSM/GPRS 850:	245KGXW		
Emission Designator	GSM/GPRS 1900:	245KGXW		
Antenna Designation	PIFA Antenna			
Antenna Gain	GSM850:-1.31dBi PCS1900:-0.05dBi			
Power Supply	DC 3.7V by Built-in Li-ion Battery			
Dual Card	GSM Card Slot			
Extreme Vol. Limits	DC 3.15V to 4.20V (Normal: DC 3.7V)			
Extreme Temp. Tolerance	-30 °C to +50 °C			
Temperature Range	0°C to +40°C			



GSM SLOT 1:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	30.11	33.13	
PCS 1900	25.42	28.11	

GSM SLOT 2:

	Maximum ERP/EIRP	Max. Average		
	(dBm)	Burst Power (dBm)		
GSM 850	31.41	32.09		
PCS 1900	25.17	26.78		



2.2 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A3DR-M92G**, filing to comply with Part 2, Part 22 of the Federal Communication Commission rules.

2.3 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.		
2	47 CFR FCC Part 22	Public Mobile Services.		
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters		
3	AINSI C03.20-2015	Used in Licensed Radio Services		
4		Land Mobile FM or PM Communications Equipment Measurement and		
4	ANSI/TIA-603-E-2016	Performance Standards		
5	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital		
5		Transmitters.		

2.4 Device Capabilities

850/1900 GSM/GPRS, Bluetooth (1X,EDR).

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power

channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation

(landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device supports dual-SIM communication, and only the data corresponding to the worst card slot (SIM Card 1) is reflected in the report.

2.5 Special Accessories

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 Equipment Modifications

Not available for this EUT intended for grant.



2.7 Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW GSM BW = 249 kHz G = Phase Modulation X = Cases not otherwise covered W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W WCDMA BW = 4.17 MHz F = Frequency Modulation 9 = Composite Digital Info W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D LTE BW = 4.48 MHz W = Amplitude/Angle Modulated 7 = Quantized/Digital Info D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W GSM BW = 249 kHz G = Phase Modulation 7 = Quantized/Digital Info W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D LTE BW = 4.48 MHz G = Phase Modulation 7 = Quantized/Digital Info D = Data transmission; telemetry; telecommand



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions		
Temperature range	15~35 ℃	-20°℃~50° ℃		
Humidty range	20 % to 75 %.	20 % to 75 %.		
Pressure range	86-106kPa	86-106kPa		
Power supply	DC 3.7	DC 3.15V or 4.20V		
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.				

3.4 Measurement Uncertainty

Test	Measurement Uncertainty	
Transmitter power conducted	±0.57 dB	
Transmitter power Radiated	±2.20 dB	
Conducted spurious emission 9kHz-40 GHz	±2.20 dB	
Occupied Bandwidth	±0.01ppm	
Radiated Emission 30~1000MHz	±4.10dB	
Radiated Emission Above 1GHz	±4.32dB	
Conducted Disturbance:0.15~30MHz	±3.20dB	
Radio Frequency	± 6.5 x 10-8	
RF Power, Conducted	± 0.9 dB	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.5 List of Test Equipment

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Next Cal. Date
Useu	Equipment No.	Test Equipment	Mandiacturei	Model No.	Senai No.	(YY-MM-DD)	(YY-MM-DD)
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
		Universal Radio					
\boxtimes	AGC-ER-E032	Communication	R&S	CMW500	120909	2023-07-05	2024-07-04
		Tester					
\square	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
\boxtimes	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04
\boxtimes	AGC-EM-E029	Broadband Ridged	ETS	3117	00034609	2023-03-23	2024-03-22
		Horn Antenna				2023-03-23	2024-03-22
	AGC-EM-E102	Broadband Ridged	ETS	3117	00154520	2023-06-03	2024-06-02
	AGC-EIM-ETUZ	Horn Antenna		0117	00104020		
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
		Band Stop Filter		BRC50717	N/A	2023-06-01	
	AGC-EM-A113	(825-850MHz)	MICRO-TRONICS			2023-06-01	2024-05-31
	AGC-EM-A091	High Pass Filter 2		N/A	N/A	2023-06-01	2024-05-31
\square		(1200-18000MHz)	N/A				



Report No.: AGC00408231003FR02 Page 13 of 57

• 1	RF Conducted Test System						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Next Cal. Date
Useu	Equipment No.	Test Equipment	Manulacturei		Senai No.	(YY-MM-DD)	(YY-MM-DD)
\bowtie	AGC-ER-E087	Spectrum Analyzer	KEYSIGHT	N9020B	MY56101792	2023-06-01	2024-05-31
		Universal Radio					
\bowtie	AGC-ER-E032	Communication	R&S	CMU200	113939	2023-06-01	2024-05-31
		Tester					
	AGC-ER-E075	Small Environmental	SH-242	ESPEC	93008290	2022-08-03	2024-08-02
	AGC-LIV-LO75	Tester	011-242		55666256	2022-00-03	2024-00-02
		Universal Switch	Tonscend	JS	N/A	N/A	N/A
		Control Unit	TOIISCEITU	33	IN/A	N/A	IN/A
		RF Connection	N/A	1#	N/A	Each time	N/A
		Cable	IN/A	1#	N/A	Each unie	IN/A
		RF Connection	N/A	0.1	N1/A	Each time	N1/A
		Cable	IN/A	2#	N/A	Each time	N/A

Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
	AGC-ER-S006	GSM Test System	Tonscend	JS1120-4	2.1.6.0	
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS ⁺ Ver2.1(JS36-RSE)	4.0.0.0	



4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of EUT System

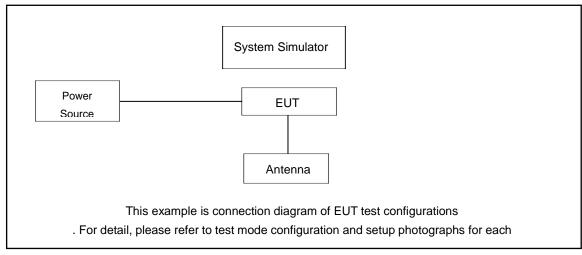


Table 2-1 Equipment Used in EUT System



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Earphone	N/A	СХТ	N/A	0.6m, Unshielded

I Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
			Shenzhen	Input: AC 100-240V 50/60Hz,	
1	Adapter	PS06CA050K1000EU	Flypower Technology	0.25A	N/A
			Co., Ltd	Output: DC 5.0V 1A	
2			Shenzhen Aerospace	DC 3.7V 1000mAh	N1/A
2	Battery	AGM_M9	Electronic Co.,Ltd.	DC 3.7 V 1000MAN	N/A
	USB cable	N/A	N/A	N/A	1.0m,
		IN/A	IN/A	IN/A	Unshielded



5. Summary of Test Results

5.1 Test Condition: Conducted Test

ltem	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a)	Pass
3	Conducted Output Power	§2.1046	Pass
4	Frequency stability / variation of ambient temperature	§2.1055, § 22.355	Pass
5	Peak- to- Average Ratio	-	Pass

5.2 Test Condition: Radiated Test

ltem	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	-	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	Pass



6. Description of Test Modes

			RF Channel			
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)		
GSM/GPRS	ТХ	Channel 128	Channel 190	Channel 251		
GSIVI/GFK3	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz		

Bands	Tx/Rx Frequency	RF Channel			
		Low(L)	Middle(M)	High(H)	
GSM/GPRS	TX (1850 MHz-1910 MHz)	Channel 512	Channel 661	Channel 810	
		1850.2 MHz	1880.0 MHz	1909.8 MHz	

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/850/1900	GSM (GMSK, 1Tx-slot) Link GPRS (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link GPRS (GMSK, 1Tx-slot) Link



According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6. TAA: DE maximum output power with HS-DPCCH and E-DCH				
UE Transmit Channel Configuration	CM(db)	MPR(db)		
For all combinations of ,DPDCH,DPCCH 0≤ CM≤3.5 MAX(CM-1,0)				
HS-DPDCH, E-DPDCH and E-DPCCH				
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH,				
E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.				

Table 6 1aA: UE maximum output newsr with US DDCCH and E DCH

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



7. Conducted Output Power

7.1 Provisions Applicable

The conduction test is carried out in a shielded room. According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)


7.2 Measurement Procedure

- > The transmitter output port was connected to base station.
- > The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- > The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V)at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

7.3 Measurement Setup

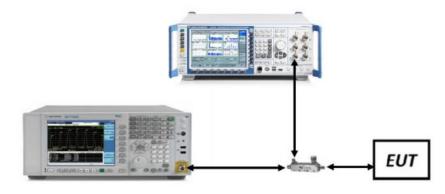



7.4 Measurement Result

GSM 850 Maximum Average Power (dBm)					
Channel	128	190	251		
Frequency (MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
GSM (GMSK, 1Tx-slot)	32.99	33.15	33.16		
GPRS (GMSK, 1Tx-slot)	33.04	33.13	33.10		
GPRS (GMSK, 2Tx-slot)	31.96	31.53	31.44		
GPRS (GMSK, 3Tx-slot)	29.25	29.74	29.11		
GPRS (GMSK, 4Tx-slot)	27.05	27.10	27.24		

PCS 1900 Maximum Average Power (dBm)					
Channel	512	661	810		
Frequency (MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz		
GSM (GMSK, 1Tx-slot)	27.77	27.95	27.85		
GPRS (GMSK, 1Tx-slot)	27.80	28.11	27.90		
GPRS (GMSK, 2Tx-slot)	26.36	26.40	26.41		
GPRS (GMSK, 3Tx-slot)	24.60	24.52	24.05		
GPRS (GMSK, 4Tx-slot)	22.11	22.05	22.10		



8. Radiated Output Power

8.1 Provisions Applicable

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)

8.2 Measurement Procedure

- 1. Radiated power measurements are performed using the signal analyzer's "channel power"
- 2. measurement capability for signals with continuous operation.
- 3. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 4. VBW \geq 3 x RBW
- 5. Span = 1.5 times the OBW
- 6. No. of sweep points > 2 x span / RBW
- 7. Detector = RMS
- 8. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 9. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 10. Trace mode = trace averaging (RMS) over 100 sweeps
- 11. The trace was allowed to stabilize.




• Radiation Construction Method:

- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- 2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 3. The power is calculated by the following formula:

Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)


- 4. Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
- 5. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 6. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 7. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

8.3 Measurement Setup

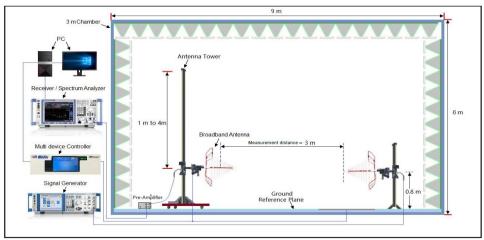


Radiated Power 30MHz to 1GHz Test setup



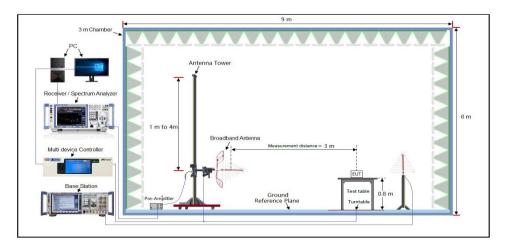

Radiated Power Above 1GHz Test setup

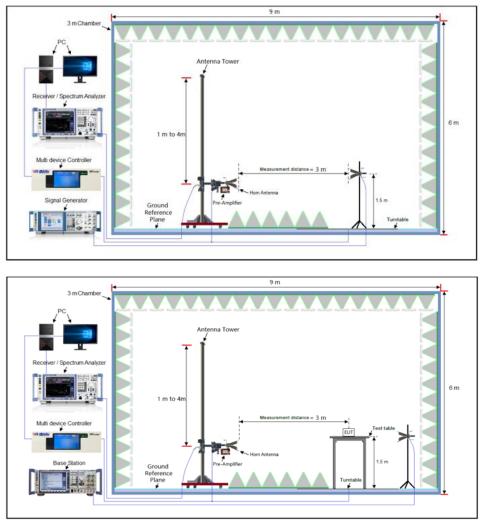



8.4 Measurement Result

	Ch./ Freq.		Substitute	Ant. Gain			Limit	ERP	
Mode	channel	Freq. (MHz)	Level (dBm)	(dBi)	C.L	Pol.	w	w	dBm
GSM850	128	824.2	25.43	5.90	1.21	Н		1.028	30.12
	190	836.6	25.40	5.90	1.22	Н	< 7.00	1.019	30.08
	251	848.8	25.46	5.90	1.25	Н		1.026	30.11

Mode	Ch./ Freq.		Substitute	Ant. Gain			Limit	EIRP	
	channel	Freq. (MHz)	Level (dBm)	(dBi)	C.L	Pol.	w	¥	dBm
PCS1900	512	1850.2	18.93	8.6	2.11	Н		0.348	25.42
	661	1880.0	18.88	8.6	2.15	Н	< 2.00	0.341	25.33
	810	1909.8	18.74	8.6	2.15	Н		0.330	25.19

Note:

1. EIRP/ERP = Substitute Level (dBm) + Ant. Gain – C.L (Cable Loss)

2. All polarizations and modes have been tested, only the worst mode is recorded in the report



9. Peak-to-Average Ratio

9.1 Provisions Applicable

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

9.2 Measurement Procedure

4 CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
- 4. that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:

 $P.A.R(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) (P_{Avg} = Average Power + Duty cycle Factor)$

Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

Test Settings (Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the

signal to be measured and a VBW \ge 3 × RBW.

- 1. Set the RBW \geq OBW.
- 2. Set VBW \geq 3 × RBW.
- 3. Set span \geq 2 × OBW.
- Any report name not been stanged by Authorized approver, of having been attended with but authorization, of having not been stanged by the "Dedicated Testing/Inspection"

Stamp¹ is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/




- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

■ <u>Test Settings (Average Power)</u>

- 1. Set span to $2 \times to 3 \times the OBW$.
- 2. Set RBW ≥ OBW.
- 3. Set VBW \geq 3 × RBW.
- 4. Set number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
- Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (Automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

9.3 Measurement Setup

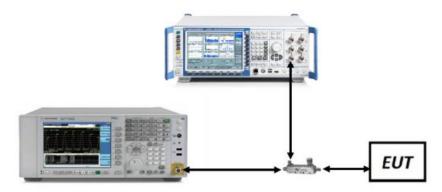



9.4 Measurement Result

Bands	Modulation	Peak-te	o-average rat	Limit	Result	
	modulation	Lowest	Middle	Highest	(dB)	Result
GSM 850	GSM	2.71	2.71	2.71	13	Pass
	GPRS	2.70	2.71	2.71	13	Pass
PCS 1900	GSM	2.67	2.68	2.67	13	Pass
	GPRS	2.68	2.68	2.68	13	Pass



10. 99% Occupied Bandwidth and 26dB Emission Bandwidth

10.1 Provisions Applicable

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

10.2 Measurement Procedure

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99%
- 2. Occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by
- 3. any intermediate power nulls in the fundamental emission.
- 4. RBW = 1 5% of the expected OBW
- 5. VBW \ge 3 x RBW
- 6. Detector = Peak
- 7. Trace mode = max hold
- 8. Sweep = auto couple
- 9. The trace was allowed to stabilize
- 10. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
- 11. 1 5% of the 99% occupied bandwidth observed in Step 7

10.3 Measurement Setup

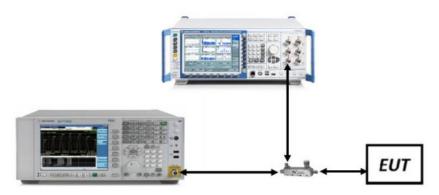




10.4 Measurement Result


Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
	GSM	LCH	244.8	313	Pass
GSM 850		MCH	244.6	310	Pass
		HCH	242.1	306	Pass
	GPRS	LCH	244.7	310	Pass
		MCH	243.4	315	Pass
		НСН	241.4	319	Pass

Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
	GSM GPRS	LCH	245.4	306	Pass
PCS 1900		MCH	244.2	319	Pass
		HCH	243.1	299	Pass
		LCH	244.4	316	Pass
		MCH	244.9	306	Pass
		НСН	246.3	322	Pass



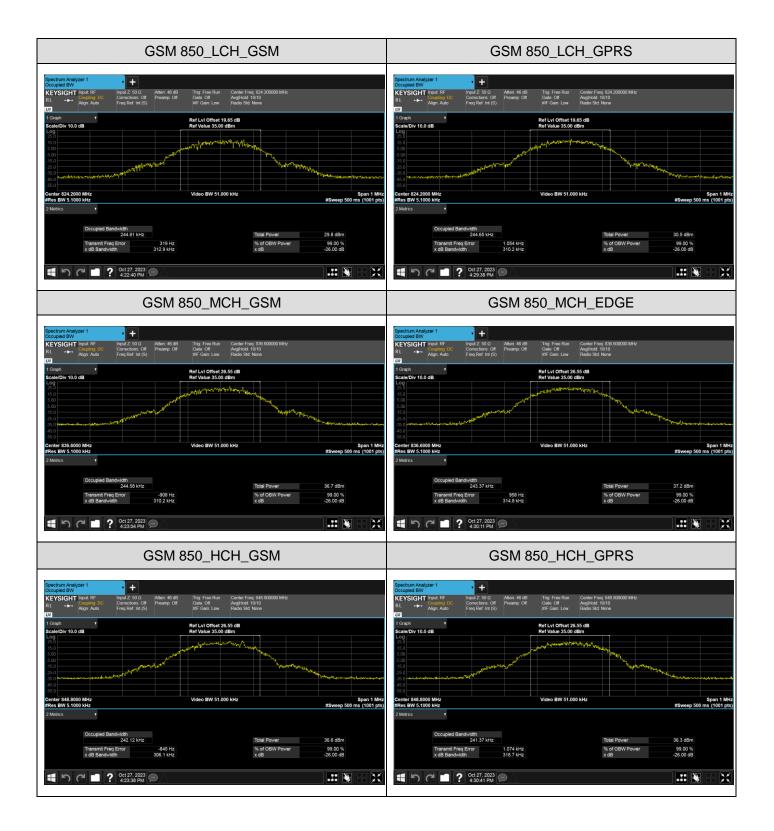



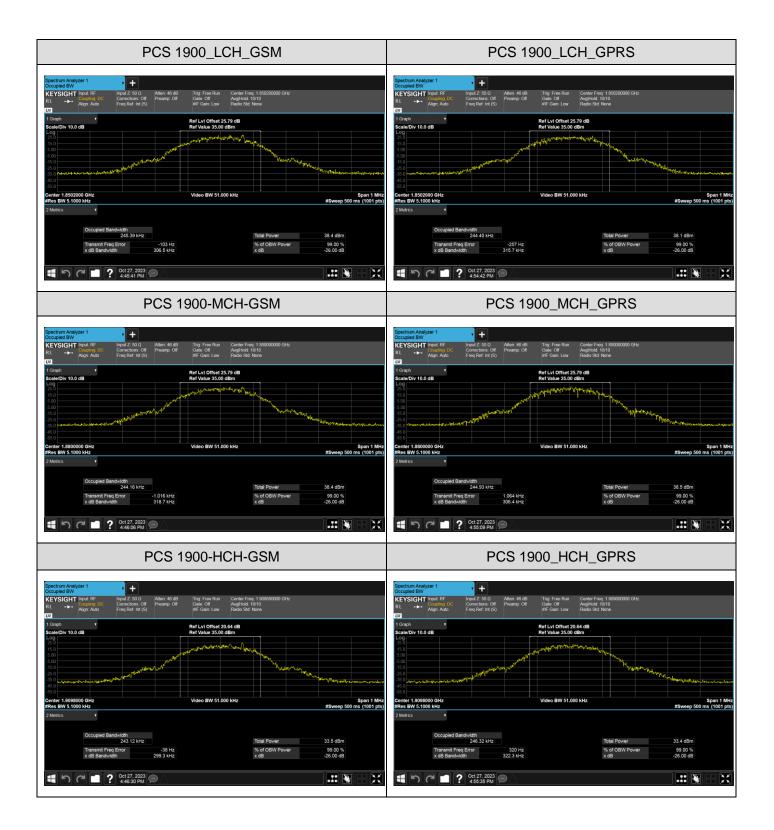



11. Band Edge Emissions at Antenna Terminal

11.1 Provisions Applicable

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

11.2 Measurement Procedure

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. VBW > $3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points \geq 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

Test Note


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

11.3 Measurement Setup






11.4 Measurement Result

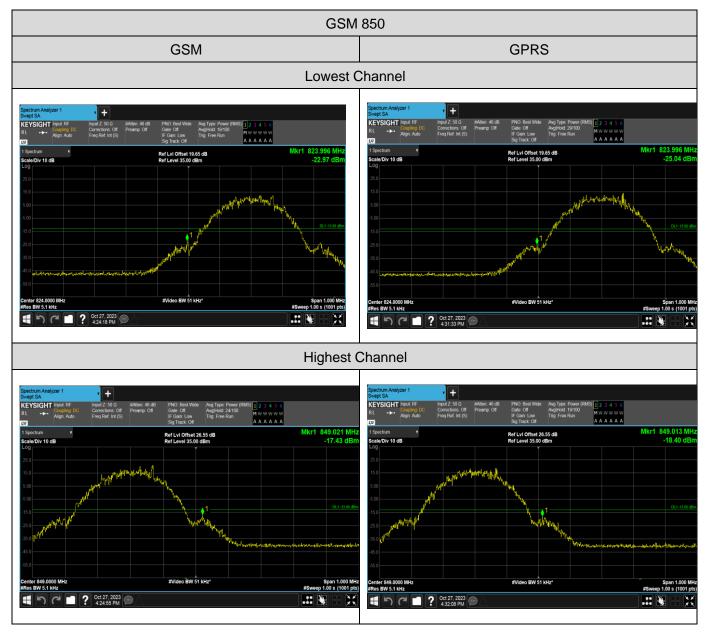



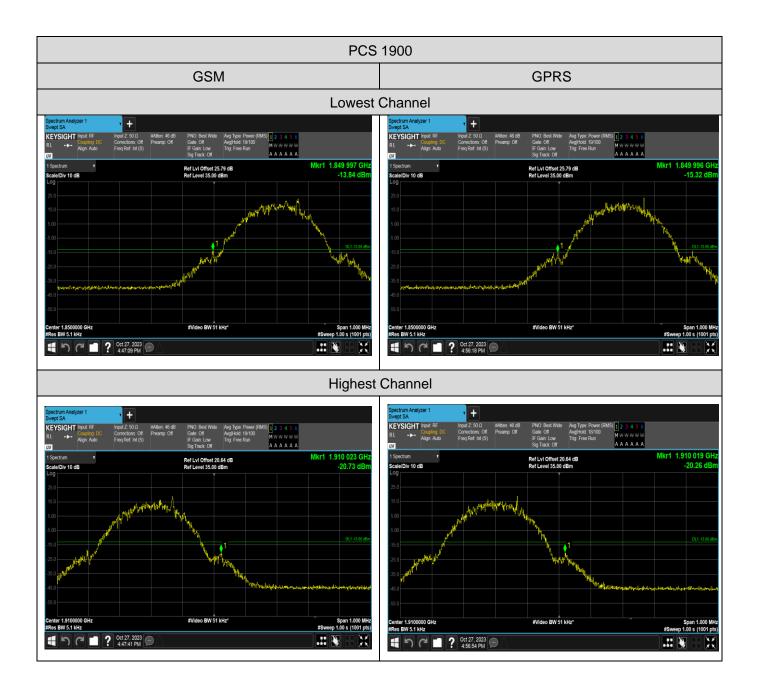



12. Spurious Emissions at Antenna Terminal

12.1 Provisions Applicable

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

12.2 Measurement Procedure

Test Settings (GSM)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep $\ge 2 \times \text{Span} / \text{RBW}$

Test Settings (WCDMA)


- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- 4. Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep $\ge 2 \times \text{Span} / \text{RBW}$

12.3 Measurement Setup






12.4 Measurement Result

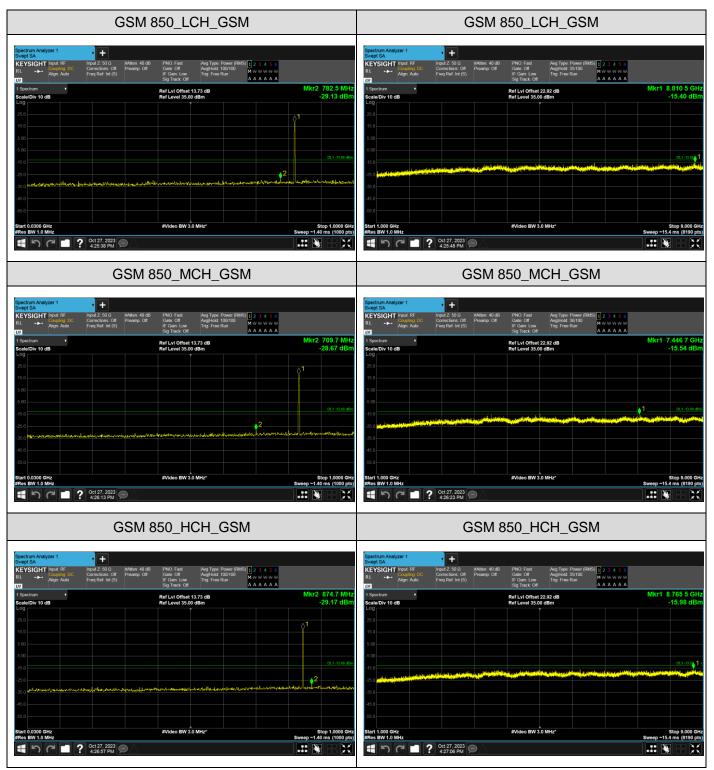









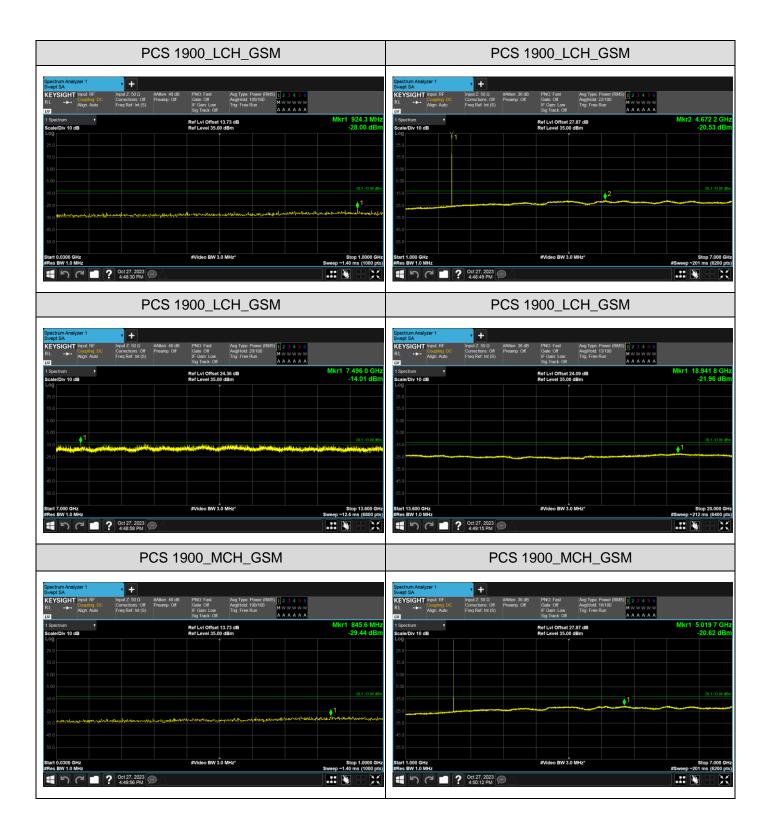



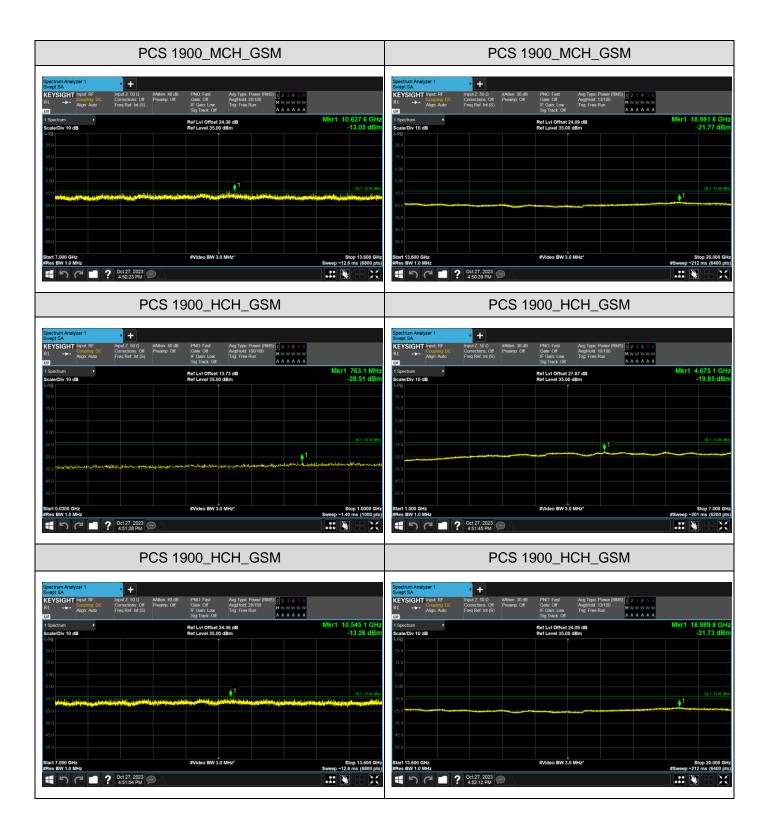




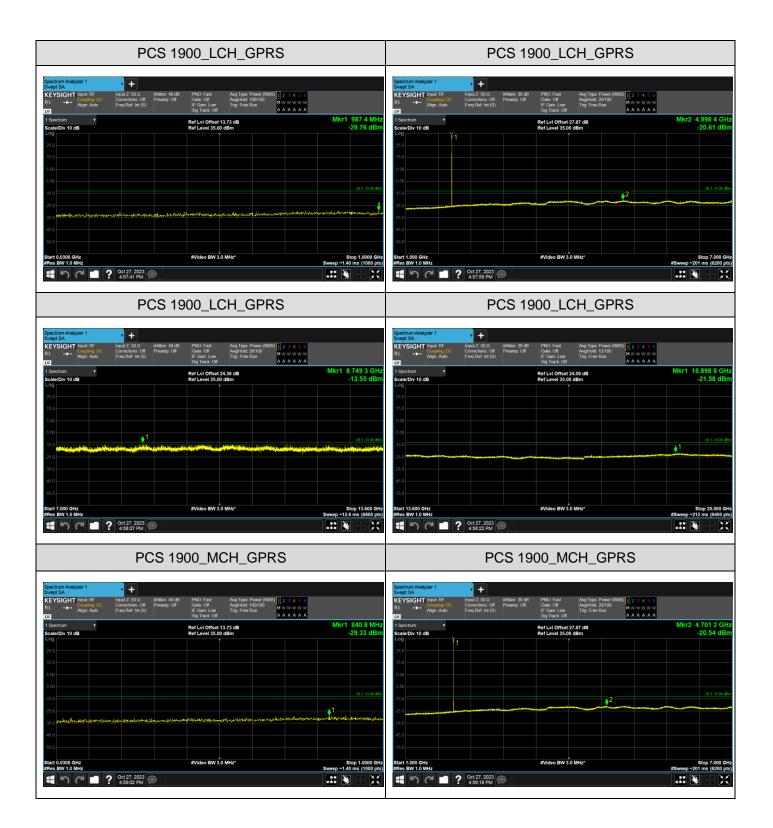



Report No.: AGC00408231003FR02 Page 41 of 57

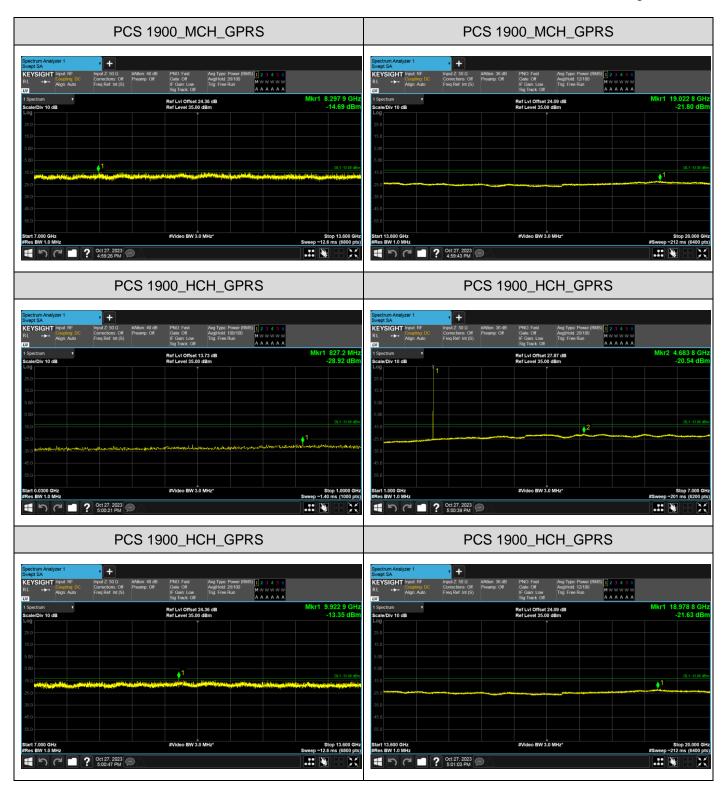

Note:

1. Below 30MHz no Spurious found and above is the worst mode data.

2. As no emission found in standby or receive mode, no recording in this report.



13. Radiated Spurious Emission

13.1. Provisions Applicable

(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 9.2 of the report for corresponding evaluation.

13.2. Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the




pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.
- 12. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 13. The spurious emissions is calculated by the following formula;
 - $\Rightarrow \quad \text{Result}(dBm) = Pg(dBm) + Factor(dB)$
- 14. Where: P_{gis} the generator output power into the substitution antenna.
- 15. If the Fundamental frequency is below 1GHz, RF output power has been converted to EIRP.
 - \diamond EIRP (dBm) = ERP (dBm) + 2.15




13.3. Measurement Setup

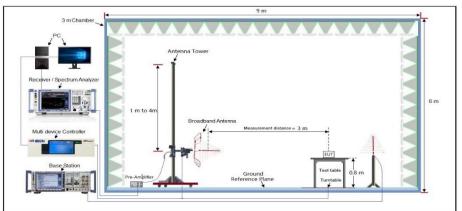

Radiated Emissions 30MHz to 1GHz Test setup

Radiated Emissions Above 1GHz Test setup

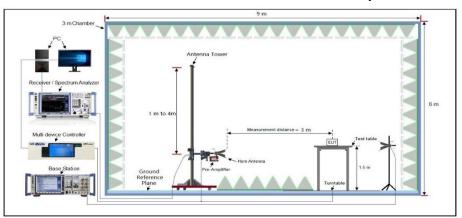



13.4 Measurement Result

The measurement Below 1GHz data as follows:

			G	SM 850			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lo	west Channel			
1	159.145	-65.57	15.52	-50.05	-13.00	-37.05	Horizontal
2	240.289	-62.74	16.75	-45.99	-13.00	-32.99	Horizontal
3	754.014	-59.06	19.35	-39.71	-13.00	-26.71	Horizontal
4	46.445	-65.03	10.44	-54.59	-13.00	-41.59	Vertical
5	433.361	-61.90	17.75	-44.15	-13.00	-31.15	Vertical
6	502.157	-58.58	18.66	-39.92	-13.00	-26.92	Vertical
			GSM_M	iddle Channel			
1	31.705	-63.28	9.78	-53.50	-13.00	-40.50	Horizontal
2	159.716	-62.70	13.75	-48.95	-13.00	-35.95	Horizontal
3	240.438	-60.82	16.75	-44.07	-13.00	-31.07	Horizontal
4	43.915	-63.66	10.23	-53.43	-13.00	-40.43	Vertical
5	433.334	-61.46	17.75	-43.71	-13.00	-30.71	Vertical
6	498.701	-59.33	18.02	-41.31	-13.00	-28.31	Vertical
			GSM_ Hi	ghest Channe	l		
1	159.859	-63.33	13.75	-49.58	-13.00	-36.58	Horizontal
2	240.144	-62.36	16.75	-45.61	-13.00	-32.61	Horizontal
3	679.435	-57.90	19.01	-38.89	-13.00	-25.89	Horizontal
4	43.233	-61.48	10.23	-51.25	-13.00	-38.25	Vertical
5	433.340	-60.92	17.75	-43.17	-13.00	-30.17	Vertical
6	498.730	-57.03	18.02	-39.01	-13.00	-26.01	Vertical



			PC	CS 1900			
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.	Trequency	Reading	factor	Result		Wargin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lo	west Channel			
1	159.458	-65.76	15.52	-50.24	-13.00	-37.24	Horizontal
2	240.361	-60.99	16.75	-44.24	-13.00	-31.24	Horizontal
3	754.110	-57.77	19.35	-38.42	-13.00	-25.42	Horizontal
4	46.128	-63.56	10.44	-53.12	-13.00	-40.12	Vertical
5	433.342	-59.23	17.75	-41.48	-13.00	-28.48	Vertical
6	502.425	-57.53	18.66	-38.87	-13.00	-25.87	Vertical
			GSM_M	iddle Channel			
1	31.395	-63.21	9.78	-53.43	-13.00	-40.43	Horizontal
2	159.785	-63.61	13.75	-49.86	-13.00	-36.86	Horizontal
3	240.284	-62.04	16.75	-45.29	-13.00	-32.29	Horizontal
4	43.242	-64.05	10.23	-53.82	-13.00	-40.82	Vertical
5	433.361	-62.49	17.75	-44.74	-13.00	-31.74	Vertical
6	498.485	-59.62	18.02	-41.60	-13.00	-28.60	Vertical
			GSM_ Hig	ghest Channe	l		
1	159.125	-63.31	13.75	-49.56	-13.00	-36.56	Horizontal
2	240.362	-61.42	16.75	-44.67	-13.00	-31.67	Horizontal
3	679.412	-57.79	19.01	-38.78	-13.00	-25.78	Horizontal
4	43.485	-63.68	10.23	-53.45	-13.00	-40.45	Vertical
5	433.281	-60.25	17.75	-42.50	-13.00	-29.50	Vertical
6	498.694	-57.46	18.02	-39.44	-13.00	-26.44	Vertical



			G	SM 850			
	Fraguanav	SA	Correction	EIRP	Limit	Margin	
No.	Frequency	Reading	factor	Result	Liiiit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lo	west Channel			
1	1648.400	-88.51	23.50	-65.01	-13.00	-52.01	Horizontal
2	2472.600	-88.08	29.47	-58.61	-13.00	-45.61	Horizontal
3	1648.400	-89.29	23.72	-65.57	-13.00	-52.57	Vertical
4	2472.600	-88.73	29.47	-59.26	-13.00	-46.26	Vertical
			GSM_M	iddle Channel			
1	1673.200	-88.90	23.50	-65.40	-13.00	-52.40	Horizontal
2	2509.800	-90.71	29.47	-61.24	-13.00	-48.24	Horizontal
3	1673.200	-88.32	23.72	-64.60	-13.00	-51.60	Vertical
4	2509.800	-92.38	29.47	-62.91	-13.00	-49.91	Vertical
			GSM_ Hig	ghest Channe	l		
1	1697.600	-91.96	23.50	-68.46	-13.00	-55.46	Horizontal
2	2546.400	-92.81	29.47	-63.34	-13.00	-50.34	Horizontal
3	1697.600	-92.25	23.72	-68.53	-13.00	-55.53	Vertical
4	2546.400	-92.99	29.47	-63.52	-13.00	-50.52	Vertical

The measurement Above 1GHz data as follows:



		PCS 1900											
	Froquency	SA	Correction	EIRP	Limit	Margin							
No.	Frequency	Reading	factor	Result	Linint	warym	Ant. Pol.						
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)							
			GSM_ Lo	west Channel									
1	3700.400	-85.96	32.11	-53.85	-13.00	-40.85	Horizontal						
2	5550.600	-86.48	33.21	-53.27	-13.00	-40.27	Horizontal						
3	3700.400	-87.78	32.09	-55.69	-13.00	-42.69	Vertical						
4	5550.600	-86.26	34.03	-52.23	-13.00	-39.23	Vertical						
			GSM_M	iddle Channel									
1	3760.000	-82.14	32.11	-50.03	-13.00	-37.03	Horizontal						
2	5640.000	-84.98	33.21	-51.77	-13.00	-38.77	Horizontal						
3	3760.000	-89.24	32.09	-57.15	-13.00	-44.15	Vertical						
4	5640.000	-86.29	34.03	-52.26	-13.00	-39.26	Vertical						
			GSM_ Hig	ghest Channe									
1	3819.600	-88.54	32.11	-56.43	-13.00	-43.43	Horizontal						
2	5729.400	-87.45	33.21	-54.24	-13.00	-41.24	Horizontal						
3	3819.600	-90.81	32.09	-58.72	-13.00	-45.72	Vertical						
4	5729.400	-89.03	34.03	-55.00	-13.00	-42.00	Vertical						

Note:

- 1. Correct Factor = Antenna Factor + Cable Loss Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- 2. Result = Reading + Correct Factor.
- 3. Margin = Result Limit
- 4. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test. Subsequently, only the worst case emissions are reported.



14. Frequency Stability / Variation of Ambient Temperature

14.1 Provisions Applicable

14.1.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

14.1.2 For equipment powered by primary supply voltage

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a
- 2. reference).
- 3. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to
- 4. the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 5. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at
- 6. least one half-hour is provided to allow stabilization of the equipment at each temperature level.

14.2 Measurement Procedure

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- Subject the EUT to overnight soak at -30℃. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 3. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 4. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from



voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.

- 5. Subject the EUT to overnight soak at +50℃.
- 6. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 7. Repeat the above measurements at 10[°]C increments from +50[°]C to -30[°]C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 8. At all temperature levels hold the temperature to +/- 0.5° C during the measurement procedure.

Shielding Chamber

14.3 Measurement Setup



14.4 Measurement Result

• Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Vardiat
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
			TN	VL	7.43	0.009015	±2.5	PASS
		LCH	TN	VN	4.65	0.005642	±2.5	PASS
			TN	VH	5.75	0.006976	±2.5	PASS
			TN	VL	-2.32	-0.002773	±2.5	PASS
GSM850	GSM	MCH	TN	VN	-2.00	-0.002391	±2.5	PASS
			TN	VH	-3.49	-0.004172	±2.5	PASS
			TN	VL	2.91	0.003428	±2.5	PASS
		НСН	TN	VN	1.87	0.002203	±2.5	PASS
			TN	VH	1.81	0.002132	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Vardiat
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
			TN	VL	-3.42	-0.004149	±2.5	PASS
		LCH	TN	VN	-2.26	-0.002742	±2.5	PASS
			TN	VH	-3.29	-0.003992	±2.5	PASS
			TN	VL	-2.45	-0.002929	±2.5	PASS
GSM850	GPRS	MCH	TN	VN	-2.26	-0.002701	±2.5	PASS
			TN	VH	-3.62	-0.004327	±2.5	PASS
			TN	VL	-0.90	-0.001060	±2.5	PASS
		НСН	TN	VN	4.39	0.005172	±2.5	PASS
			TN	VH	0.97	0.001143	±2.5	PASS



Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated	Vordiat
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	Verdict
			TN	VL	14.21	0.007680	Pass
		LCH	TN	VN	5.62	0.003038	Pass
			TN	VH	5.49	0.002967	Pass
			TN	VL	10.01	0.005324	Pass
PCS1900	GSM	MCH	TN	VN	11.43	0.006080	Pass
			TN	VH	8.46	0.004500	Pass
			TN	VL	-7.04	-0.003686	Pass
		HCH	TN	VN	-2.00	-0.001047	Pass
			TN	VH	6.13	0.003210	Pass

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	
			TN	VL	15.24	0.008237	Pass
		LCH	TN	VN	7.75	0.004189	Pass
			TN	VH	11.43	0.006178	Pass
			TN	VL	8.46	0.004500	Pass
PCS1900	GPRS	MCH	TN	VN	12.59	0.006697	Pass
			TN	VH	18.27	0.009718	Pass
			TN	VL	3.68	0.001927	Pass
		НСН	TN	VN	4.20	0.002199	Pass
			TN	VH	5.62	0.002943	Pass

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



• Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdiet																
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict																
			VN	-30	0.90	0.001092	±2.5	PASS																
			VN	-20	-4.52	-0.005484	±2.5	PASS																
			VN	-10	-0.45	-0.000546	±2.5	PASS																
			VN	0	1.61	0.001953	±2.5	PASS																
GSM850	M850 GSM	LCH	VN	10	-1.49	-0.001808	±2.5	PASS																
			VN	20	-2.78	-0.003373	±2.5	PASS																
			VN	30	-1.03	-0.001250	±2.5	PASS																
			VN	40	-2.84	-0.003446	±2.5	PASS																
			VN	50	-1.03	-0.001250	±2.5	PASS																
			VN	-30	-1.49	-0.001781	±2.5	PASS																
			VN	-20	0.19	0.000227	±2.5	PASS																
		МСН		VN	-10	-2.84	-0.003395	±2.5	PASS															
				VN	0	0.26	0.000311	±2.5	PASS															
GSM850	GSM		VN	10	0.77	0.000920	±2.5	PASS																
																		VN	20	-1.03	-0.001231	±2.5	PASS	
																	VN	30	0.90	0.001076	±2.5	PASS		
			VN	40	-1.36	-0.001626	±2.5	PASS																
			VN	50	0.19	0.000227	±2.5	PASS																
			VN	-30	2.52	0.002969	±2.5	PASS																
			VN	-20	4.00	0.004713	±2.5	PASS																
			VN	-10	6.01	0.007081	±2.5	PASS																
																			VN	0	3.49	0.004112	±2.5	PASS
GSM850	GSM850 GSM	HCH	VN	10	5.49	0.006468	±2.5	PASS																
			VN	20	4.20	0.004948	±2.5	PASS																
			VN	30	5.23	0.006162	±2.5	PASS																
			VN	40	5.23	0.006162	±2.5	PASS																
			VN	50	7.55	0.008895	±2.5	PASS																



Report No.: AGC00408231003FR02 Page 54 of 57

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdiet																				
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict																				
			VN	-30	-5.29	-0.006418	±2.5	PASS																				
			VN	-20	-4.71	-0.005715	±2.5	PASS																				
			VN	-10	-6.46	-0.007838	±2.5	PASS																				
			VN	0	-2.84	-0.003446	±2.5	PASS																				
GSM850	GSM850 GPRS	LCH	VN	10	-1.61	-0.001953	±2.5	PASS																				
						VN	20	-3.29	-0.003992	±2.5	PASS																	
			VN	30	-1.94	-0.002354	±2.5	PASS																				
			VN	40	-1.81	-0.002196	±2.5	PASS																				
			VN	50	-3.10	-0.003761	±2.5	PASS																				
			VN	-30	-2.39	-0.002857	±2.5	PASS																				
			VN	-20	-4.20	-0.005020	±2.5	PASS																				
			MCH	VN	-10	-1.94	-0.002319	±2.5	PASS																			
				МСН	VN	0	-2.78	-0.003323	±2.5	PASS																		
GSM850	GPRS	S MCH			VN	10	-3.10	-0.003705	±2.5	PASS																		
								-	-	-													VN	20	-3.49	-0.004172	±2.5	PASS
																	VN	30	-1.29	-0.001542	±2.5	PASS						
												VN	40	0.71	0.000849	±2.5	PASS											
			VN	50	-2.32	-0.002773	±2.5	PASS																				
			VN	-30	1.74	0.002050	±2.5	PASS																				
			VN	-20	-0.26	-0.000306	±2.5	PASS																				
			VN	-10	-0.06	-0.000071	±2.5	PASS																				
																			VN	0	1.23	0.001449	±2.5	PASS				
GSM850	GSM850 GPRS	HCH	VN	10	1.74	0.002050	±2.5	PASS																				
			VN	20	4.26	0.005019	±2.5	PASS																				
			VN	30	1.29	0.001520	±2.5	PASS																				
			VN	40	5.17	0.006091	±2.5	PASS																				
			VN	50	1.42	0.001673	±2.5	PASS																				



Report No.: AGC00408231003FR02 Page 55 of 57

Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated	Vardiat
Band	Mode	Channel	Volt.	Tem. (℃)	(Hz)	(ppm)	Verdict
			VN	-30	6.20	0.003351	Pass
			VN	-20	12.14	0.006561	Pass
			VN	-10	-3.42	-0.001848	Pass
			VN	0	-0.77	-0.000416	Pass
PCS1900	GSM	LCH	VN	10	-0.71	-0.000384	Pass
			VN	20	-4.91	-0.002654	Pass
			VN	30	1.03	0.000557	Pass
			VN	40	1.68	0.000908	Pass
			VN	50	7.23	0.003908	Pass
			VN	-30	9.81	0.005218	Pass
			VN	-20	7.88	0.004191	Pass
			VN	-10	10.01	0.005324	Pass
		GSM MCH	VN	0	8.27	0.004399	Pass
PCS1900	GSM		VN	10	3.62	0.001926	Pass
			VN	20	2.52	0.001340	Pass
			VN	30	5.29	0.002814	Pass
			VN	40	0.19	0.000101	Pass
			VN	50	-3.81	-0.002027	Pass
			VN	-30	-4.07	-0.002131	Pass
			VN	-20	-0.13	-0.000068	Pass
			VN	-10	-4.84	-0.002534	Pass
			VN	0	-9.10	-0.004765	Pass
PCS1900	GSM	HCH	VN	10	2.45	0.001283	Pass
			VN	20	-4.33	-0.002267	Pass
			VN	30	6.97	0.003650	Pass
			VN	40	0.45	0.000236	Pass
			VN	50	-2.07	-0.001084	Pass



Report No.: AGC00408231003FR02 Page 56 of 57

Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated) (a raliat	
Band	Mode	Channel	Volt.	Tem. (℃)	(Hz)	(ppm)	Verdict	
			VN	-30	13.37	0.007226	Pass	
			VN	-20	7.30	0.003946	Pass	
				VN	-10	-0.32	-0.000173	Pass
			VN	0	5.75	0.003108	Pass	
PCS1900	PCS1900 GSM	LCH	VN	10	6.33	0.003421	Pass	
			VN	20	3.36	0.001816	Pass	
			VN	30	7.10	0.003837	Pass	
			VN	40	4.13	0.002232	Pass	
			VN	50	7.17	0.003875	Pass	
			VN	-30	-0.06	-0.000032	Pass	
			VN	-20	4.33	0.002303	Pass	
			VN	-10	7.88	0.004191	Pass	
			VN	0	14.27	0.007590	Pass	
PCS1900	GSM	SM MCH	VN	10	-7.68	-0.004085	Pass	
			VN	20	1.61	0.000856	Pass	
			VN	30	8.01	0.004261	Pass	
			VN	40	4.71	0.002505	Pass	
			VN	50	3.29	0.001750	Pass	
			VN	-30	4.91	0.002571	Pass	
			VN	-20	12.59	0.006592	Pass	
			VN	-10	12.98	0.006797	Pass	
			VN	0	17.11	0.008959	Pass	
PCS1900	GSM	HCH	VN	10	-1.16	-0.000607	Pass	
			VN	20	3.49	0.001827	Pass	
			VN	30	1.10	0.000576	Pass	
			VN	40	2.20	0.001152	Pass	
			VN	50	7.88	0.004126	Pass	

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



Report No.: AGC00408231003FR02 Page 57 of 57

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC00408231003AP04

Appendix II: Photographs of EUT

Refer to the Report No.: AGC00408231003AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.