

RF Test Data for 2.4G (Conducted Measurements)


General Description of EUT	
Product Name:	Wireless Microphone
Test Model:	DX06
Sample ID:	RW-C-202302-0095-5-2#
Environmental Conditions	
Temperature:	23.8°C
Relative Humidity:	48%
Test Voltage:	DC 3.7V
Test Engineer:	Liu Ji Ming
Note: For a more detailed features description, please refer to the report TBR-C-202302-0095-88 The report only show the worst case data.	

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	user	2402	Ant1	29.6	5.29	2.7
NVNT	user	2441	Ant1	30.4	5.17	2.63
NVNT	user	2480	Ant1	29.6	5.29	2.7


Test Graphs

Duty Cycle NVNT user 2402MHz Ant1

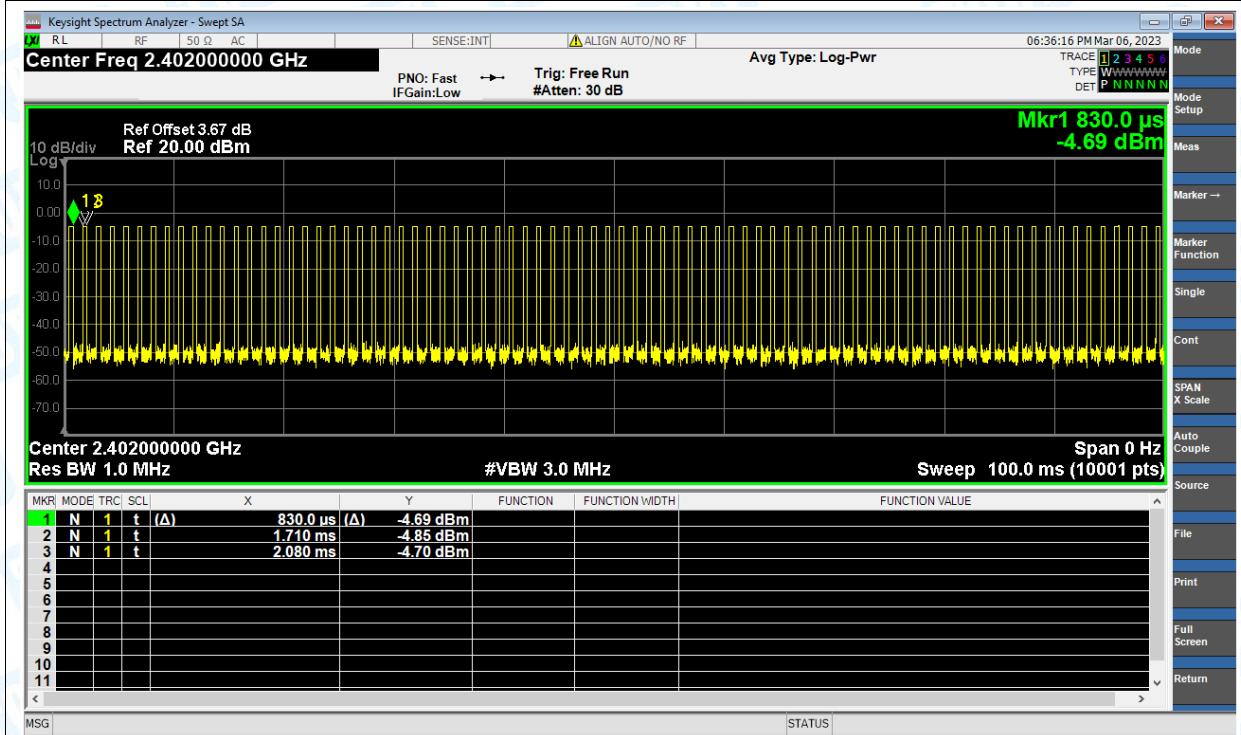

Duty Cycle NVNT user 2441MHz Ant1

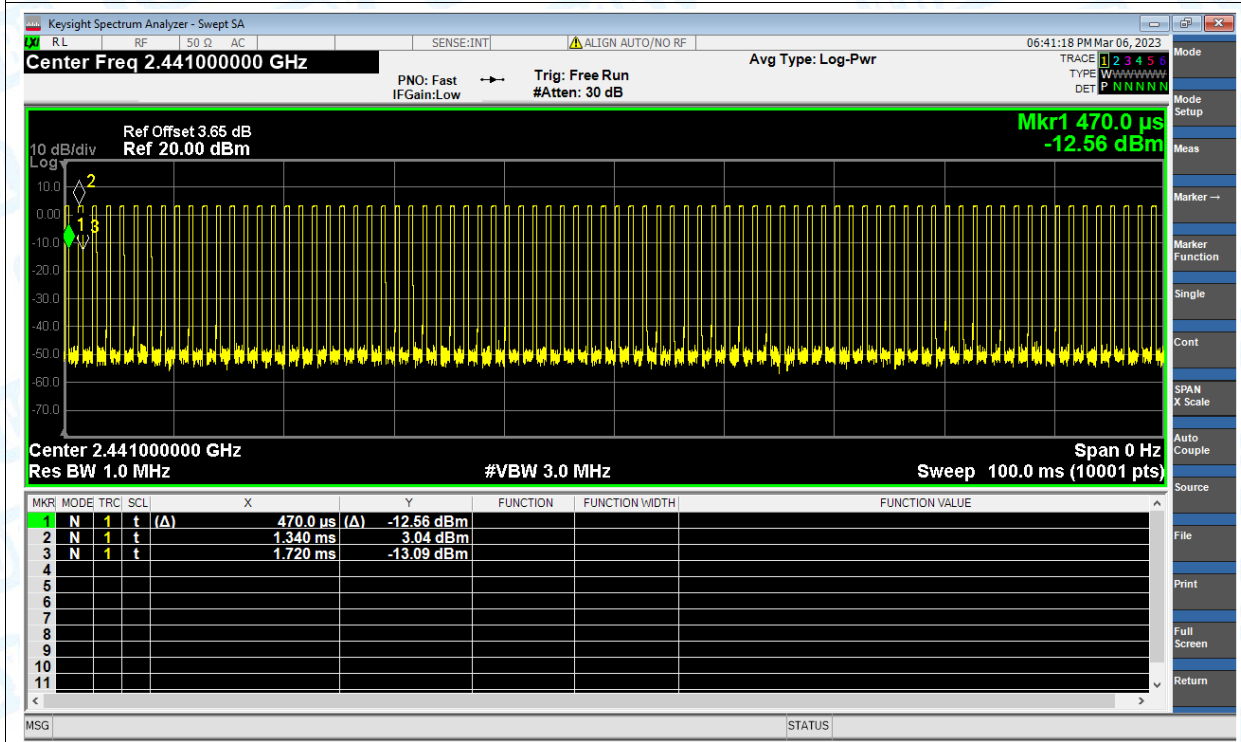

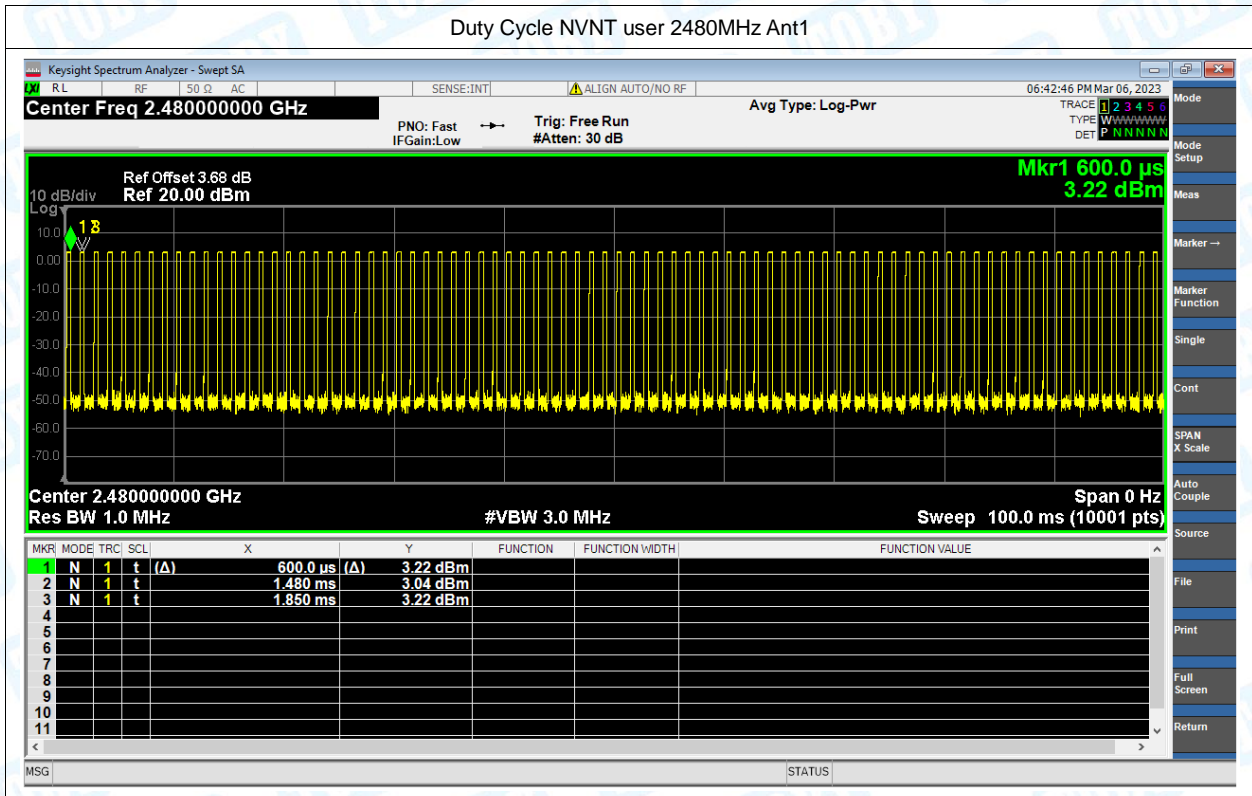


2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	user	2402	Ant1	3.024	21	Pass
NVNT	user	2441	Ant1	1.918	21	Pass
NVNT	user	2480	Ant1	3.329	21	Pass


Test Graphs

Power NVNT user 2402MHz Ant1

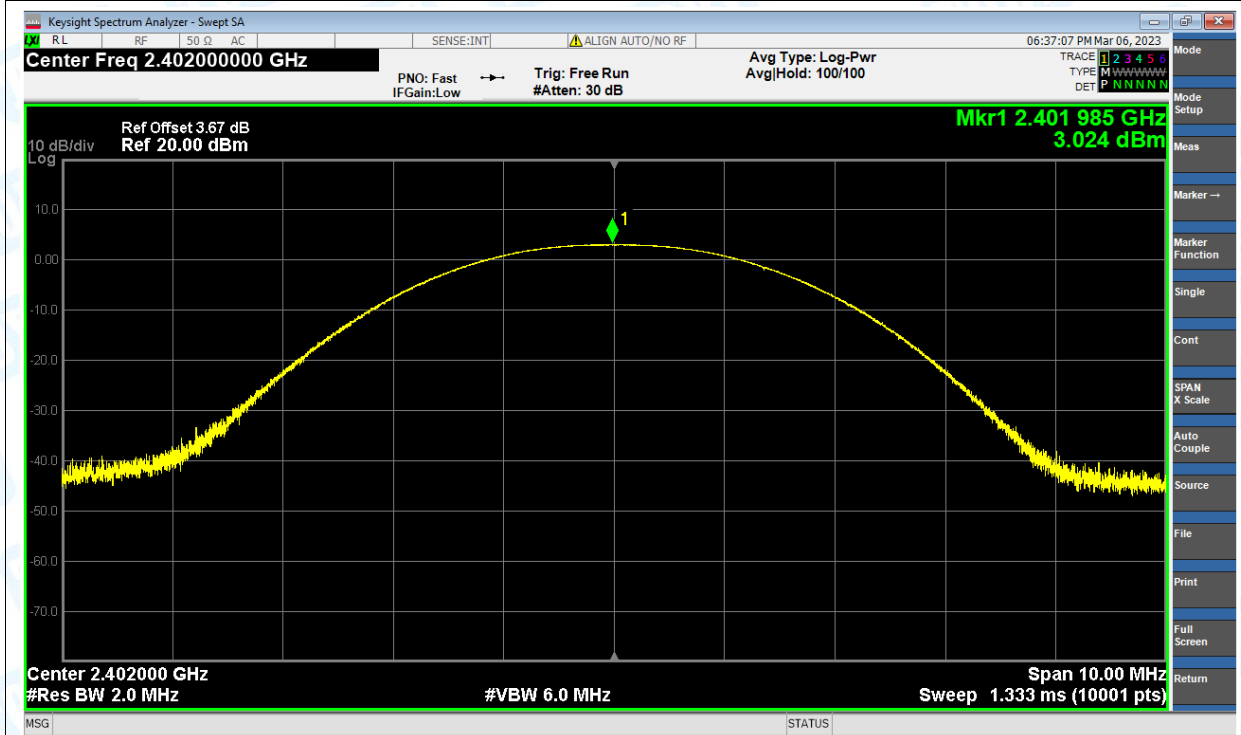

Power NVNT user 2441MHz Ant1

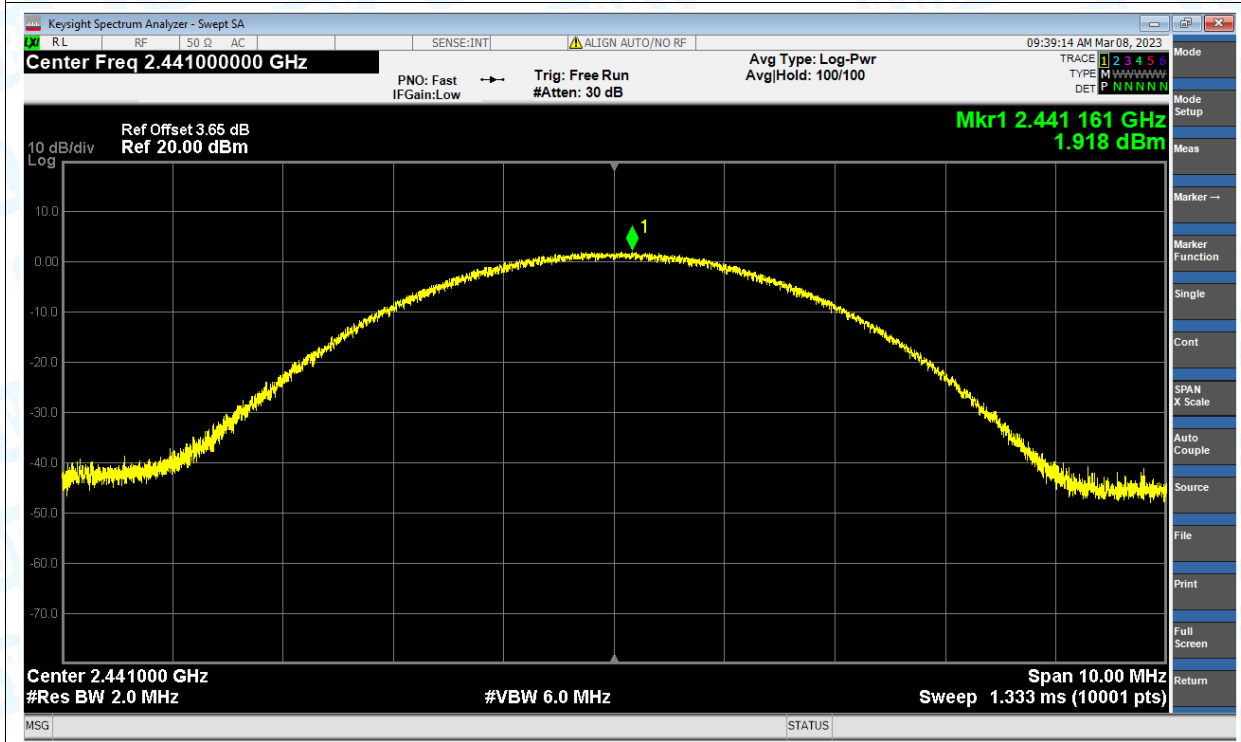

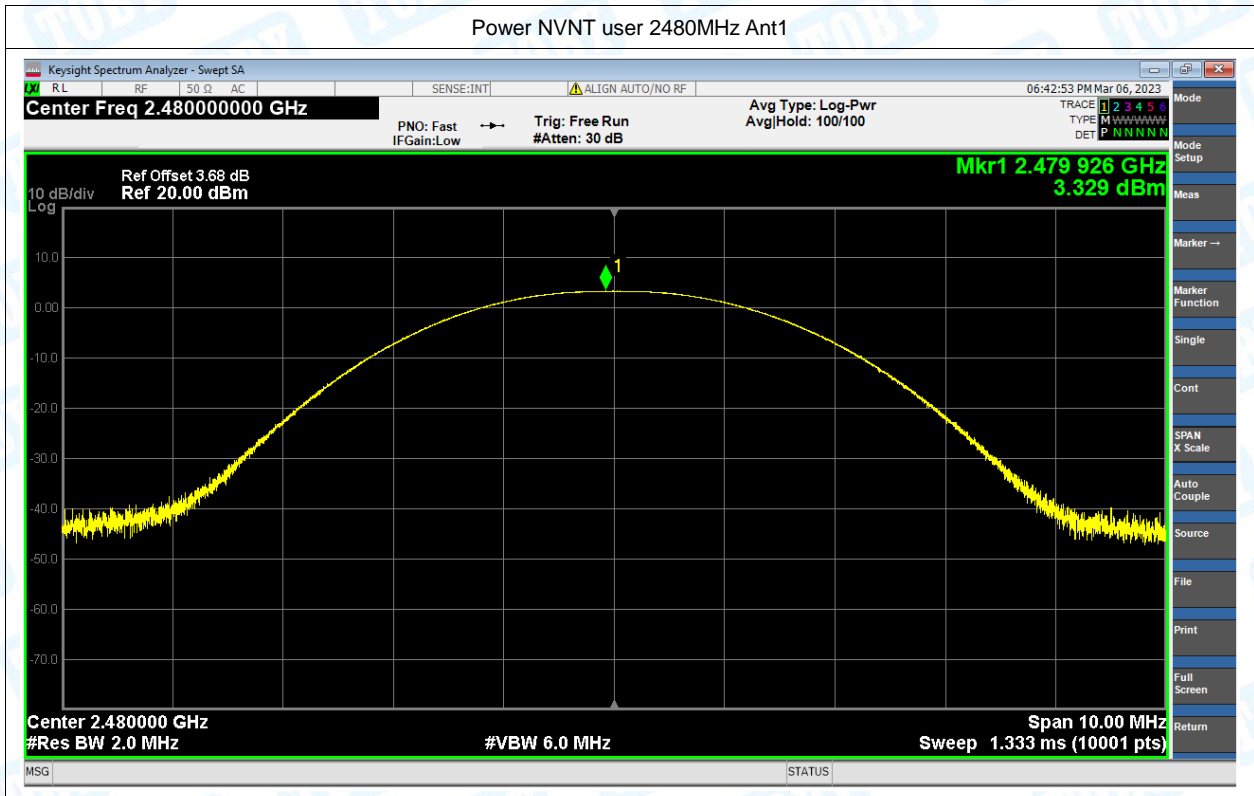


3. -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	user	2402	Ant1	0.96	----	Pass
NVNT	user	2441	Ant1	0.93	----	Pass
NVNT	user	2480	Ant1	0.93	----	Pass


Test Graphs

-20dB Bandwidth NVNT user 2402MHz Ant1

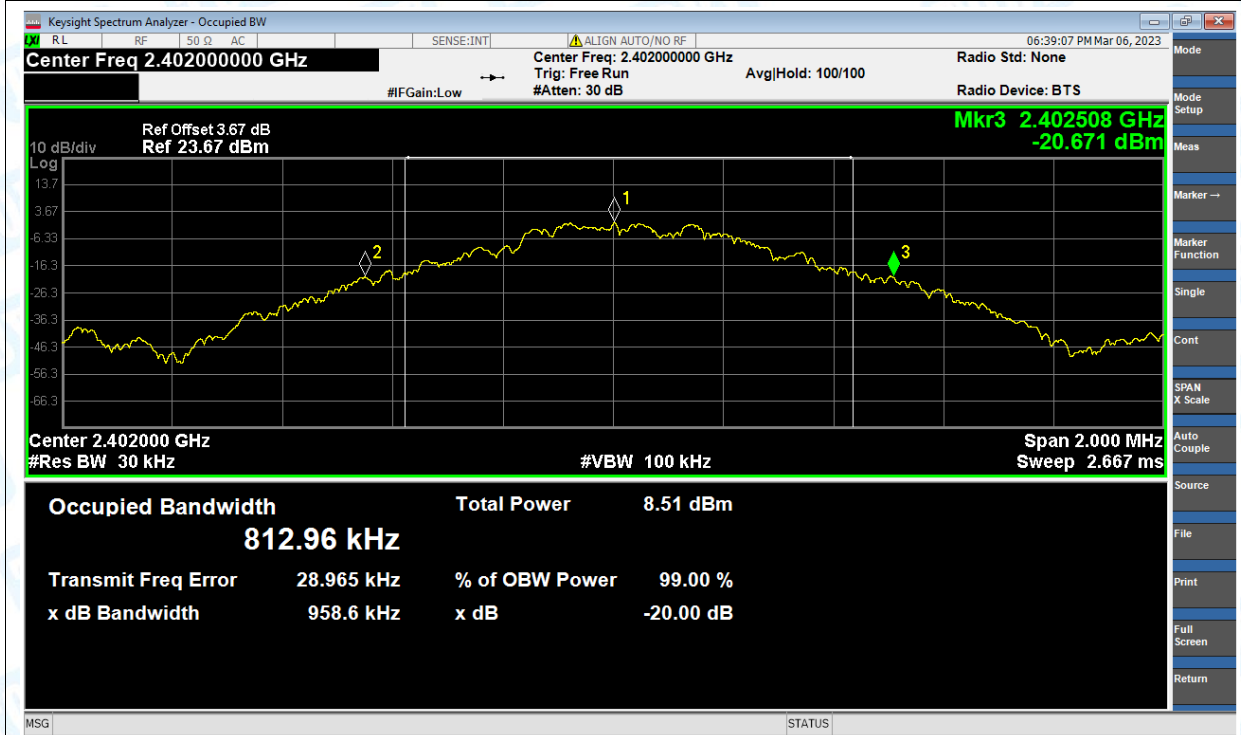

-20dB Bandwidth NVNT user 2441MHz Ant1

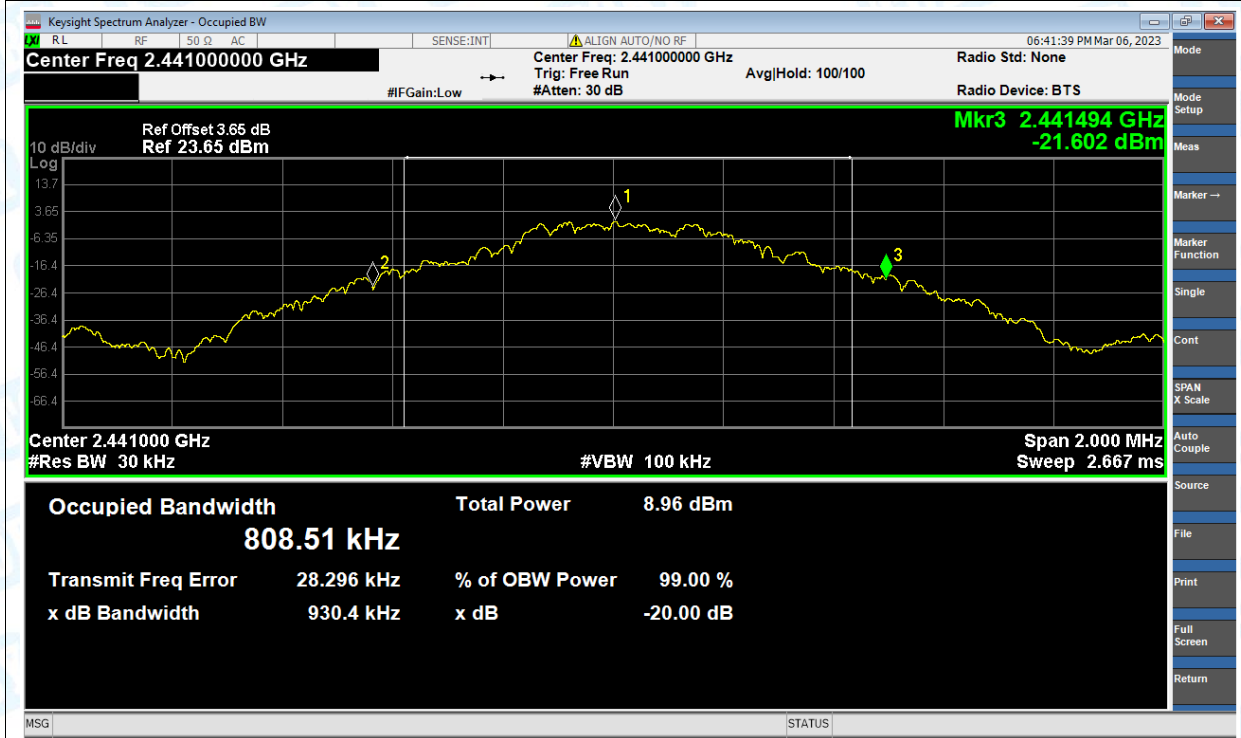

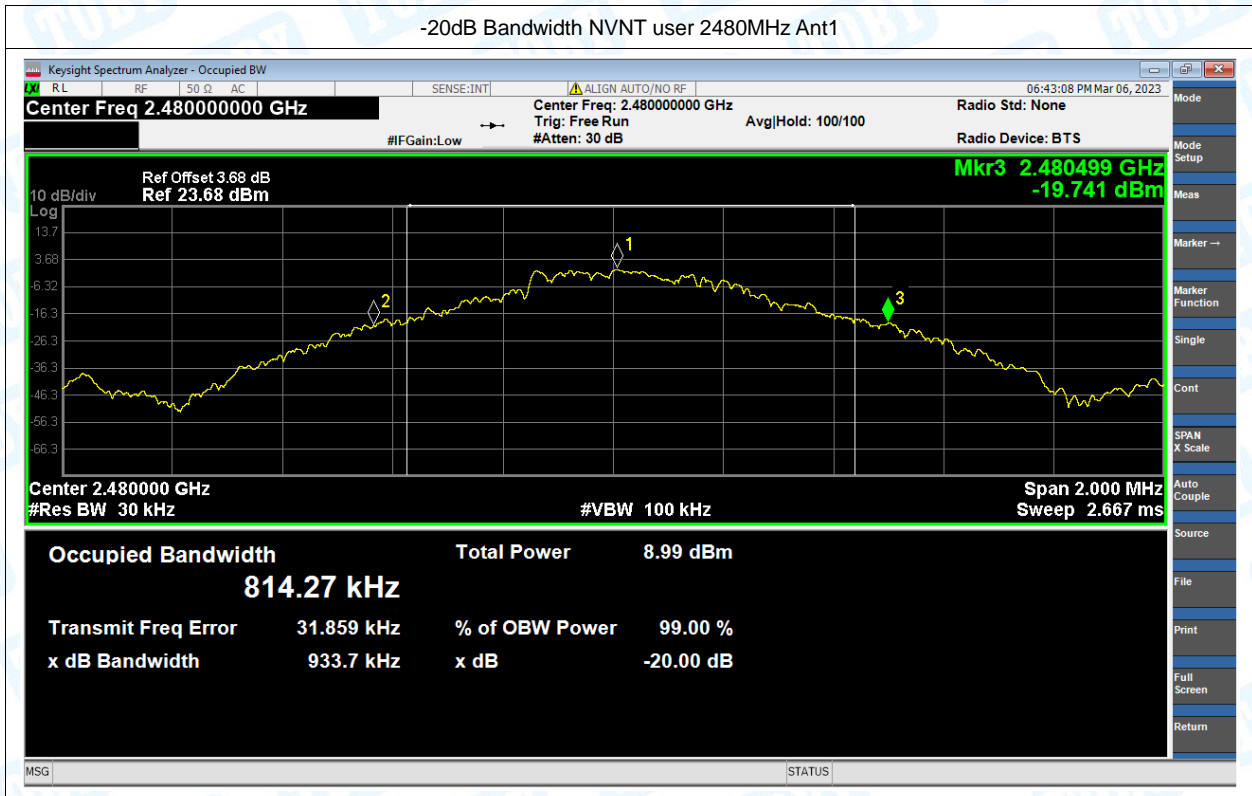


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	user	2402	Ant1	0.823
NVNT	user	2441	Ant1	0.818
NVNT	user	2480	Ant1	0.825


Test Graphs

OBW NVNT 1-DH1 2402MHz Ant1

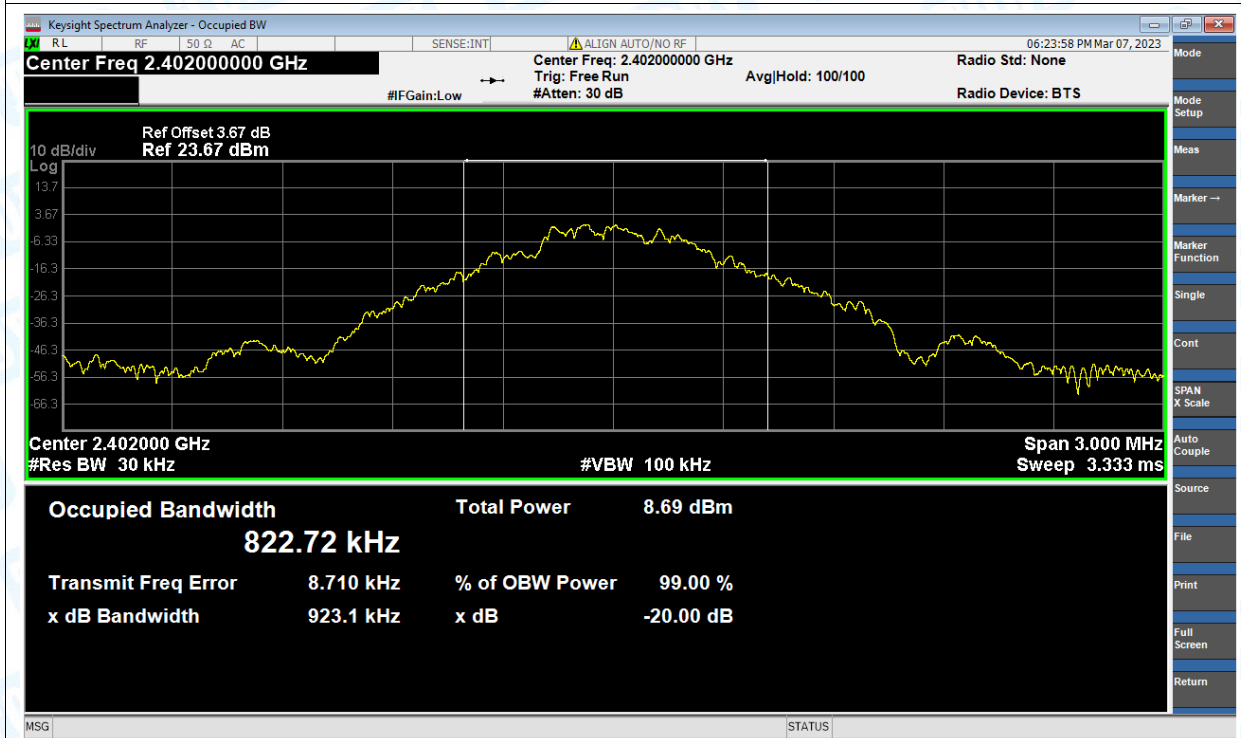

OBW NVNT 1-DH1 2441MHz Ant1

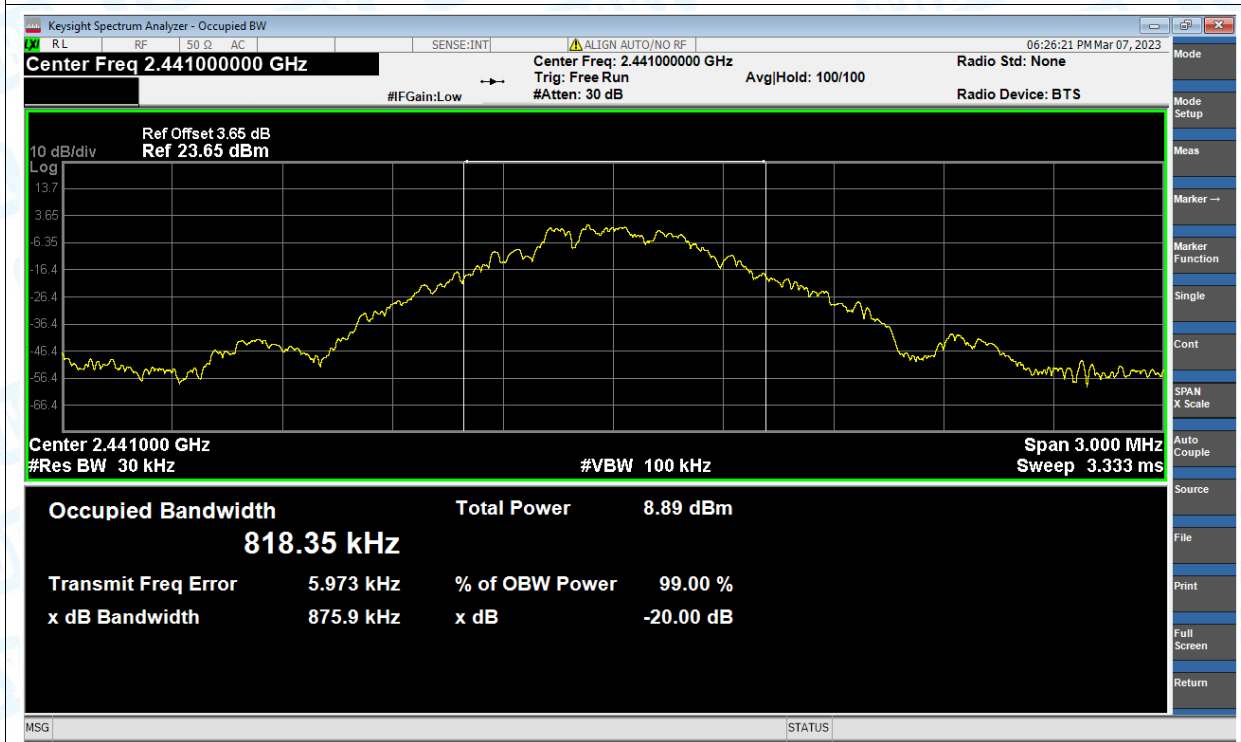

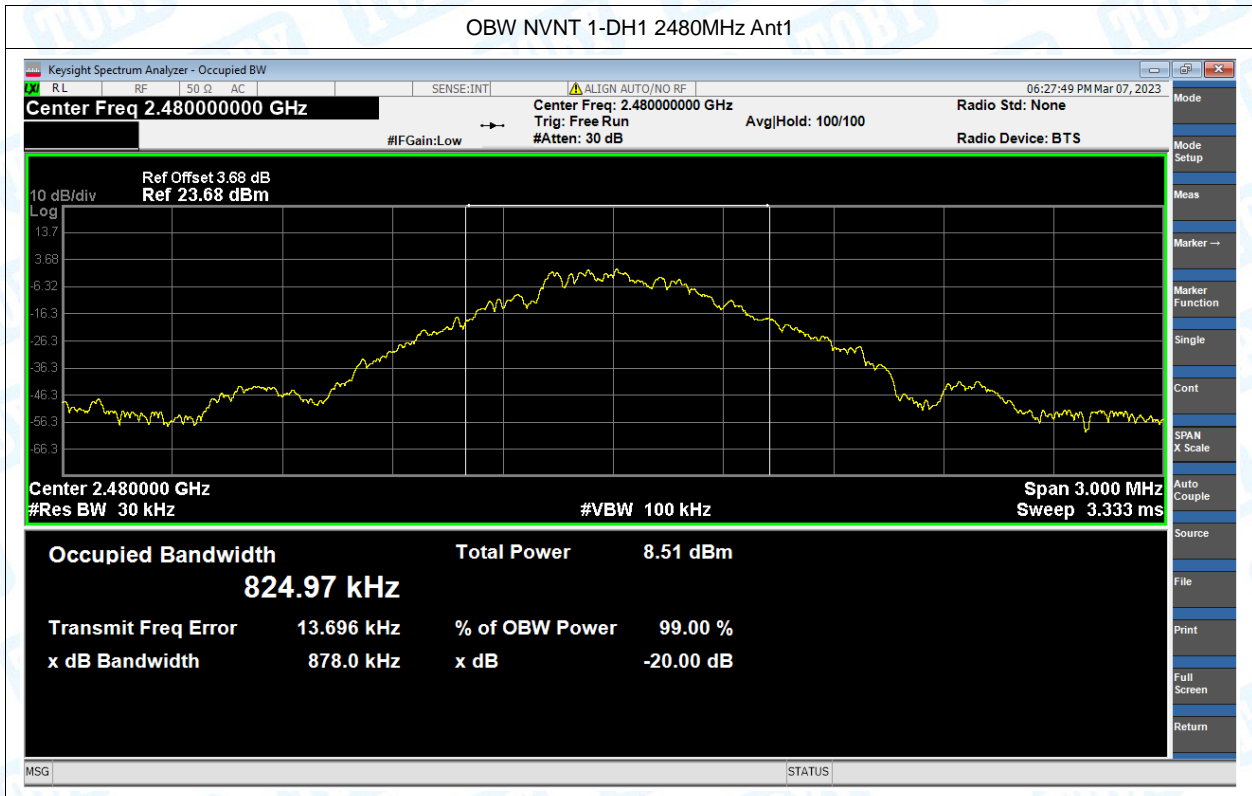


5. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	user	2402	Ant1	No-Hopping	-49.79	-20	Pass
NVNT	user	2480	Ant1	No-Hopping	-55.63	-20	Pass

Test Graphs


Band Edge NVNT user 2402MHz Ant1 No-Hopping Ref

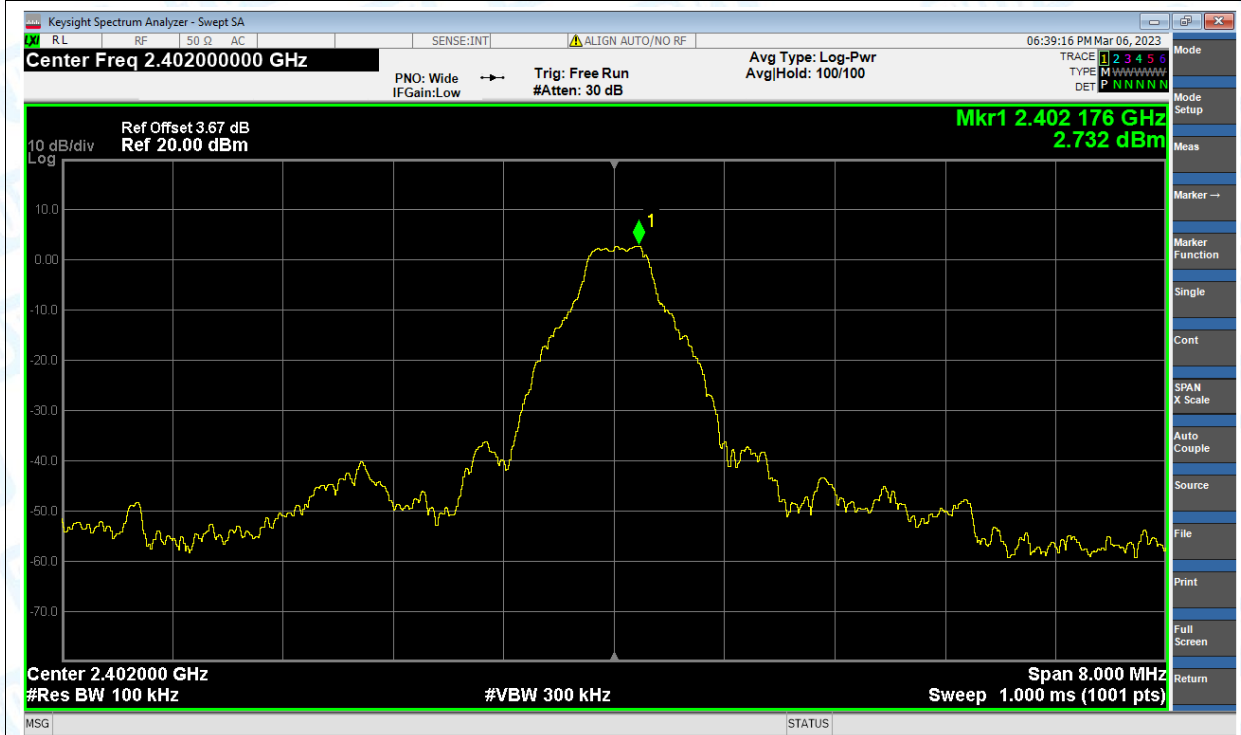


Band Edge NVNT user 2402MHz Ant1 No-Hopping Emission

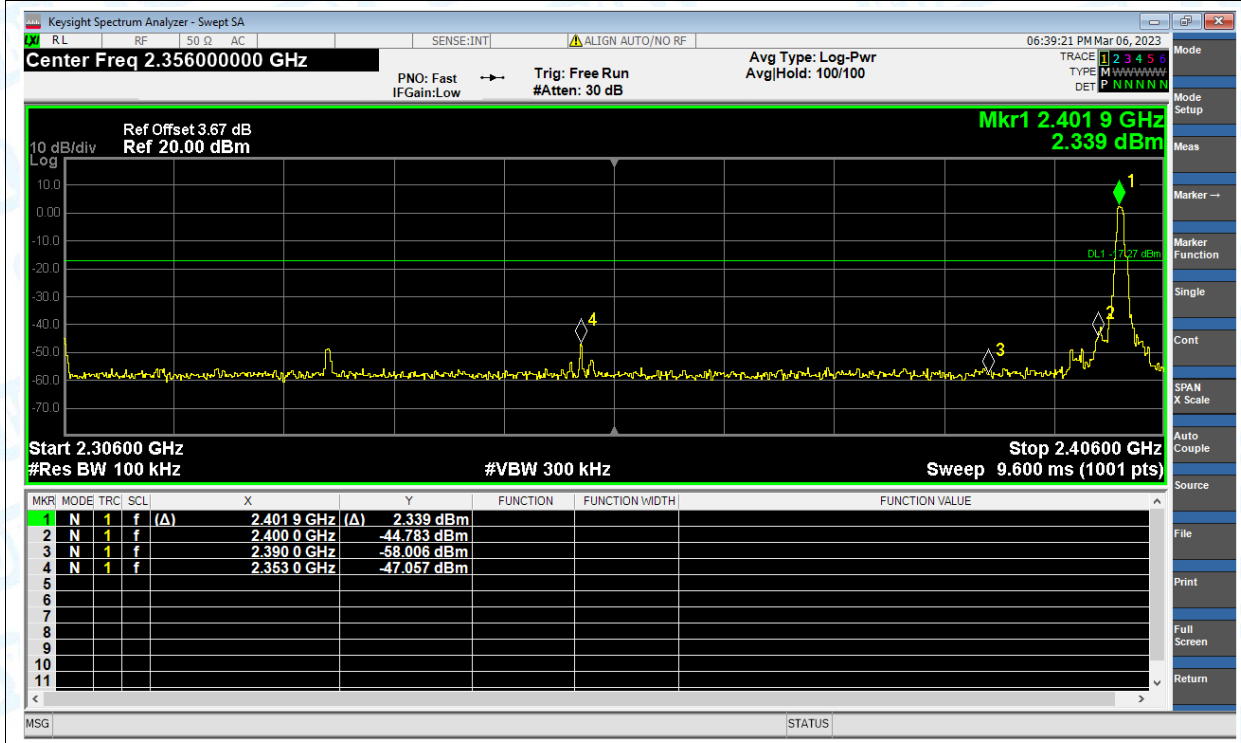

Band Edge NVNT user 2480MHz Ant1 No-Hopping Ref

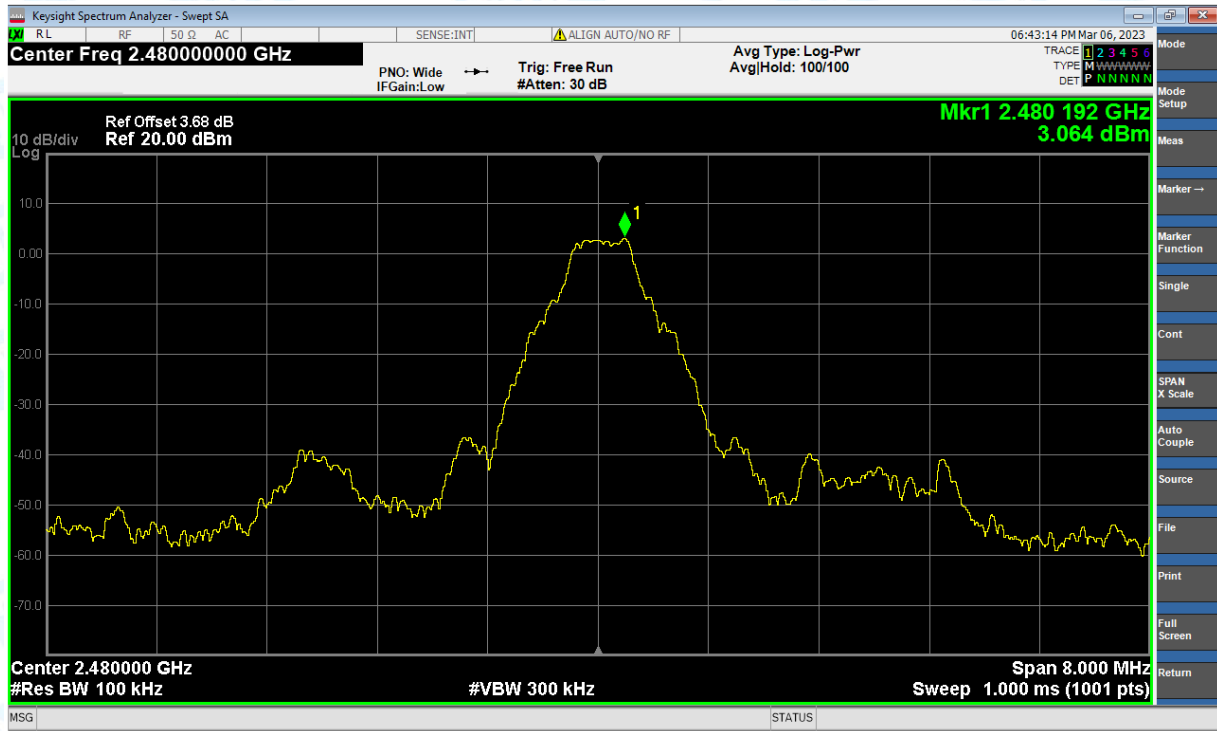

Band Edge NVNT user 2480MHz Ant1 No-Hopping Emission

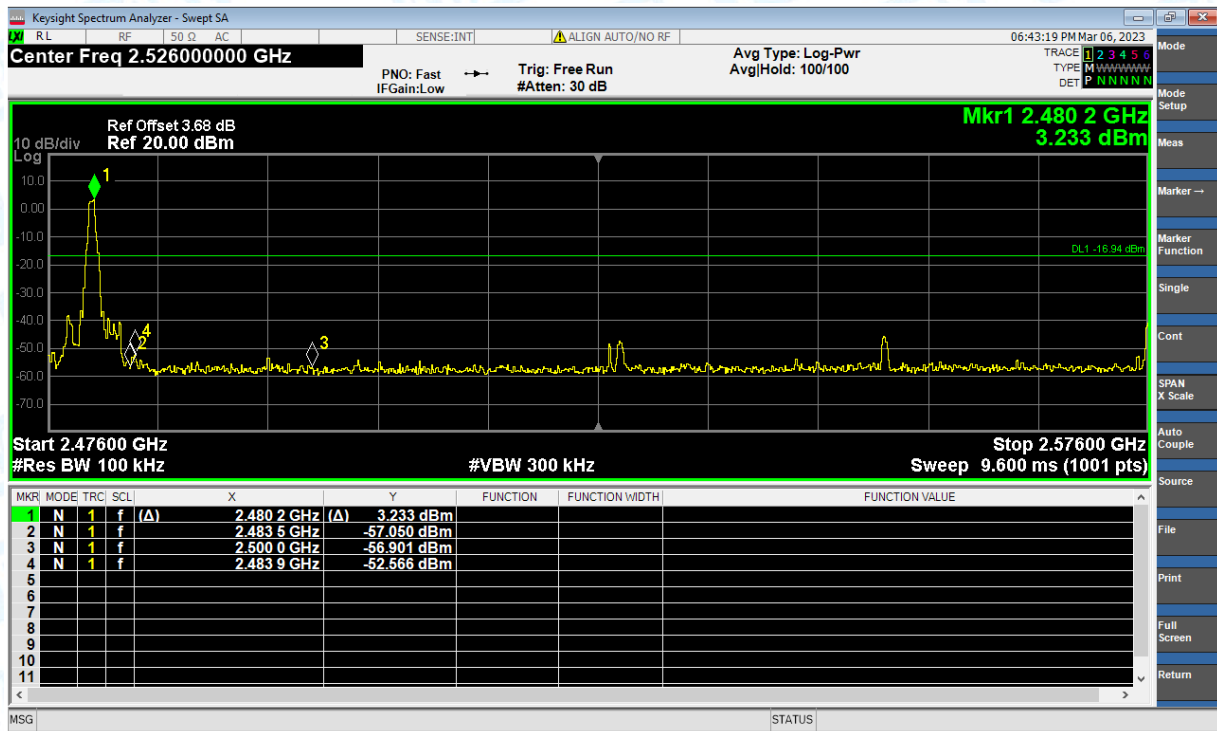


6. Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	user	2402	Ant1	Hopping	-44.35	-20	Pass
NVNT	user	2480	Ant1	Hopping	-42.21	-20	Pass

Test Graphs

Band Edge(Hopping) NVNT user 2402MHz Ant1 Hopping Ref

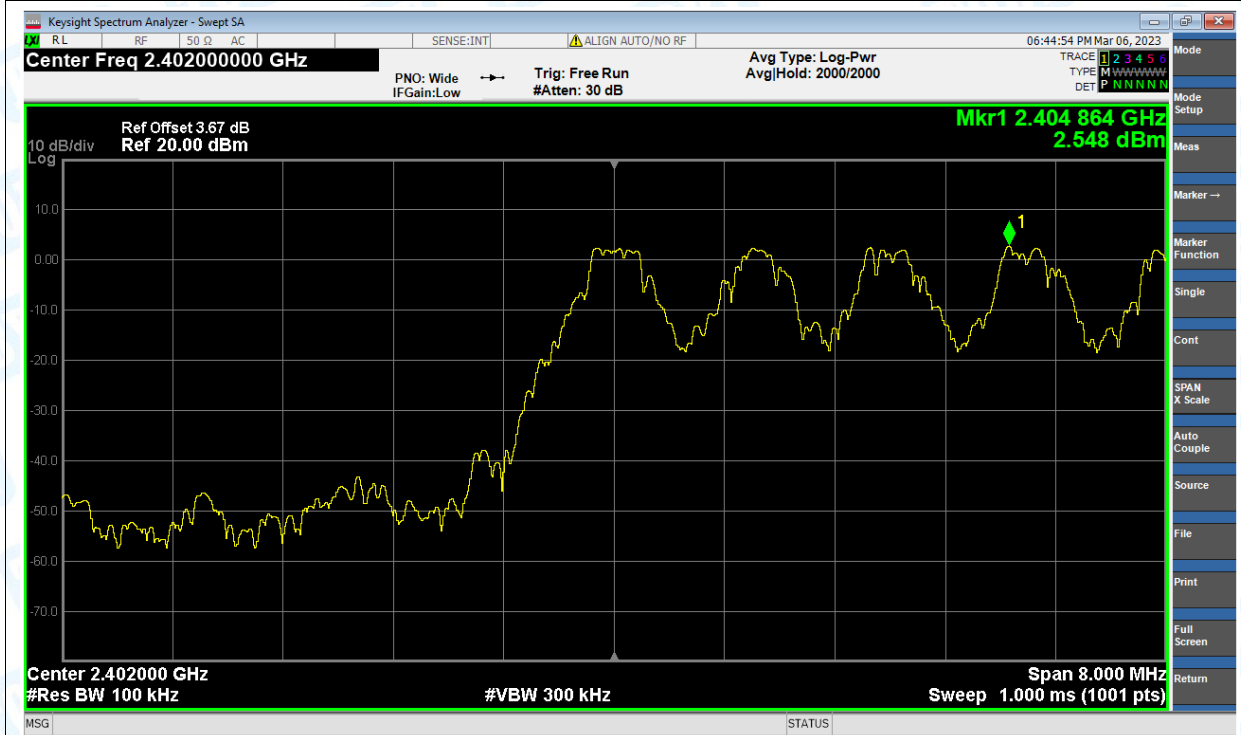


Band Edge(Hopping) NVNT user 2402MHz Ant1 Hopping Emission

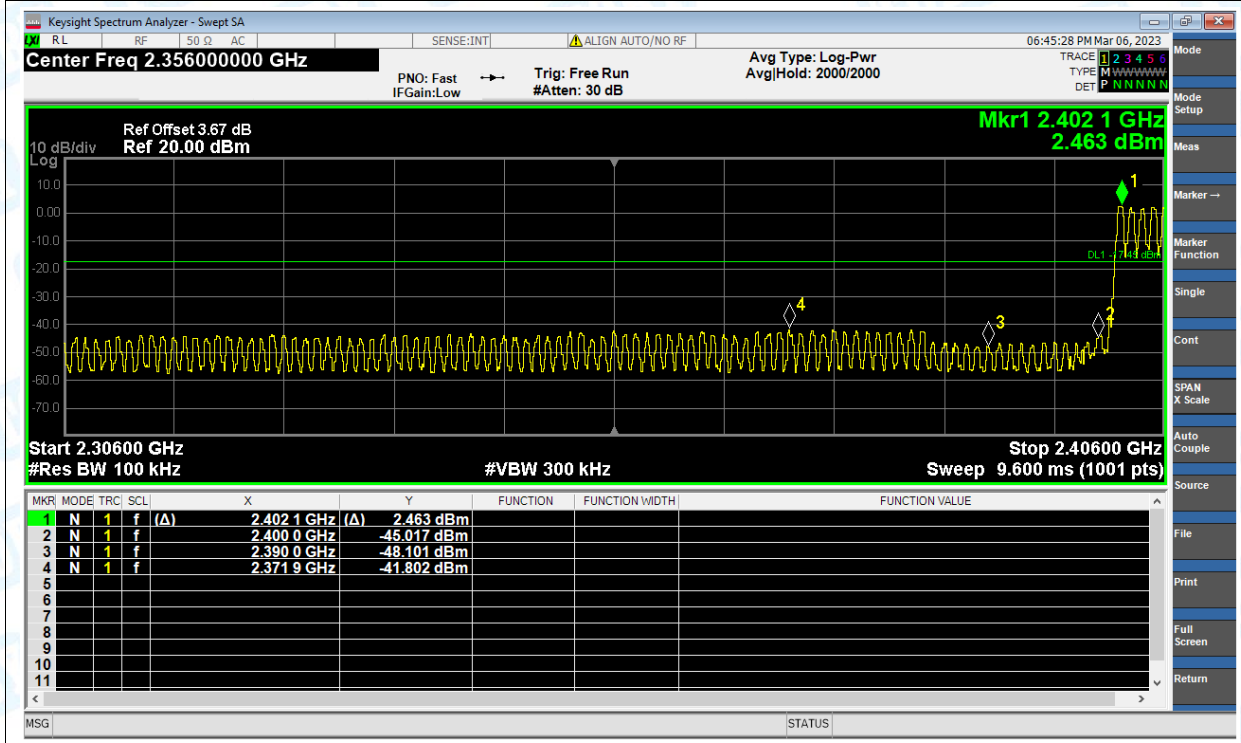

Band Edge(Hopping) NVNT user 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT user 2480MHz Ant1 Hopping Emission

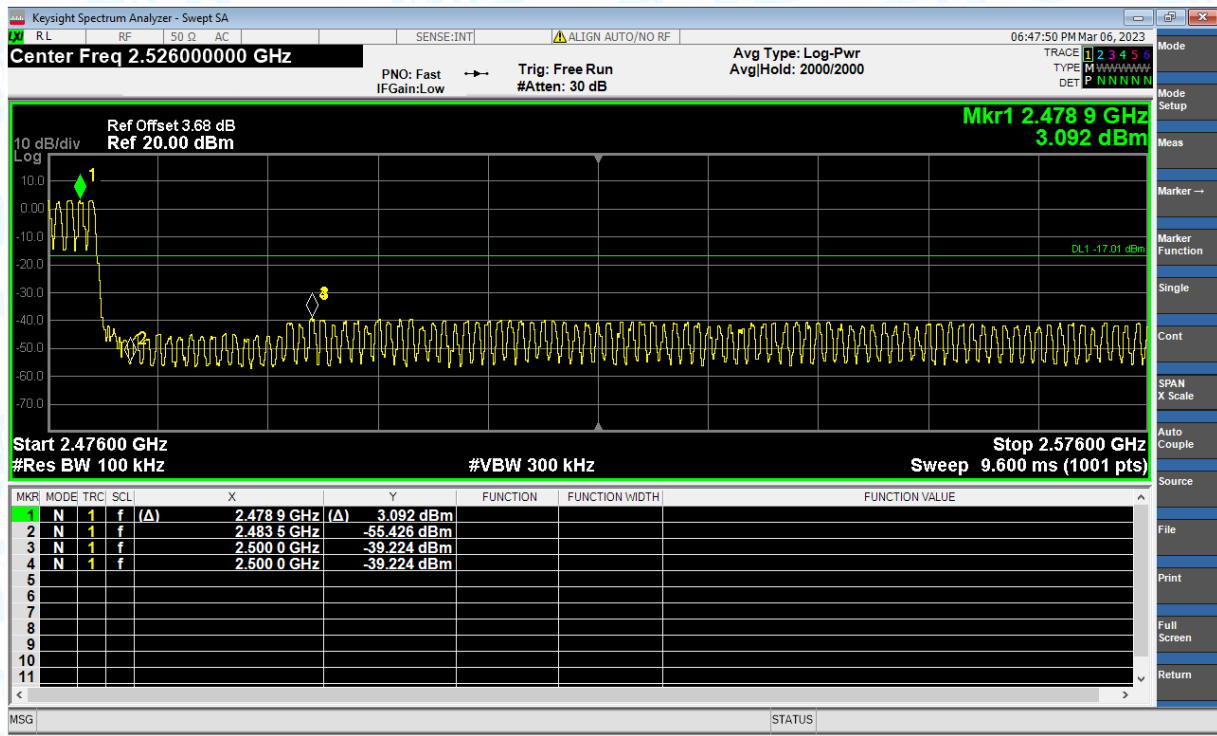


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	user	2402	Ant1	-42.1	-20	Pass
NVNT	user	2441	Ant1	-46.23	-20	Pass
NVNT	user	2480	Ant1	-41.76	-20	Pass

Test Graphs


Tx. Spurious NVNT user 2402MHz Ant1 Ref

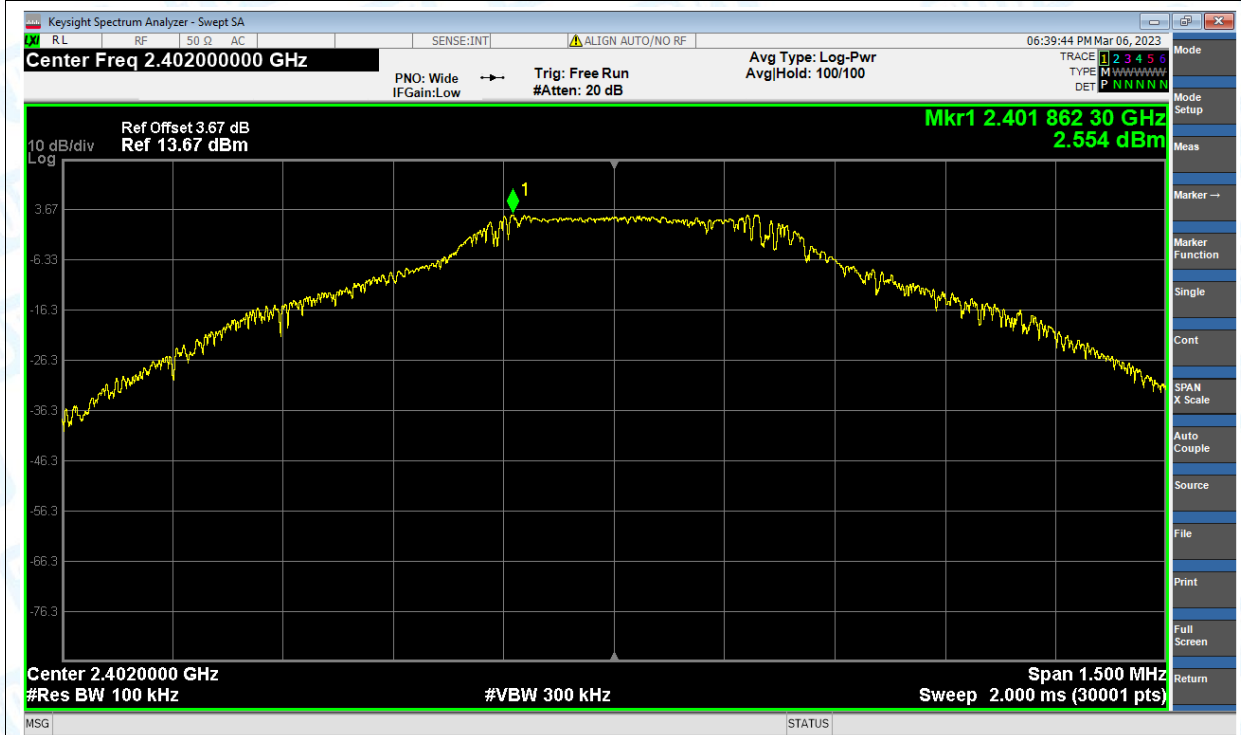


Tx. Spurious NVNT user 2402MHz Ant1 Emission


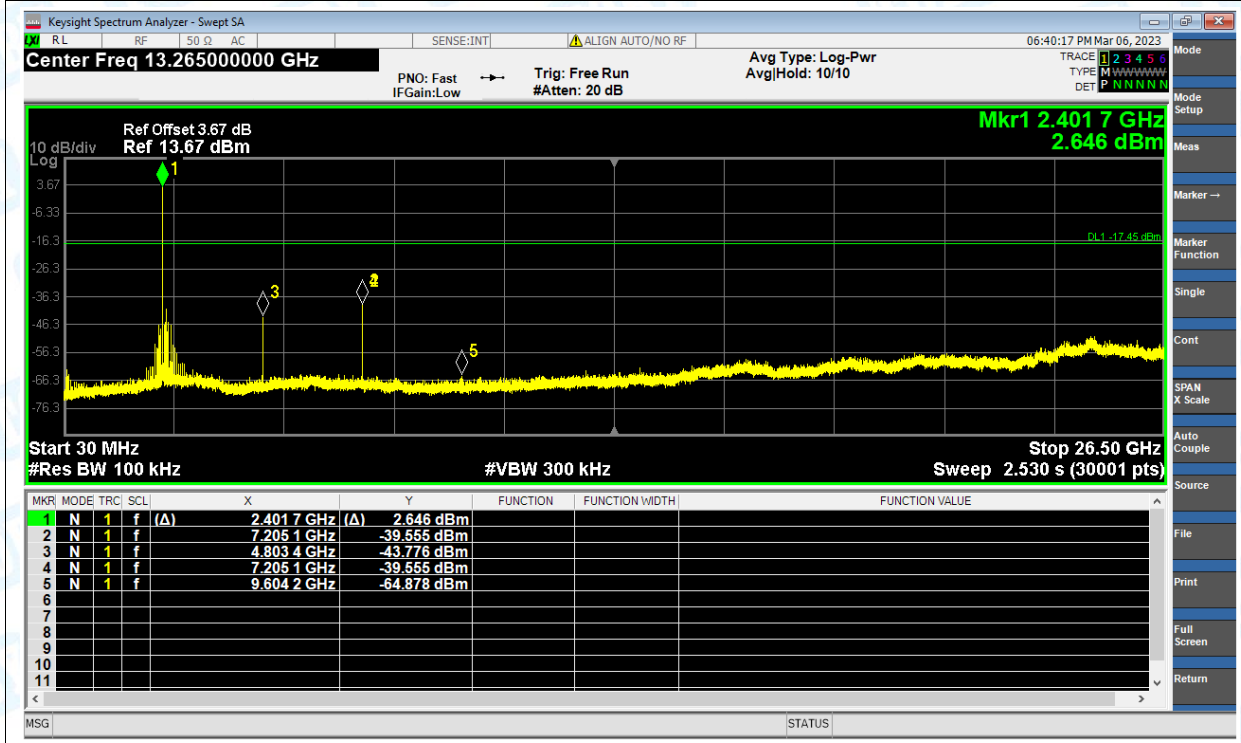


Tx. Spurious NVNT user 2441MHz Ant1 Ref

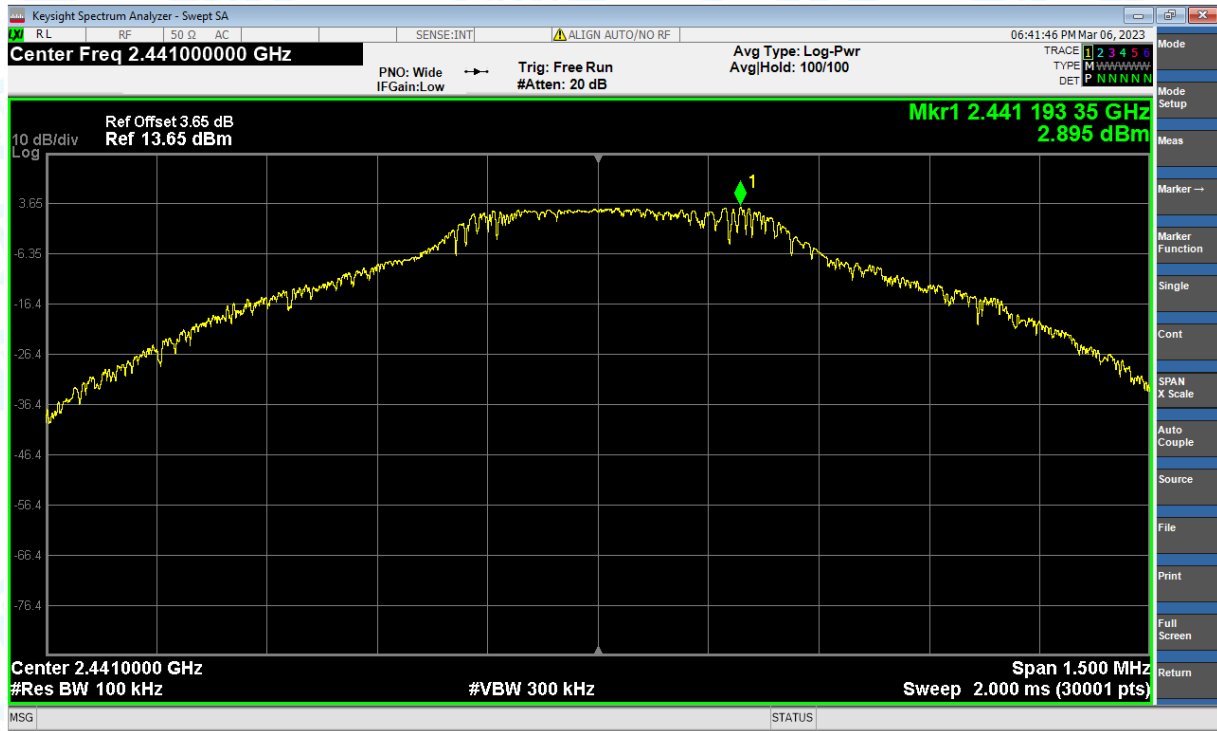

Tx. Spurious NVNT user 2441MHz Ant1 Emission

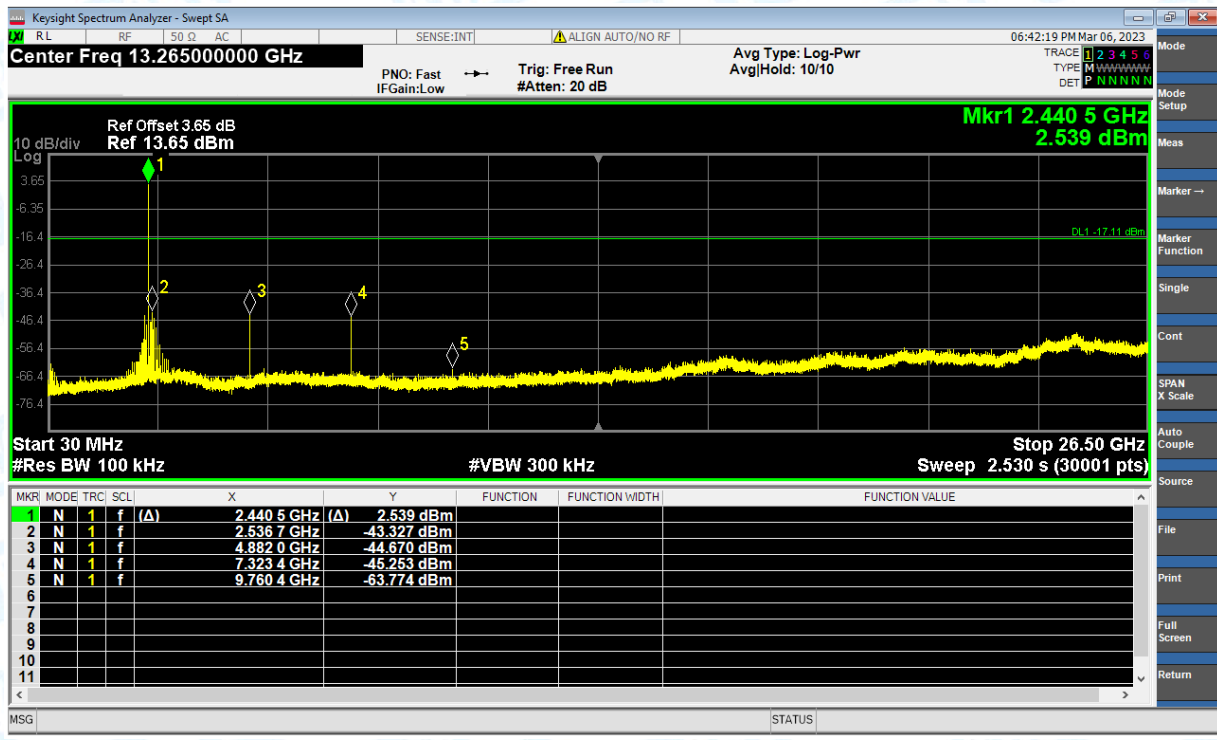

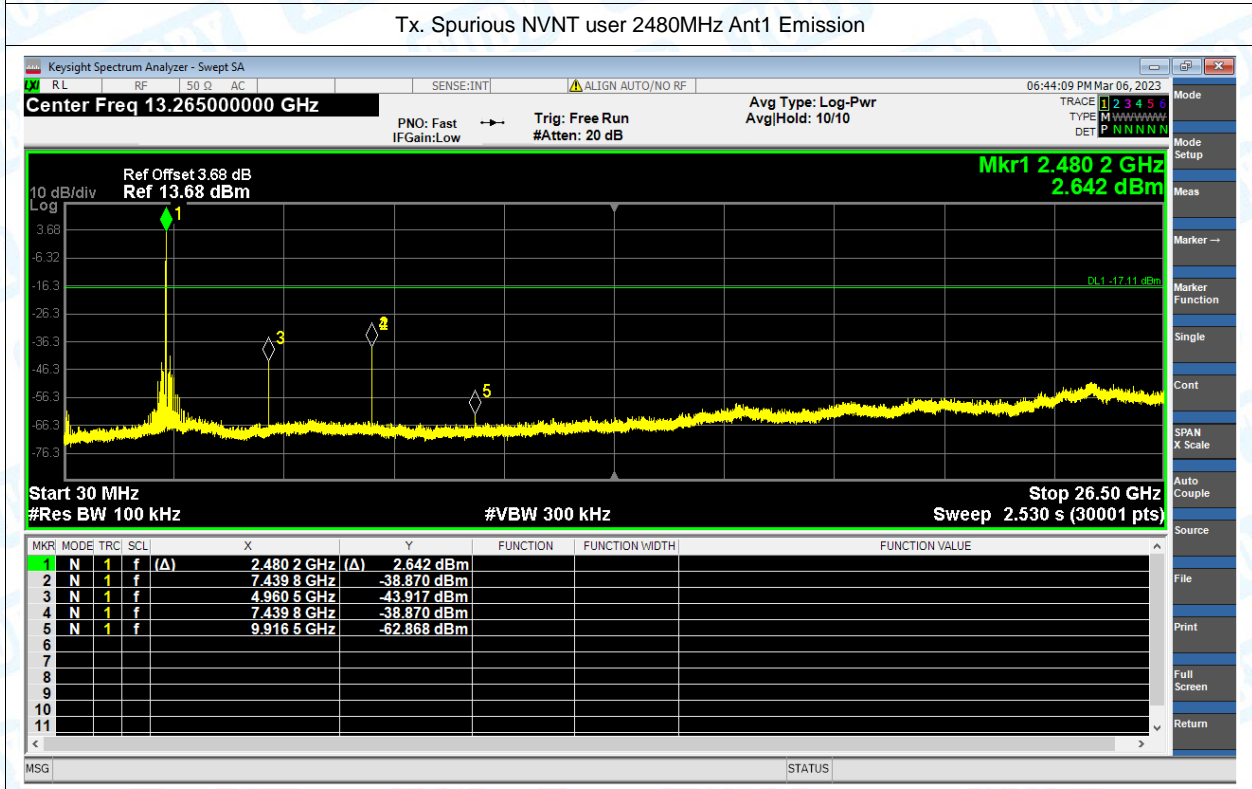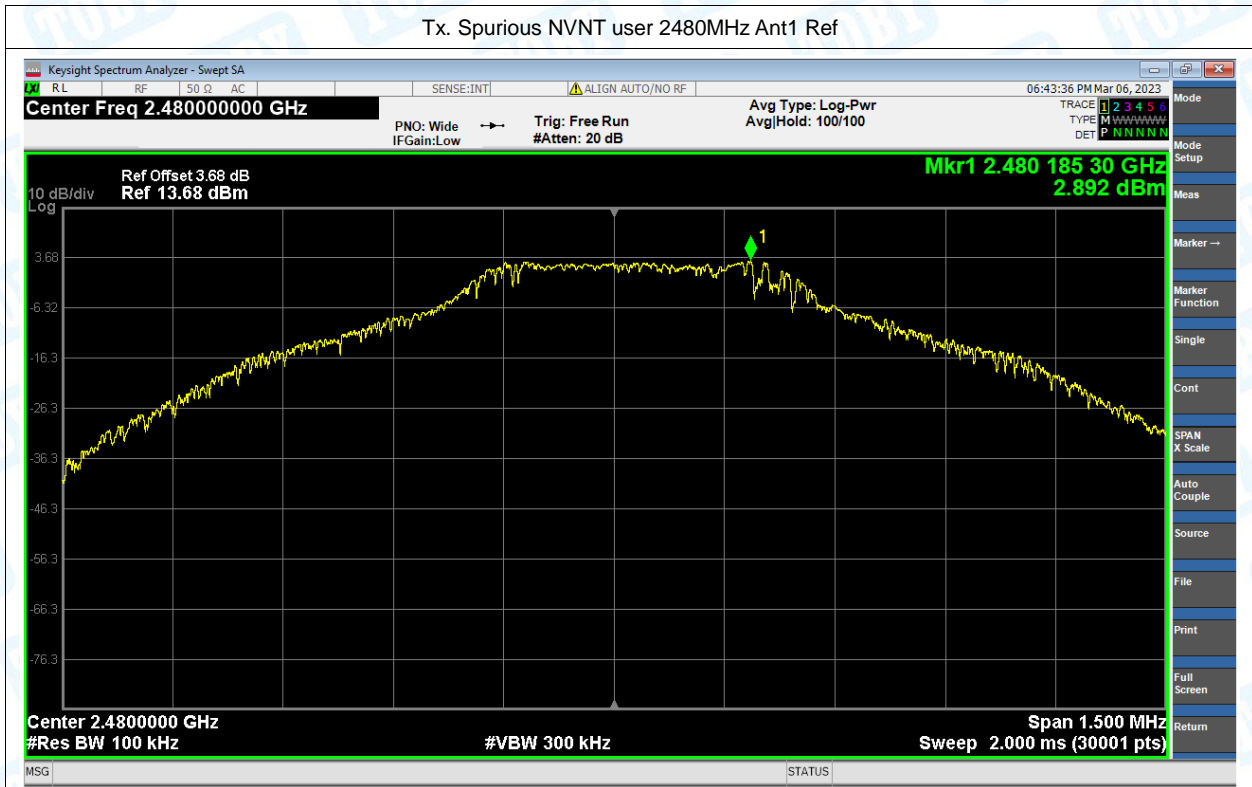


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	user	2402	Ant1	No-Hopping	2310	-46.27	2.5	51.49	Peak	74	Pass
NVNT	user	2402	Ant1	No-Hopping	2310	-55.21	2.5	42.55	Average	54	Pass
NVNT	user	2402	Ant1	No-Hopping	2353.104	-38.93	2.5	58.83	Peak	74	Pass
NVNT	user	2402	Ant1	No-Hopping	2353.104	-45.57	2.5	52.19	Average	54	Pass
NVNT	user	2402	Ant1	No-Hopping	2390	-45.56	2.5	52.2	Peak	74	Pass
NVNT	user	2402	Ant1	No-Hopping	2390	-54.69	2.5	43.07	Average	54	Pass
NVNT	user	2480	Ant1	No-Hopping	2483.5	-42.21	2.5	55.55	Peak	74	Pass
NVNT	user	2480	Ant1	No-Hopping	2483.5	-50.4	2.5	47.36	Average	54	Pass
NVNT	user	2480	Ant1	No-Hopping	2483.584	-40.55	2.5	57.21	Peak	74	Pass
NVNT	user	2480	Ant1	No-Hopping	2483.512	-50.4	2.5	47.36	Average	54	Pass
NVNT	user	2480	Ant1	No-Hopping	2500	-45.49	2.5	52.27	Peak	74	Pass
NVNT	user	2480	Ant1	No-Hopping	2500	-54.31	2.5	43.45	Average	54	Pass

Test Graphs


Restrict Band NVNT user 2402MHz Ant1 No-Hopping Peak

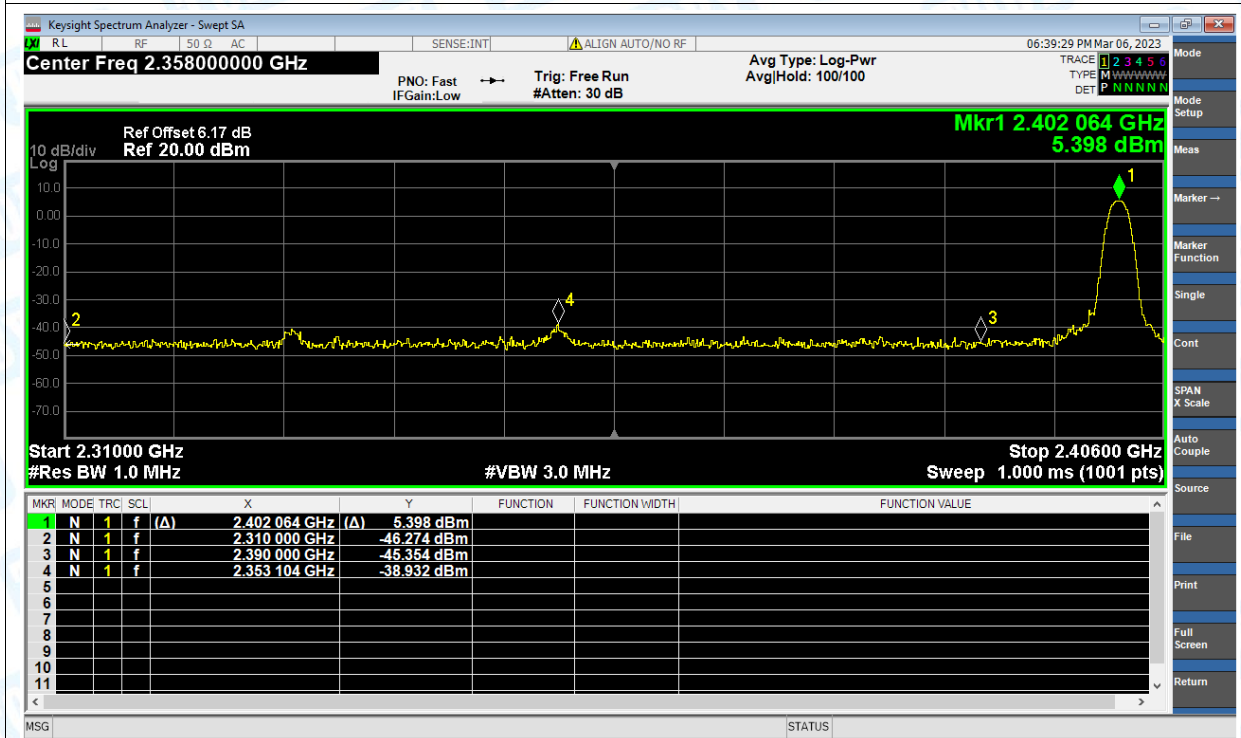


Restrict Band NVNT user 2402MHz Ant1 No-Hopping Average

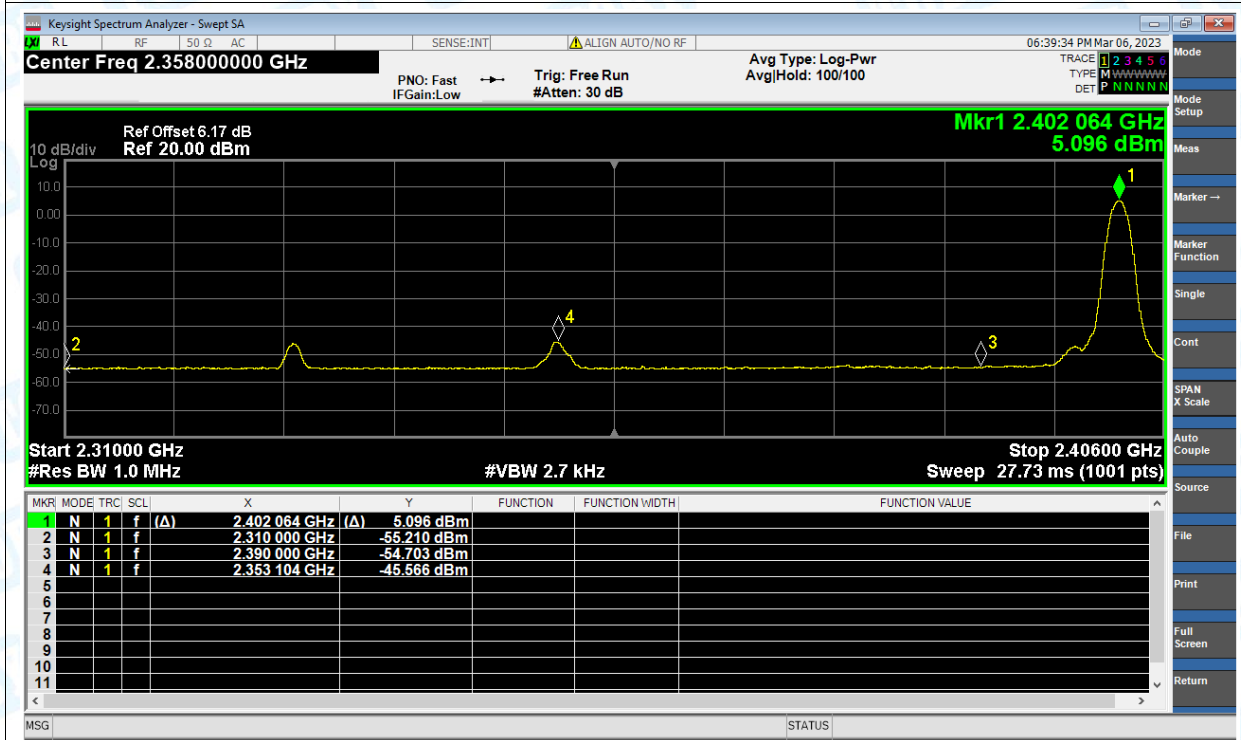

Restrict Band NVNT user 2480MHz Ant1 No-Hopping Peak

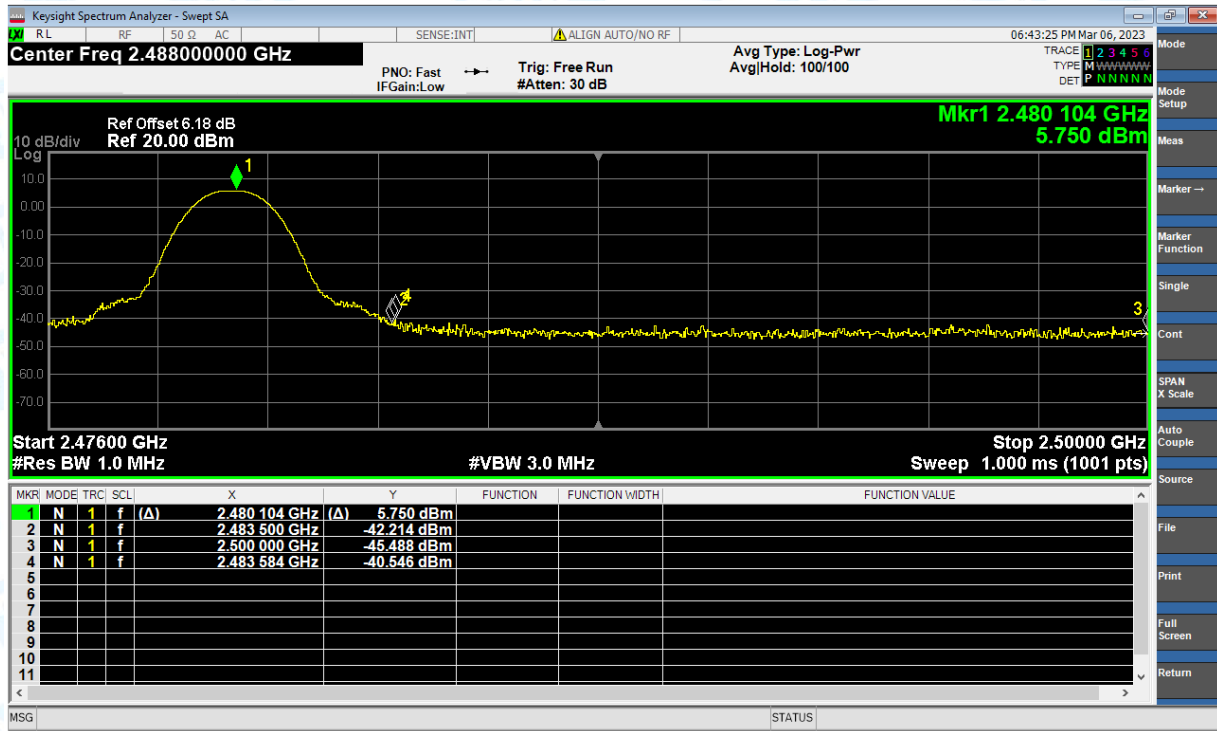

Restrict Band NVNT user 2480MHz Ant1 No-Hopping Average

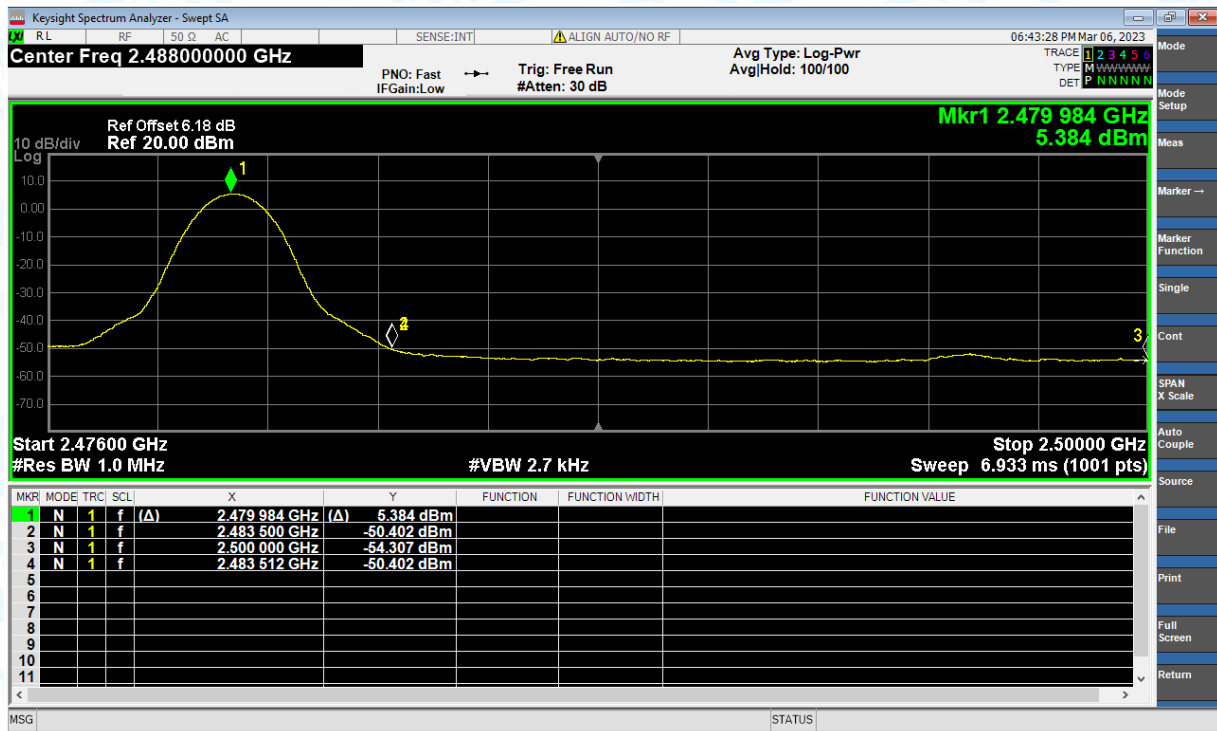


9. Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	user	Ant1	2441.044	2442.031	0.987	0.64	Pass


Test Graphs

CFS NVNT user 2441MHz Ant1

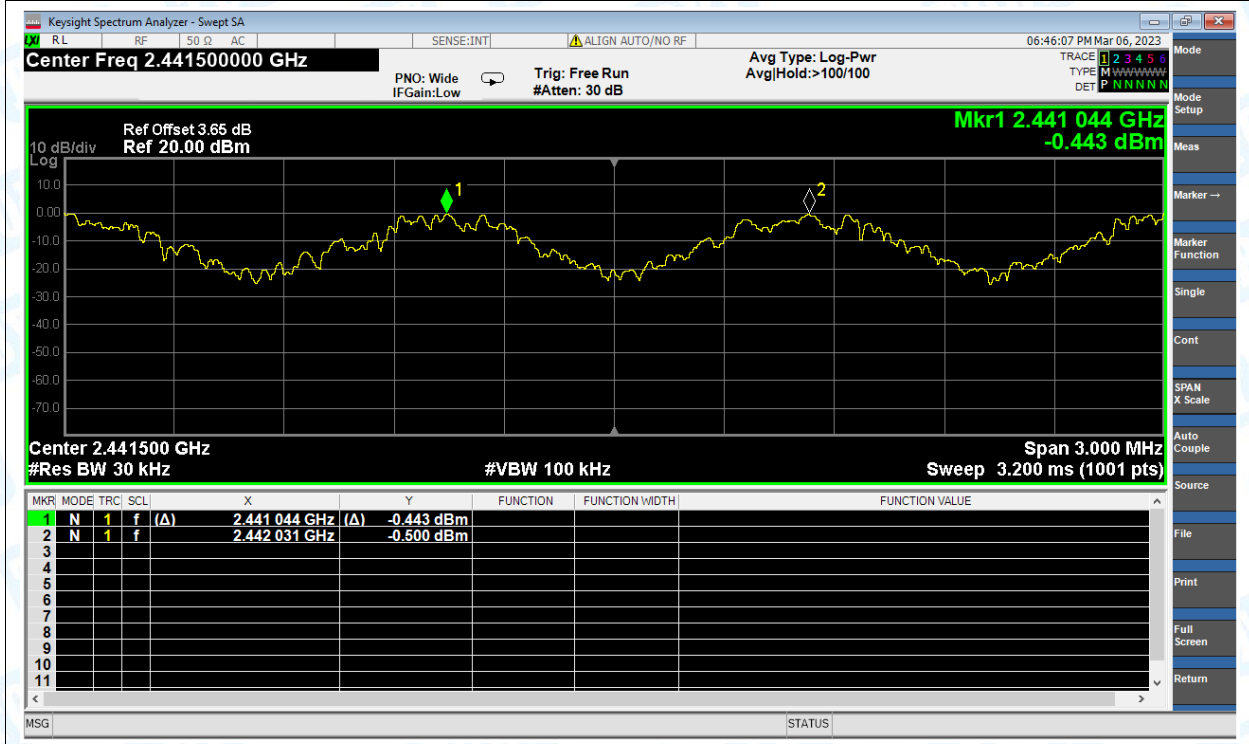


10. Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	user	Ant1	79	15	Pass

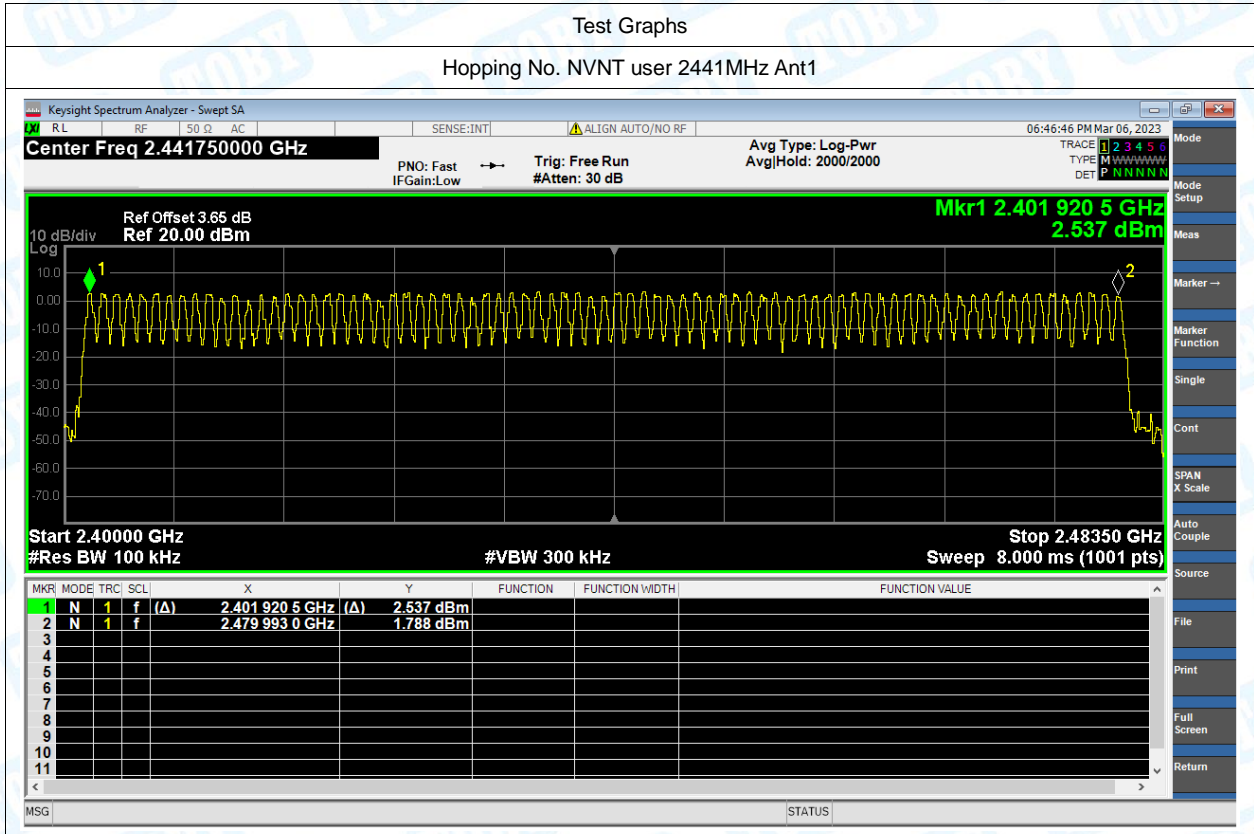

11. Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	user	2441	Ant1	0.372	119.04	31600	400	Pass

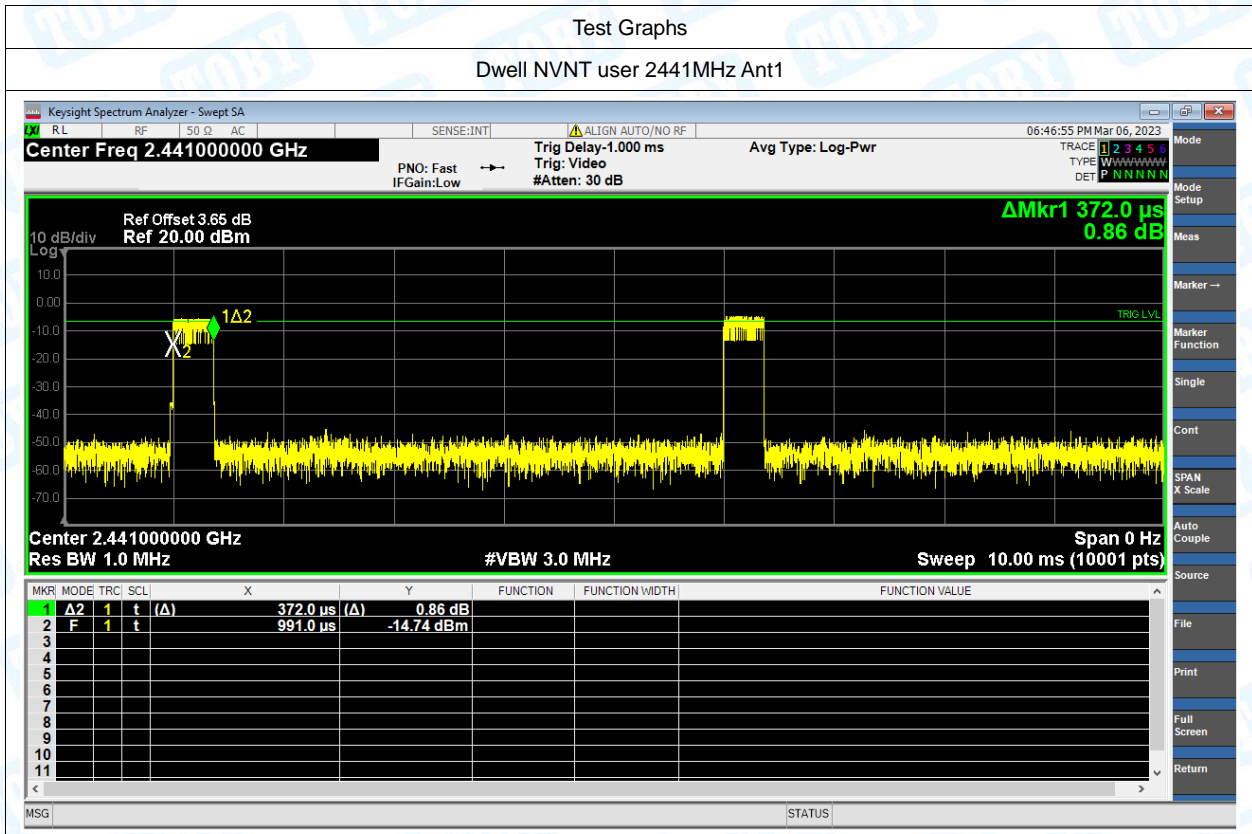

-----END OF REPORT-----