




3.5. Bandwidth

<u>Limit</u>

N/A

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = $1\% \sim 5\%$ occupied bandwidth.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


Test Mode

Please refer to the clause 2.4.

Test Results


Modulation type	Channel	Occupied Bandwidth (MHz)	20dB Bandwidth (MHz)	20dB Bandwidth *2/3 (MHz)
	00	0.857	0.924	616.000
GFSK	39	0.857	0.861	574.000
	78	0.857	0.927	618.000
π /4-DQPSK	00	1.154	1.239	826.000
	39	1.157	1.242	828.000
	78	1.154	1.236	824.000
	00	1.142	1.203	802.000
8-DPSK	39	1.145	1.242	828.000
	78	1.142	1.203	802.000



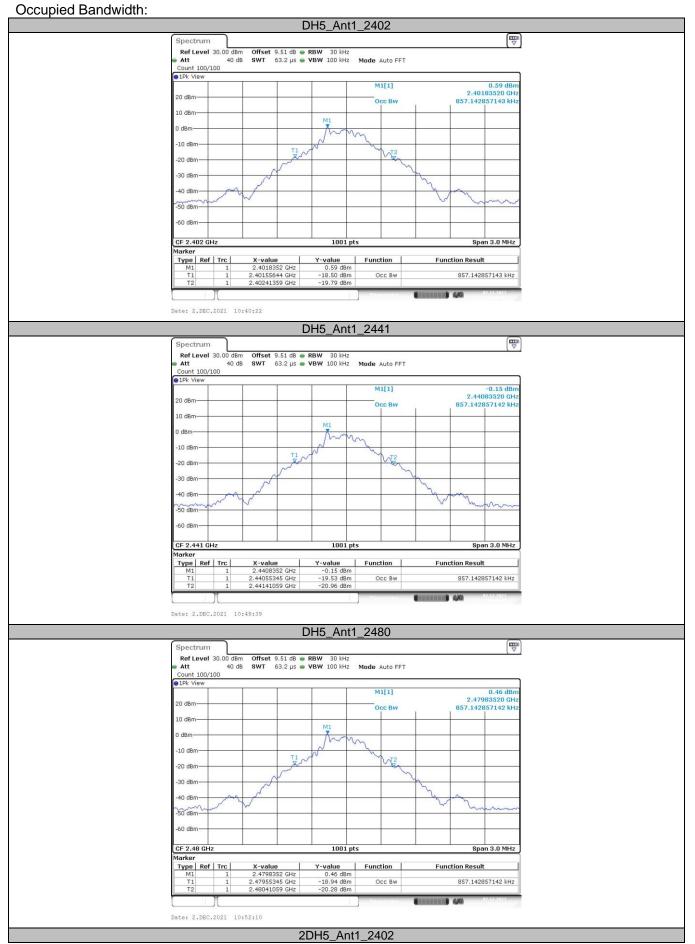






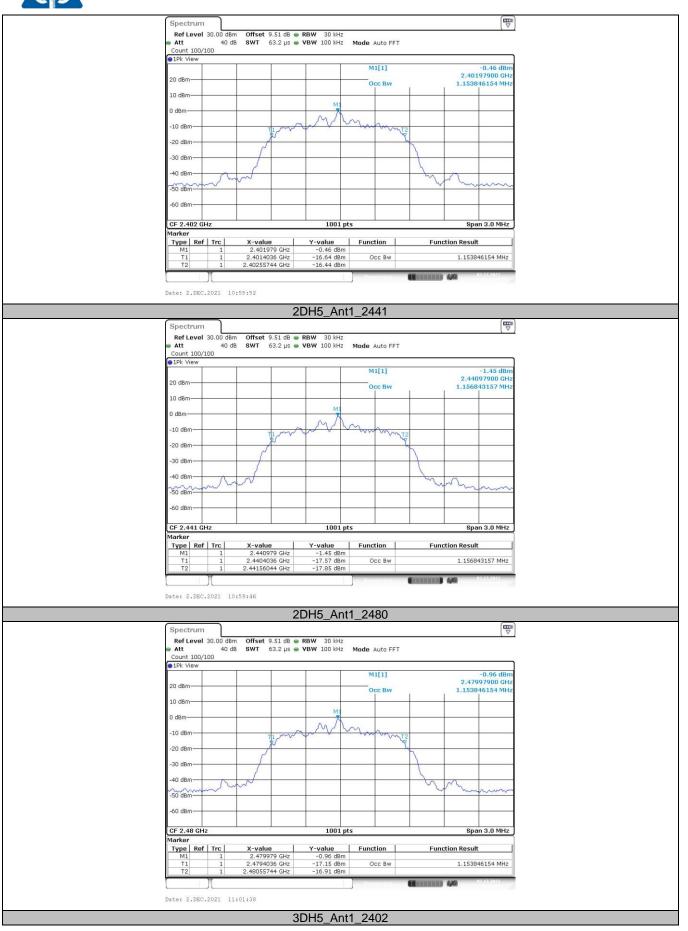



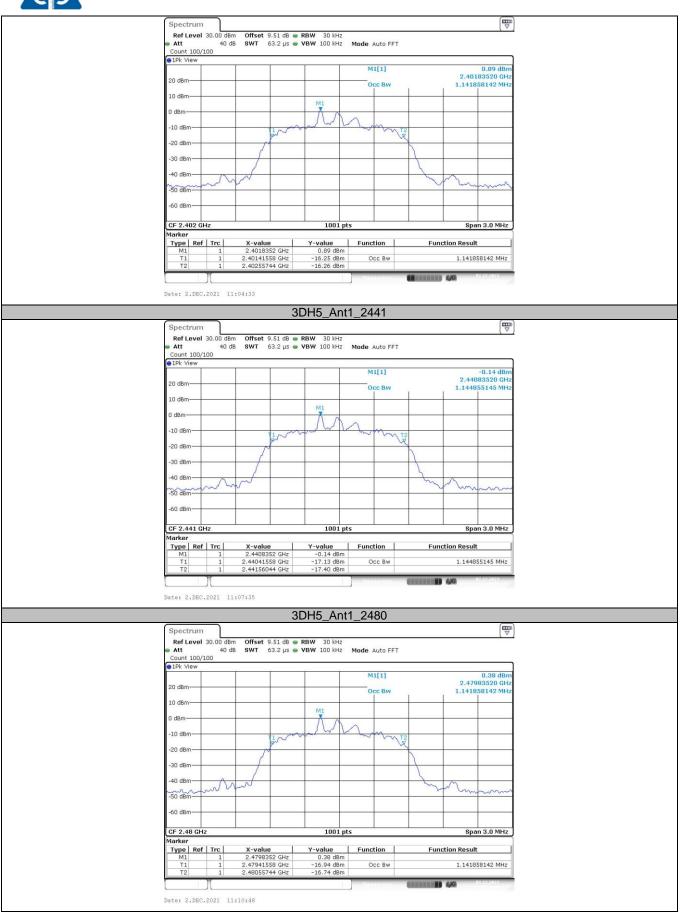











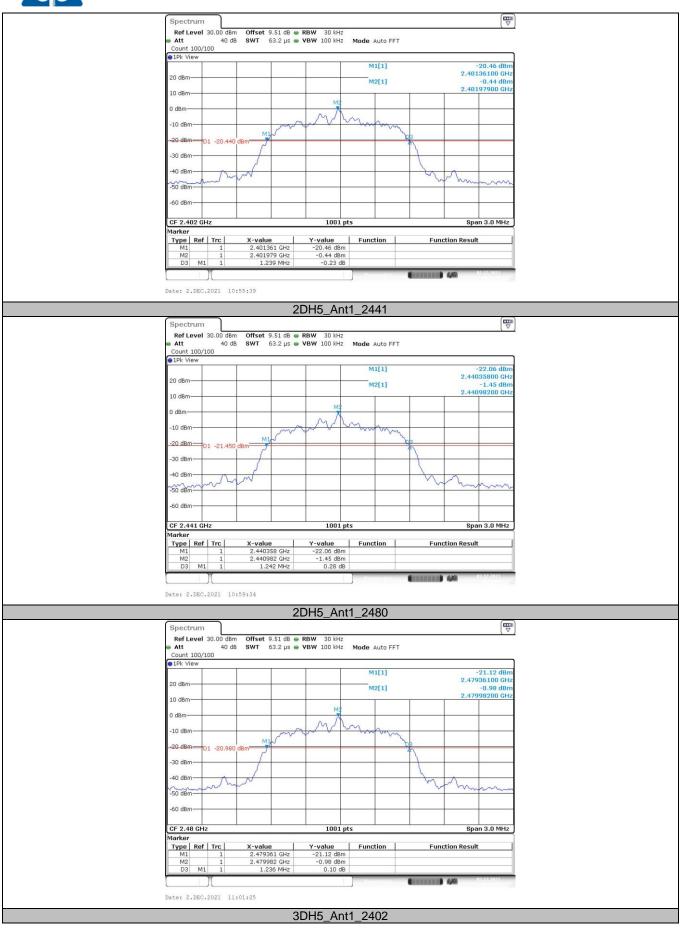



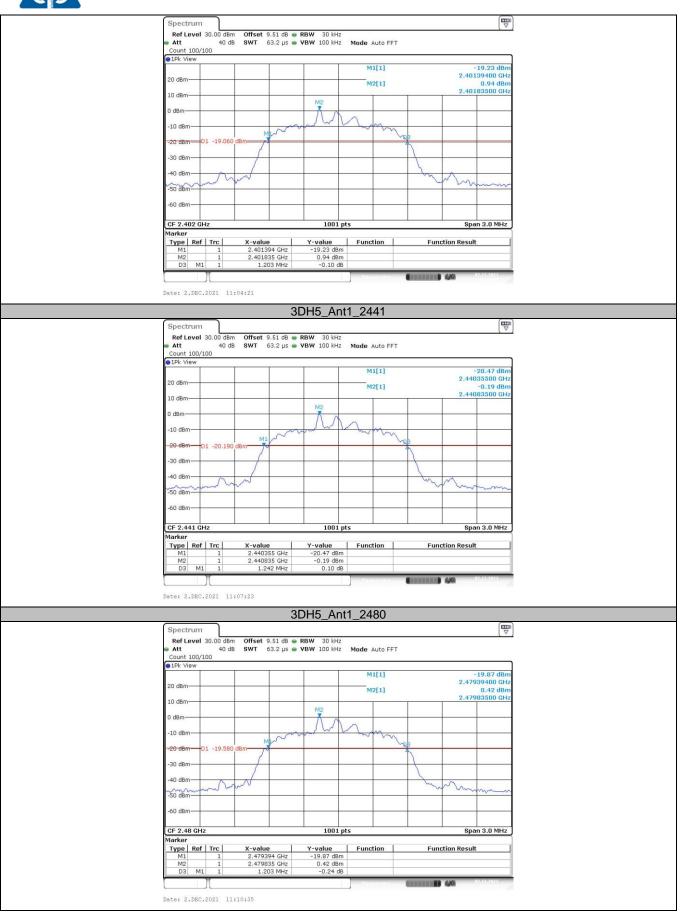




3.6. Channel Separation

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

- 2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) \ge 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Test Mode

Please refer to the clause 2.4.

Test Results

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	39	1.004	574.000	Pass
π /4-DQPSK	39	1.004	828.000	Pass
8-DPSK	39	1.004	828.000	Pass



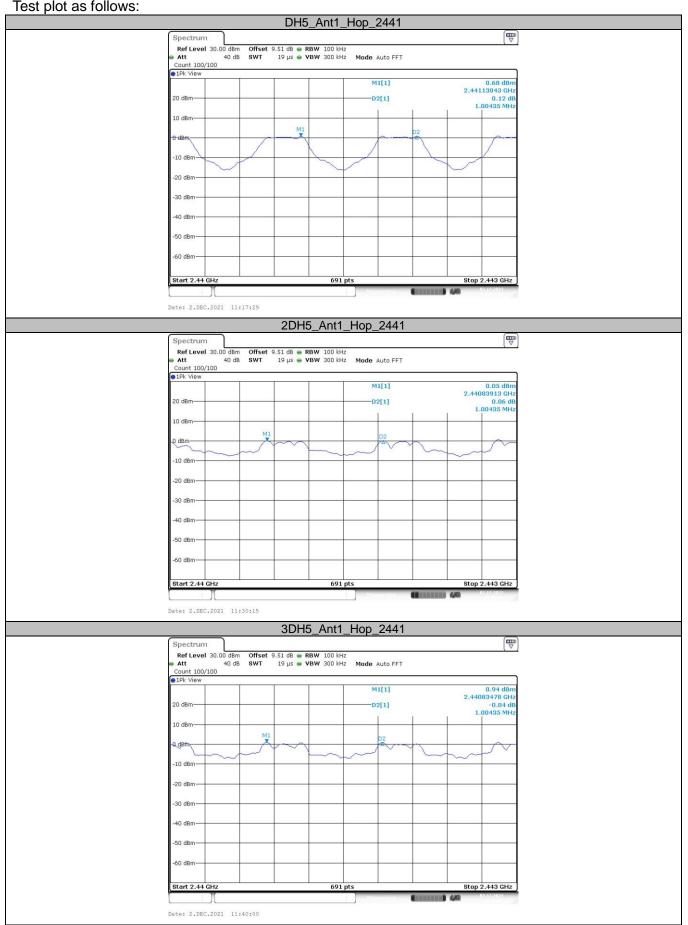



3.7. Number of Hopping Channel

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit	
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15	

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

- 2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.


Test Mode

Please refer to the clause 2.4.

Test Result

Modulation type	Channel number	Limit	Result
GFSK	79		
π /4-DQPSK	79	≥15.00	Pass
8DPSK	79		



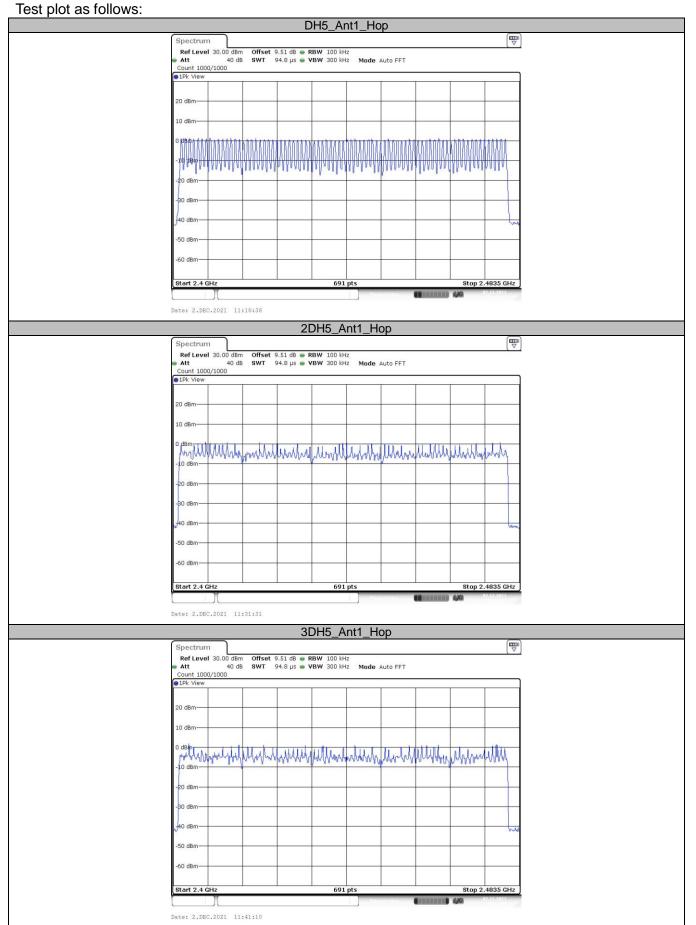




3.8. Dwell Time

<u>Limit</u>

Section	Test Item	Limit	
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec	

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
- (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.




Test Result

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
	DH1	2441	0.37	118.40	31.60		
GFSK	DH3	2441	1.61	257.60	31.60	≤ 0.40	Pass
	DH5	2441	2.86	305.07	31.60		
	2DH1	2441	0.38	121.60	31.60		
π /4-DQPSK	2DH3	2441	1.62	259.20	31.60	≤ 0.40	Pass
	2DH5	2441	2.87	306.13	31.60		
	3DH1	2441	0.38	121.60	31.60		
8-DPSK	3DH3	2441	1.62	259.20	31.60	≤ 0.40	Pass
	3DH5	2441	2.87	306.13	31.60		


Note: 1DH1/2DH1/3DH1 Total of Dwell = Pulse Time*(1600/2)*31.6/79 1DH3/2DH3/3DH3 Total of Dwell = Pulse Time*(1600/4)*31.6/79 1DH5/2DH5/3DH5 Total of Dwell = Pulse Time*(1600/6)*31.6/79



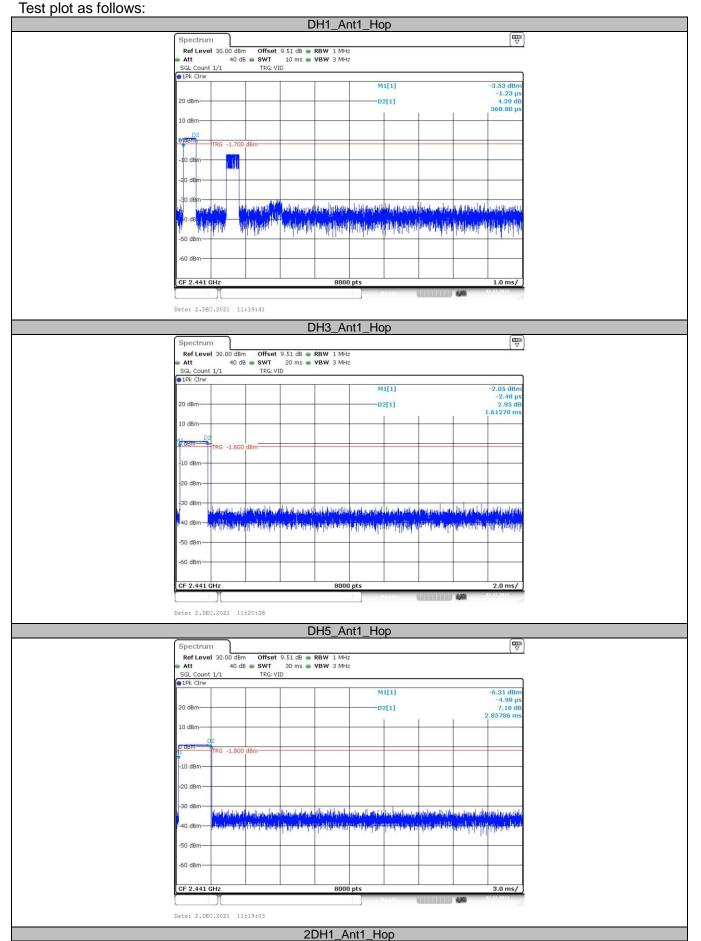






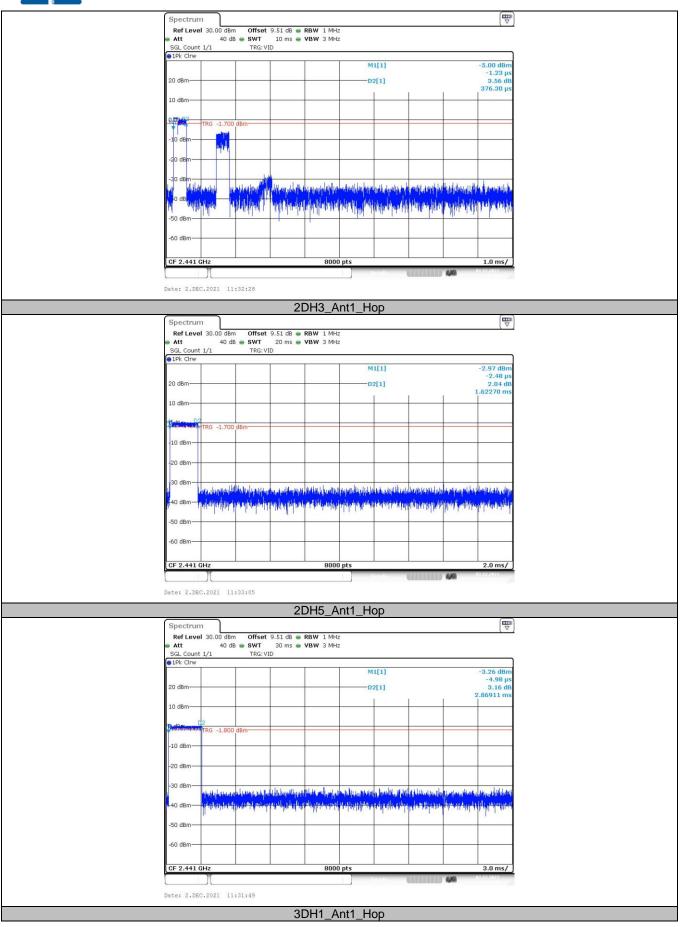



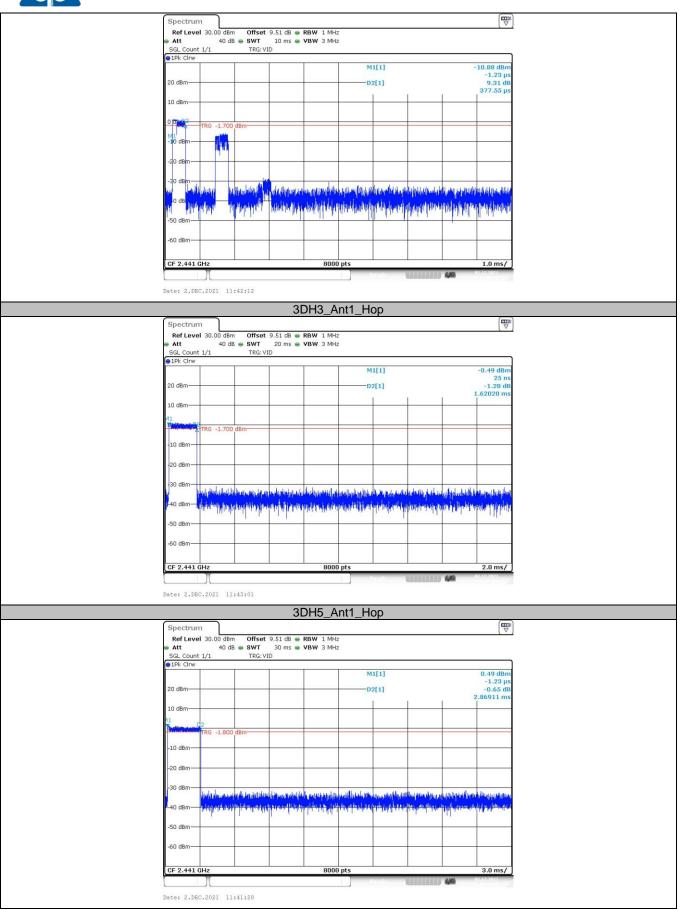




3.9. Peak Output Power

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)	
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5	

Test Configuration



Test Procedure

- 1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
- 2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 4. Record the measurement data.

Test Mode

Please refer to the clause 2.4.

Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
	00	2.18		
GFSK	39	1.28	< 21.00	Pass
	78	1.79		
	00	2.14	< 21.00	Pass
π /4-DQPSK	39	1.10		
	78	1.60		
8-DPSK	00	2.16		
	39	1.17	< 21.00	Pass
	78	1.67		



3.10. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.