

FCC Test Report

Report No.: AGC11758240605FR02

FCC ID	:	2A482-BASS15CLIP
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Baseus Bass 15 Clip Open-Ear TWS Earbuds
BRAND NAME	:	baseus
MODEL NAME	:	Bass 15 Clip
APPLICANT	:	Shenzhen Baseus Technology Co., Ltd.
DATE OF ISSUE	:	Jul. 05, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jul. 05, 2024	Valid	Initial Release	



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	9
2.9 Equipment Modifications	9
2.10 Antenna Requirement	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	
4.System Test Configuration	14
4.1 EUT Configuration	14
4.2 EUT Exercise	14
4.3 Configuration of Tested System	14
4.4 Equipment Used in Tested System	14
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	17
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	24
7.2 Measurement Procedure	24
7.3 Measurement Setup (Block Diagram of Configuration)	24
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Macourement Beaulta	21



9. Radiated Spurious Emission	51
9.1 Measurement Limit	51
9.2 Measurement Procedure	51
9.3 Measurement Setup (Block Diagram of Configuration)	54
9.4 Measurement Result	55
10. Number of Hopping Frequency Measurement	73
10.1 Provisions Applicable	73
10.2 Measurement Procedure	73
10.3 Measurement Setup (Block Diagram of Configuration)	73
10.4 Measurement Result	73
11. Time of Occupancy (Dwell Time) Measurement	75
11.1 Provisions Applicable	75
11.2 Measurement Procedure	75
11.3 Measurement Setup (Block Diagram of Configuration)	75
11.4 Measurement Result	75
12. Frequency Separation Measurement	79
12.1 Provisions Applicable	79
12.2 Measurement Procedure	79
12.3 Measurement Setup (Block Diagram of Configuration)	79
12.4 Measurement Result	79
13. AC Power Line Conducted Emission Test	81
13.1 Measurement Limit	81
13.2 Measurement Setup (Block Diagram of Configuration)	81
13.3 Preliminary Procedure of Line Conducted Emission Test	82
13.4 Final Procedure of Line Conducted Emission Test	82
13.5 Measurement Results	82
Appendix I: Photographs of Test Setup	83
Appendix II: Photographs of Test EUT	83



1. General Information

nzhen Baseus Technology Co., Ltd.
Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou
munity, Bantian Street, Longgang District, Shenzhen, China
nzhen Baseus Technology Co., Ltd.
Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou
munity, Bantian Street, Longgang District, Shenzhen, China
eus Bass 15 Clip Open-Ear TWS Earbuds
us
s 15 Clip
20, 2024
20, 2024~Jul. 05, 2024
ny deviation from the test method
nal
ER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jouk Gai

Jack Gui (Project Engineer)

Jul. 05, 2024

Reviewed By

Calvin Liu (Reviewer)

Jul. 05, 2024

Approved By

Thang

Max Zhang (Authorized Officer)

Jul. 05, 2024





2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz			
Operation Frequency Range	2402MHz-2480MHz			
Bluetooth Version	V5.4			
Modulation Type	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK			
Number of channels	79 Channels			
Channel Separation	1 MHz			
Maximum Transmitter Power	3.266 dBm			
Hardware Version	PM68 V0C			
Software Version	V1.0			
Antenna Designation	FPC Antenna			
Antenna Gain	Left Earbud: -0.7 dBi Right Earbud: -0.2 dBi			
Power Supply	DC 3.7V by battery			
Nete				

Note:

1. The PCB layout, components, and electrical schematic of the left earbud and right earbud are completely consistent, with only the gain of the transmitting antenna being different. Therefore, separate tests were conduct ed on the Radiated Spurious Emission and Band Edge Emission of the left earbud and right earbud. 2. For the other test items, the Right earbud had been tested and recorded in this report.

2.2 Test Frequency List

Channel Number	Frequency		
0	2402 MHz		
1	2403 MHz		
:	:		
39	2441MHz		
:	:		
77	2479 MHz		
78	2480 MHz		
	0 1 : 39 : 77		



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A482-BASS15CLIP**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	2 FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20) 76	02	19		 21	64	75
				·					 		
			Ιi						1		
			¦			1			i.		
				L		<u>'i</u>		1	 		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -0.2 dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V by battery

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.				
Item	Measurement Uncertainty			
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$			
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$			
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$			
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$			
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$			
Uncertainty of spurious emissions, conducted	U _c = ±2 %			
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %			



3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\square	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\square	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\square	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\square	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission								
Lised Lequipment No. L. Lest Equipment I. Manufacturer L. Model No. L. Serial No. L.							Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		



• Te	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
\square	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable			
1	Control Box		USB-TTL					
	Test Accessories Come From The Manufacturer							

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



5. Description of Test Modes

	Summary table of Test Cases						
Test Item	Data Rate / Modulation						
Test tieth	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)						
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered) Mode 7: Bluetooth Tx CH00_2402 MHz_3Mbps (Battery powered) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery powered) Mode 10: Bluetooth Tx Hopping-1Mbps (Battery powered) Mode11: Bluetooth Tx Hopping-3Mbps (Battery powered)						
AC Conducted Emission	N/A						
	on, 3axis were chosen for testing for each applicable mode. nethod, a temporary antenna connector is provided by the manufacture. Software Setting Diagram BI_Tool COMX Baudrate I cassic BLE Test Mode FCC Test BT address Stop DUT Test S555555555 Stop FF Control RF Mode IX TEST Packet Type BDHS Hopping OFF TX Frequency 2480 TX Power 6 RX Frequency 2480 TX Power 6 RX Frequency 2480 I cos: BR/EDB Test LOG: BR/EDB Test						
	LOG: Test end LOG: BR/EDR Test						



6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

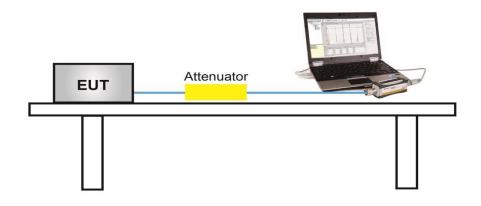




For peak power test setup

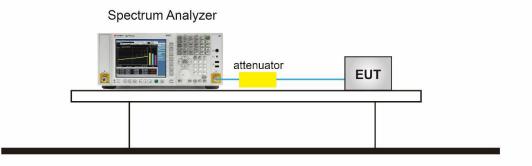


6.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	0.312	≪21	Pass			
GFSK	2441	1.151	≪21	Pass			
	2480	1.935	≪21	Pass			
	2402	1.025	≪21	Pass			
π /4-DQPSK	2441	1.951	≪21	Pass			
	2480	2.790	≪21	Pass			
	2402	1.504	≪21	Pass			
8DPSK	2440	2.399	≪21	Pass			
	2480	3.266	≦21	Pass			






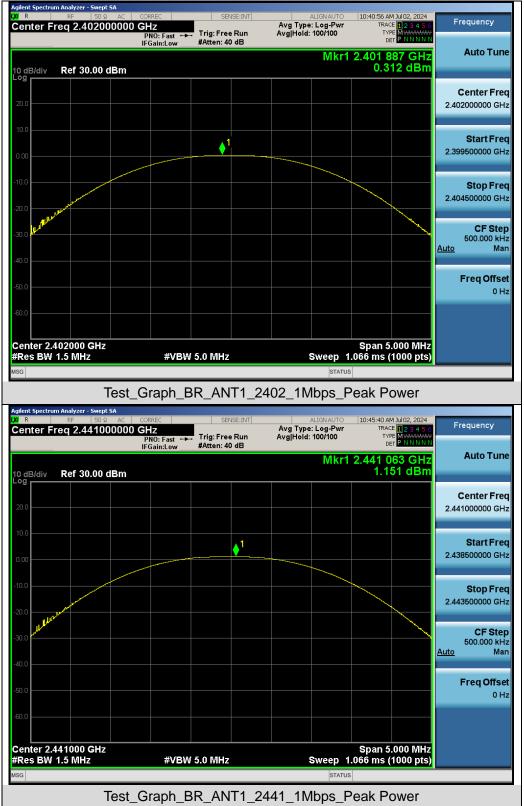

Test Graphs of Conducted Output Power




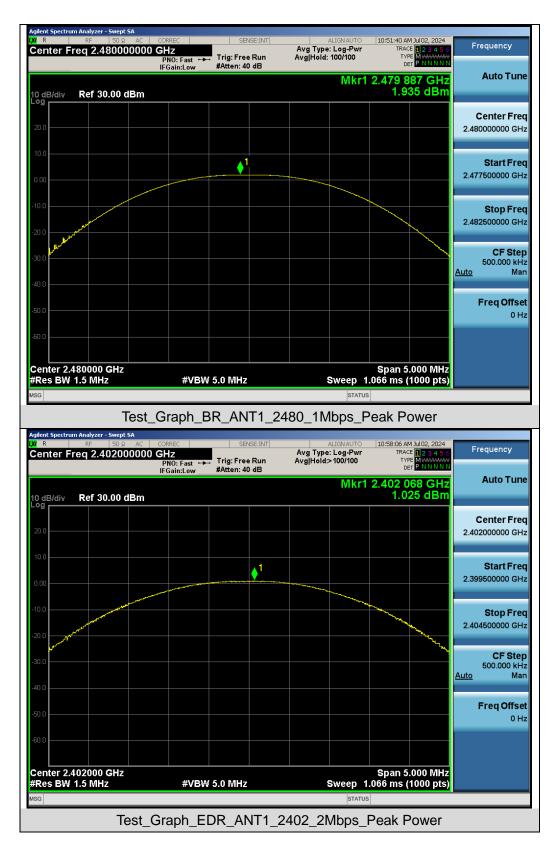








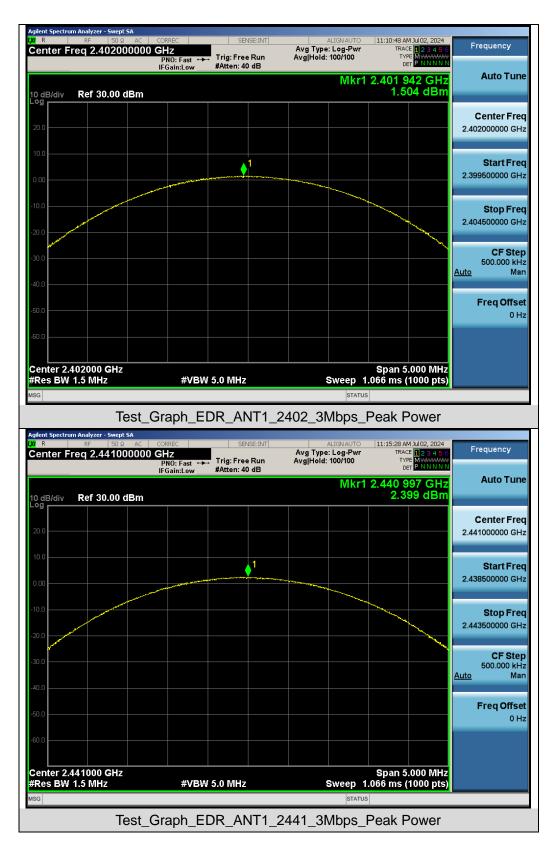



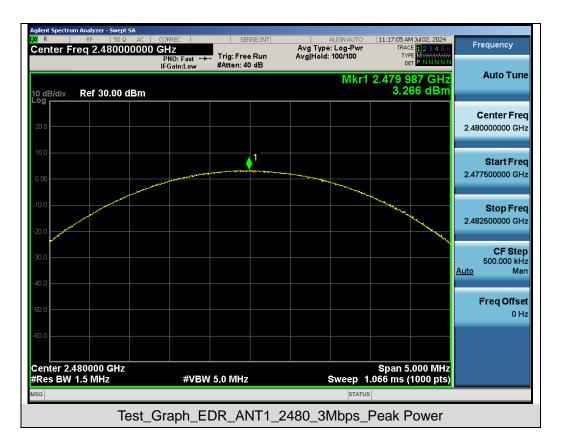



7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW \geq 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

7.3 Measurement Setup (Block Diagram of Configuration)

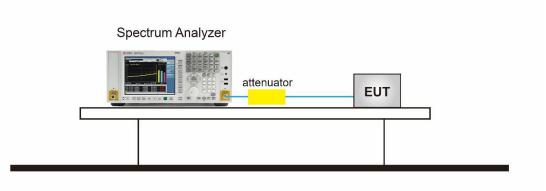




7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth							
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail		
	2402	0.841	0.939	N/A	Pass		
GFSK	2441	0.843	0.939	N/A	Pass		
	2480	0.846	0.939	N/A	Pass		
	2402	1.150	1.265	N/A	Pass		
π /4-DQPSK	2441	1.151	1.265	N/A	Pass		
	2480	1.150	1.265	N/A	Pass		
	2402	1.155	1.281	N/A	Pass		
8DPSK	2440	1.154	1.270	N/A	Pass		
	2480	1.160	1.280	N/A	Pass		

Test Graphs of Occupied Bandwidth and -20 Bandwidth

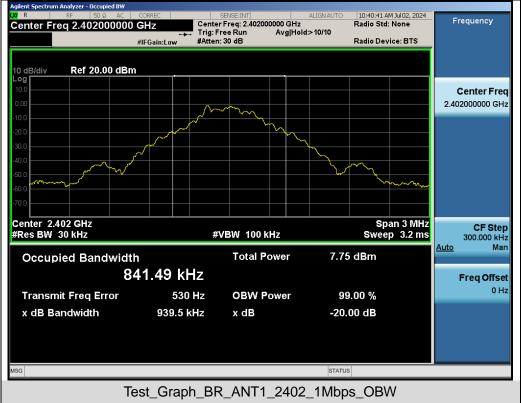
















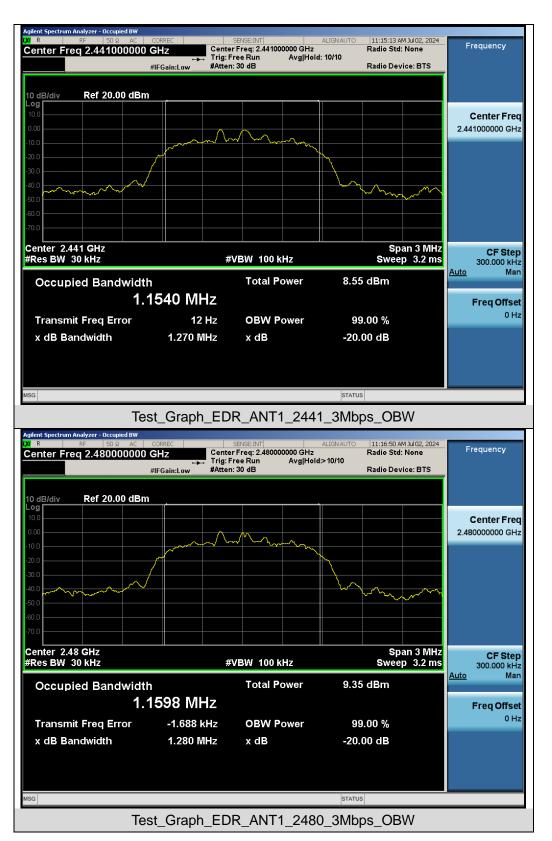



8. Conducted Band Edge and Out-of-Band Emissions

8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

8.3 Measurement Setup (Block Diagram of Configuration)

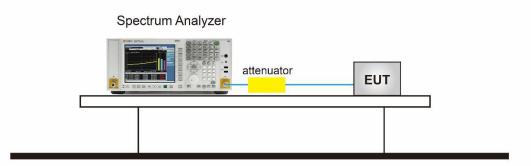




8.4 Measurement Results

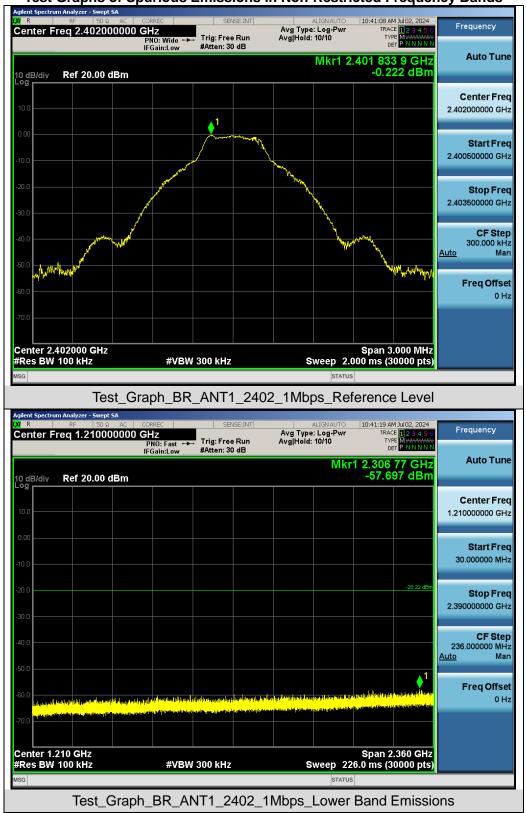


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




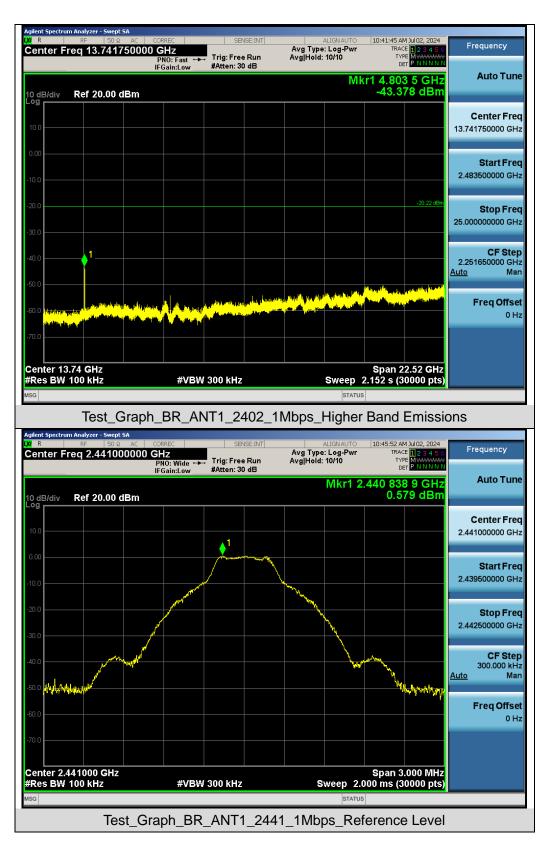




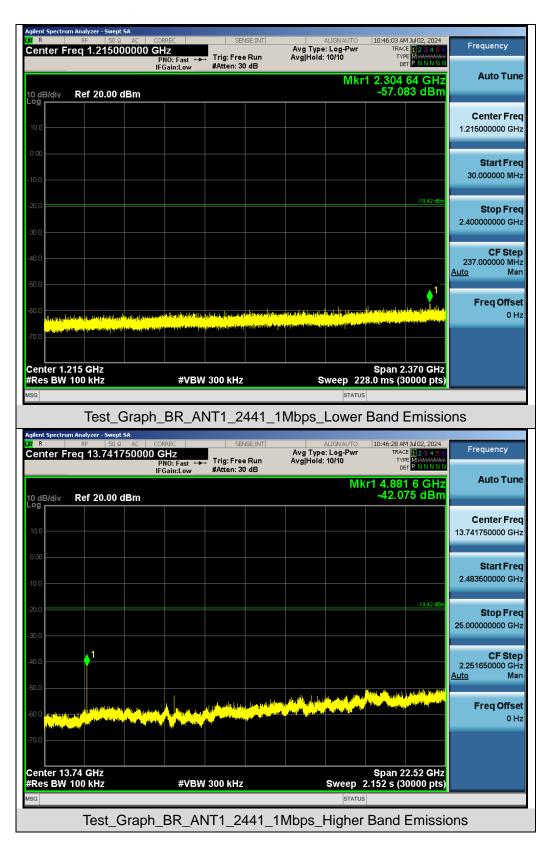




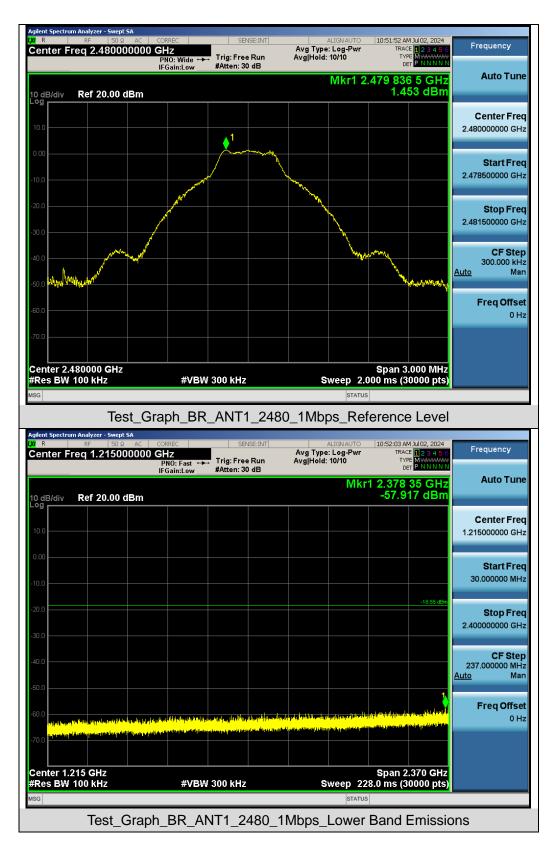




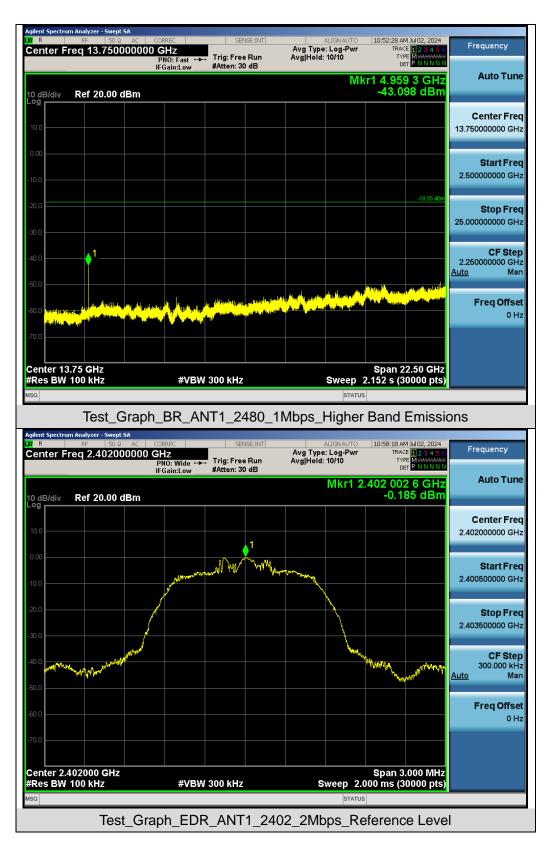




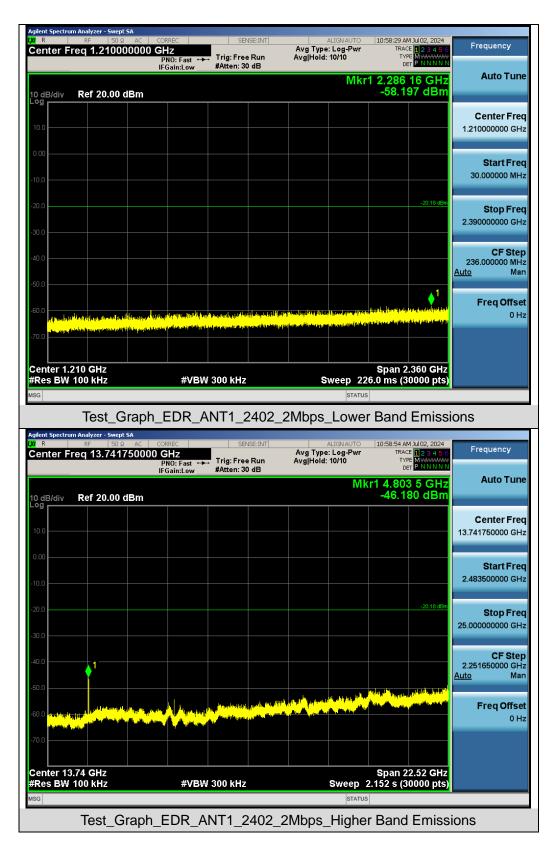




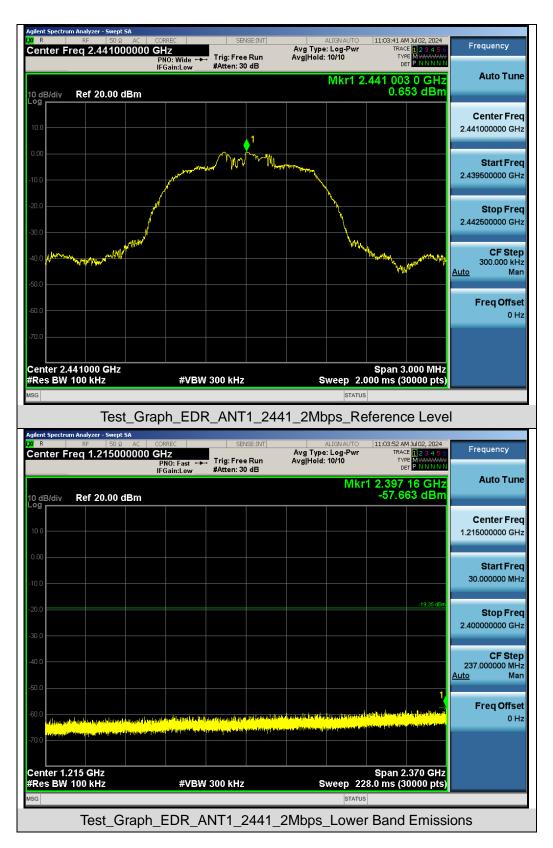



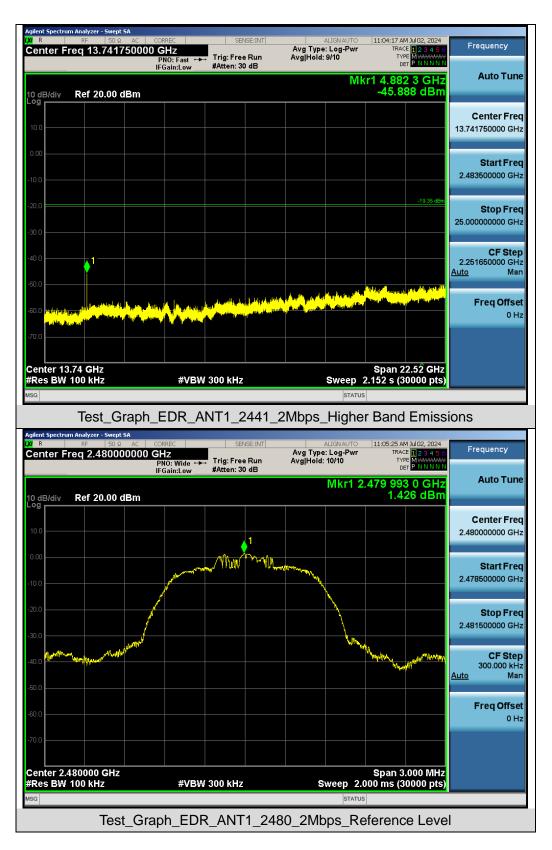




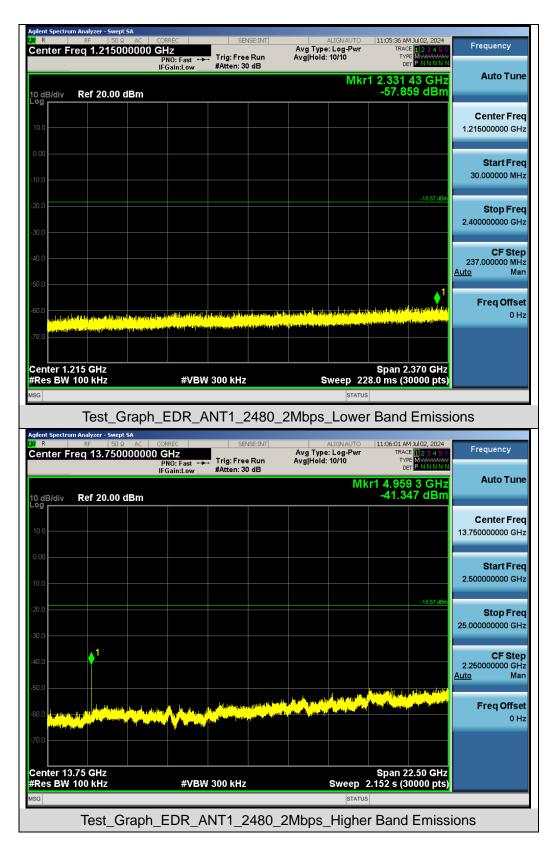








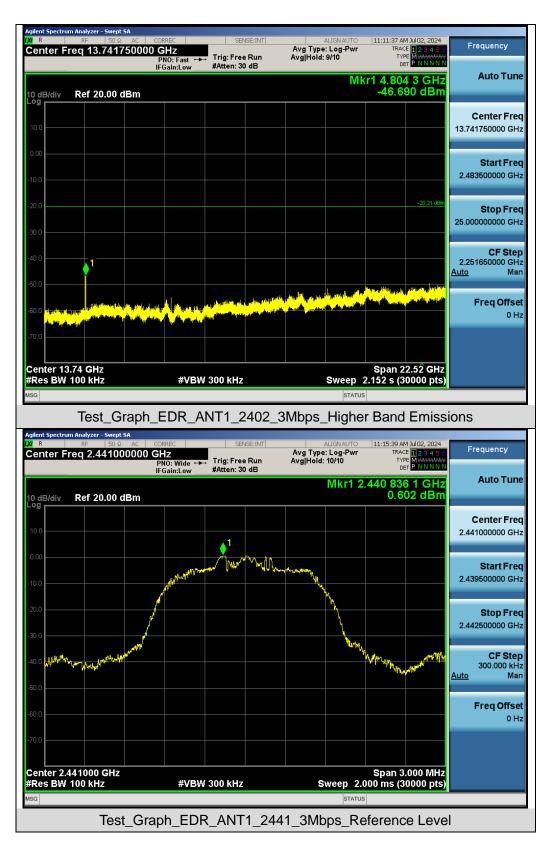




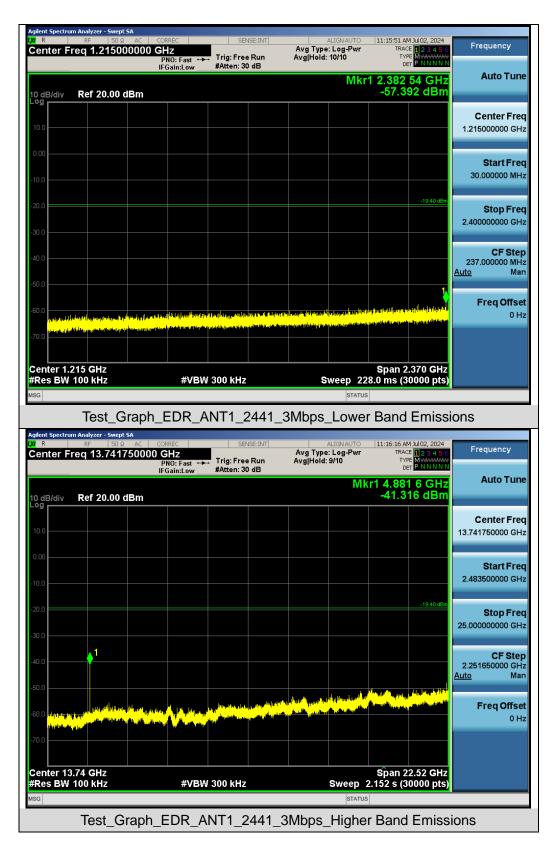








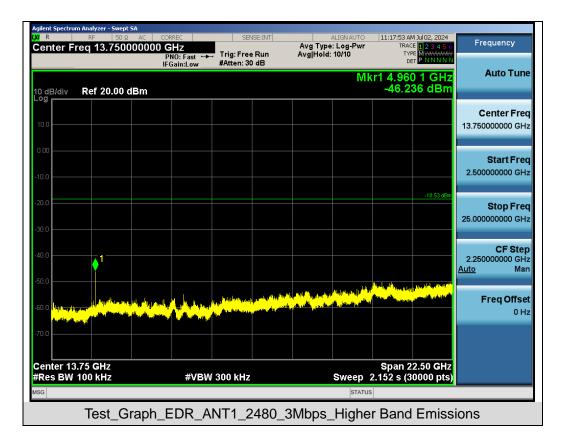




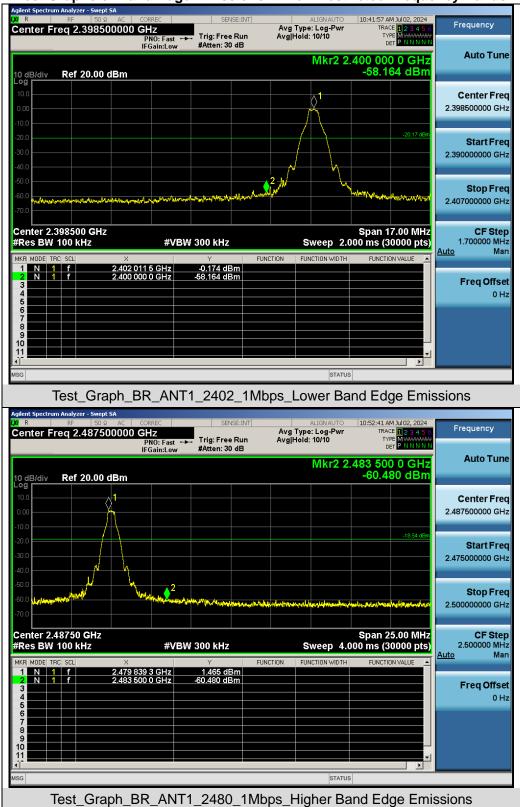

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



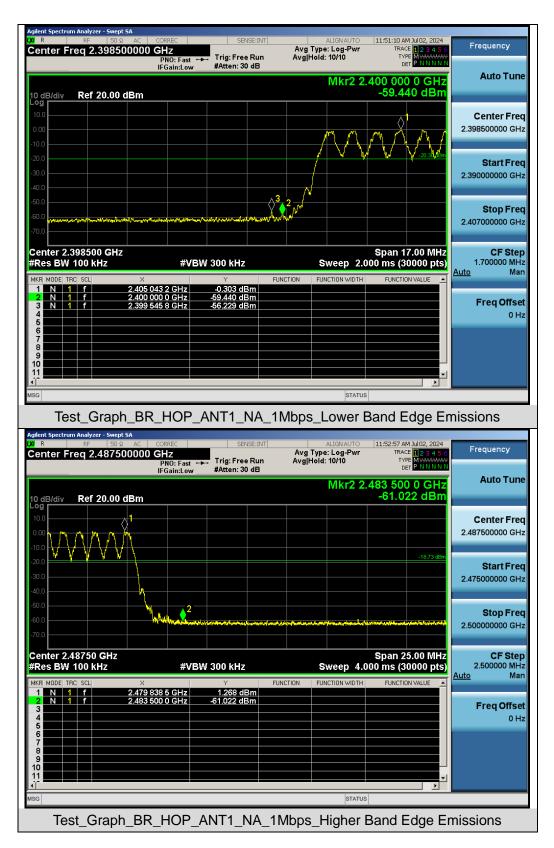



















9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
	1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW \geq [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




9.3 Measurement Setup (Block Diagram of Configuration)

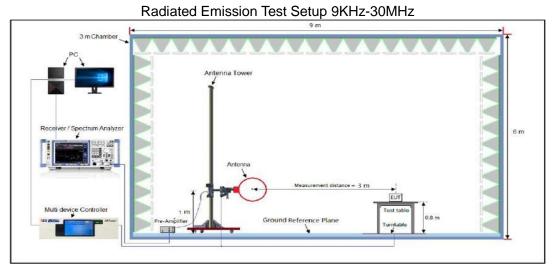

Radiated Emission Test Setup 30MHz-1000MHz

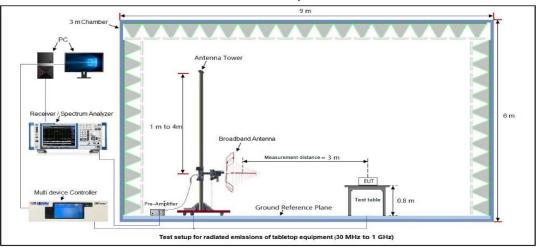

Radiated Emission Test Setup Above 1000MHz

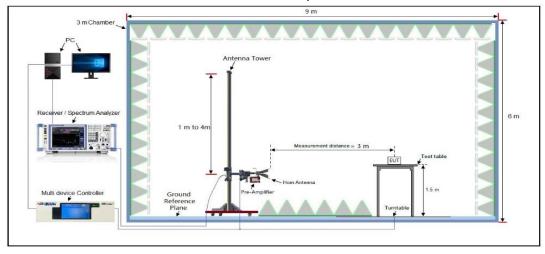

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/




9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ated Em	ission Test Re	esults at 30	MHz-1GH	z			
EUT Name	Base Earbu		ss 15 C	Clip Oper	n-Ear TWS	Mode	I Name	Ва	ass 15 Clip		
Temperature	22.8	°C				Relat	ive Humid	lity 59	9.7 %		
Pressure	960hl	Pa				Test \	/oltage	D	DC 3.7V by bat		
Test Mode	Mode 9 (Left Earbud) Antenna Polarity Horizontal						orizontal				
72.0	dBuV/m					·					
									gin:		
-6	un and and and and and and and and and an				an a						
venda		50	60 70	80	(MHz)	30	D0 400	500 600 7			
-8 30.000		50			(MHz)		D0 400				
-8 30.000	D 40	50	60 70	BO	(MHz) ing Correct el Factor	Measure		500 600 7			
-8 30.000	D 40	50 ≺. F	60 70 Freq.	B0 Readi Leve	(MHz) ing Correct el Factor	Measure ment	20 400	500 600 7	700 1000.000		
-8 30.000	D 40	50 <. F 40.	60 70 Freq. MHz	BO Readi Leve	(MHz) ing Correct Factor V dB 3 13.87	Measure ment dBuV/m	200 400 2- dBuV/m	500 600 7 Over	700 1000.000 Detector		
-8 30.000	0 40 No. Mk	50 ≺. F 40. 106.	60 70 Freq. MHz 4172	BO Readi Leve dBu 5.4	(MHz) ing Correct Factor V dB 3 13.87 8 16.26	Measure ment dBuV/m 19.30	200 400 2- dBuV/m 40.00	500 600 7 Over h dB -20.70	Detector peak		
-8 30.000	0 40 No. Mk	50 <. F 40. 106. 140.	60 70 Freq. MHz 4172 0126	80 Readi Leve dBu 5.4 5.5	(мн₂) ing Correct Factor V dB 3 13.87 8 16.26 2 15.15	Measure ment dBuV/m 19.30 21.84	200 400 2- dBuV/m 40.00 43.50	500 600 7 Over n dB -20.70 -21.66	Detector peak		
-8 30.000	No. Mł	50 <. F 40. 106. 140. 454.	60 70 Freq. MHz 4172 0126 3421	90 Readi Leve dBu 5.4 5.5 7.8	(MHz) ing Correct Factor V dB 3 13.87 8 16.26 2 15.15 9 24.60	ac Measure ment dBuV/m 19.30 21.84 22.97	200 400 e- dBuV/m 40.00 43.50 43.50	500 600 7 Over n dB -20.70 -21.66 -20.53	Detector peak peak		





			Radia	ted Emissi	on Test Res	sults at 30M	Hz-1GH	lz		
EUT Name	Baseu Earbu		s 15 Cl	ip Open-Ea	ar TWS	Model I	Name		Bass	15 Clip
Temperature	22.8 °	С				Relative	e Humic	dity	59.7	%
Pressure	960hP	'a				Test Vo	ltage		DC 3	.7V by batter
Test Mode	Mode	9 (Left	Earbu	ıd)		Antenn	a Polari	ity	Vertic	cal
72.0	dBuV/m									
									imit: argin:	
32	1 the second	2 Weeks Markey	alallahanahanian	Warden and Marth	montan	-	Marina	piter displation	rdra Sarayana	
-8 30.00			ининининин 50 70		, муничини (MHz)	300	400		2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	1000.000
-8 30.00		50 6						500 600	700	
-8 30.00	00 40	50 € 	GO 70	Reading	(MHz) Correct	300 Measure-	400	500 600 Ove	700 er	
-8 30.00	00 40	50 G	70 req.	Reading Level	(мн₂) Correct Factor	300 Measure- ment	400 Limit	500 600 Ove	2700 er	1000.000
-8 30.00	00 40	50 C	50 70 req. 1Hz	Reading Level	(MHz) Correct Factor dB	300 Measure- ment dBuV/m	400 Limit dBuV/r	500 600 Ove m dB	er 0 D	1000.000 Petector
-8 30.00	00 40 No. Mk	50 C	30 70 req. 1Hz 1215 3179	Reading Level dBuV 5.29	(MHz) Correct Factor dB 16.91	300 Measure- ment dBuV/m 22.20	400 Limit dBuV/r 40.00	500 600 Ove m dB -17.1 -16.1	er 80	1000.000 Petector peak
-8 30.00	00 40 No. Mk	50 6 F F M 41.4 53.3	30 70 req. 1Hz 1215 3179 3301	Reading Level dBuV 5.29 6.20	(MHz) Correct Factor dB 16.91 17.03	300 Measure- ment dBuV/m 22.20 23.23	400 Limit dBuV/r 40.00 40.00	500 600 Ove n dB -17.1 -16.1 -19.1	er 80 77 25	1000.000 Petector peak peak
-8 30.00	00 40 No. Mk	50 6 F F 41.4 53.3 164.3	req. 1Hz 215 3179 3301 3822	Reading Level dBuV 5.29 6.20 5.99	(MHz) Correct Factor dB 16.91 17.03 18.26	300 Measure- ment dBuV/m 22.20 23.23 24.25	400 Limit dBuV/r 40.00 40.00 43.50	500 600 Ove -17.1 -16.1 -19.1	er D 80 77 25	1000.000 petector peak peak

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.



Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

	Radiated Emission Te Baseus Bass 15 Clip Open-Ear TWS						sults	at 30M	Hz-1GHz	Z			
EUT Name	Base Earbi		ss 15 (Clip Op	ben-Ea	r TWS		Model N	Name	E	Bass 1	15 Clip	
Temperature	22.8	°C						Relative	e Humid	ity 5	59.7 %	6	
Pressure	960h	Pa						Test Vo	DC 3.7V b			7V by ba	attery
Test Mode	Mode	9 (Ri	ght Ea	rbud)				Antenn	a Polarit	:y ŀ	Horizontal		
72.0	dBuV/m												
32									38		mit: argin:		
pen	brief brief brief billing bill	Nit a day w	where the first one	bern and some the	at the state of th	adura no huma hara	eyorgidgenede	Thematical adult of	and the second	- Anno	hours and the second		
-8 30.0	D0 40	50	60 70	BO	ading	(MHz) Correct	Me	300 easure-	400	500 600	700	1000.000	
-8		50		BO Re: Le		(MHz)	Me	300		500 600 Ove	700 r	1000.000	
-8	D0 40	50 k.	60 70 Freq.	90 Re Le	ading evel	(MHz) Correct Factor	M e r dE	300 easure- ment	400 Limit	500 600 Ove	700 r De		
-6	D0 40	50 k. 47	60 70 Freq. MHz	BO Re Le	ading evel BuV	(MHz) Correct Factor dB	Me r de	300 easure- nent BuV/m	400 Limit dBuV/m	500 600 Ove	700 r 0 f	etector	
-6	00 40 No. M	50 k. 47 140	60 70 Freq. MHz .8260	80 Re Le	ading evel BuV 8.61	(MHz) Correct Factor dB 13.35	Me r de 1	300 easure- nent 9uV/m 9.96	400 Limit dBuV/m 40.00	500 600 Ove n dB -20.0	700 r 200 r 4 p 3 p	etector Deak	
-6	00 40 No. M	50 k. 47 140 454	60 70 Freq. MHz .8260 .3420	80 Re: Le (ading evel BuV 6.61 8.82	(MHz) Correct Factor dB 13.35 15.15	M e r dE 1 2 3	300 easure- nent 9uV/m 9.96 3.97	400 Limit dBuV/m 40.00 43.50	500 600 Ove D dB -20.0 -19.5	700 r 200 r 4 p 3 p 1 p	etector belak belak	
-6	00 40 No. M 1 2 3	50 k. 47 140 454 545	60 70 Freq. MHz .8260 .3420 .3100	80 Re: Le (ading evel BuV 6.61 8.82 7.69	(MHz) Correct Factor dB 13.35 15.15 24.60	Me r dE 1 2 3 3	300 easure- nent 9uV/m 9.96 3.97 2.29	400 Limit dBuV/m 40.00 43.50 46.00	500 600 Ove -20.0 -19.5 -13.7	700 r 200 r 4 p 3 p 1 p 0 p	etector beak beak beak	





			Rac	liated Emi	ssion Test R	esults at 30	MHz-1GH	lz	
EUT Name		eus Ba ouds	ass 15	Clip Open	-Ear TWS	Mode	I Name	В	ass 15 Clip
Temperature	22.8	°C				Relati	ive Humio	dity 5	9.7 %
Pressure	960	۱Pa		Test Voltage DC 3			C 3.7V by batte		
Test Mode	Mod	e 9 (R	ight E	arbud)		Antenna Polarity			/ertical
72.0	dBuV/m							·	
								Limi Mar	
-8					, Marth M. Mart 1				
		for normalise		0 80	(MHz)	30	0 400	500 600 ⁻	
-8 30.0		50		n 90 Readir	(MHz) ng Correct		0 400		
-8 30.0	D0 40	50	60 7	n 90 Readir	(MHz) ng Correct Factor	300 Measure	0 400	500 600 Over	
-8 30.0	D0 40	50 k.	60 7 Freq.	0 90 Readir Level dBuV	(MHz) ng Correct Factor dB	300 Measure ment	• 400 - Limit	500 600 Over	700 1000.000 Detector
-8 30.0	00 40 No. M	50 k. 63	60 7 Freq. MHz	0 90 Readir Level dBuV	(MHz) ng Correct Factor dB 1 17.06	Measure ment dBuV/m	• 400 - Limit dBuV/n	500 600 Over n dB	700 1000.000 Detector
-8 30.0	00 40 No. M	50 k. 63 164	60 7 Freq. MHz .5356	0 90 Readir Level dBuV 7.00	(MHz) ng Correct Factor dB 1 17.06 1 18.26	Measure- ment dBuV/m 24.06	• 400 - Limit dBuV/n 40.00	500 600 Over n dB -15.94	Detector peak peak
-8 30.0	00 40 No. M 1 2	50 k. 63 164 447	60 7 Freq. MHz .5356 .3301	0 90 Readir Level 08uV 7.00 6.49 5.91	(MHz) ng Correct Factor dB 17.06 18.26 25.74	Measure- ment dBuV/m 24.06 24.75	• 400 - Limit dBuV/n 40.00 43.50	500 600 Over n dB -15.94 -18.75	Detector peak peak peak
-8 30.0	00 40 No. M 1 2 3	50 k. 63 164 447 545	60 7 Freq. MHz .5356 .3301 .9821	0 90 Readir Level 08uV 7.00 6.49 5.91 8.16	(MHz) ng Correct Factor dB 17.06 18.26 25.74 5 24.67	300 Measure- ment dBuV/m 24.06 24.75 31.65	• 400 - Limit dBuV/n 40.00 43.50 46.00	0ver 0ver 15.94 -15.94 -18.75	Detector peak peak peak peak

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.



EUT Name		Baseus Ba TWS Earbi	ss 15 Clip Ope uds	en-Ear	Model	Name	Bass 15 Clip			
Temperature		22.8 ℃			Relativ	ve Humidity	59.7 %			
Pressure		960hPa			960hPa Test Voltage		Test Voltage		DC 3.7V b	y battery
Test Mode		Mode 7 (Le	eft Earbud)		Anten	na Polarity	Horizontal			
Frequency	Met	er Reading	Factor	Emissio	on Level	Limits	Margin) (alive Trees		
(MHz)		(dBµV)	(dB)	(dBµ'	V/m)	(dBµV/m)	(dB)	Value Type		
4804.000		46.89	0.08	46.	97	74	-27.03	peak		
4804.000		37.72	0.08	37.	80	54	-16.20	AVG		
7206.000		41.11	2.21	43.	32	74	-30.68	peak		
7206.000		32.54	2.21	34.	75	54	-19.25	AVG		
Remark: Factor = Anten	no Fo	actor + Cabl	eloss Pre	amplifier						
			<u>e Loss – 1 1e-</u>							
			ss 15 Clip Ope	•	Model	Name	Bass 15 C	lip		
EUT Name		Baseus Ba	ss 15 Clip Ope	•		Name ve Humidity	Bass 15 C 59.7 %	lip		
EUT Name Temperature		Baseus Ba TWS Earbi	ss 15 Clip Ope	•		ve Humidity				
EUT Name Temperature Pressure		Baseus Ba TWS Earbu 22.8 ℃	ss 15 Clip Ope uds	•	Relativ Test V	ve Humidity	59.7 %			
EUT Name Temperature Pressure Test Mode		Baseus Ba TWS Earbu 22.8 °C 960hPa Mode 7 (Le	ss 15 Clip Ope uds eft Earbud)	en-Ear	Relativ Test V Anten	ve Humidity oltage na Polarity	59.7 % DC 3.7V b Vertical			
EUT Name Temperature Pressure Test Mode		Baseus Ba TWS Earbu 22.8 °C 960hPa Mode 7 (Le er Reading	ss 15 Clip Ope uds eft Earbud) Factor	en-Ear	Relativ Test V Anten	ve Humidity oltage na Polarity Limits	59.7 % DC 3.7V b Vertical			
EUT Name Temperature Pressure Test Mode Frequency (MHz)		Baseus Ba TWS Earbu 22.8 ℃ 960hPa Mode 7 (Le er Reading (dBµV)	ss 15 Clip Ope uds eft Earbud) Factor (dB)	en-Ear Emissio	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m)	59.7 % DC 3.7V b Vertical Margin (dB)	y battery Value Type		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000		Baseus Ba TWS Earbu 22.8 °C 960hPa Mode 7 (Le er Reading (dBµV) 46.95	ss 15 Clip Ope uds eft Earbud) Factor (dB) 0.08	Emissio (dBµ' 47.	Relative Test V Anten on Level V/m) 03	ve Humidity foltage na Polarity Limits (dBµV/m) 74	59.7 % DC 3.7V b Vertical Margin (dB) -26.97	y battery Value Type peak		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000		Baseus Ba TWS Earbu 22.8 ℃ 960hPa Mode 7 (Le er Reading (dBµV) 46.95 37.59	ss 15 Clip Ope uds eft Earbud) Factor (dB) 0.08 0.08	Emissio (dBµ 47. 37.	Relativ Test V Anten on Level V/m) 03 67	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	59.7 % DC 3.7V b Vertical Margin (dB) -26.97 -16.33	y battery Value Type peak AVG		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		Baseus Ba TWS Earbu 22.8 ℃ 960hPa Mode 7 (Le er Reading (dBµV) 46.95 37.59 41.91	ss 15 Clip Ope uds eft Earbud) Factor (dB) 0.08 0.08 2.21	Emissio (dBµ 47. 37. 44.	Relative Test V Anten On Level V/m) 03 67 12	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V b Vertical Margin (dB) -26.97 -16.33 -29.88	y battery Value Type peak AVG peak		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000		Baseus Ba TWS Earbu 22.8 ℃ 960hPa Mode 7 (Le er Reading (dBµV) 46.95 37.59	ss 15 Clip Ope uds eft Earbud) Factor (dB) 0.08 0.08	Emissio (dBµ 47. 37.	Relative Test V Anten On Level V/m) 03 67 12	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	59.7 % DC 3.7V b Vertical Margin (dB) -26.97 -16.33	y battery Value Type peak AVG		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000		Baseus Ba TWS Earbu 22.8 ℃ 960hPa Mode 7 (Le er Reading (dBµV) 46.95 37.59 41.91	ss 15 Clip Ope uds eft Earbud) Factor (dB) 0.08 0.08 2.21	Emissio (dBµ 47. 37. 44.	Relative Test V Anten On Level V/m) 03 67 12	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V b Vertical Margin (dB) -26.97 -16.33 -29.88	y battery Value Type peak AVG peak		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Met	Baseus Ba TWS Earbu 22.8 ℃ 960hPa Mode 7 (Le er Reading (dBµV) 46.95 37.59 41.91 32.16	ss 15 Clip Ope Jds eft Earbud) Factor (dB) 0.08 0.08 2.21 2.21	Emissio (dBµ) 47. 37. 44. 34.	Relative Test V Anten On Level V/m) 03 67 12	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V b Vertical Margin (dB) -26.97 -16.33 -29.88	y battery Value Type peak AVG peak		

Radiated Emissions Test Results Above 1GHz

RESULT: Pass



EUT Name		Baseus Ba TWS Earbi	ss 15 Clip Ope uds	n-Ear	Model	Name	Bass 15 C	lip		
Temperature		22.8 ℃			Relativ	ve Humidity	59.7 %			
Pressure		960hPa			960hPa Test Voltage		Test Voltage		DC 3.7V b	y battery
Test Mode		Mode 8 (Le	eft Earbud)		Anten	na Polarity	Horizontal			
Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin			
(MHz)		(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	Value Type		
4882.000		46.08	0.08	46.	16	74	-27.84	peak		
4882.000		37.33	0.08	37.	41	54	-16.59	AVG		
7323.000		41.27	2.21	43.	48	74	-30.52	peak		
7323.000		32.24	2.21	34.	45	54	-19.55	AVG		
Remark: Factor = Anten		eter + Cabl	oloss Pro	amplifier						
EUT Name										
		Baseus Ba TWS Earbi	ss 15 Clip Ope uds	n-Ear	Model	Name	Bass 15 C	lip		
Temperature				en-Ear		Name ve Humidity	Bass 15 C	lip		
		TWS Earbu		en-Ear		ve Humidity				
Temperature Pressure		TWS Earbu 22.8 ℃	Jds	n-Ear	Relativ Test V	ve Humidity	59.7 %			
Temperature Pressure Test Mode		TWS Earbu 22.8 ℃ 960hPa Mode 8 (Le	uds		Relativ Test V Anten	ve Humidity oltage na Polarity	59.7 % DC 3.7V by Vertical			
Temperature Pressure Test Mode Frequency	Mete	TWS Earbu 22.8 °C 960hPa Mode 8 (Le	uds eft Earbud) Factor	Emissio	Relativ Test V Anten	ve Humidity oltage na Polarity Limits	59.7 % DC 3.7V by Vertical Margin			
Temperature Pressure Test Mode Frequency (MHz)	Mete	TWS Earbu 22.8 ℃ 960hPa Mode 8 (Le er Reading (dBµV)	eft Earbud) Factor (dB)	Emissio (dBµ	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m)	59.7 % DC 3.7V by Vertical Margin (dB)	y battery Value Type		
Temperature Pressure Test Mode Frequency (MHz) 4882.000	Mete	TWS Earbu 22.8 ℃ 960hPa Mode 8 (Le er Reading (dBµV) 46.21	eft Earbud) Factor (dB) 0.08	Emissio (dBµ) 46.	Relativ Test V Anten m Level V/m) 29	ve Humidity foltage na Polarity Limits (dBµV/m) 74	59.7 % DC 3.7V by Vertical Margin (dB) -27.71	y battery Value Type peak		
Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000	Mete	TWS Earbu 22.8 °C 960hPa Mode 8 (Lee er Reading (dBμV) 46.21 37.73	eft Earbud) Factor (dB) 0.08 0.08	Emissio (dBµ 46. 37.	Relativ Test V Anten on Level V/m) 29 81	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	59.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.19	y battery Value Type peak AVG		
Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000 7323.000	Mete	TWS Earbu 22.8 ℃ 960hPa Mode 8 (Le er Reading (dBµV) 46.21 37.73 41.15	eft Earbud) Factor (dB) 0.08 0.08 2.21	Emissio (dBµ ¹ 46. 37. 43.	Relativ Test V Anten In Level V/m) 29 81 36	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.19 -30.64	y battery Value Type peak AVG peak		
Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000	Mete	TWS Earbu 22.8 °C 960hPa Mode 8 (Lee er Reading (dBμV) 46.21 37.73	eft Earbud) Factor (dB) 0.08 0.08	Emissio (dBµ 46. 37.	Relativ Test V Anten In Level V/m) 29 81 36	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	59.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.19	y battery Value Type peak AVG		
Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000 7323.000 7323.000		TWS Earbu 22.8 ℃ 960hPa Mode 8 (Le er Reading (dBµV) 46.21 37.73 41.15	eft Earbud) Factor (dB) 0.08 0.08 2.21	Emissio (dBµ ¹ 46. 37. 43.	Relativ Test V Anten In Level V/m) 29 81 36	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.19 -30.64	y battery Value Type peak AVG peak		
Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000 7323.000		TWS Earbu 22.8 ℃ 960hPa Mode 8 (Le er Reading (dBµV) 46.21 37.73 41.15 32.36	uds eft Earbud) Factor (dB) 0.08 0.08 2.21 2.21	Emissio (dBµ) 46 37 43. 34	Relativ Test V Anten In Level V/m) 29 81 36	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.19 -30.64	y battery Value Type peak AVG peak		

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



EUT Name		Baseus Bas TWS Earbu	ss 15 Clip Oper ıds	n-Ear	Model I	Name	Bass 15 Clip)
Temperature		22.8 ℃			Relativ	e Humidity	59.7 %	
Pressure		960hPa			Test Vo	ltage	DC 3.7V by	battery
Test Mode		Mode 9 (Le	ft Earbud)		Antenn	a Polarity	Horizontal	
Frequency	Met	ter Reading	Factor	Emissi	on Level	Limits	Margin	Value Type
(MHz)		(dBµV)	(dB)	(dB	uV/m)	(dBµV/m)	(dB)	value Type
4960.000		46.55	0.08	46	6.63	74	-27.37	peak
4960.000		37.35	0.08	37	7.43	54	-16.57	AVG
7440.000		41.57	2.21	43	8.78	74	-30.22	peak
7440.000		32.84	2.21	35	5.05	54	-18.95	AVG
Remark: Factor = Anter	nna Fa	actor + Cabl	e Loss – Pre-a	amplifier.				
EUT Name		Baseus Bas TWS Earbu	ss 15 Clip Oper ıds	n-Ear	Model I	Name	Bass 15 Clip)
Temperature		22.8 ℃			Relativ	e Humidity	59.7 %	
•		22.8 ℃ 960hPa			Relative Test Vo		59.7 % DC 3.7V by	battery
Pressure			ft Earbud)		Test Vo			battery
Pressure Test Mode	Met	960hPa Mode 9 (Le	,	Emissi	Test Vo Antenn	ltage a Polarity	DC 3.7V by Vertical	
Pressure Test Mode Frequency	Met	960hPa Mode 9 (Le ter Reading	Factor		Test Vo Antenn	a Polarity	DC 3.7V by Vertical Margin	battery Value Type
Pressure Test Mode Frequency (MHz)	Met	960hPa Mode 9 (Le ter Reading (dBµV)	Factor (dB)	(dB	Test Vo Antenn on Level	Limits (dBµV/m)	DC 3.7V by Vertical Margin (dB)	- Value Type
Pressure Test Mode Frequency (MHz) 4960.000	Met	960hPa Mode 9 (Le ter Reading (dBµV) 46.13	Factor (dB) 0.08	(dB)	Test Vo Antenn on Level uV/m) 5.21	Limits (dBµV/m) 74	DC 3.7V by Vertical Margin (dB) -27.79	1
Pressure Test Mode Frequency (MHz)	Met	960hPa Mode 9 (Le ter Reading (dBµV)	Factor (dB)	(dB) 46 37	Test Vo Antenn on Level	Limits (dBµV/m)	DC 3.7V by Vertical Margin (dB)	- Value Type peak
Pressure Test Mode Frequency (MHz) 4960.000 4960.000		960hPa Mode 9 (Le ter Reading (dBµV) 46.13 37.74	Factor (dB) 0.08 0.08	(dB) 46 37 44	Test Vo Antenn on Level uV/m) 5.21 7.82	Limits (dBµV/m) 74 54	DC 3.7V by Vertical Margin (dB) -27.79 -16.18	Value Type peak AVG
(MHz) 4960.000 4960.000 7440.000		960hPa Mode 9 (Le ter Reading (dBµV) 46.13 37.74 41.88	Factor (dB) 0.08 0.08 2.21	(dB) 46 37 44	Test Vo Antenn on Level uV/m) 5.21 7.82 1.09	Limits (dBµV/m) 74 54 74	DC 3.7V by Vertical Margin (dB) -27.79 -16.18 -29.91	Value Type peak AVG peak
Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000		960hPa Mode 9 (Le ter Reading (dBµV) 46.13 37.74 41.88	Factor (dB) 0.08 0.08 2.21	(dB) 46 37 44	Test Vo Antenn on Level uV/m) 5.21 7.82 1.09	Limits (dBµV/m) 74 54 74	DC 3.7V by Vertical Margin (dB) -27.79 -16.18 -29.91	Value Type peak AVG peak

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



EUT Name		Baseus Ba TWS Earbi	ss 15 Clip Open uds	-Ear	Model	Name	Bass 15 Clip	
Temperature		22.8 ℃			Relativ	ve Humidity	59.7 %	
Pressure		960hPa			Test V	oltage	DC 3.7V by	y battery
Test Mode		Mode 7 (Ri	ight Earbud)		Anten	na Polarity	Horizontal	
							·	
Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin	Value Type
(MHz)		(dBµV)	(dB)	(dBµ\	√/m)	(dBµV/m)	(dB)	value Type
4804.000		46.30	0.08	46.3	38	74	-27.62	peak
4804.000		37.38	0.08	37.4	46	54	-16.54	AVG
7206.000		41.55	2.21	43.	76	74	-30.24	peak
7206.000		32.10	2.21	34.3	31	54	-19.69	AVG
Remark:								
Factor = Anten	na Fa	actor + Cabl	e Loss – Pre-ar	nplifier.				
		Basous Ba	ss 15 Clin Opon	For				
EUT Name			ss 15 Clip Open	-Ear	Model	Name	Bass 15 Cl	lip
EUT Name Temperature		Baseus Ba TWS Earbu 22.8 °C		-Ear		Name ve Humidity	Bass 15 Cl	lip
		TWS Earbu		-Ear	Relativ			
Temperature		TWS Earbu 22.8 ℃ 960hPa		-Ear	Relativ Test V	ve Humidity	59.7 %	
Temperature Pressure		TWS Earbu 22.8 ℃ 960hPa	uds	-Ear	Relativ Test V	ve Humidity oltage	59.7 % DC 3.7V by	
Temperature Pressure	Met	TWS Earbu 22.8 ℃ 960hPa	uds	-Ear Emissio	Relativ Test V Anten	ve Humidity oltage	59.7 % DC 3.7V by	y battery
Temperature Pressure Test Mode	Met	TWS Earbu 22.8 ℃ 960hPa Mode 7 (Ri	uds ight Earbud)		Relativ Test V Anten	ve Humidity oltage na Polarity	59.7 % DC 3.7V by Vertical	
Temperature Pressure Test Mode	Met	TWS Earbu 22.8 °C 960hPa Mode 7 (Ri er Reading	ight Earbud) Factor	Emissio	Relativ Test V Anten	ve Humidity oltage na Polarity	59.7 % DC 3.7V by Vertical Margin	y battery
Temperature Pressure Test Mode Frequency (MHz)	Met	TWS Earbu 22.8 ℃ 960hPa Mode 7 (Ri er Reading (dBµV)	ight Earbud) Factor (dB)	Emissio (dBµ	Relativ Test V Anten n Level V/m) 91	ve Humidity foltage na Polarity Limits (dBµV/m)	59.7 % DC 3.7V by Vertical Margin (dB)	y battery Value Type
Temperature Pressure Test Mode Frequency (MHz) 4804.000	Met	TWS Earbu 22.8 ℃ 960hPa Mode 7 (Ri er Reading (dBµV) 46.83	ight Earbud) Factor (dB) 0.08	Emissio (dBµ) 46.	Relativ Test V Anten n Level V/m) 91 36	ve Humidity foltage na Polarity Limits (dBµV/m) 74	59.7 % DC 3.7V by Vertical Margin (dB) -27.09	y battery Value Type peak
Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Met	TWS Earbu 22.8 ℃ 960hPa Mode 7 (Ri er Reading (dBµV) 46.83 37.28	ight Earbud) Factor (dB) 0.08 0.08	Emissio (dBµ 46. 37.	Relativ Test V Anten n Level V/m) 91 36 12	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	59.7 % DC 3.7V by Vertical Margin (dB) -27.09 -16.64	y battery Value Type peak AVG
Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Met	TWS Earbu 22.8 ℃ 960hPa Mode 7 (Ri er Reading (dBµV) 46.83 37.28 41.91	ight Earbud) Factor (dB) 0.08 0.08 2.21	Emissio (dBµ ¹ 46. 37. 44.	Relativ Test V Anten n Level V/m) 91 36 12	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.7 % DC 3.7V by Vertical Margin (dB) -27.09 -16.64 -29.88	y battery Value Type peak AVG peak

Radiated Emissions Test Results Above 1GHz

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT Name		Baseus Ba TWS Earb	iss 15 Clip Ope uds	n-Ear	Model	Name	Bass 15 C	ip	
Temperature		22.8 ℃			Relativ	ve Humidity	59.7 %		
Pressure		960hPa		Test Voltage		DC 3.7V b	DC 3.7V by battery		
Test Mode		Mode 8 (R	ight Earbud)		Anten	na Polarity	Horizontal	Horizontal	
Frequency	Met	er Reading	Factor	Emissio	on Level	Limits	Margin		
(MHz)		(dBµV)	(dB)	(dBµ'	V/m)	(dBµV/m)	(dB)	Value Type	
4882.000		46.16	0.08	46.	24	74	-27.76	peak	
4882.000		37.57	0.08	37.	65	54	-16.35	AVG	
7323.000		41.15	2.21	43.	36	74	-30.64	peak	
7323.000		32.02	2.21	34.	23	54	-19.77	AVG	
Remark:									
EUT Name			TWS Earbuds		Bass 15 Clip				
remperature		ZZ.O U			Polati		50 7 %		
D#####################################						ve Humidity	59.7 %	. h ottom .	
Pressure		960hPa			Relativ Test V		59.7 % DC 3.7V by	y battery	
		960hPa	ight Earbud)		Test V			y battery	
Test Mode	Mete	960hPa Mode 8 (R	ight Earbud) Factor	Emissio	Test V Anten	oltage	DC 3.7V by Vertical	1	
Frequency	Mete	960hPa Mode 8 (R er Reading	Factor	-	Test V Anten	oltage na Polarity Limits	DC 3.7V by Vertical Margin	y battery - Value Type	
Test Mode	Mete	960hPa Mode 8 (R	- ·	Emissic (dBµ) 46.	Test V Anten on Level V/m)	oltage na Polarity	DC 3.7V by Vertical	1	
Test Mode Frequency (MHz)	Meta	960hPa Mode 8 (R er Reading (dBµV)	Factor (dB)	(dBµ'	Test V Anten on Level V/m) 89	oltage na Polarity Limits (dBµV/m)	DC 3.7V by Vertical Margin (dB)	Value Type	
Test Mode Frequency (MHz) 4882.000	Mete	960hPa Mode 8 (R er Reading (dBµV) 46.81	Factor (dB) 0.08	(dBµ' 46.	Test V Anten on Level V/m) 89 46	Limits (dBµV/m) 74	DC 3.7V by Vertical Margin (dB) -27.11 -16.54	– Value Type peak	
Test Mode Frequency (MHz) 4882.000 4882.000	Met	960hPa Mode 8 (R er Reading (dBμV) 46.81 37.38	Factor (dB) 0.08 0.08	(dBµ) 46. 37.	Test V Anten on Level V/m) 89 46 33	Limits (dBµV/m) 74 54	DC 3.7V by Vertical Margin (dB) -27.11	Value Type peak AVG	
Test Mode Frequency (MHz) 4882.000 4882.000 7323.000		960hPa Mode 8 (R er Reading (dBµV) 46.81 37.38 41.12	Factor (dB) 0.08 0.08 2.21	(dBµ) 46. 37. 43.	Test V Anten on Level V/m) 89 46 33	Limits (dBµV/m) 74 54 74	DC 3.7V by Vertical Margin (dB) -27.11 -16.54 -30.67	Value Type peak AVG peak	
(MHz) 4882.000 4882.000 7323.000		960hPa Mode 8 (R er Reading (dBµV) 46.81 37.38 41.12	Factor (dB) 0.08 0.08 2.21	(dBµ) 46. 37. 43.	Test V Anten on Level V/m) 89 46 33	Limits (dBµV/m) 74 54 74	DC 3.7V by Vertical Margin (dB) -27.11 -16.54 -30.67	Value Type peak AVG peak	
Test Mode Frequency (MHz) 4882.000 4882.000 7323.000 7323.000		960hPa Mode 8 (R er Reading (dBμV) 46.81 37.38 41.12 32.01	Factor (dB) 0.08 0.08 2.21 2.21	(dBµ) 46. 37. 43. 34.	Test V Anten on Level V/m) 89 46 33	Limits (dBµV/m) 74 54 74	DC 3.7V by Vertical Margin (dB) -27.11 -16.54 -30.67	Value Type peak AVG peak	
Test Mode Frequency (MHz) 4882.000 4882.000 7323.000 7323.000 Remark:		960hPa Mode 8 (R er Reading (dBμV) 46.81 37.38 41.12 32.01	Factor (dB) 0.08 0.08 2.21 2.21	(dBµ) 46. 37. 43. 34.	Test V Anten on Level V/m) 89 46 33	Limits (dBµV/m) 74 54 74	DC 3.7V by Vertical Margin (dB) -27.11 -16.54 -30.67	Value Type peak AVG peak	

RESULT: Pass



Feequency M (MHz) 4960.000 7440.000	22.8 ℃ 960hPa Mode 9 (Rig /eter Reading (dBµV) 46.07 37.57	ght Earbud) Factor (dB) 0.08	1	Test Vo Antenn n Level	e Humidity Itage a Polarity Limits	59.7 % DC 3.7V I Horizonta	by battery	
Frequency M (MHz) 4960.000 4960.000 4960.000	Mode 9 (Rig /eter Reading (dBµV) 46.07 37.57	Factor (dB)	Emission	Antenn n Level	a Polarity	Horizonta		
Frequency M (MHz) 4960.000 4960.000 4960.000	/eter Reading (dBµV) 46.07 37.57	Factor (dB)	Emission	n Level			l	
(MHz) 4960.000 4960.000	(dBµV) 46.07 37.57	(dB)			Limits	Margin		
(MHz) 4960.000 4960.000	(dBµV) 46.07 37.57	(dB)			Limits	Margin		
4960.000 4960.000	46.07 37.57	()	(dBµV				Value Type	
4960.000	37.57	0.08		//m)	(dBµV/m)	(dB)	value Type	
			46.1	15	74	-27.85	peak	
7440.000		0.08	37.6	65	54	-16.35	AVG	
7440.000	41.47	2.21	43.6	68	74	-30.32	peak	
7440.000	32.58	2.21	34.7	79	54	-19.21	AVG	
Remark:								
Factor = Antenna	Factor + Cable	e Loss – Pre-a	amplifier.					
EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds Model Name		Bass 15 0	Bass 15 Clip				
Temperature	22.8 ℃		F	Relativ	e Humidity	59.7 %		
Pressure	960hPa		1	Test Voltage DC 3.7V by battery		by battery		
Fest Mode	Mode 9 (Rig	ght Earbud)	ŀ	Antenna Polarity		Vertical	Vertical	
		_	1					
Frequency	Meter Reading	Factor	Emission		Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/r	,	(dBµV/m)	(dB)		
4960.000	46.71	0.08	46.79		74	-27.21	peak	
4960.000	37.88	0.08	37.96	-	54	-16.04	AVG	
7440.000	41.18	2.21	43.39		74	-30.61	peak	
7440.000	32.71	2.21	34.92	2	54	-19.08	AVG	
Remark:		1						
Factor = Antenr	na Factor + Coh	la loss Dro	amplifior					

RESULT: Pass

Note:

- 5. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 6. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 7. The "Factor" value can be calculated automatically by software of measurement system.
- 8. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7 (Left Earbud)	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

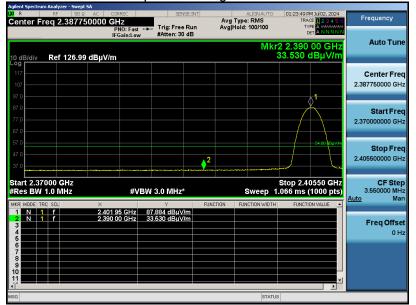


RESULT: Pass




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7 (Left Earbud)	Antenna Polarity	Vertical

Test Graph for Peak Measurement

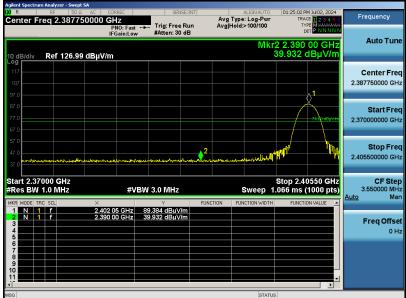

Test Graph for Average Measurement

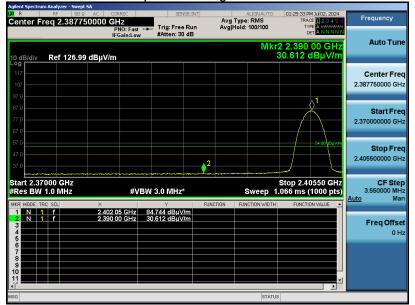


RESULT: Pass




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9 (Left Earbud)	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

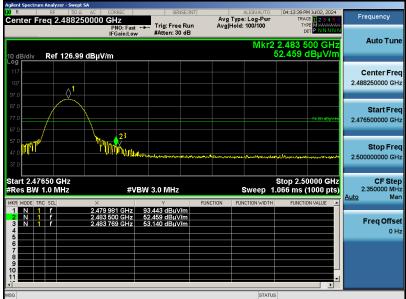

Test Graph for Average Measurement

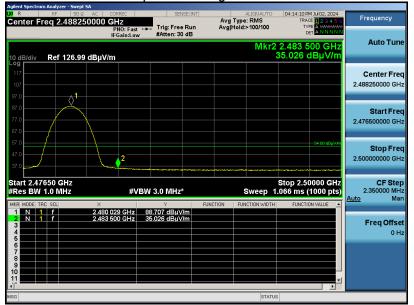


RESULT: Pass




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9 (Left Earbud)	Antenna Polarity	Vertical

Test Graph for Peak Measurement

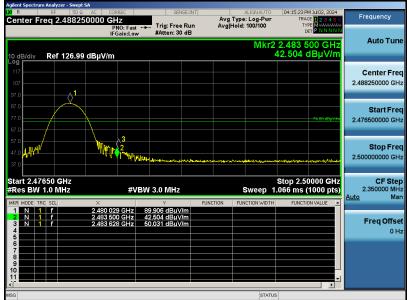

Test Graph for Average Measurement

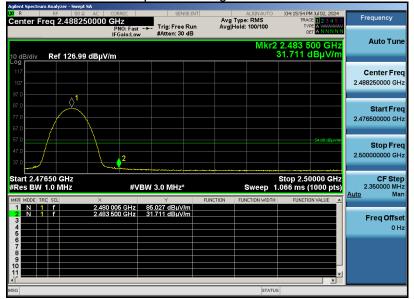

RESULT: Pass

Note:

- The factor had been edited in the "Input Correction" of the Spectrum Analyzer. 1.
- All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and 2.

documented in the report. Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Band Edge Emission Test Results for Restricted Bands-Right Earbud

EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7 (Right Earbud)	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

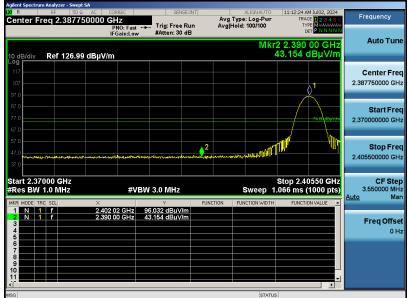

Test Graph for Average Measurement

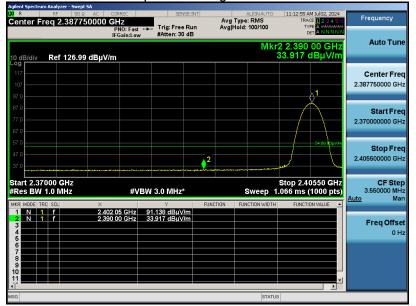


RESULT: Pass




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 7 (Right Earbud)	Antenna Polarity	Vertical

Test Graph for Peak Measurement

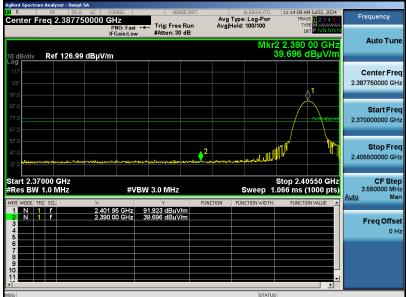

Test Graph for Average Measurement

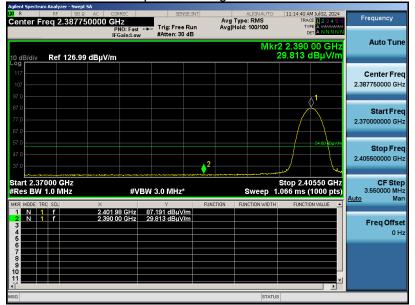


RESULT: Pass




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9 (Right Earbud)	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

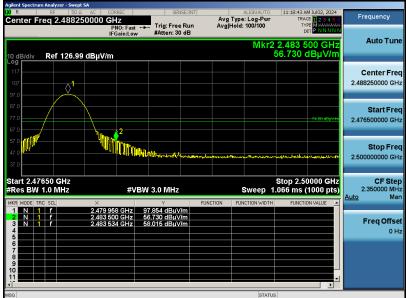

Test Graph for Average Measurement

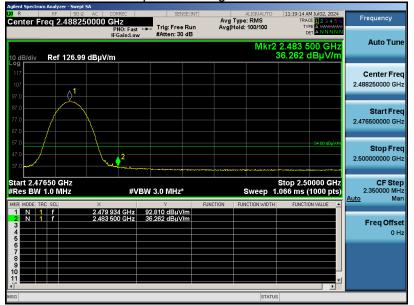


RESULT: Pass




EUT Name	Baseus Bass 15 Clip Open-Ear TWS Earbuds	Model Name	Bass 15 Clip
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 9 (Right Earbud)	Antenna Polarity	Vertical

Test Graph for Peak Measurement

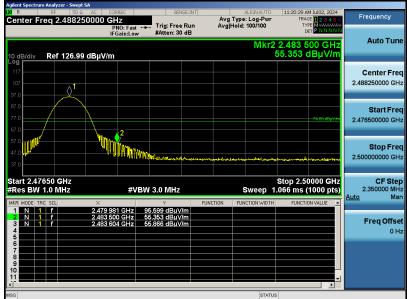

Test Graph for Average Measurement

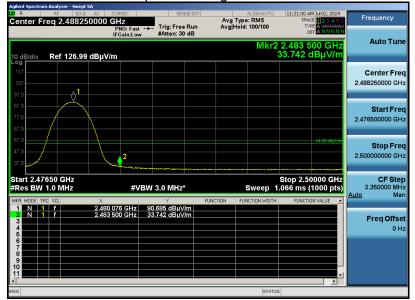

RESULT: Pass

Note:

- The factor had been edited in the "Input Correction" of the Spectrum Analyzer. 1.
- 2. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and

documented in the report. Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW \geq RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

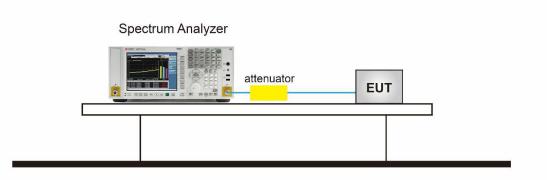

10.4 Measurement Result

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
8DPSK Hopping	79	>=15	Pass		



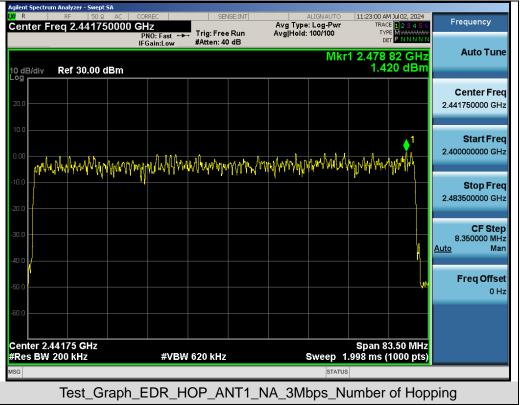

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be \leq channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW \geq RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


11.3 Measurement Setup (Block Diagram of Configuration)

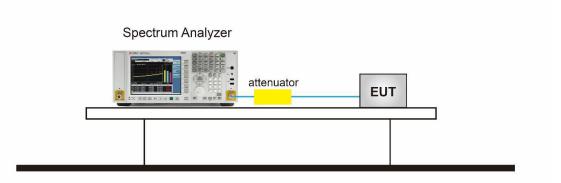

11.4 Measurement Result


Test Data of Dwell Time					
Channel	Time of Pulse for 3DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.912	26.0*4	302.848	400	Pass
2441	2.892	27.0*4	312.336	400	Pass
2480	2.892	27.0*4	312.336	400	Pass



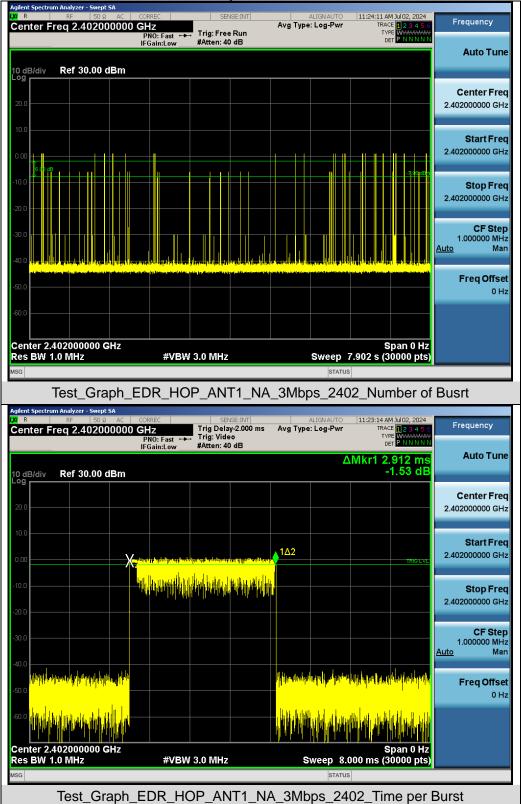


Test Graphs of Dwell Time



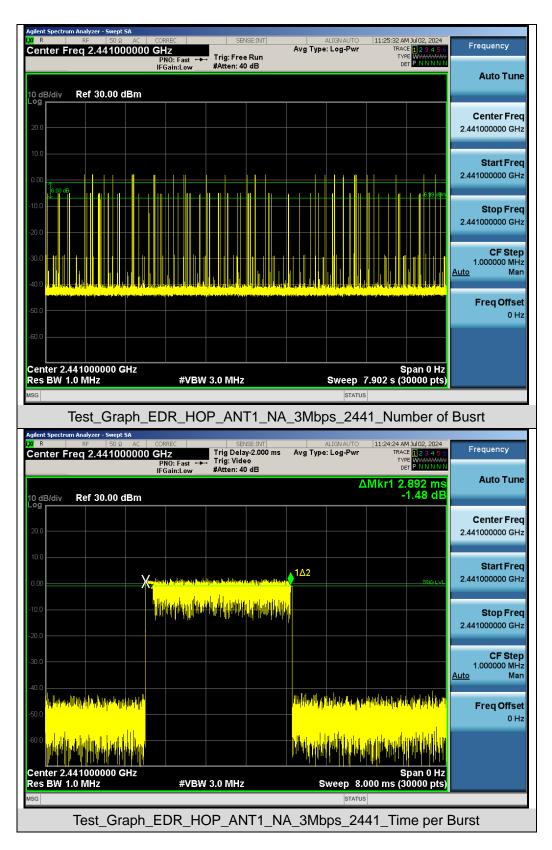



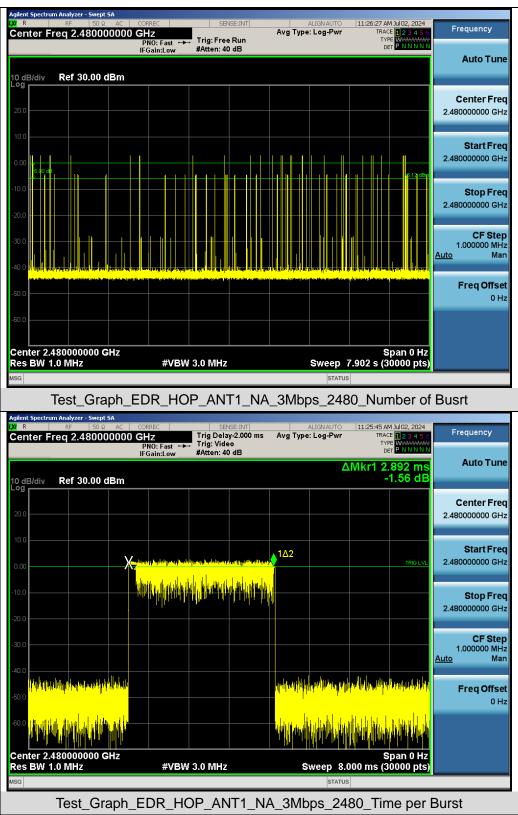

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



12. Frequency Separation Measurement

12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) \geq RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


12.3 Measurement Setup (Block Diagram of Configuration)

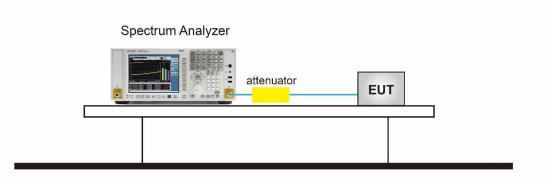

12.4 Measurement Result

Test Data of Frequency Separation				
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail	
8DPSK	0.985	0.626	Pass	



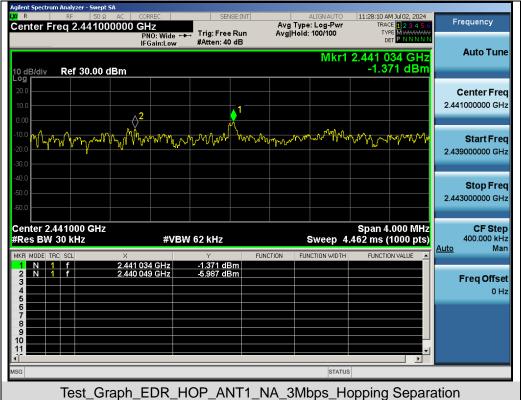

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



13. AC Power Line Conducted Emission Test

13.1 Measurement Limit


Frequency	Maximum RF Line Voltage		
	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

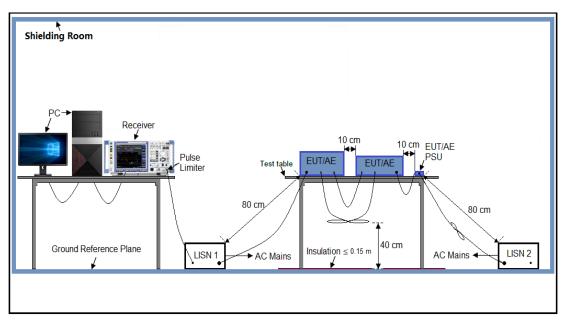



13.3 Preliminary Procedure of Line Conducted Emission Test

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

13.5 Measurement Results

N/A

Note: The BT function cannot transmit when charging



Report No.: AGC11758240605FR02 Page 83 of 83

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11758240605AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC11758240605AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.