

FCC Test Report

Report No.: AGC11758240548FR01

FCC ID	:	2A482-S0TV02
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Baseus Security P1 Pro Indoor Camera 3K
BRAND NAME	:	baseus
MODEL NAME	:	S0TV02
APPLICANT	:	Shenzhen Baseus Technology Co., Ltd.
DATE OF ISSUE	:	Jun. 04, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 04, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	13
5. Description of Test Modes	
6. Duty Cycle Measurement	
7. RF Output Power Measurement	16
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	21
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	



10.1 Provisions Applicable	
10.2 Measurement Procedure	33
10.3 Measurement Setup (Block Diagram of Configuration)	33
10.4 Measurement Results	
11. Radiated Spurious Emission	45
11.1 Measurement Limit	45
11.2 Measurement Procedure	45
11.3 Measurement Setup (Block Diagram of Configuration)	48
11.4 Measurement Result	49
12. AC Power Line Conducted Emission Test	65
12.1 Measurement Limit	65
12.2 Measurement Setup (Block Diagram of Configuration)	65
12.3 Preliminary Procedure of Line Conducted Emission Test	66
12.4 Final Procedure of Line Conducted Emission Test	66
12.5 Measurement Results	66
Appendix I: Photographs of Test Setup	69
Appendix II: Photographs of Test EUT	69



1. General Information

Asselfasser				
Applicant	Shenzhen Baseus Technology Co., Ltd.			
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China			
Manufacturer	Shenzhen Baseus Technology Co., Ltd.			
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China			
Factory	N/A			
Address	N/A			
Product Designation	Baseus Security P1 Pro Indoor Camera 3K			
Brand Name	baseus			
Test Model	S0TV02			
Series Model(s)	N/A			
Difference Description	N/A			
Date of receipt of test item	May 20, 2024			
Date of Test	May 20, 2024 to Jun. 04, 2024			
Deviation from Standard	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Test Report Form No	AGCER-FCC-BLE-V1			

Note: The test results of this report relate only to the tested sample identified in this report.

Jack Gui

(Project Engineer)

Jun. 04, 2024

Reviewed By

Prepared By

Calvin Liu (Reviewer)

Jun. 04, 2024

Approved By

Max Zhang (Authorized Officer)

Jun. 04, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	BLE GFSK 1Mbps: 7.156dBm BLE GFSK 2Mbps: 7.107dBm
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	1.42dBi
Power Supply	DC 5V by adapter
Adapter Information	N/A

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A482-S0TV02**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.42dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	
	adiated Courie							
	adiated Spurio			[1		Next Oct. Data	
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\square	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\square	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	



• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02	
\square	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	

• Tes	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
\square	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A				
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0				
\square	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
\bowtie	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☑ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable		
1	Control Box		USB-TTL				
	X Test Accessories Come From The Manufacturer						

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable				
1	Adapter	Zhuzhou Dachuan Electronic Technology Co., Ltd.	DCT06W050100US-C0	Input:100-240V~50/60 200mA Output:5.0V 1.0A					



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary Table of Test Cases					
	Data Rate / Modulation					
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK					
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(AC/DC adapter)					
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(AC/DC adapter)					
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(AC/DC adapter)					
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(AC/DC adapter)					
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(AC/DC adapter)					
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(AC/DC adapter)					
AC Conducted Emission	Mode 1: Bluetooth Link + USB Cable (Charging from AC Adapter)					
2. For Radiated Emissic	worst case was recorded in the report, if no other cases. on, 3axis were chosen for testing for each applicable mode. nethod, a temporary antenna connector is provided by the manufacture. Software Setting Diagram					
x(+(F) ** x(+(F) ** x(+(F) ** x Serial-COI x Set_power done Iroot@any set_tx: done Iroot@any Iroot@any set_tx: done Iroot@any Iroot@any <	<pre>ka /mnt/sdcard]\$./wifi_test wlan0 set_tx 1 0 2 0 1500 kka /mnt/sdcard]\$./wifi_test wlan0 set_txstop p: /ka /mnt/sdcard]\$./wifi_test wlan0 set_power 16 ''' /ka /mnt/sdcard]\$./wifi_test wlan0 set_txstop pyka /mnt/sdcard]\$./wifi_test wlan0 set_txstop yka /mnt/sdcard]\$./wifi_test wlan0 set_power 16 ''' yka /mnt/sdcard]\$./wifi_test wlan0 set_power 16 ''' yka /mnt/sdcard]\$./wifi_test wlan0 set_tx 11 0 2 0 1500 yka /mnt/sdcard]\$./wifi_test wlan0 set_tx 11 0 2 0 1500 yka /mnt/sdcard]\$./wifi_test wlan0 set_tx 11 0 2 0 1500 </pre>					
就道	Serial: COM11, 115200 24, 27 24行, 80列 VT100 大写 数字					




6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2116	84.95	0.71	0.47
BLE_2Mbps	1058	56.34	2.49	0.95

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

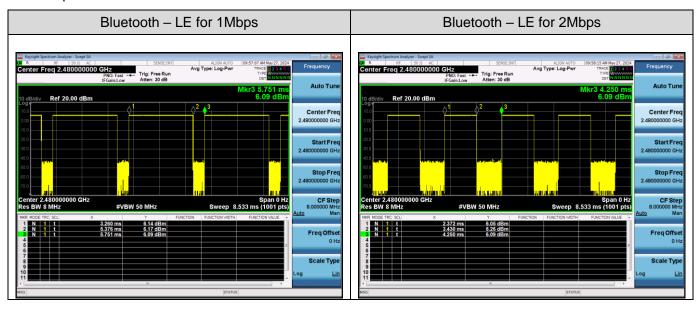

The test plots as follows:

^{1.} Duty Cycle factor = 10 * log (1/ Duty cycle)



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW \geq [3 × RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.3 Measurement Setup (Block Diagram of Configuration)

For peak power test setup

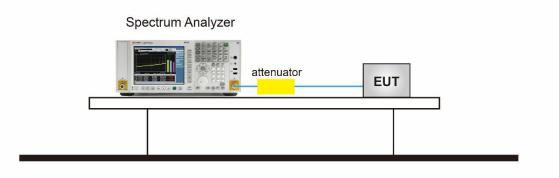

7.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	7.156	≤30	Pass			
GFSK_1Mbps	2440	6.634	≤30	Pass			
	2480	6.108	≤30	Pass			
	2402	7.107	≤30	Pass			
GFSK_2Mbps	2440	6.572	≤30	Pass			
	2480	6.010	≤30	Pass			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com


 Web: http://www.agccert.com/



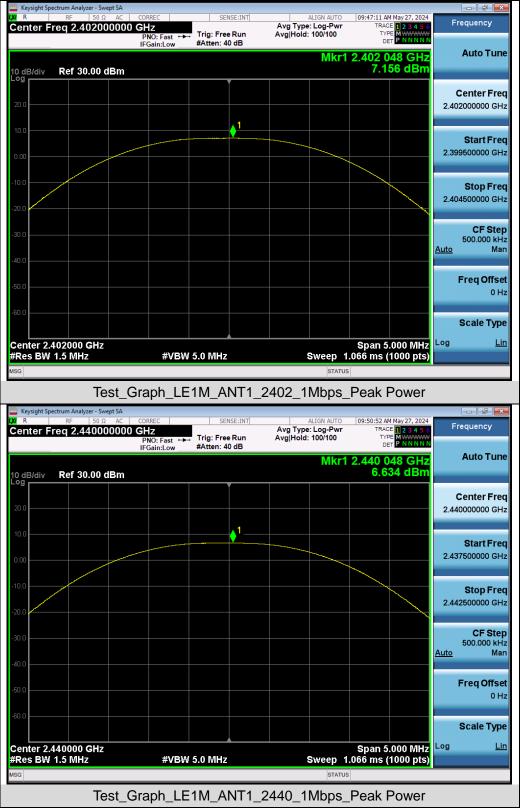


Test Graphs of Conducted Output Power



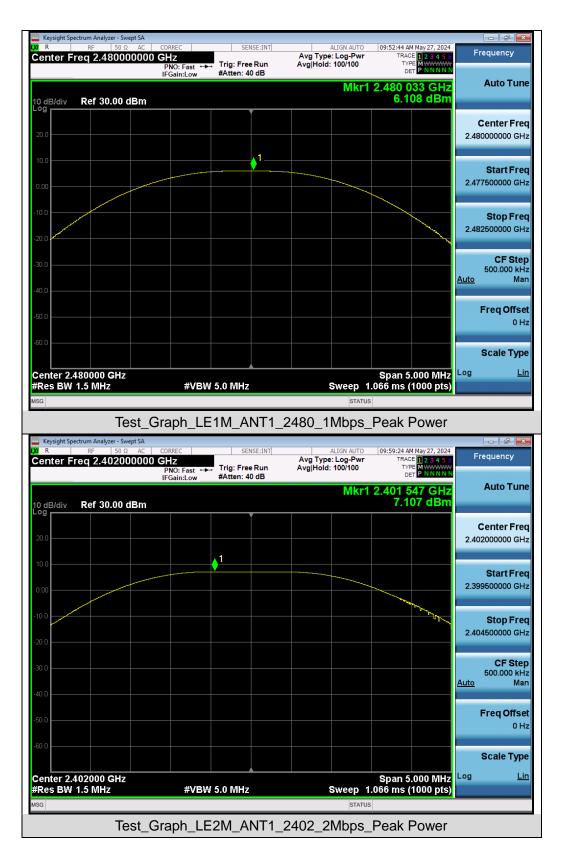



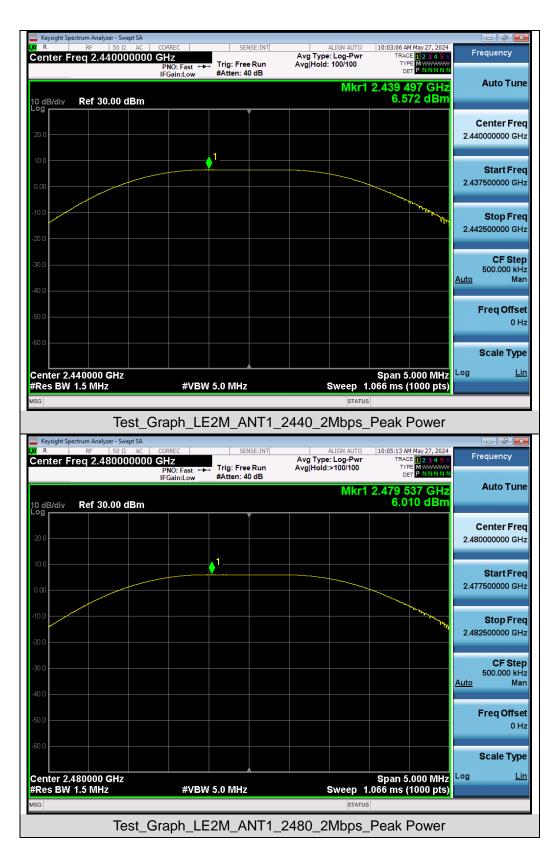



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

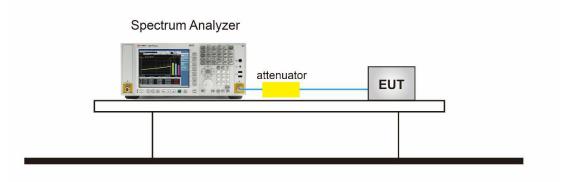





8.4 Measurement Results

	Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail				
	2402	1.026	0.671	≥0.5	Pass				
GFSK_1Mbps	2440	1.025	0.670	≥0.5	Pass				
	2480	1.029	0.671	≥0.5	Pass				
	2402	2.053	1.254	≥0.5	Pass				
GFSK_2Mbps	2440	2.055	1.254	≥0.5	Pass				
	2480	2.063	1.207	≥0.5	Pass				


Test Graphs of Occupied Bandwidth

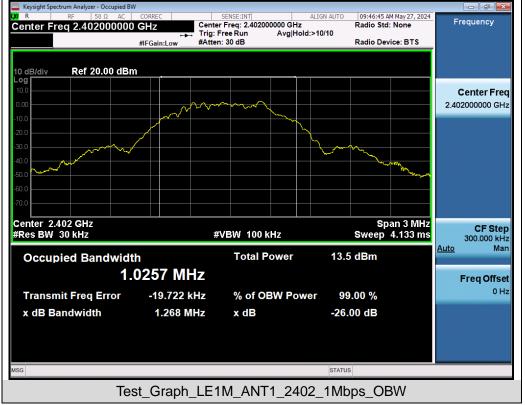



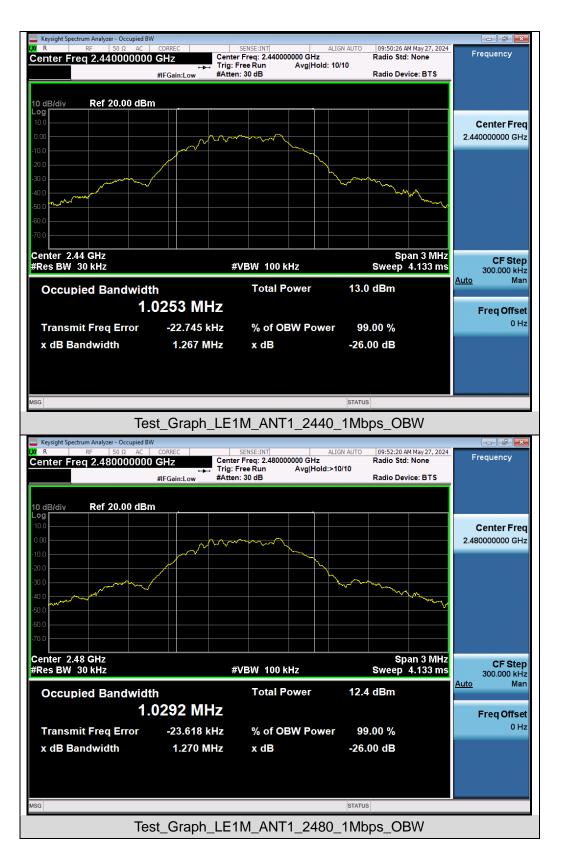



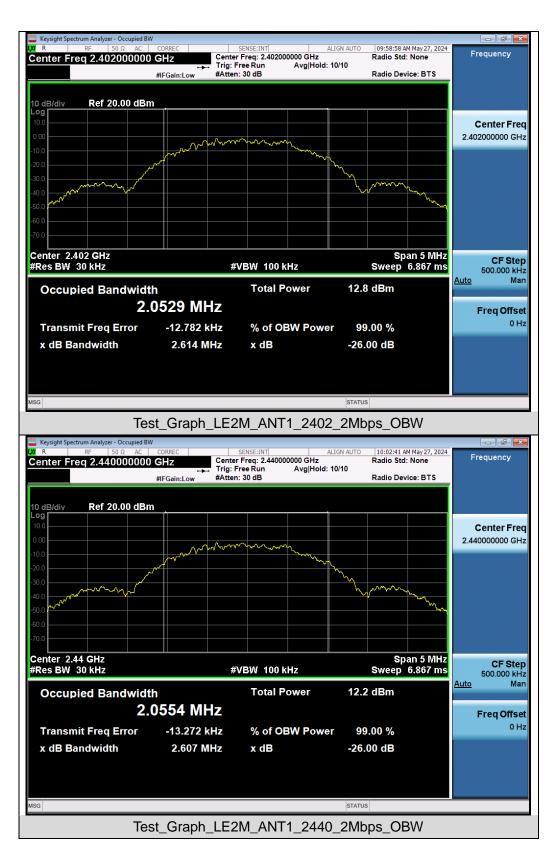

0 Hz





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2402_1Mbps_DTSBW

% of OBW Power

x dB

99.00 %

-6.00 dB

STATUS


-24.741 kHz

670.7 kHz


Transmit Freq Error

x dB Bandwidth




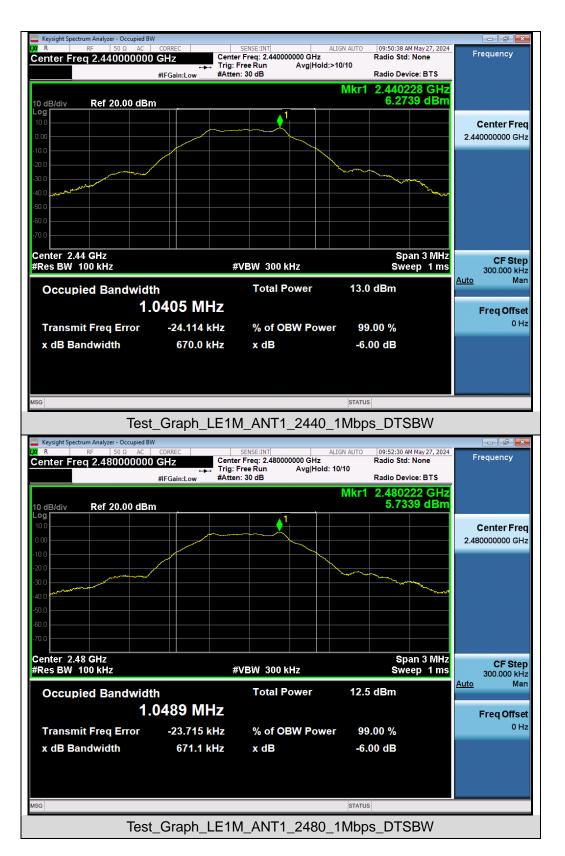



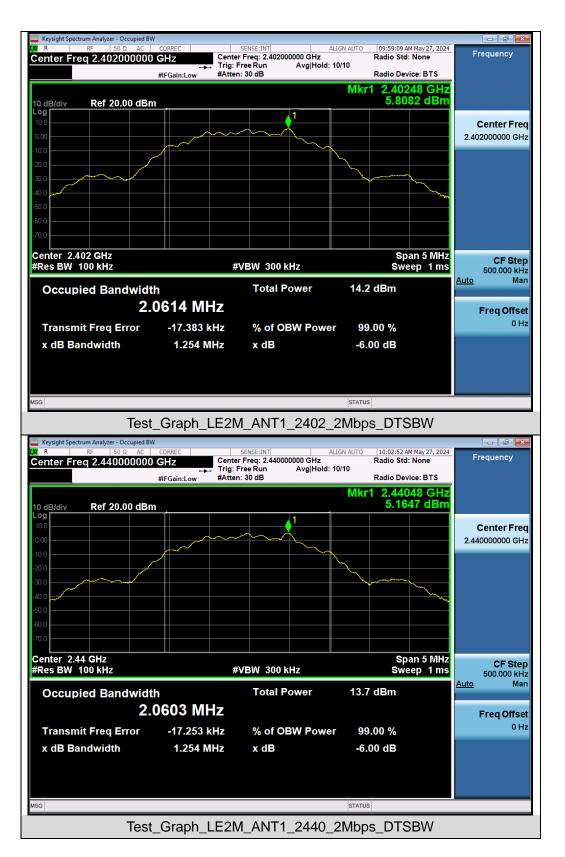



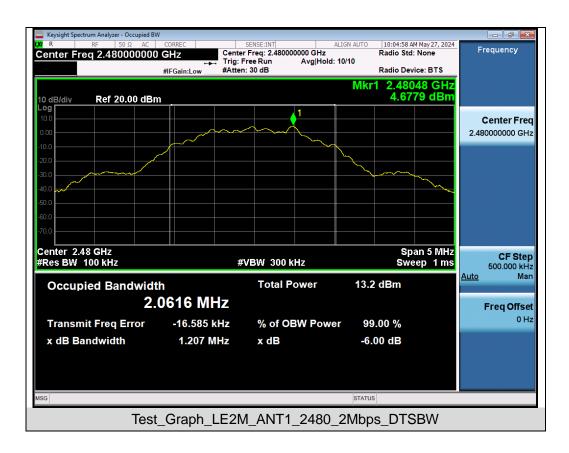



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

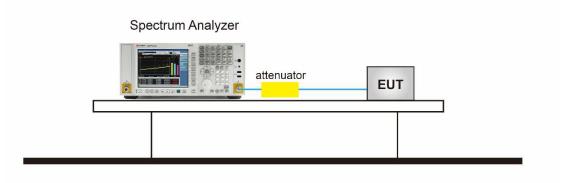




9.4 Measurement Results

	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail				
	2402	-8.808	≤8	Pass				
GFSK_1Mbps	2440	-9.435	≤8	Pass				
	2480	-9.991	≤8	Pass				
	2402	-12.198	≤8	Pass				
GFSK_2Mbps	2440	-12.749	≤8	Pass				
	2480	-13.211	≤8	Pass				


Test Graphs of Conducted Output Power Spectral Density





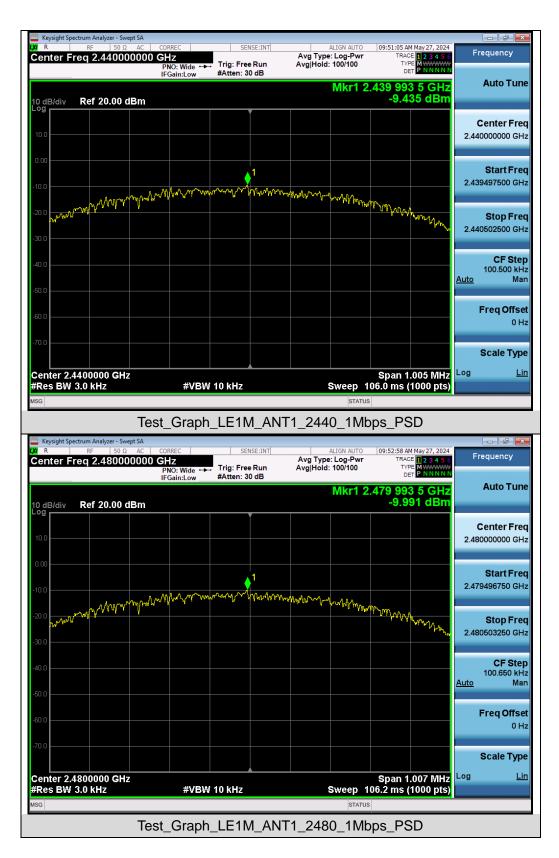



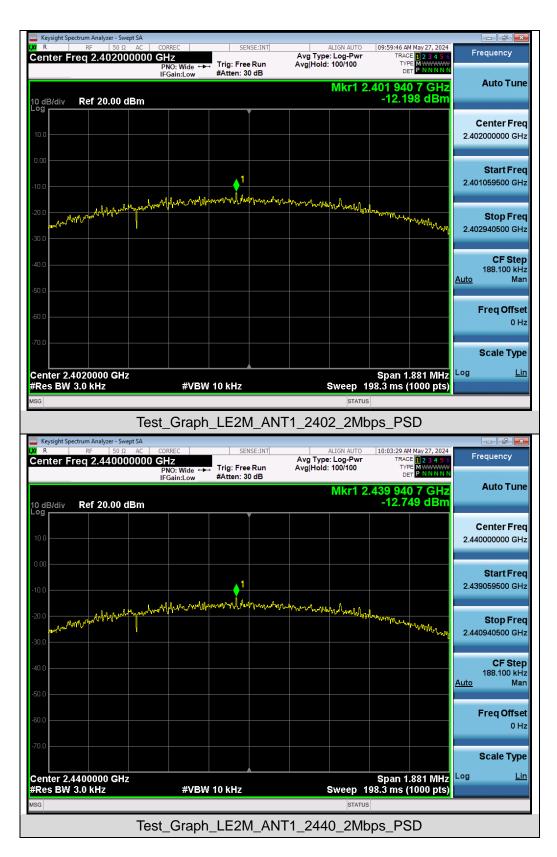



Keysight Spectru	rm Analyzer - Swept SA RF 50 Ω AC	CORREC	SENSE:INT	ALIGN AUTO	10:05:36 AM May 27, 2024	
	q 2.48000000		T	Avg Type: Log-Pwr Avg Hold: 100/100	TRACE 1 2 3 4 5 6 TYPE MWWWW DET P NNNN	Frequency
	tef 20.00 dBm	in ourneow		Mkr1 2	.479 941 1 GHz -13.211 dBm	Auto Tune
10.0						Center Freq 2.480000000 GHz
-10.0			1			Start Fred 2.479094750 GHz
-20.0	and definition with a solution of the second	Ymr Alla Mar Anvir	danan a ditan komba ad	www.www.whenday	han war	Stop Frec 2.480905250 GHz
-40.0						CF Step 181.050 kH <u>Auto</u> Mar
-60.0						Freq Offse 0 H
-70.0						Scale Type
Center 2.480 #Res BW 3.0		#VBV	↓ 10 kHz	Sweep 1	Span 1.811 MHz 90.9 ms (1000 pts)	Log <u>Lin</u>
	Т	est_Graph	LE2M_AN	T1_2480_2Mb	ps_PSD	



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

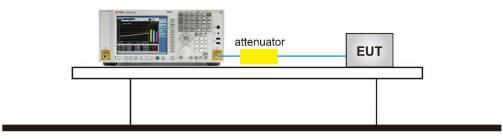




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




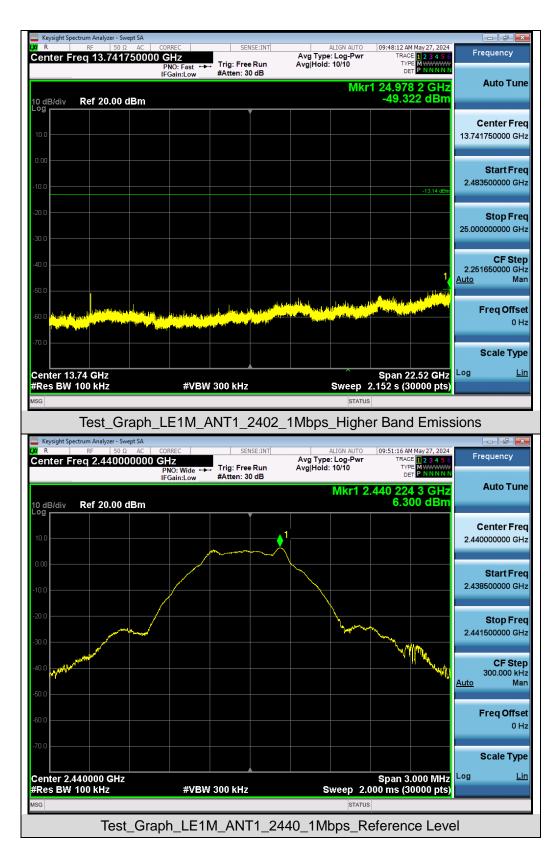




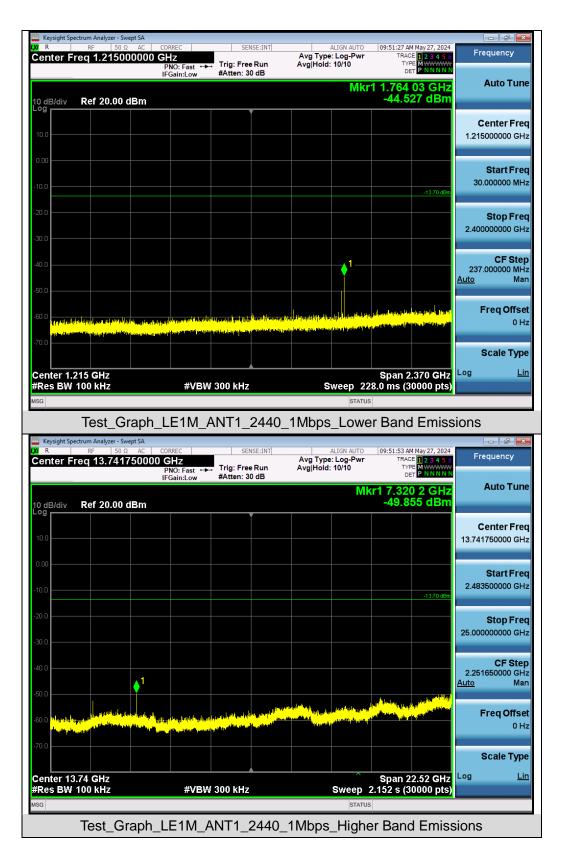




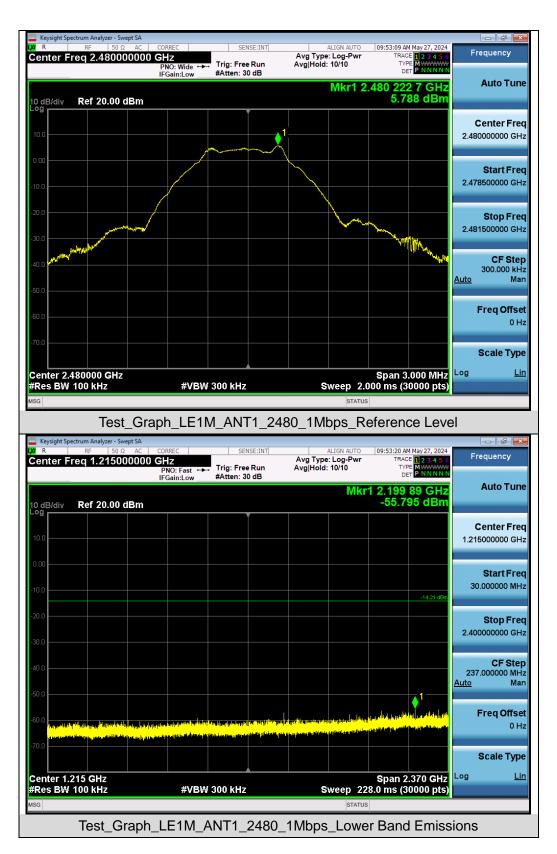



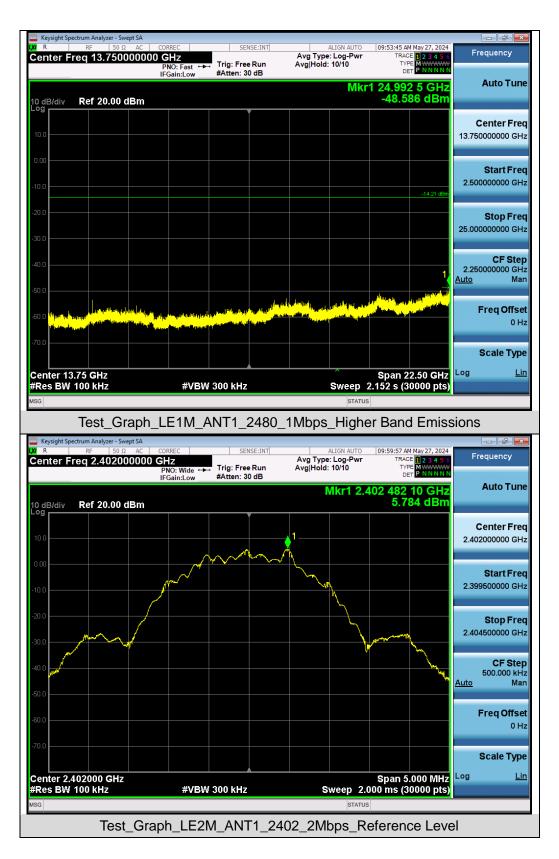




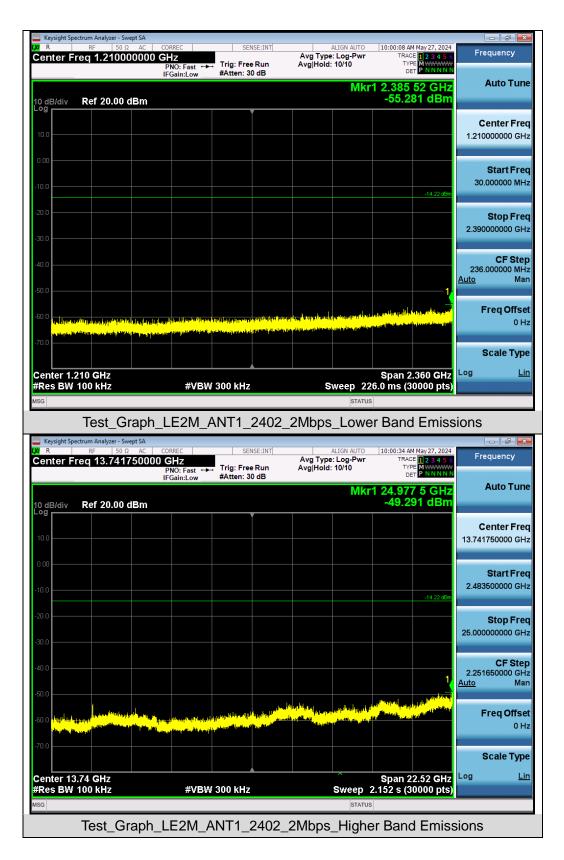









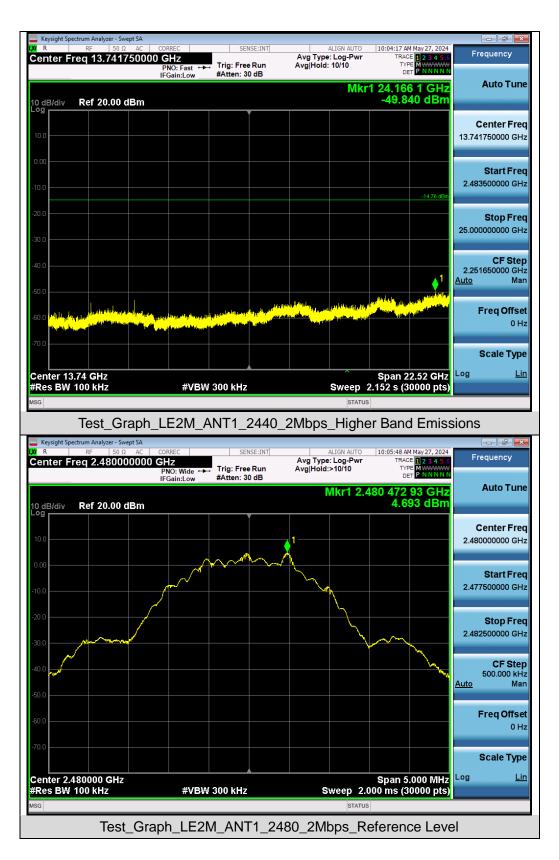



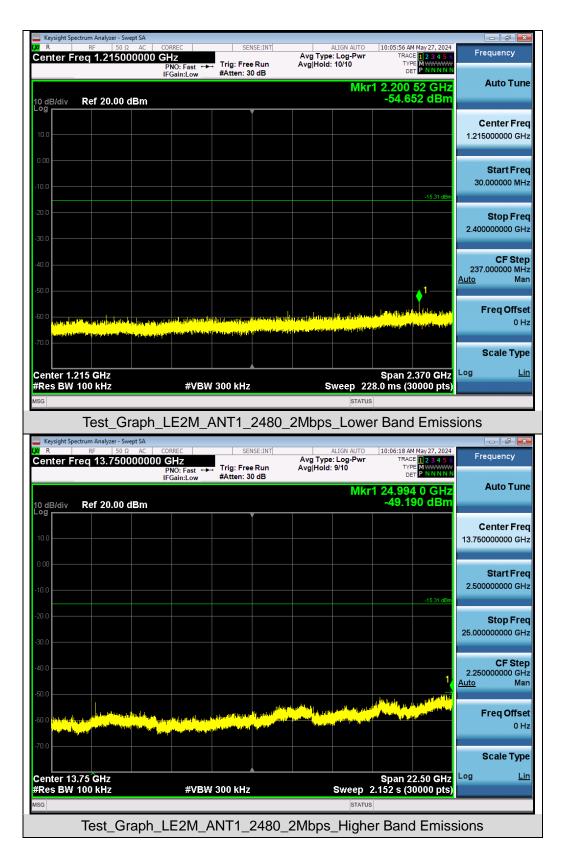




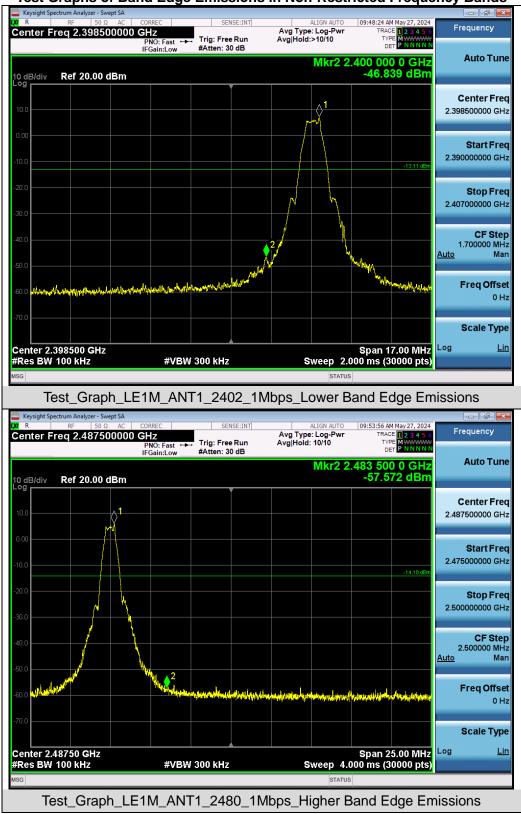

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



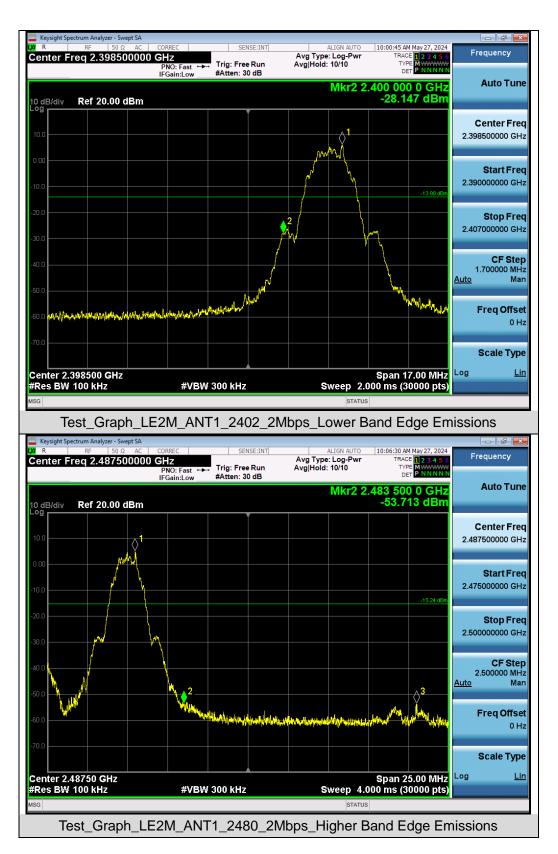



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)




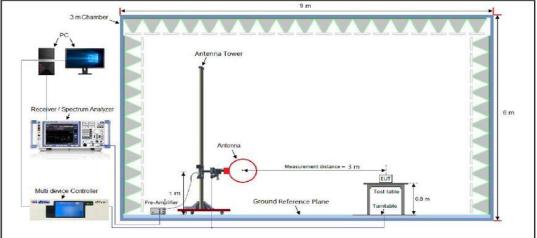

Radiated Emission Test Setup 30MHz-1000MHz

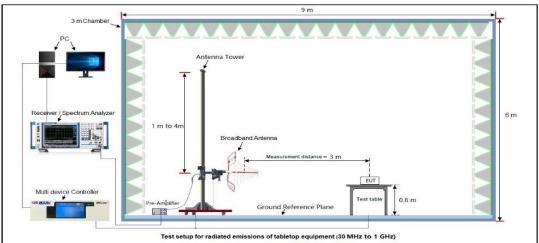

Radiated Emission Test Setup Above 1000MHz

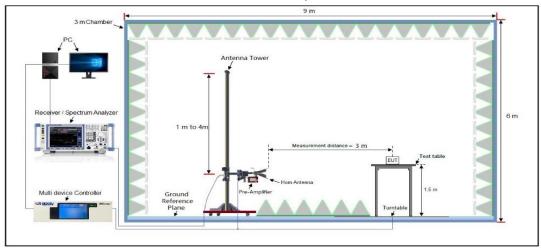

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT N	lame	Baseu	IS Security P	1 Pro Indoo	or Camera 3K	Model Na	ime	S0TV02	
Tempe	erature	22.5 ℃				Relative I	Humidity	58.4%	
Press	ure	960hF	°a			Test Volta	age	Normal Vo	oltage
Test M	lode	Mode	1			Antenna	Polarity	Horizontal	
	72.0	dBuV/m							
								Limit: — Margin: —	
	32					1	3 4 5		
	н <i>ц</i> и,		Melinishining			uter medually of the product			
	30.00	0 40	50 60 70	80	(MHz)	300	400 500 600	0 700 1000.0	00
Final [Data List								
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.509	92	23.78	12.40	40.00	16.22	100	130	Horizontal
2	130.37	89	26.48	15.78	43.50	17.02	100	160	Horizontal
3	440.19	63	30.54	25.09	46.00	15.46	100	170	Horizontal
4	545.18	26	31.61	23.98	46.00	14.39	100	210	Horizontal
5	625.07	80	31.54	24.72	46.00	14.46	100	250	Horizontal
6	900.14	74	37.25	31.78	46.00	8.75	100	120	Horizontal





		Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT Name	Ba	seus Security P	1 Pro Indoo	or Camera 3K	Model Na	ame	S0TV02	
Temperatu	re 22.	5℃			Relative	Humidity	58.4%	
Pressure	960	DhPa			Test Volta	age	Normal Vo	ltage
Test Mode	Мо	de 1			Antenna	Polarity	Vertical	
		'n			·			
							Limit: <u>—</u> Margin: —	
							f	
					J			
	ļ				ı — —	4	put manual a	
	32		2 X	3	and when the she have a she with the	Anone the manual second		
	W.A	And Manager And March Marth	whom white	vir William Many Halpin Mary Mary	and up from the other to reason to a			
-{	30.000	40 50 60 70	80	(MHz)	300	400 500 60	0 700 1000.00	n
	50.000			(1112)	500	400 500 00		
Final Data	List	-		1		-		
	⁻ req. MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
	.3173	34.31	13.70	40.00	5.69	100	90	Vertical
2 94	.4284	29.60	14.95	43.50	13.9	100	120	Vertical
3 13	0.8369	28.45	17.97	43.50	15.05	100	140	Vertical
4 44	7.9822	33.50	25.74	46.00	12.5	100	230	Vertical
5 71	6.6820	35.98	28.68	46.00	10.02	100	150	Vertical
6 94	5.4399	37.21	30.78	46.00	8.79	100	170	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



emperature ressure est Mode Frequency	22.5℃ 960hPa Mode 1			Relat	ive Humidity	58.4%	
Est Mode						30.470	
Frequency	Mode 1			Test \	Voltage	Normal \	/oltage
				Anter	nna Polarity	Horizont	al
	Meter Reading	Factor	Emission	n Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	(dB)	value Type
4804.000	46.25	0.08	46.3	33	74	-27.67	peak
4804.000	37.41	0.08	37.4	9	54	-16.51	AVG
7206.000	41.67	2.21	43.8	88	74	-30.12	peak
7206.000	32.32	2.21	34.5	53	54	-19.47	AVG
Remark:							<u> </u>
Factor = Antenna							
UT Name	Camera 3K	curity P1 Pr		Mode	el Name	S0TV02	
emperature	22.5 ℃			Relat	ive Humidity	58.4%	
ressure	960hPa			Test V	Voltage	Normal \	/oltage
est Mode	Mode 1			Anter	nna Polarity	Vertical	
Frequency	Meter Reading	Factor	Emissior	n Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	(dB)	Value Type
4804.000	46.29	0.08	46.3	37	74	-27.63	peak
4804.000	37.67	0.08	37.7	' 5	54	-16.25	AVG
7206.000	41.53	2.21	43.7	' 4	74	-30.26	peak
7206.000	32.16	2.21	34.3	37	54	-19.63	AVG
Remark:							<u> </u>

RESULT: Pass



EUT Name		Baseus S Camera 3	ecurity P1 F K	Pro Indoor	Mode	el Name		S0TV0	2
Temperature		22.5 ℃			Relat	tive Humidit	y	58.4%	
Pressure		960hPa			Test	Voltage		Normal	Voltage
Test Mode		Mode 2			Ante	nna Polarity	/	Horizor	ntal
Frequency	Μ	eter Reading	Factor	Emissio	n Level	Limits		Margin	Value Type
(MHz)		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)		(dB)	value Type
4880.000		45.64	0.14	45.7	'8	74		-28.22	peak
4880.000		37.56	0.14	37.	7	54		-16.3	AVG
7320.000		42.31	2.36	44.6	67	74		-29.33	peak
7320.000		33.27	2.36	35.6	63	54		-18.37	AVG
Remark:									
Factor = Ante	enna F	Factor + Cab	le Loss – Pre	e-amplifier.					
EUT Name		Baseus Se Camera 3	ecurity P1 F K	Pro Indoor	Mode	el Name		S0TV02	2
Temperature		22.5 ℃			Relat	tive Humidit	y	58.4%	
Pressure		960hPa			Test	Voltage		Normal	Voltage
Test Mode		Mode 2			Ante	nna Polarity	/	Vertical	
	Mata	- Decidinar	F actor	F aciation I		Limits			
Frequency (MHz)		r Reading dBµV)	Factor (dB)	Emission Lo (dBµV/m		(dBµV/m)		argin dB)	Value Type
. ,		: /)		```	/	naak
4880.000 4880.000		45.25 37.84	0.14	45.39 37.98		74 54		8.61 6.02	peak AVG
								6.02 8.95	peak
7320.000 7320.000		42.69 33.53	2.36	45.05 35.89		74 54		8.95 8.11	AVG
7320.000		33.33	2.30	35.89		54	-1	0.11	AVG
Remark:									
Factor = Antenn	a Far	rtor + Cable	l oss _ Dro o	mnlifier					
	aia		LU33 - FIC-a						

RESULT: Pass



EUT Name	Baseus Se Camera 3K	curity P1 Pro) Indoor	Model	Name	S0TV02	
Temperature	22.5 ℃			Relativ	ve Humidity	58.4%	
Pressure	960hPa			Test V	oltage	Normal V	'oltage
Test Mode	Mode 3			Anten	na Polarity	Horizonta	al
	·						
Frequency	Meter Reading	Factor	Emissio	on Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.25	0.22	46	.47	74	-27.53	peak
4960.000	38.17	0.22	38	.39	54	-15.61	AVG
7440.000	41.45	2.64	44	.09	74	-29.91	peak
7440.000	32.28	2.64	34	.92	54	-19.08	AVG
Remark:							
Factor = Anter	nna Factor + Cab	le Loss – Pre-	amplifier.				
EUT Name	Baseus Se Camera 3K	curity P1 Pro	o Indoor	Model	Name	S0TV02	
Temperature	22.5℃			Relativ	ve Humidity	58.4%	
Pressure	960hPa			Test V	oltage	Normal V	'oltage
Test Mode	Mode 3			Anten	na Polarity	Vertical	
				[
		Factor	Emissio	nlevell	Limits	Margin	Value Type
Frequency	Meter Reading						value Type
(MHz)	(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
(MHz) 4960.000	(dBµV) 46.32	(dB) 0.22	(dBµ 46	ıV/m) .54	(dBµV/m) 74	-27.46	peak
(MHz) 4960.000 4960.000	(dBµV) 46.32 38.84	(dB) 0.22 0.22	(dBµ 46 39	IV/m) .54 .06	(dBµV/m) 74 54	-27.46 -14.94	peak AVG
(MHz) 4960.000 4960.000 7440.000	(dBµV) 46.32 38.84 40.67	(dB) 0.22 0.22 2.64	(dBµ 46 39 43	IV/m) .54 .06 .31	(dBµV/m) 74 54 74	-27.46 -14.94 -30.69	peak AVG peak
(MHz) 4960.000 4960.000	(dBµV) 46.32 38.84	(dB) 0.22 0.22	(dBµ 46 39 43	IV/m) .54 .06	(dBµV/m) 74 54	-27.46 -14.94	peak AVG
(MHz) 4960.000 4960.000 7440.000	(dBµV) 46.32 38.84 40.67	(dB) 0.22 0.22 2.64	(dBµ 46 39 43	IV/m) .54 .06 .31	(dBµV/m) 74 54 74	-27.46 -14.94 -30.69	peak AVG peak
(MHz) 4960.000 4960.000 7440.000	(dBµV) 46.32 38.84 40.67	(dB) 0.22 0.22 2.64	(dBµ 46 39 43	IV/m) .54 .06 .31	(dBµV/m) 74 54 74	-27.46 -14.94 -30.69	peak AVG peak

RESULT: Pass



UT Name	Baseus S Camera 3ł	ecurity P1 Pr <	o Indoor	Mode	el Name	S0TV02	
emperature	22.5 ℃			Relat	ive Humidity	58.4%	
ressure	960hPa			Test V	Voltage	Normal	/oltage
est Mode	Mode 4			Anter	nna Polarity	Horizont	al
							_
Frequency	Meter Reading	Factor	Emissio	n Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	(dB)	value Type
4804.000	46.59	0.08	46.6	67	74	-27.33	peak
4804.000	37.32	0.08	37.	.4	54	-16.6	AVG
7206.000	41.18	2.21	43.3	39	74	-30.61	peak
7206.000	32.42	2.21	34.6	63	54	-19.37	AVG
Remark:							
	nna Factor + Cab	le Loss – Pre-	amplifier.				
UT Name		ecurity P1 Pr		Mode	el Name	S0TV02	
N	Baseus S	ecurity P1 Pr			I Name	S0TV02 58.4%	
UT Name	Baseus S Camera 3ł	ecurity P1 Pr		Relat			/oltage
UT Name emperature	Baseus S Camera 3ł 22.5℃	ecurity P1 Pr		Relat Test	ive Humidity	58.4%	/oltage
UT Name emperature ressure est Mode	Baseus S Camera 3ł 22.5℃ 960hPa Mode 4	ecurity P1 Pr <	o Indoor	Relat Test V Anter	ive Humidity Voltage nna Polarity	58.4% Normal Vertical	/oltage
UT Name emperature ressure est Mode	Baseus S Camera 3ł 22.5℃ 960hPa Mode 4 Meter Reading	ecurity P1 Pr { Factor	o Indoor	Relat	ive Humidity Voltage nna Polarity Limits	58.4% Normal Vertical Margin	/oltage Value Type
UT Name emperature ressure est Mode Frequency (MHz)	Baseus S Camera 3ł 22.5℃ 960hPa Mode 4 Meter Reading (dBµV)	ecurity P1 Pr (Factor (dB)	o Indoor Emissio (dBµ\	Relat Test V Anter n Level //m)	ive Humidity Voltage nna Polarity Limits (dBµV/m)	58.4% Normal V Vertical Margin (dB)	- Value Type
UT Name emperature ressure est Mode Frequency (MHz) 4804.000	Baseus S Camera 3ł 22.5℃ 960hPa Mode 4 Meter Reading (dBµV) 46.25	Ecurity P1 Pr	o Indoor Emissio (dBµ\ 46.:	Relat Test Anter n Level //m) 33	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	58.4% Normal V Vertical Margin (dB) -27.67	- Value Type peak
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	Baseus S Camera 3ł 22.5 °C 960hPa 960hPa Mode 4 Meter Reading (dBµV) 46.25 37.84 37.84	ecurity P1 Pr Factor (dB) 0.08 0.08	o Indoor Emissio (dBµ\ 46.3 37.9	Relat Test Anter n Level //m) 33 92	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	58.4% Normal V Vertical Margin (dB) -27.67 -16.08	Value Type peak AVG
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000	Baseus S Camera 3ł 22.5 °C 960hPa Mode 4 Meter Reading (dBµV) 46.25 37.84 41.61	Factor (dB) 0.08 2.21	0 Indoor Emissio (dBµ\ 46.3 37.9 43.8	Relat Test Anter n Level //m) 33 92 82	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	58.4% Normal V Vertical Margin (dB) -27.67 -16.08 -30.18	- Value Type peak AVG peak
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000	Baseus S Camera 3ł 22.5 °C 960hPa 960hPa Mode 4 Meter Reading (dBµV) 46.25 37.84 37.84	ecurity P1 Pr Factor (dB) 0.08 0.08	o Indoor Emissio (dBµ\ 46.3 37.9	Relat Test Anter n Level //m) 33 92 82	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	58.4% Normal V Vertical Margin (dB) -27.67 -16.08	Value Type peak AVG
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Baseus S Camera 3ł 22.5 °C 960hPa Mode 4 Meter Reading (dBµV) 46.25 37.84 41.61	Factor (dB) 0.08 2.21	0 Indoor Emissio (dBµ\ 46.3 37.9 43.8	Relat Test Anter n Level //m) 33 92 82	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	58.4% Normal V Vertical Margin (dB) -27.67 -16.08 -30.18	- Value Type peak AVG peak
UT Name emperature ressure est Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000 7206.000	Baseus S Camera 3ł 22.5 °C 960hPa Mode 4 Meter Reading (dBµV) 46.25 37.84 41.61	ecurity P1 Pr (Factor (dB) 0.08 0.08 2.21 2.21	o Indoor Emissio (dBµ\ 46.3 37.9 43.8 34.6	Relat Test Anter n Level //m) 33 92 82	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	58.4% Normal V Vertical Margin (dB) -27.67 -16.08 -30.18	- Value Type peak AVG peak

RESULT: Pass



EUT Name		Baseus S Camera 3	ecurity P1 F <	Pro Indoor	Mode	el Name		S0TV02	2
Temperature		22.5 ℃			Relat	tive Humidi	y	58.4%	
Pressure		960hPa			Test	Voltage		Normal	Voltage
Test Mode		Mode 5			Ante	nna Polarity	/	Horizor	ntal
Frequency	Μ	eter Reading	Factor	Emissio	n Level	Limits		Margin	Value Type
(MHz)		(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)		(dB)	value Type
4880.000		45.79	0.14	45.9)3	74		-28.07	peak
4880.000		36.53	0.14	36.6	67	54		-17.33	AVG
7320.000		41.95	2.36	44.3	31	74		-29.69	peak
7320.000		32.52	2.36	34.8	88	54		-19.12	AVG
Remark:									
Factor = Ante	enna I	Factor + Cab	le Loss – Pre	e-amplifier.					
		T							
EUT Name		Baseus S Camera 3	ecurity P1 F K	Pro Indoor	Mode	el Name		S0TV02	2
Temperature		22.5℃			Relat	tive Humidi	ty	58.4%	
Pressure		960hPa			Test	Voltage		Normal	Voltage
Test Mode		Mode 5			Ante	nna Polarity	/	Vertical	
· - · · ·		_	-		.			· · ·	
Frequency		r Reading	Factor	Emission Lo		Limits		argin	Value Type
(MHz)		dBµV)	(dB)	(dBµV/m)	(dBµV/m)	```	dB)	
4880.000		45.65	0.14	45.79		74		8.21	peak
4880.000		36.84	0.14	36.98		54		7.02	AVG
7320.000		41.52	2.36	43.88		74		0.12	peak
7320.000		32.71	2.36	35.07		54	-1	8.93	AVG
Romorly:									
Remark: Factor = Antenn	<u>а Г</u> -		Lees Dura	بمربعا الأردية					

RESULT: Pass




EUT Name		Baseus Security P1 Pro Camera 3K 22.5 °C 960hPa Mode 6 Meter Reading Factor (dBµV) (dB) 46.21 0.22 38.58 0.22 41.37 2.64 32.46 2.64 a Factor + Cable Loss – Pre-ar Baseus Security P1 Pro Camera 3K 22.5 °C			Name	S0TV02		
Temperature	22.5 ℃			Relativ	ve Humidity	58.4%		
Pressure	960hPa			Test V	oltage	Normal V	/oltage	
Test Mode	Mode 6			Anten	na Polarity	Horizonta	al	
Frequency	Meter Reading	Factor	Emissio	on Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.21	0.22	46	.43	74	-27.57	peak	
4960.000	38.58	0.22	38	3.8	54	-15.2	AVG	
7440.000	41.37	2.64	44	.01	74	-29.99	peak	
7440.000	32.46	2.64	35	5.1	54	-18.9	AVG	
Remark:								
Factor = Anter	nna Factor + Cab	le Loss – Pre-	amplifier.					
·	Baseus Se	ecurity P1 Pr		Model	Name	S0TV02		
Factor = Anter EUT Name Temperature	Baseus Se	ecurity P1 Pr			Name ve Humidity	S0TV02 58.4%		
EUT Name	Baseus Se Camera 3k	ecurity P1 Pr		Relativ			/oltage	
EUT Name Temperature Pressure	Baseus Se Camera 3k 22.5℃	ecurity P1 Pr		Relativ Test V	ve Humidity	58.4%	/oltage	
EUT Name Temperature Pressure Test Mode	Baseus Se Camera 3k 22.5°C 960hPa Mode 6	ecurity P1 Pr	o Indoor	Relativ Test V Anten	ve Humidity oltage na Polarity	58.4% Normal V Vertical	/oltage	
EUT Name Femperature Pressure Fest Mode	Baseus Se Camera 3k 22.5°C 960hPa Mode 6 Meter Reading	Ecurity P1 Pro	D Indoor	Relativ Test V Anten	ve Humidity oltage na Polarity	58.4% Normal V Vertical Margin	/oltage Value Type	
EUT Name Femperature Pressure Fest Mode Frequency (MHz)	Baseus Se Camera 3k 22.5℃ 960hPa Mode 6 Meter Reading (dBµV)	Factor (dB)	D Indoor Emission (dBµ	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m)	58.4% Normal V Vertical Margin (dB)	- Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Baseus Se Camera 3k 22.5℃ 960hPa Mode 6 Meter Reading (dBµV) 46.96	Factor (dB) 0.22	Emissio (dBµ	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74	58.4% Normal V Vertical Margin (dB) -26.82	- Value Type peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Baseus Se Camera 3k 22.5 °C 960hPa Mode 6 Meter Reading (dBµV) 46.96 38.85	Factor (dB) 0.22 0.22	Emissio (dBµ 39	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	58.4% Normal V Vertical Margin (dB) -26.82 -14.93	- Value Type peak AVG	
EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000 4960.000 7440.000	Baseus Se Camera 3k 22.5 °C 960hPa Mode 6 Meter Reading (dBµV) 46.96 38.85 41.52	Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 47 39	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	58.4% Normal V Vertical Margin (dB) -26.82 -14.93 -29.84	- Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Baseus Se Camera 3k 22.5 °C 960hPa Mode 6 Meter Reading (dBµV) 46.96 38.85	Factor (dB) 0.22 0.22	Emissio (dBµ 47 39	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	58.4% Normal V Vertical Margin (dB) -26.82 -14.93	- Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	Baseus Se Camera 3k 22.5 °C 960hPa Mode 6 Meter Reading (dBµV) 46.96 38.85 41.52	Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 47 39	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	58.4% Normal V Vertical Margin (dB) -26.82 -14.93 -29.84	- Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	Baseus Se Camera 3k 22.5 °C 960hPa Mode 6 Meter Reading (dBµV) 46.96 38.85 41.52	Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 47 39	Relativ Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	58.4% Normal V Vertical Margin (dB) -26.82 -14.93 -29.84	- Value Type peak AVG peak	

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.






EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

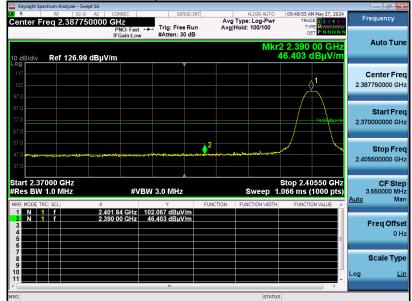

Test Graph for Average Measurement

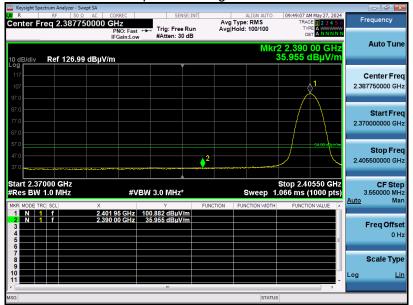

RESULT: Pass




Bana Luge Linission lest Results for Restricted Banas			
Baseus Security P1 Pro Indoo Camera 3K	Model Name	S0TV02	


Band Edge Emission Test Results for Restricted Bands
--

EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical




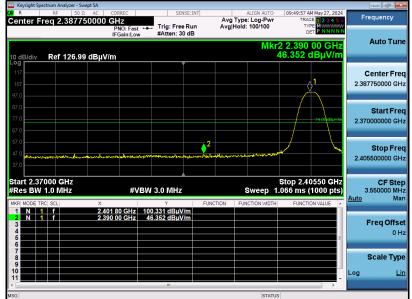

Test Graph for Average Measurement

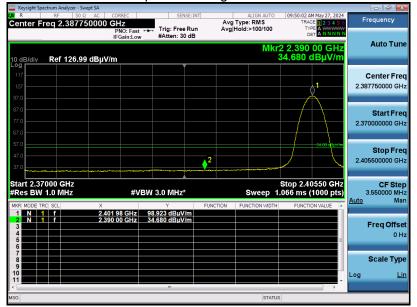


RESULT: Pass







Band Edge Emission Test Results for Restricted Bands

EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal




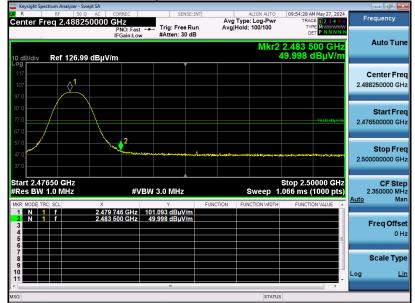

Test Graph for Average Measurement

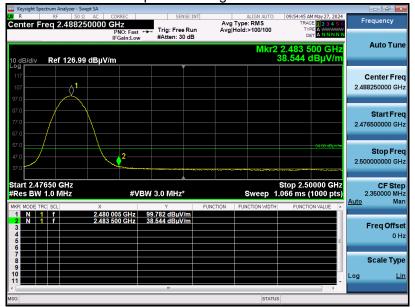



RESULT: Pass






EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical




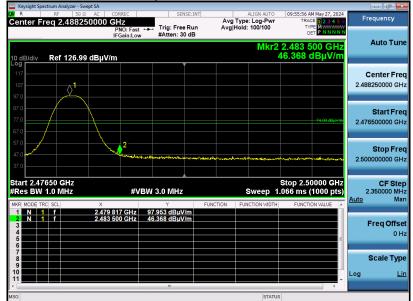

Test Graph for Average Measurement

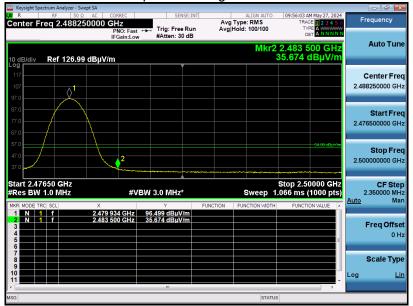



RESULT: Pass






EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal




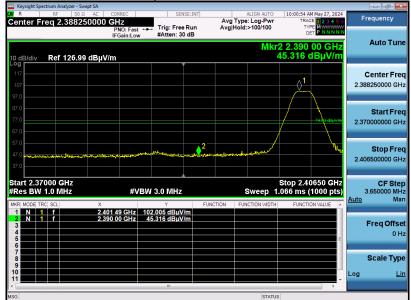

Test Graph for Average Measurement

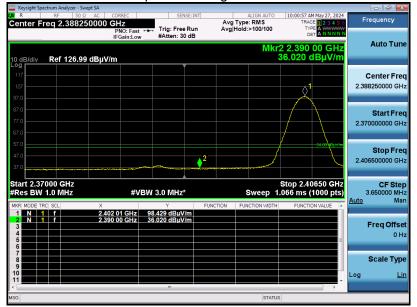


RESULT: Pass







Band Edge Emission Test Results for Restricted Bands

EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical




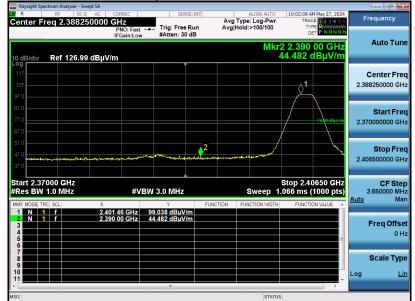

Test Graph for Average Measurement

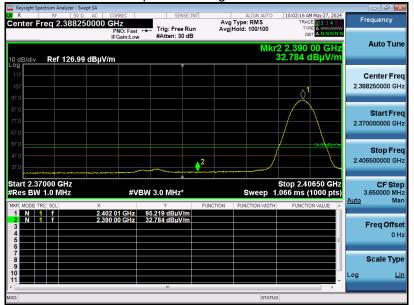


RESULT: Pass







Band Edge Emission Test Results for Restricted Bands

EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal




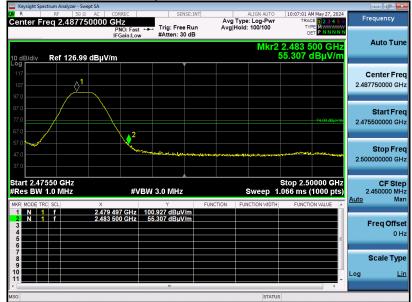

Test Graph for Average Measurement

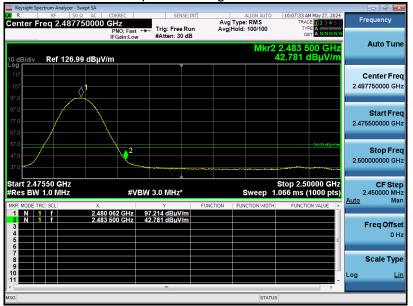

RESULT: Pass







Band Edge Emission Test Results for Restricted Bands	

EUT Name	Baseus Security P1 Pro Indoor Camera 3K	Model Name	S0TV02
Temperature	22.5 ℃	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical



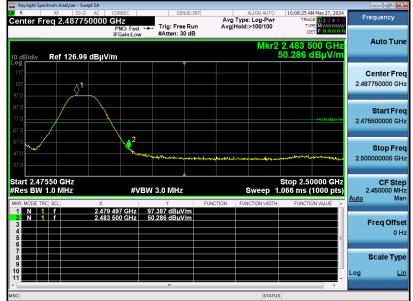

Test Graph for Average Measurement

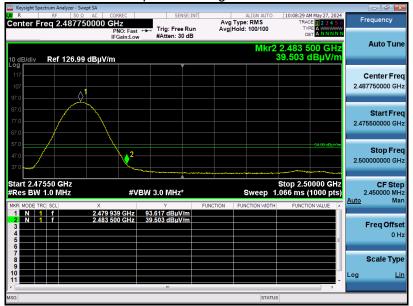

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Framman	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

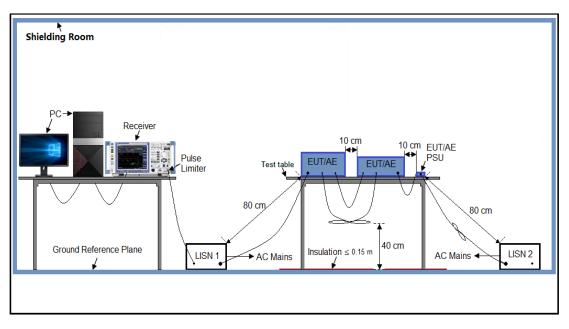



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


12.5 Measurement Results



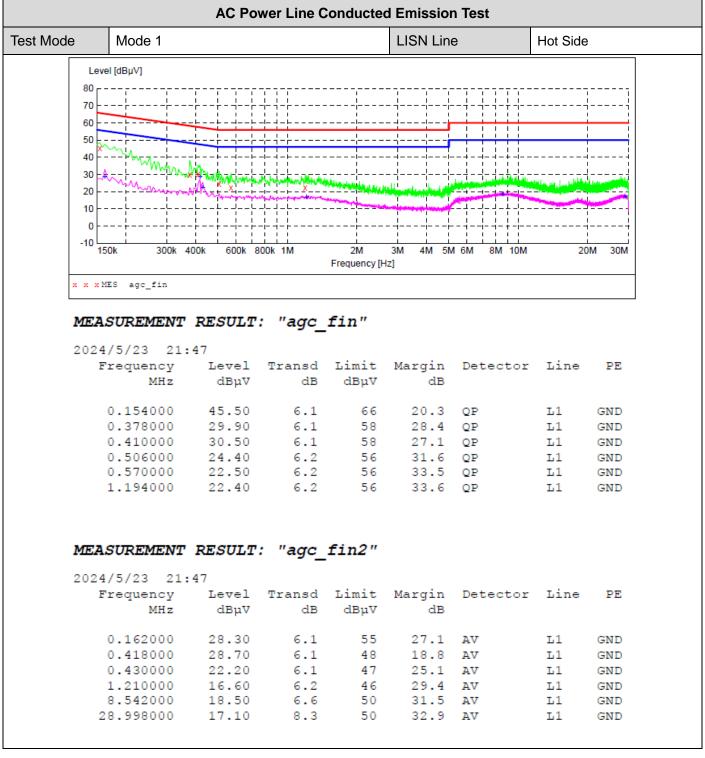

RESULT: Pass



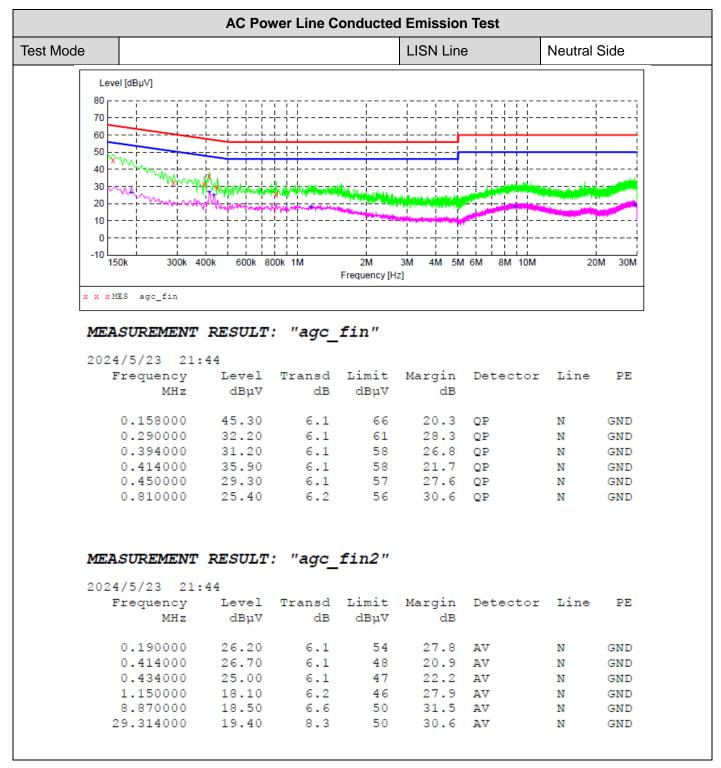

RESULT: PASS



Report No.: AGC11758240548FR01 Page 69 of 69

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11758240548AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC11758240548AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.