



TEST REPORT

FCC ID: 2A48S-T1

Applicant: Shenzhenshi Weiduli Technology Co.,Ltd.
Address: 4h Floor, Building 4, Dejin Industrial Zone, No. 40, Fuyuan 1st Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen
Manufacturer: Shenzhenshi Weiduli Technology Co.,Ltd.
Address: 4h Floor, Building 4, Dejin Industrial Zone, No. 40, Fuyuan 1st Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen
EUT: Lighting Power Bank Magnetic wireless
Trade Mark: N/A
Model Number: T1
Date of Receipt: Jul. 31, 2023
Test Date: Jul. 31, 2023 - Aug. 11, 2023
Date of Report: Aug. 11, 2023
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China
Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10:2013
Test Result: Pass
Report Number: DL-20230811020E

Prepared (Engineer): Lily Fu
Reviewer (Supervisor): Jack Bu
Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION	3
2. TEST SUMMARY	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED.....	6
5. CONDUCTED EMISSION TEST.....	7
6. RADIATION EMISSION TEST.....	11
7. BANDWIDTH TEST	17
8. SETUP PHOTOGRAPHS	18
9. EUT PHOTOGRAPHS	18

**1. VERSION**

Version No.	Date	Description
00	Aug. 11, 2023	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone,
Baolong Street, Longgang District, Shenzhen, Guangdong, China



3. GENERAL INFORMATION

3.1 Description of Device (EUT)


Product Name: Lighting Power Bank Magnetic wireless
 Trade Mark: N/A
 Model No.: T1
 Model Difference: N/A
 Serial No.: N/A
 Hardware version: H1.0
 Software version: S1.0
 Operation Frequency: 115kHz ~ 205KHz
 Modulation type: MSK
 Antenna Type: Inductive loop coil Antenna
 Antenna gain: 0dBi
 Battery Capacity: 3.85V, 10000mAh, 38.5Wh
 Type-C Input: 5V---3.0A, 9V---2.0A, 12V---1.5A
 Type-C Output: 5V---3.0A, 9V---2..22A, 12V---1.67A
 Power supply: USB Output: 4.5V---5.0A, 5V---4.5A, 5V---3.0A,
 9V---2..22A, 12V---1.67A
 USB+Type-C+Wireless charger: 5V---3.0A
 Wireless charger: 5W, 7.5W, 10W, 15W

3.2 Tested System Details


None.

3.3 Block Diagram of Test Set-up

AC Mode



DC Mode



3.4 Test Mode Description

- Mode1. Type-C Input+USB Output+Wireless charger Output Mode(Full Load)
- Mode2. Type-C Input+USB Output+Wireless charger Output Mode(Half Load)
- Mode3. Type-C Input+USB Output+Wireless charger Output Mode(No Load)
- Mode4. USB Output+Wireless charger Output Mode(Full Load)
- Mode5. USB Output+Wireless charger Output Mode(Half Load)
- Mode6. USB Output+Wireless charger Output Mode(No Load)

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

2. All modes have been tested, and the report only shows the results of the worst mode1 and mode4.



3.5 Test Auxiliary Equipment

Adapter (Provide by test lab):

Manufacturer: XIAOMI

Model: AD65G

I/P: AC 100-240V 50/60Hz

O/P: DC 5V/3A, DC 9V/3A, DC 10V/5A, DC 12V/3A,

DC 15V/3A, DC 20V/3.25A

Mobile phone (Provide by test lab):

Manufacturer: SAMSUNG

Model: Galaxy S21 5G

3.6 Test Uncertainty

Conducted Emission Uncertainty(150KHz-30MHz) : $\pm 2.56\text{dB}$

20dB Bandwidth : $\pm 0.5\text{kHz}$

Radiated Emission Uncertainty(9KHz-1GHz) : $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
EMI Receiver	R&S	ESR	101421	Nov. 05, 2022	Nov. 04, 2023
LISN	R&S	ENV216	102417	Nov. 05, 2022	Nov. 04, 2023
Clamp	COM-POWER	CLA-050	431071	Nov. 05, 2022	Nov. 04, 2023
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 05, 2022	Nov. 04, 2023
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 05, 2022	Nov. 04, 2023
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 05, 2022	Nov. 04, 2023
843 Cable 1#	ChengYu	CE Cable	001	Nov. 05, 2022	Nov. 04, 2023
843 Cable 1#	ChengYu	CE Cable	002	Nov. 05, 2022	Nov. 04, 2023


For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Sep. 20, 2022	Sep. 19, 2025
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 05, 2022	Nov. 04, 2023
EMI Receiver	R&S	ESRP7	101393	Nov. 05, 2022	Nov. 04, 2023
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 05, 2022	Nov. 04, 2023
Amplifier	EMEC	EM01G8GA	00270	Nov. 05, 2022	Nov. 04, 2023
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 05, 2022	Nov. 04, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 05, 2022	Nov. 04, 2023
Loop Antenna	ZHINAN	ZN30900A	/	Nov. 05, 2022	Nov. 04, 2023
966 Cable 1#	ChengYu	966	004	Nov. 05, 2022	Nov. 04, 2023
966 Cable 2#	ChengYu	966	003	Nov. 05, 2022	Nov. 04, 2023

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

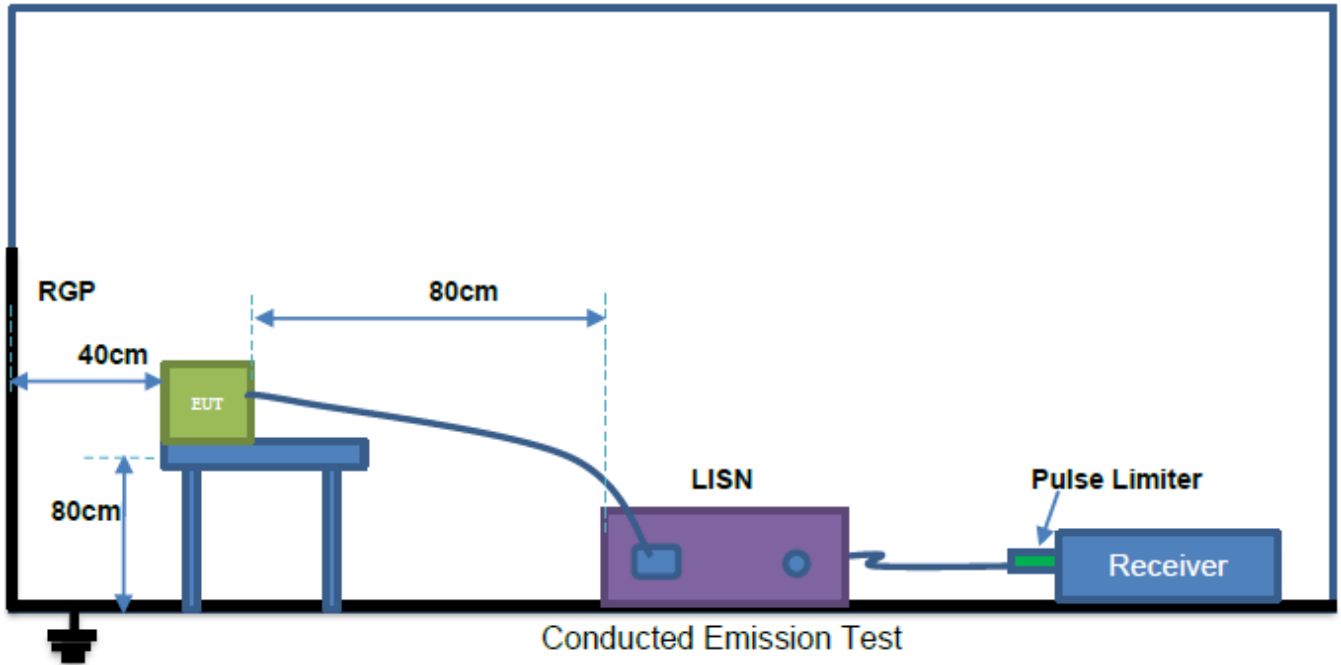

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor


5.6 Test Result

PASS

Please refer to the following page.




Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

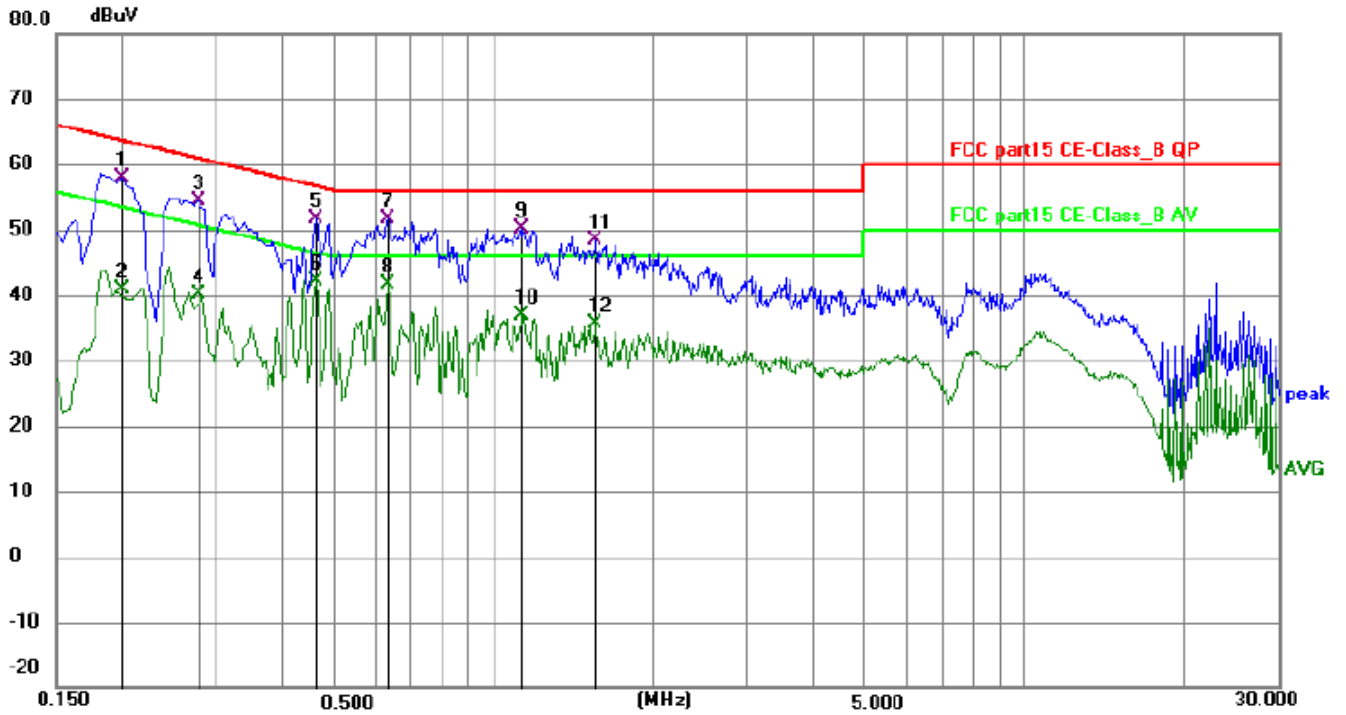

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.199500	48.43	9.48	57.91	63.63	-5.72	QP	P	
2	0.199500	31.28	9.48	40.76	53.63	-12.87	AVG	P	
3	0.276000	45.11	9.16	54.27	60.94	-6.67	QP	P	
4	0.276000	31.01	9.16	40.17	50.94	-10.77	AVG	P	
5	0.460500	42.41	9.16	51.57	56.68	-5.11	QP	P	
6	0.460500	32.91	9.16	42.07	46.68	-4.61	AVG	P	
7	0.631200	42.24	9.34	51.58	56.00	-4.42	QP	P	
8 *	0.631200	32.38	9.34	41.72	46.00	-4.28	AVG	P	
9	1.131000	40.74	9.36	50.10	56.00	-5.90	QP	P	
10	1.131000	27.54	9.36	36.90	46.00	-9.10	AVG	P	
11	1.558400	38.82	9.60	48.42	56.00	-7.58	QP	P	
12	1.558400	26.08	9.60	35.68	46.00	-10.32	AVG	P	



Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

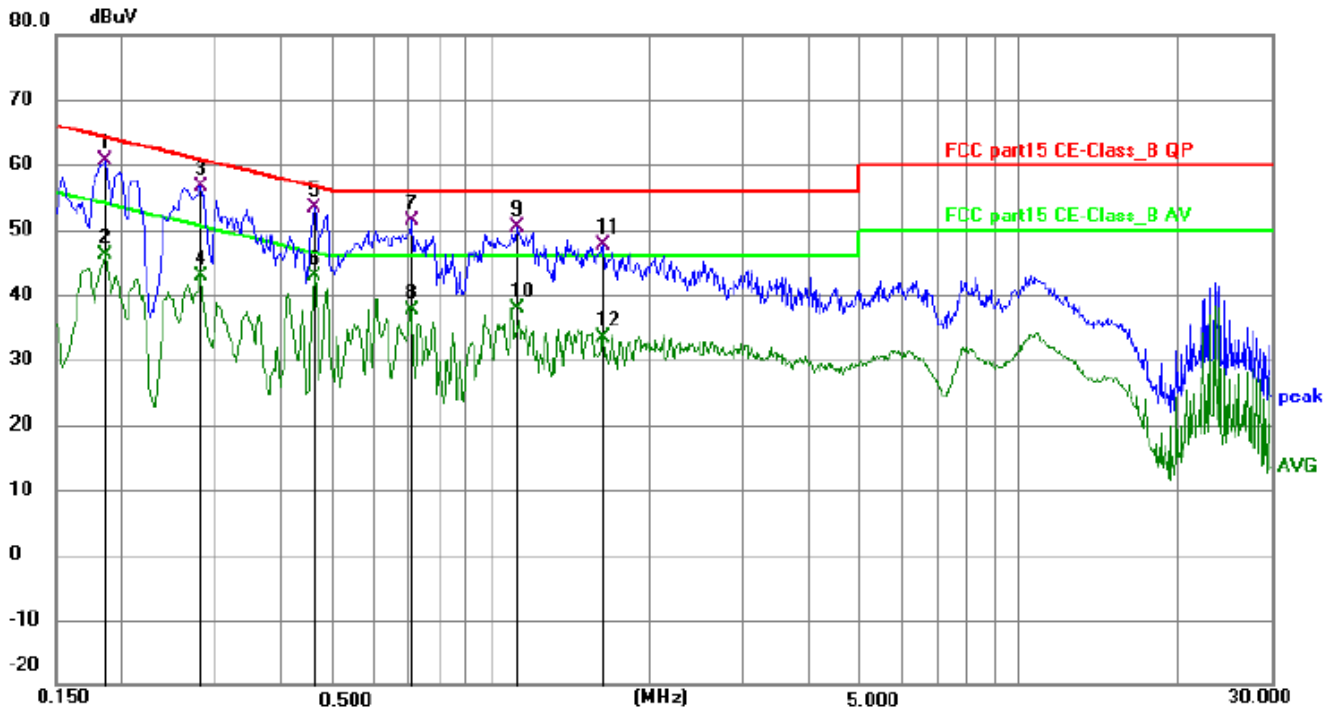


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.185900	51.37	9.27	60.64	64.22	-3.58	QP	P	
2	0.185900	36.90	9.27	46.17	54.22	-8.05	AVG	P	
3	0.280500	47.62	9.01	56.63	60.80	-4.17	QP	P	
4	0.280500	33.85	9.01	42.86	50.80	-7.94	AVG	P	
5 *	0.460500	43.99	9.32	53.31	56.68	-3.37	QP	P	
6	0.460500	33.49	9.32	42.81	46.68	-3.87	AVG	P	
7	0.707700	42.18	9.20	51.38	56.00	-4.62	QP	P	
8	0.707700	28.34	9.20	37.54	46.00	-8.46	AVG	P	
9	1.122000	40.80	9.46	50.26	56.00	-5.74	QP	P	
10	1.122000	28.42	9.46	37.88	46.00	-8.12	AVG	P	
11	1.630500	38.03	9.67	47.70	56.00	-8.30	QP	P	
12	1.630500	23.80	9.67	33.47	46.00	-12.53	AVG	P	


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

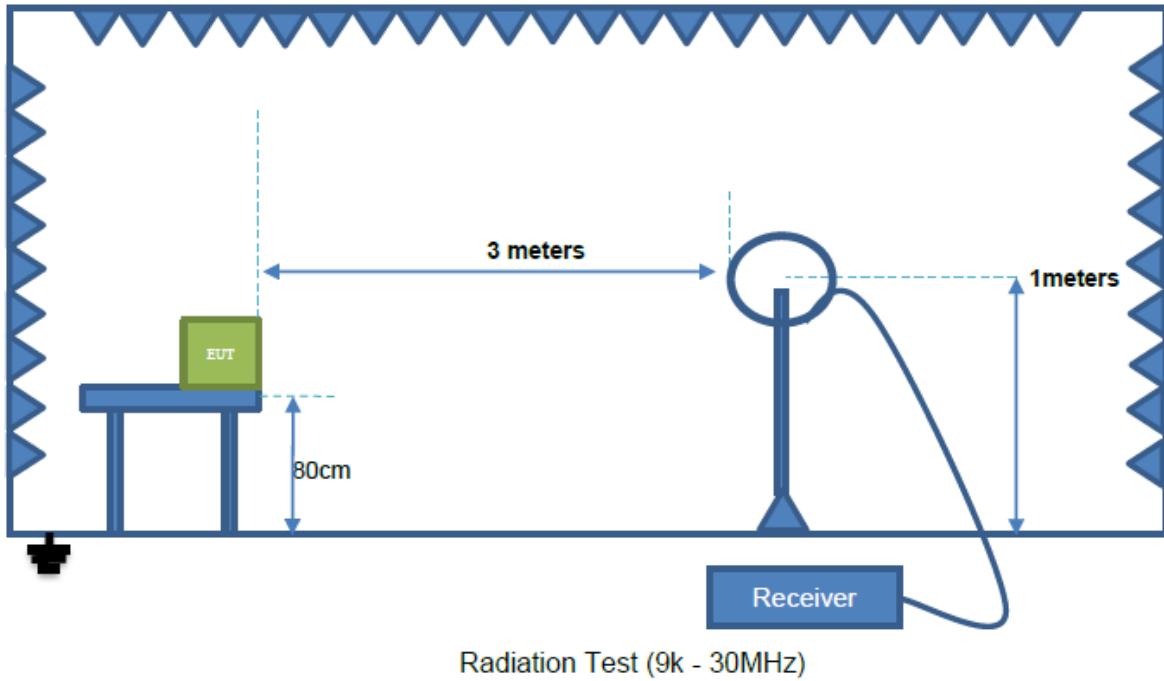

Below 1GHz

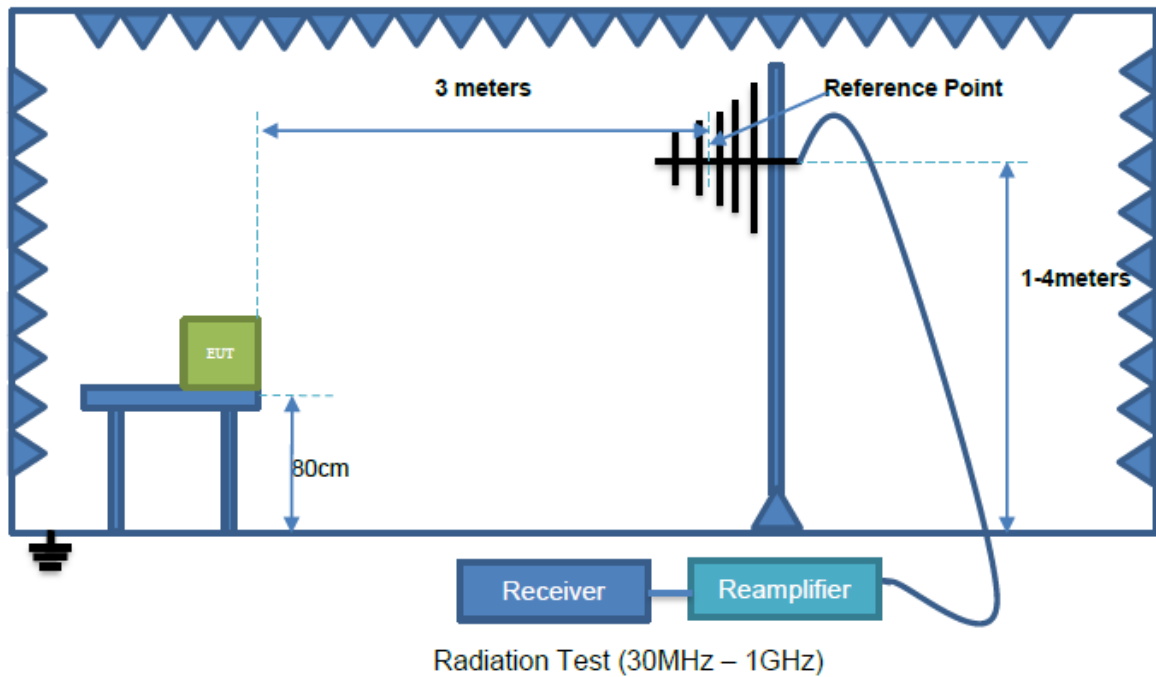

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.


6) The frequency range from 30MHz to 1000MHz is checked.



6.6 Test Result

PASS, Please refer to the following page.

Radiation Emission Test Data 9 kHz~30 MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

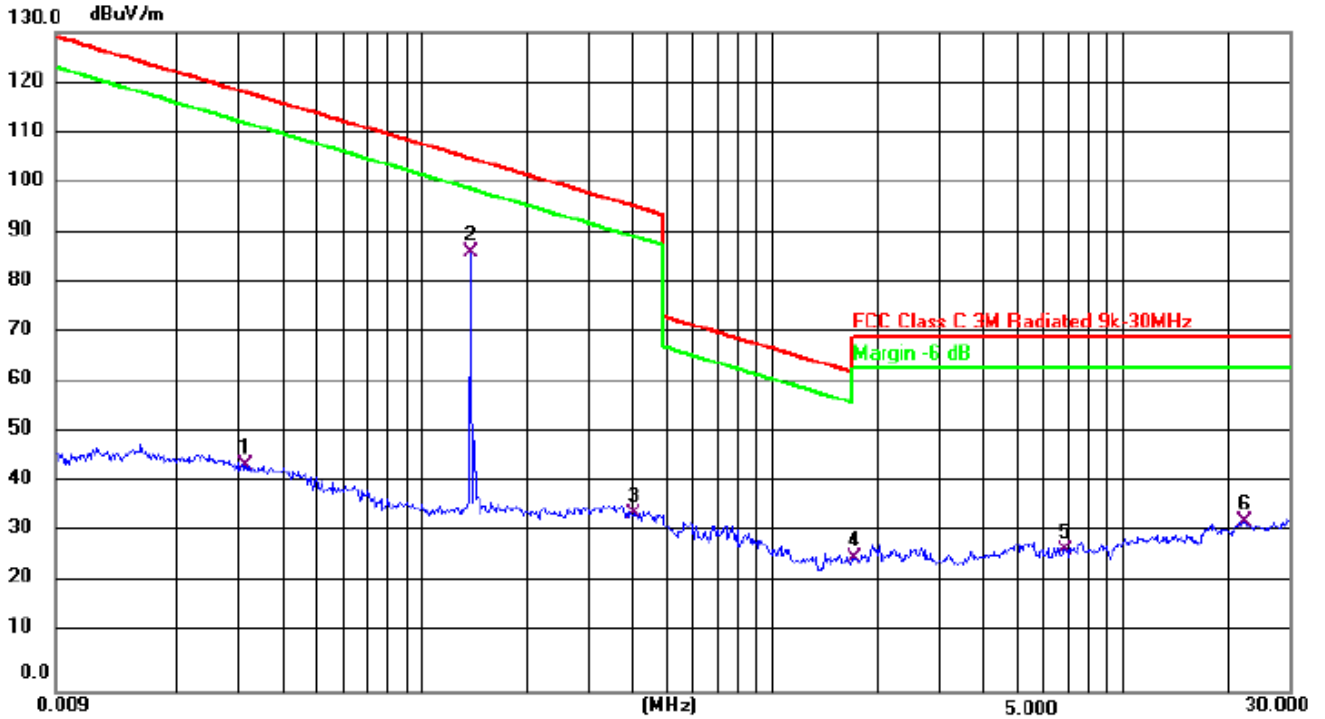

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.0313	44.53	10.22	54.75	118.09	-63.34	Peak
0.1373	86.67	10.47	97.14	105.14	-8.00	Peak
0.4007	34.36	10.88	45.24	95.76	-50.52	Peak
1.7116	22.93	10.23	33.16	70	-36.84	Peak
6.8540	27.06	10.18	37.24	70	-32.76	Peak
22.2210	31.58	10.69	42.27	70	-27.73	Peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data 9 kHz~30 MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	DC 3.85V	Test Mode:	Mode 4

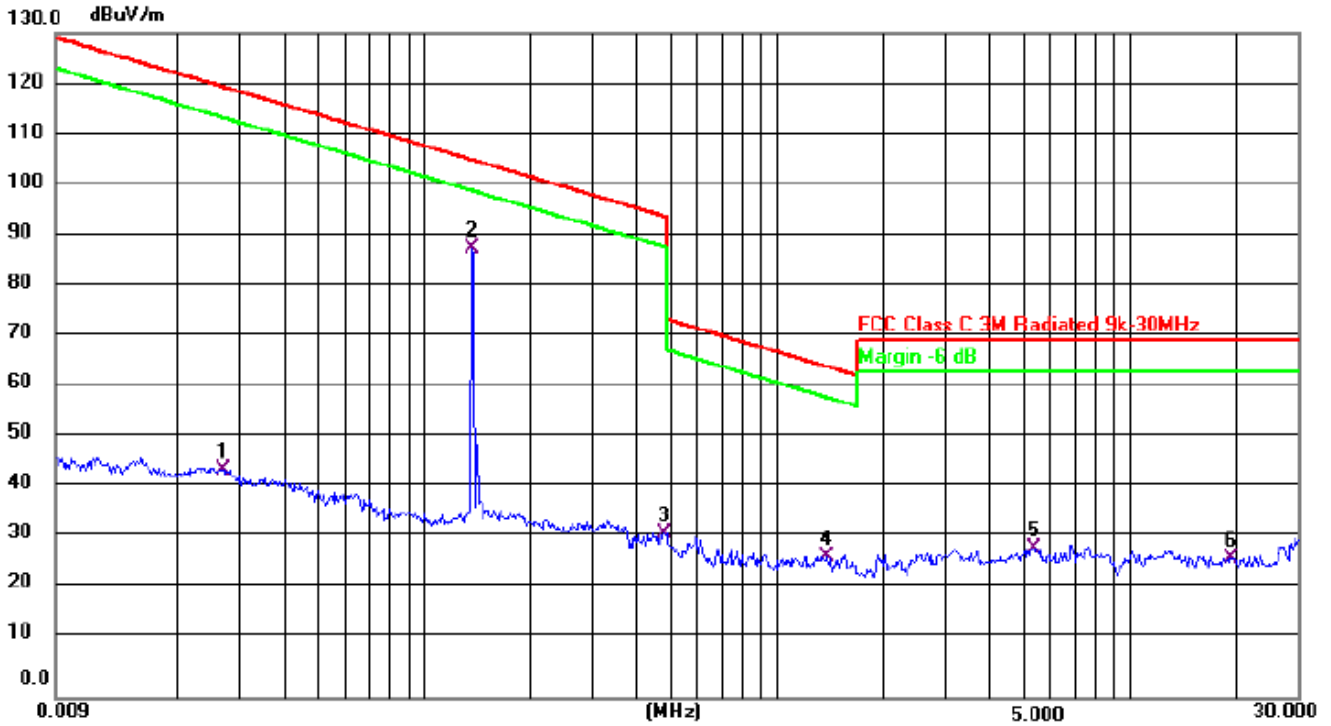

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.0269	42.60	10.22	52.82	119.41	-66.59	Peak
0.1360	88.03	10.47	98.50	105.22	-6.72	Peak
0.4791	30.30	10.88	41.18	94.2	-53.02	Peak
1.3865	24.91	10.23	35.14	64.82	-29.68	Peak
5.3300	26.85	10.18	37.03	70	-32.97	Peak
19.3591	24.95	10.69	35.64	70	-34.36	Peak

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.




Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

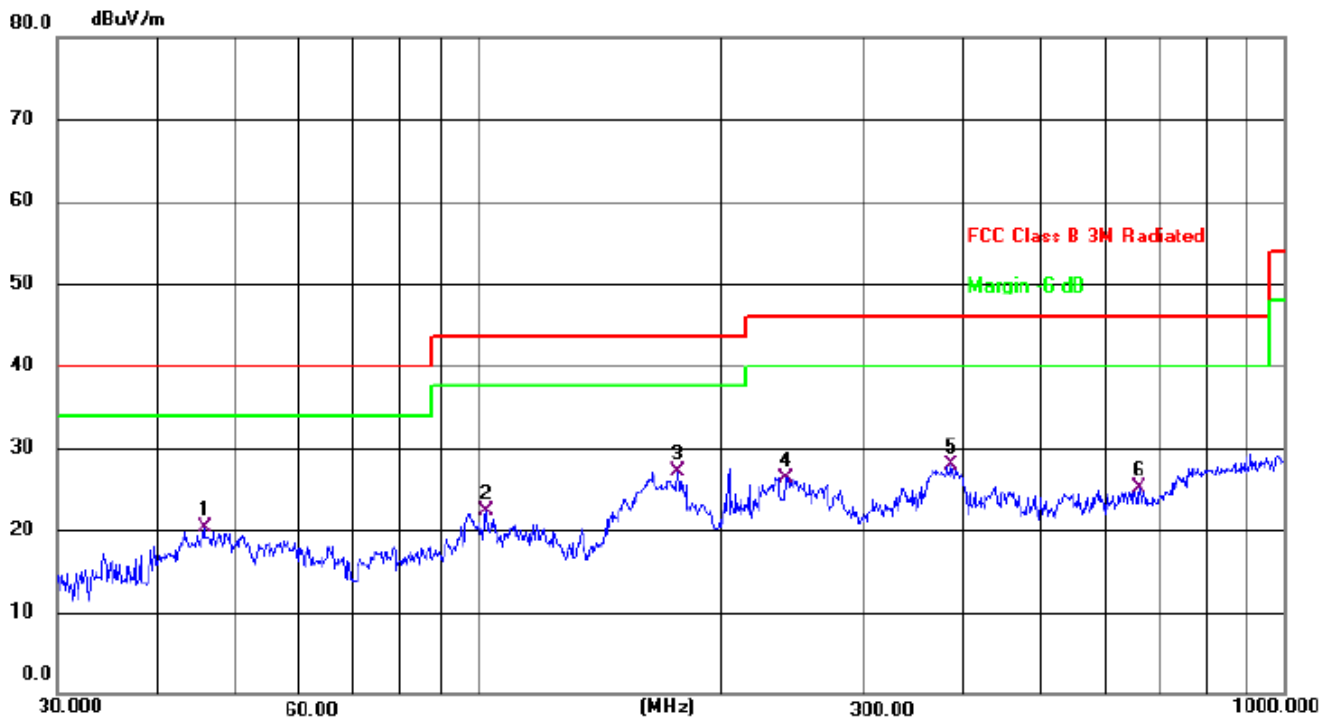

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		45.6946	32.07	-11.76	20.31	40.00	-19.69	QP
2		102.3596	37.51	-15.17	22.34	43.50	-21.16	QP
3	*	176.8874	41.80	-14.75	27.05	43.50	-16.45	QP
4		240.8300	38.44	-12.04	26.40	46.00	-19.60	QP
5		386.6338	37.45	-9.49	27.96	46.00	-18.04	QP
6		661.1503	29.72	-4.54	25.18	46.00	-20.82	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

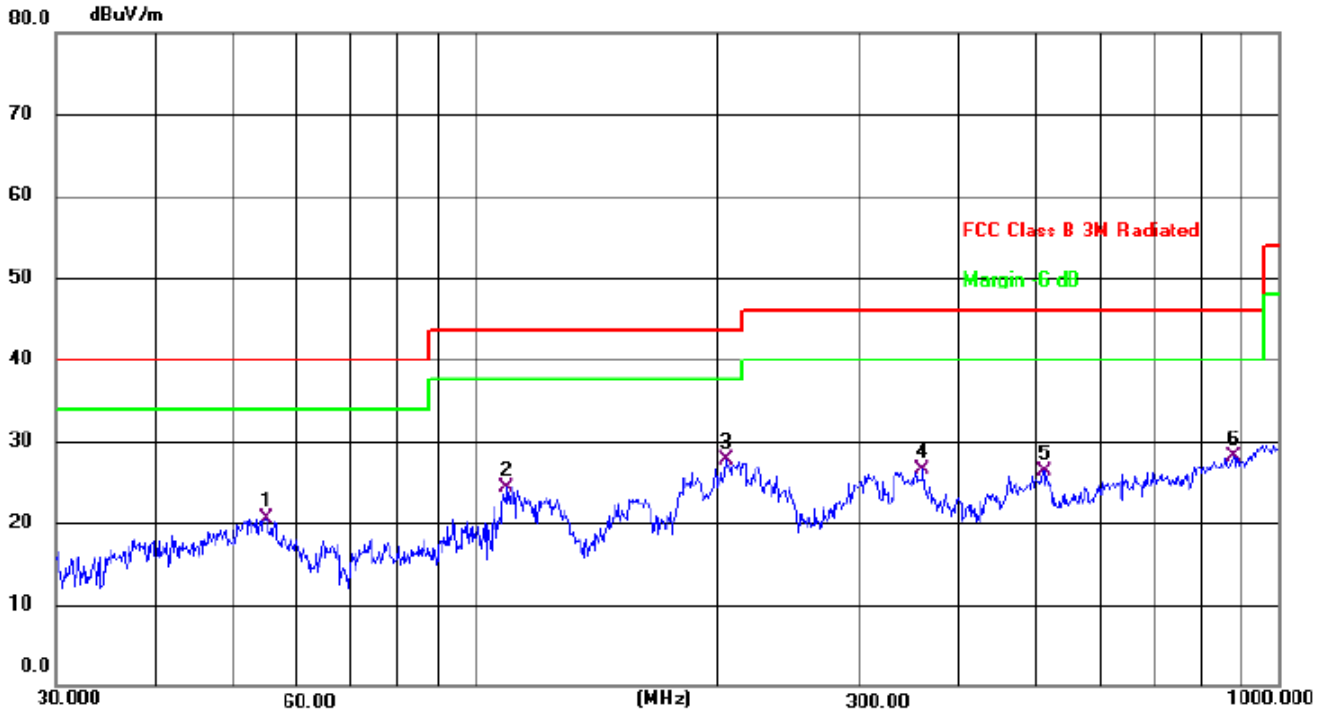

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Margin dB	Detector
1	54.8348	32.09	-11.52	20.57	40.00	-19.43	QP
2	109.4116	39.81	-15.41	24.40	43.50	-19.10	QP
3 *	204.9550	40.47	-12.79	27.68	43.50	-15.82	QP
4	360.4476	35.36	-8.81	26.55	46.00	-19.45	QP
5	510.0434	32.11	-5.74	26.37	46.00	-19.63	QP
6	878.3214	28.18	-0.16	28.02	46.00	-17.98	QP

Remarks:

1. Final Level = Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Pre-amplifier Factor)
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



7. BANDWIDTH TEST

7.1 TEST SETUP

1. Set RBW = 3KHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2 TEST SETUP



7.3 TEST Result

Frequency (KHz)	20dB bandwidth (KHz)	Result
138	7.978	Pass





8. SETUP PHOTOGRAPHS

Reference to the setup photo for details.

9. EUT PHOTOGRAPHS

Reference to the external and internal photo for details.

******* END OF REPORT *******