



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Wireless Tablet
MODEL NAME : SU8NST
FCC ID : 2A4DH-0808
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Oct. 08, 2022 ~ Apr. 25, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Product Feature of Equipment Under Test..... 5

 1.3 Product Specification of Equipment Under Test..... 5

 1.4 Modification of EUT 8

 1.5 Testing Location 8

 1.6 Test Software..... 9

 1.7 Applicable Standards..... 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Carrier Frequency and Channel 10

 2.2 Test Mode 12

 2.3 Connection Diagram of Test System..... 14

 2.4 Support Unit used in test configuration and system 14

 2.5 EUT Operation Test Setup 15

 2.6 Measurement Results Explanation Example..... 15

3 TEST RESULT 16

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 16

 3.2 Maximum Conducted Output Power Measurement 18

 3.3 Power Spectral Density Measurement 20

 3.4 Unwanted Emissions Measurement..... 23

 3.5 AC Conducted Emission Measurement..... 28

 3.6 Automatically Discontinue Transmission 30

 3.7 Antenna Requirements..... 32

4 LIST OF MEASURING EQUIPMENT 33

5 UNCERTAINTY OF EVALUATION 34

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1 ~ U-NII-2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.10 dB at 5350.200 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 19.70 dB at 0.881 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Amazon.com Services LLC
410 Terry Avenue N, Seattle, WA 98109-5210, United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Tablet
Model Name	SU8NST
FCC ID	2A4DH-0808
SN	Conducted: GCC2DM022342005T Conduction: GCC2DM02235300BK RSE: GCC2DM02235300BFOF DFS: GCC2DM02235300H7

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	SISO <Ant. 1> <5180 MHz ~ 5240 MHz> 802.11a : 12.84 dBm / 0.0192 W 802.11n HT20 : 13.18 dBm / 0.0208 W 802.11n HT40 : 13.35 dBm / 0.0216 W 802.11ac VHT20: 13.31 dBm / 0.0214 W 802.11ac VHT40: 13.40 dBm / 0.0219 W 802.11ac VHT80: 13.04 dBm / 0.0201 W 802.11ax HE20: 13.47 dBm / 0.0222 W 802.11ax HE40: 13.42 dBm / 0.0220 W 802.11ax HE80: 13.40 dBm / 0.0219 W <5260 MHz ~ 5320 MHz> 802.11a : 11.80 dBm / 0.0151 W 802.11n HT20 : 12.61 dBm / 0.0182 W 802.11n HT40 : 11.78 dBm / 0.0151 W 802.11ac VHT20: 12.63 dBm / 0.0183 W 802.11ac VHT40: 11.84 dBm / 0.0153 W 802.11ac VHT80: 12.74 dBm / 0.0188 W 802.11ax HE20: 12.90 dBm / 0.0195 W 802.11ax HE40: 11.95 dBm / 0.0157 W 802.11ax HE80: 12.89 dBm / 0.0195 W <5500 MHz ~ 5720 MHz >



	<p>802.11a : 10.96 dBm / 0.0125 W 802.11n HT20 : 10.45 dBm / 0.0111 W 802.11n HT40 : 10.85 dBm / 0.0122 W 802.11ac VHT20: 10.51 dBm / 0.0112 W 802.11ac VHT40: 10.90 dBm / 0.0123 W 802.11ac VHT80: 10.68 dBm / 0.0117 W 802.11ax HE20: 10.83 dBm / 0.0121 W 802.11ax HE40: 10.99 dBm / 0.0126 W 802.11ax HE80: 10.97 dBm / 0.0125 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 11.05 dBm / 0.0127 W 802.11n HT20 : 11.25 dBm / 0.0133 W 802.11n HT40 : 11.51 dBm / 0.0142 W 802.11ac VHT20: 11.27 dBm / 0.0134 W 802.11ac VHT40: 11.56 dBm / 0.0143 W 802.11ac VHT80: 11.13 dBm / 0.0130 W 802.11ax HE20: 11.70 dBm / 0.0148 W 802.11ax HE40: 11.76 dBm / 0.0150 W 802.11ax HE80: 11.59 dBm / 0.0144 W</p> <p>SISO <Ant. 2> <5180 MHz ~ 5240 MHz> 802.11a : 18.01 dBm / 0.0632 W 802.11n HT20 : 17.33 dBm / 0.0541 W 802.11n HT40 : 16.58 dBm / 0.0455 W 802.11ac VHT20: 17.39 dBm / 0.0548 W 802.11ac VHT40: 18.11 dBm / 0.0647 W 802.11ac VHT80: 15.34 dBm / 0.0342 W 802.11ax HE20: 17.75 dBm / 0.0596 W 802.11ax HE40: 18.33 dBm / 0.0681 W 802.11ax HE80: 15.53 dBm / 0.0357 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 16.02 dBm / 0.0400 W 802.11n HT20 : 15.24 dBm / 0.0334 W 802.11n HT40 : 15.40 dBm / 0.0347 W 802.11ac VHT20: 15.30 dBm / 0.0339 W 802.11ac VHT40: 15.47 dBm / 0.0352 W 802.11ac VHT80: 14.86 dBm / 0.0306 W 802.11ax HE20: 15.67 dBm / 0.0369 W 802.11ax HE40: 15.86 dBm / 0.0385 W 802.11ax HE80: 15.02 dBm / 0.0318 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 15.85 dBm / 0.0385 W 802.11n HT20 : 16.10 dBm / 0.0407 W 802.11n HT40 : 15.97 dBm / 0.0395 W 802.11ac VHT20: 16.15 dBm / 0.0412 W 802.11ac VHT40: 15.99 dBm / 0.0397 W 802.11ac VHT80: 15.63 dBm / 0.0366 W 802.11ax HE20: 16.52 dBm / 0.0449 W 802.11ax HE40: 16.32 dBm / 0.0429 W 802.11ax HE80: 16.58 dBm / 0.0455 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 15.14 dBm / 0.0327 W 802.11n HT20 : 14.99 dBm / 0.0316 W 802.11n HT40 : 14.73 dBm / 0.0297 W 802.11ac VHT20: 15.08 dBm / 0.0322 W</p>
--	---



	802.11ac VHT40: 15.14 dBm / 0.0327 W 802.11ac VHT80: 14.74 dBm / 0.0298 W 802.11ax HE20: 15.20 dBm / 0.0331 W 802.11ax HE40: 15.33 dBm / 0.0341 W 802.11ax HE80: 14.78 dBm / 0.0301 W
99% Occupied Bandwidth	SISO <Ant. 1> <5180 MHz ~ 5240 MHz> 802.11a : 17.822 MHz 802.11ax HE20: 19.061 MHz 802.11ax HE40: 37.802 MHz 802.11ax HE80: 77.363 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.822 MHz 802.11ax HE20: 19.061 MHz 802.11ax HE40: 37.802 MHz 802.11ax HE80: 77.522 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.662 MHz 802.11ax HE20: 19.061 MHz 802.11ax HE40: 37.802 MHz 802.11ax HE80: 77.363 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.662 MHz 802.11ax HE20: 19.061 MHz 802.11ax HE40: 37.722 MHz 802.11ax HE80: 77.203 MHz SISO <Ant. 2> <5180 MHz ~ 5240 MHz> 802.11a : 17.742 MHz 802.11ax HE20: 19.101 MHz 802.11ax HE40: 37.882 MHz 802.11ax HE80: 77.203 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.782 MHz 802.11ax HE20: 19.021 MHz 802.11ax HE40: 37.882 MHz 802.11ax HE80: 77.363 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.662 MHz 802.11ax HE20: 19.061 MHz 802.11ax HE40: 37.882 MHz 802.11ax HE80: 77.522 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.622 MHz 802.11ax HE20: 19.061 MHz 802.11ax HE40: 37.722 MHz 802.11ax HE80: 77.043 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 1> : FPC Antenna with gain 0.9 dBi <Ant. 2> : LDS Antenna with gain 0.2 dBi <5260 MHz ~ 5320 MHz> <Ant. 1> : FPC Antenna with gain 2.4 dBi <Ant. 2> : LDS Antenna with gain 0.2 dBi <5500 MHz ~ 5720 MHz>



	<Ant. 1> : FPC Antenna with gain 1.8 dBi <Ant. 2> : LDS Antenna with gain 1.1 dBi <5745 MHz ~ 5825 MHz> <Ant. 1> : FPC Antenna with gain -0.1 dBi <Ant. 2> : LDS Antenna with gain 1.0 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n/ac & 802.11ax mode, the whole testing have assessed only 802.11ax HE20/HE40/HE80 by referring to the higher output power.
2. The device supports SISO mode only.
3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test Power/PSD/RSE, the full RU power > partial RU, therefore the full RU perform full test and Partial RU verified power/PSD/RSE

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

<FCC>-KS

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309



1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24
3.	DFS01-KS	Sporton	DFS & Adaptivity Test Tools	1.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : Bluetooth Link+ WLAN Link(5G) + USB Cable(Charging from Adapter(AP15 US))
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.	

Simultaneous transmission
802.11a_CH58 Tx + BLE(2M) Tx Ch39 Tx




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

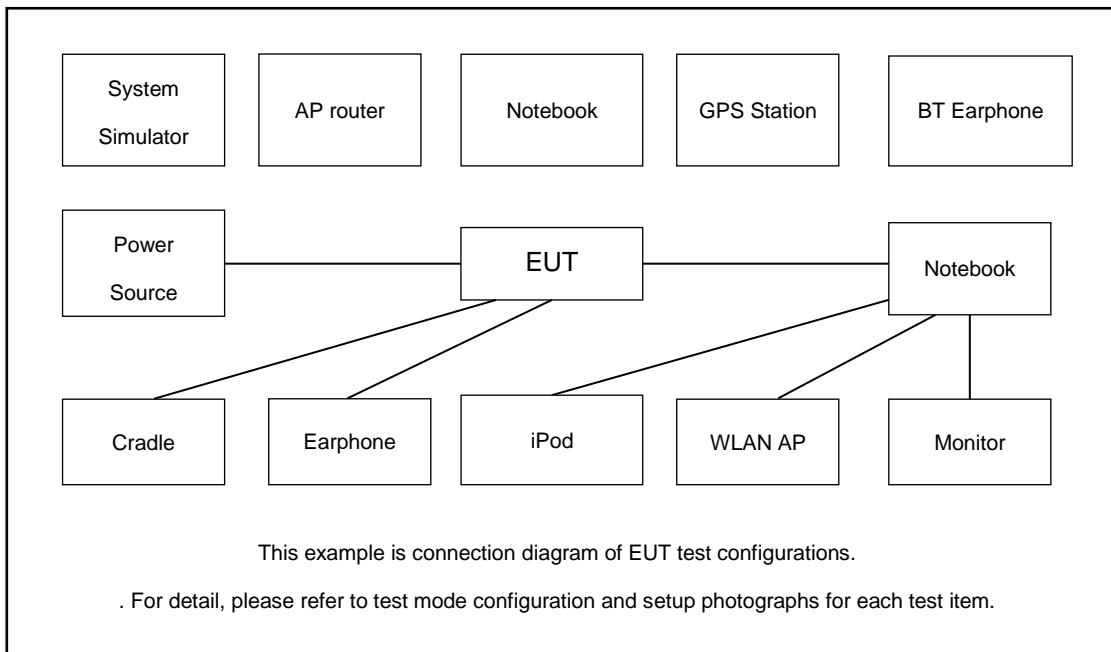

2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	LBH308	N/A	N/A	N/A
2.	Notebook	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	WLAN AP	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	SD Card	8GB	N/A	N/A	N/A
5.	Keyboard	SA6DIN	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.75 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.75 + 10 = 16.75 \text{ (dB)} \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.

3.1.4 Test Setup

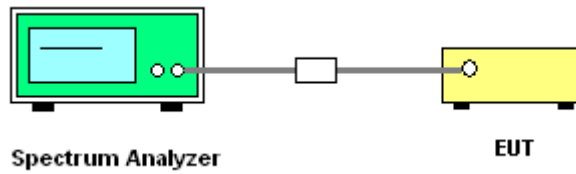

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 + 10 \log B$, dBm, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

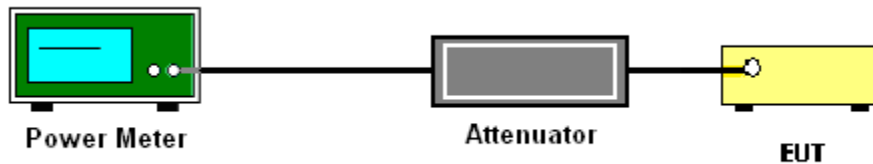

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band 5.725 - 5.85 GHz


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

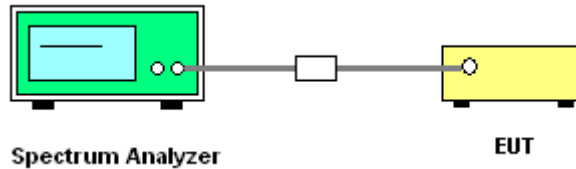

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - (4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 3 MHz
 - Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
 - Averaging type = power averaging(RMS)
 - The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal

polarization and vertical polarization of the antenna.


5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

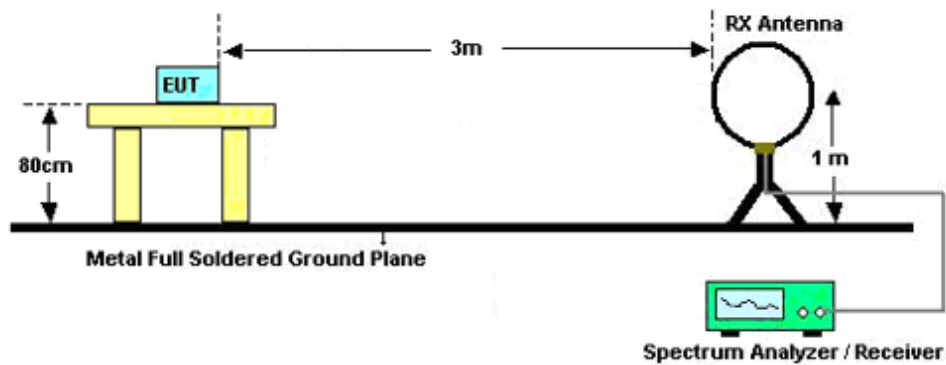

For radiated emissions from 30MHz to 1GHz

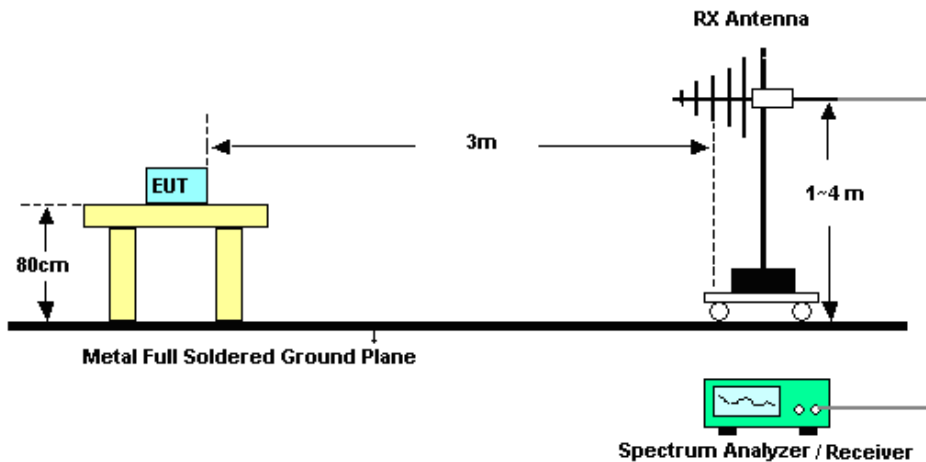

For radiated emissions above 1GHz

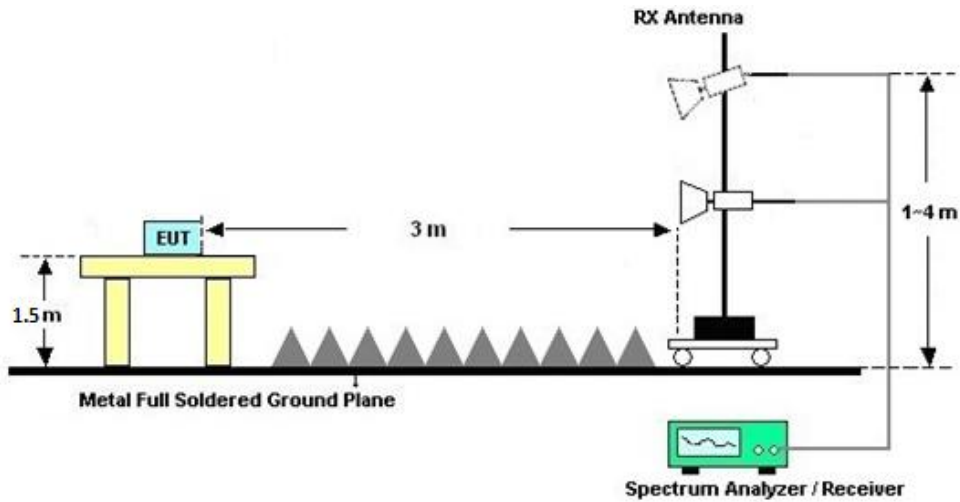

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C&D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C&D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

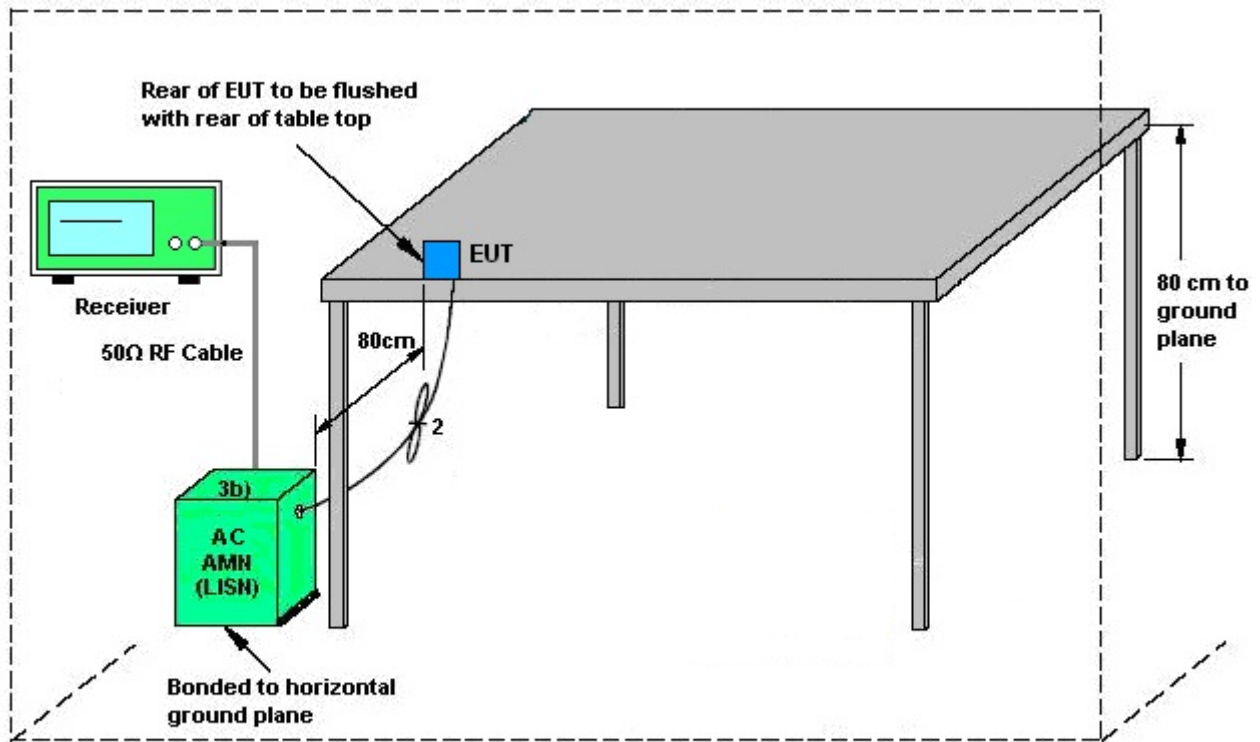

AMN = Artificial mains network (LISH)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission



EUT is verified this characteristic during the function check of normal sample associated with an access point:

- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

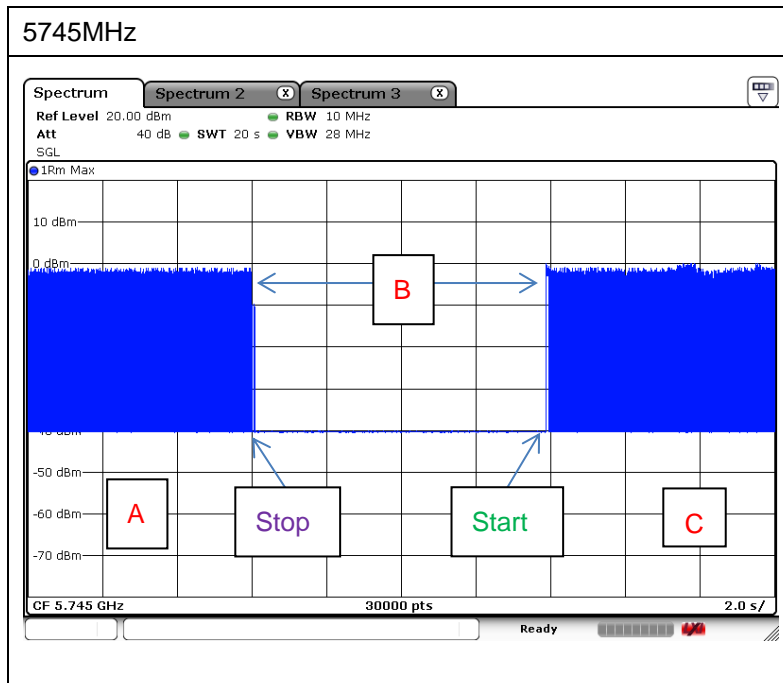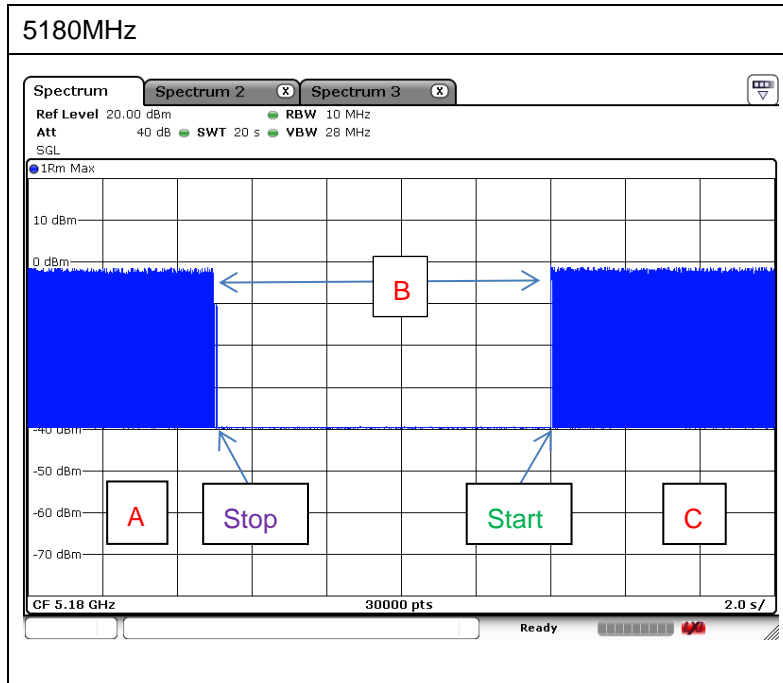

Note : The control / signaling information during the period B is precluded.



3.7 Antenna Requirements

3.7.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 13, 2021	Oct. 08, 2022~ Oct. 17, 2022	Oct. 12, 2022	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022		Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 08, 2022~ Oct. 17, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 08, 2022~ Oct. 17, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Oct. 12, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 26, 2021	Oct. 12, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Oct. 12, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Oct. 12, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Oct. 12, 2022	Apr. 17, 2023	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Oct. 12, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Oct. 12, 2022	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Oct. 12, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 5, 2022	Oct. 12, 2022	Jan. 5, 2023	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 14, 2021	Oct. 12, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 12, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 12, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 12, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May. 24, 2022	Oct. 27, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Oct. 27, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 13, 2022	Oct. 27, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Oct. 27, 2022	Oct. 11, 2023	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2023	Apr. 25, 2023	Jan. 04, 2024	DFS (DFS01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.32 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2022.10.08~2022.10.17	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	12.45	17.75		24.00	24.00	0.90	0.20	Pass
11a	6Mbps	1	44	5220	12.84	18.01		24.00	24.00	0.90	0.20	Pass
11a	6Mbps	1	48	5240	12.78	17.96		24.00	24.00	0.90	0.20	Pass
HT20	MCS0	1	36	5180	12.88	17.18		24.00	24.00	0.90	0.20	Pass
HT20	MCS0	1	44	5220	13.18	17.33		24.00	24.00	0.90	0.20	Pass
HT20	MCS0	1	48	5240	13.14	17.29		24.00	24.00	0.90	0.20	Pass
HT40	MCS0	1	38	5190	13.22	16.50		24.00	24.00	0.90	0.20	Pass
HT40	MCS0	1	46	5230	13.35	16.58		24.00	24.00	0.90	0.20	Pass
VHT20	MCS0	1	36	5180	13.00	17.22		24.00	24.00	0.90	0.20	Pass
VHT20	MCS0	1	44	5220	13.31	17.39		24.00	24.00	0.90	0.20	Pass
VHT20	MCS0	1	48	5240	13.24	17.33		24.00	24.00	0.90	0.20	Pass
VHT40	MCS0	1	38	5190	13.31	18.07		24.00	24.00	0.90	0.20	Pass
VHT40	MCS0	1	46	5230	13.40	18.11		24.00	24.00	0.90	0.20	Pass
VHT80	MCS0	1	42	5210	13.04	15.34		24.00	24.00	0.90	0.20	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	36	5180	Full	13.32	17.62		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	36	5180	26/0	3.55	7.70		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	36	5180	52/37	7.76	10.14		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	36	5180	106/53	10.29	13.79		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	44	5220	Full	13.39	17.75		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	44	5220	26/0	3.27	7.51		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	44	5220	52/37	6.88	10.17		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	44	5220	106/53	10.52	13.72		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	48	5240	Full	13.47	17.70		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	48	5240	26/8	3.47	7.43		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	48	5240	52/40	6.82	10.29		24.00	24.00	0.90	0.20	Pass
HE20	MCS0	1	48	5240	106/54	10.42	13.81		24.00	24.00	0.90	0.20	Pass
HE40	MCS0	1	38	5190	Full	13.33	18.31		24.00	24.00	0.90	0.20	Pass
HE40	MCS0	1	38	5190	242/61	9.65	14.54		24.00	24.00	0.90	0.20	Pass
HE40	MCS0	1	46	5230	Full	13.42	18.33		24.00	24.00	0.90	0.20	Pass
HE40	MCS0	1	46	5230	242/62	9.84	14.57		24.00	24.00	0.90	0.20	Pass
HE80	MCS0	1	42	5210	Full	13.40	15.53		24.00	24.00	0.90	0.20	Pass
HE80	MCS0	1	42	5210	484/65	9.78	12.17		24.00	24.00	0.90	0.20	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	11.80	16.02		23.98	23.98	2.40	0.20	26.99	Pass
11a	6Mbps	1	60	5300	11.50	15.69		23.98	23.98	2.40	0.20	26.99	Pass
11a	6Mbps	1	64	5320	11.57	15.85		23.98	23.98	2.40	0.20	26.99	Pass
HT20	MCS0	1	52	5260	12.61	15.18		23.98	23.98	2.40	0.20	26.99	Pass
HT20	MCS0	1	60	5300	12.50	15.12		23.98	23.98	2.40	0.20	26.99	Pass
HT20	MCS0	1	64	5320	12.52	15.24		23.98	23.98	2.40	0.20	26.99	Pass
HT40	MCS0	1	54	5270	11.76	15.36		23.98	23.98	2.40	0.20	26.99	Pass
HT40	MCS0	1	62	5310	11.78	15.40		23.98	23.98	2.40	0.20	26.99	Pass
VHT20	MCS0	1	52	5260	12.63	15.26		23.98	23.98	2.40	0.20	26.99	Pass
VHT20	MCS0	1	60	5300	12.55	15.16		23.98	23.98	2.40	0.20	26.99	Pass
VHT20	MCS0	1	64	5320	12.61	15.30		23.98	23.98	2.40	0.20	26.99	Pass
VHT40	MCS0	1	54	5270	11.84	15.44		23.98	23.98	2.40	0.20	26.99	Pass
VHT40	MCS0	1	62	5310	11.80	15.47		23.98	23.98	2.40	0.20	26.99	Pass
VHT80	MCS0	1	58	5290	12.74	14.86		23.98	23.98	2.40	0.20	26.99	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	52	5260	Full	12.90	15.65		23.98	23.98	2.40	0.20	26.99	Pass
HE20	MCS0	1	60	5300	Full	12.87	15.54		23.98	23.98	2.40	0.20	26.99	Pass
HE20	MCS0	1	64	5320	Full	12.83	15.67		23.98	23.98	2.40	0.20	26.99	Pass
HE40	MCS0	1	54	5270	Full	11.86	15.80		23.98	23.98	2.40	0.20	26.99	Pass
HE40	MCS0	1	62	5310	Full	11.95	15.86		23.98	23.98	2.40	0.20	26.99	Pass
HE80	MCS0	1	58	5290	Full	12.89	15.02		23.98	23.98	2.40	0.20	26.99	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Power Conducted with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	10.96	15.70		23.98	23.98	1.80	1.10	26.99	Pass
11a	6Mbps	1	116	5580	10.78	15.85		23.98	23.98	1.80	1.10	26.99	Pass
11a	6Mbps	1	140	5700	10.92	15.81		23.98	23.98	1.80	1.10	26.99	Pass
HT20	MCS0	1	100	5500	10.36	16.10		23.98	23.98	1.80	1.10	26.99	Pass
HT20	MCS0	1	116	5580	10.31	16.00		23.98	23.98	1.80	1.10	26.99	Pass
HT20	MCS0	1	140	5700	10.45	15.64		23.98	23.98	1.80	1.10	26.99	Pass
HT40	MCS0	1	102	5510	10.85	15.89		23.98	23.98	1.80	1.10	26.99	Pass
HT40	MCS0	1	110	5550	10.84	15.97		23.98	23.98	1.80	1.10	26.99	Pass
HT40	MCS0	1	134	5670	10.72	15.53		23.98	23.98	1.80	1.10	26.99	Pass
VHT20	MCS0	1	100	5500	10.48	16.15		23.98	23.98	1.80	1.10	26.99	Pass
VHT20	MCS0	1	116	5580	10.42	16.05		23.98	23.98	1.80	1.10	26.99	Pass
VHT20	MCS0	1	140	5700	10.51	15.71		23.98	23.98	1.80	1.10	26.99	Pass
VHT40	MCS0	1	102	5510	10.90	15.90		23.98	23.98	1.80	1.10	26.99	Pass
VHT40	MCS0	1	110	5550	10.87	15.99		23.98	23.98	1.80	1.10	26.99	Pass
VHT40	MCS0	1	134	5670	10.79	15.60		23.98	23.98	1.80	1.10	26.99	Pass
VHT80	MCS0	1	106	5530	10.66	15.63		23.98	23.98	1.80	1.10	26.99	Pass
VHT80	MCS0	1	122	5610	10.68	15.59		23.98	23.98	1.80	1.10	26.99	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	100	5500	Full	10.75	16.52		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	100	5500	26/0	1.37	6.43		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	100	5500	52/37	4.08	9.81		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	100	5500	106/53	7.75	12.79		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	116	5580	Full	10.70	16.43		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	116	5580	26/0	1.54	6.65		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	116	5580	52/37	3.89	9.77		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	116	5580	106/53	7.21	12.89		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	140	5700	Full	10.70	16.08		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	140	5700	26/8	1.57	6.69		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	140	5700	52/40	3.78	9.87		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	140	5700	106/54	7.32	12.74		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	102	5510	Full	10.91	16.29		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	102	5510	242/61	7.17	12.33		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	110	5550	Full	10.95	16.32		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	110	5550	242/61	7.12	12.20		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	134	5670	Full	10.99	16.01		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	134	5670	242/62	7.40	12.37		23.98	23.98	1.80	1.10	26.99	Pass
HE80	MCS0	1	106	5530	Full	10.97	16.14		23.98	23.98	1.80	1.10	26.99	Pass
HE80	MCS0	1	106	5530	484/65	7.06	13.06		23.98	23.98	1.80	1.10	26.99	Pass
HE80	MCS0	1	122	5610	Full	10.95	16.58		23.98	23.98	1.80	1.10	26.99	Pass
HE80	MCS0	1	122	5610	484/65	7.22	13.16		23.98	23.98	1.80	1.10	26.99	Pass

FCC U-NII-2C straddle channel single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	144	5720	Full	10.83	16.45		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	144	5720	26/8	1.95	6.54		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	144	5720	52/40	3.69	9.78		23.98	23.98	1.80	1.10	26.99	Pass
HE20	MCS0	1	144	5720	106/54	7.44	12.61		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	142	5710	Full	10.96	16.29		23.98	23.98	1.80	1.10	26.99	Pass
HE40	MCS0	1	142	5710	242/62	7.49	12.75		23.98	23.98	1.80	1.10	26.99	Pass
HE80	MCS0	1	138	5690	Full	10.92	16.32		23.98	23.98	1.80	1.10	26.99	Pass
HE80	MCS0	1	138	5690	484/66	7.91	13.14		23.98	23.98	1.80	1.10	26.99	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	11.05	15.03		30.00	30.00	-0.10	1.00	Pass
11a	6Mbps	1	157	5785	10.99	14.71		30.00	30.00	-0.10	1.00	Pass
11a	6Mbps	1	165	5825	10.84	15.14		30.00	30.00	-0.10	1.00	Pass
HT20	MCS0	1	149	5745	11.01	14.90		30.00	30.00	-0.10	1.00	Pass
HT20	MCS0	1	157	5785	11.25	14.48		30.00	30.00	-0.10	1.00	Pass
HT20	MCS0	1	165	5825	10.65	14.99		30.00	30.00	-0.10	1.00	Pass
HT40	MCS0	1	151	5755	11.37	14.57		30.00	30.00	-0.10	1.00	Pass
HT40	MCS0	1	159	5795	11.51	14.73		30.00	30.00	-0.10	1.00	Pass
VHT20	MCS0	1	149	5745	11.10	14.93		30.00	30.00	-0.10	1.00	Pass
VHT20	MCS0	1	157	5785	11.27	14.59		30.00	30.00	-0.10	1.00	Pass
VHT20	MCS0	1	165	5825	10.68	15.08		30.00	30.00	-0.10	1.00	Pass
VHT40	MCS0	1	151	5755	11.41	15.14		30.00	30.00	-0.10	1.00	Pass
VHT40	MCS0	1	159	5795	11.56	14.77		30.00	30.00	-0.10	1.00	Pass
VHT80	MCS0	1	155	5775	11.13	14.74		30.00	30.00	-0.10	1.00	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	149	5745	Full	11.33	15.20		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	149	5745	26/0	2.72	5.88		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	149	5745	52/37	5.57	8.85		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	149	5745	106/53	11.70	11.79		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	157	5785	Full	11.49	14.86		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	157	5785	26/0	2.57	5.72		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	157	5785	52/37	5.78	8.67		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	157	5785	106/53	11.61	11.85		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	165	5825	Full	11.01	14.91		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	165	5825	26/8	2.51	5.98		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	165	5825	52/40	5.85	8.92		30.00	30.00	-0.10	1.00	Pass
HE20	MCS0	1	165	5825	106/54	11.52	11.77		30.00	30.00	-0.10	1.00	Pass
HE40	MCS0	1	151	5755	Full	11.59	15.33		30.00	30.00	-0.10	1.00	Pass
HE40	MCS0	1	151	5755	242/61	8.64	11.61		30.00	30.00	-0.10	1.00	Pass
HE40	MCS0	1	159	5795	Full	11.76	15.02		30.00	30.00	-0.10	1.00	Pass
HE40	MCS0	1	159	5795	242/62	8.47	11.43		30.00	30.00	-0.10	1.00	Pass
HE80	MCS0	1	155	5775	Full	11.59	14.78		30.00	30.00	-0.10	1.00	Pass
HE80	MCS0	1	155	5775	484/65	8.02	11.64		30.00	30.00	-0.10	1.00	Pass
HE80	MCS0	1	155	5775	484/66	7.92	11.69		30.00	30.00	-0.10	1.00	Pass



Case No. : <u>FR261401-01D</u>
Ambient Condition: <u>25 °C, 45 %RH</u>
According Standard: <u>■Part15E</u>
Test Date: <u>2022.10.08~2022.10.17</u> Test Engineer: <u>Jiang Jun</u>

Emission Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	24.92	5167.68	5192.60	---	---
	Ant2	5180	27.40	5167.64	5195.04	---	---
	Ant1	5220	20.08	5209.84	5229.92	---	---
	Ant2	5220	20.12	5209.92	5230.04	---	---
	Ant1	5240	19.32	5230.36	5249.68	---	---
	Ant2	5240	19.88	5230.28	5250.16	---	---
	Ant1	5260	19.88	5250.00	5269.88	---	---
	Ant2	5260	20.24	5249.80	5270.04	---	---
	Ant1	5300	25.56	5286.64	5312.20	---	---
	Ant2	5300	25.64	5286.60	5312.24	---	---
	Ant1	5320	27.44	5304.80	5332.24	---	---
	Ant2	5320	25.12	5306.60	5331.72	---	---
	Ant1	5500	24.44	5487.80	5512.24	---	---
	Ant2	5500	24.48	5487.72	5512.20	---	---
	Ant1	5580	19.92	5570.16	5590.08	---	---
	Ant2	5580	20.16	5569.88	5590.04	---	---
	Ant1	5700	23.44	5687.04	5710.48	---	---
	Ant2	5700	24.12	5686.60	5710.72	---	---
	Ant1	5720	19.72	5710.12	5729.84	---	---
	Ant2	5720	20.16	5709.80	5729.96	---	---
	Ant1	5745	23.88	5734.72	5758.60	---	---
	Ant2	5745	22.44	5734.84	5757.28	---	---
	Ant1	5785	19.88	5774.96	5794.84	---	---
	Ant2	5785	20.24	5774.76	5795.00	---	---
Ant1	5825	24.20	5811.60	5835.80	---	---	
Ant2	5825	24.08	5811.64	5835.72	---	---	
11AX20SISO	Ant1	5180	21.72	5169.04	5190.76	---	---
	Ant2	5180	21.12	5169.32	5190.44	---	---
	Ant1	5220	21.40	5209.24	5230.64	---	---
	Ant2	5220	21.32	5209.20	5230.52	---	---
	Ant1	5240	19.76	5230.16	5249.92	---	---
	Ant2	5240	19.76	5230.16	5249.92	---	---
	Ant1	5260	21.16	5249.44	5270.60	---	---
	Ant2	5260	21.52	5249.52	5271.04	---	---
	Ant1	5300	21.24	5289.44	5310.68	---	---
	Ant2	5300	21.52	5289.32	5310.84	---	---
	Ant1	5320	21.40	5309.48	5330.88	---	---
	Ant2	5320	21.08	5309.52	5330.60	---	---





	Ant1	5500	21.12	5489.56	5510.68	---	---
	Ant2	5500	21.68	5489.04	5510.72	---	---
	Ant1	5580	20.80	5569.64	5590.44	---	---
	Ant2	5580	21.24	5569.40	5590.64	---	---
	Ant1	5700	21.36	5689.36	5710.72	---	---
	Ant2	5700	21.04	5689.64	5710.68	---	---
	Ant1	5720	21.16	5709.52	5730.68	---	---
	Ant2	5720	21.44	5709.20	5730.64	---	---
	Ant1	5745	21.56	5734.40	5755.96	---	---
	Ant2	5745	21.28	5734.28	5755.56	---	---
	Ant1	5785	21.52	5774.40	5795.92	---	---
	Ant2	5785	21.20	5774.40	5795.60	---	---
	Ant1	5825	22.00	5813.92	5835.92	---	---
	Ant2	5825	21.52	5814.08	5835.60	---	---
11AX40SISO	Ant1	5190	39.68	5170.24	5209.92	---	---
	Ant2	5190	39.68	5170.16	5209.84	---	---
	Ant1	5230	39.68	5210.24	5249.92	---	---
	Ant2	5230	39.92	5210.16	5250.08	---	---
	Ant1	5270	39.76	5250.16	5289.92	---	---
	Ant2	5270	39.76	5250.24	5290.00	---	---
	Ant1	5310	39.76	5290.16	5329.92	---	---
	Ant2	5310	39.60	5290.24	5329.84	---	---
	Ant1	5510	39.68	5490.24	5529.92	---	---
	Ant2	5510	39.60	5490.24	5529.84	---	---
	Ant1	5550	39.76	5530.16	5569.92	---	---
	Ant2	5550	39.68	5530.24	5569.92	---	---
	Ant1	5670	39.76	5650.16	5689.92	---	---
	Ant2	5670	39.68	5650.24	5689.92	---	---
	Ant1	5710	39.76	5690.16	5729.92	---	---
	Ant2	5710	39.68	5690.24	5729.92	---	---
	Ant1	5755	39.76	5735.16	5774.92	---	---
	Ant2	5755	39.68	5735.24	5774.92	---	---
Ant1	5795	39.68	5775.16	5814.84	---	---	
Ant2	5795	39.60	5775.24	5814.84	---	---	
11AX80SISO	Ant1	5210	80.48	5169.84	5250.32	---	---
	Ant2	5210	80.64	5169.84	5250.48	---	---
	Ant1	5290	80.64	5249.84	5330.48	---	---
	Ant2	5290	80.48	5249.84	5330.32	---	---
	Ant1	5530	81.12	5489.84	5570.96	---	---
	Ant2	5530	80.48	5489.84	5570.32	---	---
	Ant1	5610	80.48	5569.84	5650.32	---	---
	Ant2	5610	80.48	5569.84	5650.32	---	---
	Ant1	5690	80.64	5649.84	5730.48	---	---
	Ant2	5690	80.64	5649.84	5730.48	---	---
	Ant1	5775	80.80	5734.68	5815.48	---	---
	Ant2	5775	80.48	5734.84	5815.32	---	---





Test Graphs

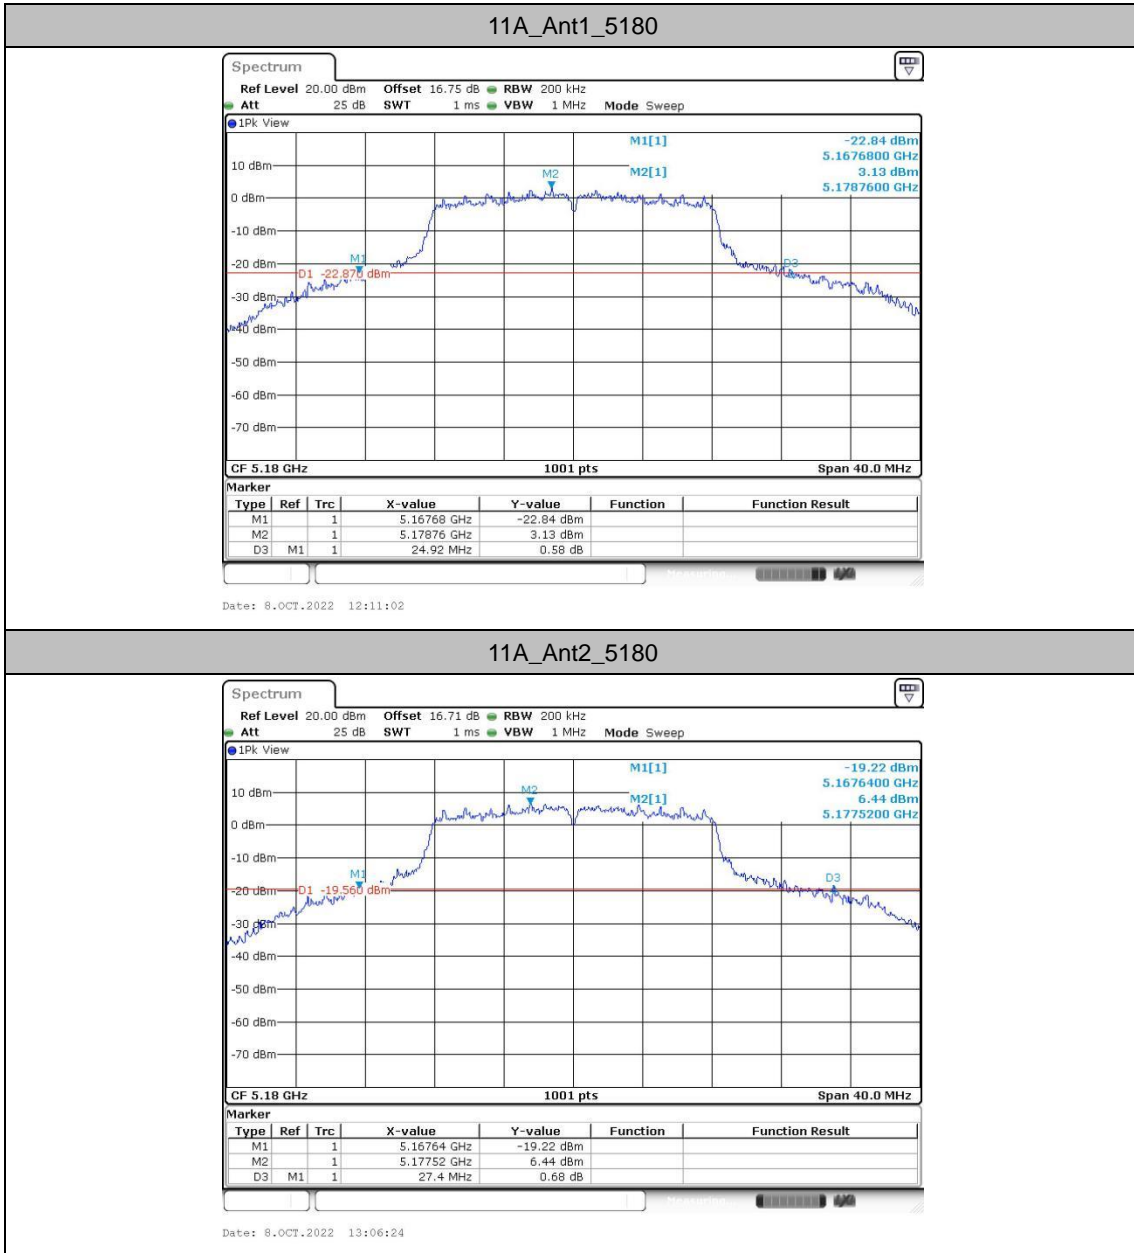



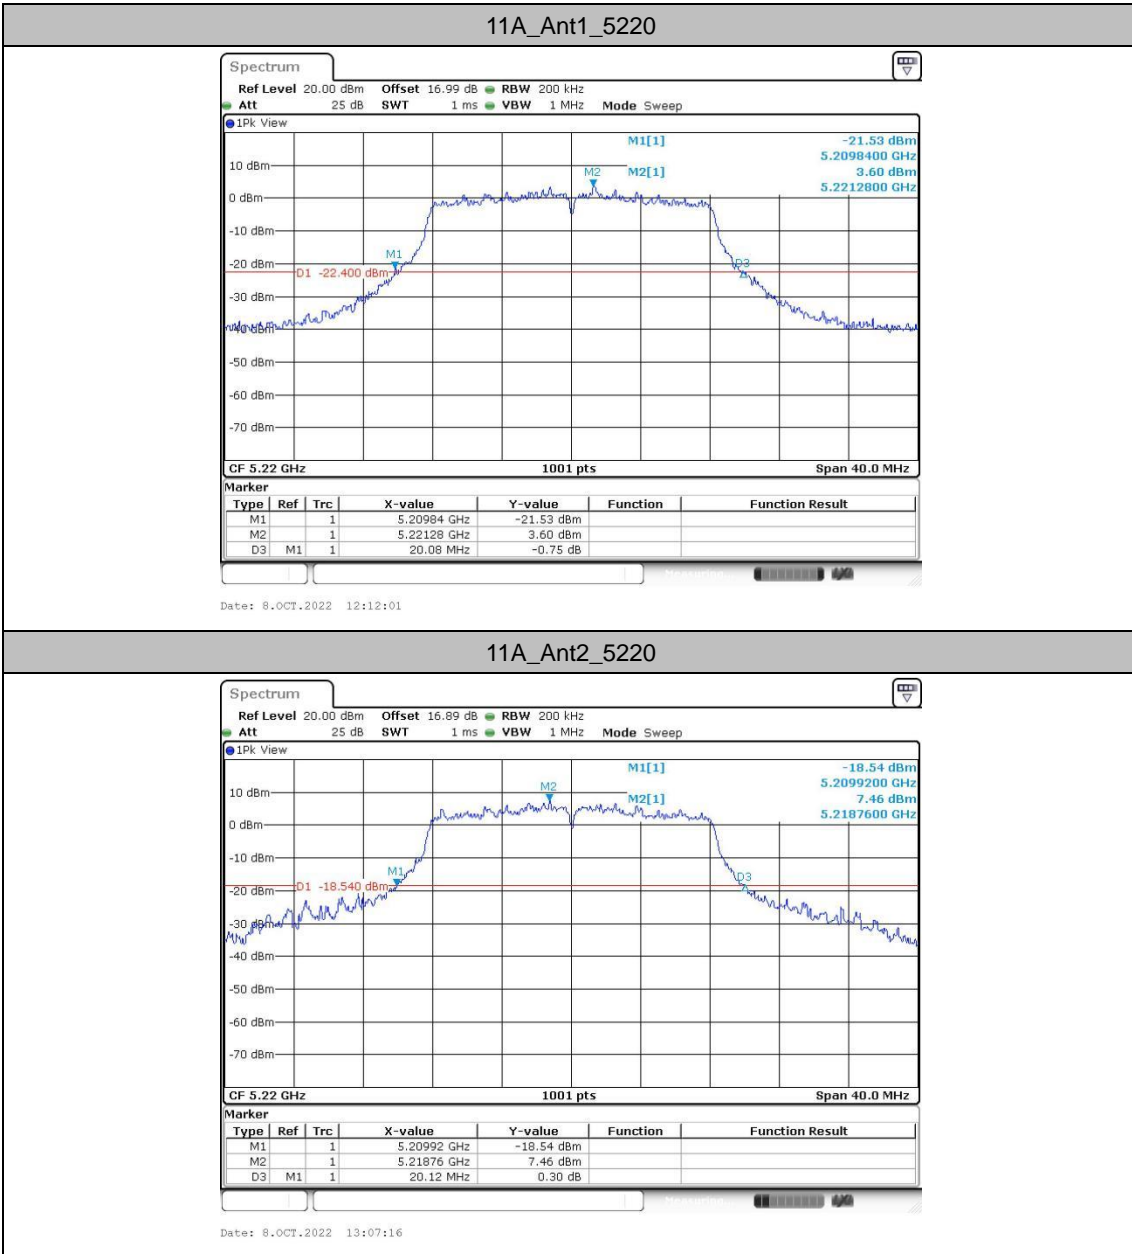


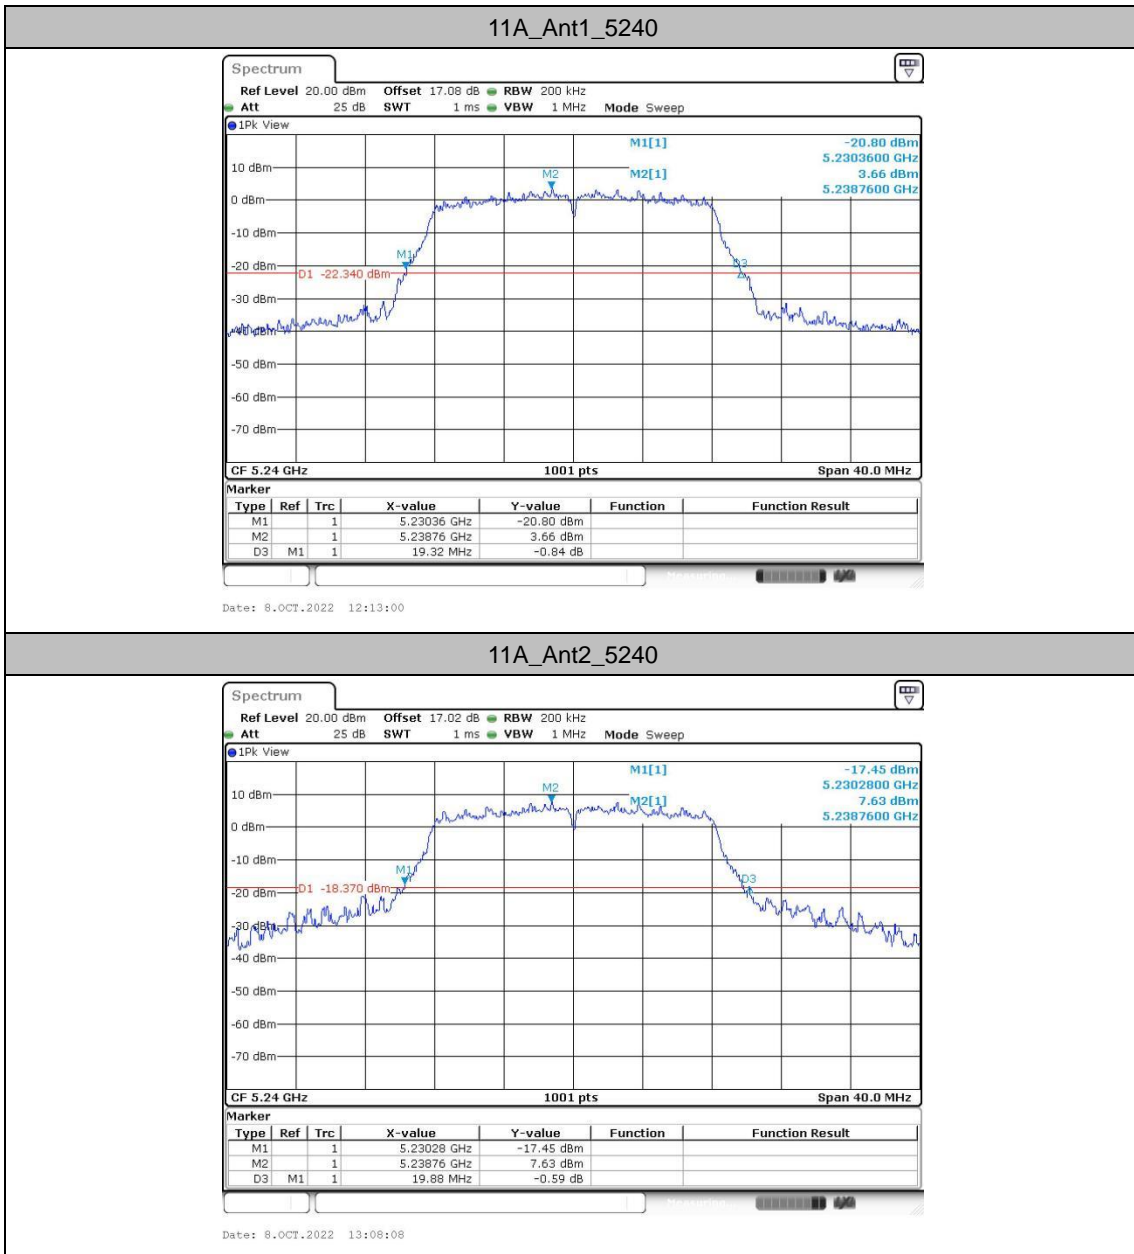


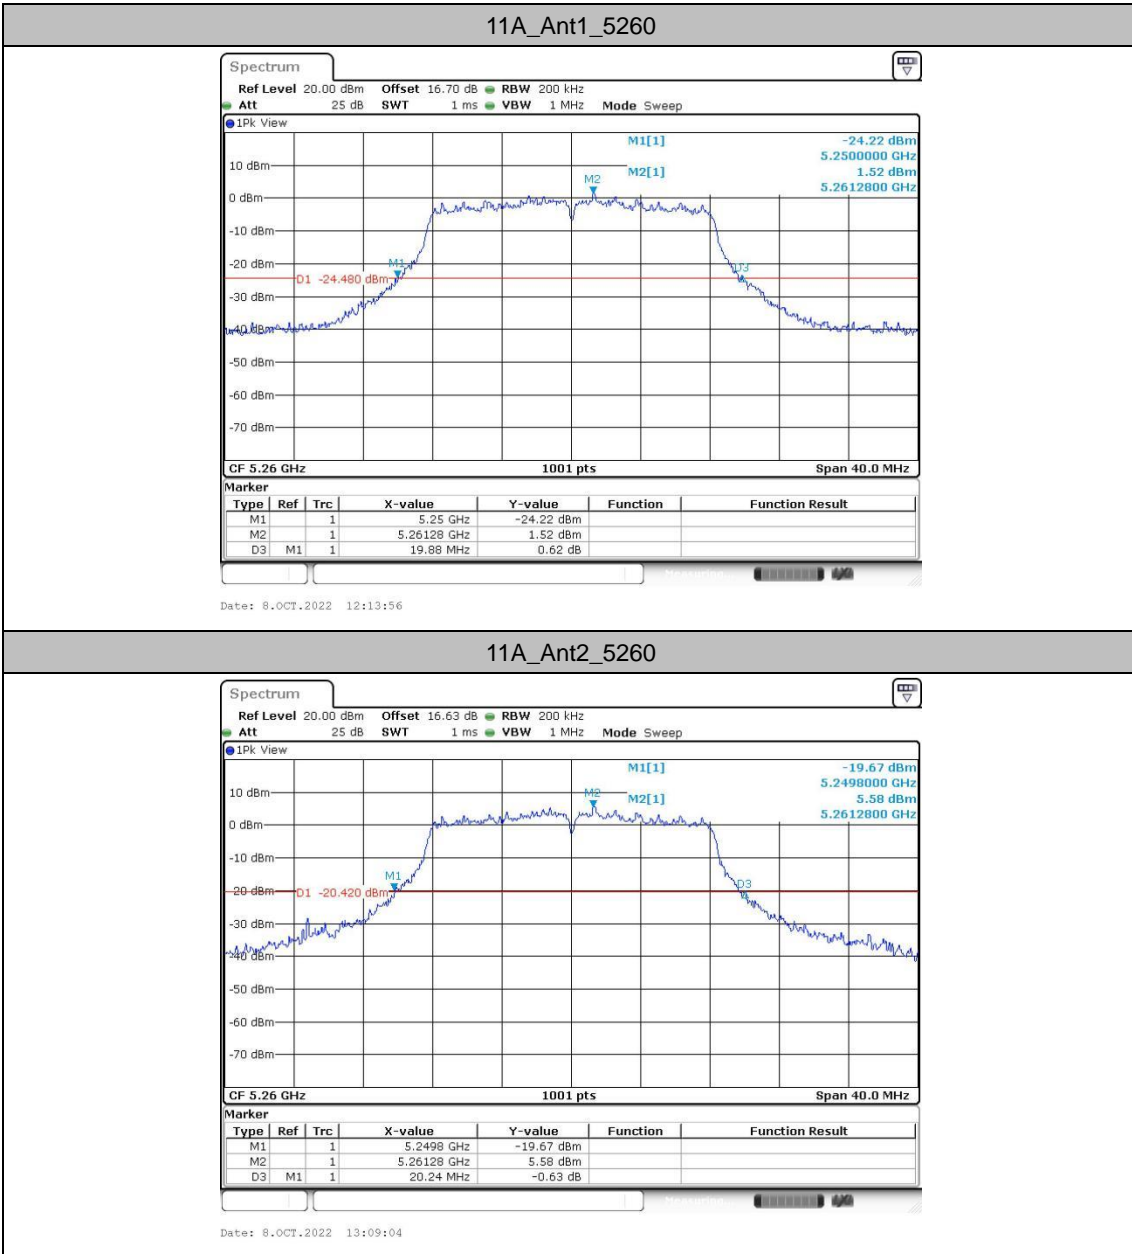


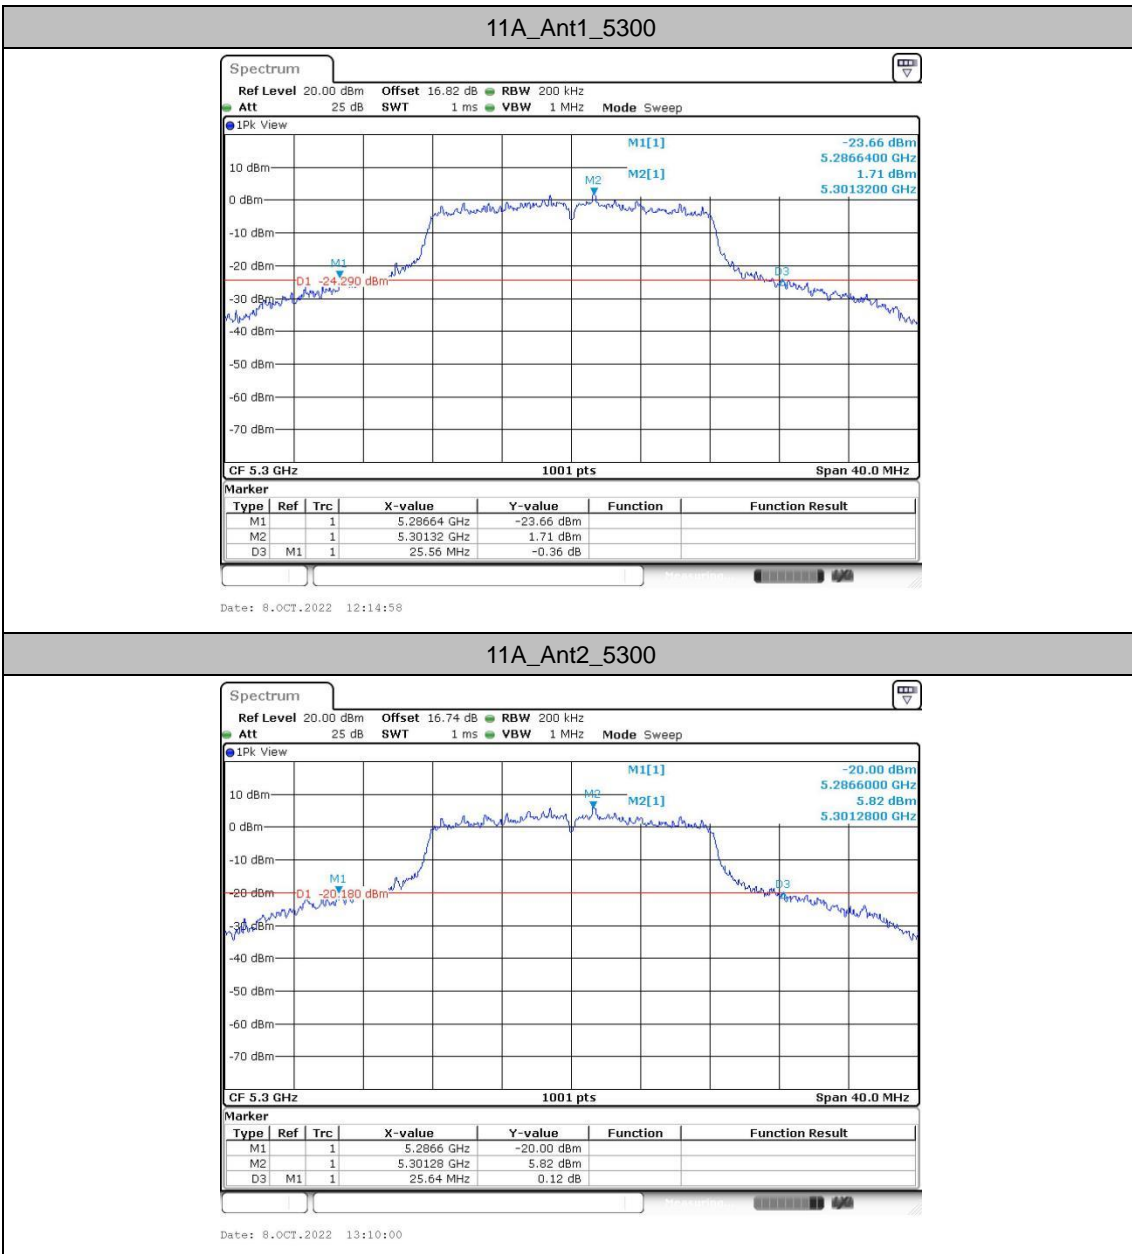


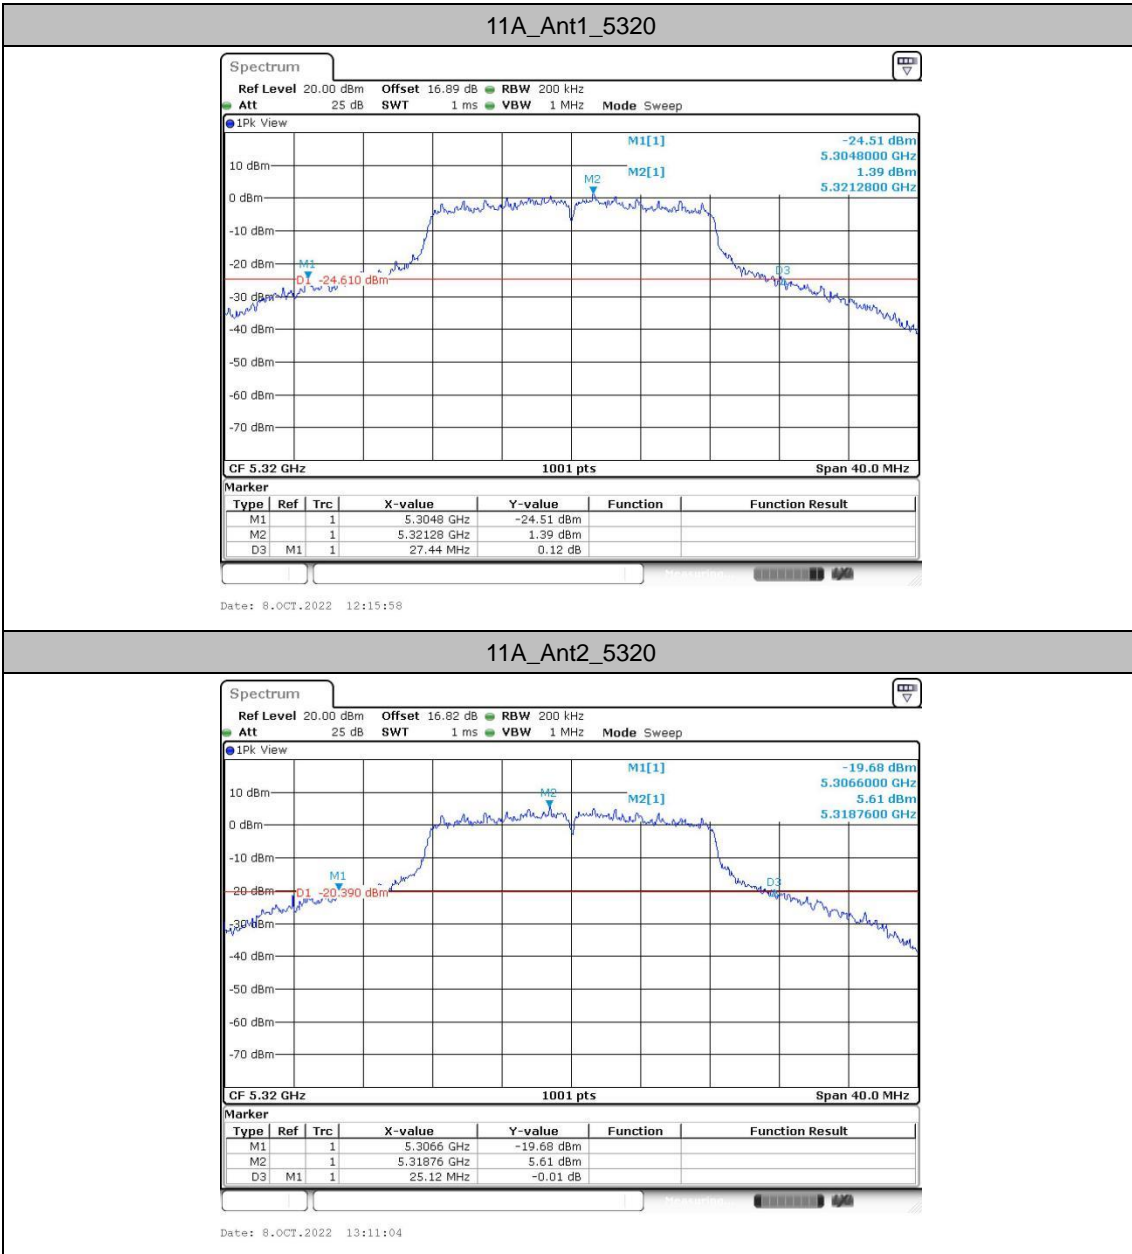


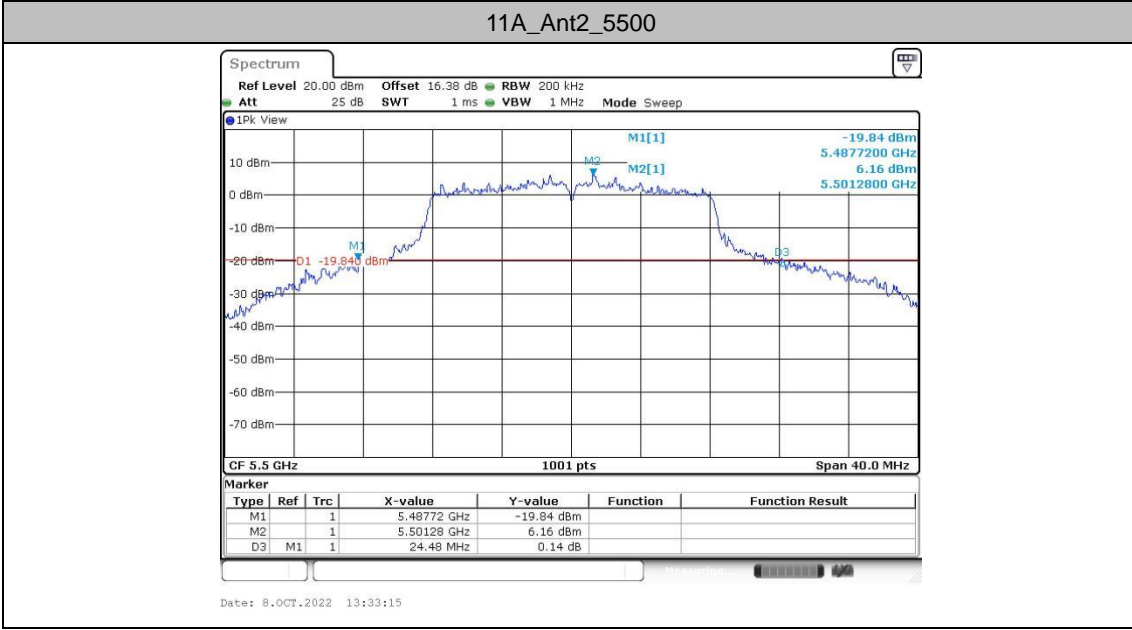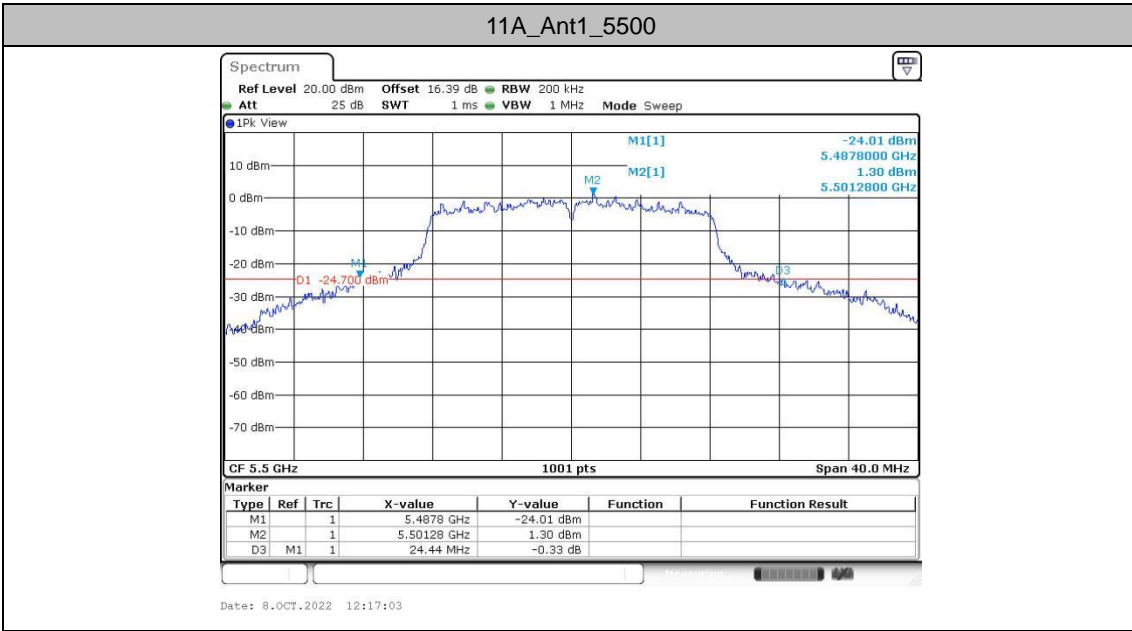


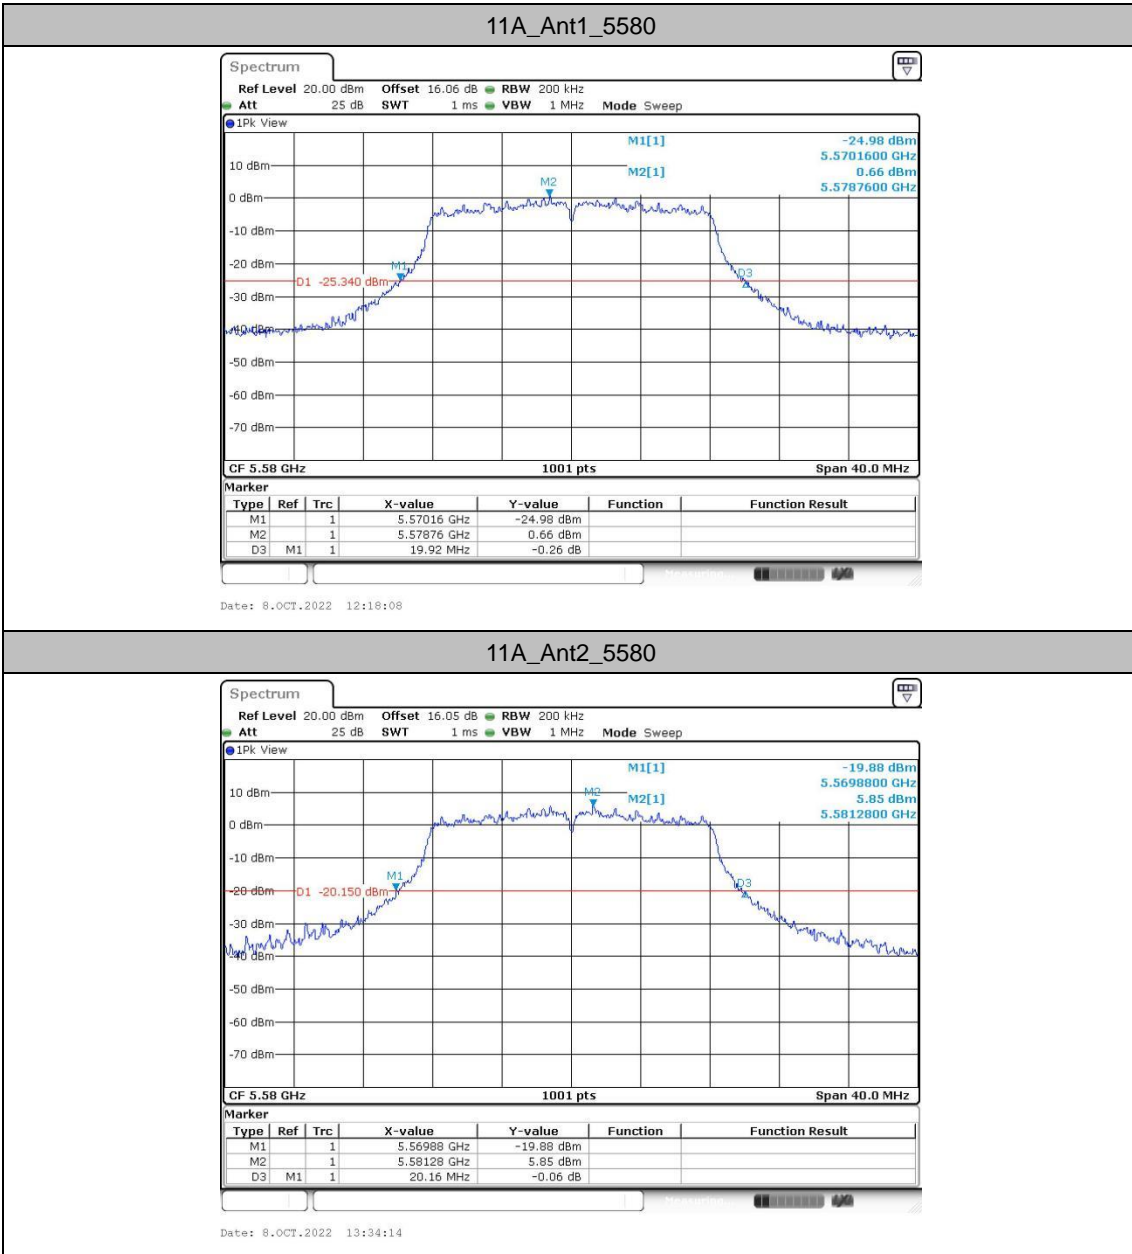


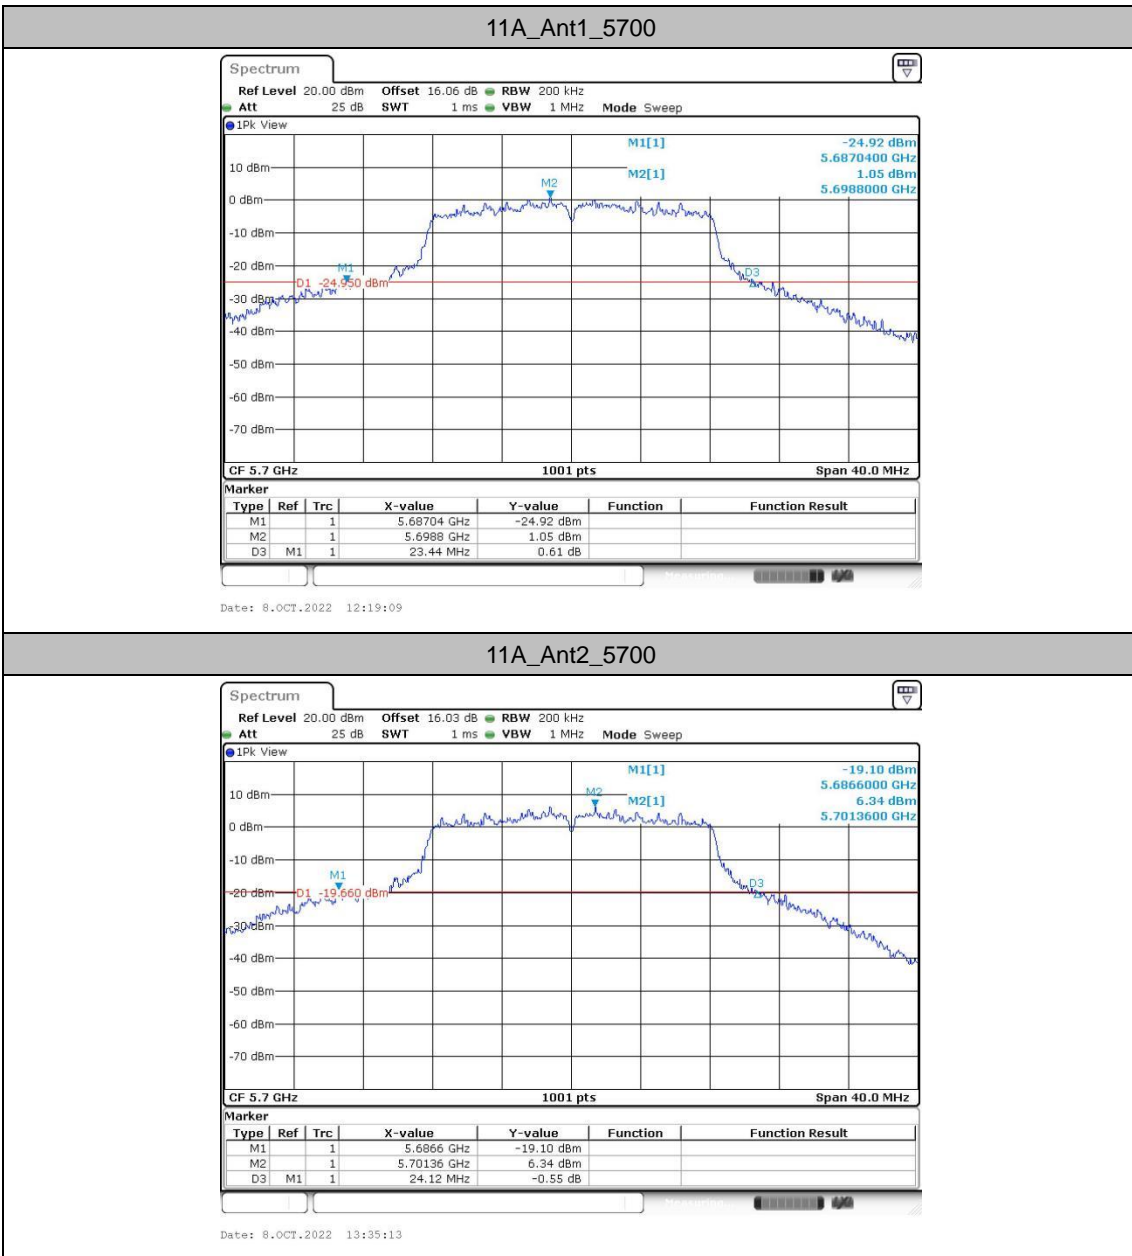

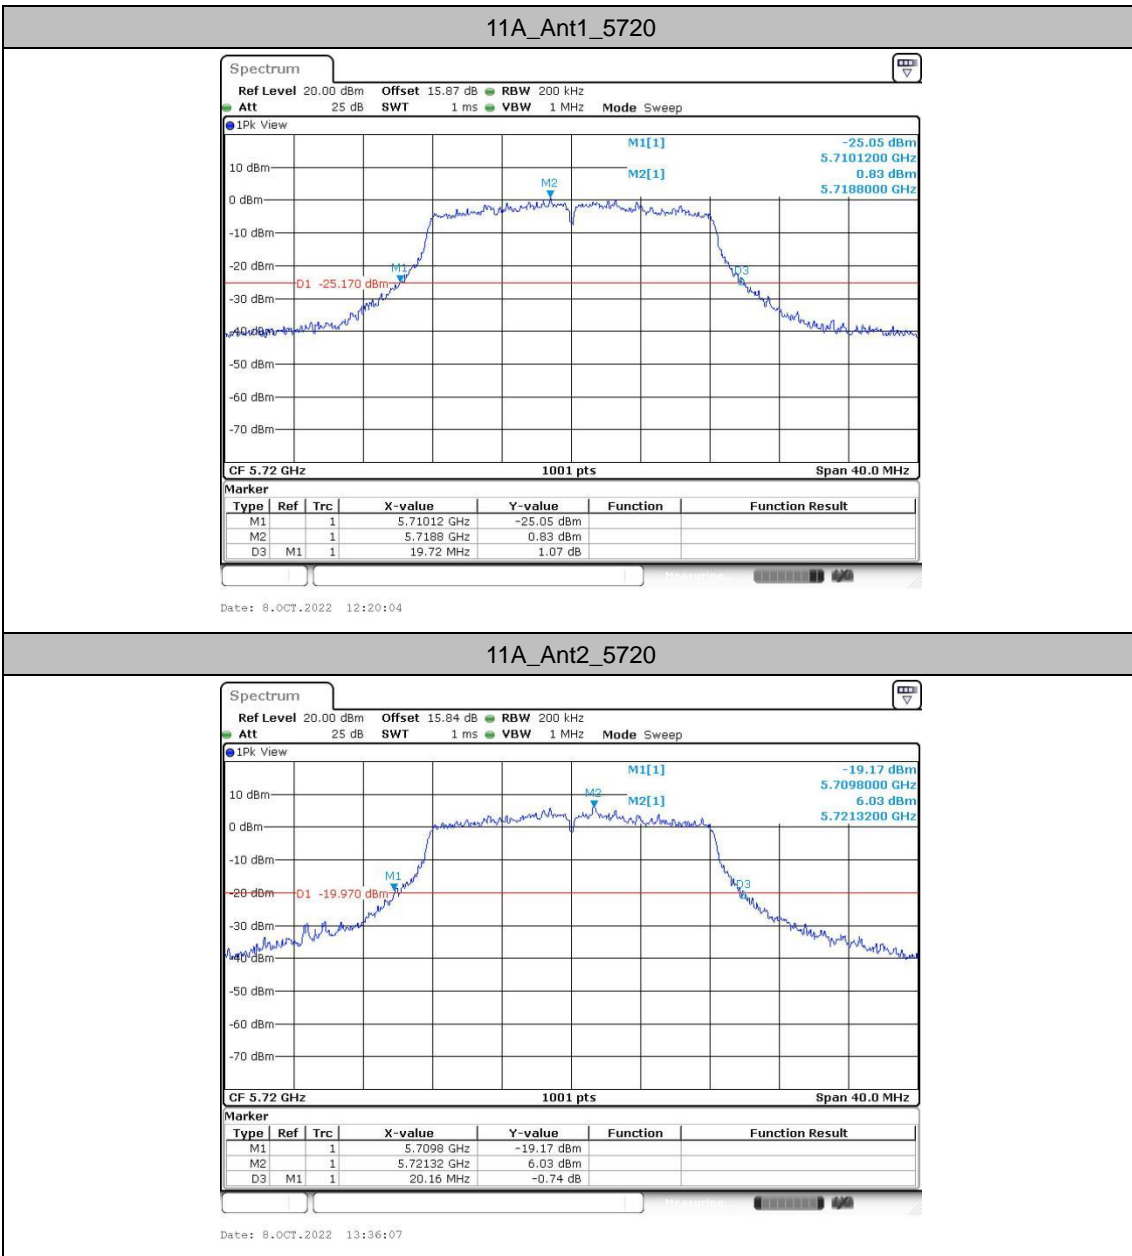

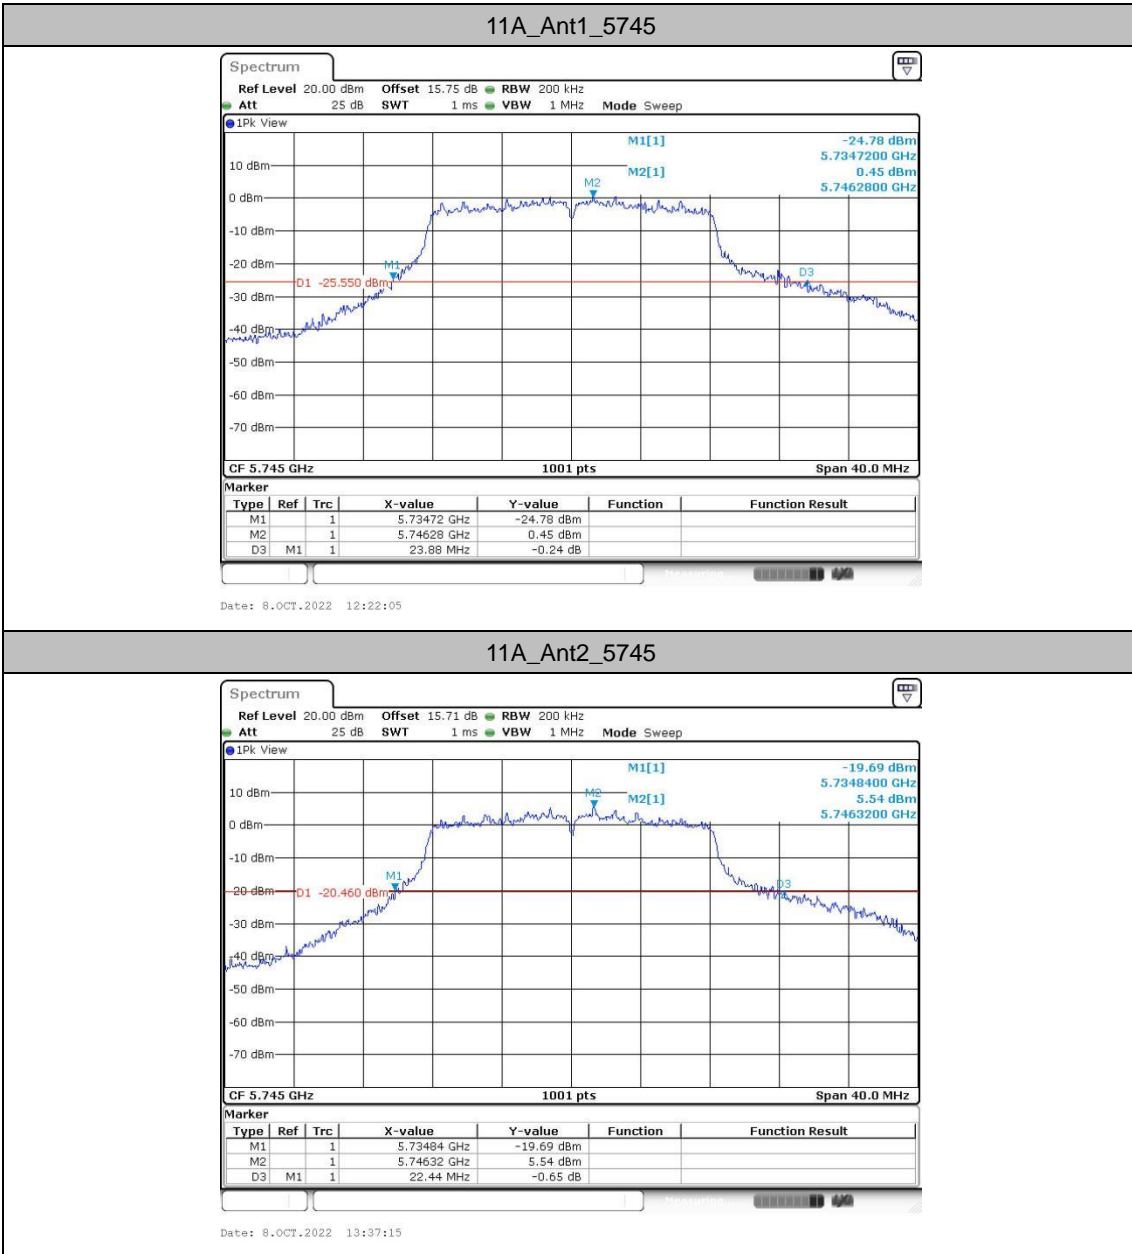

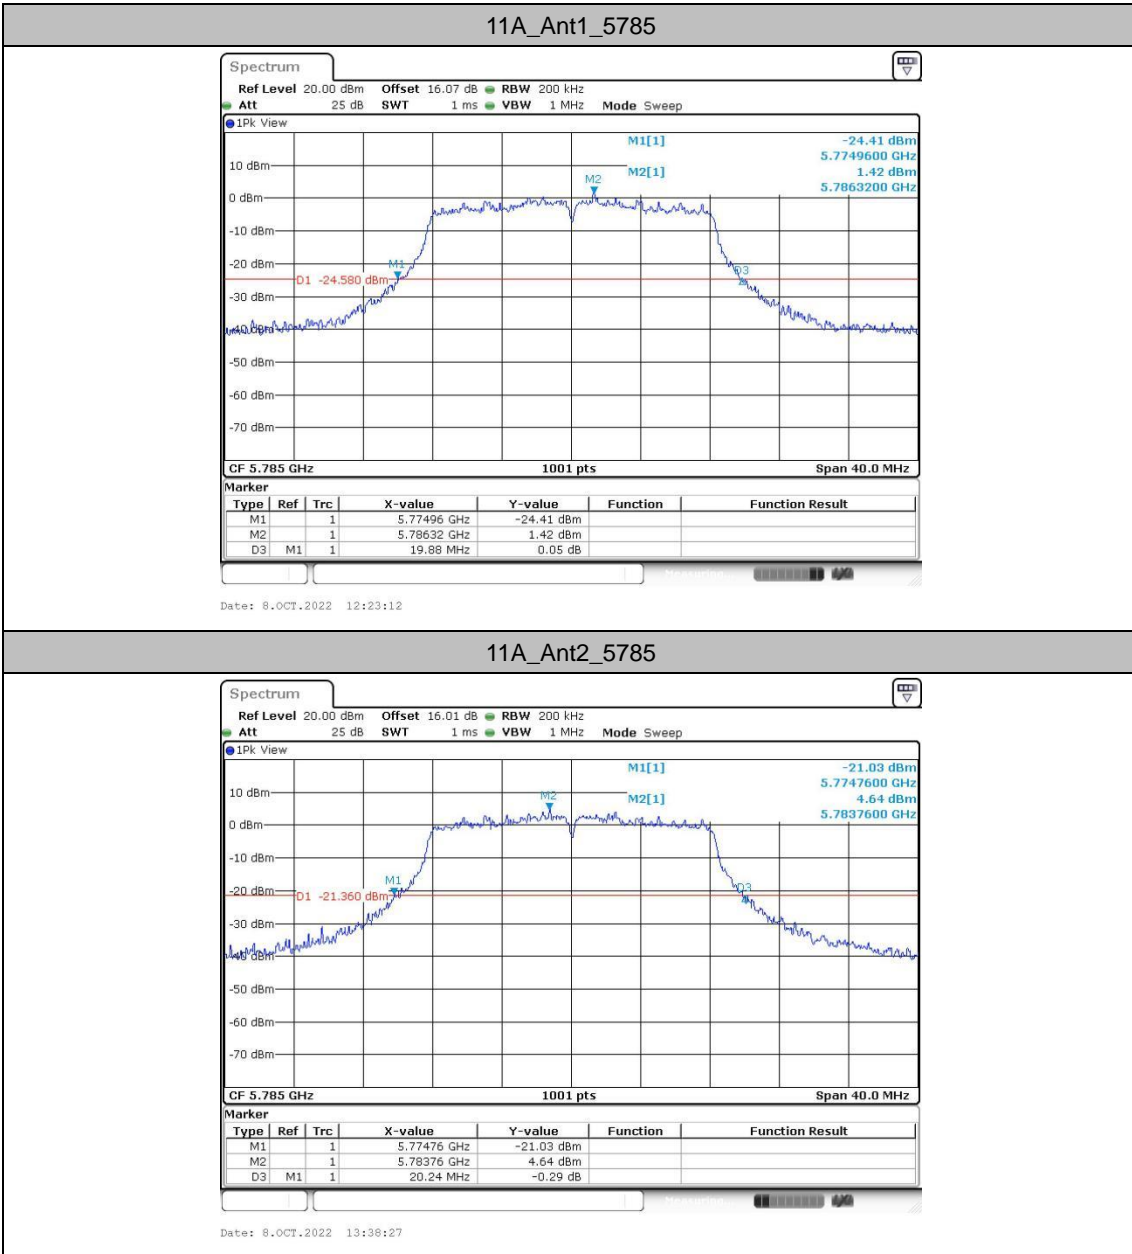

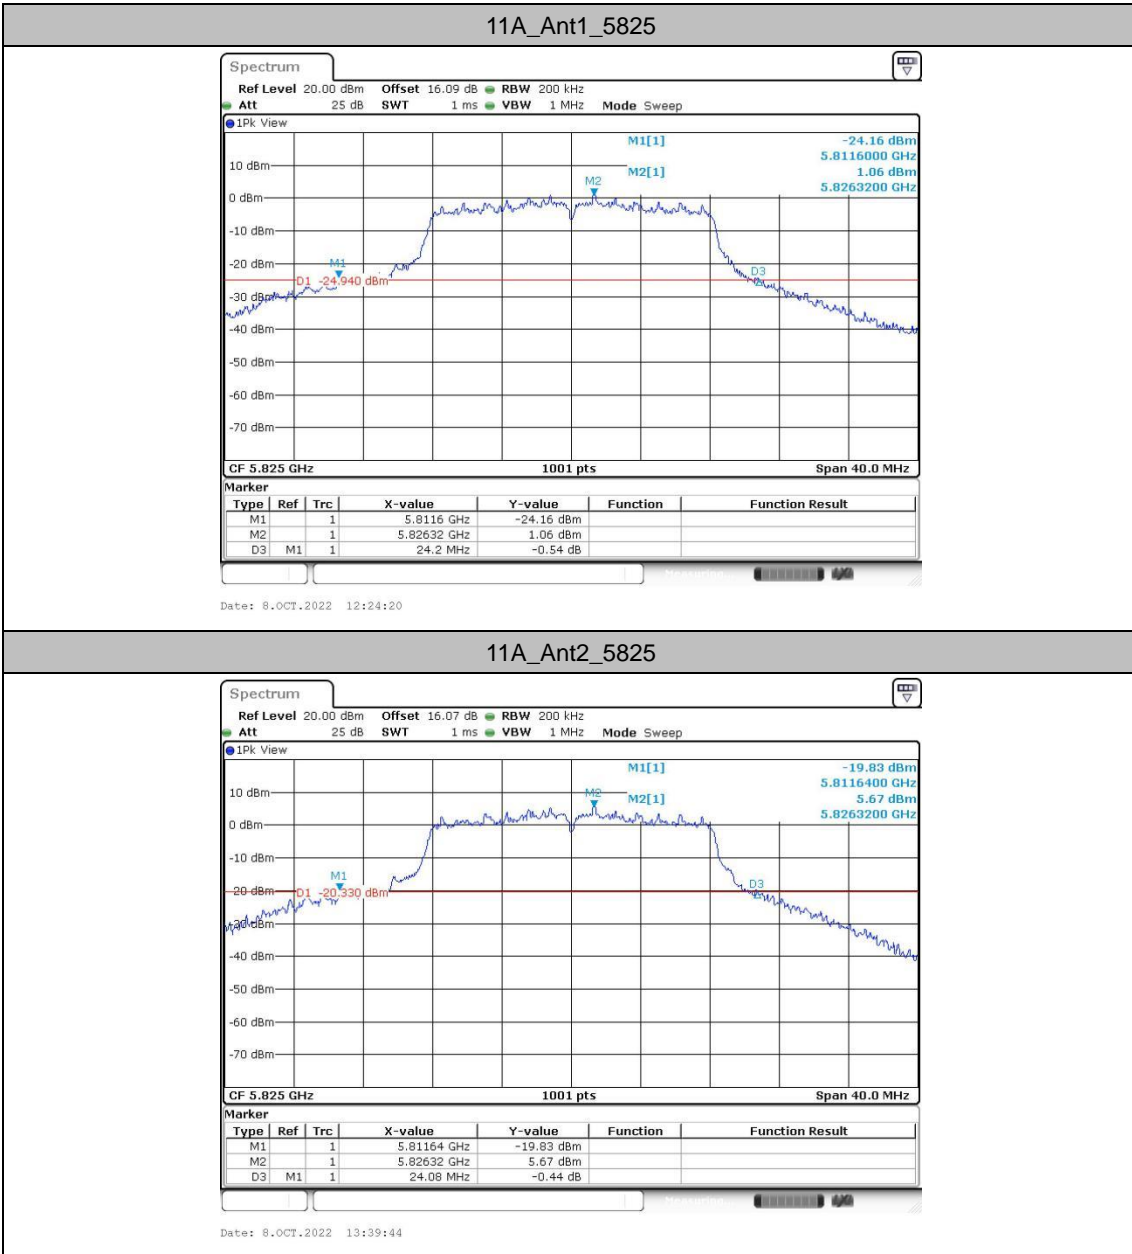
11A_Ant2_5825

