



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Wireless Tablet
MODEL NAME : TG425K
FCC ID : 2A4DH-4258
STANDARD : FCC Part 15 Subpart E § 15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Feb. 12, 2023 ~ May 15, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Product Feature of Equipment Under Test..... 5

 1.3 Product Specification of Equipment Under Test..... 6

 1.4 Modification of EUT 8

 1.5 Testing Location 9

 1.6 Test Software..... 9

 1.7 Applicable Standards..... 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Carrier Frequency and Channel 10

 2.2 Test Mode..... 11

 2.3 Connection Diagram of Test System..... 13

 2.4 Support Unit used in test configuration and system 14

 2.5 EUT Operation Test Setup 14

 2.6 Measurement Results Explanation Example..... 14

3 TEST RESULT 15

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 15

 3.2 Maximum Conducted Output Power Measurement 18

 3.3 Power Spectral Density Measurement 20

 3.4 Unwanted Emissions Measurement..... 23

 3.5 AC Conducted Emission Measurement..... 28

 3.6 Automatically Discontinue Transmission 30

 3.7 Antenna Requirements..... 32

4 LIST OF MEASURING EQUIPMENT 33

5 UNCERTAINTY OF EVALUATION 34

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	6dB Bandwidth for straddle channels > 500kHz	6dB Bandwidth > 500kHz	Pass
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Discontinue Transmission	Pass
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Amazon.com Services LLC

410 Terry Avenue N, Seattle, WA 98109-5210, United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Tablet
Model Name	TG425K
FCC ID	2A4DH-4258
SN Code	Conducted: PCC33E00304700M1 Conduction: GCC2HD003052001R Radiation: GCC2HD003052001V GCC2HD003052001T DFS: PCC33E00304700M1

Remark: There are three types of EUT, the differences between them are summary below:

	Sample1	Sample2	Sample3
Configuration	-	-	-
EMMC	64GB	64GB	64GB
DDR	4GB	4GB	3GB
Battery	ATL	SCUD	SCUD

According to the difference, for RF report, we chose sample 1 to perform full test.



1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p><Ant. 1></p> <p><5180 MHz ~ 5240 MHz> 802.11a : 13.97 dBm / 0.0249 W 802.11n HT20 : 13.82 dBm / 0.0241 W 802.11n HT40 : 13.91 dBm / 0.0246 W 802.11ac VHT20: 13.88 dBm / 0.0244 W 802.11ac VHT40: 14.02 dBm / 0.0252 W 802.11ac VHT80: 11.67 dBm / 0.0147 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 14.08 dBm / 0.0256 W 802.11n HT20 : 13.84 dBm / 0.0242 W 802.11n HT40 : 14.03 dBm / 0.0253 W 802.11ac VHT20: 13.92 dBm / 0.0247 W 802.11ac VHT40: 14.07 dBm / 0.0255 W 802.11ac VHT80: 11.60 dBm / 0.0145 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 14.07 dBm / 0.0255 W 802.11n HT20 : 13.85 dBm / 0.0243 W 802.11n HT40 : 13.99 dBm / 0.0251 W 802.11ac VHT20: 13.92 dBm / 0.0247 W 802.11ac VHT40: 14.05 dBm / 0.0254 W 802.11ac VHT80: 13.78 dBm / 0.0239 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 13.46 dBm / 0.0222 W 802.11n HT20 : 13.37 dBm / 0.0217 W 802.11n HT40 : 13.47 dBm / 0.0222 W 802.11ac VHT20: 13.45 dBm / 0.0221 W 802.11ac VHT40: 13.53 dBm / 0.0225 W 802.11ac VHT80: 13.51 dBm / 0.0224 W</p> <p><Ant. 2></p> <p><5180 MHz ~ 5240 MHz> 802.11a : 14.28 dBm / 0.0268 W 802.11n HT20 : 14.18 dBm / 0.0262 W 802.11n HT40 : 14.21 dBm / 0.0264 W 802.11ac VHT20: 14.31 dBm / 0.0270 W 802.11ac VHT40: 14.33 dBm / 0.0271 W 802.11ac VHT80: 12.10 dBm / 0.0162 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 14.41 dBm / 0.0276 W 802.11n HT20 : 14.27 dBm / 0.0267 W 802.11n HT40 : 14.29 dBm / 0.0269 W 802.11ac VHT20: 14.35 dBm / 0.0272 W 802.11ac VHT40: 14.39 dBm / 0.0275 W 802.11ac VHT80: 12.18 dBm / 0.0165 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 14.47 dBm / 0.0280 W 802.11n HT20 : 14.41 dBm / 0.0276 W</p>



	<p>802.11n HT40 : 14.39 dBm / 0.0275 W 802.11ac VHT20: 14.48 dBm / 0.0281 W 802.11ac VHT40: 14.46 dBm / 0.0279 W 802.11ac VHT80: 14.26 dBm / 0.0267 W <5745 MHz ~ 5825 MHz> 802.11a : 14.01 dBm / 0.0252 W 802.11n HT20 : 13.82 dBm / 0.0241 W 802.11n HT40 : 14.13 dBm / 0.0259 W 802.11ac VHT20: 13.87 dBm / 0.0244 W 802.11ac VHT40: 14.39 dBm / 0.0275 W 802.11ac VHT80: 13.75 dBm / 0.0237 W</p>
<p>99% Occupied Bandwidth</p>	<p><Ant.1> <5180 MHz ~ 5240 MHz> 802.11a : 17.183 MHz 802.11ac VHT20 : 18.062 MHz 802.11ac VHT40 : 36.284 MHz 802.11ac VHT80 : 75.604 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.103 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.284 MHz 802.11ac VHT80 : 75.445 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.183 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.364 MHz 802.11ac VHT80 : 75.604 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.143 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.284 MHz 802.11ac VHT80 : 75.445 MHz <Ant.2> <5180 MHz ~ 5240 MHz> 802.11a : 17.223 MHz 802.11ac VHT20 : 18.062 MHz 802.11ac VHT40 : 36.284 MHz 802.11ac VHT80 : 75.445 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.143 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.284 MHz 802.11ac VHT80 : 75.285 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.223 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.284 MHz 802.11ac VHT80 : 75.764 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.223 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.204 MHz 802.11ac VHT80 : 75.285 MHz</p>



Antenna Type / Gain	<p><5180 MHz ~ 5240 MHz> <Ant. 1> : PIFA Antenna with gain 2.00 dBi <Ant. 2> : PIFA Antenna with gain 3.00 dBi</p> <p><5260 MHz ~ 5320 MHz> <Ant. 1> : PIFA Antenna with gain 1.00 dBi <Ant. 2> : PIFA Antenna with gain 2.00 dBi</p> <p><5500 MHz ~ 5720 MHz> <Ant. 1> : PIFA Antenna with gain 2.00 dBi <Ant. 2> : PIFA Antenna with gain 3.00 dBi</p> <p><5745 MHz ~ 5825 MHz> <Ant. 1> : PIFA Antenna with gain 2.00 dBi <Ant. 2> : PIFA Antenna with gain 1.50 dBi</p>
Type of Modulation	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11ac VHT20/ VHT40 by referring to their higher conducted power.
2. WLAN supports SISO mode only.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS DFS01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	R&S	EMC32	10.60.20
3.	DFS01-KS	Sporton	DFS & Adaptivity Test Tools	1.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : BT Link + WLAN (5G) Link + USB Cable(Charging From Adapter)
Remark:	
<ol style="list-style-type: none"> 1. For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable. 2. RSE Simultaneous transmission modes are combination from the worst WLAN TX mode and BT Link mode. 	

Simultaneous transmission
BLE 2Mbps CH39 Link + WLAN 5G 802.11ac VHT80 CH106 Link for Ant.1
BLE 2Mbps CH39 Link + WLAN 5G 802.11ac VHT40 CH38 Link for Ant.2

Note: According to the co-location test data, no significant intermodulation emissions were observed.



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For AC Conducted Emission:

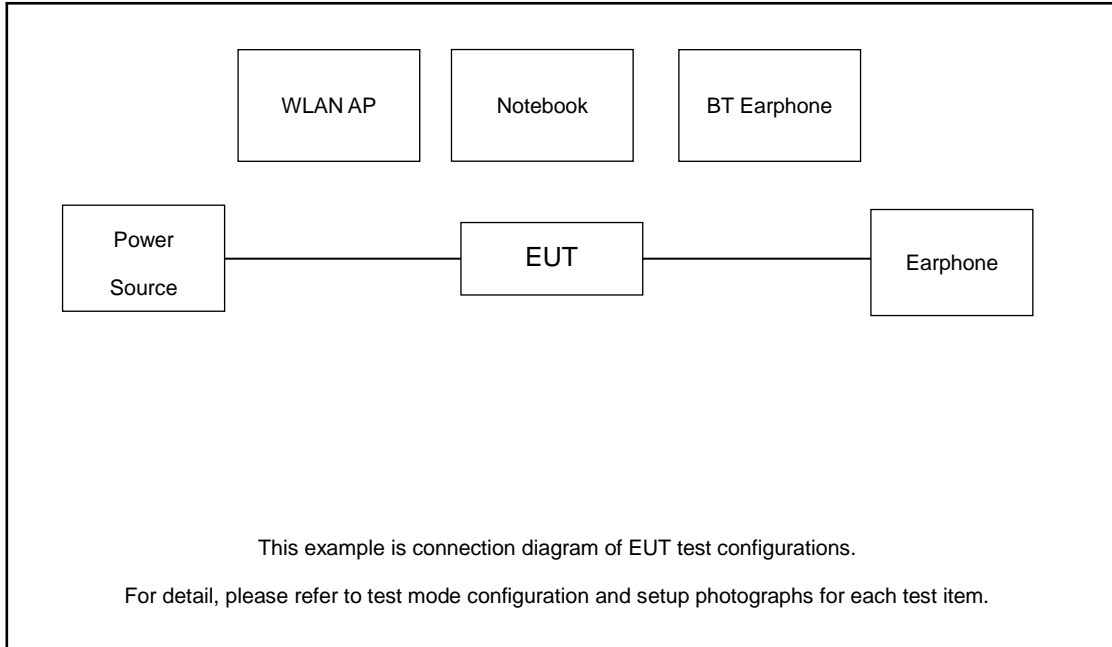

For Radiated Emission:

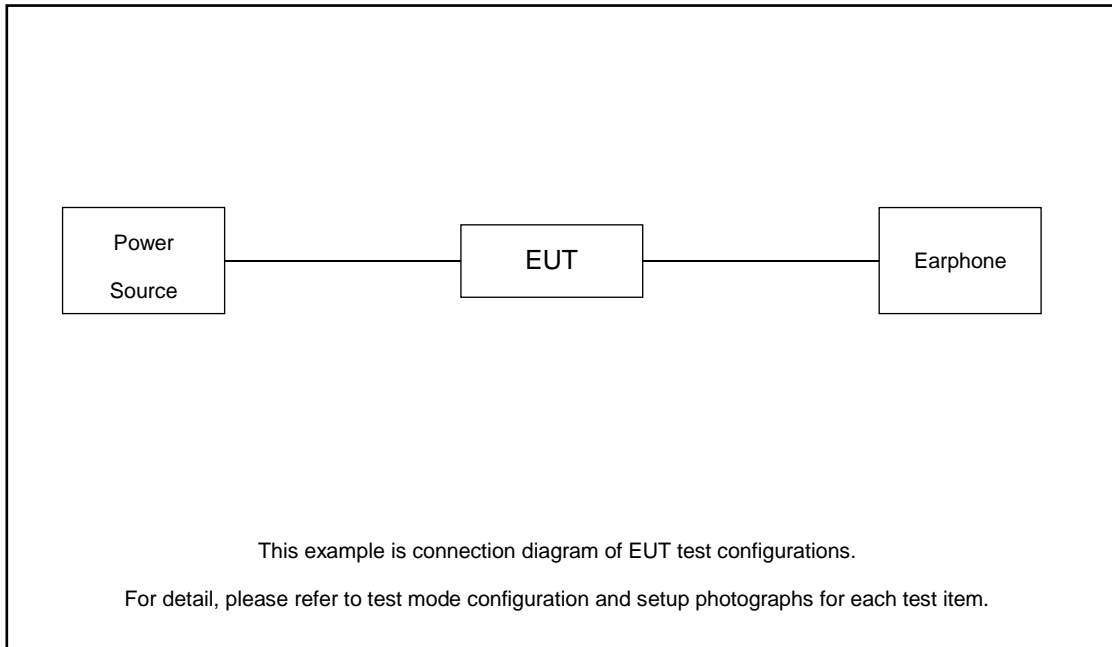



2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	LBH308	N/A	N/A	N/A
2.	Notebook	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	WLAN AP	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Earphone	P121	N/A	Unshielded,1.2m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor which are included in RF test system.

$$\text{Offset(dB)} = 16.75 \text{ (dB)}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> 1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. 7. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> 1. Set RBW = 100kHz. 2. Set the VBW ≥ 3 x RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.

3.1.4 Test Setup

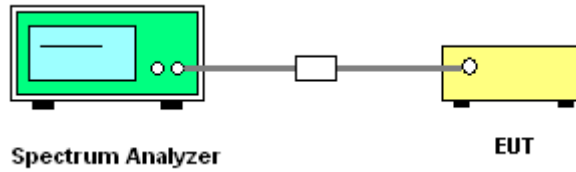




3.1.5 Test Result

Please refer to Appendix A.

3.1.6 Test Result of 6dB Bandwidth for Straddle Channels

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant.1	Ant.2		
11a	6Mbps	1	144	5720	3.092	3.092	0.5	Pass
VHT20	MCS0	1	144	5720	3.691	3.691	0.5	Pass
VHT40	MCS0	1	142	5710	3.152	3.062	0.5	Pass
VHT80	MCS0	1	138	5690	3.150	3.150	0.5	Pass

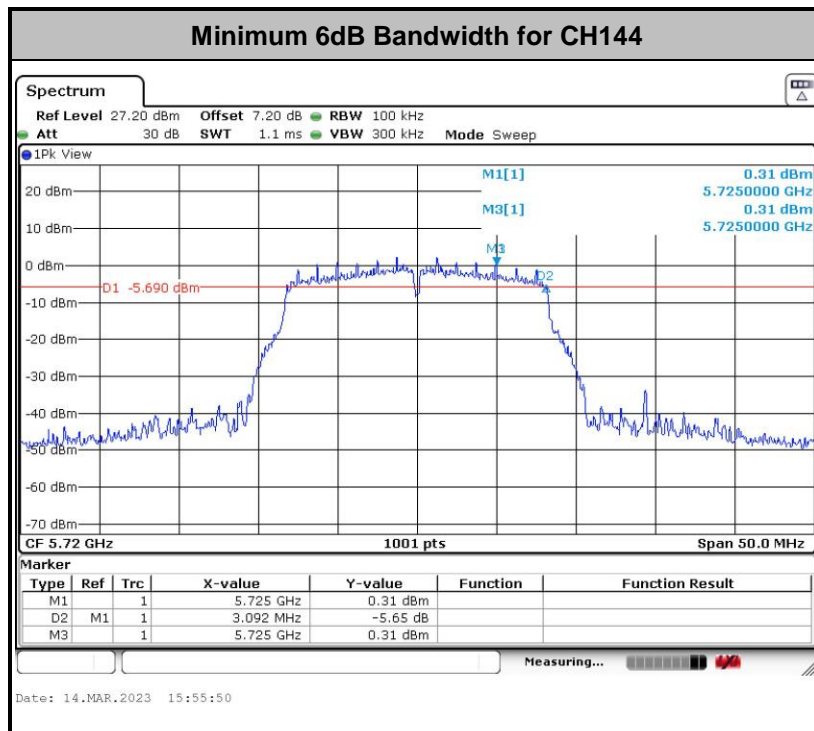

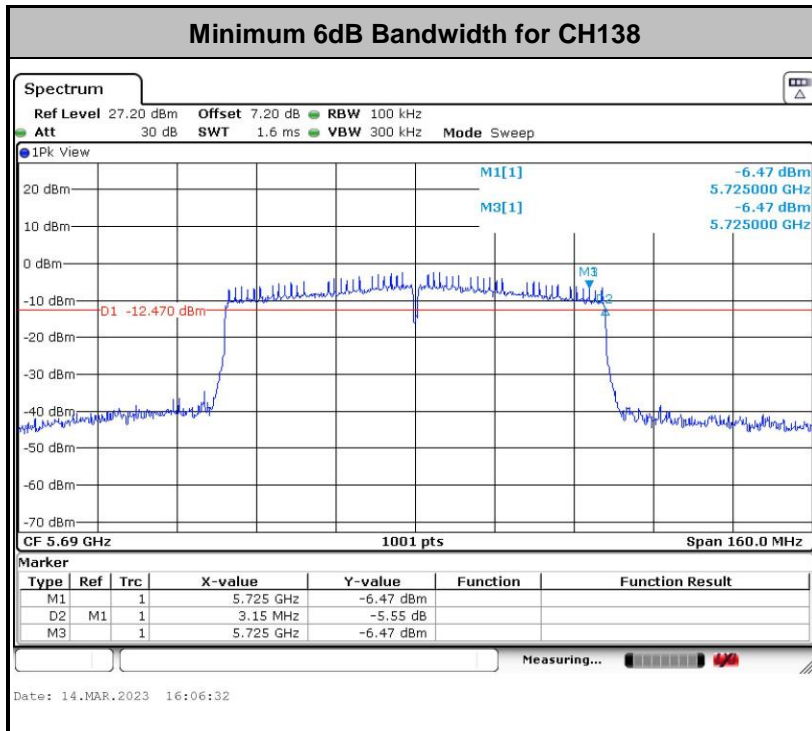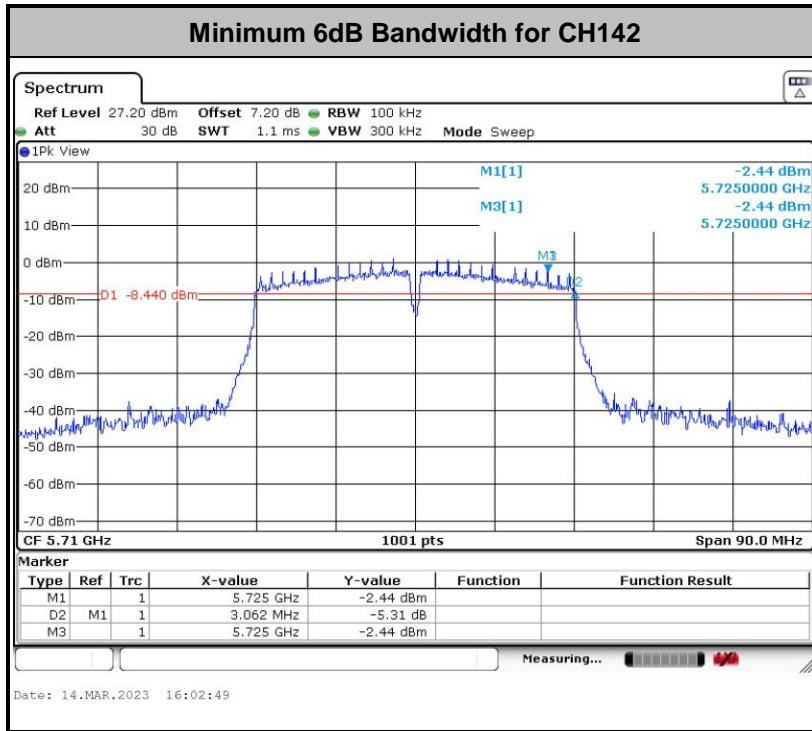



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

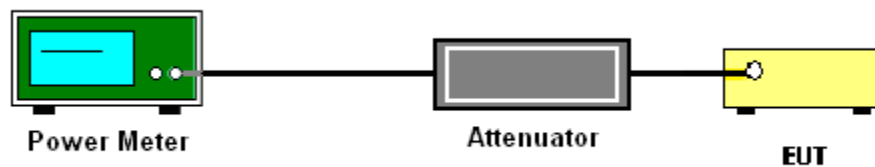

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15 – 5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band 5.725 - 5.85 GHz


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

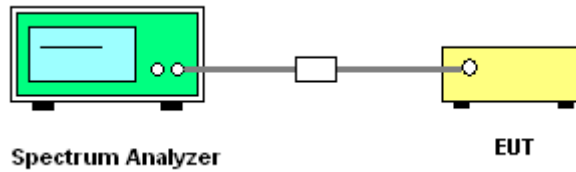

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

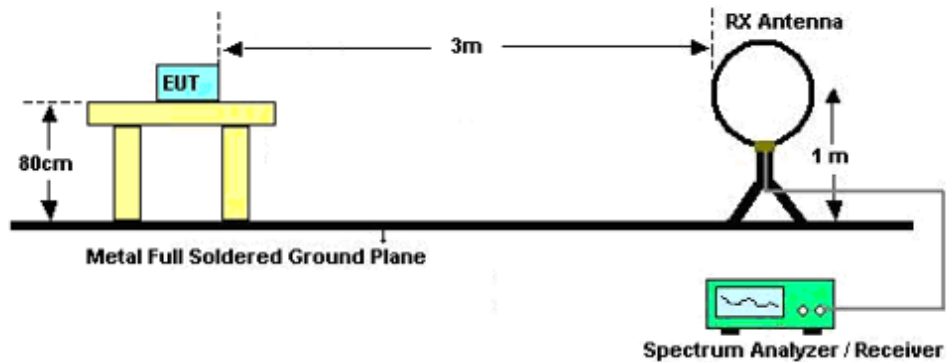

For radiated emissions from 30MHz to 1GHz

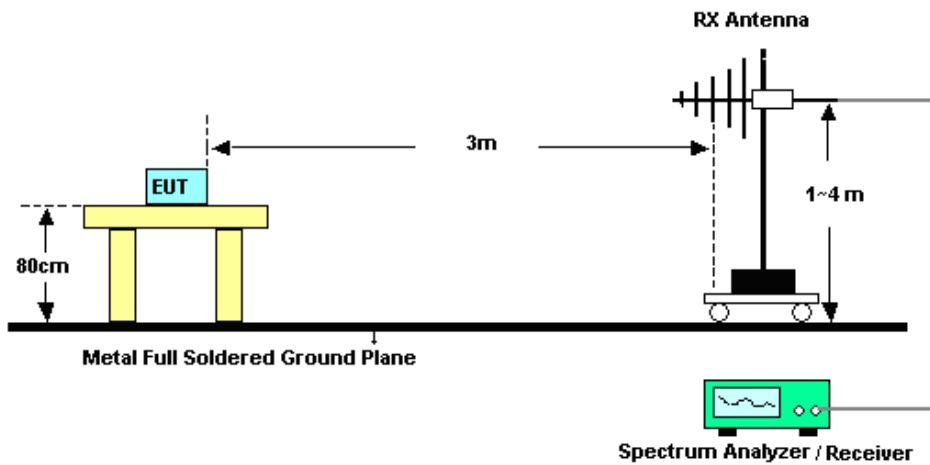

For radiated emissions above 1GHz

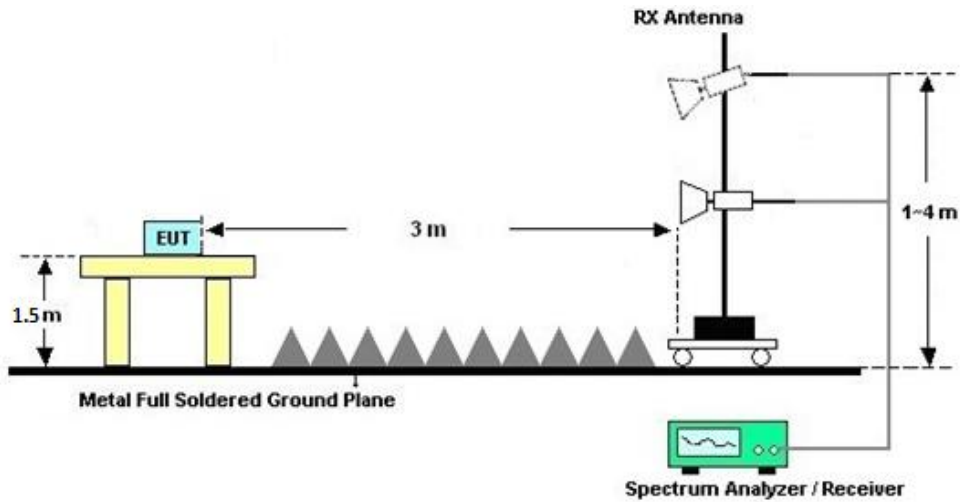

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

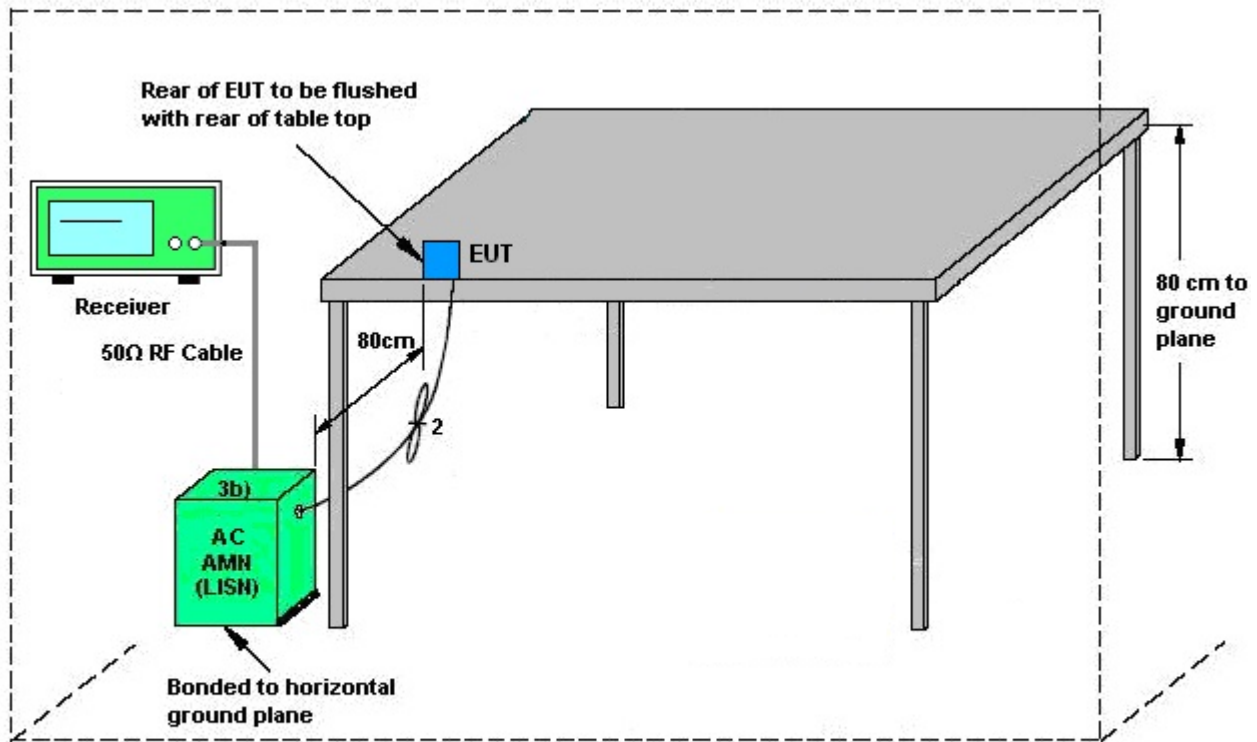

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission



EUT is verified this characteristic during the function check of normal sample associated with an access point:

- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

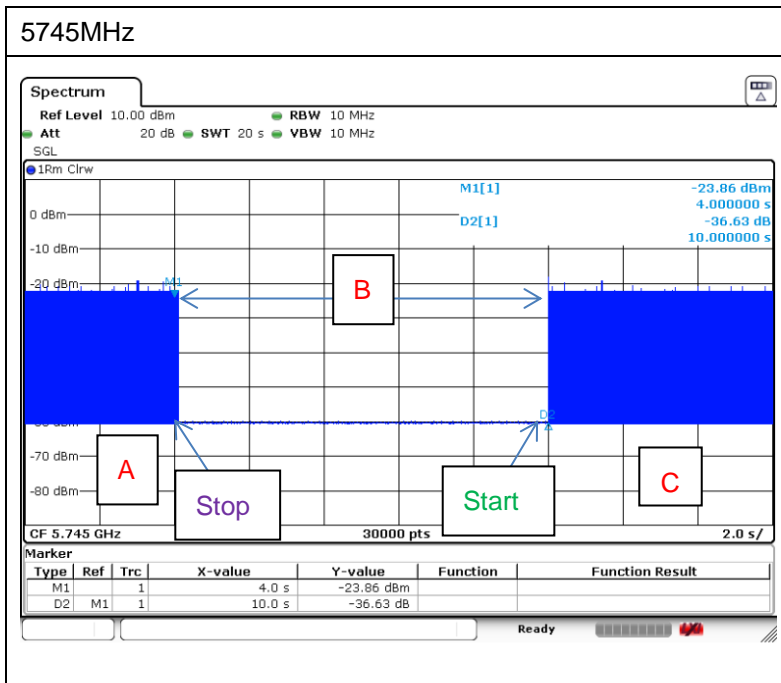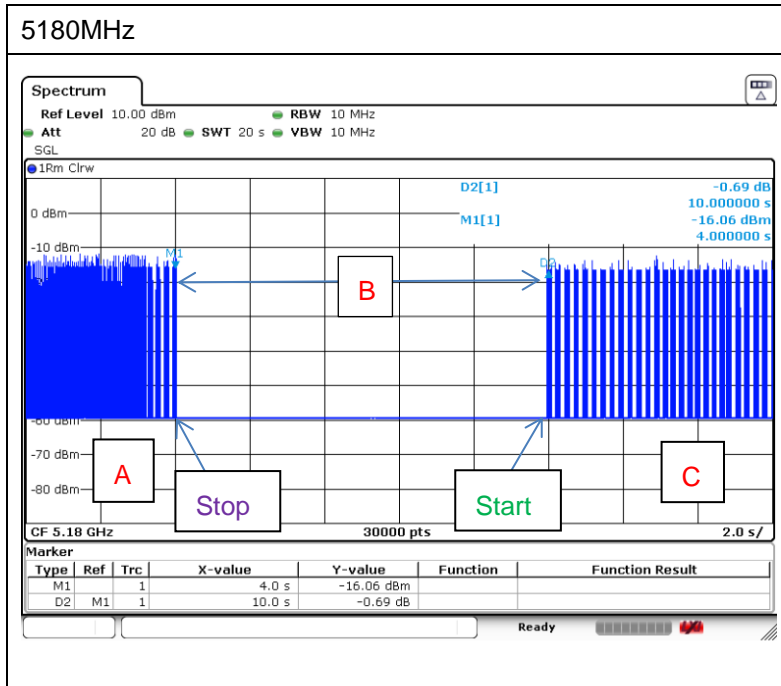

Note: The control / signaling information during the period B is precluded.



3.7 Antenna Requirements

3.7.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Feb. 12, 2023~Mar. 14, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Feb. 12, 2023~Mar. 14, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Feb. 12, 2023~Mar. 14, 2023	Jan. 04, 2024	Conducted (TH01-KS)
RF Test System	Tonscend	TS1120-3	N/A	N/A	NCR	Feb. 12, 2023~Mar. 14, 2023	NCR	Conducted (TH01-KS)
automation control unit	Tonscend	JS0806-2	21H8060473	N/A	NCR	Feb. 12, 2023~Mar. 14, 2023	NCR	Conducted (TH01-KS)
power control unit	Tonscend	JS0806-4ADC	21J8060495	N/A	NCR	Feb. 12, 2023~Mar. 14, 2023	NCR	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max x 30dBm	Oct. 13, 2022	Mar. 02, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Mar. 24, 2022	Mar. 02, 2023	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 02, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Mar. 02, 2023	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Mar. 02, 2023	Apr. 17, 2023	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Mar. 02, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 11, 2022	Mar. 02, 2023	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz-18Ghz	Oct. 12, 2022	Mar. 02, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz-18Ghz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 02, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 02, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 02, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Mar. 07, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Mar. 07, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 13, 2022	Mar. 07, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Mar. 07, 2023	Oct. 11, 2023	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2023	May 15, 2023	Jan. 04, 2024	DFS (DFS01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Long Wu	Temperature:	21~25	°C
Test Date:	2023.2.12~2023.3.14	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting	
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		Ant 1	Ant 2
11a	6Mbps	1	36	5180	0.13	0.13	13.96	14.24		24.00	24.00	2.00	3.00	Pass	16	16
11a	6Mbps	1	44	5220	0.13	0.13	13.97	14.28		24.00	24.00	2.00	3.00	Pass	16	16
11a	6Mbps	1	48	5240	0.13	0.13	13.94	14.25		24.00	24.00	2.00	3.00	Pass	16	16
HT20	MCS0	1	36	5180	0.14	0.14	13.82	13.92		24.00	24.00	2.00	3.00	Pass	16	16
HT20	MCS0	1	44	5220	0.14	0.14	13.79	14.13		24.00	24.00	2.00	3.00	Pass	16	16
HT20	MCS0	1	48	5240	0.14	0.14	13.75	14.18		24.00	24.00	2.00	3.00	Pass	16	16
HT40	MCS0	1	38	5190	0.28	0.28	13.84	14.09		24.00	24.00	2.00	3.00	Pass	16	16
HT40	MCS0	1	46	5230	0.28	0.28	13.91	14.21		24.00	24.00	2.00	3.00	Pass	16	16
VHT20	MCS0	1	36	5180	0.14	0.14	13.84	14.12		24.00	24.00	2.00	3.00	Pass	16	16
VHT20	MCS0	1	44	5220	0.14	0.14	13.88	14.20		24.00	24.00	2.00	3.00	Pass	16	16
VHT20	MCS0	1	48	5240	0.14	0.14	13.83	14.31		24.00	24.00	2.00	3.00	Pass	16	16
VHT40	MCS0	1	38	5190	0.28	0.28	13.96	14.25		24.00	24.00	2.00	3.00	Pass	16	16
VHT40	MCS0	1	46	5230	0.28	0.28	14.02	14.33		24.00	24.00	2.00	3.00	Pass	16	16
VHT80	MCS0	1	42	5210	0.55	0.55	11.67	12.10		24.00	24.00	2.00	3.00	Pass	14	14

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting	
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			Ant 1	Ant 2
11a	6Mbps	1	52	5260	0.13	0.13	13.92	14.30		23.94	23.97	1.00	2.00	26.99	Pass	16	16
11a	6Mbps	1	60	5300	0.13	0.13	14.08	14.41		23.96	23.98	1.00	2.00	26.99	Pass	16	16
11a	6Mbps	1	64	5320	0.13	0.13	14.01	14.38		23.96	23.93	1.00	2.00	26.99	Pass	16	16
HT20	MCS0	1	52	5260	0.14	0.14	13.81	14.24		23.98	23.98	1.00	2.00	26.99	Pass	16	16
HT20	MCS0	1	60	5300	0.14	0.14	13.83	14.27		23.98	23.98	1.00	2.00	26.99	Pass	16	16
HT20	MCS0	1	64	5320	0.14	0.14	13.84	14.21		23.98	23.98	1.00	2.00	26.99	Pass	16	16
HT40	MCS0	1	54	5270	0.28	0.28	13.98	14.29		23.98	23.98	1.00	2.00	26.99	Pass	16	16
HT40	MCS0	1	62	5310	0.28	0.28	14.03	14.24		23.98	23.98	1.00	2.00	26.99	Pass	16	16
VHT20	MCS0	1	52	5260	0.14	0.14	13.85	14.27		23.98	23.98	1.00	2.00	26.99	Pass	16	16
VHT20	MCS0	1	60	5300	0.14	0.14	13.89	14.35		23.98	23.98	1.00	2.00	26.99	Pass	16	16
VHT20	MCS0	1	64	5320	0.14	0.14	13.92	14.26		23.98	23.98	1.00	2.00	26.99	Pass	16	16
VHT40	MCS0	1	54	5270	0.28	0.28	13.99	14.39		23.98	23.98	1.00	2.00	26.99	Pass	16	16
VHT40	MCS0	1	62	5310	0.28	0.28	14.07	14.38		23.98	23.98	1.00	2.00	26.99	Pass	16	16
VHT80	MCS0	1	58	5290	0.55	0.55	11.60	12.18		23.98	23.98	1.00	2.00	26.99	Pass	14	14

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	0.13	0.13	13.89	14.44		23.96	23.94	2.00	3.00	26.99	Pass
11a	6Mbps	1	116	5580	0.13	0.13	13.97	14.47		23.94	23.93	2.00	3.00	26.99	Pass
11a	6Mbps	1	140	5700	0.13	0.13	14.01	14.41		23.94	23.94	2.00	3.00	26.99	Pass
HT20	MCS0	1	100	5500	0.14	0.14	13.72	14.41		23.98	23.98	2.00	3.00	26.99	Pass
HT20	MCS0	1	116	5580	0.14	0.14	13.78	14.33		23.98	23.98	2.00	3.00	26.99	Pass
HT20	MCS0	1	140	5700	0.14	0.14	12.66	14.30		23.98	23.98	2.00	3.00	26.99	Pass
HT40	MCS0	1	102	5510	0.28	0.28	13.88	14.36		23.98	23.98	2.00	3.00	26.99	Pass
HT40	MCS0	1	110	5550	0.28	0.28	13.89	14.29		23.98	23.98	2.00	3.00	26.99	Pass
HT40	MCS0	1	134	5670	0.28	0.28	13.98	14.33		23.98	23.98	2.00	3.00	26.99	Pass
VHT20	MCS0	1	100	5500	0.14	0.14	13.80	14.48		23.98	23.98	2.00	3.00	26.99	Pass
VHT20	MCS0	1	116	5580	0.14	0.14	13.83	14.35		23.98	23.98	2.00	3.00	26.99	Pass
VHT20	MCS0	1	140	5700	0.14	0.14	12.79	14.34		23.98	23.98	2.00	3.00	26.99	Pass
VHT40	MCS0	1	102	5510	0.28	0.28	13.96	14.43		23.98	23.98	2.00	3.00	26.99	Pass
VHT40	MCS0	1	110	5550	0.28	0.28	13.92	14.46		23.98	23.98	2.00	3.00	26.99	Pass
VHT40	MCS0	1	134	5670	0.28	0.28	14.05	14.37		23.98	23.98	2.00	3.00	26.99	Pass
VHT80	MCS0	1	106	5530	0.55	0.55	11.49	13.34		23.98	23.98	2.00	3.00	26.99	Pass
VHT80	MCS0	1	122	5610	0.55	0.55	13.73	14.24		23.98	23.98	2.00	3.00	26.99	Pass

Power Setting	
Ant 1	Ant 2
16	16
16	16
16	16
16	16
16	16
15	16
16	16
16	16
16	16
16	16
15	16
16	16
16	16
16	16
16	16
14	15
16	16

FCC U-NII-2C straddle channel single antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	144	5720	0.13	0.13	14.07	14.34		23.96	23.93	2.00	3.00	26.99	Pass
HT20	MCS0	1	144	5720	0.14	0.14	13.85	14.35		23.98	23.98	2.00	3.00	26.99	Pass
HT40	MCS0	1	142	5710	0.28	0.28	13.99	14.39		23.98	23.98	2.00	3.00	26.99	Pass
VHT20	MCS0	1	144	5720	0.14	0.14	13.92	14.44		23.98	23.98	2.00	3.00	26.99	Pass
VHT40	MCS0	1	142	5710	0.28	0.28	14.01	14.45		23.98	23.98	2.00	3.00	26.99	Pass
VHT80	MCS0	1	138	5690	0.55	0.55	13.78	14.26		23.98	23.98	2.00	3.00	26.99	Pass

Power Setting	
Ant 1	Ant 2
16	16
16	16
16	16
16	16
16	16
16	16

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting	
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		Ant 1	Ant 2
11a	6Mbps	1	149	5745	0.13	0.13	13.46	13.97		30.00	30.00	2.00	1.50	Pass	16	16
11a	6Mbps	1	157	5785	0.13	0.13	13.35	14.01		30.00	30.00	2.00	1.50	Pass	16	16
11a	6Mbps	1	165	5825	0.13	0.13	13.32	13.96		30.00	30.00	2.00	1.50	Pass	16	16
HT20	MCS0	1	149	5745	0.14	0.14	13.20	13.82		30.00	30.00	2.00	1.50	Pass	16	16
HT20	MCS0	1	157	5785	0.14	0.14	13.34	13.73		30.00	30.00	2.00	1.50	Pass	16	16
HT20	MCS0	1	165	5825	0.14	0.14	13.37	13.68		30.00	30.00	2.00	1.50	Pass	16	16
HT40	MCS0	1	151	5755	0.28	0.28	13.36	14.13		30.00	30.00	2.00	1.50	Pass	16	16
HT40	MCS0	1	159	5795	0.28	0.28	13.47	14.02		30.00	30.00	2.00	1.50	Pass	16	16
VHT20	MCS0	1	149	5745	0.14	0.14	13.33	13.87		30.00	30.00	2.00	1.50	Pass	16	16
VHT20	MCS0	1	157	5785	0.14	0.14	13.42	13.80		30.00	30.00	2.00	1.50	Pass	16	16
VHT20	MCS0	1	165	5825	0.14	0.14	13.45	13.82		30.00	30.00	2.00	1.50	Pass	16	16
VHT40	MCS0	1	151	5755	0.28	0.28	13.47	14.39		30.00	30.00	2.00	1.50	Pass	16	16
VHT40	MCS0	1	159	5795	0.28	0.28	13.53	14.27		30.00	30.00	2.00	1.50	Pass	16	16
VHT80	MCS0	1	155	5775	0.55	0.55	13.51	13.75		30.00	30.00	2.00	1.50	Pass	16	16



Emission Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict	
11A	Ant1	5180	19.64	5170.12	5189.76	---	---	
	Ant2	5180	19.60	5170.24	5189.84	---	---	
	Ant1	5220	19.64	5210.08	5229.72	---	---	
	Ant2	5220	19.64	5210.16	5229.80	---	---	
	Ant1	5240	19.64	5230.16	5249.80	---	---	
	Ant2	5240	19.80	5230.08	5249.88	---	---	
	Ant1	5260	19.72	5250.20	5269.92	---	---	
	Ant2	5260	19.84	5250.08	5269.92	---	---	
	Ant1	5300	19.60	5290.16	5309.76	---	---	
	Ant2	5300	19.56	5290.16	5309.72	---	---	
	Ant1	5320	19.88	5310.12	5330.00	---	---	
	Ant2	5320	19.84	5310.04	5329.88	---	---	
	Ant1	5500	19.56	5490.24	5509.80	---	---	
	Ant2	5500	19.44	5490.32	5509.76	---	---	
	Ant1	5580	19.56	5570.24	5589.80	---	---	
	Ant2	5580	19.76	5570.16	5589.92	---	---	
	Ant1	5700	19.60	5690.20	5709.80	---	---	
	Ant2	5700	19.56	5690.24	5709.80	---	---	
	Ant1	5720_UNII-2C	14.96	5710.04	5725	---	---	
	Ant1	5720_UNII-3	4.88	5725	5729.88	---	---	
	Ant2	5720_UNII-2C	14.84	5710.16	5725	---	---	
	Ant2	5720_UNII-3	4.64	5725	5729.64	---	---	
	Ant1	5745	19.68	5735.12	5754.80	---	---	
	Ant2	5745	19.56	5735.16	5754.72	---	---	
	Ant1	5785	19.52	5775.20	5794.72	---	---	
	Ant2	5785	19.84	5775.00	5794.84	---	---	
	Ant1	5825	19.92	5815.00	5834.92	---	---	
	Ant2	5825	19.68	5815.20	5834.88	---	---	
	11AC20SISO	Ant1	5180	20.04	5170.08	5190.12	---	---
		Ant2	5180	20.08	5169.96	5190.04	---	---
Ant1		5220	20.12	5209.88	5230.00	---	---	
Ant2		5220	20.12	5209.88	5230.00	---	---	
Ant1		5240	19.92	5230.00	5249.92	---	---	
Ant2		5240	20.08	5229.96	5250.04	---	---	
Ant1		5260	20.32	5249.84	5270.16	---	---	
Ant2		5260	19.92	5250.00	5269.92	---	---	
Ant1		5300	20.04	5289.92	5309.96	---	---	
Ant2		5300	19.96	5290.04	5310.00	---	---	
Ant1		5320	20.00	5310.00	5330.00	---	---	
Ant2		5320	19.92	5310.08	5330.00	---	---	
Ant1		5500	20.08	5490.00	5510.08	---	---	
Ant2		5500	20.04	5490.00	5510.04	---	---	
Ant1		5580	20.24	5569.88	5590.12	---	---	



	Ant2	5580	19.92	5570.04	5589.96	---	---
	Ant1	5700	19.80	5690.12	5709.92	---	---
	Ant2	5700	20.12	5690.00	5710.12	---	---
	Ant1	5720_UNII-2C	14.96	5710.04	5725	---	---
	Ant1	5720_UNII-3	4.96	5725	5729.96	---	---
	Ant2	5720_UNII-2C	15	5710.00	5725	---	---
	Ant2	5720_UNII-3	5	5725	5730.00	---	---
	Ant1	5745	19.96	5735.08	5755.04	---	---
	Ant2	5745	20.00	5735.04	5755.04	---	---
	Ant1	5785	19.76	5775.04	5794.80	---	---
	Ant2	5785	19.80	5775.08	5794.88	---	---
	Ant1	5825	20.04	5814.96	5835.00	---	---
	Ant2	5825	19.92	5815.04	5834.96	---	---
	11AC40SISO	Ant1	5190	40.64	5169.68	5210.32	---
Ant2		5190	40.72	5169.68	5210.40	---	---
Ant1		5230	40.80	5209.60	5250.40	---	---
Ant2		5230	40.72	5209.68	5250.40	---	---
Ant1		5270	40.64	5249.60	5290.24	---	---
Ant2		5270	40.96	5249.60	5290.56	---	---
Ant1		5310	41.04	5289.44	5330.48	---	---
Ant2		5310	40.80	5289.60	5330.40	---	---
Ant1		5510	41.04	5489.52	5530.56	---	---
Ant2		5510	40.96	5489.60	5530.56	---	---
Ant1		5550	40.96	5529.52	5570.48	---	---
Ant2		5550	40.88	5529.76	5570.64	---	---
Ant1		5670	40.96	5649.68	5690.64	---	---
Ant2		5670	40.56	5649.84	5690.40	---	---
Ant1		5710_UNII-2C	35.4	5689.60	5725	---	---
Ant1		5710_UNII-3	5.48	5725	5730.48	---	---
Ant2		5710_UNII-2C	35.4	5689.60	5725	---	---
Ant2		5710_UNII-3	5.4	5725	5730.40	---	---
Ant1		5755	40.48	5734.76	5775.24	---	---
Ant2		5755	40.64	5734.76	5775.40	---	---
Ant1	5795	40.88	5774.44	5815.32	---	---	
Ant2	5795	40.80	5774.60	5815.40	---	---	
11AC80SISO	Ant1	5210	81.44	5169.36	5250.80	---	---
	Ant2	5210	81.12	5169.68	5250.80	---	---
	Ant1	5290	81.44	5249.36	5330.80	---	---
	Ant2	5290	81.12	5249.36	5330.48	---	---
	Ant1	5530	81.12	5489.52	5570.64	---	---
	Ant2	5530	80.96	5489.52	5570.48	---	---
	Ant1	5610	81.12	5569.52	5650.64	---	---
	Ant2	5610	81.12	5569.52	5650.64	---	---
	Ant1	5690_UNII-2C	75.48	5649.52	5725	---	---
	Ant1	5690_UNII-3	5.8	5725	5730.80	---	---
	Ant2	5690_UNII-2C	75.8	5649.20	5725	---	---
	Ant2	5690_UNII-3	5.8	5725	5730.80	---	---
	Ant1	5775	81.28	5734.36	5815.64	---	---
	Ant2	5775	80.96	5734.52	5815.48	---	---




Test Graphs

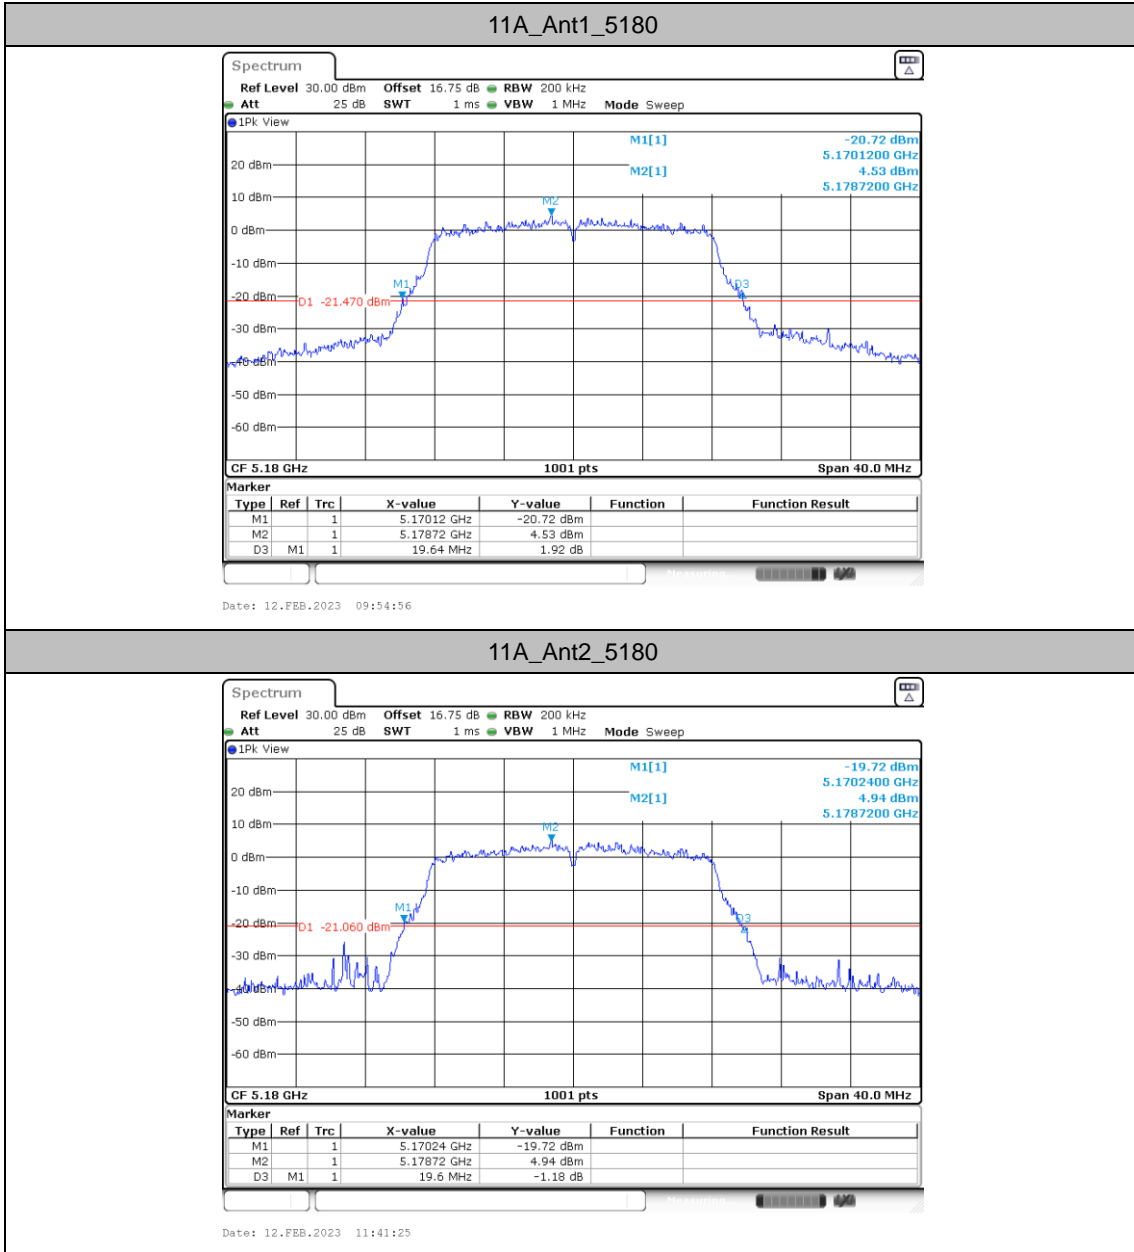




11A_Ant1_5220

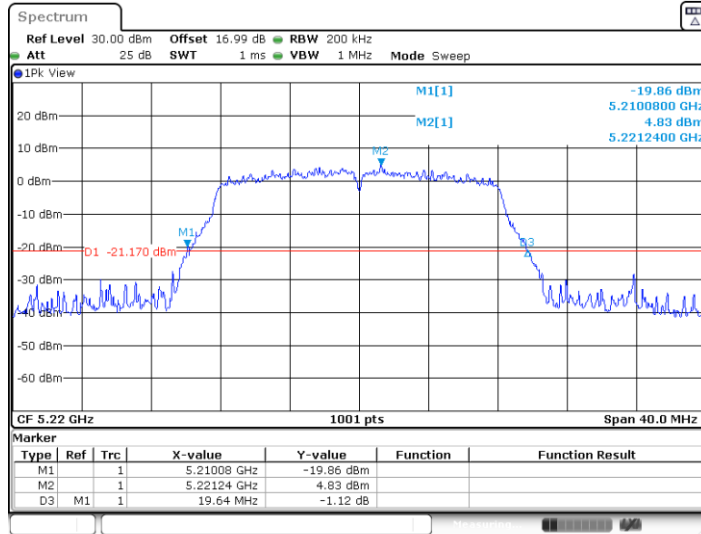

Date: 12.FEB.2023 09:56:23


11A_Ant2_5220

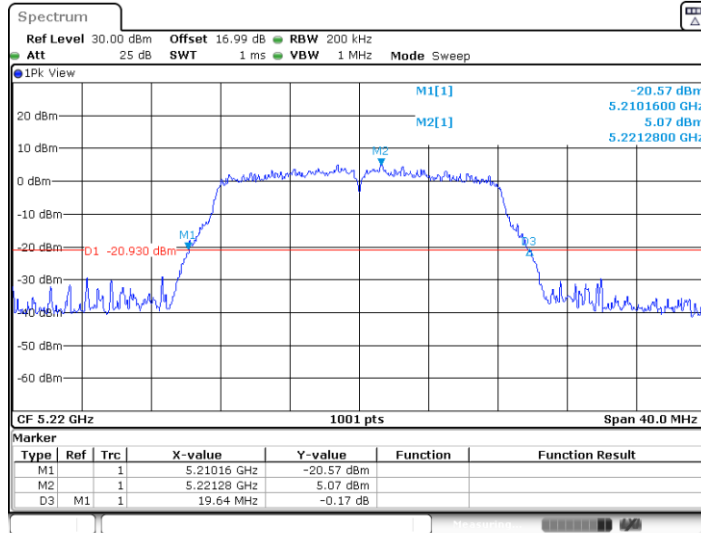


Date: 12.FEB.2023 11:42:28



11A_Ant1_5240

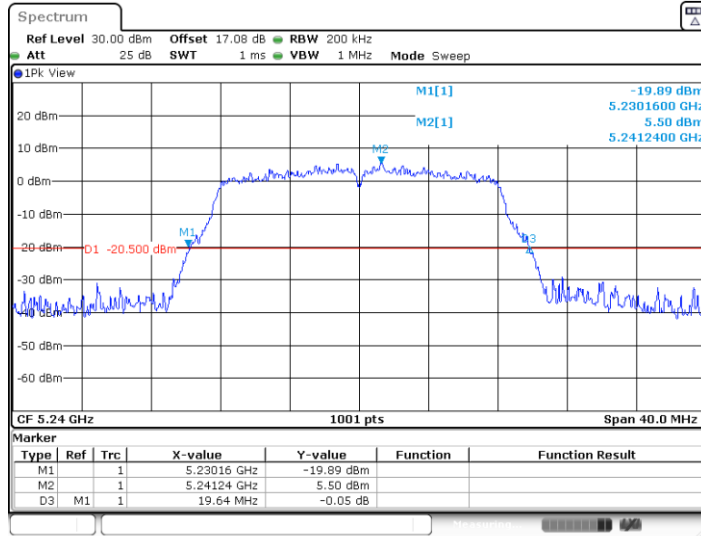


11A_Ant2_5240

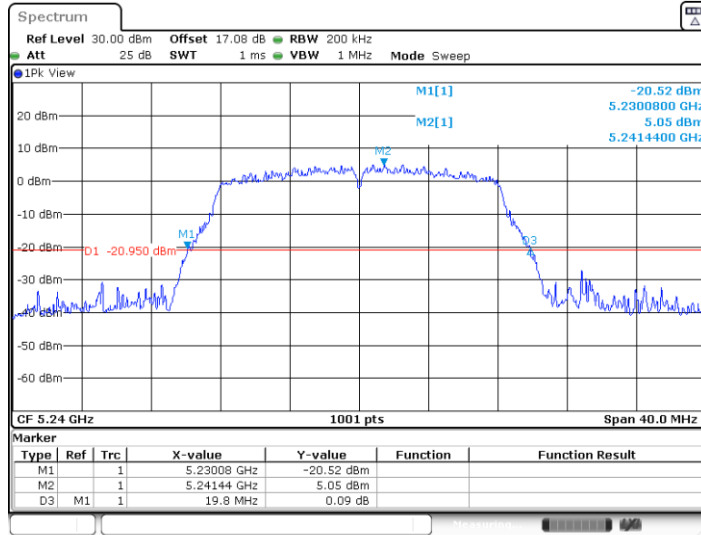




11A_Ant1_5260


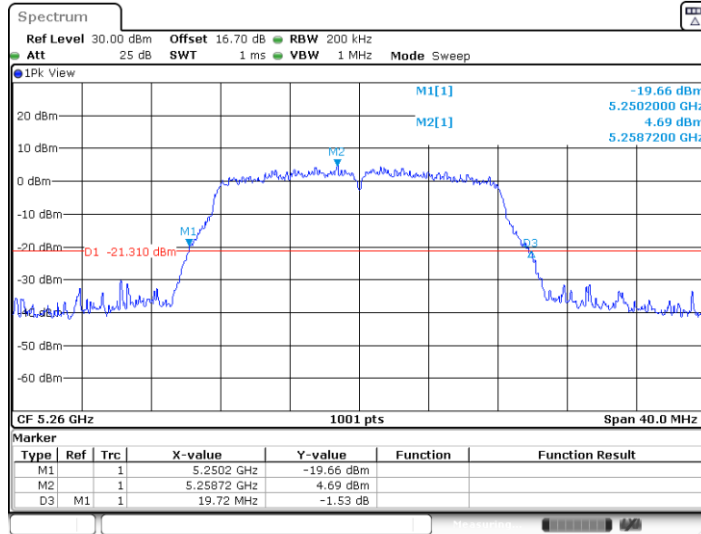


Date: 12.FEB.2023 10:13:25

11A_Ant2_5260

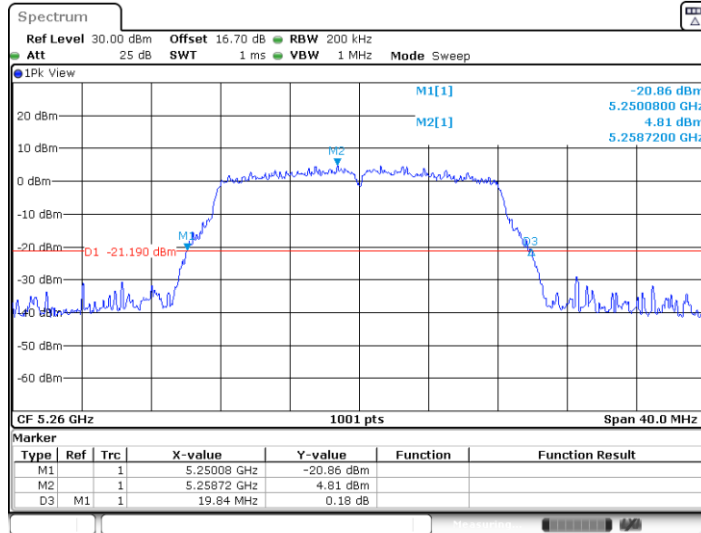


Date: 12.FEB.2023 11:49:08

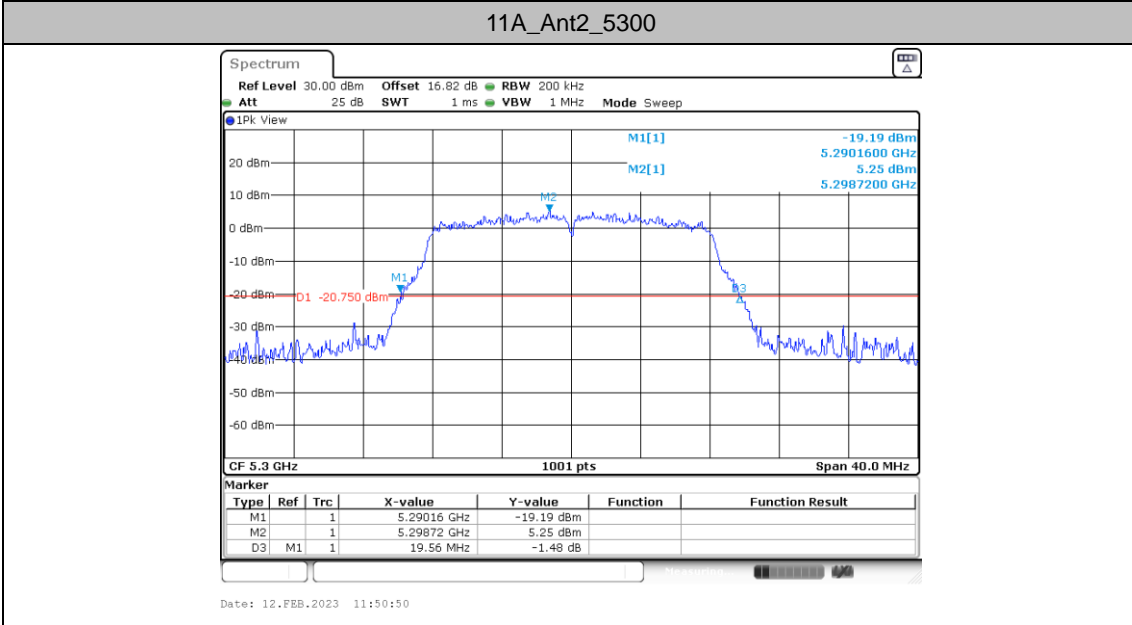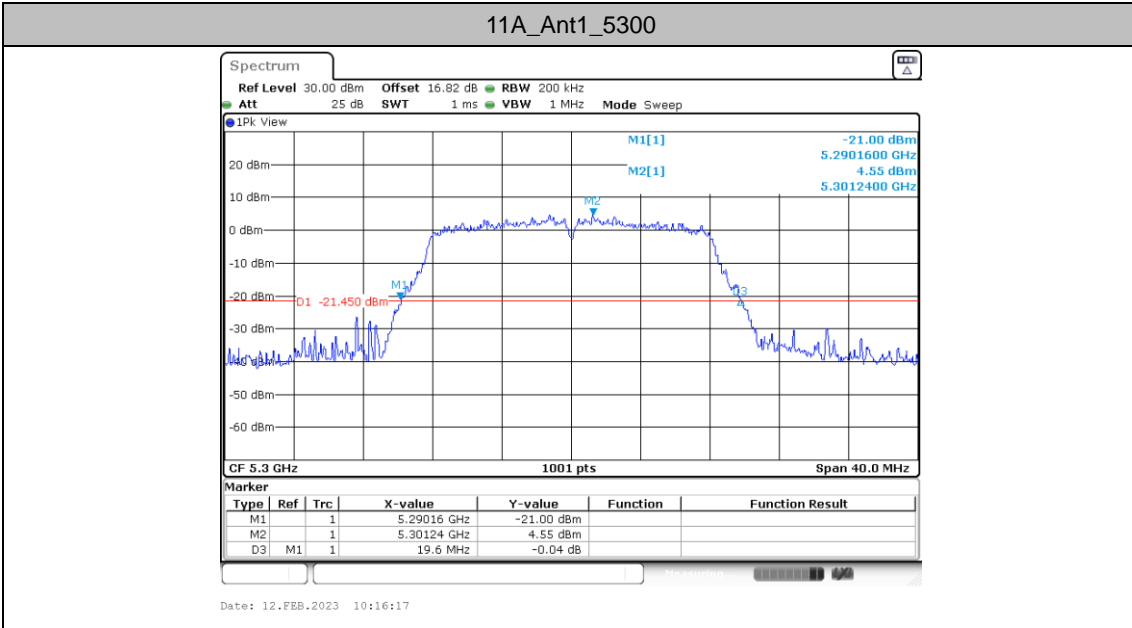




11A_Ant1_5320

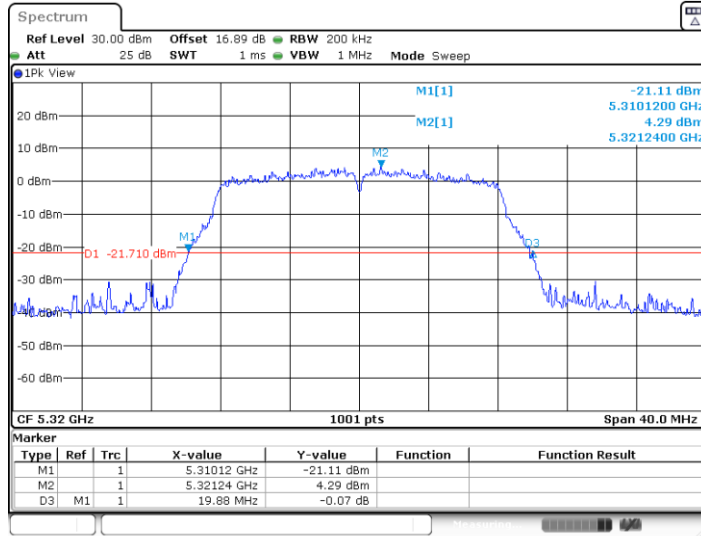

Date: 12.FEB.2023 10:20:22


11A_Ant2_5320

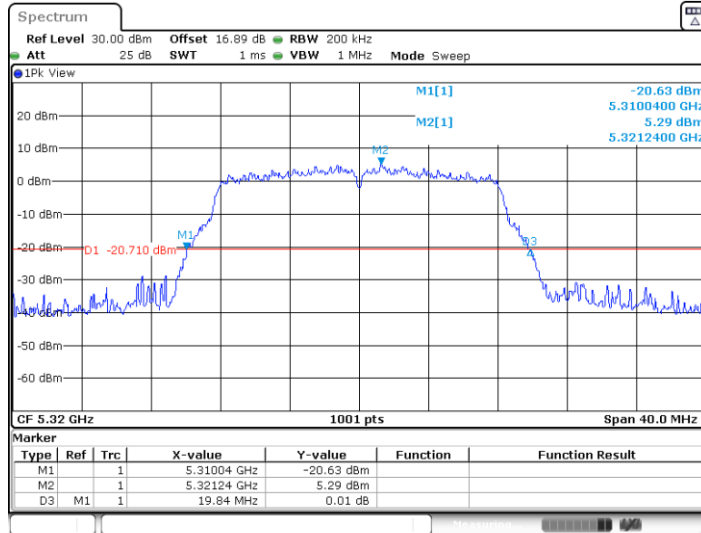

Date: 12.FEB.2023 11:52:12




11A_Ant1_5500

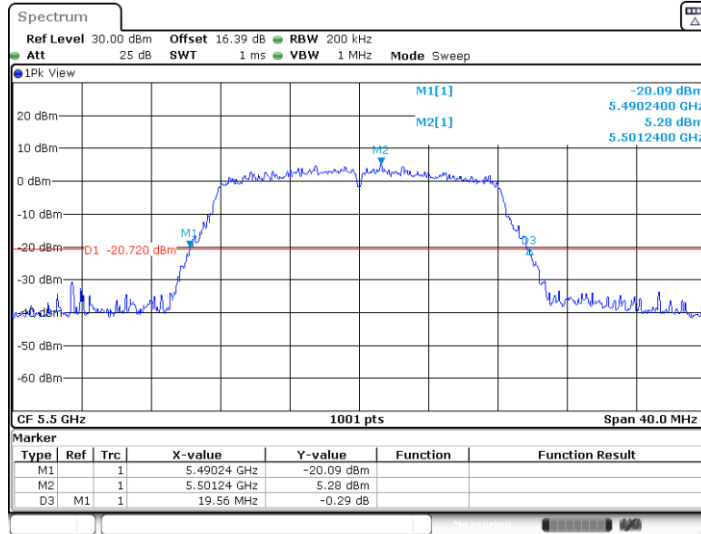

Date: 12.FEB.2023 10:30:08


11A_Ant2_5500

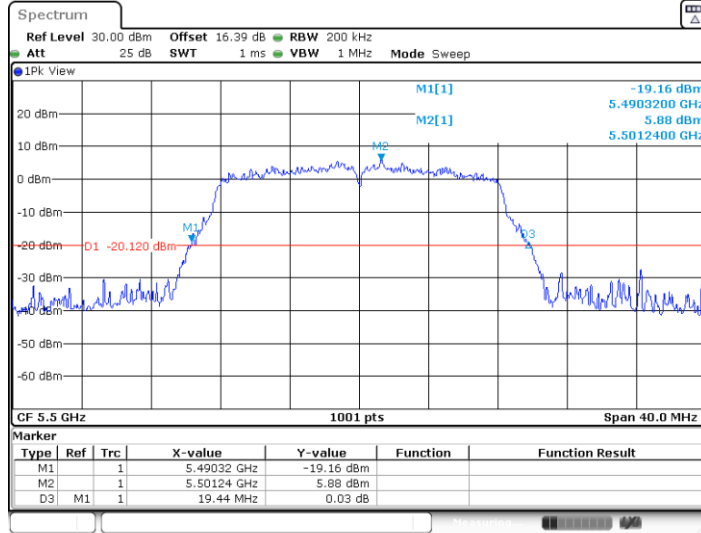

Date: 12.FEB.2023 11:53:30




11A_Ant1_5580

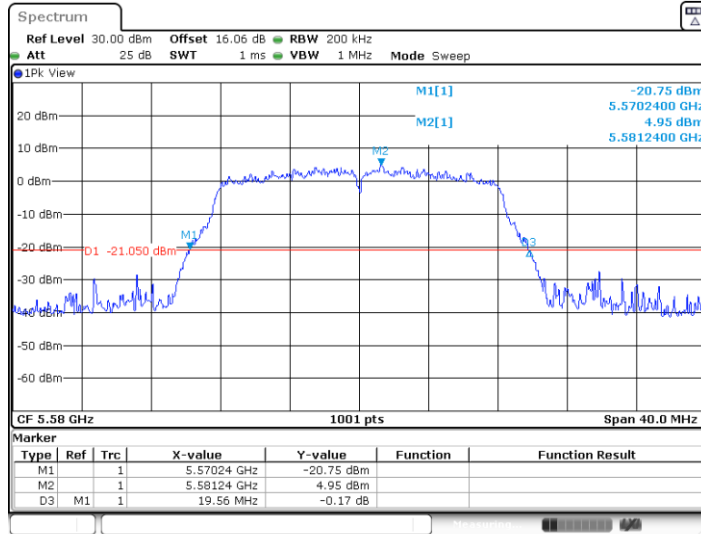

Date: 12.FEB.2023 10:32:42


11A_Ant2_5580

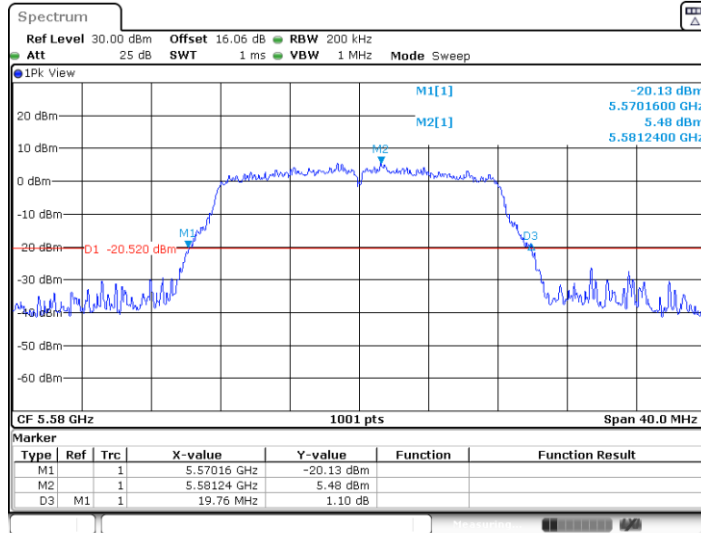

Date: 12.FEB.2023 11:54:44




11A_Ant1_5700


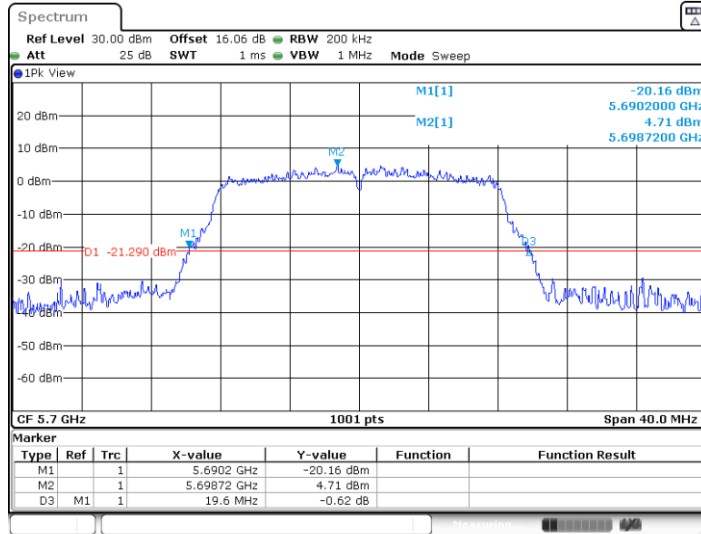


Date: 12.FEB.2023 10:34:01

11A_Ant2_5700

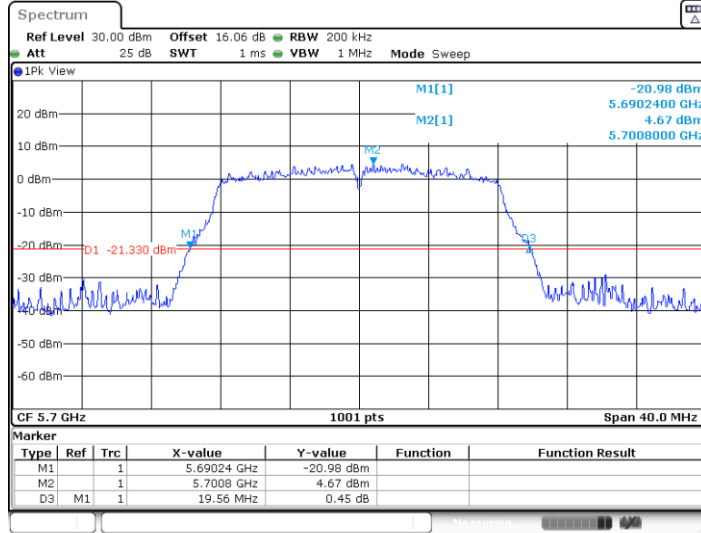


Date: 12.FEB.2023 11:56:19

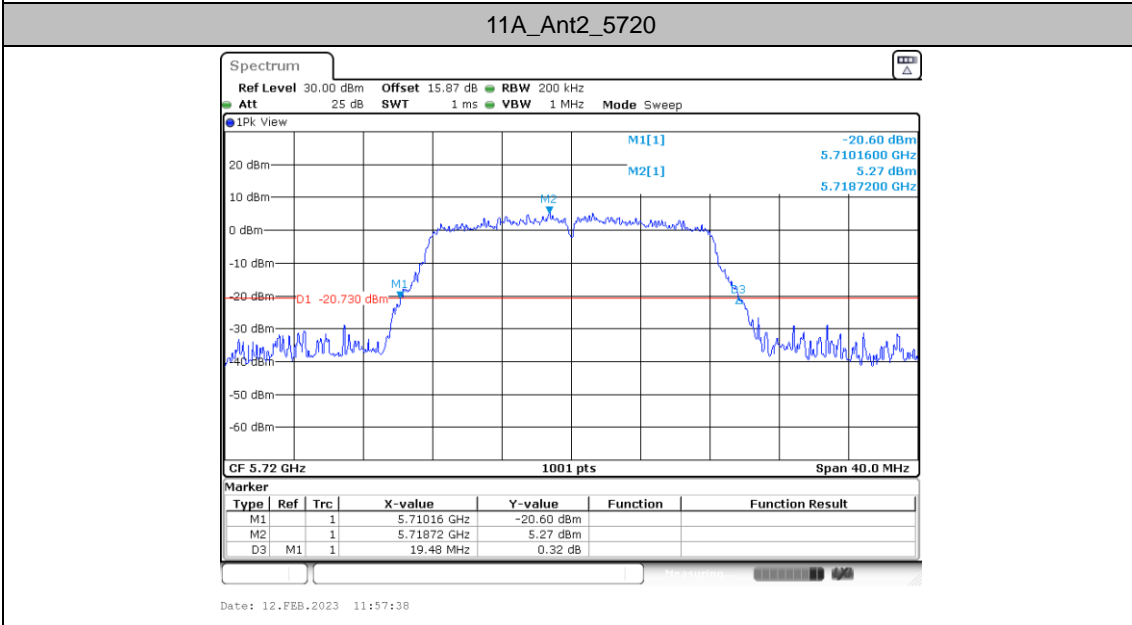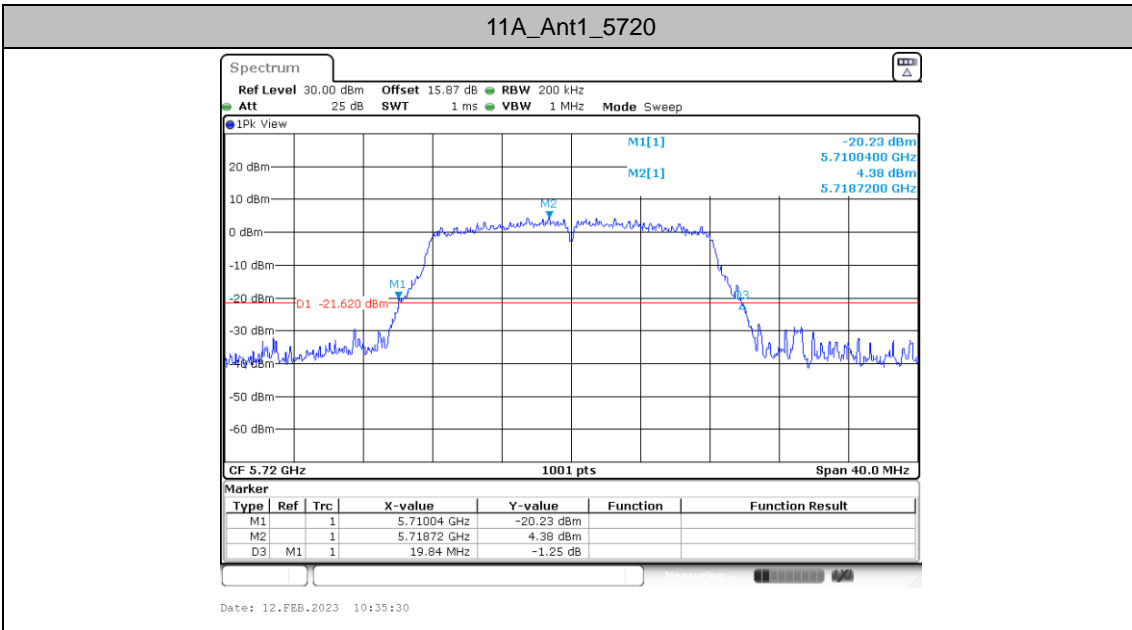




11A_Ant1_5745

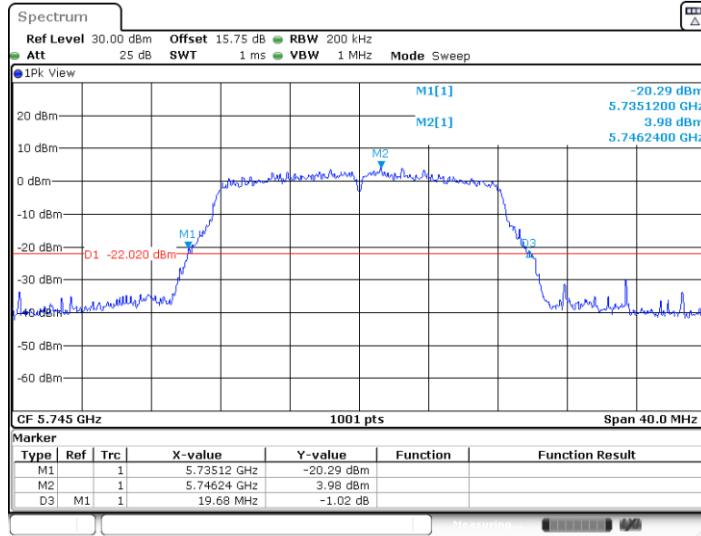

Date: 12.FEB.2023 10:37:12


11A_Ant2_5745

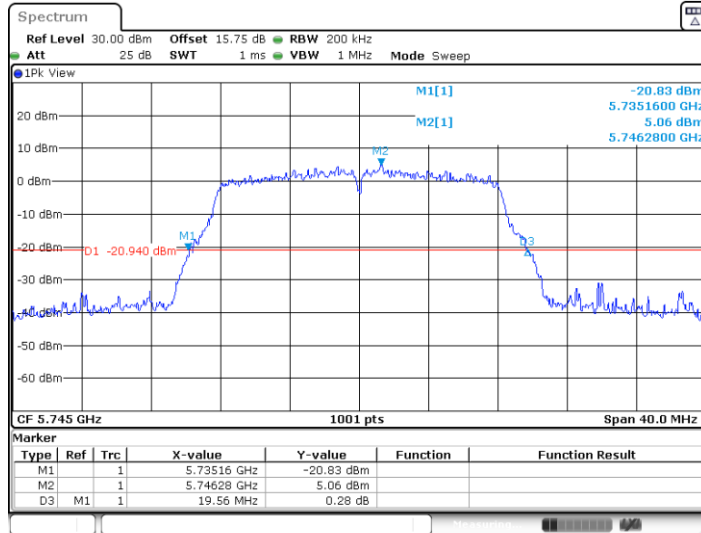


Date: 12.FEB.2023 11:59:03



11A_Ant1_5785

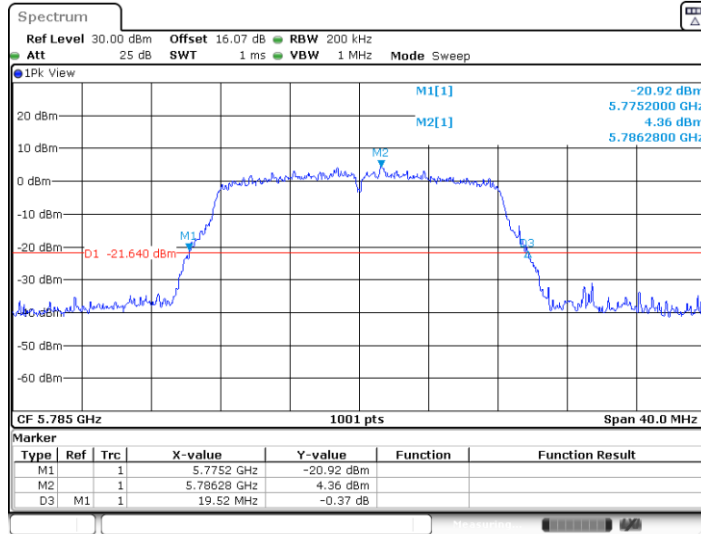


11A_Ant2_5785

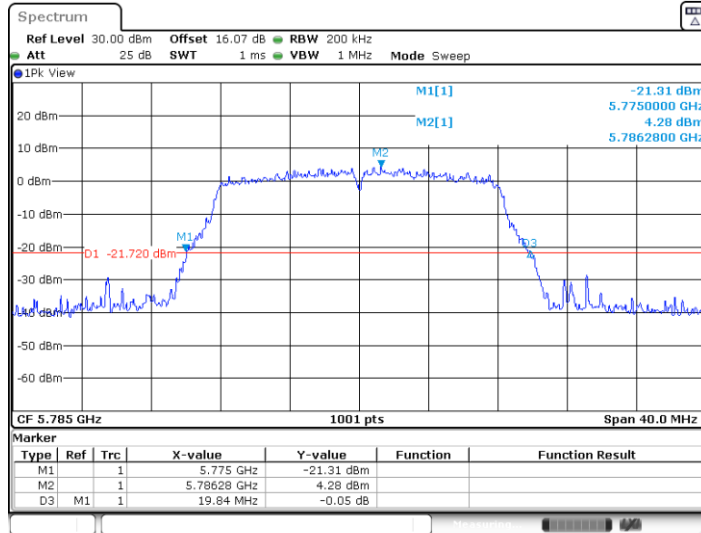




11A_Ant1_5825

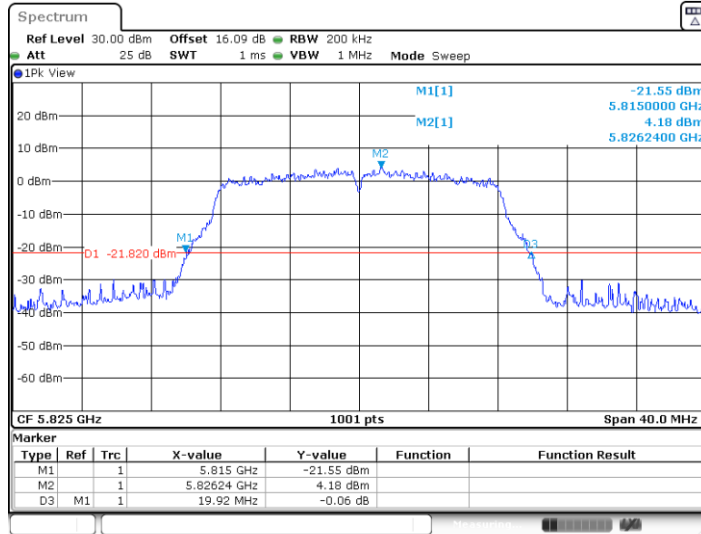

Date: 12.FEB.2023 10:40:39


11A_Ant2_5825

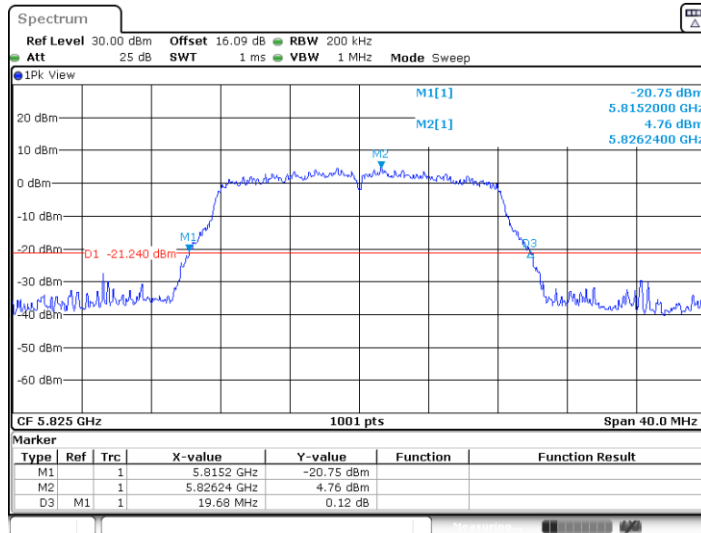

Date: 12.FEB.2023 12:02:08




11AC20SISO_Ant1_5180

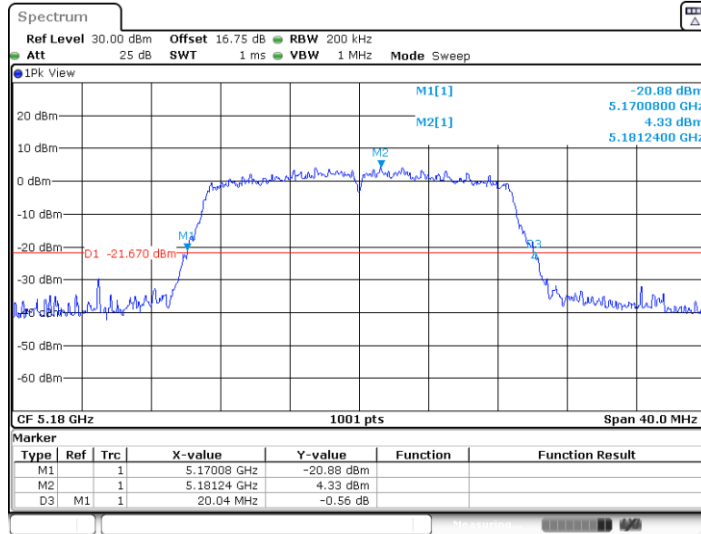

Date: 12.FEB.2023 10:43:18


11AC20SISO_Ant2_5180

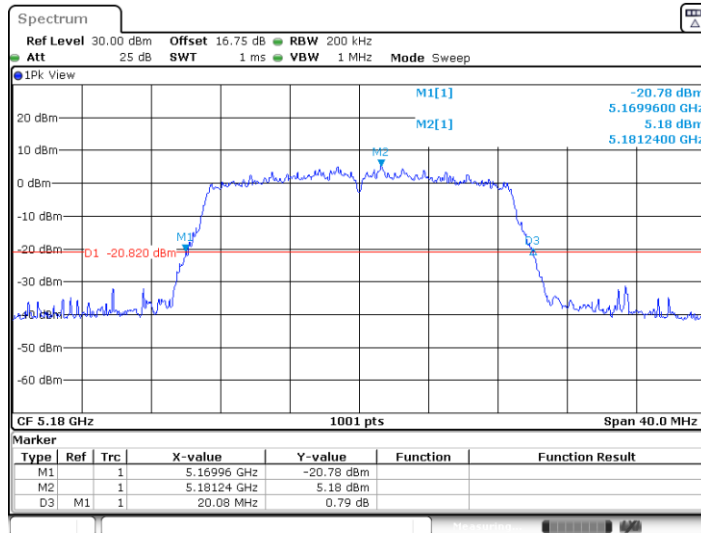


Date: 12.FEB.2023 12:04:19



11AC20SISO_Ant1_5220

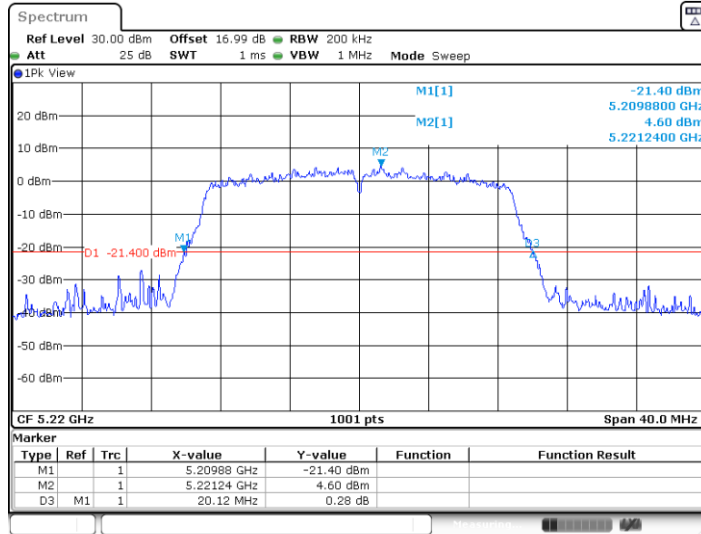


11AC20SISO_Ant2_5220

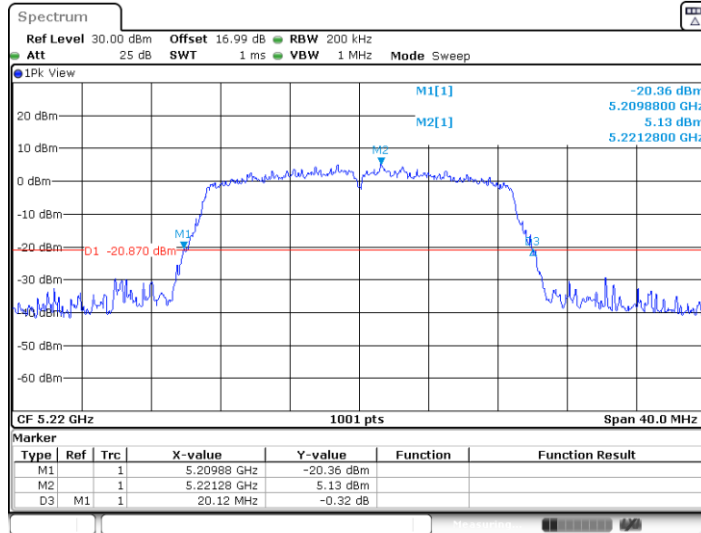




11AC20SISO_Ant1_5240

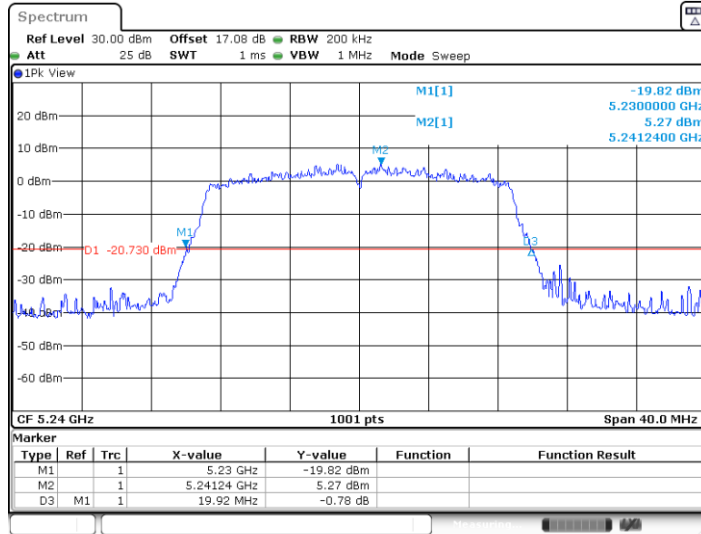

Date: 12.FEB.2023 10:46:02


11AC20SISO_Ant2_5240

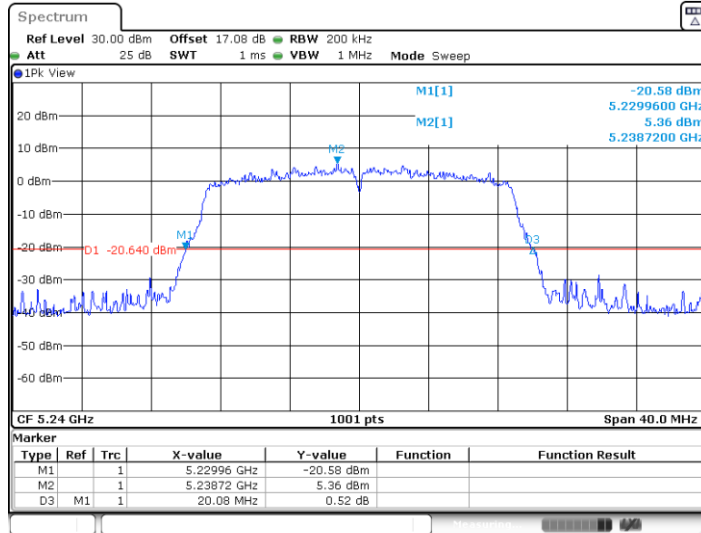

Date: 12.FEB.2023 12:07:00




11AC20SISO_Ant1_5260

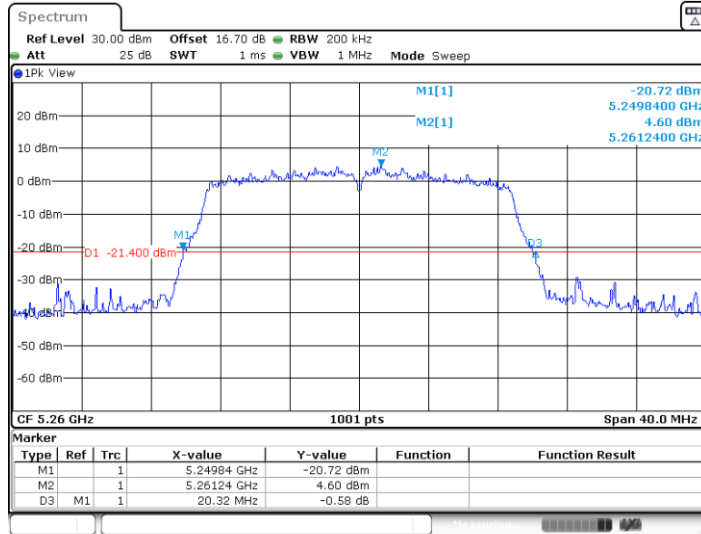

Date: 12.FEB.2023 10:47:17


11AC20SISO_Ant2_5260

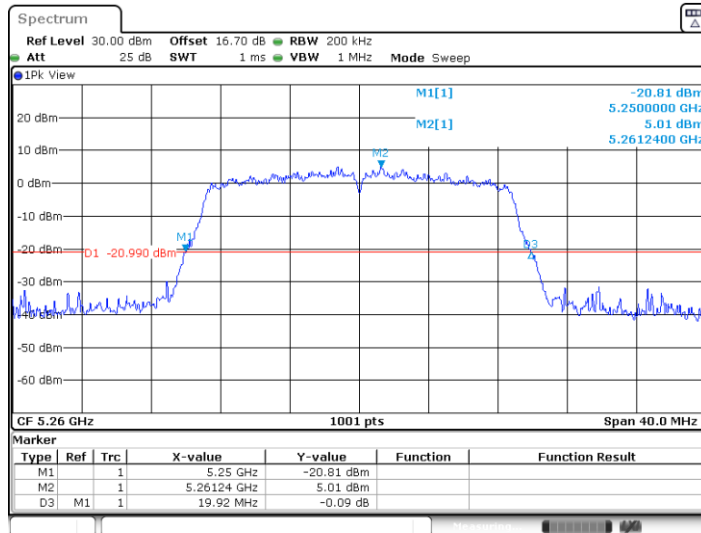

Date: 12.FEB.2023 12:08:21




11AC20SISO_Ant1_5300

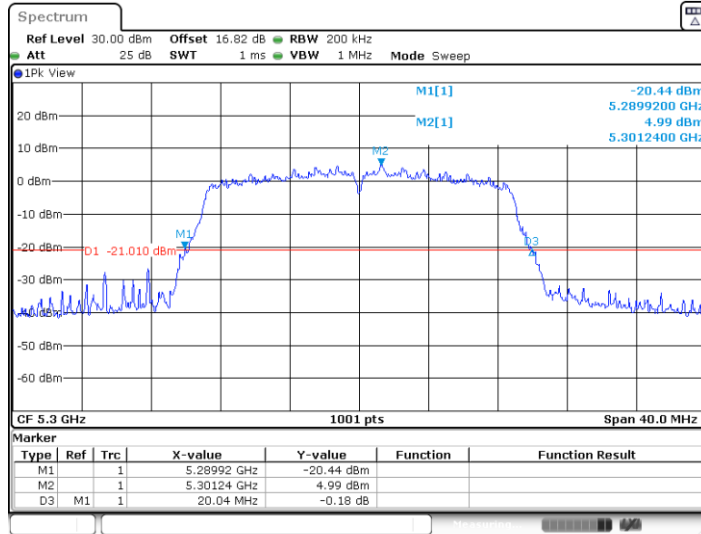

Date: 12.FEB.2023 10:48:50


11AC20SISO_Ant2_5300

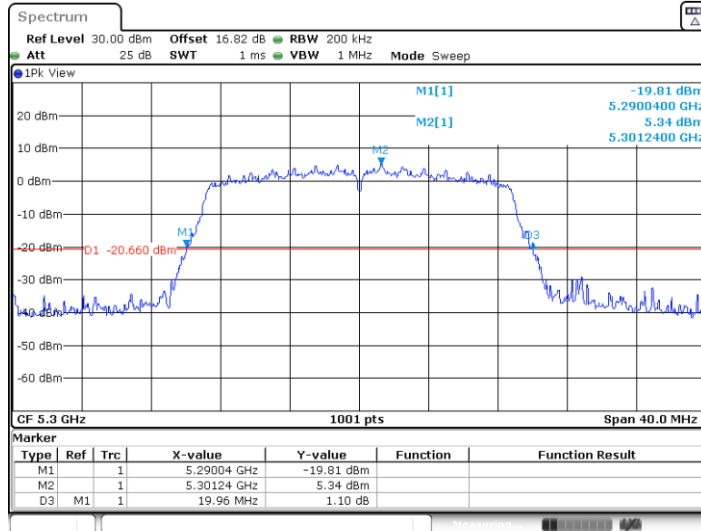


Date: 12.FEB.2023 12:09:51



11AC20SISO_Ant1_5320

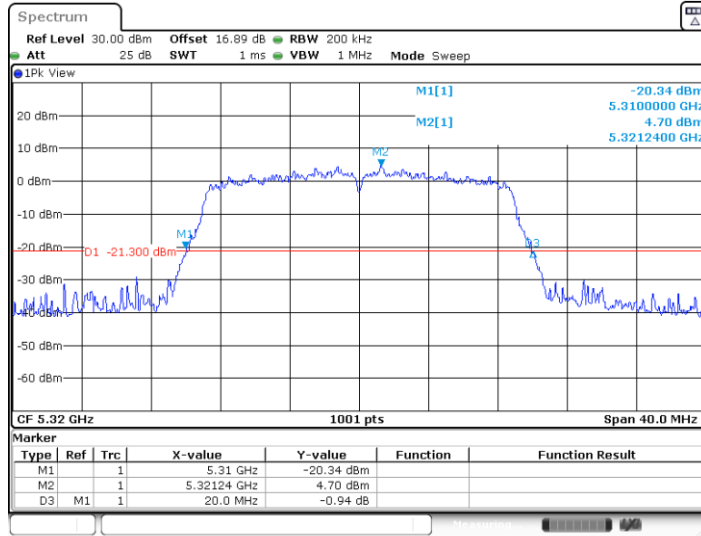


11AC20SISO_Ant2_5320

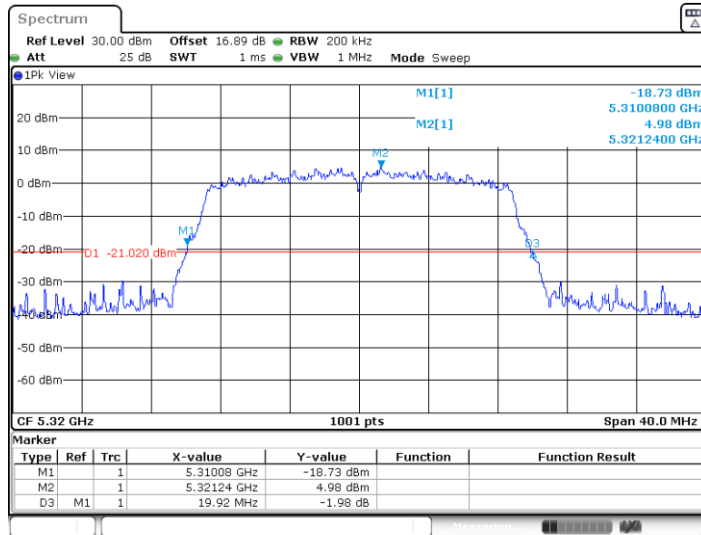




11AC20SISO_Ant1_5500

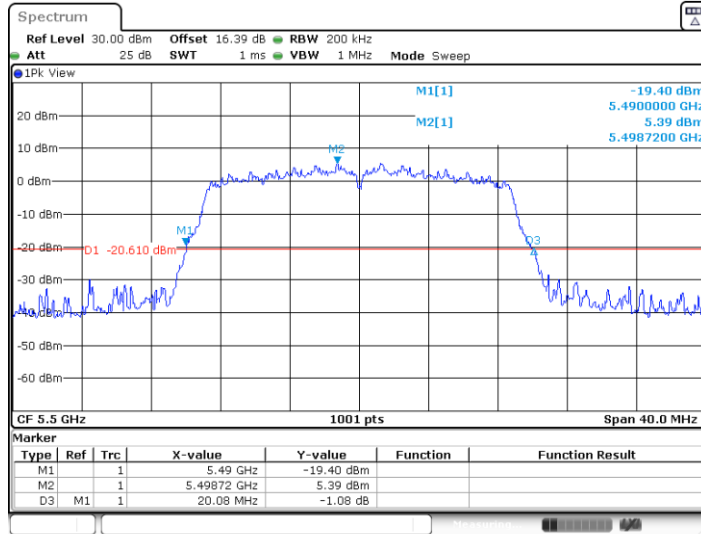

Date: 12.FEB.2023 10:51:36


11AC20SISO_Ant2_5500

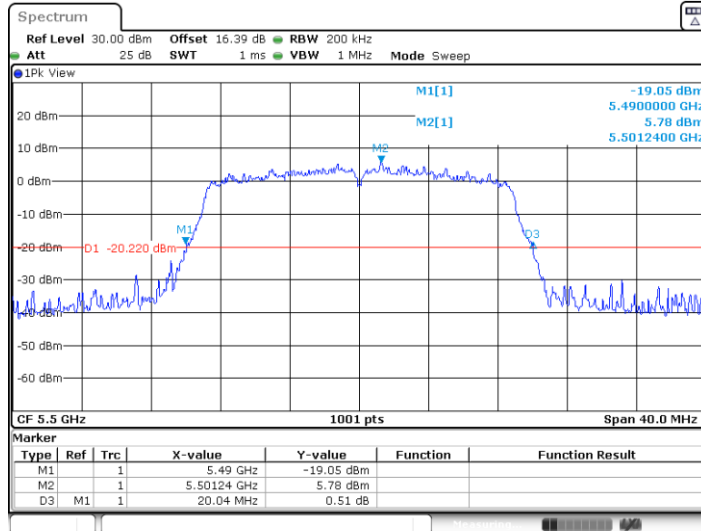

Date: 12.FEB.2023 12:12:39




11AC20SISO_Ant1_5580


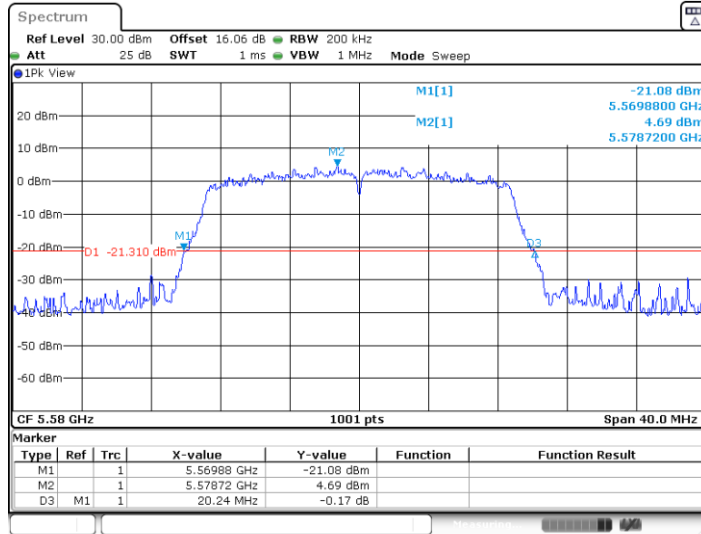


Date: 12.FEB.2023 10:53:00

11AC20SISO_Ant2_5580

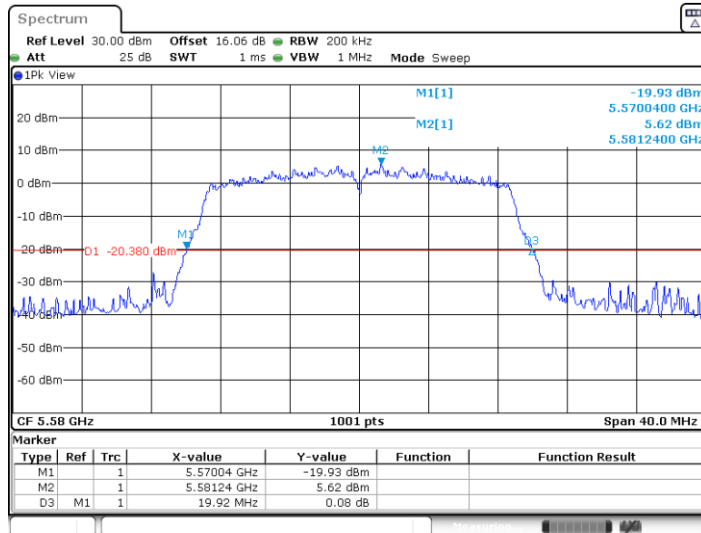


Date: 12.FEB.2023 12:13:56

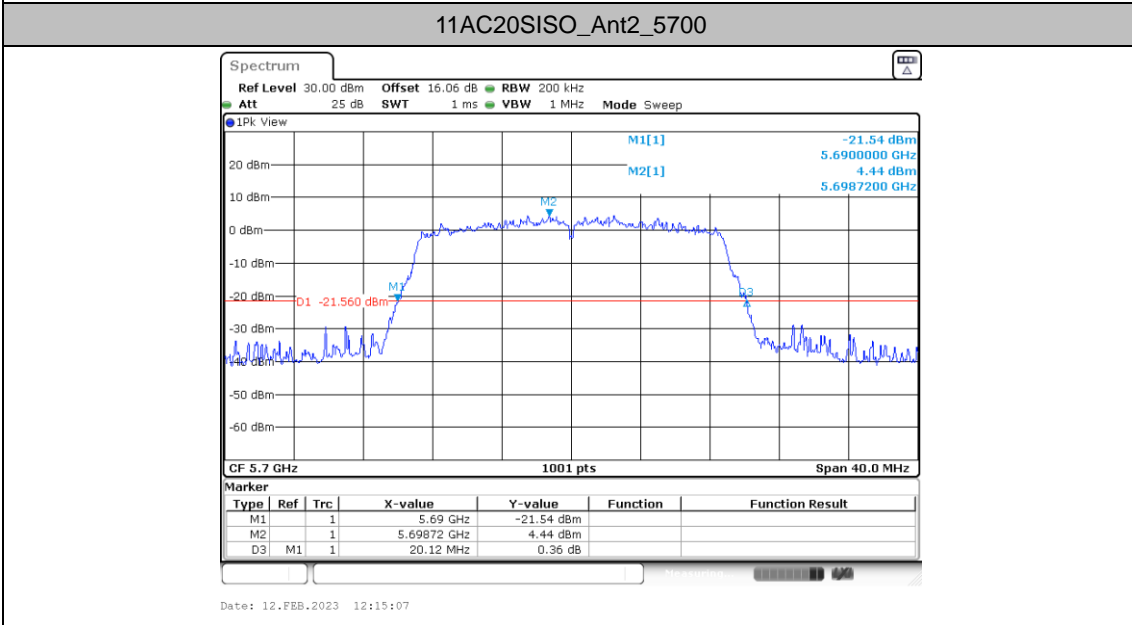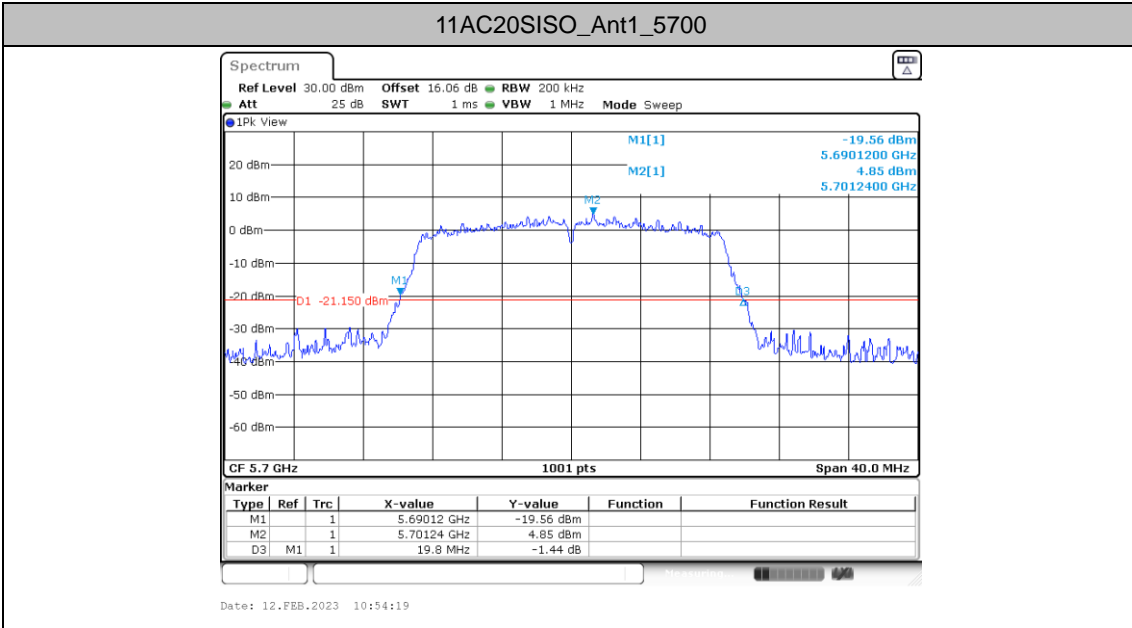




11AC20SISO_Ant1_5720

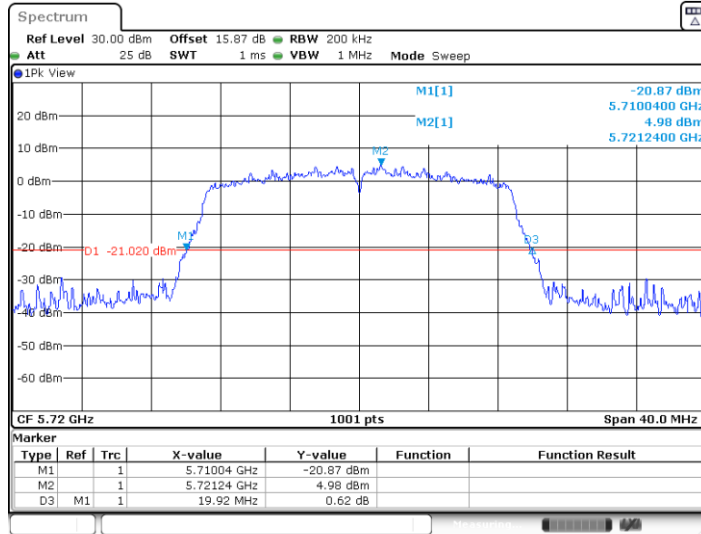

Date: 12.FEB.2023 10:56:01


11AC20SISO_Ant2_5720

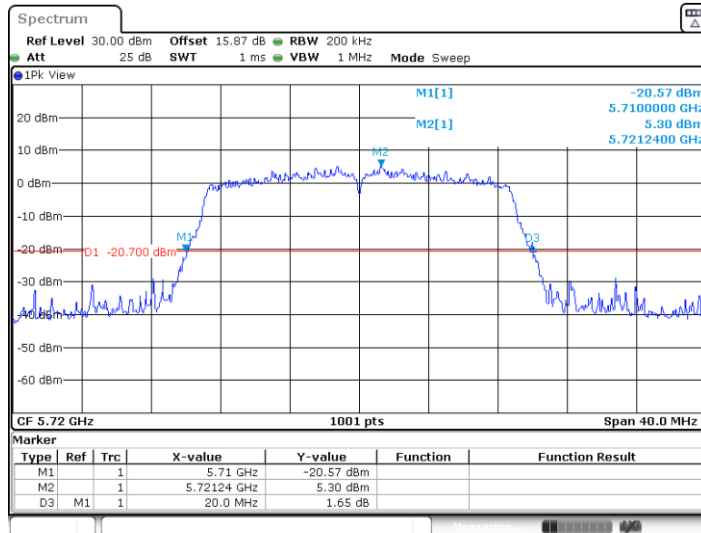

Date: 12.FEB.2023 12:16:27




11AC20SISO_Ant1_5745

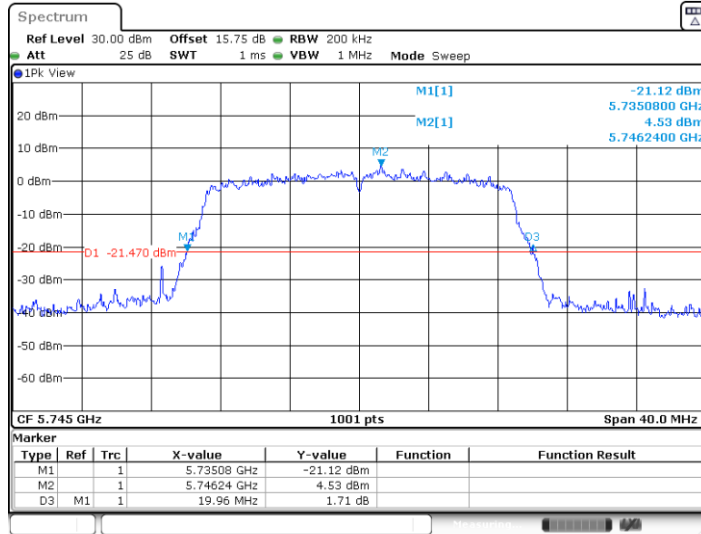

Date: 12.FEB.2023 10:57:26


11AC20SISO_Ant2_5745

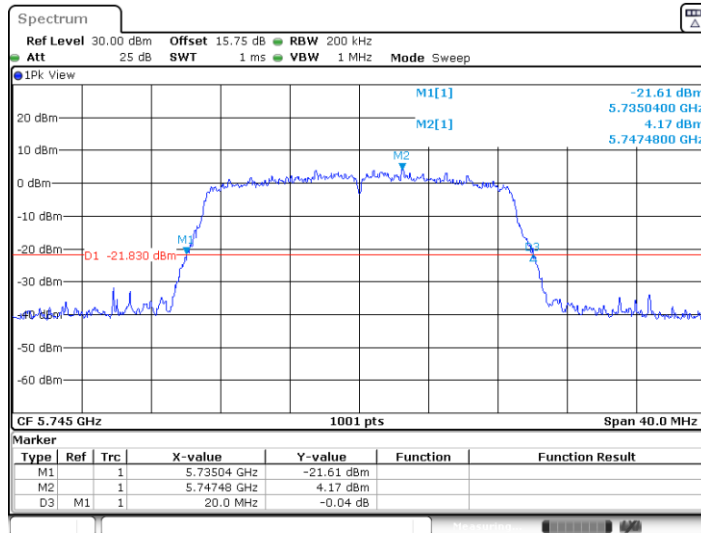

Date: 12.FEB.2023 12:18:11




11AC20SISO_Ant1_5785

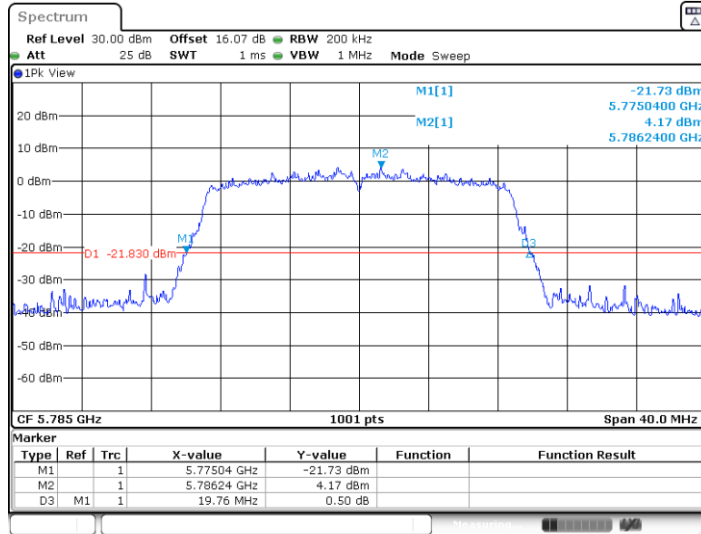

Date: 12.FEB.2023 11:01:37


11AC20SISO_Ant2_5785

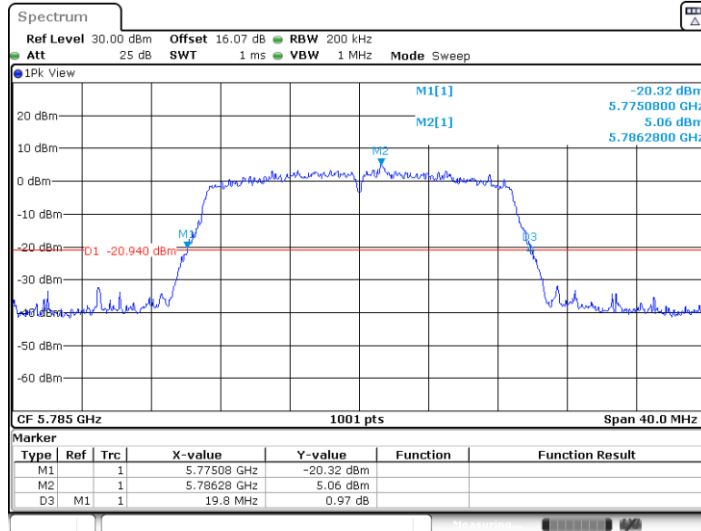

Date: 12.FEB.2023 12:19:45




11AC20SISO_Ant1_5825

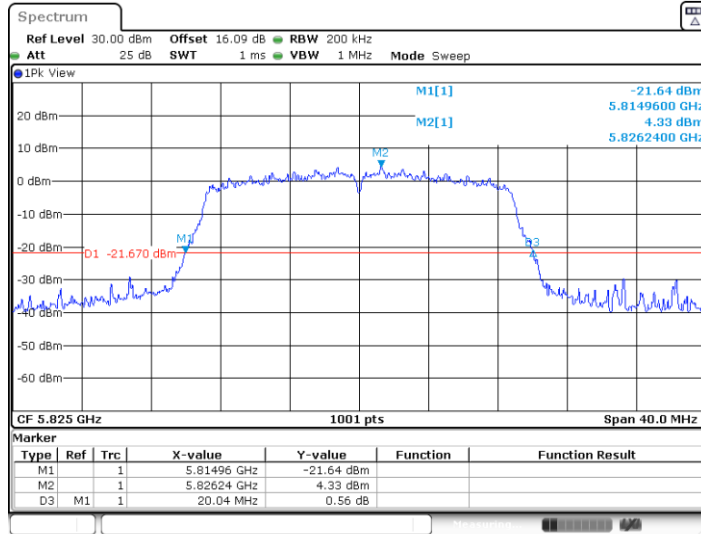

Date: 12.FEB.2023 11:02:59


11AC20SISO_Ant2_5825

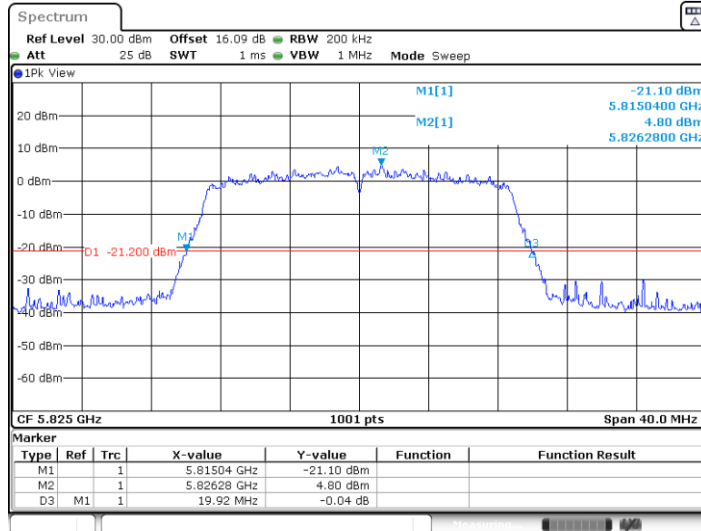

Date: 12.FEB.2023 12:21:18




11AC40SISO_Ant1_5190

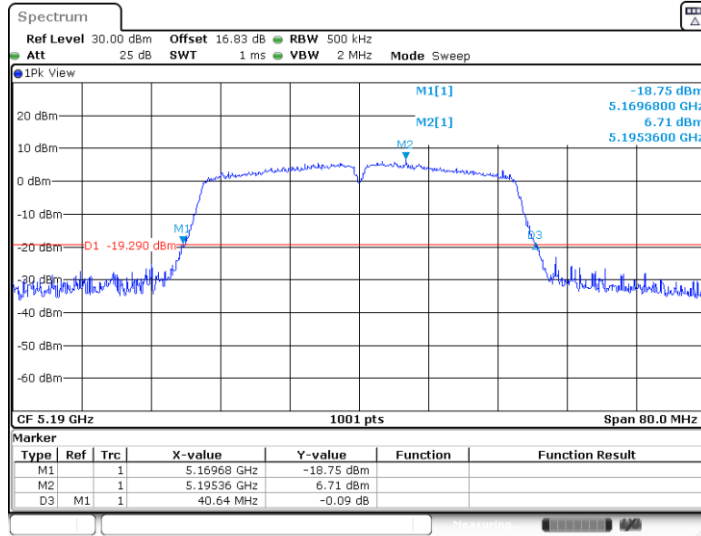

Date: 12.FEB.2023 11:04:32


11AC40SISO_Ant2_5190

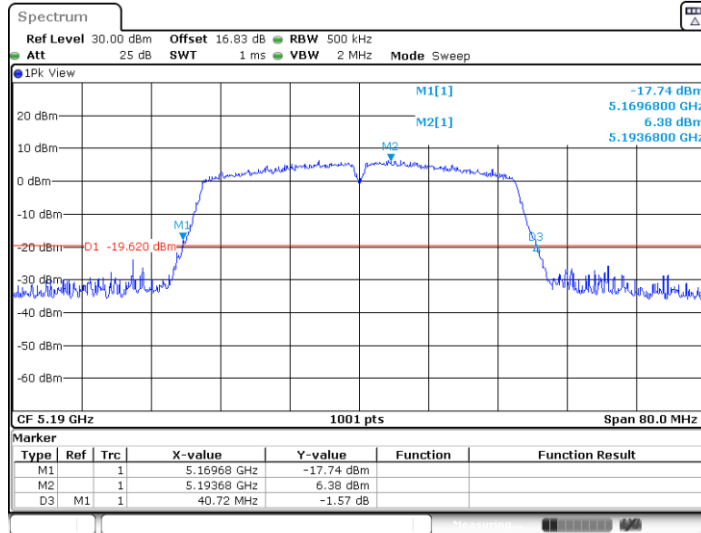

Date: 12.FEB.2023 12:22:58




11AC40SISO_Ant1_5230

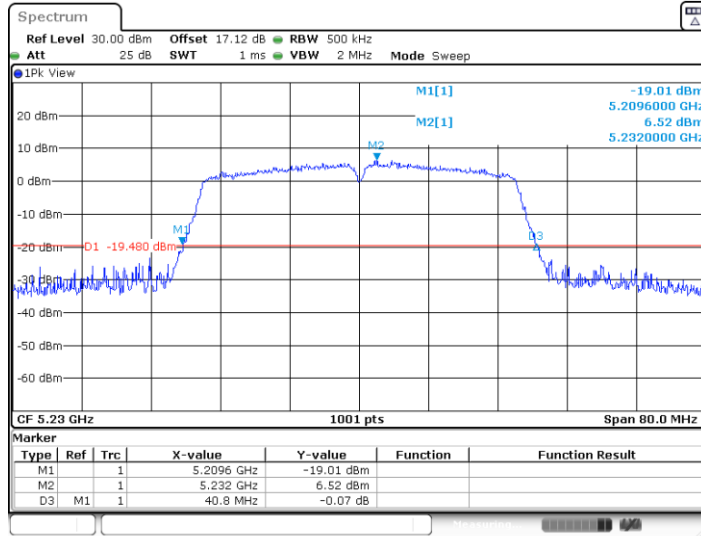

Date: 12.FEB.2023 11:05:52


11AC40SISO_Ant2_5230

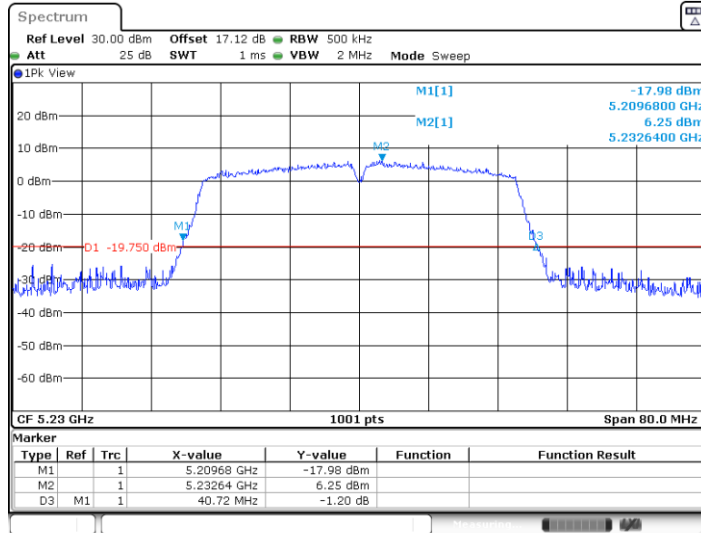

Date: 12.FEB.2023 12:24:25




11AC40SISO_Ant1_5270

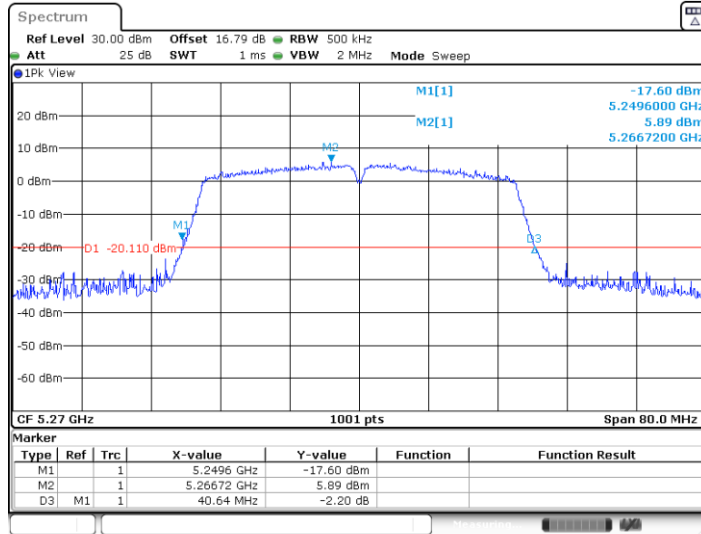

Date: 12.FEB.2023 11:07:15


11AC40SISO_Ant2_5270

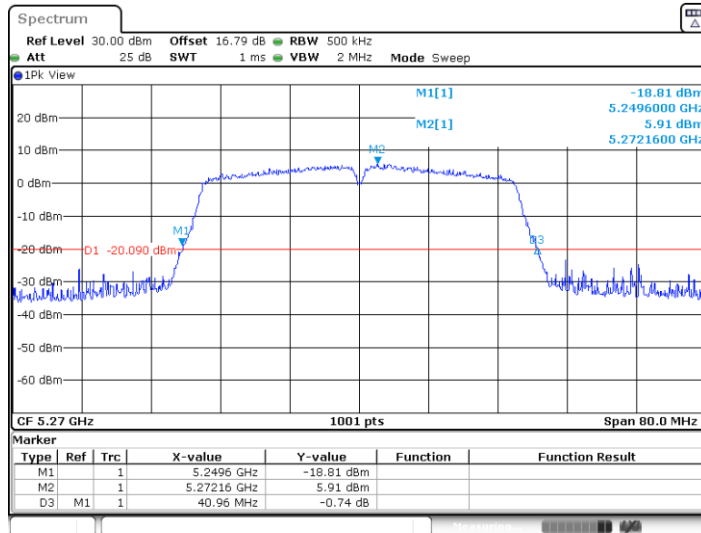

Date: 12.FEB.2023 12:25:46




11AC40SISO_Ant1_5310

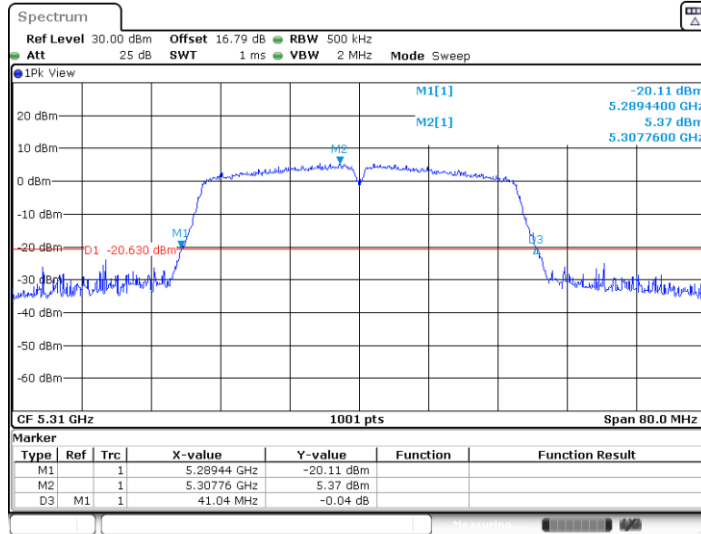

Date: 12.FEB.2023 11:08:35


11AC40SISO_Ant2_5310

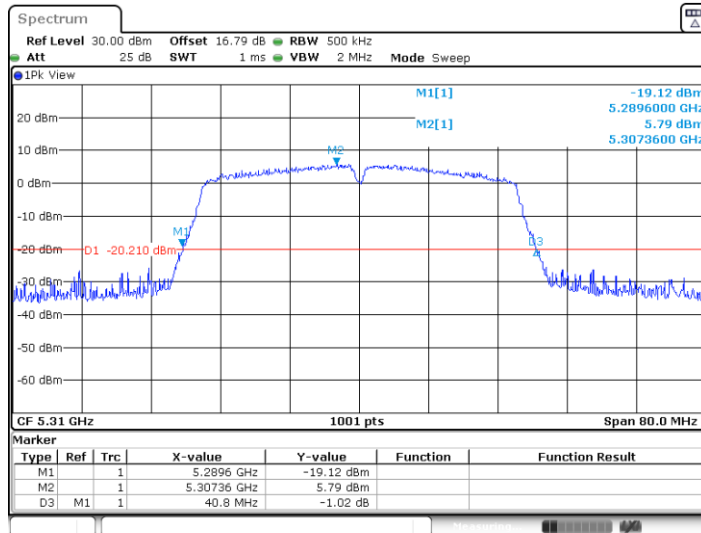


Date: 12.FEB.2023 12:27:04



11AC40SISO_Ant1_5510

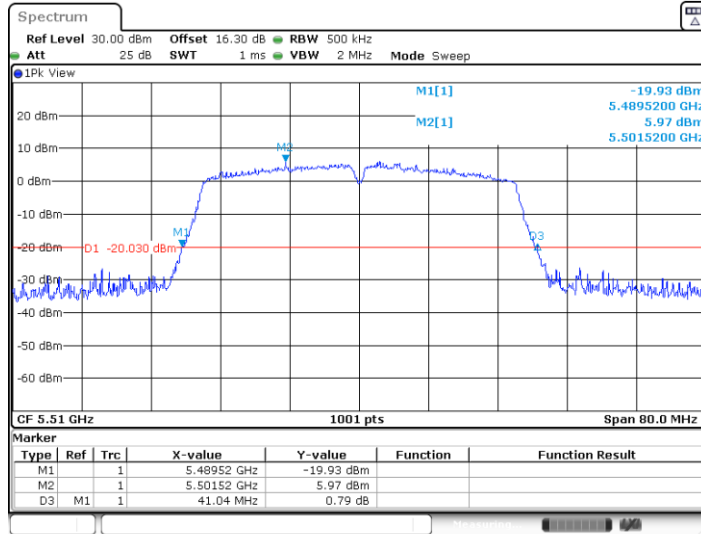


11AC40SISO_Ant2_5510

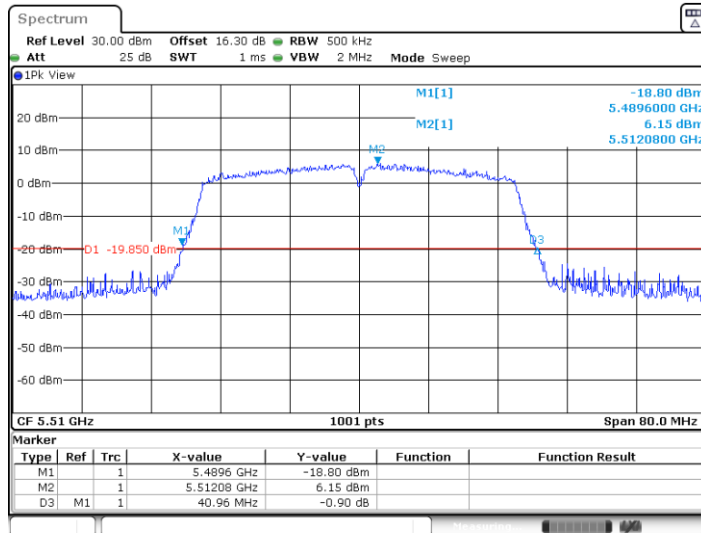




11AC40SISO_Ant1_5550

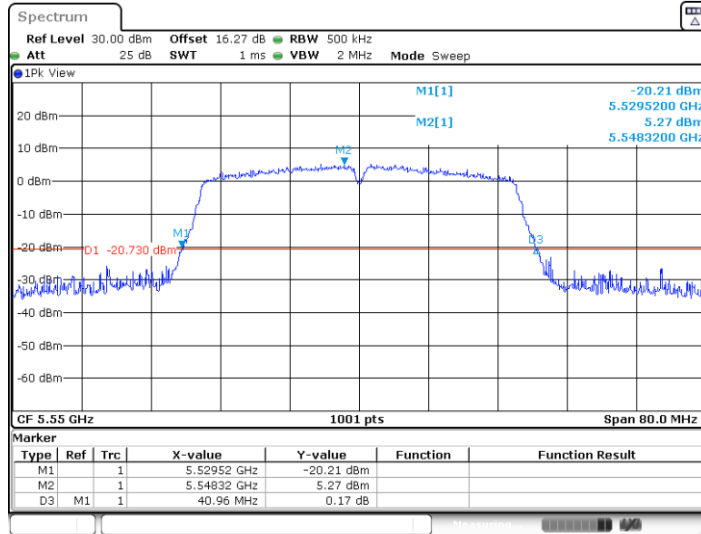


11AC40SISO_Ant2_5550

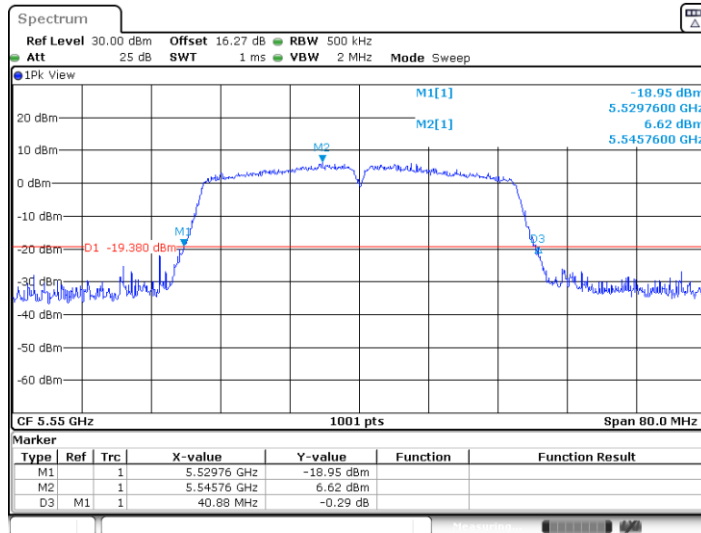




11AC40SISO_Ant1_5670

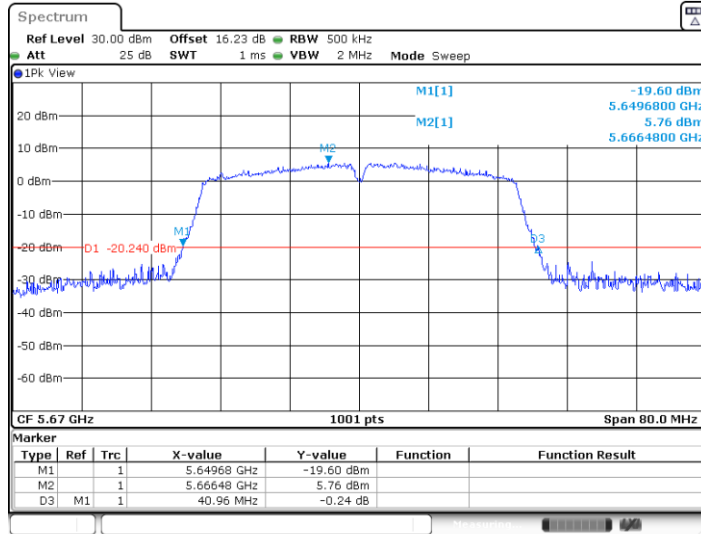

Date: 12.FEB.2023 11:13:08


11AC40SISO_Ant2_5670

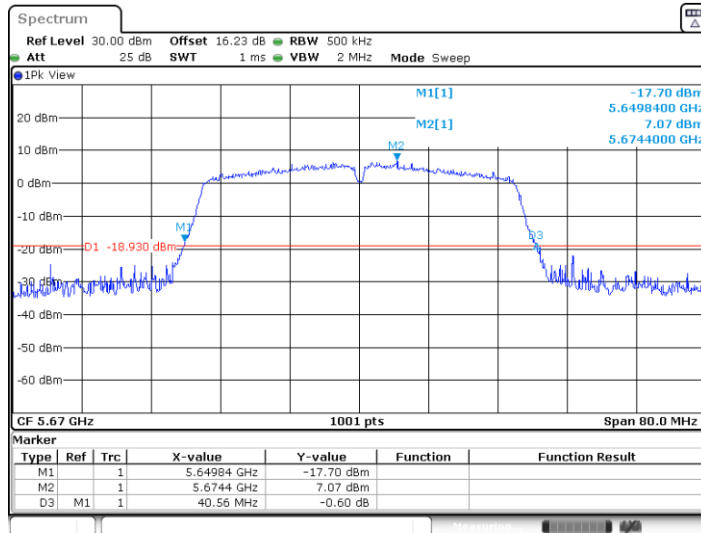

Date: 12.FEB.2023 12:31:40




11AC40SISO_Ant1_5710

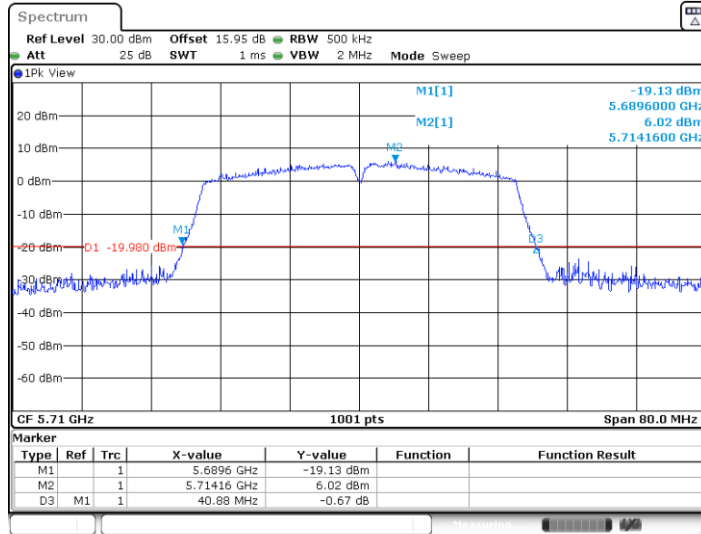

Date: 12.FEB.2023 11:14:31


11AC40SISO_Ant2_5710

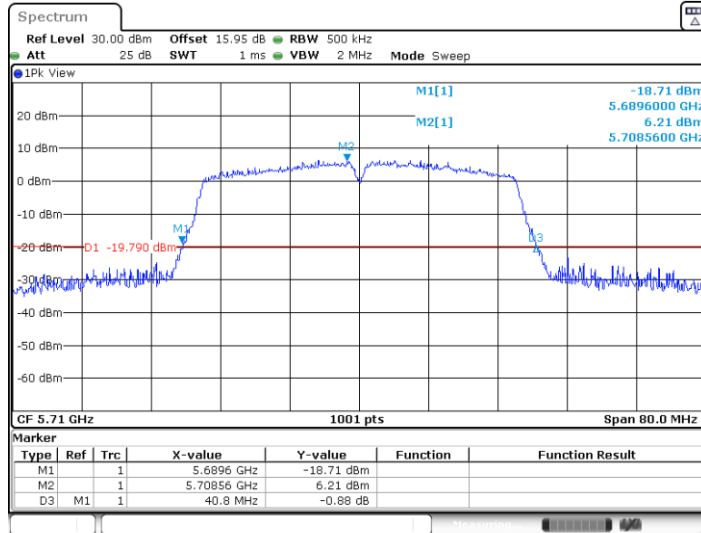

Date: 12.FEB.2023 12:32:53




11AC40SISO_Ant1_5755

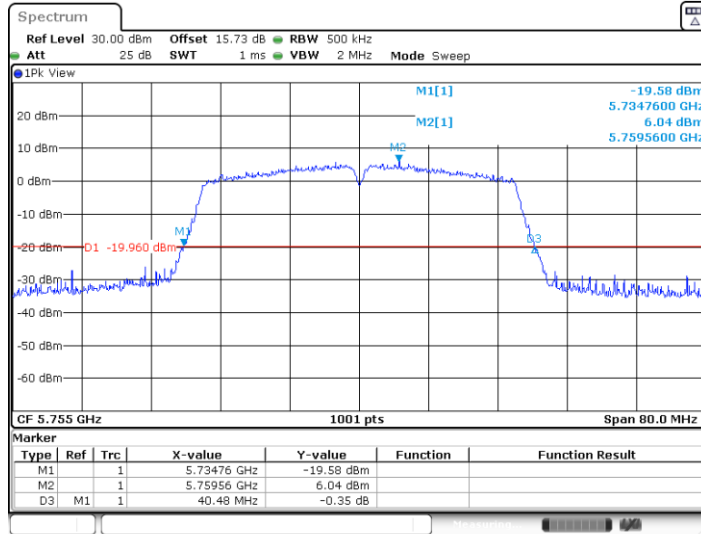

Date: 12.FEB.2023 11:16:07

11AC40SISO_Ant2_5755

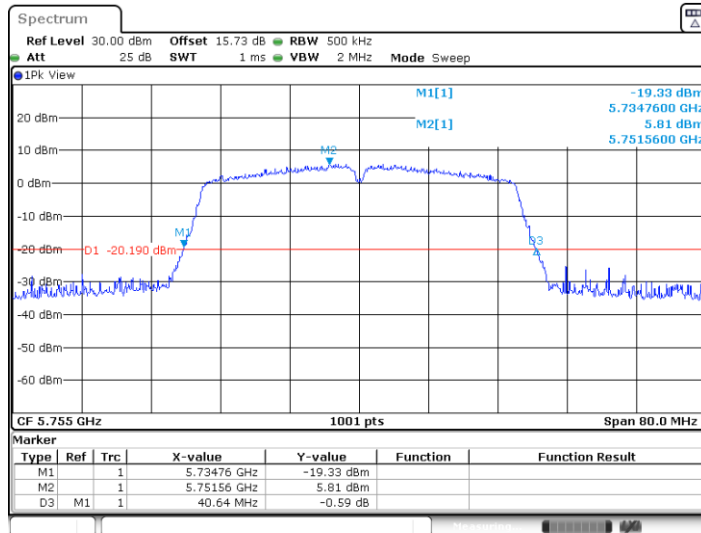

Date: 12.FEB.2023 12:34:15