





TEST REPORT

FCC ID :	2A4DZ-TSB4270	
Test Report No :	TCT220216E004	
Date of issue :	Feb. 23, 2022	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name :	MITA EXPEDITIONS LLC	
Address :	3821 Bedford Avenue, Brooklyn, New York, 11229, United States	
Manufacturer's name ... :	MITA EXPEDITIONS LLC	
Address :	3821 Bedford Avenue, Brooklyn, New York, 11229, United States	
Standard(s)	FCC CFR Title 47 Part 1.1310 KDB 680106 D01 RF Exposure Wireless Charging App v03r01	
Test item description	MagBoost Portable Charger 10K. Kickstand	
Trade Mark	Techsmarter	
Model/Type reference :	TSB4270	
Rating(s)	Rechargeable Li-ion Battery DC 3.85V	
Date of receipt of test item	Feb. 16, 2022	
Date (s) of performance of test :	Feb. 16, 2022 - Feb. 23, 2022	
Tested by (+signature) ... :	Brews XU	
Check by (+signature) :	Beryl ZHAO	
Approved by (+signature):	Tomsin	



General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
2. Facilities and Accreditations	4
2.1. Facilities	4
2.2. Location	4
3. Technical Requirements Specification	5
3.1. Requirements.....	5
3.2. Test Setup	7
3.3. Test Procedure	8
3.4. Test Instruments List	8
3.5. Test Result	9
3.6. Test Set-up Photo.....	11

1. General Product Information

1.1. EUT description

Test item description	MagBoost Portable Charger 10K. Kickstand
Model/Type reference.....	TSB4270
Sample Number.....	TCT220216E003-0101
Operation Frequency	117.21kHz - 141.68kHz
Modulation Technology	Load modulation
Max. Wireless Output Power:	15W
Antenna Type.....	Inductive loop coil Antenna
Rating(s)	Rechargeable Li-ion Battery DC 3.85V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

None.

2. Facilities and Accreditations

2.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098
SHENZHEN TONGCE TESTING LAB
Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1
SHENZHEN TONGCE TESTING LAB
CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

2.2. Location

SHENZHEN TONGCE TESTING LAB

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

3. Technical Requirements Specification

3.1. Requirements

According to the item 5 of KDB 680106 D01 RF Exposure Wireless Charging App v03r01:
According to the item 5 of KDB 680106 D01 v03r01:

Requirement of KDB 680106 D01	Yes/No	Description
Power transfer frequency is less than 1MHz	Yes	The device operate in the frequency range 117.21kHz -141.68kHz
Output power from each primary coil is less than or equal to 15 watts	Yes	The maximum output power of the primary coil is 15W.
The transfer system includes only single primary and secondary coils.This includes charging system that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes single coil that is able to detect receiver device.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only(portable exposure conditions are not covered by this exclusion).	No	Mobile and portable exposure conditions
The aggregate H-field strengths at 15 cm surrounding the device and 20cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-filed strengths at 0 cm surrounding the device and from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device. all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30


F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3.2. Test Setup

A:

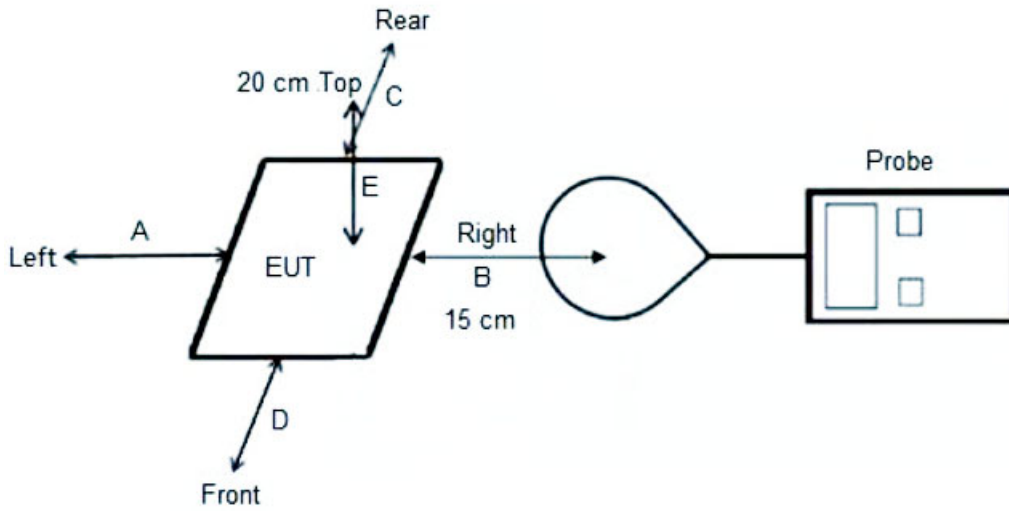

B:

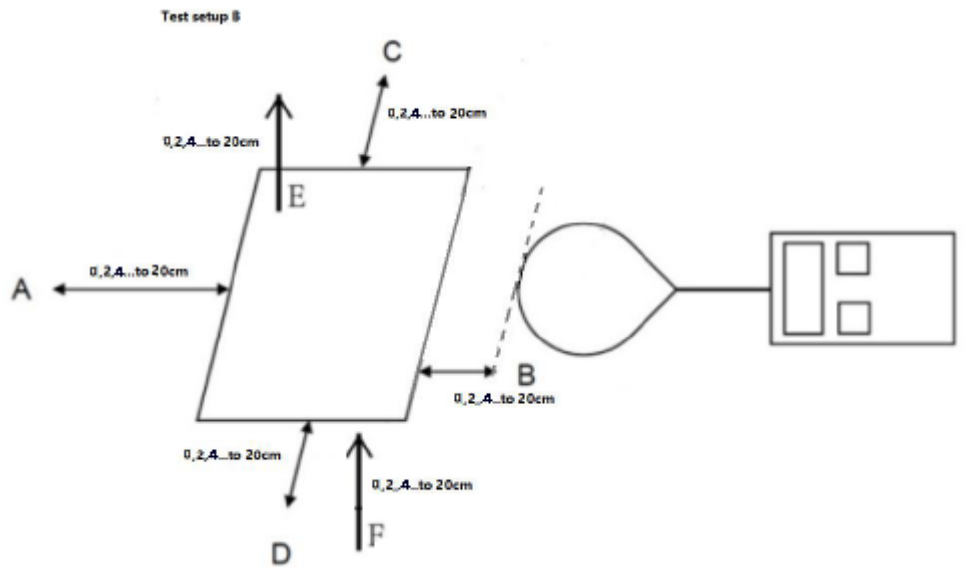

3.3. Test Procedure

- 1) The RF exposure test was performed in an echoic chamber;
- 2) The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.
- 3) highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed;
- 4) The EUT was measured according to the dictates of KDB680106 D01v03r01;

Remark: The EUT' s test position A, B,C, D and E is valid for the E and H field measurements.

3.4. Test Instruments List

Equipment	Manufacturer	Model No.	Calibration Due
Magnetic field meter	NARDA	ELT-400	Mar. 07, 2022
Mobile Phone	SAMSUNG	SM-G9350	/
Adapter	SAMSUNG	EP-TA20CBC	/

3.5. Test Result

For setup A:

Note: AC Power mode

H-Filed Strength at 15 cm from edges and 20cm from top surrounding the EUT (uT)

Frequency Range (KHz)	Operation condition	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
117.21kHz -141.68kHz	Full load	0.242	0.223	0.242	0.230	0.210	0.242
117.21kHz -141.68kHz	Half load	0.211	0.217	0.227	0.200	0.195	0.227
117.21kHz -141.68kHz	No load	0.212	0.213	0.215	0.192	0.192	0.215

H-Filed Strength at 15 cm from edges 20cm from top surrounding the EUT (A/m)

Frequency Range (KHz)	Operation condition	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
117.21kHz -141.68kHz	Full load	0.194	0.178	0.194	0.184	0.168	0.194	1.63
117.21kHz -141.68kHz	Half load	0.169	0.174	0.182	0.160	0.156	0.182	1.63
117.21kHz -141.68kHz	No load	0.170	0.170	0.172	0.154	0.154	0.172	1.63

Note: formula of uT to A/m: $A/m = uT / 1.25$

For setup B:

Note: Internal battery power mode

Full Load

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.346	0.351	0.358	0.313	0.329	0.358	1.63
2	0.321	0.305	0.303	0.304	0.279	0.303	1.63
4	0.273	0.269	0.272	0.253	0.252	0.272	1.63
6	0.261	0.263	0.270	0.224	0.231	0.270	1.63
8	0.223	0.229	0.228	0.203	0.197	0.228	1.63
10	0.219	0.226	0.216	0.183	0.212	0.216	1.63
12	0.226	0.205	0.203	0.198	0.184	0.203	1.63
14	0.185	0.188	0.192	0.151	0.163	0.192	1.63
16	0.199	0.178	0.192	0.185	0.146	0.192	1.63
18	0.190	0.181	0.192	0.175	0.151	0.192	1.63
20	0.177	0.179	0.174	0.151	0.159	0.174	1.63

Half Load

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.349	0.343	0.339	0.323	0.321	0.339	1.63
2	0.319	0.329	0.317	0.295	0.318	0.317	1.63
4	0.280	0.269	0.265	0.266	0.252	0.265	1.63
6	0.267	0.246	0.272	0.246	0.225	0.272	1.63
8	0.248	0.247	0.252	0.217	0.236	0.252	1.63
10	0.229	0.238	0.234	0.210	0.201	0.234	1.63
12	0.228	0.206	0.205	0.198	0.194	0.205	1.63
14	0.209	0.205	0.198	0.183	0.175	0.198	1.63
16	0.198	0.190	0.195	0.159	0.176	0.195	1.63
18	0.178	0.182	0.175	0.163	0.158	0.175	1.63
20	0.162	0.183	0.188	0.130	0.172	0.188	1.63

NO-load

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.352	0.355	0.335	0.342	0.337	0.335	0.352
2	0.312	0.319	0.308	0.288	0.308	0.308	0.312
4	0.282	0.282	0.277	0.243	0.266	0.277	0.282
6	0.273	0.248	0.251	0.254	0.233	0.251	0.273
8	0.234	0.245	0.235	0.198	0.217	0.235	0.234
10	0.226	0.233	0.233	0.189	0.208	0.233	0.226
12	0.202	0.222	0.223	0.181	0.192	0.223	0.202
14	0.209	0.210	0.184	0.171	0.180	0.184	0.209
16	0.177	0.194	0.178	0.163	0.175	0.178	0.177
18	0.189	0.170	0.187	0.154	0.148	0.187	0.189
20	0.189	0.162	0.163	0.172	0.127	0.163	0.189

Note: In the frequency range of 1k-10M, except the fundamental frequency, other transmissions of the power transmission system are less than 20dB lower than the maximum fundamental transmission, so it is not necessary to evaluate.

3.6. Test Set-up Photo

Setup A:

AC power mode:

Front




Back




Left



Right

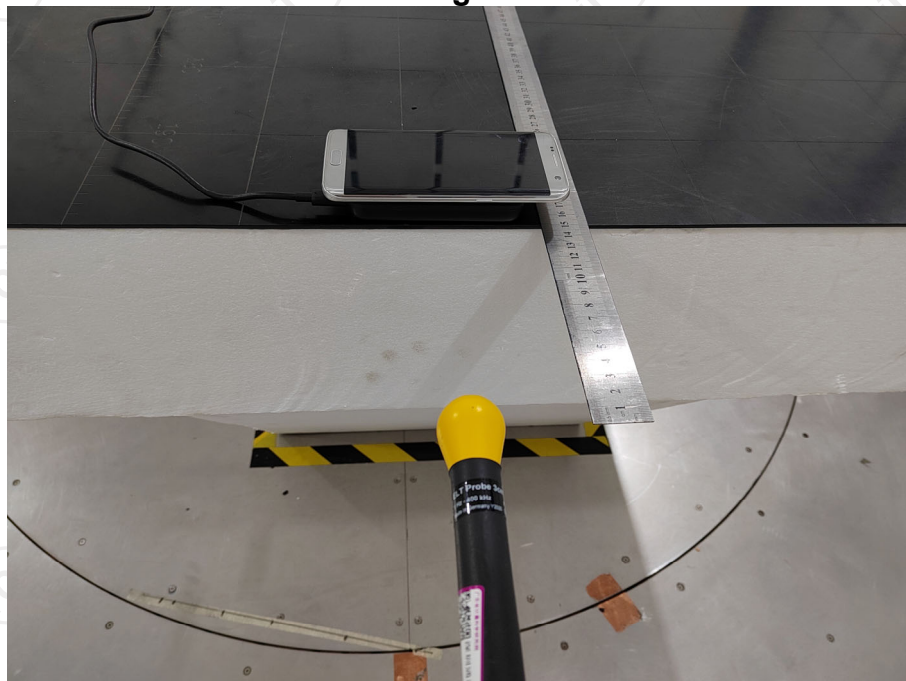

top

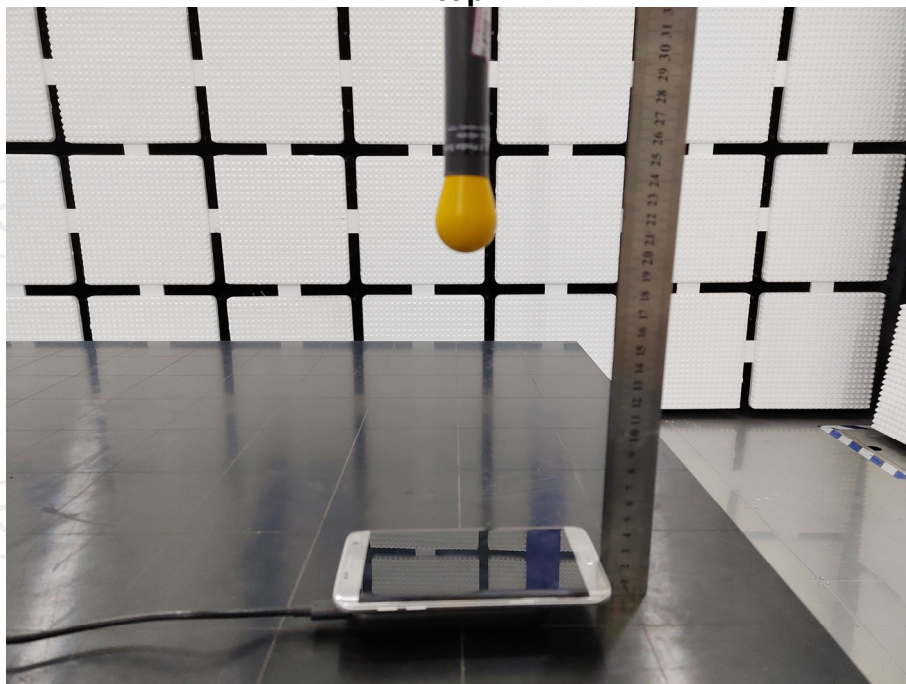


**Setup B:
Internal battery power mode**

front




back

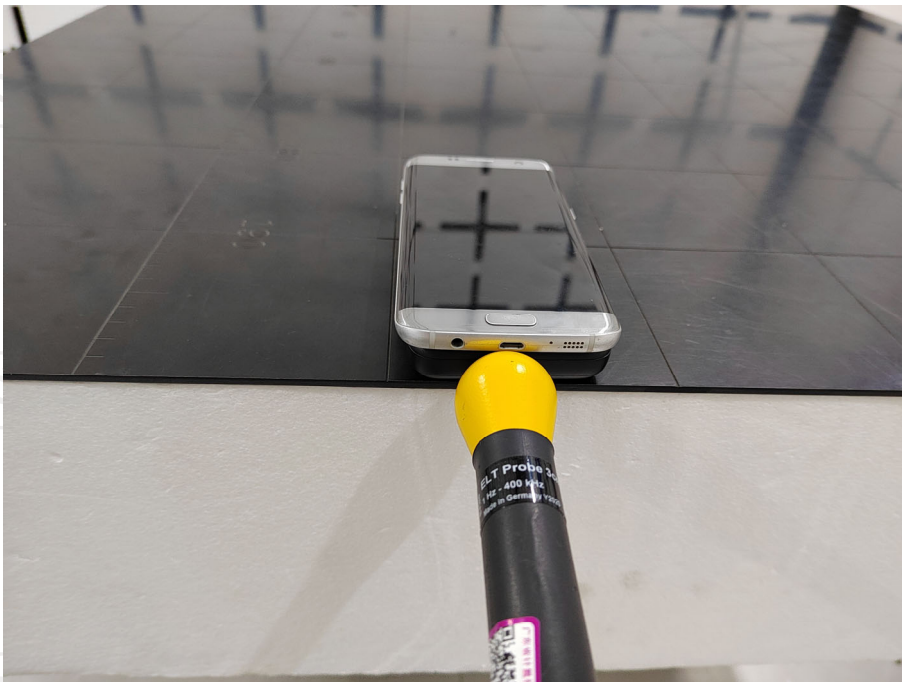

left




right

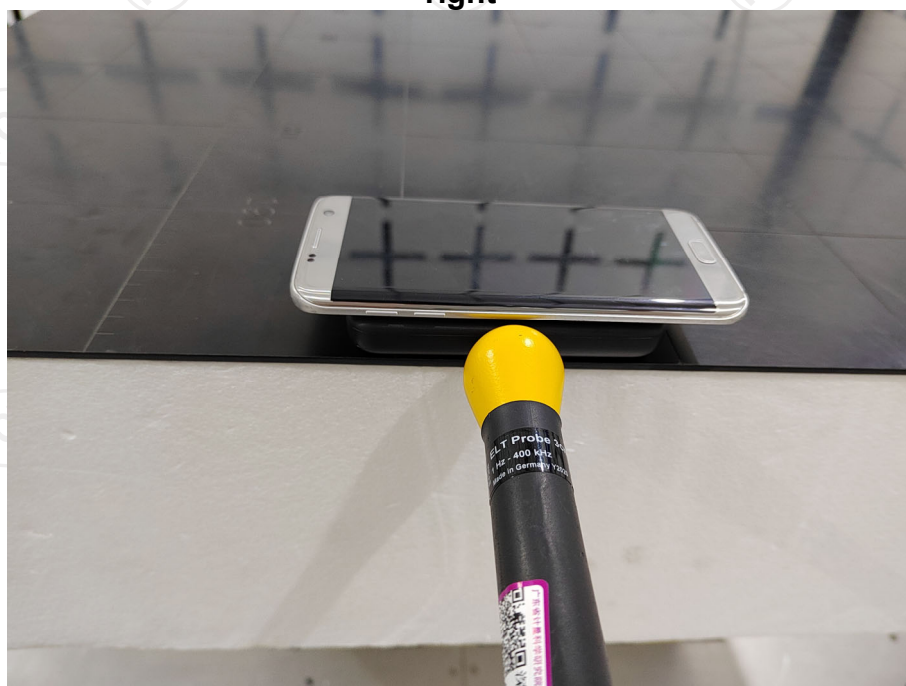

top



Bottom

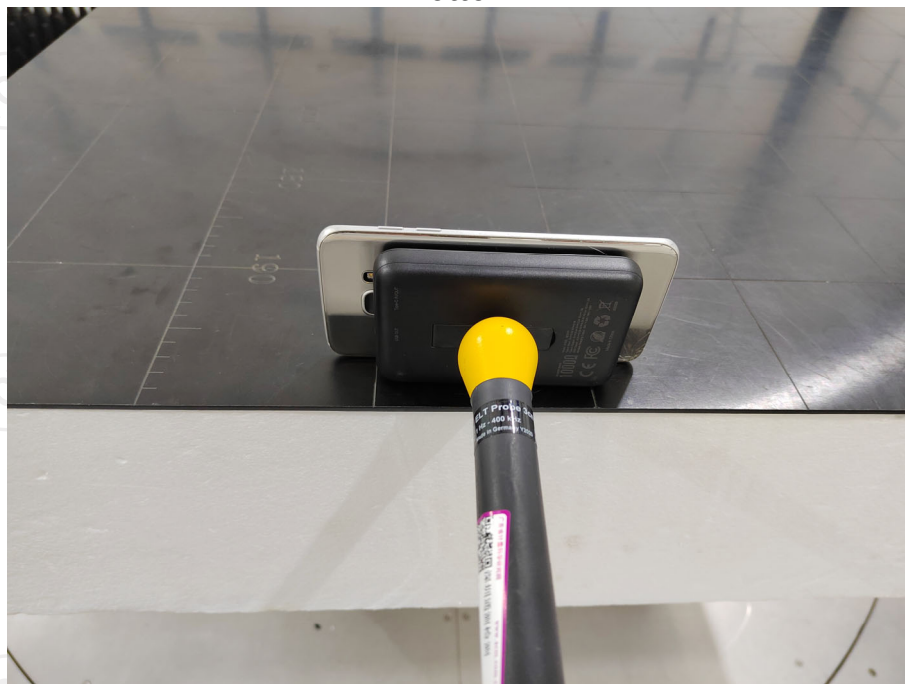

*******END OF REPORT*******