

**ATC**

# TEST REPORT

Applicant Name : Cloudy Bay Lighting Supply Inc  
Address : 1312 17th Street Suite 692 Denver Colorado United States  
Report Number : RA221228-64108E-RF-00  
FCC ID: 2A4FVLCSL640SMWH

**Test Standard (s)**

FCC PART 15.247

**Sample Description**

Product Type: 6 Head Wifi- BLE Track Lighting  
Model No.: LCSL640SMWH  
Multiple Model(s) No.: LCSL640SM\*\*  
Trade Mark: Cloudy Bay  
Date Received: 2022/12/28  
Report Date: 2023/02/28

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:****Approved By:**

Handwritten signature of Andy Yu.

Andy Yu  
EMC Engineer

Handwritten signature of Candy Li.

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## TABLE OF CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE.....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EQUIPMENT MODIFICATIONS .....	8
EUT EXERCISE SOFTWARE .....	8
SUPPORT EQUIPMENT LIST AND DETAILS .....	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>FCC §15.247 (I) &amp; §1.1307 (B) (3) &amp; §2.1091- MPE-BASED EXEMPTION .....</b>	<b>13</b>
<b>§15.203 &amp; RSS-GEN §6.8 ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
ANTENNA CONNECTOR CONSTRUCTION .....	15
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
EUT SETUP .....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE .....	16
TRANSF FACTOR & MARGIN CALCULATION.....	17
TEST DATA .....	17
<b>FCC §15.209, §15.205 &amp; §15.247(D) - SPURIOUS EMISSIONS.....</b>	<b>22</b>
APPLICABLE STANDARD .....	22
EUT SETUP .....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	23
TEST PROCEDURE .....	23
FACTOR & MARGIN CALCULATION .....	23
TEST DATA .....	23
<b>FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH .....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST DATA .....	35
<b>FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST DATA .....	36

<b>FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST DATA .....	37
<b>FCC §15.247(E) - POWER SPECTRAL DENSITY.....</b>	<b>38</b>
APPLICABLE STANDARD .....	38
TEST PROCEDURE .....	38
TEST DATA .....	39
<b>APPENDIX WI-FI.....</b>	<b>40</b>
APPENDIX A: DTS BANDWIDTH .....	40
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	45
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....	50
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....	51
APPENDIX E: BAND EDGE MEASUREMENTS.....	58
APPENDIX F: DUTY CYCLE .....	61
<b>APPENDIX BLE.....</b>	<b>64</b>
APPENDIX A: DTS BANDWIDTH .....	64
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	66
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....	68
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....	70
APPENDIX E: BAND EDGE MEASUREMENTS.....	72
APPENDIX F: DUTY CYCLE .....	73

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221228-64108E-RF-00	Original Report	2023-02-28

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	6 Head Wifi- BLE Track Lighting
Tested Model	LCSL640SMWH
Multiple Models	LCSL640SM** (model difference see product declaration letter of similarity)
Frequency Range	BLE_1M: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Output Power	BLE_Peak Power: 2.33dBm Wi-Fi_Average Power: 12.82dBm(802.11b), 10.39dBm(802.11g), 10.27dBm(802.11n-HT20), 7.89dBm(802.11n-HT40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	1.5dBi (It is provided by the applicant)
Voltage Range	AC 120V/60 Hz
Sample serial number	1YJO-3 for RF Conducted Test 1X72-1 for Radiated Emissions Test and Conducted Emissions Test (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.73dB	
Unwanted Emission, conducted	1.6dB	
AC Power Lines Conducted Emissions	2.72dB	
Emissions, Radiated	9kHz - 30MHz 30MHz - 1GHz 1GHz - 18GHz 18GHz - 26.5GHz 26.5GHz - 40GHz	2.66dB 4.28dB 4.98dB 5.06dB 4.72dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	
6	2437	/	
7	2442	/	

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40, EUT was tested with Channel 3, 6 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

“WiFi test tool v1.6.2”\* exercise software was used, the software and power level was provided by the manufacturer.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	13	13	13
802.11g	6Mbps	20	20	20
802.11n-HT20	MCS0	20	20	20
802.11n-HT40	MCS0	13	13	13
BLE	1Mbps	3	3	3

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates, bandwidths and modulations.

## Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

## External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielded Un-Detachable AC Cable	1.5	EUT	LISN/AC Mains

## Block Diagram of Test Setup

For conducted emission

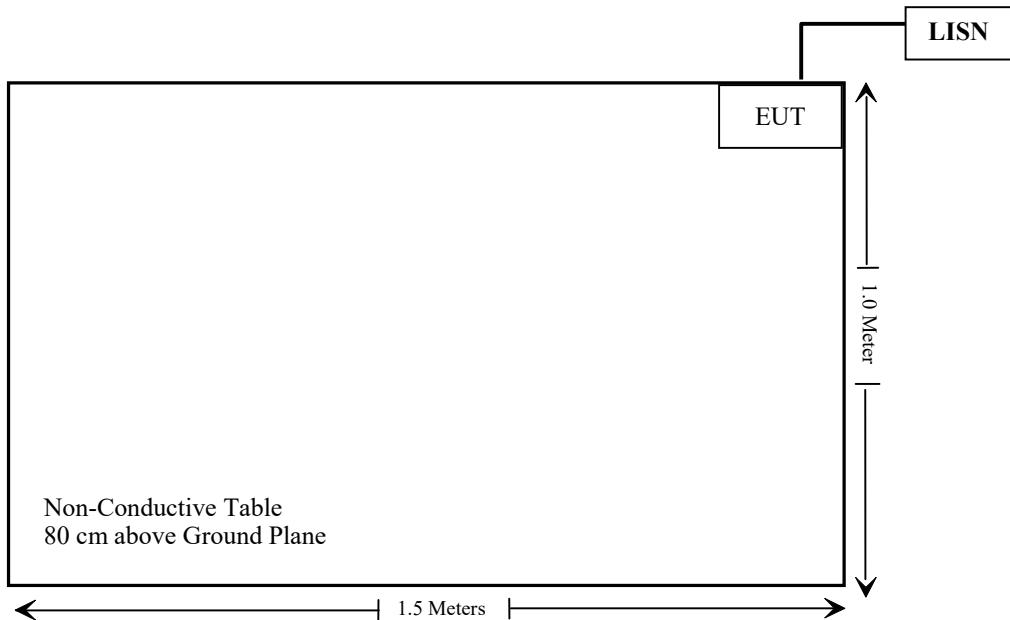

For Radiated Emissions:

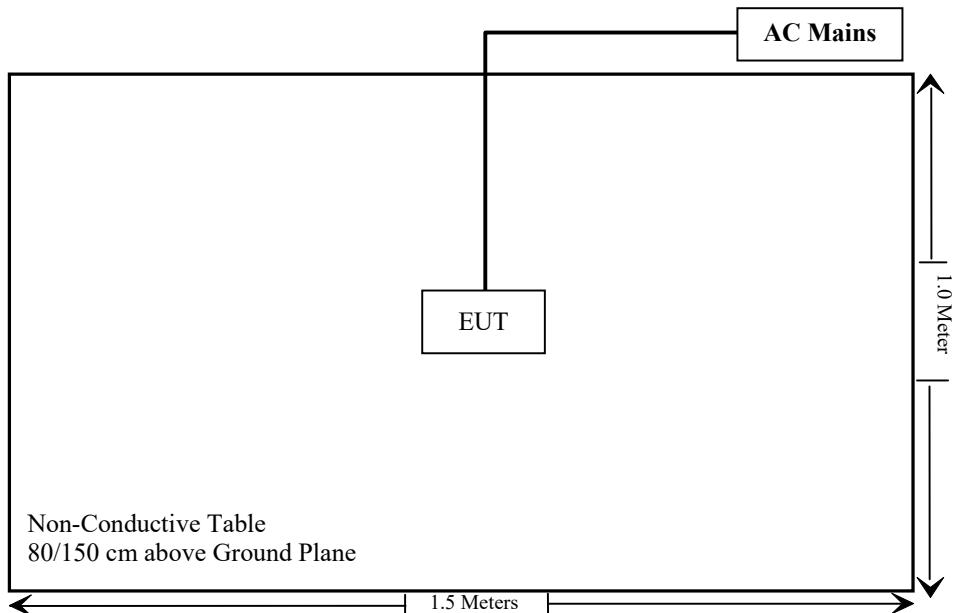

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1307 (b) (3) &§2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
<b>Radiated Emissions Test</b>					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>RF Conducted Test</b>					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/06/27	2023/06/26
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Cable	Unknown	1	Each time	Each time

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MPE-Based Exemption**

### **Applicable Standard**

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemptionfrom further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2f$ .
1,500-100,000	$19.2R^2$ .

R is the minimum separation distance in meters

f = frequency in MHz

### **Result**

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BLE	2402-2480	2.5	1.5	-0.65	1.85	1.531	0.2	768
Wi-Fi	2412-2462	13.0	1.5	-0.65	12.35	17.179	0.2	768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.  
 2. The BLE cannot transmit at the same time with the Wi-Fi.  
 3.  $0\text{dBd}=2.15\text{dBi}$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant.**

## § 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a) Antenna must be permanently attached to the unit.
- b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

**Antenna Connector Construction**

The EUT has an internal antenna arrangement which was permanently attached for BLE and Wi-Fi, the antenna gain is 1.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Type	Antenna Gain	Impedance
PCB	1.5dBi	50 Ω


**Result: Compliant**

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

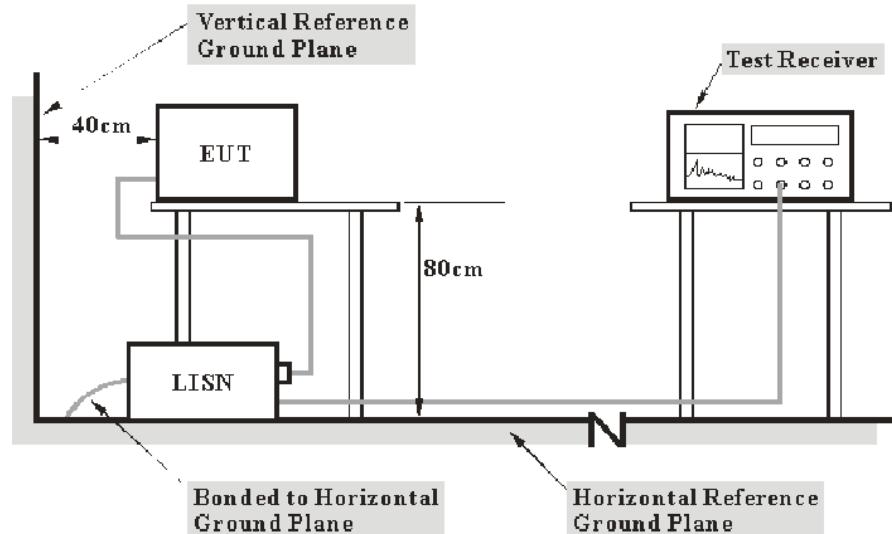

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

## Test Data

### Environmental Conditions


<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Jason Liu on 2023-01-12.*

*EUT operation mode: Transmitting*


For BLE (*worst case is High channel*)

AC 120V/60 Hz, Line

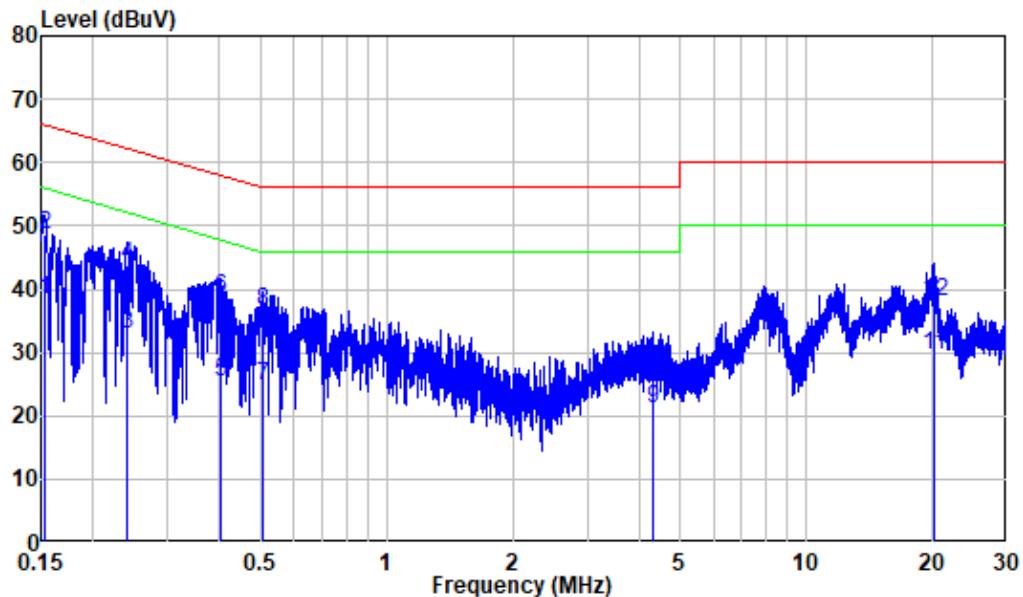

Site : Shielding Room  
Condition: Line  
Job No. : RA221228-64108E-RF  
Mode : BLE Transmitting

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.153	9.80	28.44	38.24	55.84 -17.60 Average
2	0.153	9.80	38.74	48.54	65.84 -17.30 QP
3	0.240	9.80	22.98	32.78	52.08 -19.30 Average
4	0.240	9.80	33.99	43.79	62.08 -18.29 QP
5	0.402	9.80	15.57	25.37	47.81 -22.44 Average
6	0.402	9.80	28.80	38.60	57.81 -19.21 QP
7	0.505	9.80	15.01	24.81	46.00 -21.19 Average
8	0.505	9.80	26.66	36.46	56.00 -19.54 QP
9	4.317	9.84	11.37	21.21	46.00 -24.79 Average
10	4.317	9.84	17.94	27.78	56.00 -28.22 QP
11	20.109	10.00	19.68	29.68	50.00 -20.32 Average
12	20.109	10.00	27.95	37.95	60.00 -22.05 QP

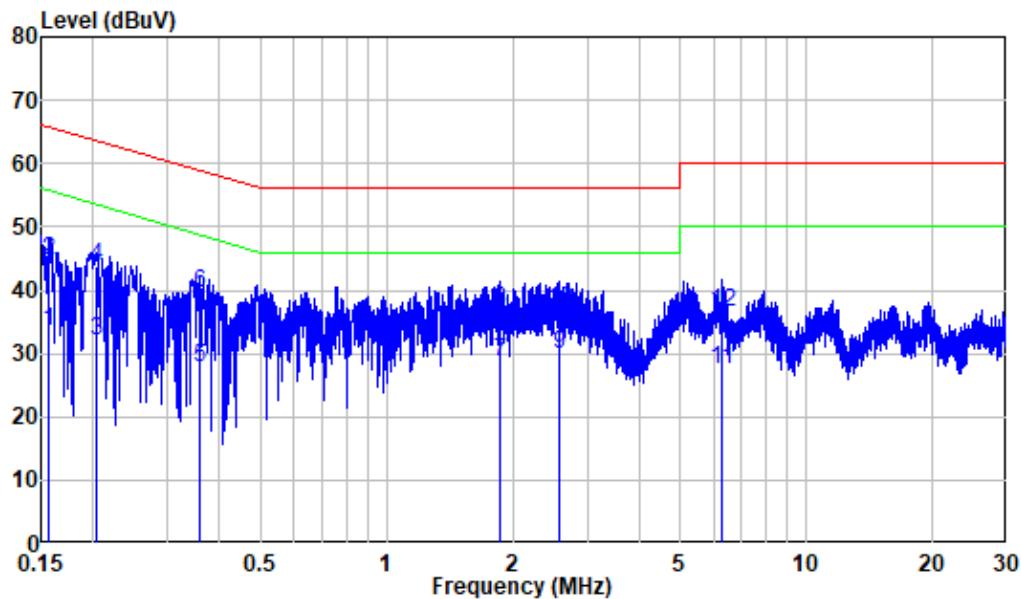
**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
Condition: Neutral  
Job No. : RA221228-64108E-RF  
Mode : BLE Transmitting

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.157	9.80	23.71	33.51	55.62 -22.11 Average
2	0.157	9.80	34.83	44.63	65.62 -20.99 QP
3	0.203	9.80	22.12	31.92	53.48 -21.56 Average
4	0.203	9.80	33.83	43.63	63.48 -19.85 QP
5	0.357	9.80	18.00	27.80	48.79 -20.99 Average
6	0.357	9.80	29.74	39.54	58.79 -19.25 QP
7	1.858	9.82	19.00	28.82	46.00 -17.18 Average
8	1.858	9.82	26.94	36.76	56.00 -19.24 QP
9	2.567	9.83	20.02	29.85	46.00 -16.15 Average
10	2.567	9.83	27.09	36.92	56.00 -19.08 QP
11	6.273	9.94	17.57	27.51	50.00 -22.49 Average
12	6.273	9.94	26.57	36.51	60.00 -23.49 QP


**For 2.4G Wi-Fi (worst case is 802.11b mode, High channel)**

**AC 120V/60 Hz, Line**

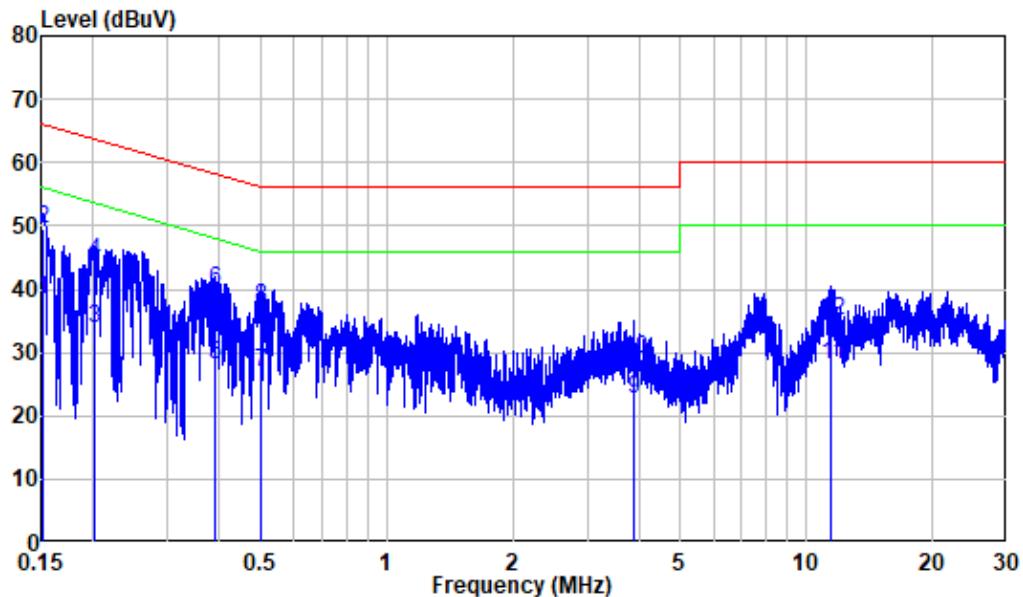

Site : Shielding Room  
Condition: Line  
Job No. : RA221228-64108E-RF  
Mode : 2.4G WIFI Transmitting

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.151	9.80	28.56	38.36	55.94 -17.58 Average
2	0.151	9.80	39.82	49.62	65.94 -16.32 QP
3	0.201	9.80	24.04	33.84	53.59 -19.75 Average
4	0.201	9.80	34.67	44.47	63.59 -19.12 QP
5	0.390	9.80	18.28	28.08	48.07 -19.99 Average
6	0.390	9.80	30.07	39.87	58.07 -18.20 QP
7	0.503	9.80	17.14	26.94	46.00 -19.06 Average
8	0.503	9.80	27.37	37.17	56.00 -18.83 QP
9	3.868	9.84	12.77	22.61	46.00 -23.39 Average
10	3.868	9.84	19.04	28.88	56.00 -27.12 QP
11	11.483	9.91	18.08	27.99	50.00 -22.01 Average
12	11.483	9.91	25.22	35.13	60.00 -24.87 QP


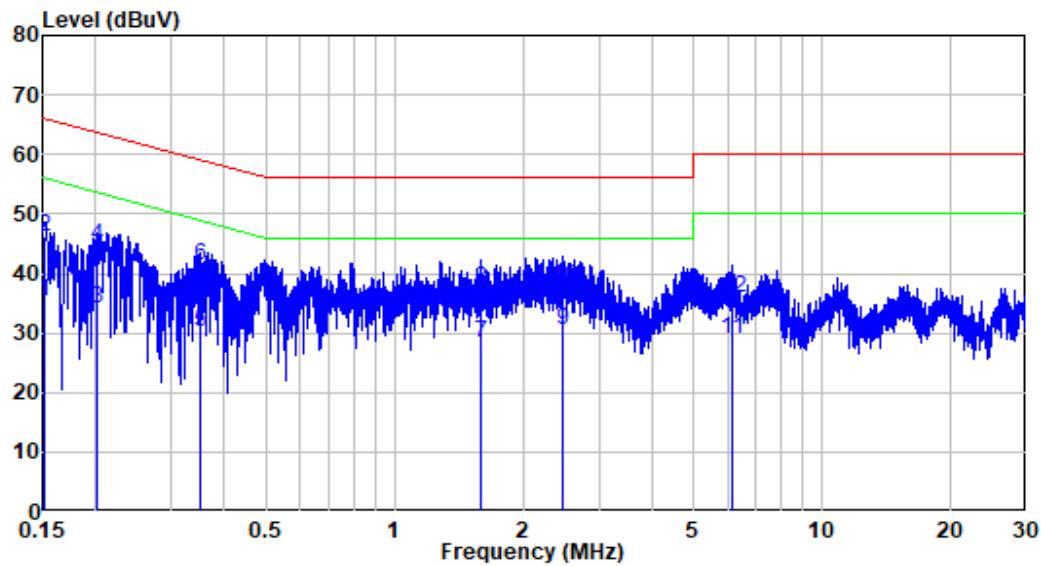
**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
Condition: Neutral  
Job No. : RA221228-64108E-RF  
Mode : 2.4G WIFI Transmitting

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	dBuV	dBuV		
1	0.151	9.80	25.46	35.26	55.93	-20.67	Average
2	0.151	9.80	36.35	46.15	65.93	-19.78	QP
3	0.201	9.80	24.18	33.98	53.57	-19.59	Average
4	0.201	9.80	34.99	44.79	63.57	-18.78	QP
5	0.352	9.80	20.35	30.15	48.93	-18.78	Average
6	0.352	9.80	31.43	41.23	58.93	-17.70	QP
7	1.591	9.82	18.65	28.47	46.00	-17.53	Average
8	1.591	9.82	27.72	37.54	56.00	-18.46	QP
9	2.462	9.82	20.63	30.45	46.00	-15.55	Average
10	2.462	9.82	27.84	37.66	56.00	-18.34	QP
11	6.137	9.94	18.98	28.92	50.00	-21.08	Average
12	6.137	9.94	25.92	35.86	60.00	-24.14	QP

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

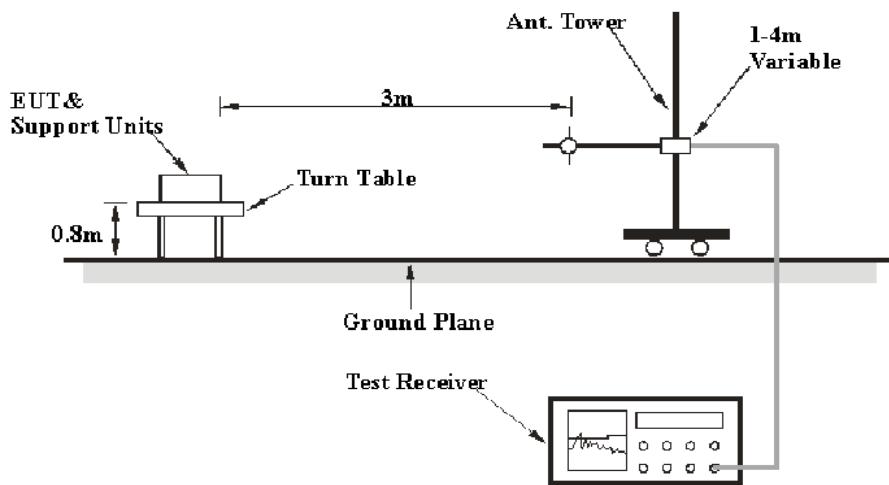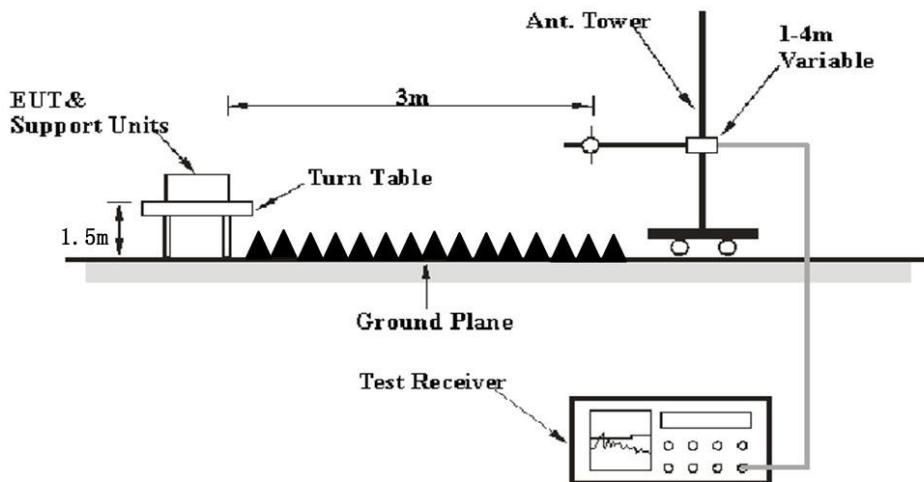**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	>1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	50~56%
ATM Pressure:	101.0 kPa

*The testing was performed by Jack on 2023-01-13 for below 1GHz, Jason Liu on 2023-01-10 for above 1GHz.*


*EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)*

**30 MHz~1 GHz:**

Note: When the test result of Peak was less than the limit of QP more than 6dB, just the peak value was recorded.

For BLE (worst case is High channel)


Horizontal

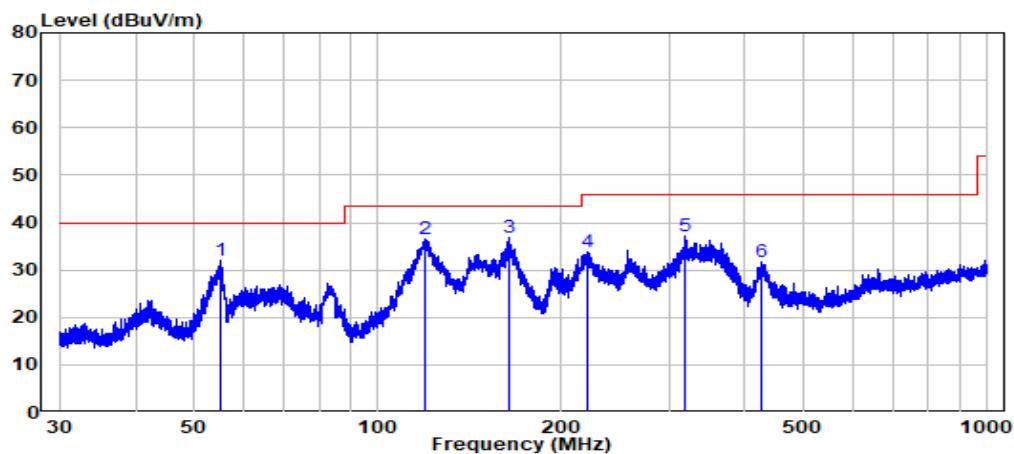

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA221228-64108E-RF  
Test Mode: BLE Transmitting

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.148	-10.26	42.34	32.08	40.00	-7.92	Peak
2	119.803	-13.49	50.10	36.61	43.50	-6.89	Peak
3	164.330	-14.24	51.06	36.82	43.50	-6.68	Peak
4	220.714	-11.39	45.13	33.74	46.00	-12.26	Peak
5	318.957	-8.51	45.64	37.13	46.00	-8.87	Peak
6	425.961	-5.85	37.66	31.81	46.00	-14.19	Peak

Vertical

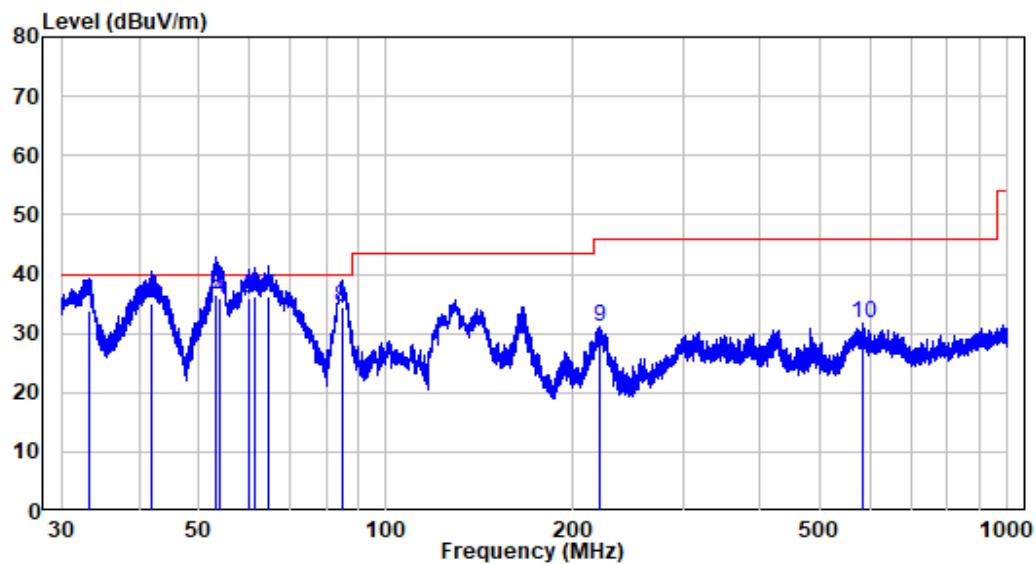


Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA221228-64108E-RF  
Test Mode: BLE Transmitting

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	33.168	-11.98	45.89	33.91	40.00	-6.09 QP
2	41.915	-10.03	45.10	35.07	40.00	-4.93 QP
3	53.225	-10.20	46.70	36.50	40.00	-3.50 QP
4	54.024	-10.35	46.21	35.86	40.00	-4.14 QP
5	60.201	-10.70	46.60	35.90	40.00	-4.10 QP
6	61.481	-11.22	47.40	36.18	40.00	-3.82 QP
7	64.631	-12.38	48.70	36.32	40.00	-3.68 QP
8	84.739	-15.73	50.09	34.36	40.00	-5.64 QP
9	220.038	-11.41	42.41	31.00	46.00	-15.00 Peak
10	585.816	-2.96	34.51	31.55	46.00	-14.45 Peak

For 2.4G Wi-Fi (worst case is 802.11b mode, High channel)


Horizontal

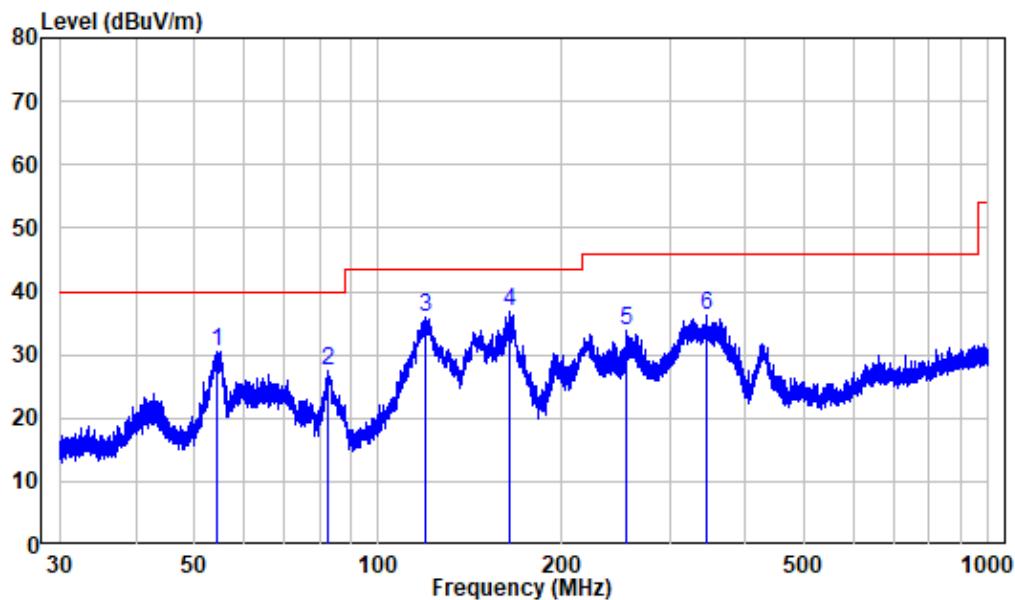

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA221228-64108E-RF  
Test Mode: 2.4G WIFI Transmitting

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	54.261	-10.33	40.81	30.48	40.00	-9.52 Peak
2	82.793	-16.42	44.02	27.60	40.00	-12.40 Peak
3	119.698	-13.47	49.39	35.92	43.50	-7.58 Peak
4	164.258	-14.24	50.92	36.68	43.50	-6.82 Peak
5	255.064	-10.61	44.48	33.87	46.00	-12.13 Peak
6	345.595	-7.23	43.54	36.31	46.00	-9.69 Peak

Vertical

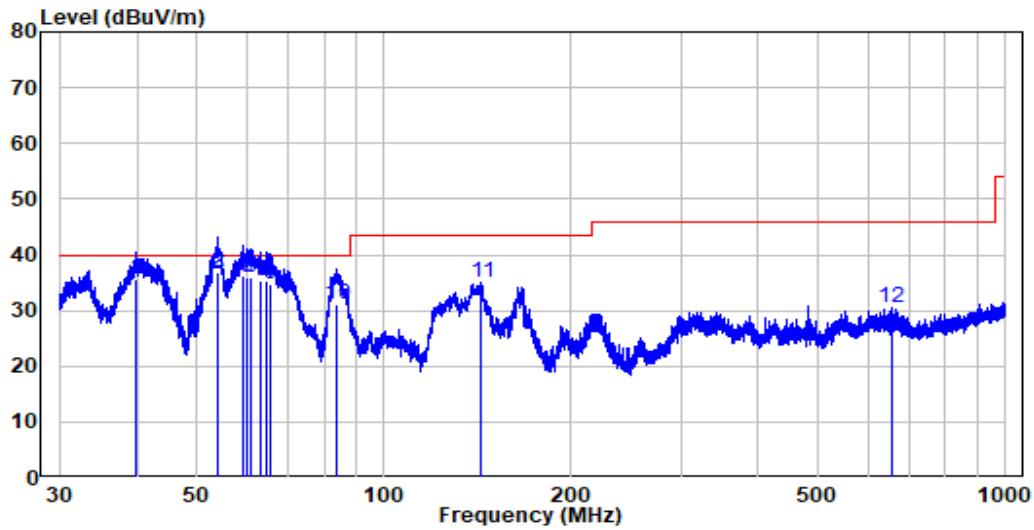

Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA221228-64108E-RF  
Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39.854	-10.37	46.10	35.73	40.00	-4.27	QP
2	53.905	-10.33	47.20	36.87	40.00	-3.13	QP
3	54.142	-10.34	46.80	36.46	40.00	-3.54	QP
4	59.362	-10.38	46.69	36.31	40.00	-3.69	QP
5	60.016	-10.63	46.50	35.87	40.00	-4.13	QP
6	61.105	-11.07	46.90	35.83	40.00	-4.17	QP
7	63.397	-11.93	47.39	35.46	40.00	-4.54	QP
8	64.744	-12.42	47.60	35.18	40.00	-4.82	QP
9	65.659	-12.75	47.59	34.84	40.00	-5.16	QP
10	83.816	-16.11	47.31	31.20	40.00	-8.80	QP
11	143.452	-15.52	50.50	34.98	43.50	-8.52	Peak
12	654.232	-1.61	32.01	30.40	46.00	-15.60	Peak

**1 GHz-25 GHz:****Wi-Fi:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave		Height (m)	Polar (H/V)									
802.11b														
Low Channel(2412MHz)														
2310	61.98	PK	132	1.9	H	-7.24	54.74	74	-19.26					
2310	47.50	AV	132	1.9	H	-7.24	40.26	54	-13.74					
2310	61.83	PK	164	1.7	V	-7.24	54.59	74	-19.41					
2310	47.72	AV	164	1.7	V	-7.24	40.48	54	-13.52					
2390	63.97	PK	47	2.1	H	-7.22	56.75	74	-17.25					
2390	51.01	AV	47	2.1	H	-7.22	43.79	54	-10.21					
2390	63.74	PK	119	2.1	V	-7.22	56.52	74	-17.48					
2390	50.55	AV	119	2.1	V	-7.22	43.33	54	-10.67					
4824	61.22	PK	280	1.7	H	-3.52	57.70	74	-16.30					
4824	56.14	AV	280	1.7	H	-3.52	52.62	54	-1.38					
4824	59.11	PK	186	1	V	-3.52	55.59	74	-18.41					
4824	50.11	AV	186	1	V	-3.52	46.59	54	-7.41					
Middle Channel(2437MHz)														
4874	61.42	PK	66	1.5	H	-3.42	58	74	-16.00					
4874	56.40	AV	66	1.5	H	-3.42	52.98	54	-1.02					
4874	58.14	PK	194	1.1	V	-3.42	54.72	74	-19.28					
4874	47.75	AV	194	1.1	V	-3.42	44.33	54	-9.67					
High Channel(2462 MHz)														
2483.5	65.62	PK	200	1.3	H	-7.20	58.42	74	-15.58					
2483.5	52.76	AV	200	1.3	H	-7.20	45.56	54	-8.44					
2483.5	64.84	PK	106	1.9	V	-7.20	57.64	74	-16.36					
2483.5	50.44	AV	106	1.9	V	-7.20	43.24	54	-10.76					
2500	64.75	PK	257	1.3	H	-7.18	57.57	74	-16.43					
2500	49.94	AV	257	1.3	H	-7.18	42.76	54	-11.24					
2500	63.28	PK	281	1.3	V	-7.18	56.1	74	-17.90					
2500	49.22	AV	281	1.3	V	-7.18	42.04	54	-11.96					
4924	61.05	PK	191	2.3	H	-3.16	57.89	74	-16.11					
4924	55.89	AV	191	2.3	H	-3.16	52.73	54	-1.27					
4924	57.86	PK	154	2.1	V	-3.16	54.70	74	-19.30					
4924	46.78	AV	154	2.1	V	-3.16	43.62	54	-10.38					

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave		Height (m)	Polar (H/V)									
802.11g														
Low Channel(2412MHz)														
2310	61.93	PK	27	1.5	H	-7.24	54.69	74	-19.31					
2310	48.50	AV	27	1.5	H	-7.24	41.26	54	-12.74					
2310	61.96	PK	179	1.8	V	-7.24	54.72	74	-19.28					
2310	48.62	AV	179	1.8	V	-7.24	41.38	54	-12.62					
2390	65.45	PK	220	2	H	-7.22	58.23	74	-15.77					
2390	52.33	AV	220	2	H	-7.22	45.11	54	-8.89					
2390	64.45	PK	142	1.9	V	-7.22	57.23	74	-16.77					
2390	51.55	AV	142	1.9	V	-7.22	44.33	54	-9.67					
4824	60.94	PK	6	1.2	H	-3.52	57.42	74	-16.58					
4824	47.12	AV	6	1.2	H	-3.52	43.60	54	-10.40					
4824	57.72	PK	52	1.8	V	-3.52	54.20	74	-19.80					
4824	44.53	AV	52	1.8	V	-3.52	41.01	54	-12.99					
Middle Channel(2437MHz)														
4874	62.68	PK	338	1.1	H	-3.42	59.26	74	-14.74					
4874	48.57	AV	338	1.1	H	-3.42	45.15	54	-8.85					
4874	58.66	PK	329	2.4	V	-3.42	55.24	74	-18.76					
4874	44.42	AV	329	2.4	V	-3.42	41.00	54	-13.00					
High Channel(2462 MHz)														
2483.5	76.78	PK	198	1.8	H	-7.20	69.58	74	-4.42					
2483.5	59.73	AV	198	1.8	H	-7.20	52.53	54	-1.47					
2483.5	70.15	PK	219	2.4	V	-7.20	62.95	74	-11.05					
2483.5	54.01	AV	219	2.4	V	-7.20	46.81	54	-7.19					
2500	66.63	PK	32	1.6	H	-7.18	59.45	74	-14.55					
2500	52.61	AV	32	1.6	H	-7.18	45.43	54	-8.57					
2500	64.42	PK	298	1.2	V	-7.18	57.24	74	-16.76					
2500	50.55	AV	298	1.2	V	-7.18	43.37	54	-10.63					
4924	61.93	PK	168	1.6	H	-3.16	58.77	74	-15.23					
4924	49.13	AV	168	1.6	H	-3.16	45.97	54	-8.03					
4924	58.17	PK	143	1.7	V	-3.16	55.01	74	-18.99					
4924	44.46	AV	143	1.7	V	-3.16	41.30	54	-12.70					

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave		Height (m)	Polar (H/V)									
802.11n20														
Low Channel(2412MHz)														
2310	62.56	PK	272	1.2	H	-7.24	55.32	74	-18.68					
2310	48.68	AV	272	1.2	H	-7.24	41.44	54	-12.56					
2310	62.35	PK	317	1.6	V	-7.24	55.11	74	-18.89					
2310	48.60	AV	317	1.6	V	-7.24	41.36	54	-12.64					
2390	66.53	PK	42	1.1	H	-7.22	59.31	74	-14.69					
2390	52.37	AV	42	1.1	H	-7.22	45.15	54	-8.85					
2390	65.43	PK	85	2.1	V	-7.22	58.21	74	-15.79					
2390	51.56	AV	85	2.1	V	-7.22	44.34	54	-9.66					
4824	61.10	PK	317	1.6	H	-3.52	57.58	74	-16.42					
4824	47.04	AV	317	1.6	H	-3.52	43.52	54	-10.48					
4824	57.58	PK	179	1.9	V	-3.52	54.06	74	-19.94					
4824	44.94	AV	179	1.9	V	-3.52	41.42	54	-12.58					
Middle Channel(2437MHz)														
4874	61.93	PK	289	1.6	H	-3.42	58.51	74	-15.49					
4874	48.27	AV	289	1.6	H	-3.42	44.85	54	-9.15					
4874	58.18	PK	46	1.9	V	-3.42	54.76	74	-19.24					
4874	44.76	AV	46	1.9	V	-3.42	41.34	54	-12.66					
High Channel(2462 MHz)														
2483.5	74.98	PK	51	1.8	H	-7.20	67.78	74	-6.22					
2483.5	59.27	AV	51	1.8	H	-7.20	52.07	54	-1.93					
2483.5	68.61	PK	111	1.4	V	-7.20	61.41	74	-12.59					
2483.5	53.95	AV	111	1.4	V	-7.20	46.75	54	-7.25					
2500	66.39	PK	100	2.1	H	-7.18	59.21	74	-14.79					
2500	52.24	AV	100	2.1	H	-7.18	45.06	54	-8.94					
2500	63.85	PK	264	1.2	V	-7.18	56.67	74	-17.33					
2500	50.49	AV	264	1.2	V	-7.18	43.31	54	-10.69					
4924	61.93	PK	113	1.4	H	-3.16	58.77	74	-15.23					
4924	48.81	AV	113	1.4	H	-3.16	45.65	54	-8.35					
4924	58.63	PK	158	2.1	V	-3.16	55.47	74	-18.53					
4924	44.69	AV	158	2.1	V	-3.16	41.53	54	-12.47					

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave		Height (m)	Polar (H/V)									
802.11n40														
Low Channel 2422MHz														
2310	62.22	PK	35	2.1	H	-7.24	54.98	74	-19.02					
2310	48.94	AV	35	2.1	H	-7.24	41.70	54	-12.30					
2310	61.80	PK	279	1.1	V	-7.24	54.56	74	-19.44					
2310	48.47	AV	279	1.1	V	-7.24	41.23	54	-12.77					
2390	74.55	PK	249	2	H	-7.22	67.33	74	-6.67					
2390	57.86	AV	249	2	H	-7.22	50.64	54	-3.36					
2390	68.75	PK	177	2.1	V	-7.22	61.53	74	-12.47					
2390	52.93	AV	177	2.1	V	-7.22	45.71	54	-8.29					
4844	57.75	PK	327	2	H	-3.54	54.21	74	-19.79					
4844	44.55	AV	327	2	H	-3.54	41.01	54	-12.99					
4844	57.66	PK	308	1.8	V	-3.54	54.12	74	-19.88					
4844	44.74	AV	308	1.8	V	-3.54	41.20	54	-12.80					
Middle Channel 2437MHz														
4874	57.43	PK	310	2.2	H	-3.42	54.01	74	-19.99					
4874	44.87	AV	310	2.2	H	-3.42	41.45	54	-12.55					
4874	57.47	PK	27	1.8	V	-3.42	54.05	74	-19.95					
4874	44.55	AV	27	1.8	V	-3.42	41.13	54	-12.87					
High Channel 2452MHz														
2483.5	78.34	PK	76	1.9	H	-7.20	71.14	74	-2.86					
2483.5	59.67	AV	76	1.9	H	-7.20	52.47	54	-1.53					
2483.5	72.30	PK	145	2.4	V	-7.20	65.1	74	-8.90					
2483.5	54.11	AV	145	2.4	V	-7.20	46.91	54	-7.09					
2500	70.01	PK	171	1.9	H	-7.18	62.83	74	-11.17					
2500	53.04	AV	171	1.9	H	-7.18	45.86	54	-8.14					
2500	65.34	PK	299	1.6	V	-7.18	58.16	74	-15.84					
2500	50.89	AV	299	1.6	V	-7.18	43.71	54	-10.29					
4904	57.72	PK	51	2.1	H	-3.26	54.46	74	-19.54					
4904	44.78	AV	51	2.1	H	-3.26	41.52	54	-12.48					
4904	57.58	PK	73	1.4	V	-3.26	54.32	74	-19.68					
4904	44.55	AV	73	1.4	V	-3.26	41.29	54	-12.71					

**BLE\_1M:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	61.58	PK	188	2.4	H	-7.24	54.34	74	-19.66
2310	48.89	AV	188	2.4	H	-7.24	41.65	54	-12.35
2310	61.50	PK	203	2.2	V	-7.24	54.26	74	-19.74
2310	49.04	AV	203	2.2	V	-7.24	41.80	54	-12.20
2390	68.99	PK	336	1.1	H	-7.22	61.77	74	-12.23
2390	50.30	AV	336	1.1	H	-7.22	43.08	54	-10.92
2390	64.64	PK	237	2.2	V	-7.22	57.42	74	-16.58
2390	50.41	AV	237	2.2	V	-7.22	43.19	54	-10.81
4804	57.16	PK	57	1.6	H	-3.51	53.65	74	-20.35
4804	57.32	PK	130	1.6	V	-3.51	53.81	74	-20.19
Middle Channel(2440MHz)									
4880	57.10	PK	91	1.8	H	-3.38	53.72	74	-20.28
4880	57.33	PK	80	1.8	V	-3.38	53.95	74	-20.05
High Channel(2480 MHz)									
2483.5	78.85	PK	235	1.5	H	-7.2	71.65	74	-2.35
2483.5	52.90	AV	279	1.5	H	-7.20	45.7	54	-8.30
2483.5	73.78	PK	83	1.3	V	-7.20	66.58	74	-7.42
2483.5	51.30	AV	83	1.3	V	-7.20	44.1	54	-9.90
2500	69.45	PK	298	1.7	H	-7.18	62.27	74	-11.73
2500	50.76	AV	298	1.7	H	-7.18	43.58	54	-10.42
2500	64.15	PK	259	1.1	V	-7.18	56.97	74	-17.03
2500	50.55	AV	259	1.1	V	-7.18	43.37	54	-10.63
4960	56.59	PK	255	2	H	-3.01	53.58	74	-20.42
4960	56.92	PK	31	2	V	-3.01	53.91	74	-20.09

**Note:**



Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level (Corrected Amplitude) - Limit

The other spurious emission which is 20dB to the limit or in the noise floor level was not recorded.

When the test result of Peak was below the limit of average, just the Peak value was recorded.

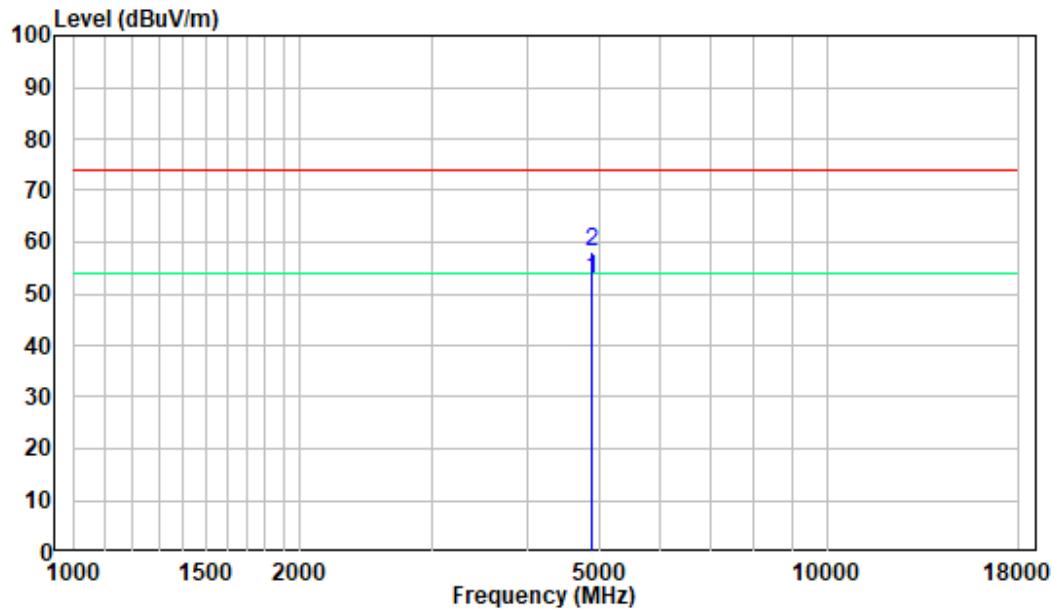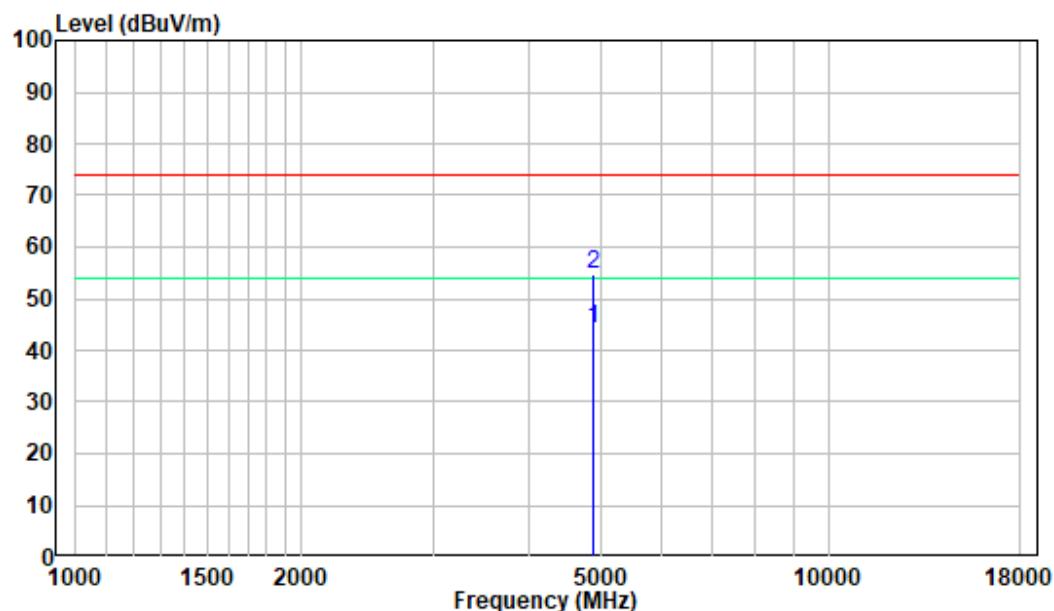**1-18 GHz:****Pre-scan for 802.11b Middle Channel****Horizontal****Vertical**

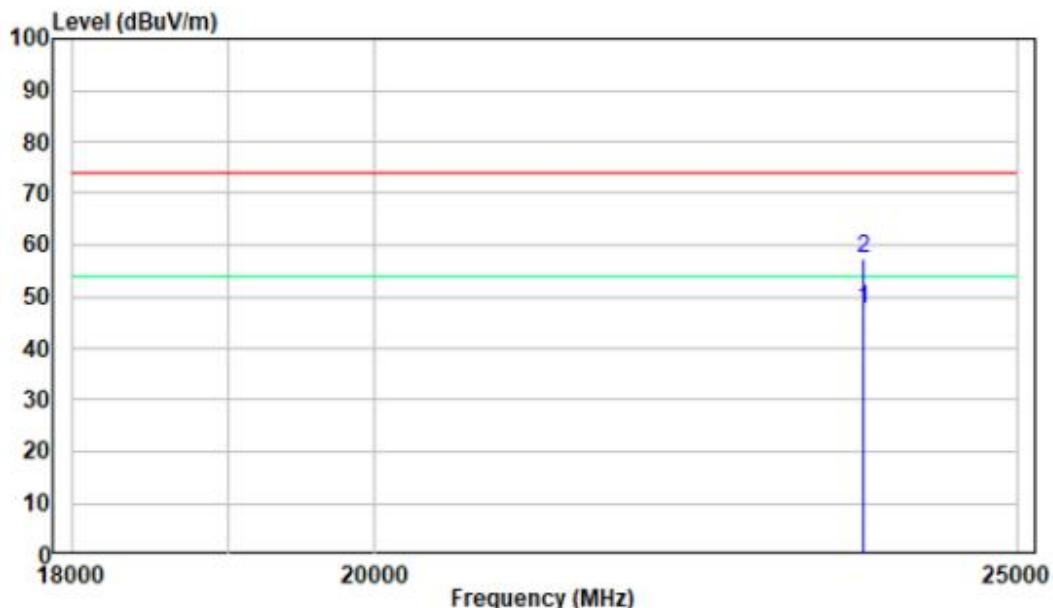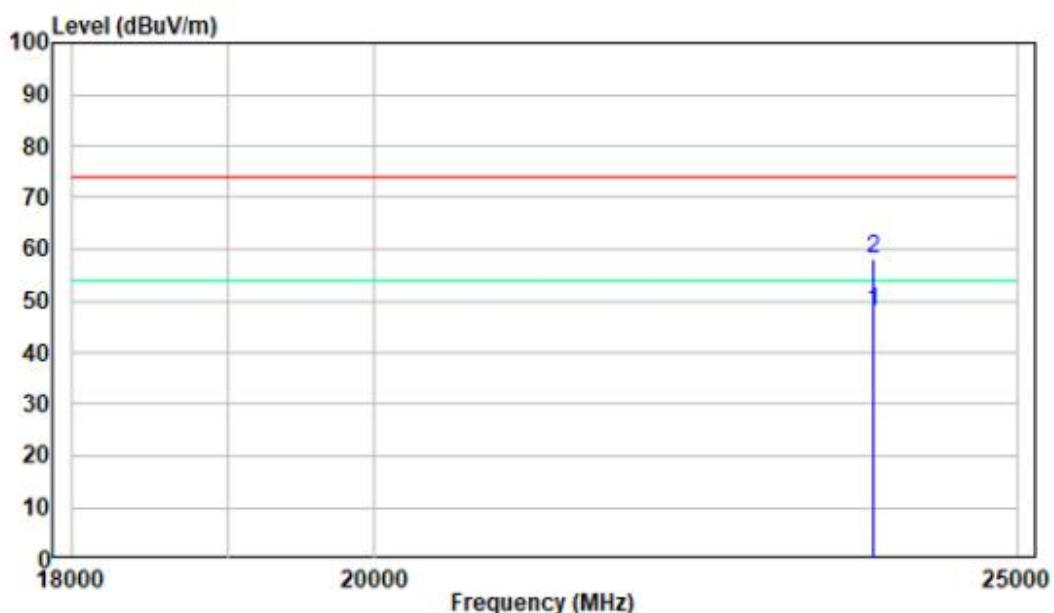**18 -25GHz:****Pre-scan for 802.11b Middle Channel****Horizontal****Vertical**

## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

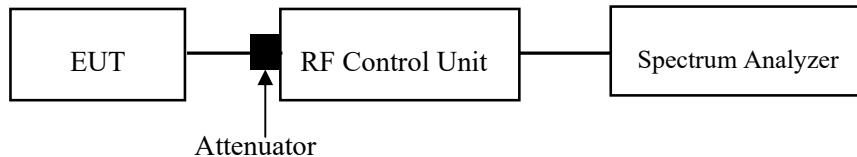

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu on 2023-01-10 and 2023-01-14, 2023-02-21.

EUT operation mode: Transmitting

Test Result Compliant. Please refer to the Appendix BLE & Appendix Wi-Fi.

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.2.3 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

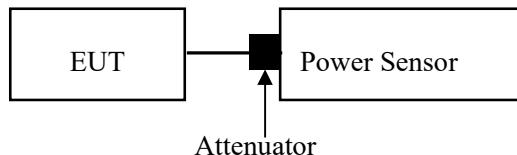

For BLE mode:

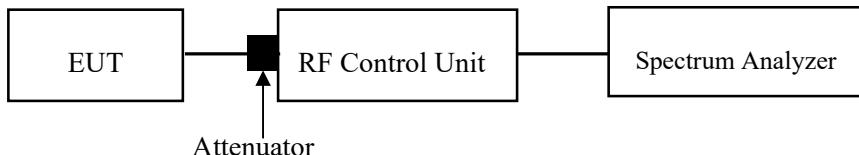

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu on 2023-01-10.

EUT operation mode: Transmitting

Test Result Compliant. Please refer to the Appendix BLE & Appendix Wi-Fi.

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

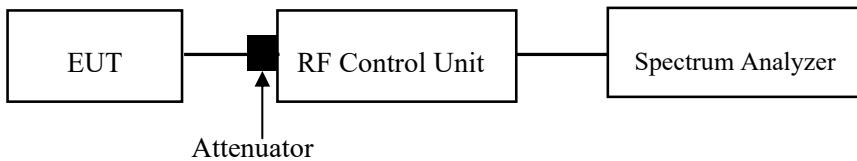

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu on 2023-01-10.

EUT operation mode: Transmitting

Test Result Compliant. Please refer to the Appendix BLE & Appendix Wi-Fi.

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


### Test Procedure

#### For BLE:

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
2. Set the VBW  $\geq 3 \times \text{RBW}$ .
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

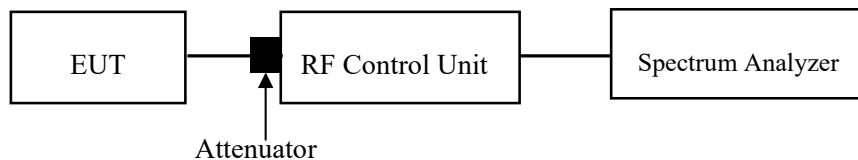


#### For Wi-Fi:

Test Method: ANSI C63.10-2013 Clause 11.10.3

Use this procedure when the maximum average conducted output power in the fundamental emission is used to demonstrate compliance.

1. Measure the duty cycle ( $D$ ) of the transmitter output signal as described in ANSI C63.10-2013 11.6.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = Power Averaging (rms).
6. Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
7. Sweep time = auto couple.
8. Trace mode = trace averaging (rms) mode over a minimum of 100 traces.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	45 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Andy Yu on 2023-01-10 and 2023-02-28.*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


## APPENDIX Wi-Fi


### Appendix A: DTS Bandwidth Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.52	0.5	PASS
		2437	9.52	0.5	PASS
		2462	9.56	0.5	PASS
11G	Ant1	2412	10.12	0.5	PASS
		2437	11.32	0.5	PASS
		2462	13.80	0.5	PASS
11N20SISO	Ant1	2412	11.32	0.5	PASS
		2437	13.80	0.5	PASS
		2462	13.80	0.5	PASS
11N40SISO	Ant1	2422	33.84	0.5	PASS
		2437	30.08	0.5	PASS
		2452	33.84	0.5	PASS

## Test Graphs

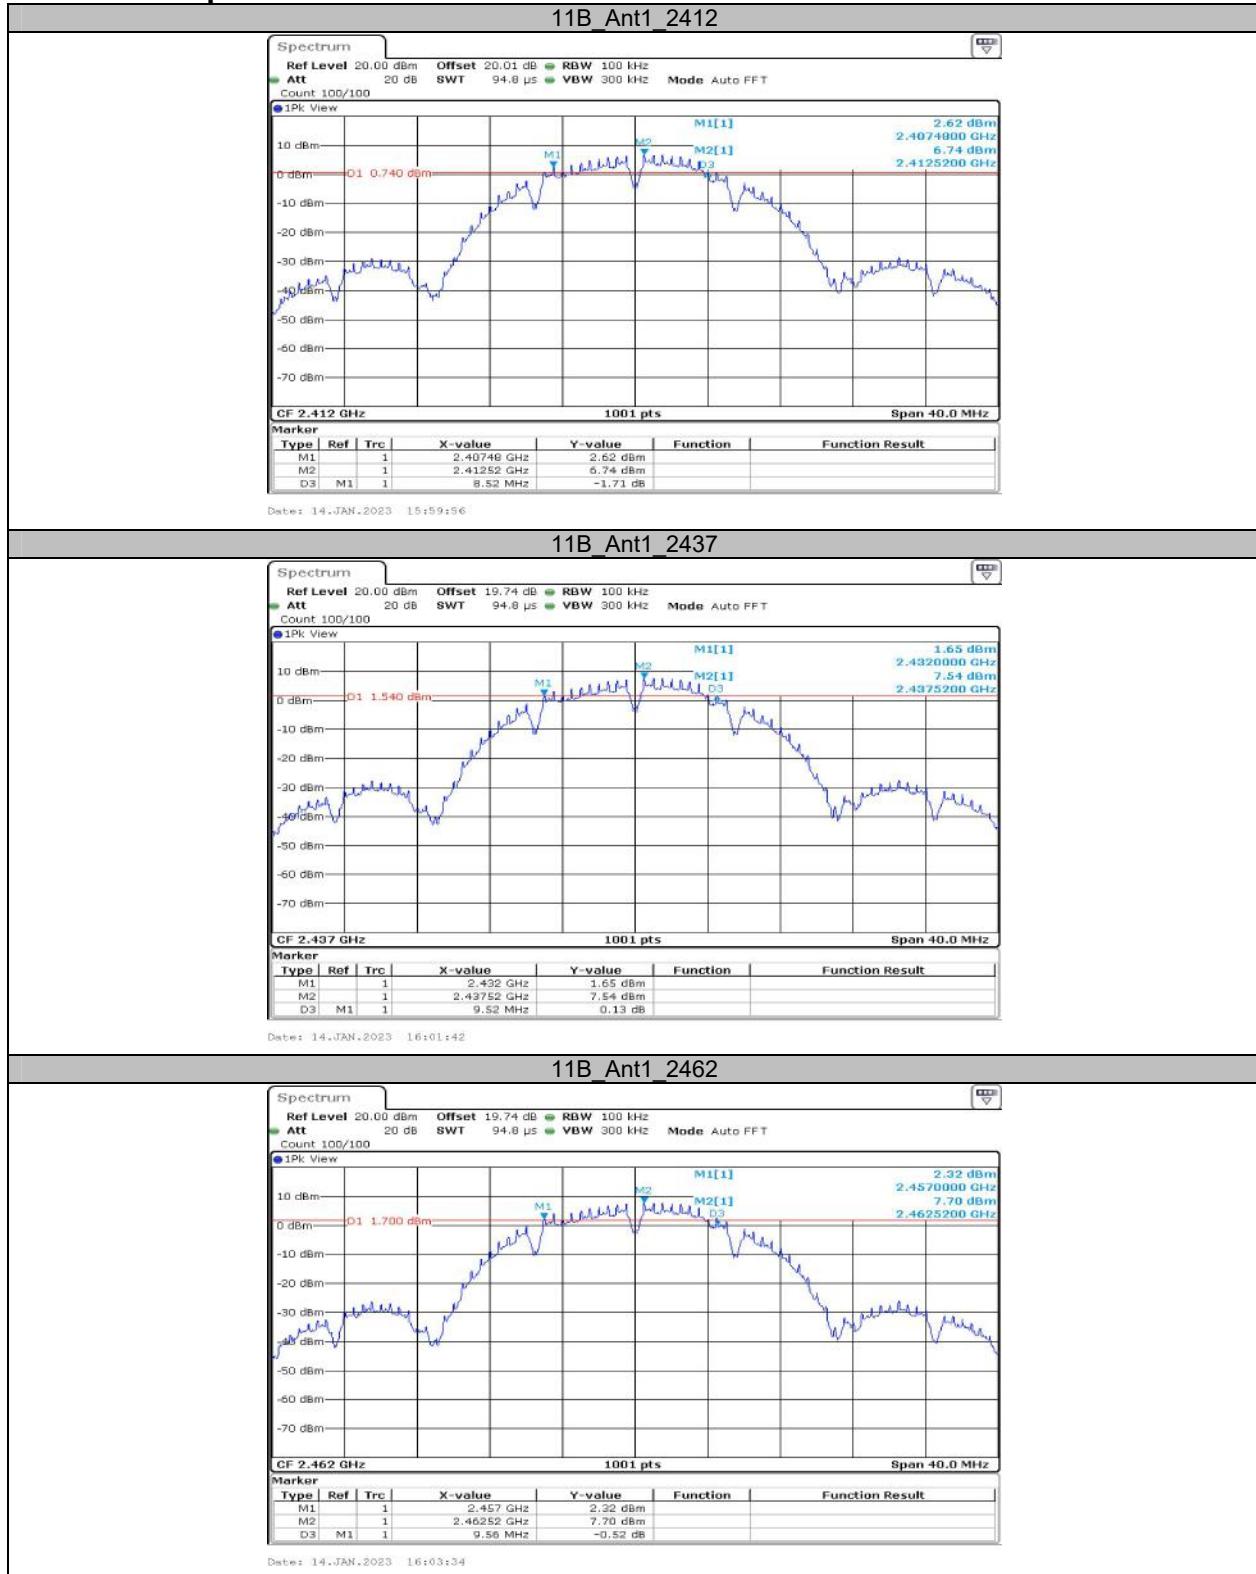

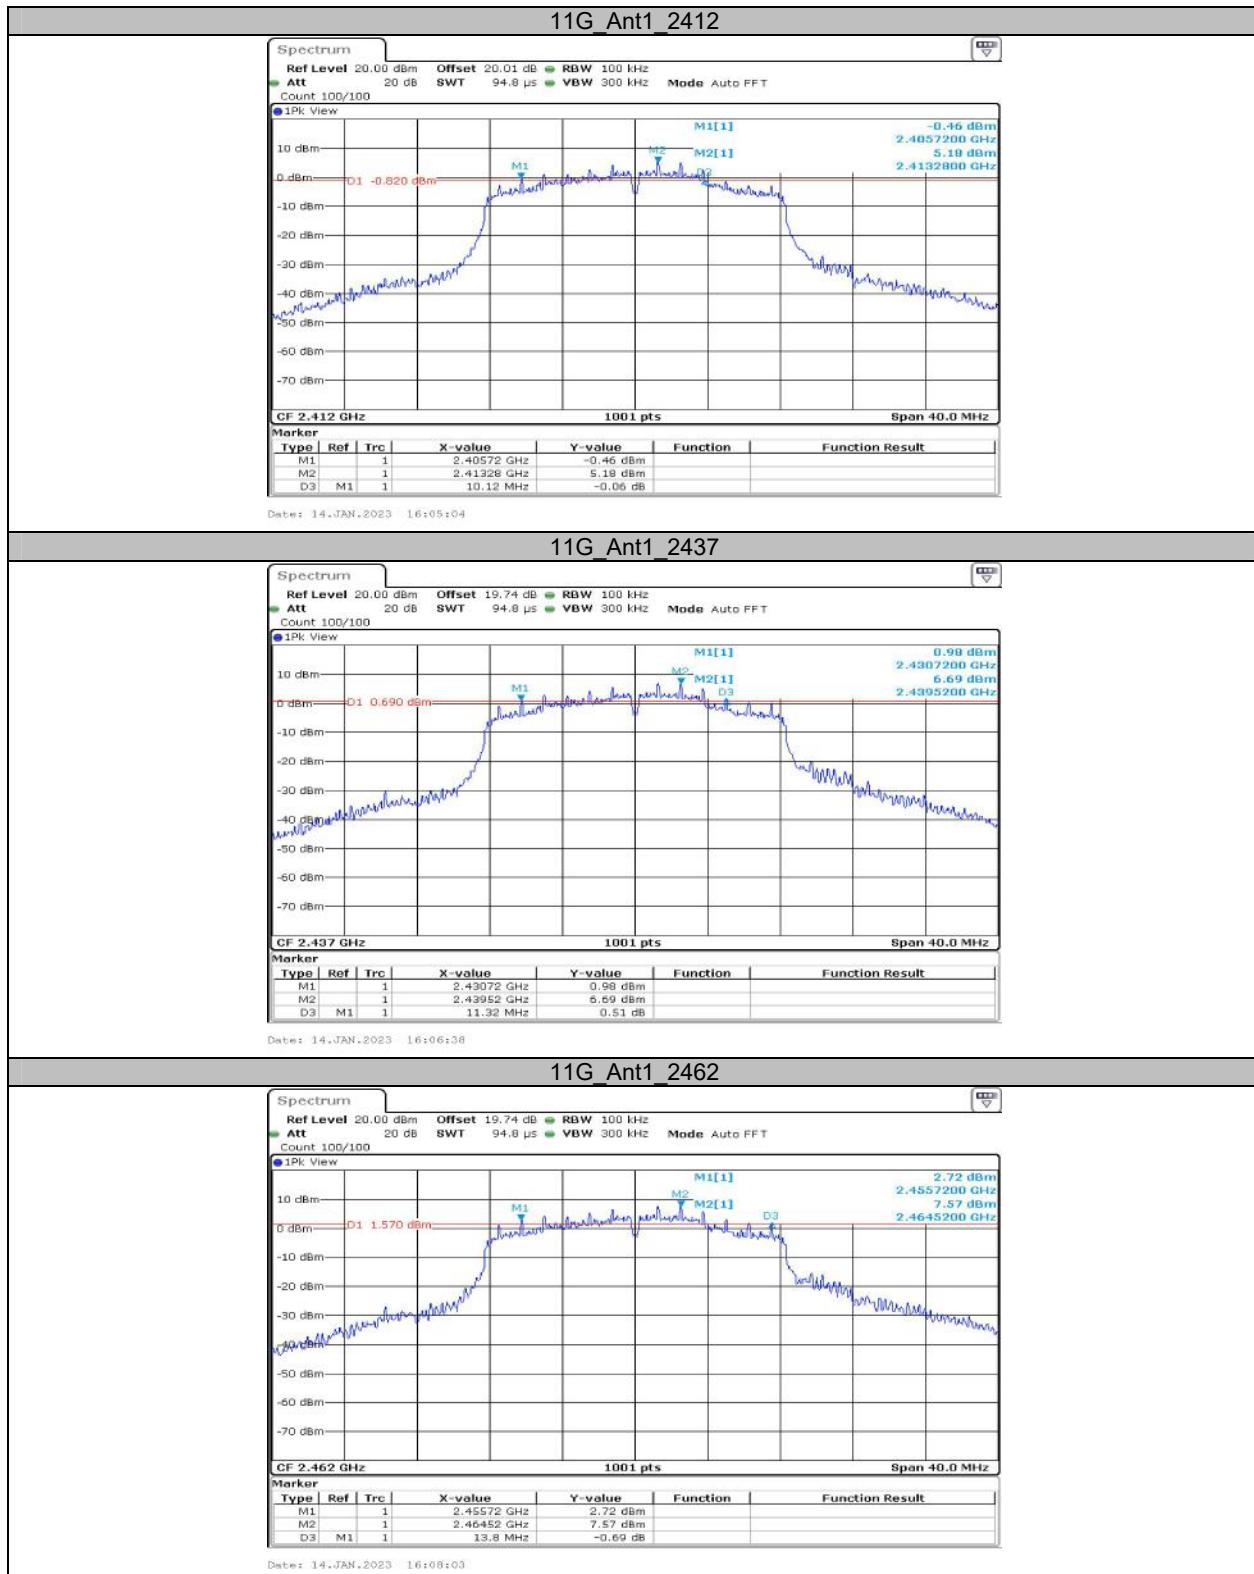

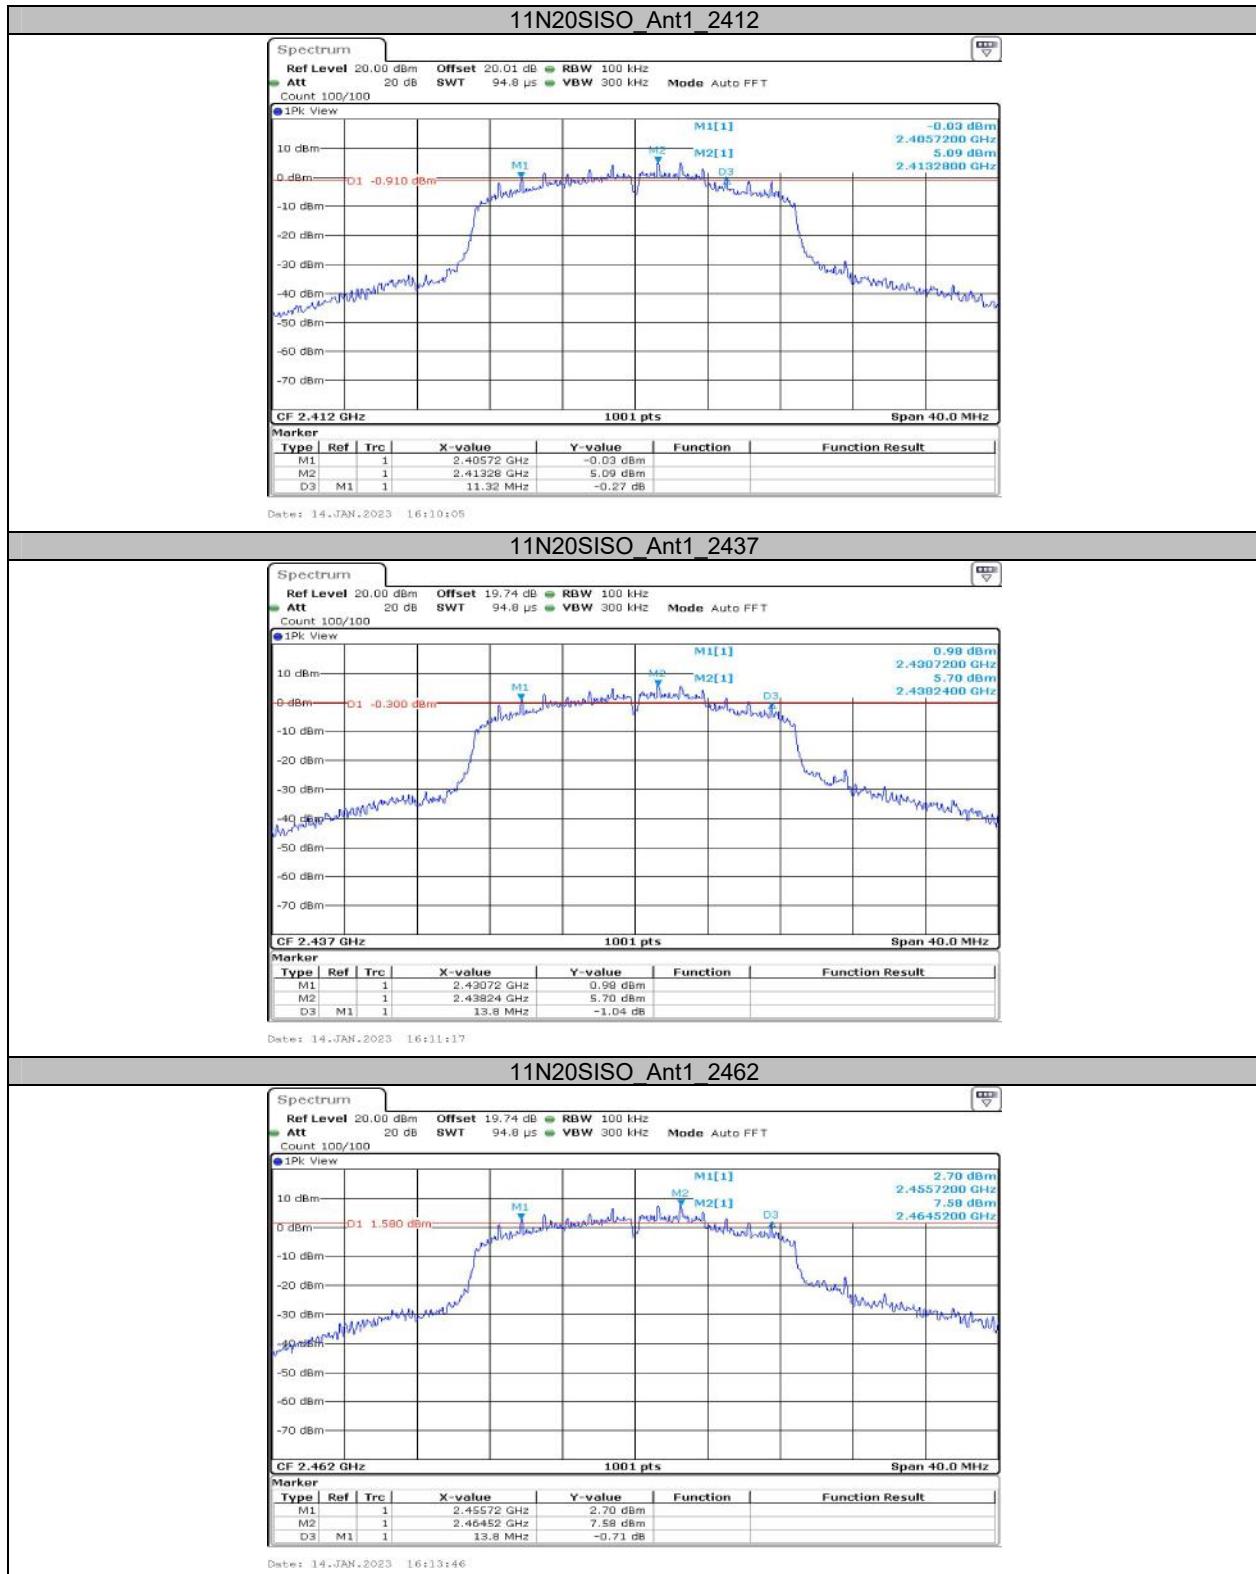


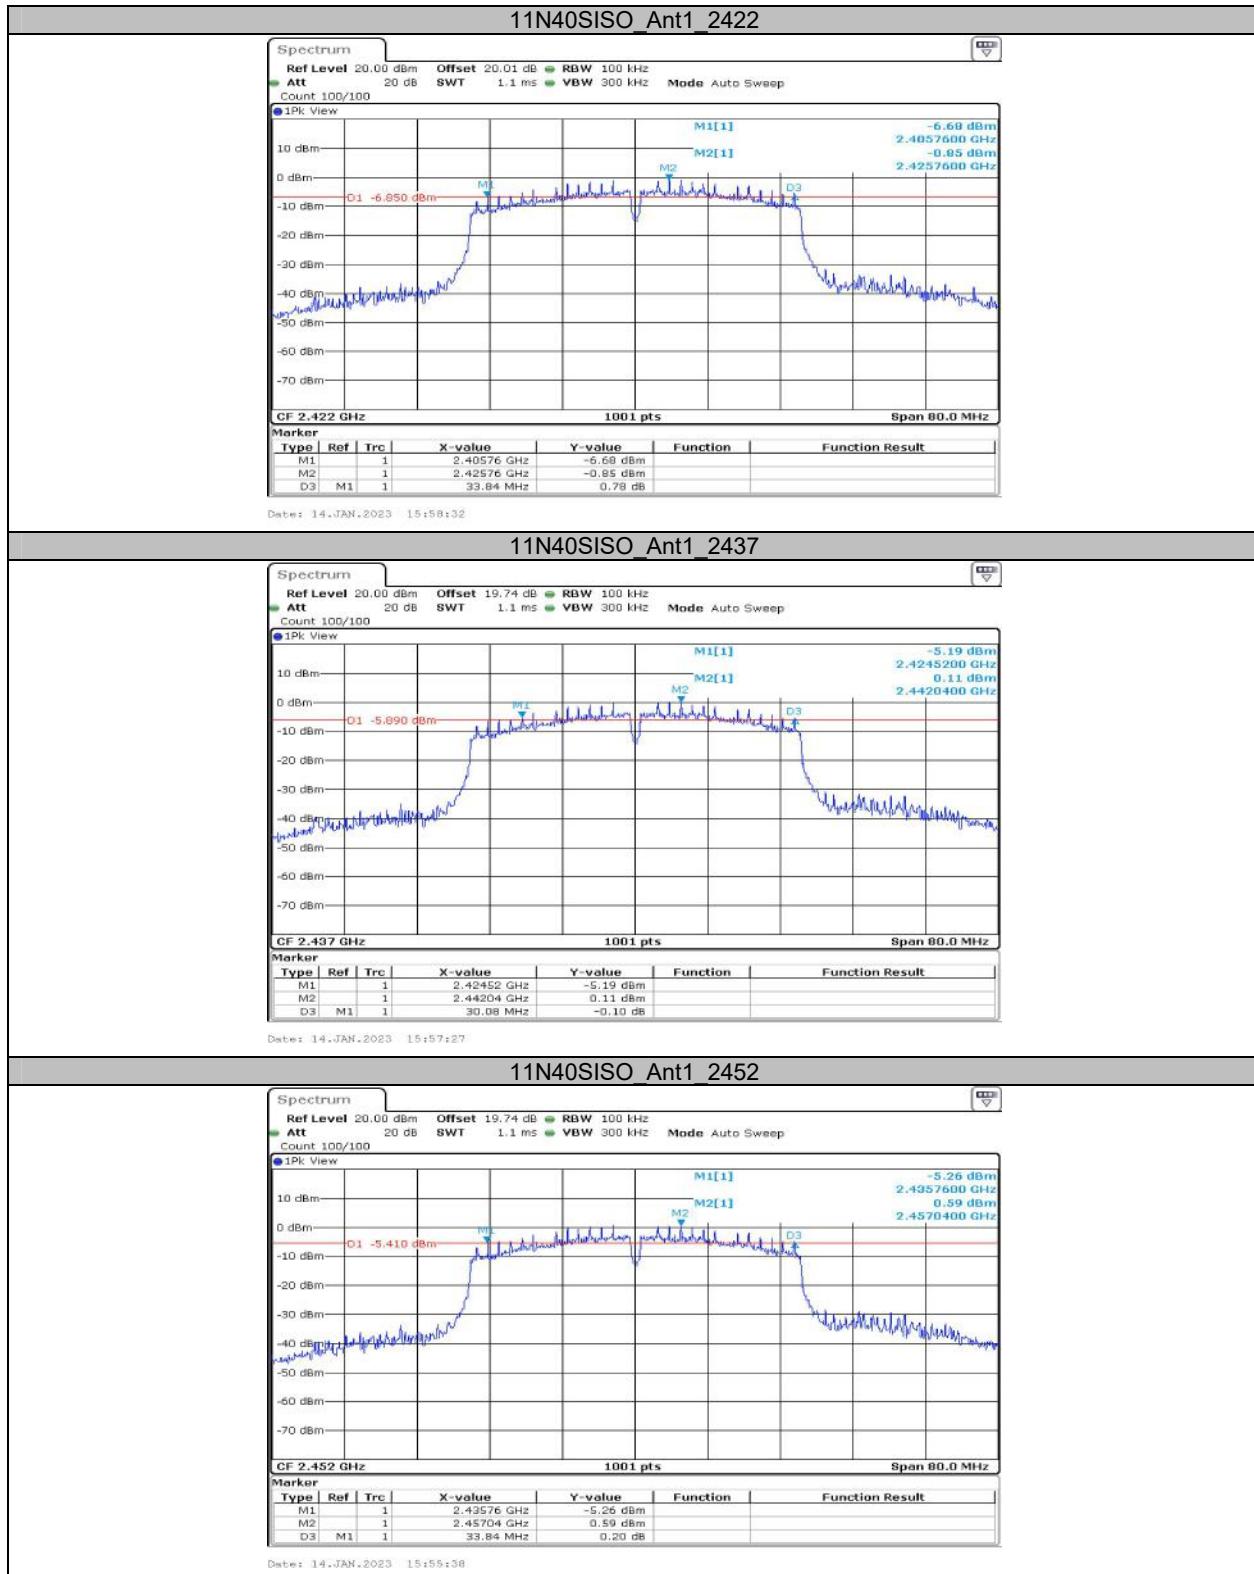


**Appendix B: Occupied Channel Bandwidth  
Test Result**

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.865	---	---
		2437	14.785	---	---
		2462	14.905	---	---
11G	Ant1	2412	16.224	---	---
		2437	16.264	---	---
		2462	16.543	---	---
11N20SISO	Ant1	2412	17.023	---	---
		2437	17.023	---	---
		2462	17.423	---	---
11N40SISO	Ant1	2422	35.884	---	---
		2437	35.644	---	---
		2452	35.804	---	---

## Test Graphs

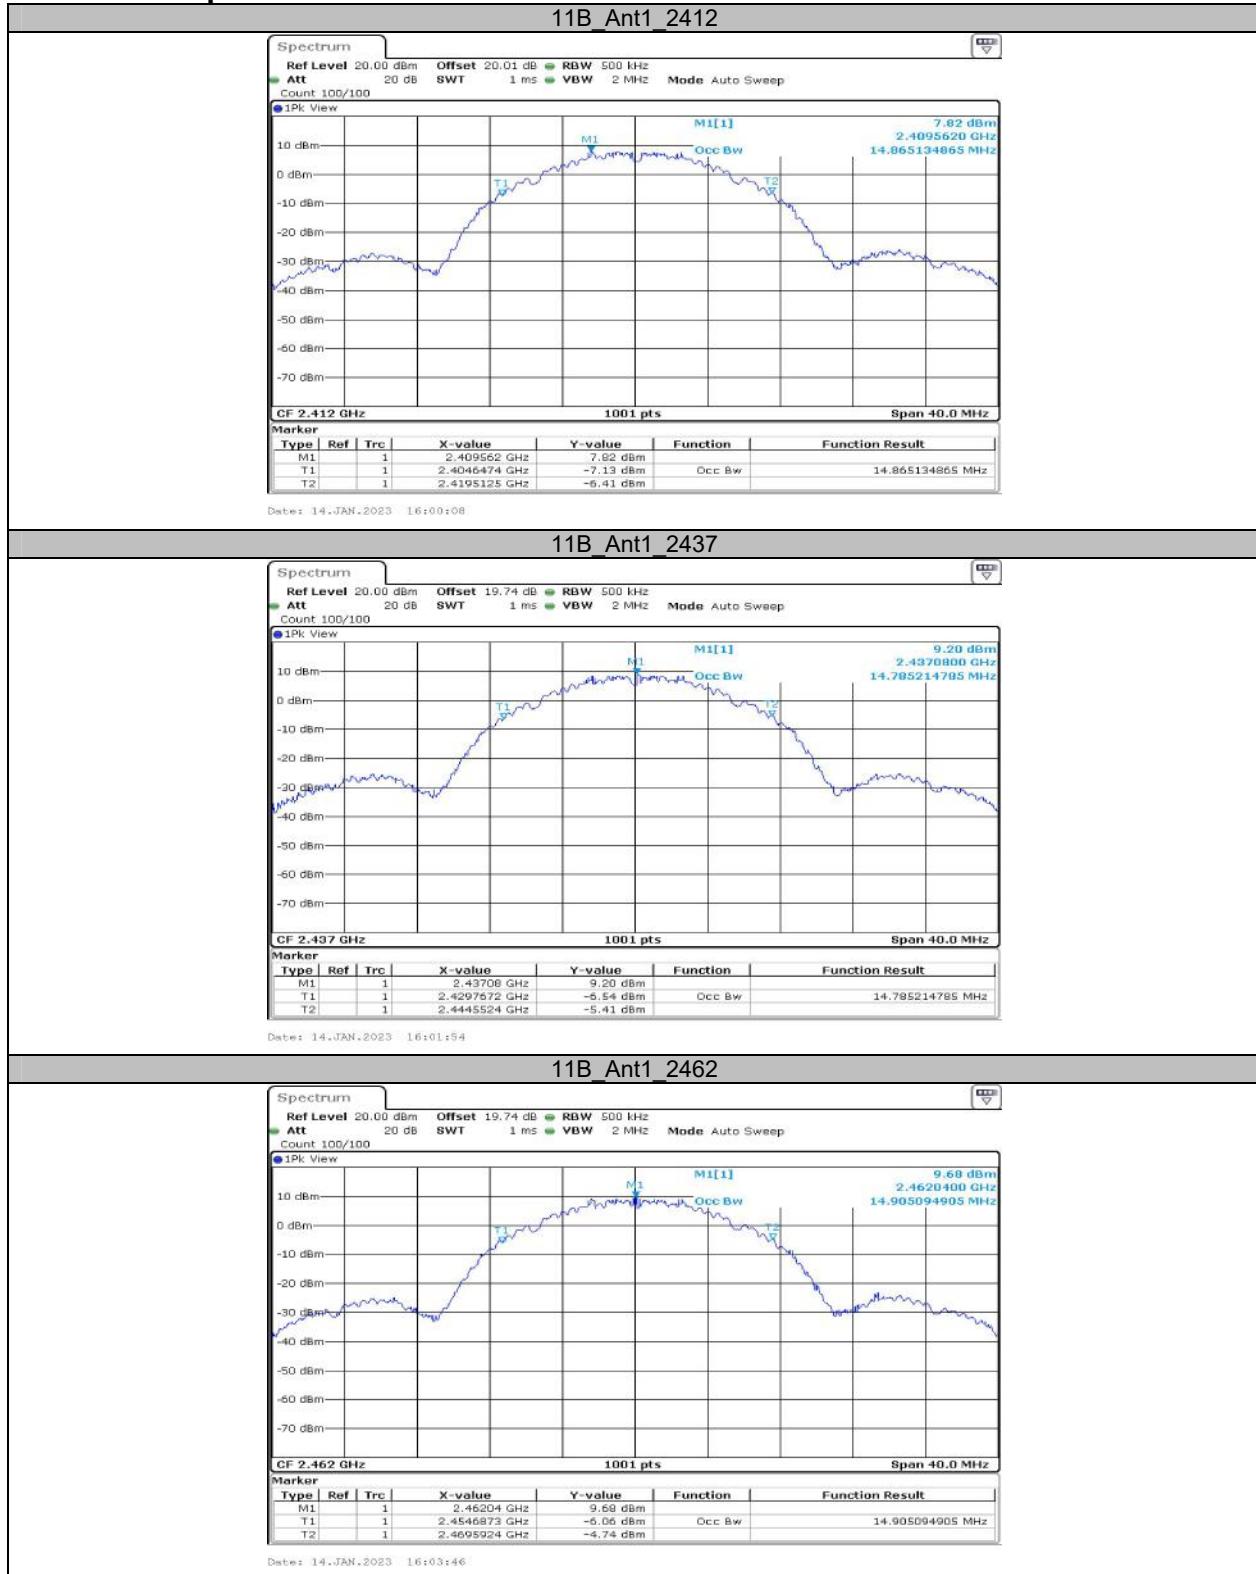

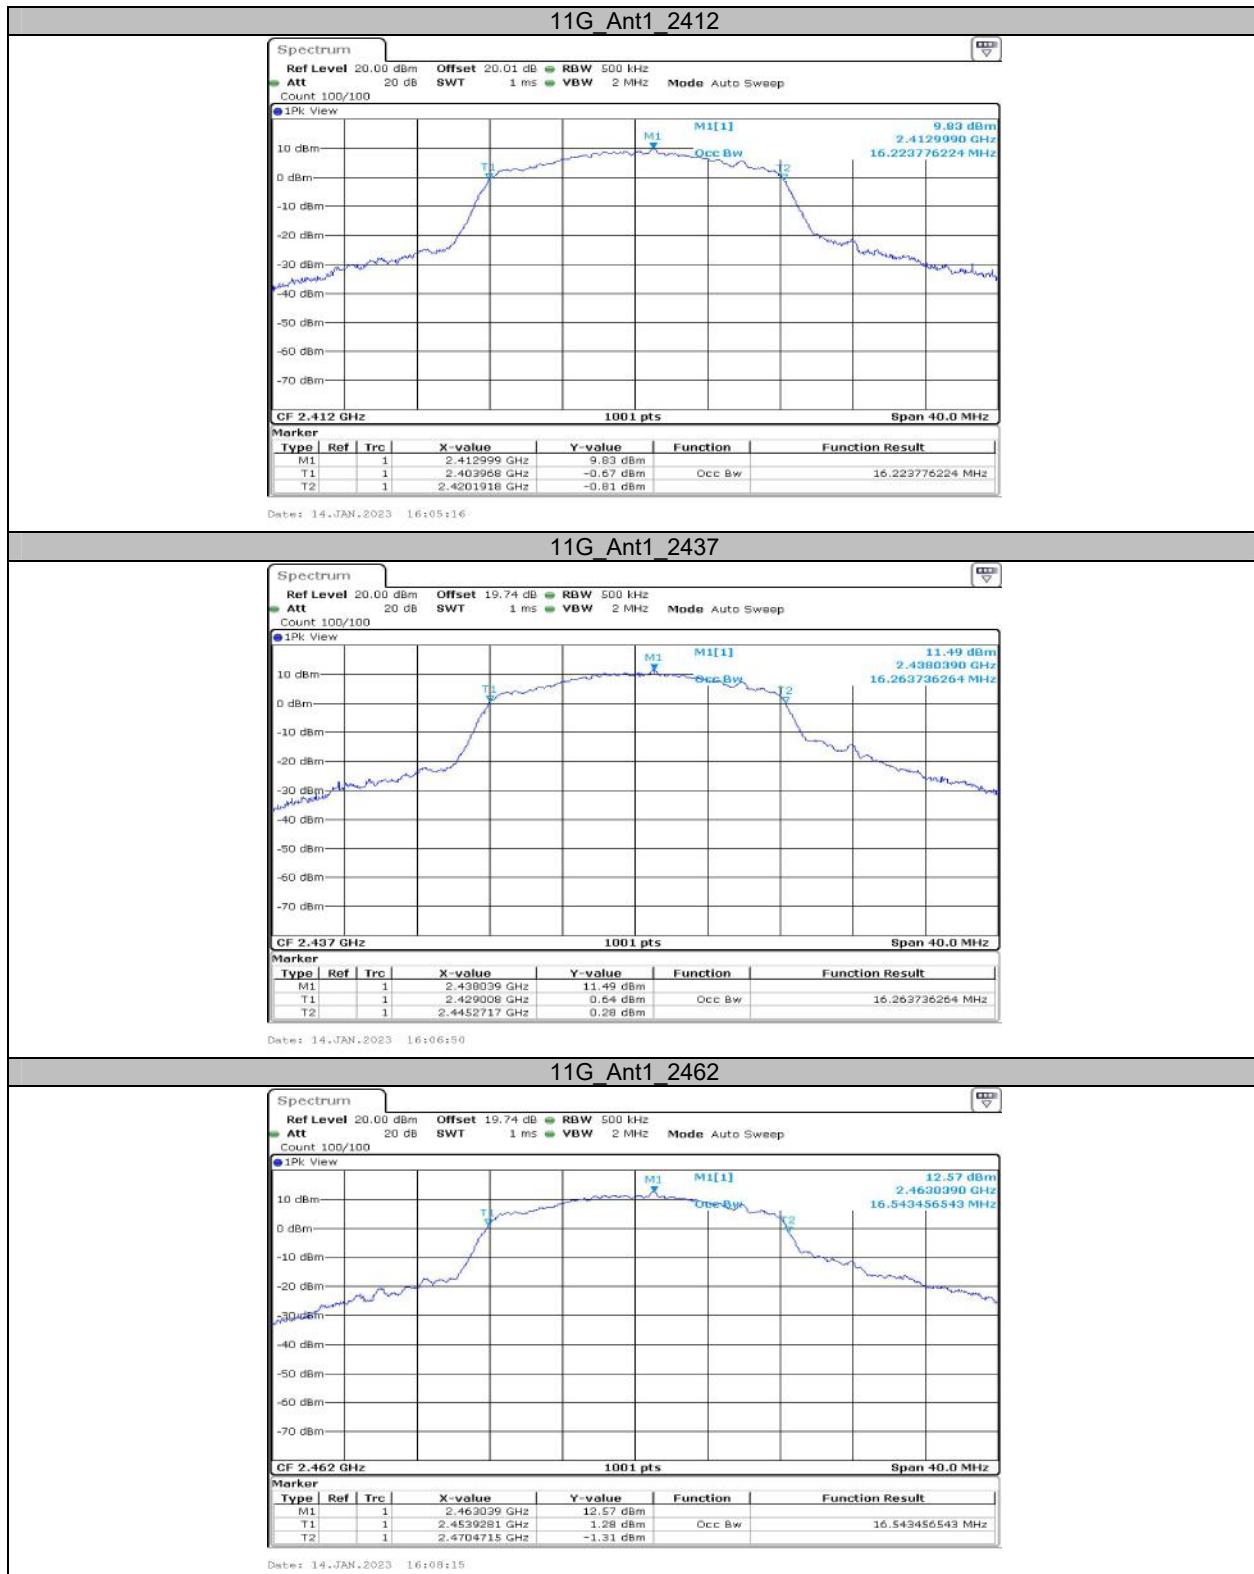






**Appendix C: Maximum conducted output power  
Test Result**


Test Mode	Antenna	Frequency[M Hz]	Average Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	11.80	≤30.00	PASS
		2437	12.82	≤30.00	PASS
		2462	12.55	≤30.00	PASS
11G	Ant1	2412	8.64	≤30.00	PASS
		2437	9.44	≤30.00	PASS
		2462	10.39	≤30.00	PASS
11N20SISO	Ant1	2412	8.27	≤30.00	PASS
		2437	9.31	≤30.00	PASS
		2462	10.27	≤30.00	PASS
11N40SISO	Ant1	2422	5.15	≤30.00	PASS
		2437	7.83	≤30.00	PASS
		2452	7.89	≤30.00	PASS


**Appendix D: Maximum power spectral density****Test Result (Average)**


Test Mode	Antenna	Frequency[MHz]	Result[dBm/10kHz]	Limit[dBm/3kHz]
11B	Ant1	2412	-15.34	≤8.00
		2437	-13.81	≤8.00
		2462	-13.81	≤8.00
11G	Ant1	2412	-17.47	≤8.00
		2437	-15.66	≤8.00
		2462	-14.22	≤8.00
11N20SISO	Ant1	2412	-17.37	≤8.00
		2437	-15.82	≤8.00
		2462	-15.61	≤8.00
11N40SISO	Ant1	2422	-19.78	≤8.00
		2437	-18.10	≤8.00
		2452	-16.97	≤8.00


## Test Graphs

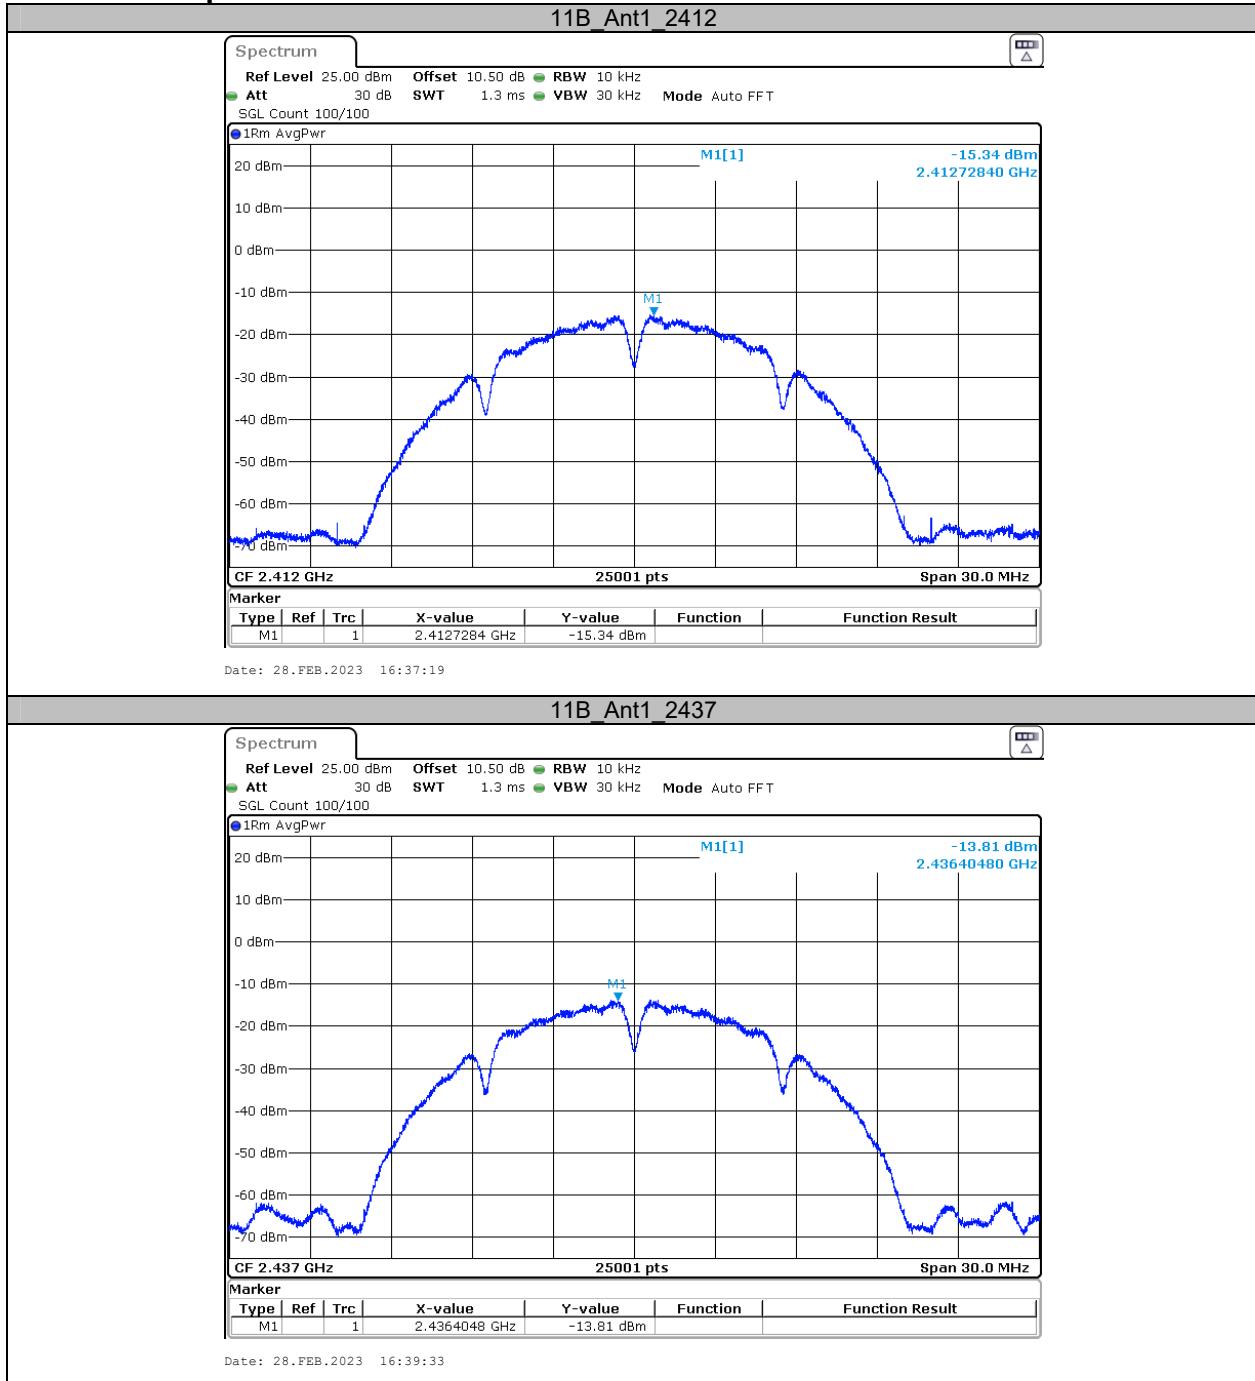


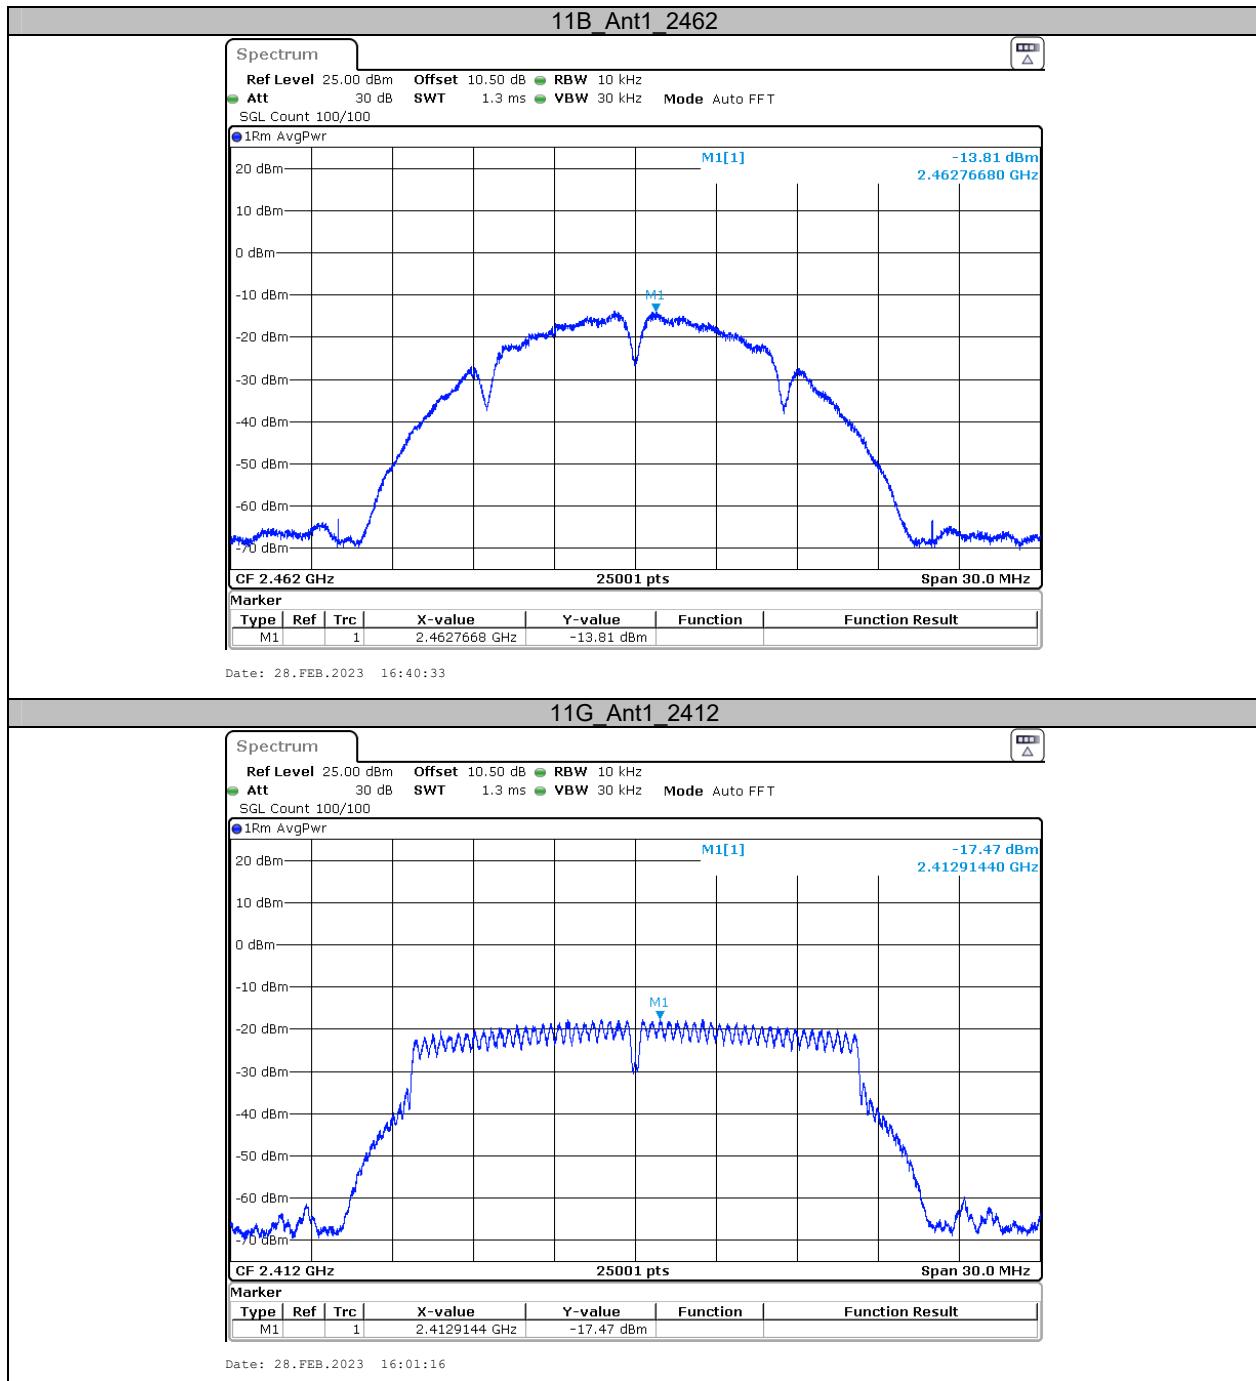

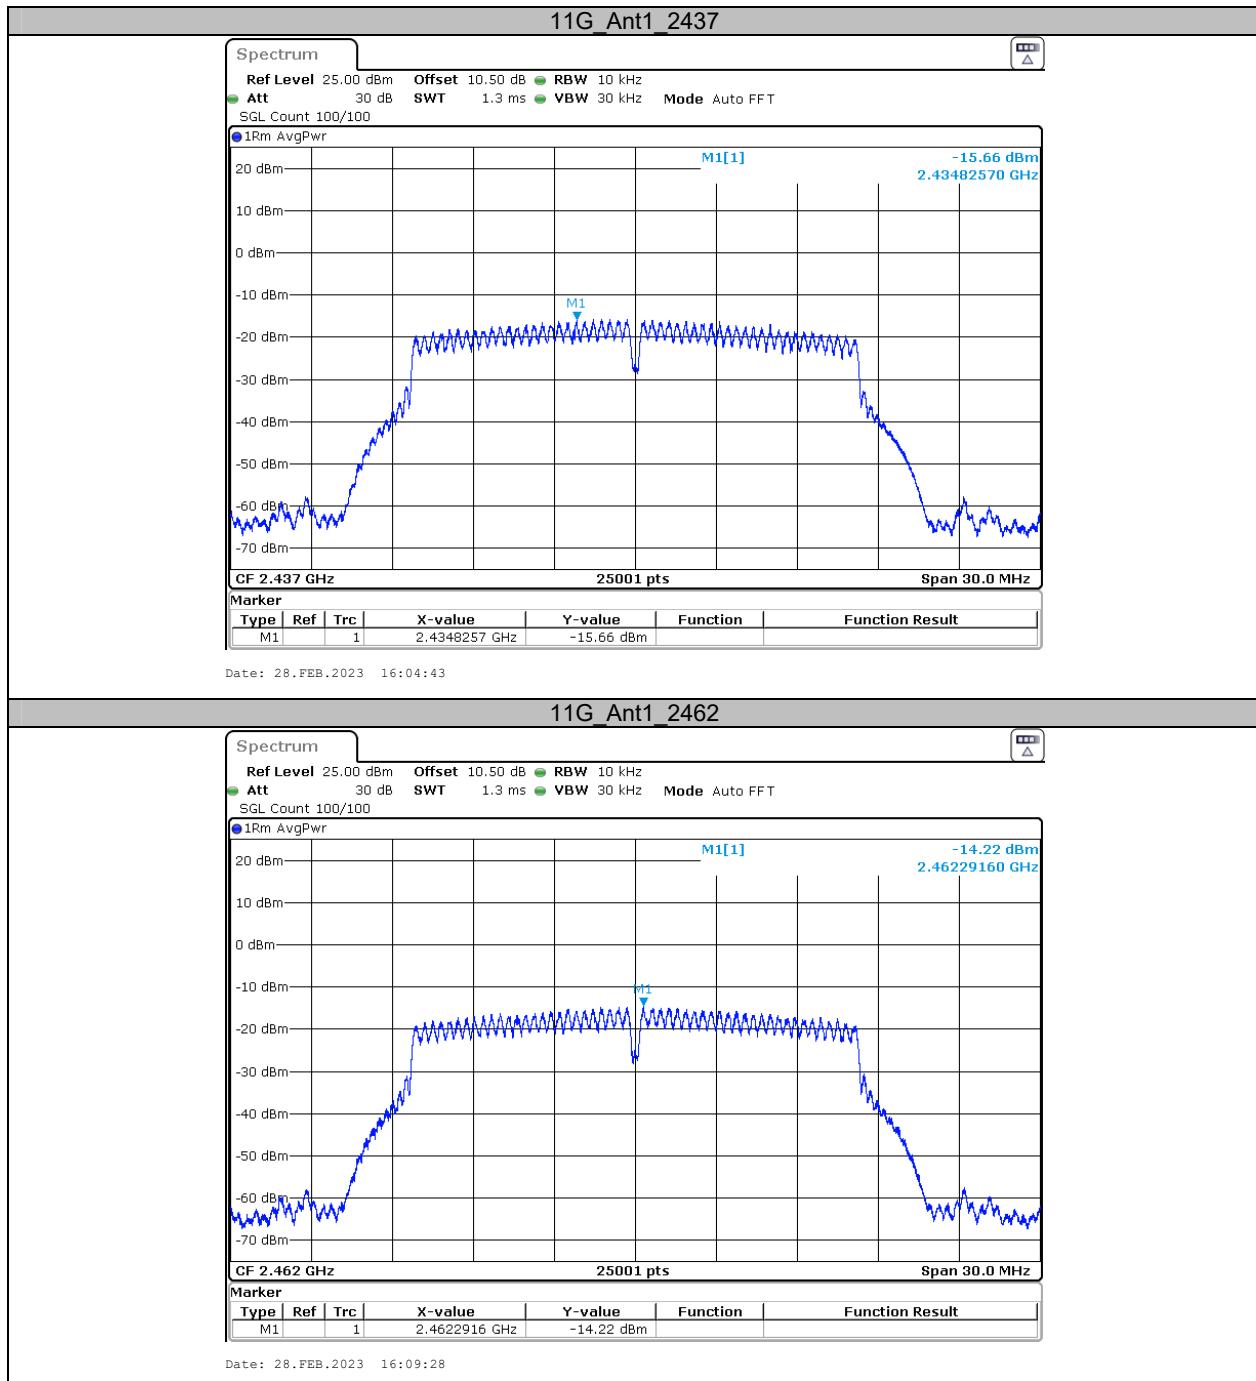

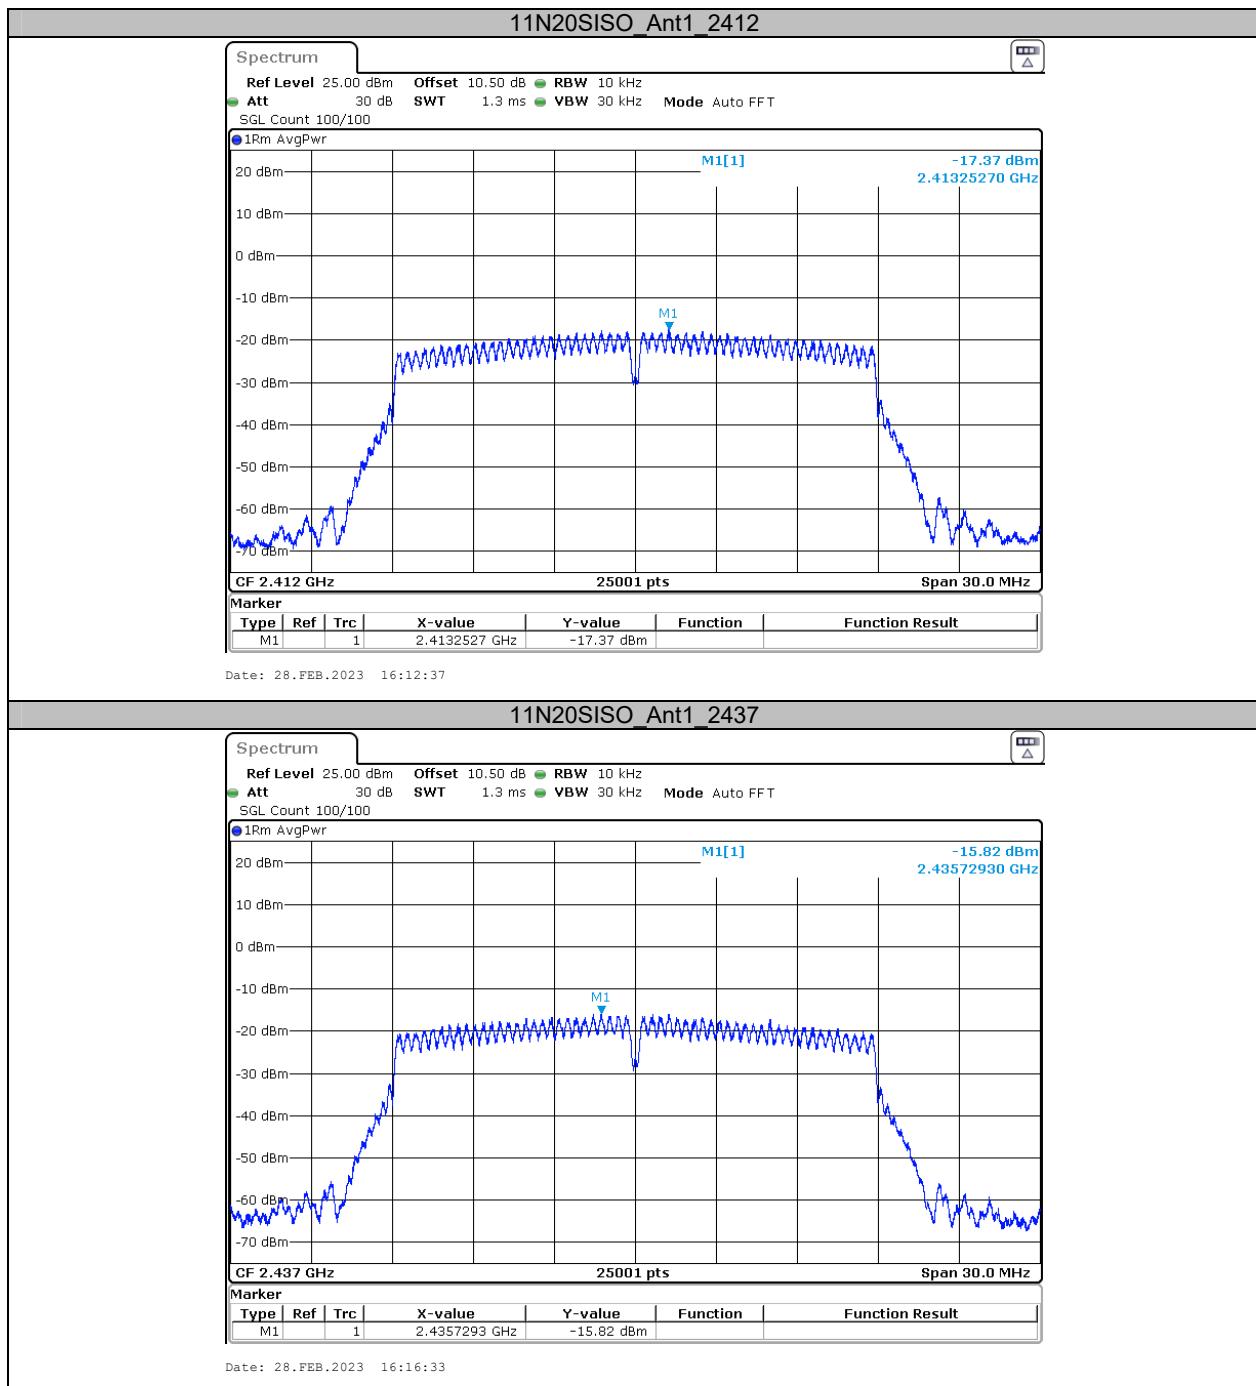


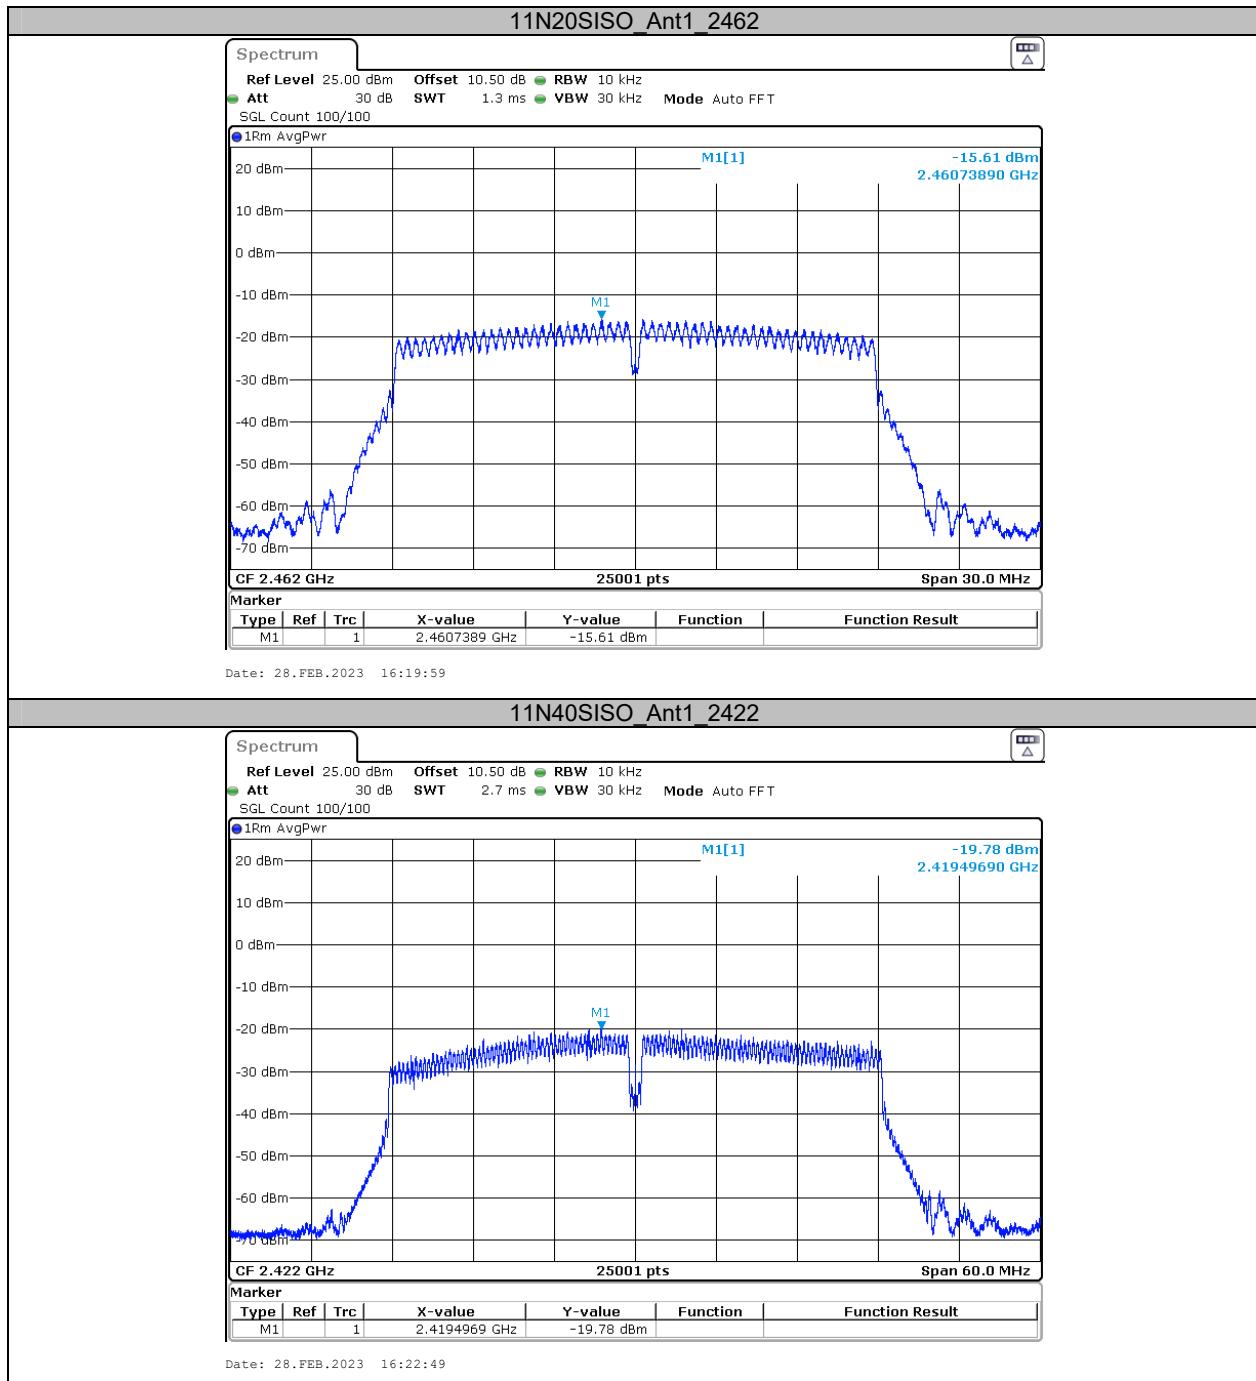


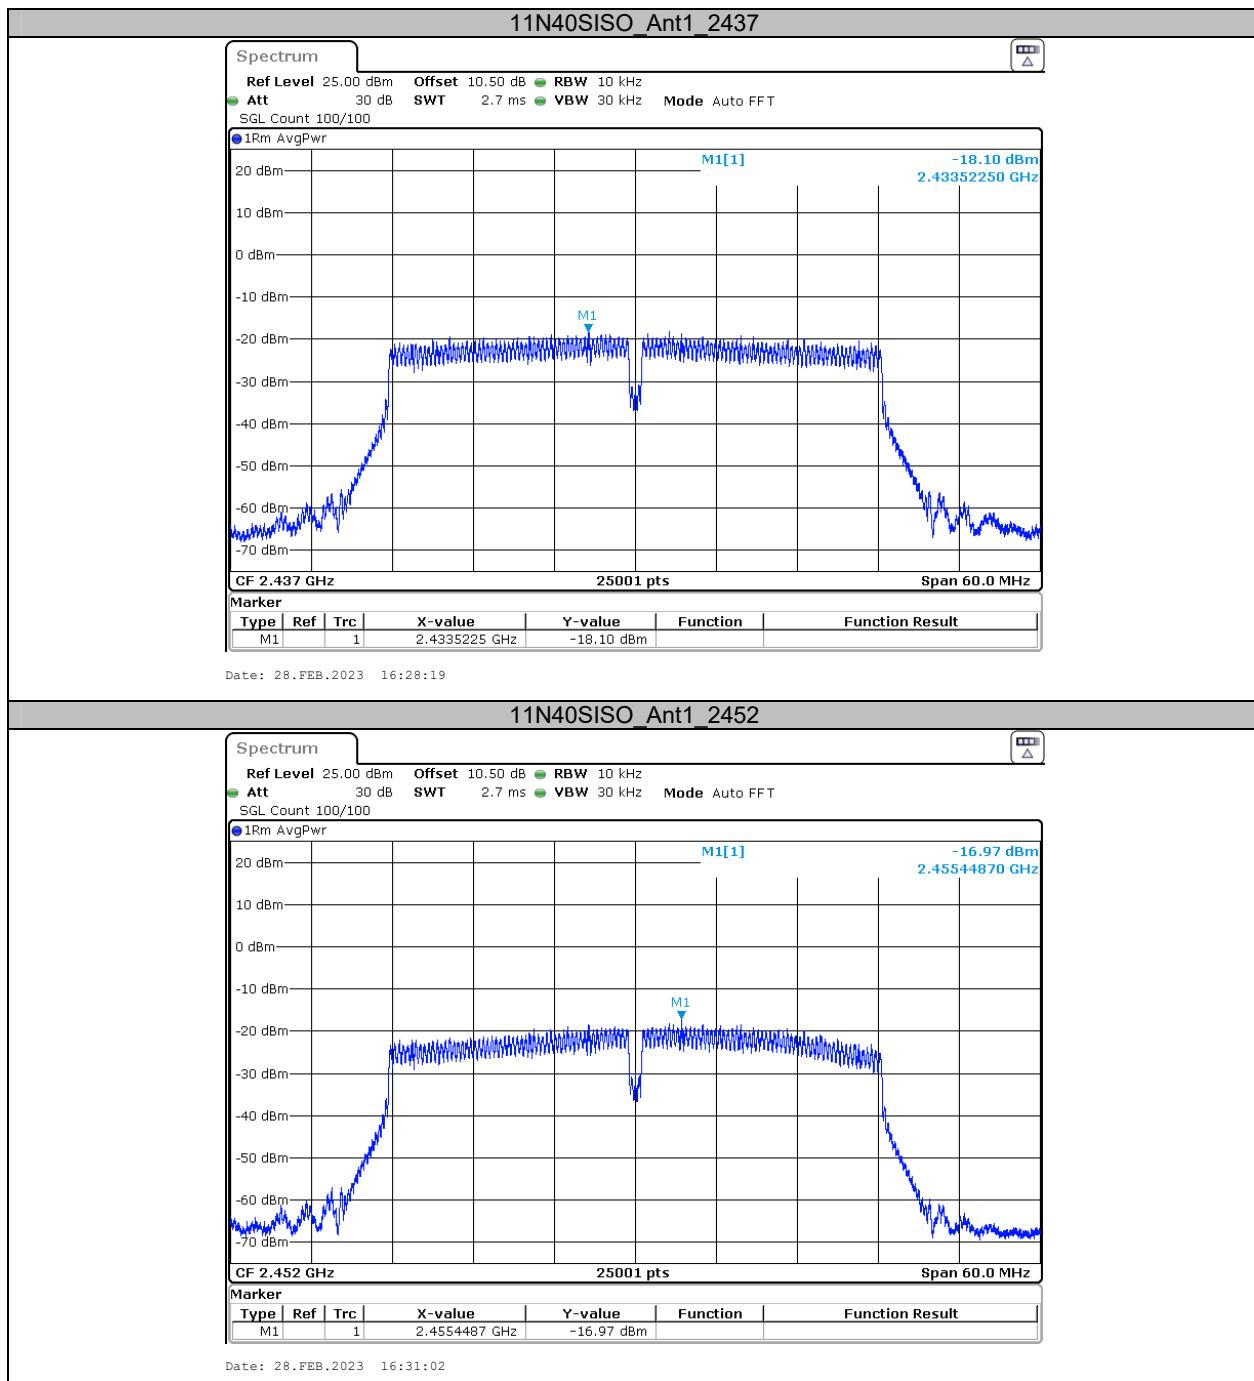


## Appendix E: Band edge measurements

### Test Graphs

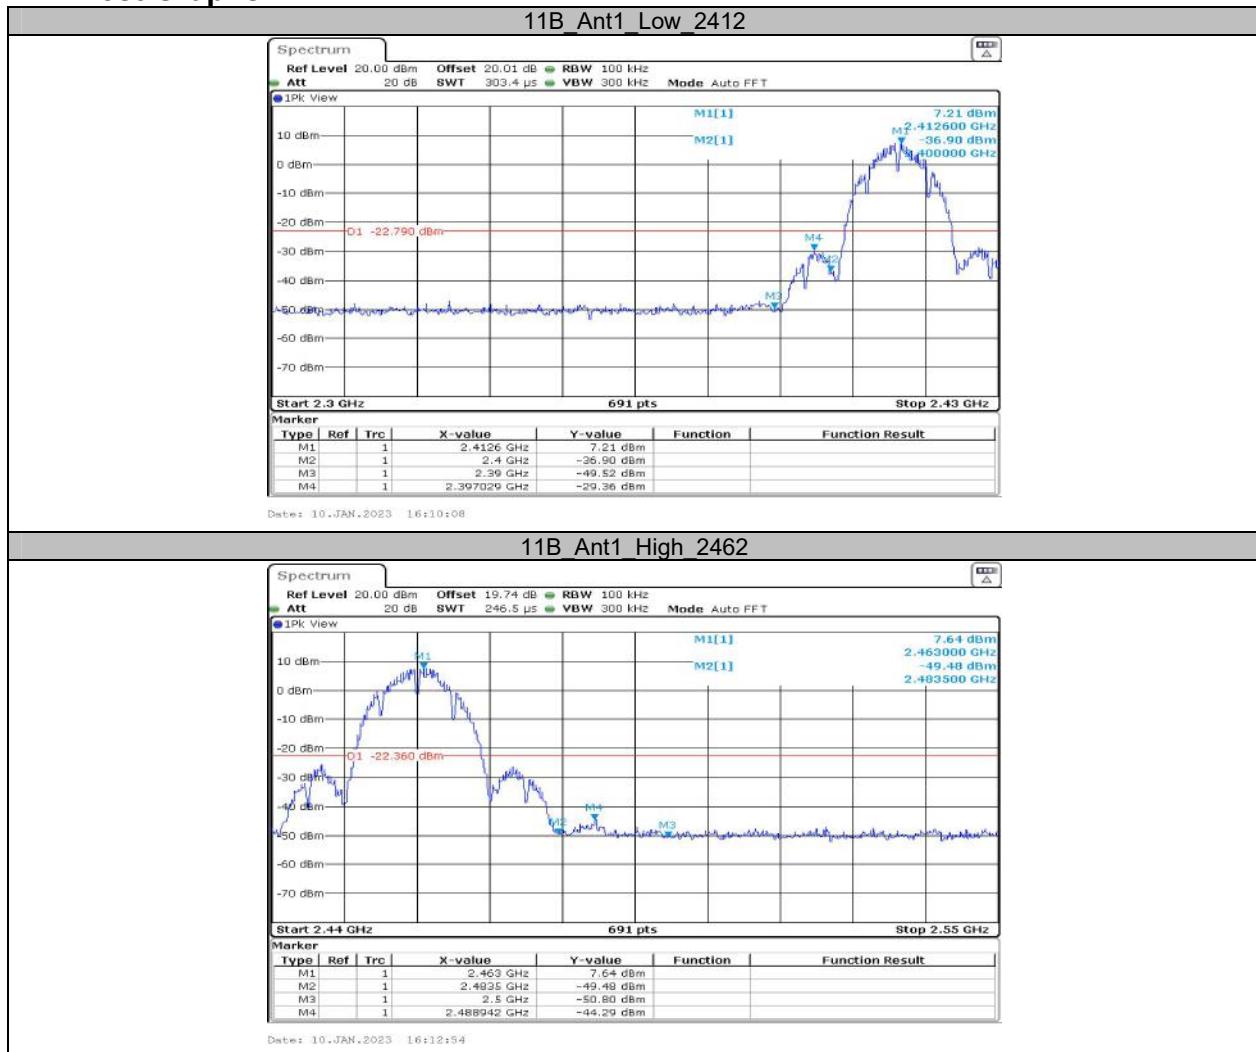

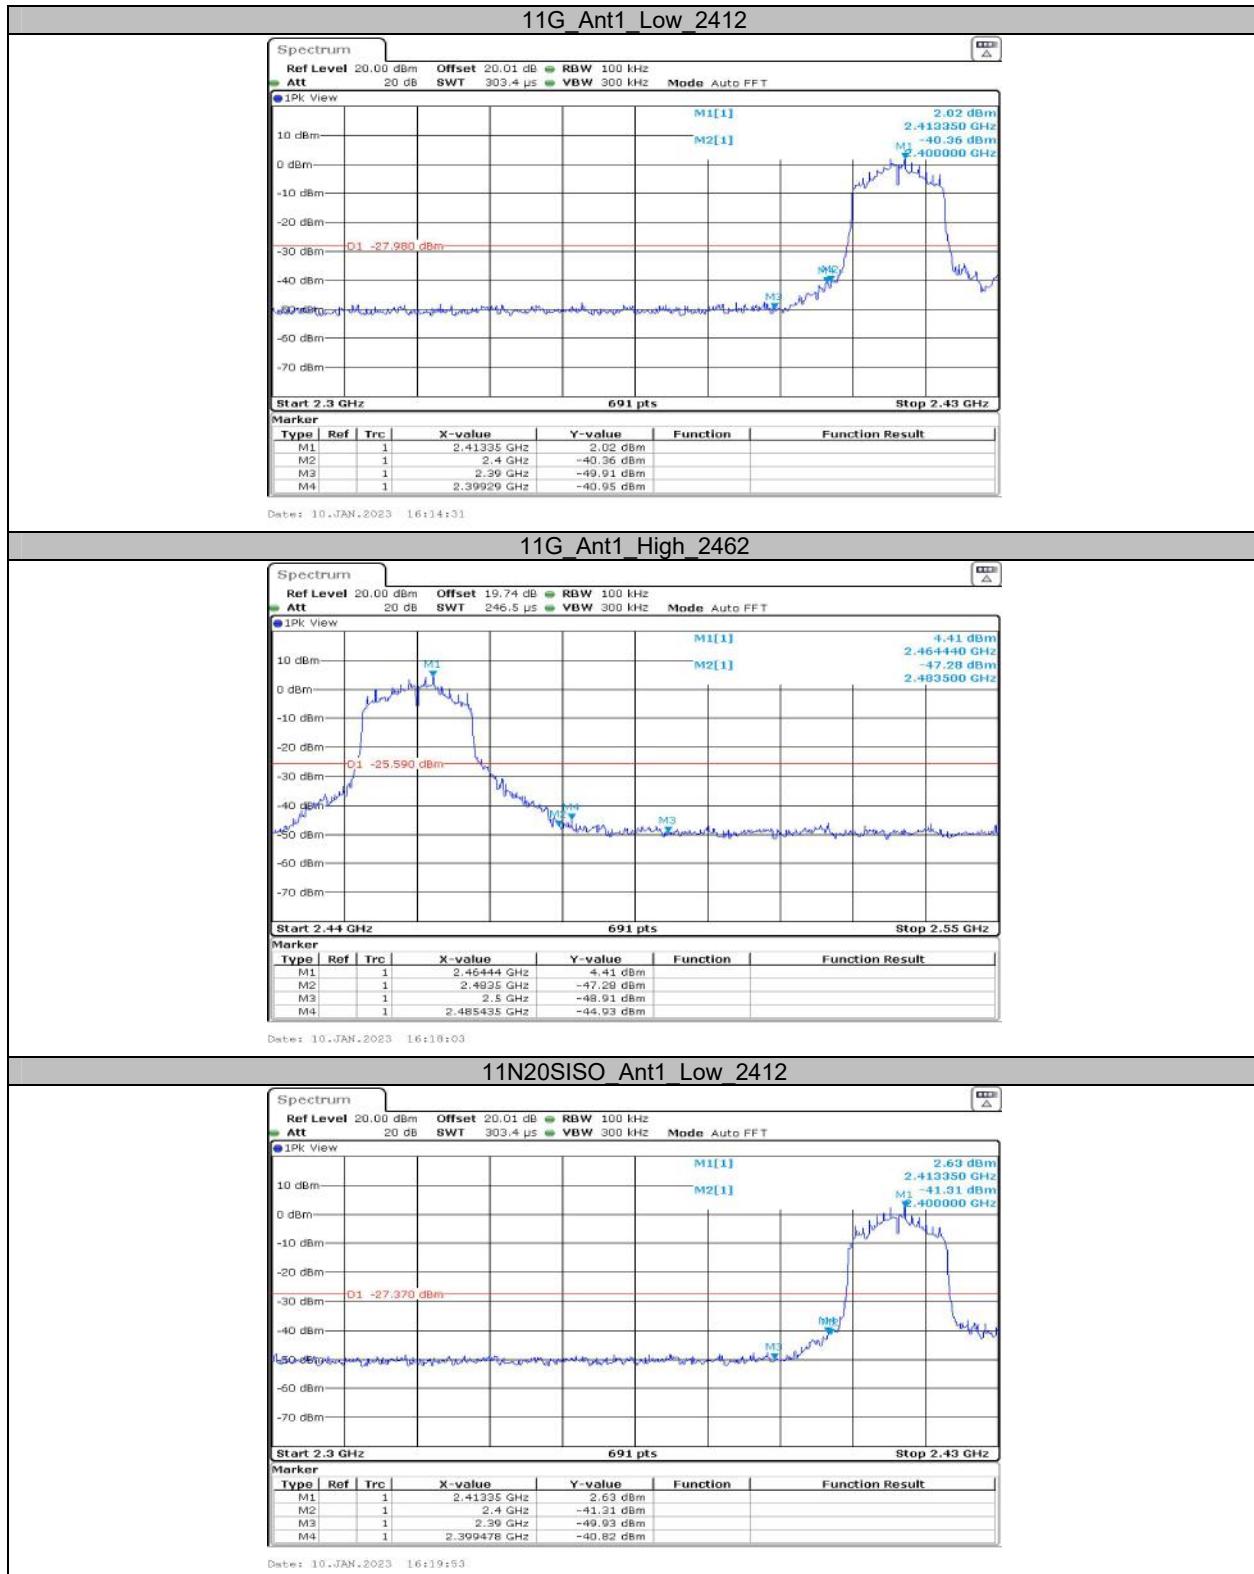


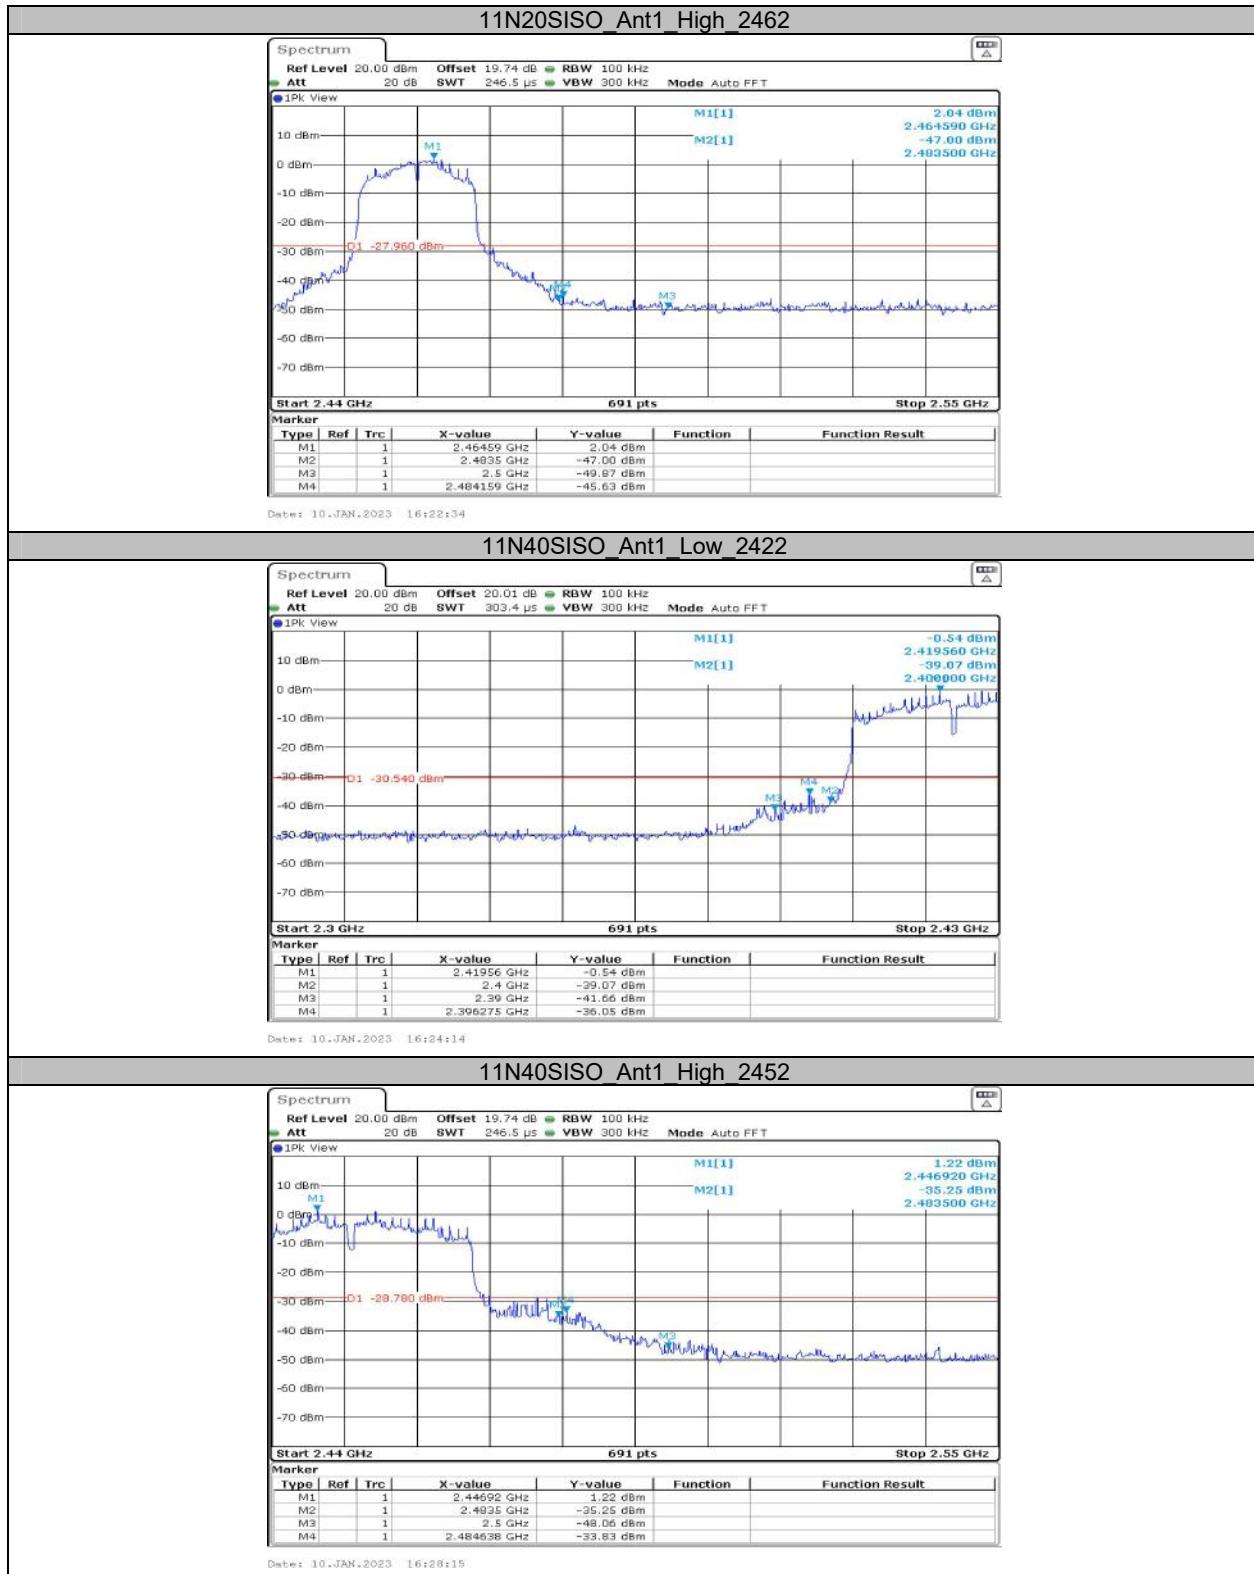


**Appendix F: Duty Cycle  
Test Result**

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2437	100.00	100.00	100.00
11G	Ant1	2437	100.00	100.00	100.00
11N20SISO	Ant1	2437	100.00	100.00	100.00
11N40SISO	Ant1	2437	100.00	100.00	100.00

## Test Graphs

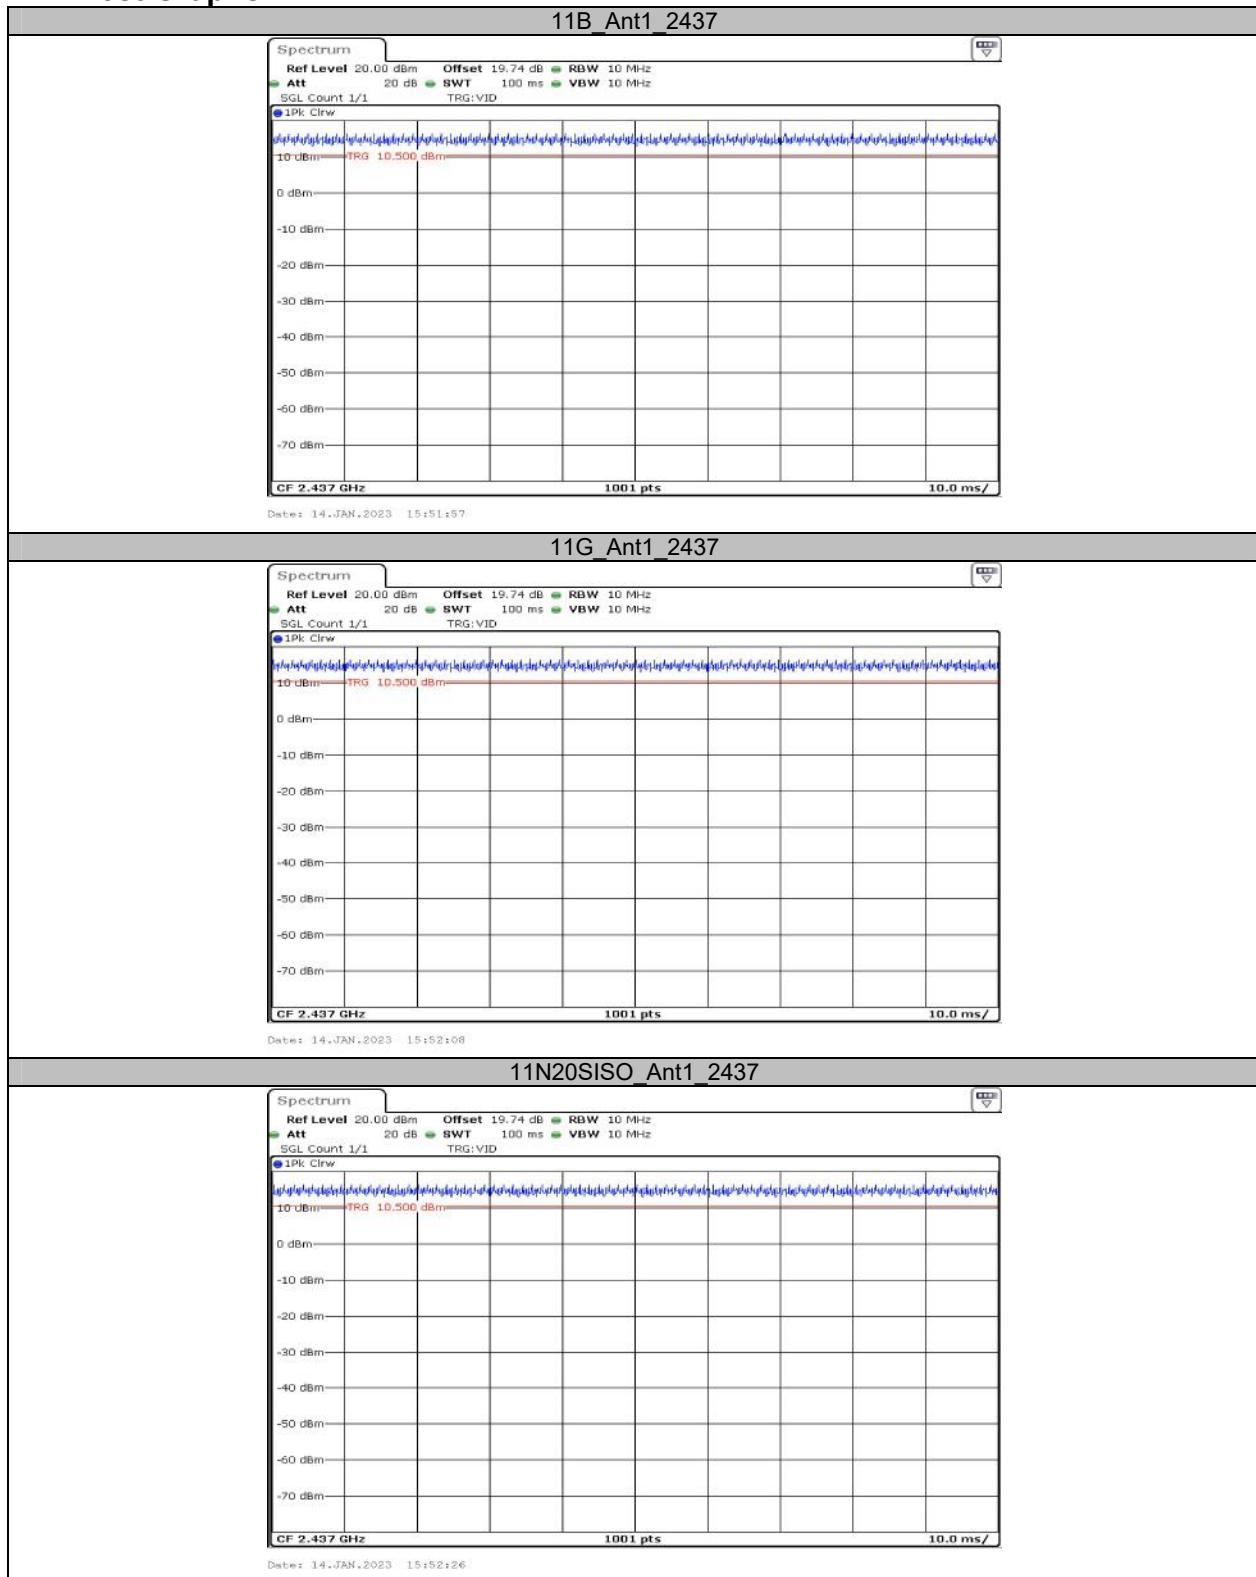

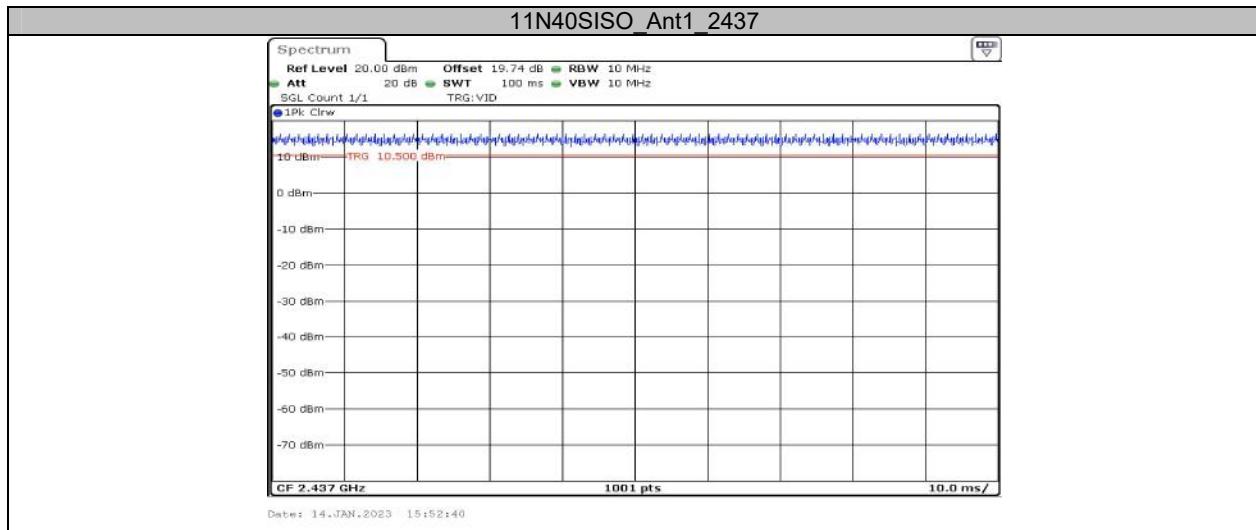

## APPENDIX BLE

### Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.63	0.5	PASS
		2440	0.63	0.5	PASS
		2480	0.63	0.5	PASS

**Test Graphs**

**Appendix B: Occupied Channel Bandwidth  
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.019	---	---
		2440	1.019	---	---
		2480	1.019	---	---


## Test Graphs



**Appendix C: Maximum conducted output power  
Test Result**

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.63	≤30.00	PASS
		2440	1.64	≤30.00	PASS
		2480	2.33	≤30.00	PASS


## Test Graphs

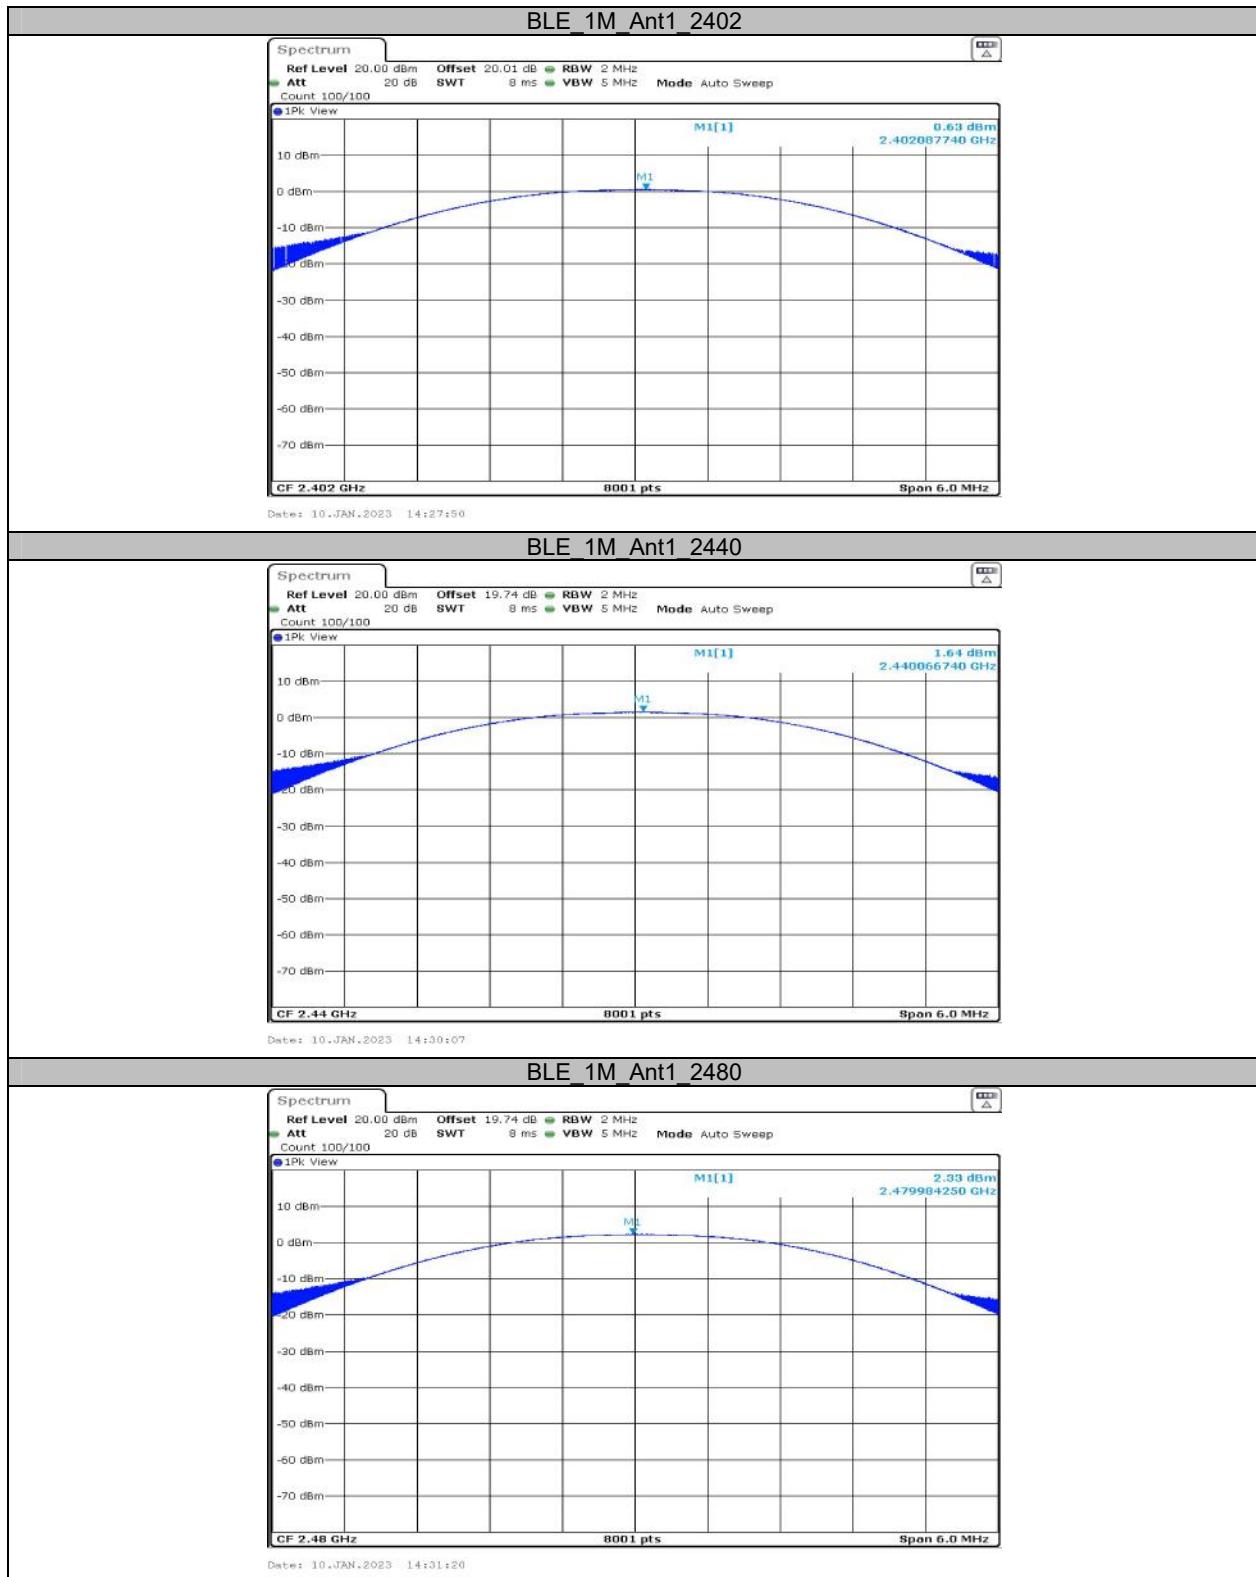

**Appendix D: Maximum power spectral density  
Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.31	≤8.00	PASS
		2440	-9.43	≤8.00	PASS
		2480	-8.65	≤8.00	PASS

## Test Graphs

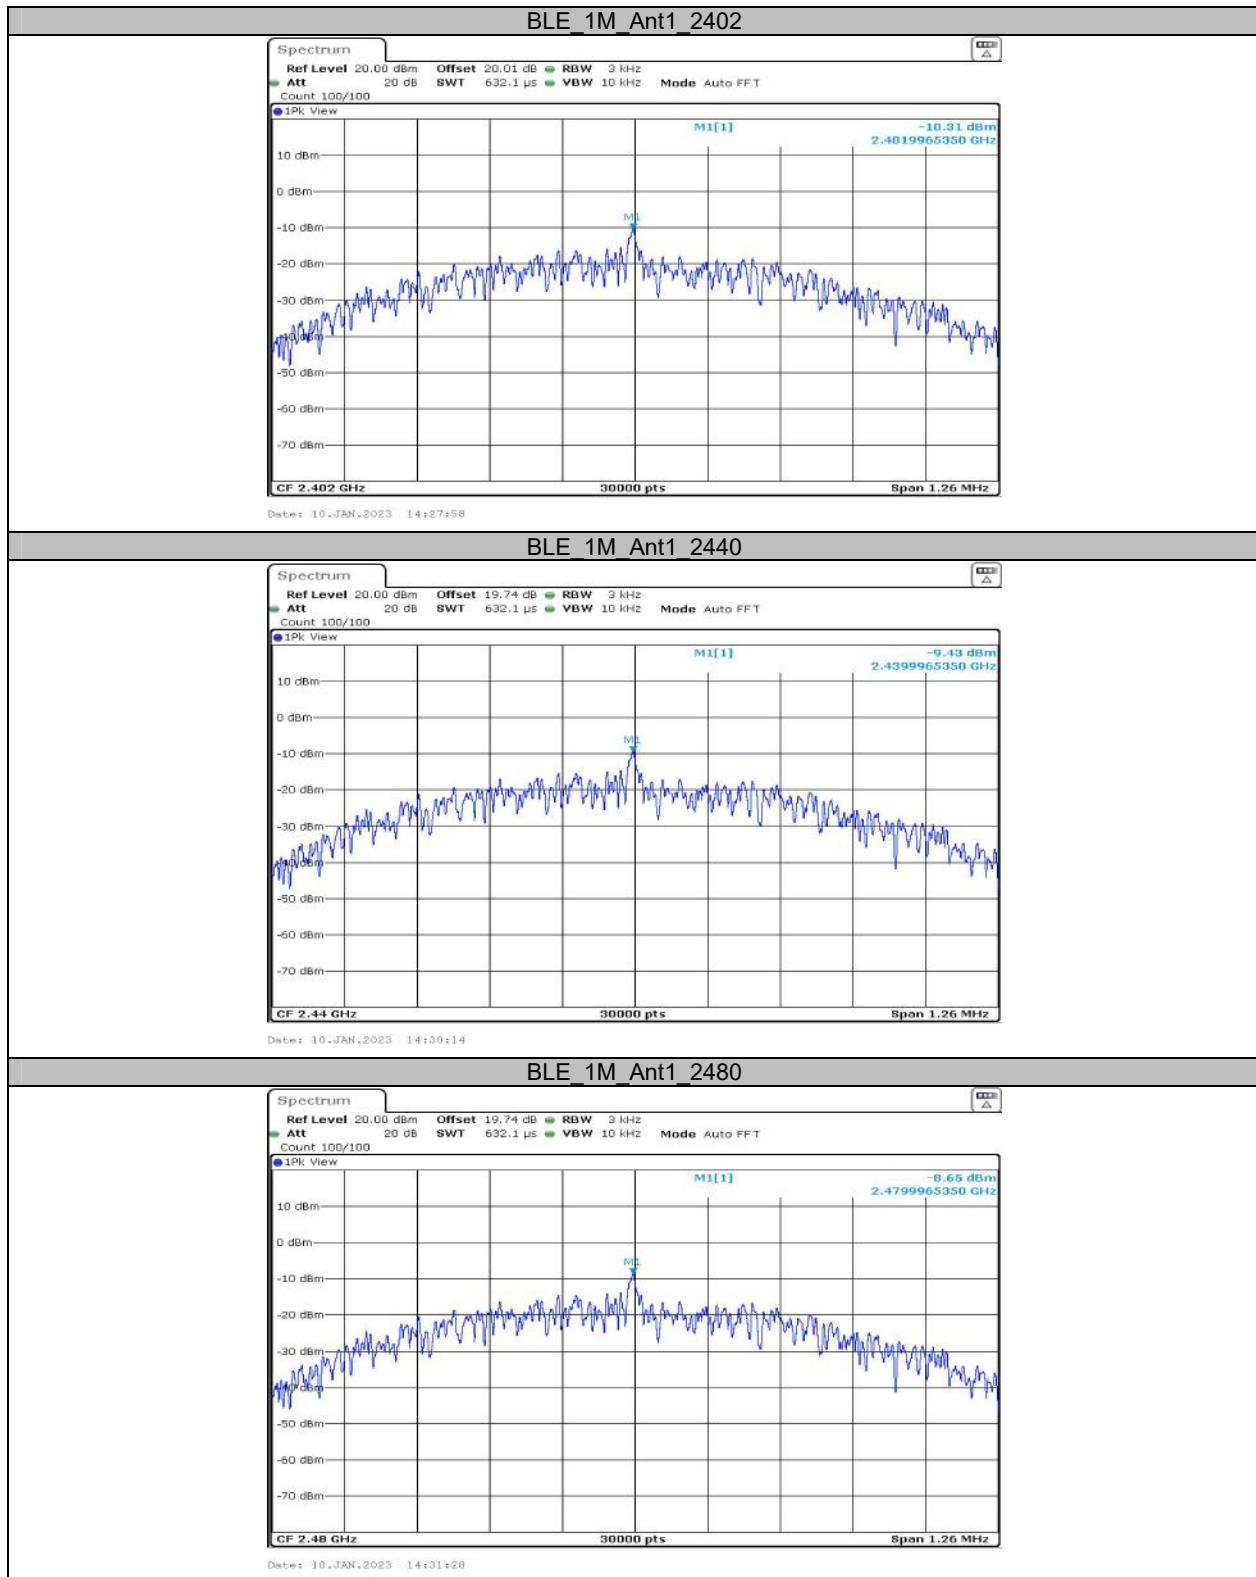

## Appendix E: Band edge measurements


### Test Graphs

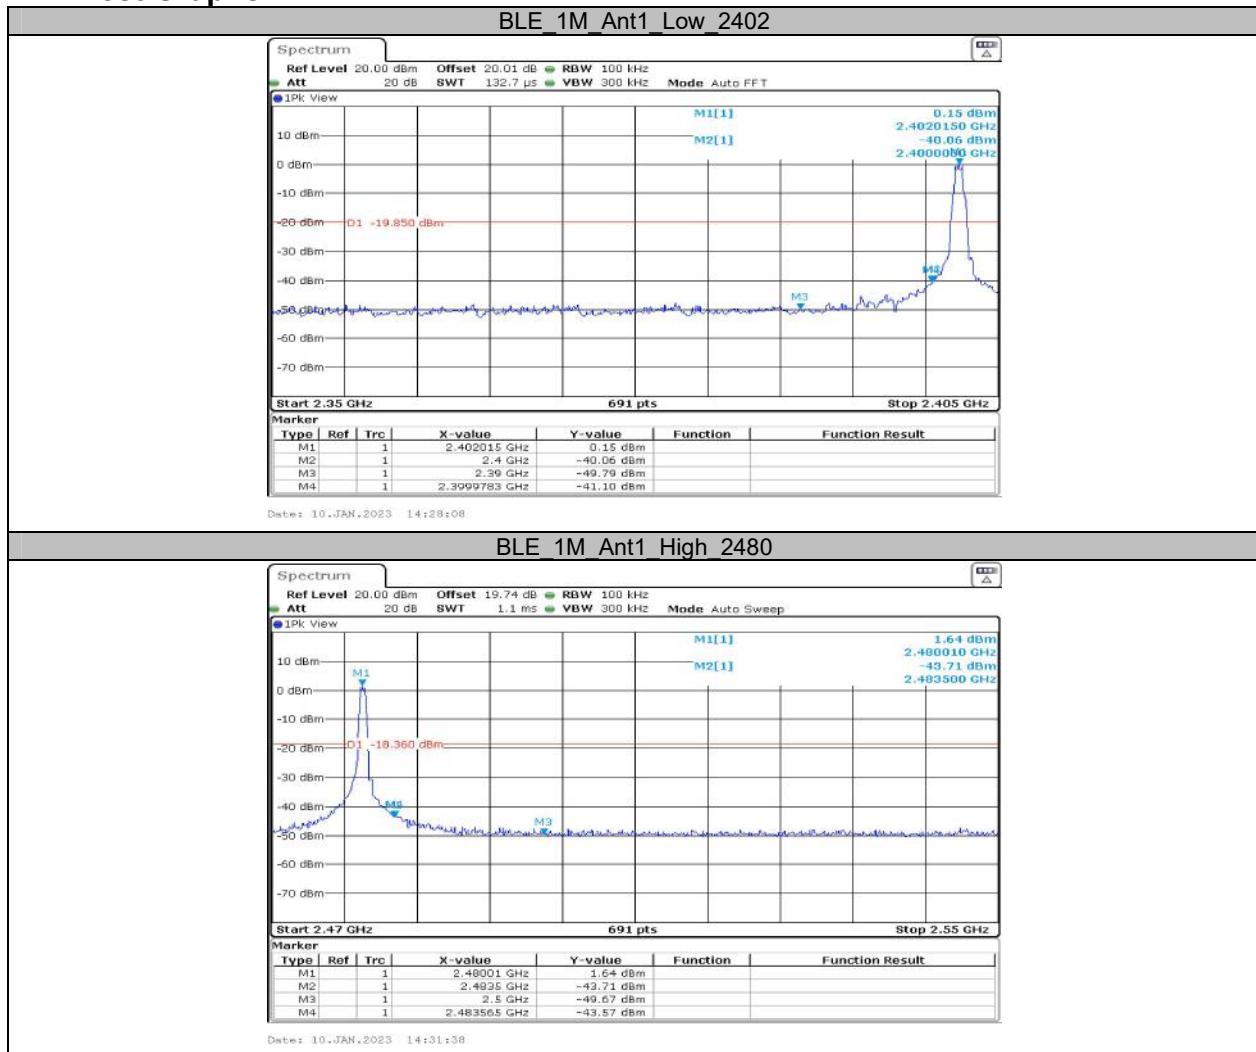

## Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2440	0.45	0.63	71.43

### Test Graphs

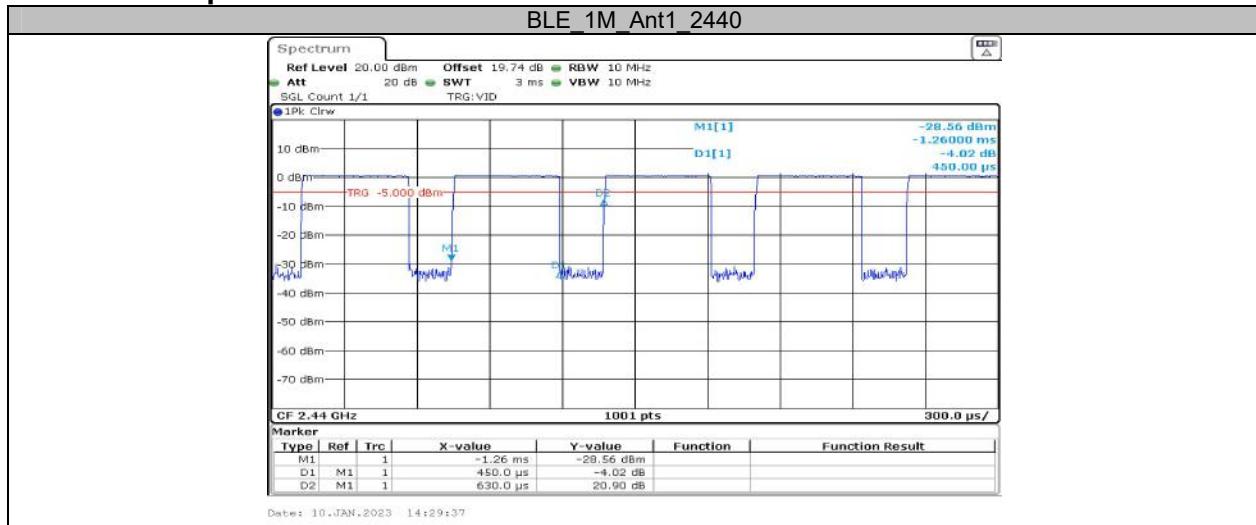

\*\*\*\*\* END OF REPORT \*\*\*\*\*