



### RF Exposure Evaluation Report

#### 1 Product Information

<b>FCC ID:</b>	2A4LH-PN-W35
<b>Product Name:</b>	Magnetic Wireless Power Bank
<b>Model Number:</b>	PN-W35,PN-W32, PN-W25, PN-W26, PN-W27
<b>Power Supply:</b>	Capacity:10000mAh/3.7V Input:DC 5V/2.1A(MAX) Output: DC 5V/3A(MAX) Wireless Output: 5W
<b>Frequency Range:</b>	110-205 KHz
<b>Antenna Type:</b>	Coil Antenna
<b>Hardware version</b>	V1.0
<b>Software version</b>	V1.0
<b>Accessories</b>	Mobile phone: OPPO A96 Adapter: PD-014
<b>Exposure category</b>	General population/uncontrolled environment
<b>EUT Type</b>	Production Unit
<b>Device Type</b>	Portable Device



## 2 Evaluation Method

Per KDB 680106 D01v03r01 Section 3. RF Exposure Requirements;

- 1) Consumer wireless power transfer devices approved under Part 18 in some cases have to demonstrate compliance with RF exposure requirements. The potential for exposure must be assessed according to the operating configurations of the wireless system and the exposure conditions of users and bystanders. RF exposure must be evaluated with the client device(s) being charged by the primary at maximum output power. The RF exposure requirements must be determined in conjunction with the device operating characteristics, according to the mobile and portable exposure requirements in Section 2.1091 and Section 2.1093 of the rules. SAR and MPE limits do not cover the frequency range for wireless power transfer applications which operate below 100 kHz and 300 kHz respectively; therefore, RF exposure compliance needs to be determined with respect to 1.1307 (c) and (d) of the FCC rules.
- 2) Based on the design and implementation of the power transfer application, it must be clearly identified if mobile or portable RF exposure conditions apply. Devices that are installed to provide separation of at least 20 cm from users and bystanders may qualify for mobile exposure conditions. For some conditions where users and bystanders may be exposed at closer than 20 cm, section 2.1091(d) (4) of the rules may apply.
- 3) For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz
- 4) Portable exposure conditions from 100 kHz to 6 GHz are determined with respect to SAR requirements. Existing SAR systems and test procedures are generally intended for measurements above 100 MHz. While numerical modeling can be an alternative, the constraints of substantial computational resources at low frequencies could introduce further limitations. Under these circumstances, including operations below 100 kHz, the Commission may consider a combination of analytical analysis, field strength, radiated and conducted power measurements, in conjunction with some limited numerical modeling to assess compliance.
- 5) Depending on the operating frequency, existing SAR and MPE measurement procedures may be adapted to evaluate wireless power transfer devices for compliance with respect to mobile or portable exposure conditions. If the grantee or its test lab have any questions regarding RF exposure evaluation they should contact the FCC Laboratory with sufficient system operating configuration details to determine if RF exposure evaluation is necessary and, if required, how to apply specific test procedures. Below 100 MHz, when SAR testing is required and the device is operating at close proximity to persons, information on device design, implementation, operating configurations, exposure conditions of users and bystanders are needed to determine the evaluation and testing requirements. In addition, the influence of nearby objects may also need consideration according to the wireless power transfer system implementation; for example, the effects of placing the device, its coils or radiating elements on or near metallic surfaces.
- 6) According to April 2022 TCB Workshop, "Large size" probes may prevent the measurement of E- and/or H-fields near the surface of the radiating structure (e.g., a WPT source coil), If the center of the probe sensing element is more than 5 mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable (from the surface, in 2 cm increments) .



### 3 Evaluation Limit

#### 3.1 Refer evaluation method

ANSI C95.1 – 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

680106 D01 RF Exposure Wireless Charging Apps v03r01: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1091: Radiofrequency radiation exposure evaluation: mobile devices

FCC CFR 47 part 18.107: Industrial, Scientific, and Medical Equipment

#### 3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz

\*=Plane-wave equivalent power density


According to FCC 680106 D01 RF Exposure Wireless Charging Apps v03r01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section 1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

Frequency	E-Field V/m	*/* A/m	B-Field uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 <sub>30MHz</sub> )	2.19/f (=0.073 <sub>30MHz</sub> )	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.



#### 4 Test Setup

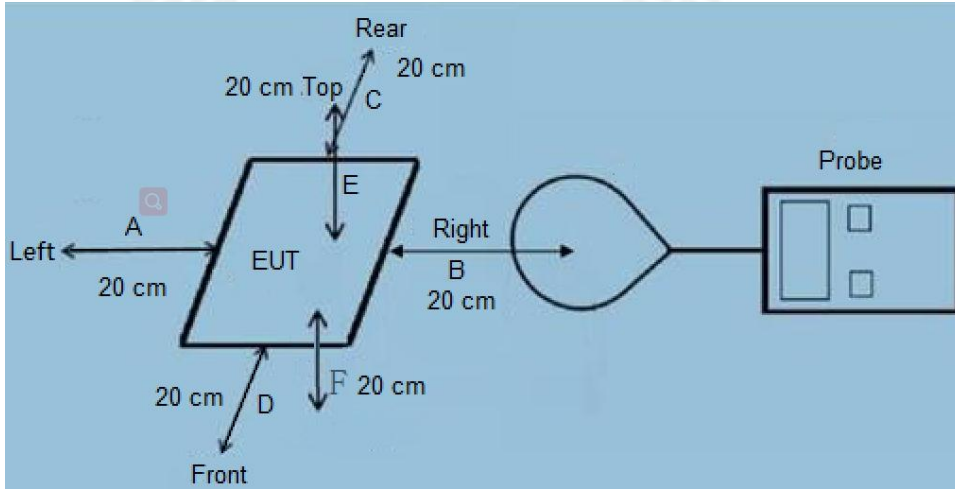

#### 5 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Electromagnetic radiation frequency probe	Narda	EHP-200A	N-1114	Mar. 01, 2023	Feb. 29, 2024

#### 6 Measurement Procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (0-20 cm, in 2 cm maximum increment) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- The EUT were measured according to the dictates of 680106 D01 RF Exposure Wireless Charging Apps v03r01



### 7 Equipment Approval Considerations

The EUT does comply with item 5.2 of 680106 D01 RF Exposure Wireless Charging Apps v03r01 as follows table;

Requirements of 680106 D01 RF Exposure Wireless Charging Apps v03r01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110.0 KHz - 205 KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power of the primary coil is 5W.
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes	The transfer system includes single coil that is able to detect receiver device.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	portable exposure conditions
The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

In all other cases, unless excluded above, an RF exposure evaluation report must be reviewed and accepted through a KDB or PBA inquiry to enable authorization of the equipment. When evaluation is required to show compliance; for example, using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation.





8 H field Strength

Test Modes:	Description	
Mode 1	AC/DC Adapter + EUT + Mobile Phone	Record
Mode 2	AC/DC Adapter+ EUT+USB Output	Pre-tested
Mode 3	EUT + Mobile Phone+USB Output	Pre-tested
Mode 4	AC/DC Adapter + EUT + Mobile Phone+USB Output	Pre-tested

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

Charging Battery Level	measuring distance (cm)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
1%	0	0.693	0.702	0.731	0.673	0.745	0.651	0.815	1.63
50%	0	0.677	0.664	0.661	0.749	0.676	0.742	0.815	1.63
99%	0	0.744	0.723	0.665	0.738	0.725	0.704	0.815	1.63
1%	2	0.732	0.728	0.747	0.660	0.668	0.663	0.815	1.63
50%	2	0.690	0.668	0.665	0.703	0.743	0.672	0.815	1.63
99%	2	0.719	0.729	0.688	0.696	0.716	0.673	0.815	1.63
1%	4	0.651	0.745	0.698	0.678	0.665	0.672	0.815	1.63
50%	4	0.742	0.677	0.663	0.688	0.725	0.722	0.815	1.63
99%	4	0.706	0.745	0.699	0.736	0.693	0.732	0.815	1.63
1%	6	0.710	0.672	0.730	0.703	0.719	0.729	0.815	1.63
50%	6	0.723	0.741	0.725	0.657	0.650	0.676	0.815	1.63
99%	6	0.699	0.730	0.689	0.749	0.708	0.693	0.815	1.63
1%	8	0.639	0.610	0.642	0.570	0.562	0.645	0.815	1.63
50%	8	0.606	0.648	0.571	0.572	0.613	0.645	0.815	1.63
99%	8	0.640	0.569	0.573	0.635	0.604	0.596	0.815	1.63



Charging Battery Level	measuring distance (cm)	Measured H-Field Strength Values (A/m)						FCC E-Field Strength 50% Limits (A/m)	FCC E-Field Strength Limits (A/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
1%	10	0.562	0.558	0.556	0.647	0.633	0.570	0.815	1.63
50%	10	0.574	0.604	0.621	0.619	0.644	0.648	0.815	1.63
99%	10	0.605	0.601	0.611	0.565	0.589	0.650	0.815	1.63
1%	12	0.481	0.464	0.499	0.522	0.461	0.495	0.815	1.63
50%	12	0.459	0.483	0.457	0.464	0.511	0.493	0.815	1.63
99%	12	0.479	0.545	0.498	0.478	0.470	0.550	0.815	1.63
1%	14	0.529	0.498	0.546	0.469	0.544	0.527	0.815	1.63
50%	14	0.533	0.545	0.461	0.486	0.494	0.540	0.815	1.63
99%	14	0.503	0.531	0.496	0.547	0.457	0.531	0.815	1.63
1%	16	0.385	0.431	0.386	0.398	0.440	0.445	0.815	1.63
50%	16	0.434	0.394	0.353	0.421	0.450	0.428	0.815	1.63
99%	16	0.388	0.433	0.372	0.446	0.394	0.410	0.815	1.63
1%	18	0.362	0.387	0.438	0.410	0.388	0.409	0.815	1.63
50%	18	0.430	0.366	0.391	0.419	0.375	0.388	0.815	1.63
99%	18	0.401	0.420	0.402	0.382	0.392	0.446	0.815	1.63
1%	20	0.269	0.262	0.265	0.258	0.237	0.245	0.815	1.63
50%	20	0.240	0.290	0.253	0.252	0.239	0.233	0.815	1.63
99%	20	0.239	0.261	0.237	0.291	0.261	0.299	0.815	1.63



Charging Battery Level	measuring distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
1%	0	276	287	281	288	271	254	307	614
50%	0	298	271	298	277	276	260	307	614
99%	0	296	279	286	285	271	260	307	614
1%	2	286	278	291	281	288	258	307	614
50%	2	281	294	279	280	294	259	307	614
99%	2	295	280	277	290	280	254	307	614
1%	4	270	251	251	257	264	249	307	614
50%	4	240	269	251	261	261	254	307	614
99%	4	268	258	268	260	262	250	307	614
1%	6	252	256	266	250	251	214	307	614
50%	6	240	263	267	265	242	205	307	614
99%	6	247	259	265	253	267	234	307	614
1%	8	232	202	232	227	216	221	307	614
50%	8	223	207	203	214	235	231	307	614
99%	8	231	202	212	200	203	220	307	614





Charging Battery Level	measuring distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
1%	10	231	231	200	219	238	221	307	614
50%	10	211	204	228	228	216	206	307	614
99%	10	205	228	203	213	211	142	307	614
1%	12	187	203	197	181	197	150	307	614
50%	12	180	187	198	193	178	133	307	614
99%	12	176	193	183	179	181	146	307	614
1%	14	204	173	176	192	176	132	307	614
50%	14	189	177	173	179	191	144	307	614
99%	14	177	192	190	178	179	140	307	614
1%	16	169	172	171	173	160	144	307	614
50%	16	175	173	157	162	165	141	307	614
99%	16	176	169	173	178	157	130	307	614
1%	18	143	147	150	146	140	113	307	614
50%	18	142	138	142	149	154	100	307	614
99%	18	144	147	141	152	144	111	307	614
1%	20	131	120	126	120	129	100	307	614
50%	20	121	127	126	131	121	112	307	614
99%	20	130	128	124	123	126	105	307	614




9 Test Set-up Photo

Test Position A (0cm)




Test Position A (10cm)

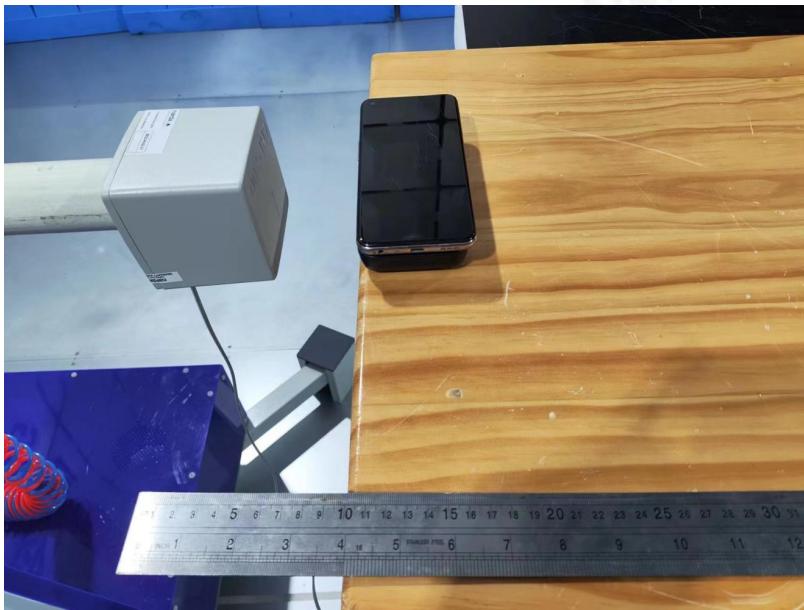



Test Position A (20cm)

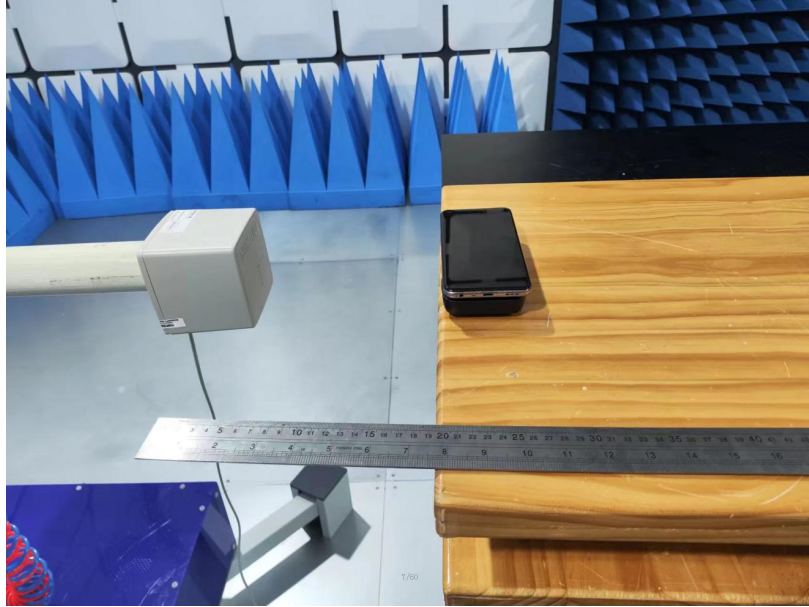

Test Position B (0cm)





Test Position B (10cm)



Test Position B (20cm)







Test Position C (0cm)




Test Position C (10cm)







Test Position C (20cm)

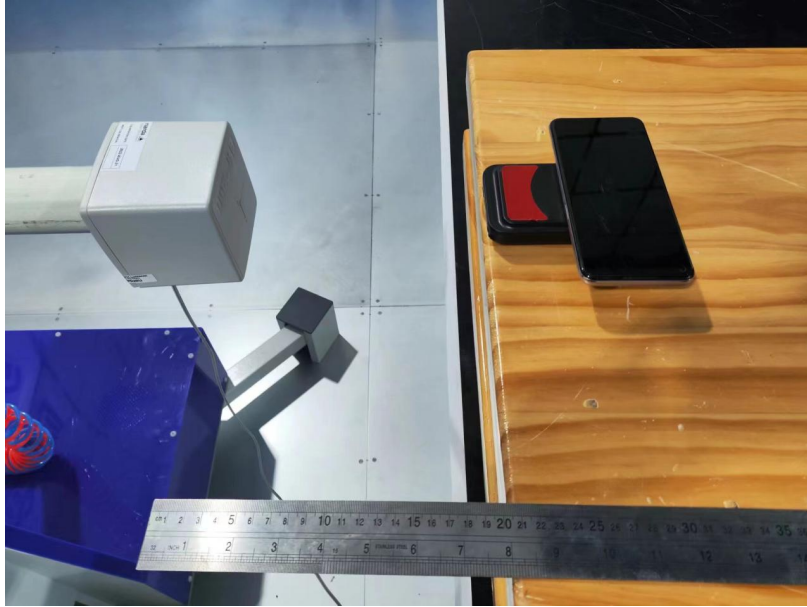

Test Position D (0cm)





Test Position D (10cm)




Test Position D (20cm)






Test Position E (0cm)

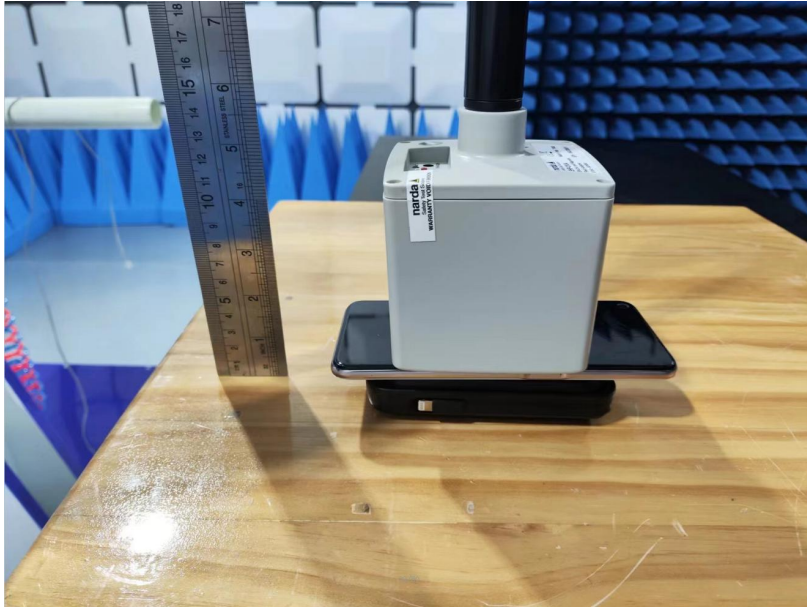

Test Position E (10cm)

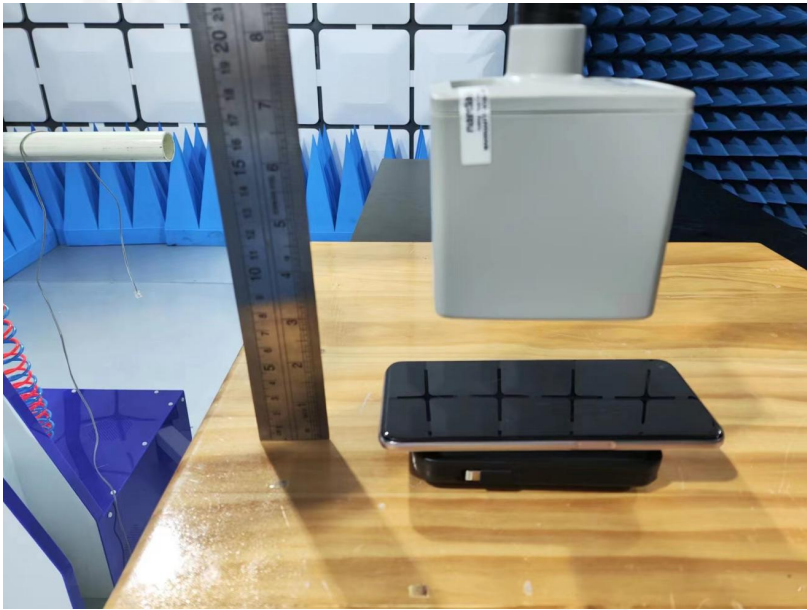






Test Position E (20cm)




Test Position F (0cm)

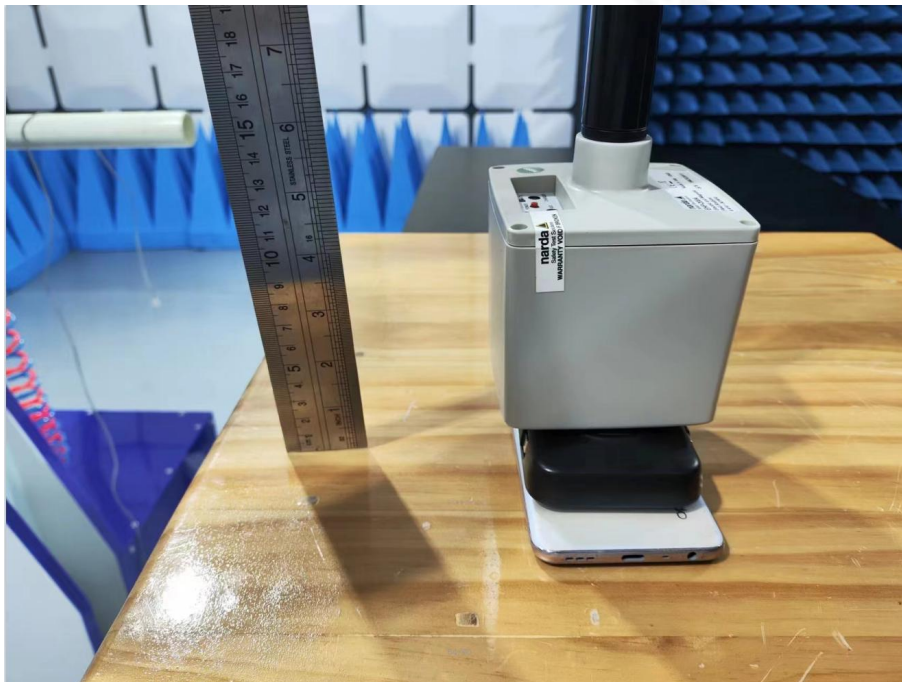



Test Position F (10cm)

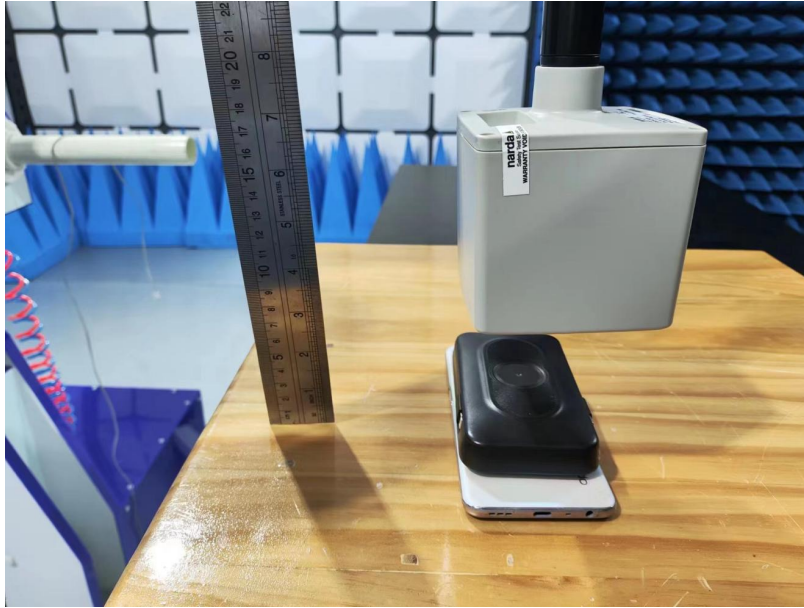

Test Position F (20cm)







### 10 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure and 20 cm to the antenna for mobile exposure. The detected emissions are below the limitations according FCC 680106 D01 RF Exposure Wireless Charging Apps v03r01 and confirmed by the FCC according to KDB Inquire.

The distance from the center of the probe to the edge is 4mm. Please see the below picture.

