



# FCC Test Report

Report No: FCS202403242W01

Issued for

Applicant:	ShenZhen Alacrity Barcode Technology Co.,Ltd
Address:	5F,Building B,Southern Pearl Technology Park, No.83,Yingtai Road,Dalang,Longhua,Shenzhen
Product Name:	Barcode Scanner
Brand Name:	N/A
Model Name:	MJ-R75
Series Model:	MJ-R30,MJ-R35, MJ-R38, MJ-R40, MJ-R50, MJ-R55 MJ-R70, MJ-R78, MJ-R80
FCC ID:	2A4TH-MJ-R75
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 <a href="http://www.fcs-lab.com">http://www.fcs-lab.com</a>	

**TEST RESULT CERTIFICATION**

Applicant Name.....: ShenZhen Alacrity Barcode Technology Co.,Ltd  
Address.....: 5F,Building B,Southern Pearl Technology Park, No.83,Yingtai Road,Dalang,Longhua,Shenzhen  
Manufacture Name.....: ShenZhen Alacrity Barcode Technology Co.,Ltd  
Address.....: 5F,Building B,Southern Pearl Technology Park, No.83,Yingtai Road,Dalang,Longhua,Shenzhen

**Product Description**

Product Name.....: Barcode Scanner  
Brand Name .....: N/A  
Model Name.....: MJ-R75  
Series Model.....: MJ-R30,MJ-R35, MJ-R38, MJ-R40, MJ-R50, MJ-R55  
MJ-R70, MJ-R78, MJ-R80  
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 249  
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

**Date of Test.....:**

Date (s) of performance of tests.: Mar 14, 2024 ~ Mar 20, 2024

Date of Issue.....: Mar 25, 2024

Test Result.....: Pass

Tested by

:

*Scott Shen*

(Scott Shen)

Reviewed by

:

*Duke Qian*

(Duke Qian)

Approved by

:

*Jack Wang*

(Jack Wang)



Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
1.1 TEST FACTORY .....	6
1.2 MEASUREMENT UNCERTAINTY .....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF THE EUT .....	7
2.2 DESCRIPTION OF THE TEST MODES .....	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS .....	10
2.4 EQUIPMENTS LIST .....	11
<b>3 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>12</b>
3.1 LIMIT .....	12
3.2 TEST PROCEDURE .....	12
3.3 TEST SETUP .....	13
3.4 TEST RESULTS .....	14
<b>4. RADIATED EMISSION MEASUREMENT .....</b>	<b>16</b>
4.1 LIMIT .....	16
4.2 TEST PROCEDURE .....	17
4.3 TEST SETUP .....	18
<b>5. BAND EDGE TEST .....</b>	<b>23</b>
5.1 LIMIT .....	23
5.2 TEST PROCEDURE .....	23
5.3 TEST SETUP .....	24
5.4 TEST RESULTS .....	25
<b>6. 20 DB BANDWIDTH TEST .....</b>	<b>26</b>
6.1 LIMIT .....	26
6.2 TEST PROCEDURE .....	26
6.3 TEST SETUP .....	26
6.4 TEST RESULTS .....	27
<b>7. ANTENNA REQUIREMENT .....</b>	<b>29</b>
7.1 STANDARD REQUIREMENT .....	29
7.2 EUT ANTENNA .....	29

**Revision History**

Rev.	Issue Date	Effect Page	Contents
00	Mar 25, 2024	N/A	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.249, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	--
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

### 1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71$ dB
2	Unwanted Emissions, conducted	$\pm 2.98$ dB
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13$ dB
4	Conducted Emission (150KHz-30MHz)	$\pm 4.74$ dB
5	All emissions,radiated(<1G) 30MHz-1000MHz	$\pm 3.2$ dB
6	All emissions,radiated (1GHz -18GHz)	$\pm 3.66$ dB
7	All emissions,radiated (18GHz -40GHz)	$\pm 4.31$ dB
8	Occupied bandwidth	$\pm 0.3$ dB

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Barcode Scanner
Trade Name	N/A
Model Name	MJ-R75
Series Model	MJ-R30,MJ-R35, MJ-R38, MJ-R40, MJ-R50, MJ-R55 MJ-R70, MJ-R78, MJ-R80
Model Difference	We (ShenZhen Alacrity Barcode Technology Co.,Ltd) hereby state that all the models are electrical identical including the same software parameter and hardware design (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) and antenna location, components on PCB, etc.), same mechanical structure and design (including product enclosure, materials, etc.), the only difference is the model name and appearance color.
Channel List	Please refer to the Note 2.
Specification	Frequency:2408-2474MHz Modulation: GFSK Channel number: 34CH
Power Supply	Input:DC 5V 1A
Battery	DC 3.7V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2. Channel List

Channel	Freq.(MHz)	Channel	Freq.(MHz)	Channel	Freq.(MHz)	Channel	Freq.(MHz)
1	2408	11	2428	21	2448	31	2468
2	2410	12	2430	22	2450	32	2470
3	2412	13	2432	23	2452	33	2472
4	2414	14	2434	24	2454	34	2474
5	2416	15	2436	25	2456		
6	2418	16	2438	26	2458		
7	2420	17	2440	27	2460		
8	2422	18	2442	28	2462		
9	2424	19	2444	29	2464		
10	2426	20	2446	30	2466		

## 3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB antenna	N/A	0.22 dBi	Antenna



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software:

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table


No.	Test model descrption
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:


1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. The EUT used fully charge battery when tested.
4. During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

### Configuration and peripherals

Mode 1:



Mode 2:



### 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

#### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	Xiao	AD652G	N/A	Test use
2	notebook	Lenovo	E495	N/A	Test use

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.4 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2023. 08.29	2024. 08.28
Signal Analyzer	R&S	FSV40-N	FCS-E012	2023. 08.29	2024. 08.28
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2023. 08.29	2024. 08.28
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2023. 08.29	2024. 08.28
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2023. 08.29	2024. 08.28
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2023. 08.29	2024. 08.28
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2023. 08.29	2024. 08.28
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2023. 08.29	2024. 08.28
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2023. 08.29	2024. 08.28
Temperature & Humidity	HTC-1	victor	FCS-E005	2023. 08.29	2024. 08.28

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2023. 08.29	2024. 08.28
LISN	R&S	ENV216	FCS-E007	2023. 08.29	2024. 08.28
LISN	ETS	3810/2NM	FCS-E009	2023. 08.29	2024. 08.28
Temperature & Humidity	HTC-1	victor	FCS-E008	2023. 08.29	2024. 08.28

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2023. 08.29	2024. 08.28
Spectrum Analyzer	Agilent	E4447A	MY50180039	2023. 08.29	2024. 08.28
Spectrum Analyzer	R&S	FSV-40	101499	2023. 08.29	2024. 08.28

### Test Equipment Calibration

All of the test equipment is effective use and calibration certification institution, GRGT, the address is 163 tianhe district in huangpu road xiping cloud road .Guangzhou,China

### 3 CONDUCTED EMISSION MEASUREMENT

#### 3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


### 3.3 TEST SETUP

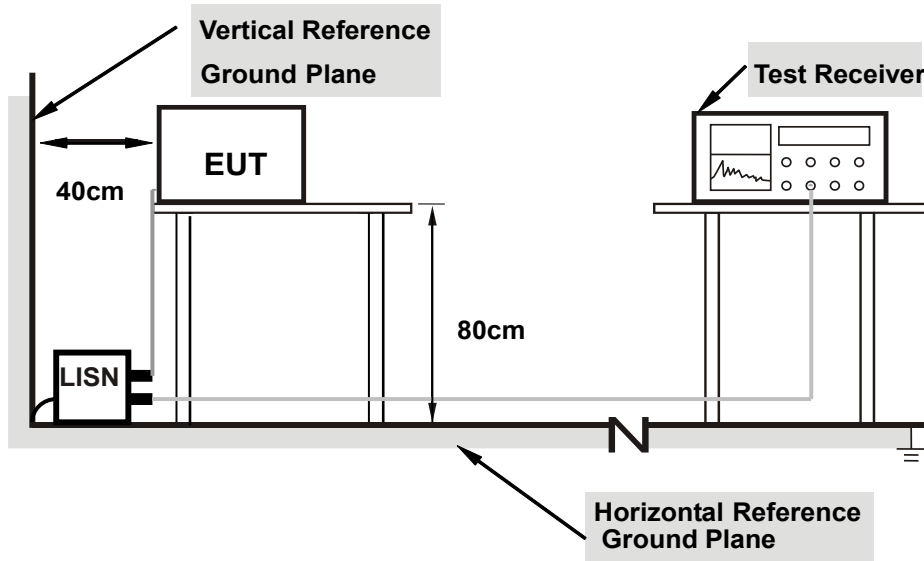

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


### 3.4 TEST RESULTS

Temperature:	22.1 °C	Relative Humidity:	56%
Test Voltage:	DC 5V by adapter	Phase:	L
Test Mode:	Mode 2(worst)		

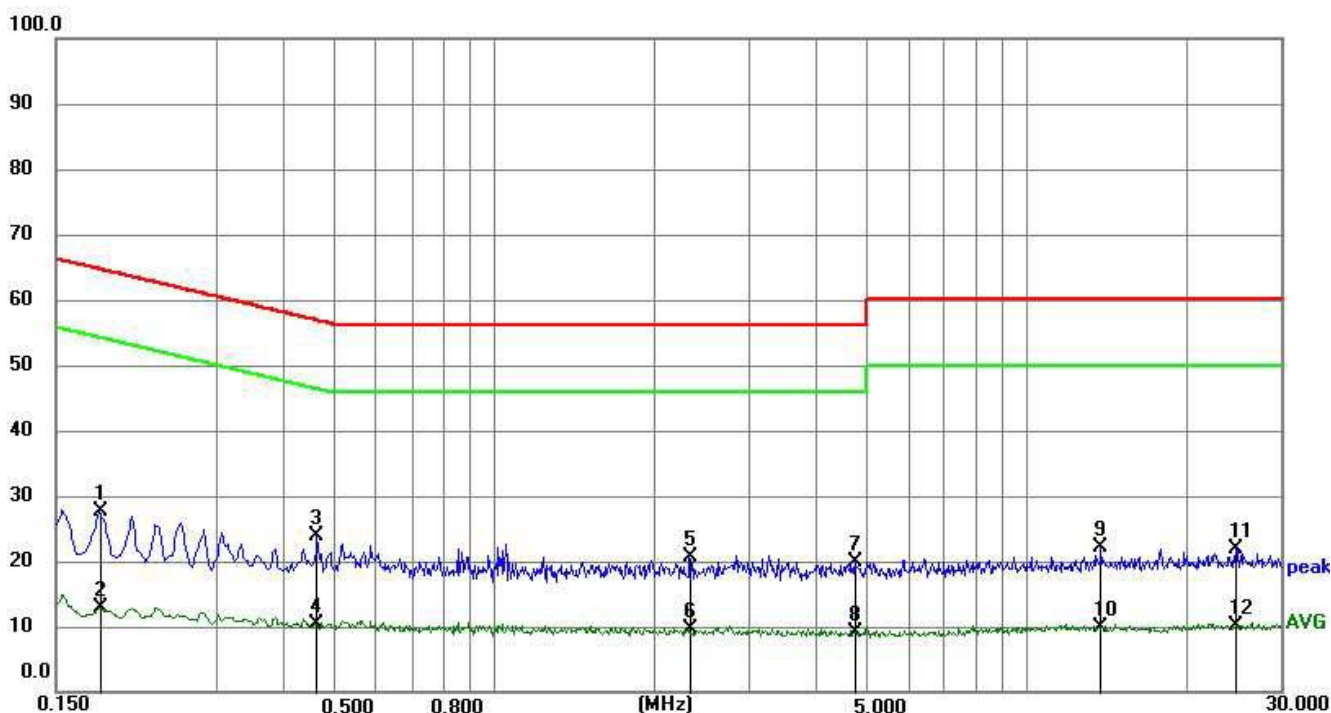

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1815	17.64	10.10	27.74	64.42	36.68	QP
2	0.1815	2.75	10.10	12.85	54.42	41.57	AVG
3	0.4650	13.79	10.02	23.81	56.60	32.79	QP
4	0.4650	0.34	10.02	10.36	46.60	36.24	AVG
5	2.3324	10.74	9.96	20.70	56.00	35.30	QP
6	2.3324	-0.45	9.96	9.51	46.00	36.49	AVG
7	4.7580	10.11	9.89	20.00	56.00	36.00	QP
8	4.7580	-0.67	9.89	9.22	46.00	36.78	AVG
9	13.8390	12.31	9.81	22.12	60.00	37.88	QP
10	13.8390	0.09	9.81	9.90	50.00	40.10	AVG
11	24.6930	11.96	9.91	21.87	60.00	38.13	QP
12	24.6930	0.15	9.91	10.06	50.00	39.94	AVG

Temperature:	22.1 °C	Relative Humidity:	56%
Test Voltage:	DC 5V by adapter	Phase:	N
Test Mode:	Mode 2(worst)		

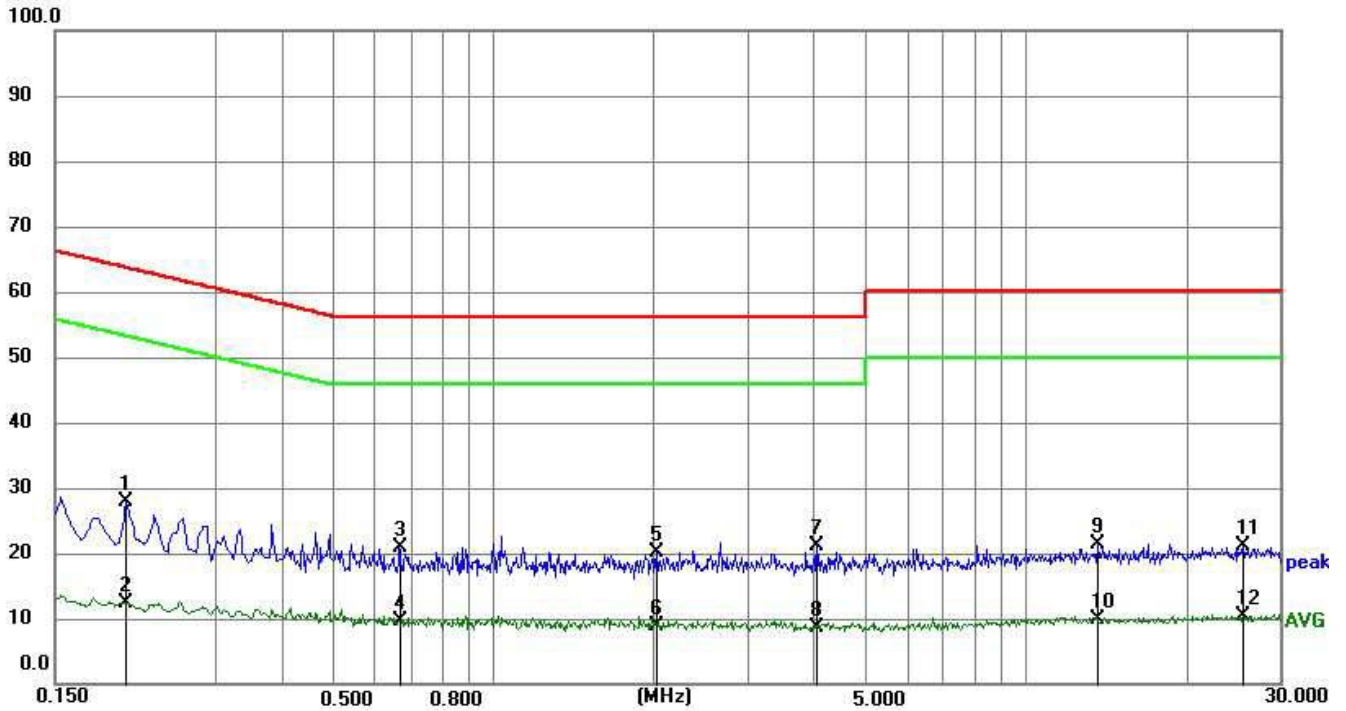

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.2040	17.82	10.05	27.87	63.45	35.58	QP
2	0.2040	2.31	10.05	12.36	53.45	41.09	AVG
3	0.6675	10.97	9.98	20.95	56.00	35.05	QP
4	0.6675	-0.27	9.98	9.71	46.00	36.29	AVG
5	2.0264	10.05	9.96	20.01	56.00	35.99	QP
6	2.0264	-1.18	9.96	8.78	46.00	37.22	AVG
7	4.0605	11.34	9.91	21.25	56.00	34.75	QP
8	4.0605	-1.18	9.91	8.73	46.00	37.27	AVG
9	13.6545	11.48	9.82	21.30	60.00	38.70	QP
10	13.6545	0.02	9.82	9.84	50.00	40.16	AVG
11	25.6650	11.04	9.98	21.02	60.00	38.98	QP
12	25.6650	0.29	9.98	10.27	50.00	39.73	AVG

#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

##### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

##### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

##### LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

##### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



#### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 4.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

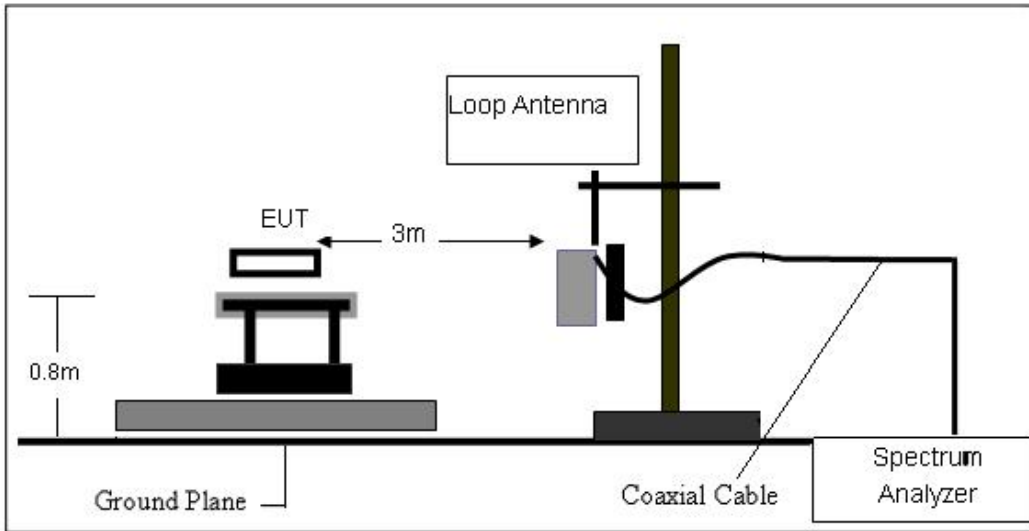

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

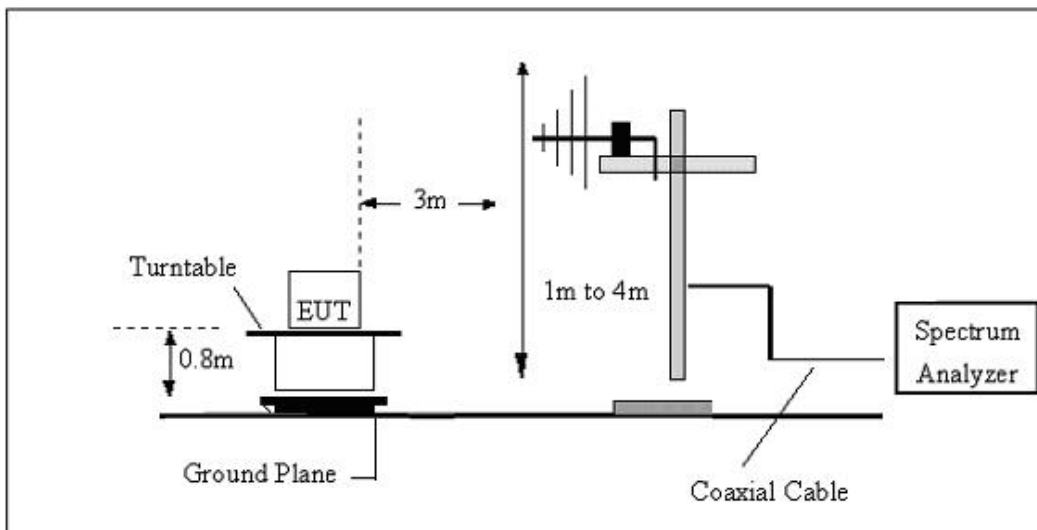

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

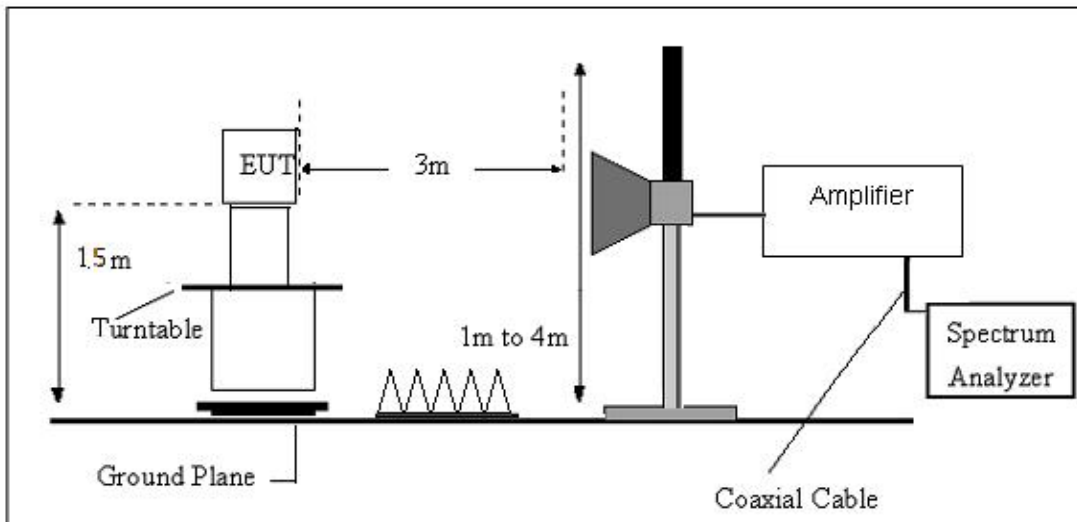

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Test Mode:	GFSK

For field strength of the fundamental signal

Frequency (MHz)	Ant. Polarization H / V	Emission level dBμV/m	Limits dBμV/m	Detector	Result
2408	H	84.25	114	PK	PASS
2408	H	75.91	94	AV	PASS
2408	V	81.05	114	PK	PASS
2408	V	73.47	94	AV	PASS

Frequency (MHz)	Ant. Polarization H / V	Emission level dBμV/m	Limits dBμV/m	Detector	Result
2440	H	86.74	114	PK	PASS
2440	H	76.35	94	AV	PASS
2440	V	82.41	114	PK	PASS
2440	V	73.89	94	AV	PASS

Frequency (MHz)	Ant. Polarization H / V	Emission level dBμV/m	Limits dBμV/m	Detector	Result
2474	H	83.94	114	PK	PASS
2474	H	72.02	94	AV	PASS
2474	V	80.94	114	PK	PASS
2474	V	70.60	94	AV	PASS

For spurious emission

(9KHz-30MHz)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance/test distance)(dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHZ-1000MHZ)


Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	GFSK		

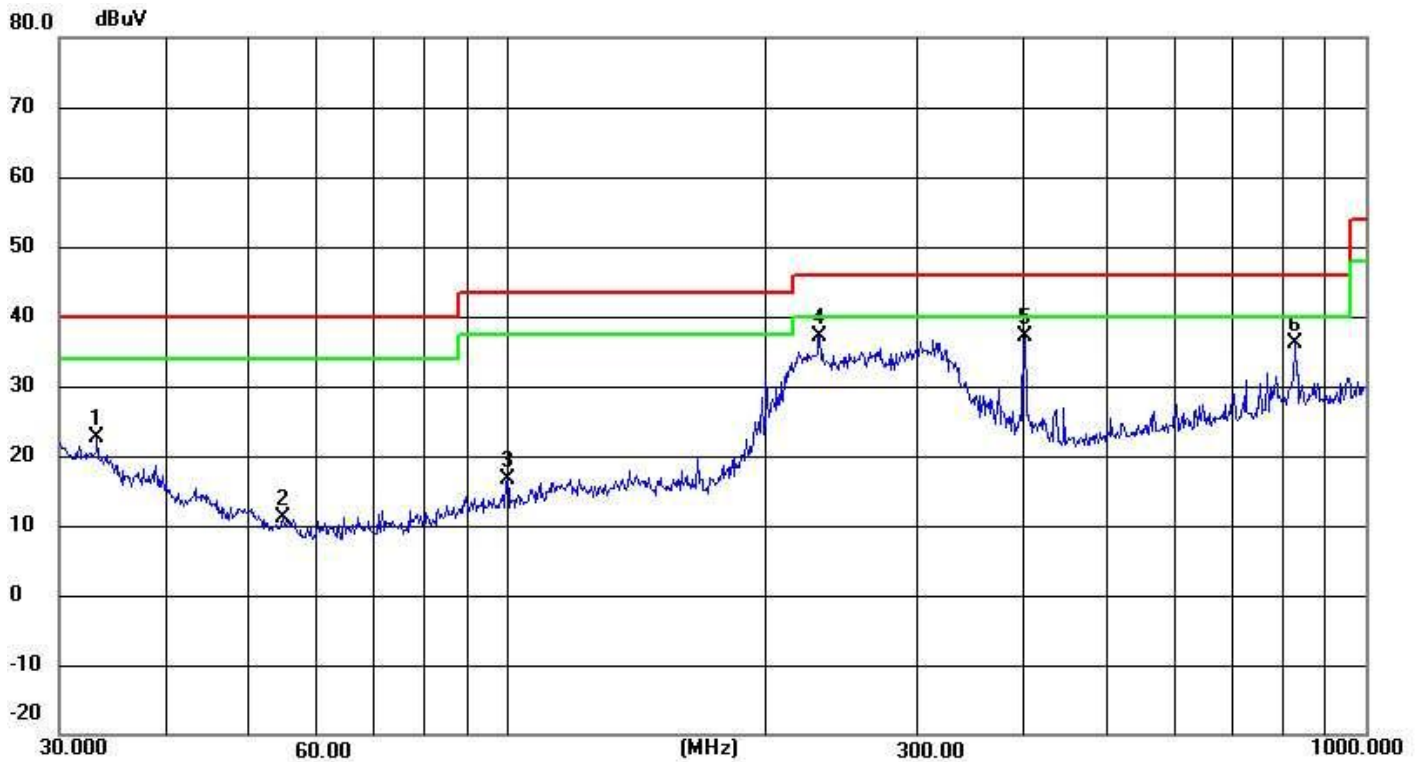

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.2112	31.81	-9.27	22.54	40.00	-17.46	QP
2	54.6428	30.40	-19.25	11.15	40.00	-28.85	QP
3	99.8777	48.71	-32.20	16.51	43.50	-26.99	QP
4	230.9067	69.09	-32.00	37.09	46.00	-8.91	QP
5	400.4318	68.77	-31.60	37.17	46.00	-8.83	QP
6	827.4934	66.83	-30.77	36.06	46.00	-9.94	QP

Note: 1. level= Reading level+ Factor, Margin=Measurement-Limit

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	GFSK		

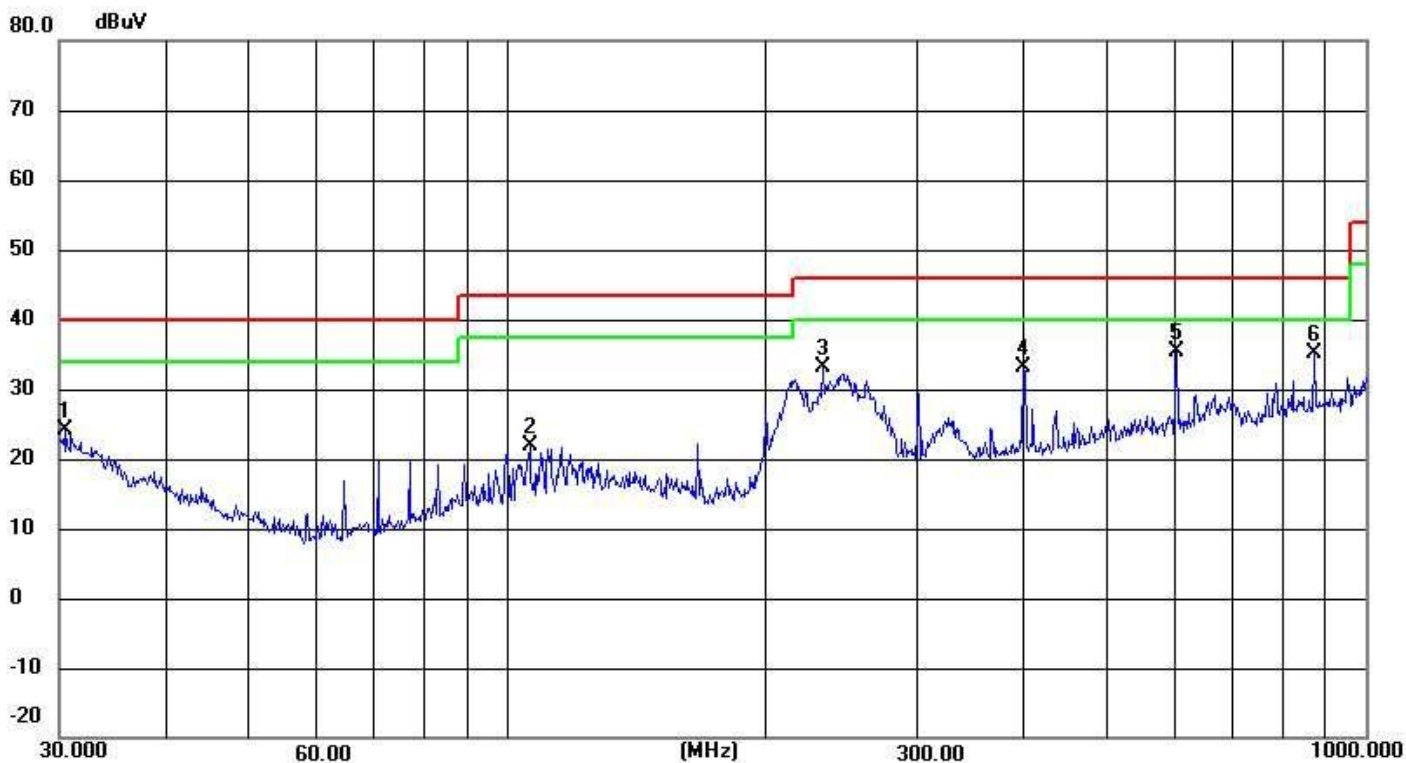

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.5306	31.57	-7.51	24.06	40.00	-15.94	QP
2	106.0126	54.04	-32.19	21.85	43.50	-21.65	QP
3	232.5318	65.19	-32.00	33.19	46.00	-12.81	QP
4	399.0302	64.78	-31.60	33.18	46.00	-12.82	QP
5	601.4265	66.40	-31.13	35.27	46.00	-10.73	QP
6	872.1832	65.84	-30.73	35.11	46.00	-10.89	QP

Note: 1. level= Reading level+ Factor, Margin=Measurement-Limit

(1GHZ~25GHZ)

Frequency (MHz)	Read Level (dBμV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark	Comment
<b>Low Channel (2408 MHz)(GFSK)--Above 1G</b>									
4816	64.38	5.21	35.59	44.30	60.88	74.00	-13.12	Pk	Vertical
4816	49.57	5.21	35.59	44.30	46.07	54.00	-7.93	AV	Vertical
7224	60.11	6.48	36.27	44.60	58.26	74.00	-15.74	Pk	Vertical
7224	44.28	6.48	36.27	44.60	42.43	54.00	-11.57	AV	Vertical
4816	64.33	5.21	35.55	44.30	60.79	74.00	-13.21	Pk	Horizontal
4816	49.12	5.21	35.55	44.30	45.58	54.00	-8.42	AV	Horizontal
7224	60.60	6.48	36.27	44.52	58.83	74.00	-15.17	Pk	Horizontal
7224	43.51	6.48	36.27	44.52	41.74	54.00	-12.26	AV	Horizontal
<b>Mid Channel (2440 MHz)(GFSK)--Above 1G</b>									
4880	65.77	5.21	35.66	44.20	62.44	74.00	-11.56	Pk	Vertical
4880	49.49	5.21	35.66	44.20	46.16	54.00	-7.84	AV	Vertical
7320	60.05	7.10	36.50	44.43	59.22	74.00	-14.78	Pk	Vertical
7320	43.46	7.10	36.50	44.43	42.63	54.00	-11.37	AV	Vertical
4880	64.51	5.21	35.66	44.20	61.18	74.00	-12.82	Pk	Horizontal
4880	49.11	5.21	35.66	44.20	45.78	54.00	-8.22	AV	Horizontal
7320	60.18	7.10	36.50	44.43	59.35	74.00	-14.65	Pk	Horizontal
7320	44.24	7.10	36.50	44.43	43.41	54.00	-10.59	AV	Horizontal
<b>High Channel (2474 MHz)(GFSK)-- Above 1G</b>									
4948	65.61	5.21	35.52	44.21	62.13	74.00	-11.87	Pk	Vertical
4948	49.49	5.21	35.52	44.21	46.01	54.00	-7.99	AV	Vertical
7422	60.49	7.10	36.53	44.60	59.52	74.00	-14.48	Pk	Vertical
7422	44.78	7.10	36.53	44.60	43.81	54.00	-10.19	AV	Vertical
4948	64.30	5.21	35.52	44.21	60.82	74.00	-13.18	Pk	Horizontal
4948	49.36	5.21	35.52	44.21	45.88	54.00	-8.12	AV	Horizontal
7422	60.62	7.10	36.53	44.60	59.65	74.00	-14.35	Pk	Horizontal
7422	45.09	7.10	36.53	44.60	44.12	54.00	-9.88	AV	Horizontal

NOTE: OTHER SPURIOUS FREQUENCY POINTS ARE BELOW THE LIMIT OF 20DB, SO THEY ARE NOT RECORDED



## 5. BAND EDGE TEST

### 5.1 LIMIT


According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 TEST PROCEDURE

- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.  
Use the following spectrum analyzer settings:
  - c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold  
Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
  - d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
  - e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{duty cycle}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

### 5.3 TEST SETUP

#### Radiated Emission Test-Up Frequency Above 1GHz

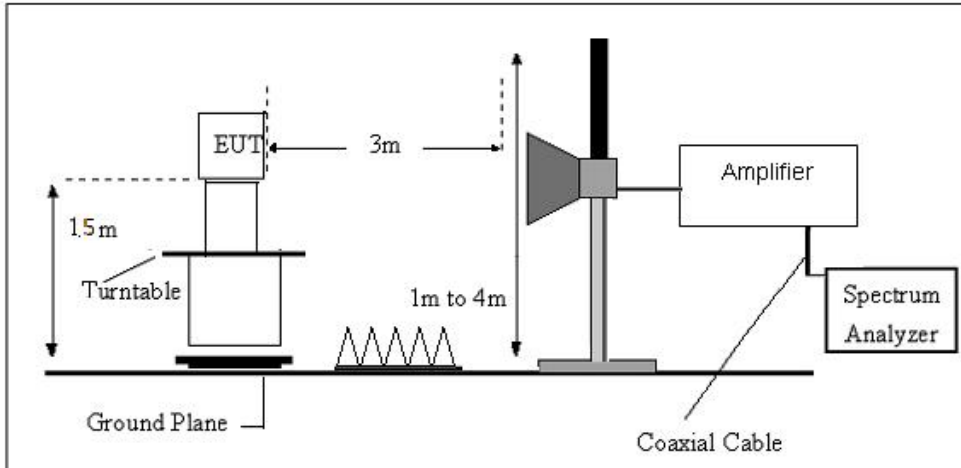



### 5.4 TEST RESULTS

#### Low CH (GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.44	27.59	5.38	30.18	43.23	74.00	-30.77	Horizontal
2400.00	56.88	27.58	5.39	30.18	59.67	74.00	-14.33	Horizontal
2390.00	40.75	27.59	5.38	30.18	43.54	74.00	-30.46	Vertical
2400.00	58.65	27.58	5.39	30.18	61.44	74.00	-12.56	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.54	27.59	5.38	30.18	34.33	54.00	-19.67	Horizontal
2400.00	42.63	27.58	5.39	30.18	45.42	54.00	-8.58	Horizontal
2390.00	31.31	27.59	5.38	30.18	34.10	54.00	-19.90	Vertical
2400.00	44.05	27.58	5.39	30.18	46.84	54.00	-7.16	Vertical

#### High CH(GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.25	27.53	5.47	29.93	45.32	74.00	-28.68	Horizontal
2500.00	41.89	27.55	5.49	29.93	45.00	74.00	-29.00	Horizontal
2483.50	42.69	27.53	5.47	29.93	45.76	74.00	-28.24	Vertical
2500.00	42.65	27.55	5.49	29.93	45.76	74.00	-28.24	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.34	27.53	5.47	29.93	37.41	54.00	-16.59	Horizontal
2500.00	32.69	27.55	5.49	29.93	35.80	54.00	-18.20	Horizontal
2483.50	35.35	27.53	5.47	29.93	38.42	54.00	-15.58	Vertical
2500.00	32.41	27.55	5.49	29.93	35.52	54.00	-18.48	Vertical

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Other spurious frequency points are below the limit of 20dB, so they are not recorded

## 6. 20 DB BANDWIDTH TEST


### 6.1 LIMIT

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

### 6.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a
- a. known signal from an external generator
  - b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
  - c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


### 6.3 TEST SETUP

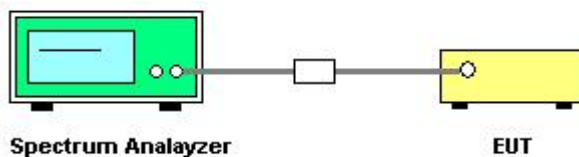

### 6.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 3.7V

Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2408 MHz	2.027	1.8382	PASS
2440 MHz	2.043	2.0433	PASS
2474 MHz	1.891	1.8815	PASS

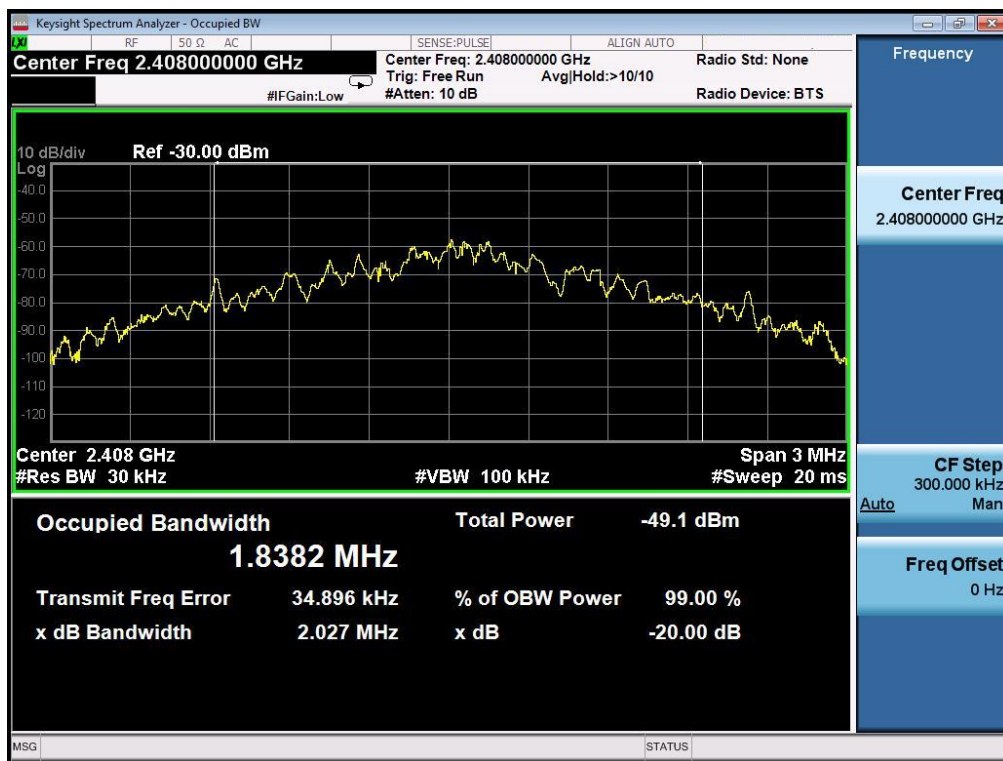



## 7. ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA

The antennas used for this product are Internal antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 0.22 dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*