

FCC Test Report

Report No.: AGC12912220303FE04

FCC ID : 2A54SI39H

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Smart watch

BRAND NAME : N/A

MODEL NAME : 139H, 136, 166, 170, 172, 176, 179, 150, 196, 199

APPLICANT: Shenzhen Forca Technology CO., LTD

DATE OF ISSUE : Apr. 12, 2022

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Confine (Shenzhen) Co., Ltd





Page 2 of 58

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 12, 2022	Valid	Initial Release



Page 3 of 58

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	
2.5. SPECIAL ACCESSORIES	
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	24
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT EQUIPMENT USED	24
9.4. LIMITS AND MEASUREMENT RESULT	24
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	36



Page 4 of 58

10.1. MEASUREMENT PROCEDURE	36
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
10.3. MEASUREMENT EQUIPMENT USED	36
10.4. LIMITS AND MEASUREMENT RESULT	36
11. RADIATED EMISSION	40
11.1. MEASUREMENT PROCEDURE	40
11.2. TEST SETUP	41
11.3. LIMITS AND MEASUREMENT RESULT	42
11.4. TEST RESULT	42
12. LINE CONDUCTED EMISSION TEST	56
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	56
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	56
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	57
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	57
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	58
APPENDIX B: PHOTOGRAPHS OF EUT	58



Page 5 of 58

1. VERIFICATION OF COMPLIANCE

Applicant	Shenzhen Forca Technology CO., LTD
Address	3F, 2 Building, Paibang Brick Factory Industry Zone, Henggang SiLian Road, Longgang District, Shenzhen, Guangdong, China
Manufacturer	Shenzhen Forca Technology CO., LTD
Address	3F, 2 Building, Paibang Brick Factory Industry Zone, Henggang SiLian Road, Longgang District, Shenzhen, Guangdong, China
Factory	Shenzhen Forca Technology CO., LTD
Address	3F, 2 Building, Paibang Brick Factory Industry Zone, Henggang SiLian Road, Longgang District, Shenzhen, Guangdong, China
Product Designation	Smart watch
Brand Name	N/A
Test Model	I39H
Series Model	136, 166, 170, 172, 176, 179, 150, 196, 199
Declaration of Difference	All the same except for the model name and appearance color
Date of test	Mar. 12, 2022 to Apr. 11, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Thea Yuang	
	Thea Huang (Project Engineer)	Apr. 12, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Apr. 12, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Apr. 12, 2022



Page 6 of 58

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Smart watch". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402GHz to 2.480GHz
RF Output Power	BLE 1M: 6.221dBm (Max) BLE 2M: 6.219dBm (Max)
Bluetooth Version	V5.1
Modulation	BR□GFSK, EDR□π /4-DQPSK, □8DPSK BLE☑GFSK 1Mbps ☑GFSK 2Mbps
Number of channels	40 Channels
Antenna Designation	Wire Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	-1dBi
Hardware Version	T29CV1.3
Software Version	1060-T29C-104
Power Supply	DC 3.7V by battery

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
2400~2483.5MHz	:	:
	38	2478 MHz
	39	2480 MHz



Page 7 of 58

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2A54SI39H** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 8 of 58

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



Page 9 of 58

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX (BLE 1M)	
2	Middle channel TX (BLE 1M)	
3	High channel TX (BLE 1M)	
4	Low channel TX (BLE 2M)	
5	Middle channel TX (BLE 2M)	
6	High channel TX (BLE 2M)	

Note: 1. Only the result of the worst case was recorded in the report, if no other cases.

- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting RTL8762C_RFTestTool_v1.0.1.2 × Opownload RF Test LE Cont TX Detect Open COM4 OK Payload Type Data Length Start Channel Stop Channel PHY Modulation Index Stable Modulation Get Freq Value Stop Result SingleToneEventHandle: Port(0) [start] SingleTone Test Status(1) SingleToneEventHandle: Port(0) [stop] SingleTone Test Status(1) SingleToneEventHandle: Port(0) [start] SingleTone Test Status(1) SingleToneEventHandle: Port(0) [stop] SingleTone Test Status(1) LEContTXEventHandle: Port(0) [start] LE ContTX Test Status(1) LEContTXEventHandle: Port(0) [stop] LE Cont TX Test Status(1) LECOntTXEventHandle: Port(0) [stop] LE Cont TX Test Status(1) LEContTXEventHandle: Port(0) [start] LE Cont TX Test Status(1) LEContTXEventHandle: Port(0) [stop] LE Cont TX Test Status(1) .EContTXEventHandle: Port(0) [start] LE Cont TX Test Status(1)




Page 10 of 58


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



RF Conducted Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Smart watch	I39H	2A54SI39H	EUT
2	Control Box	USB-TTL	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



Page 11 of 58

6. TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	RS	ESCI	100034	Sep. 06, 2021	Sep. 05, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
Temperature and humidity box	ESPEC	SH-242	93008290	Sep. 03, 2020	Sep. 02, 2022
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 23, 2020	Mar. 22, 2022
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-49 4	Jan. 08, 2021	Jan. 07, 2023
Test Software	FARA	EZ-EMC(Ver.RA-0 3A)	N/A	N/A	N/A



Page 12 of 58

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth.
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

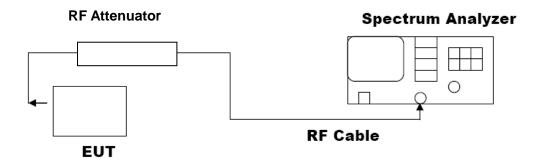





Page 13 of 58

7.3. LIMITS AND MEASUREMENT RESULT

7101 2111111 0 71110	7.3. EIMITO AND MEAGONEMENT NEGGET					
Test Data of Conducted Output Power						
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	6.221	≤30	Pass		
GFSK 1M	2440	6.098	≤30	Pass		
	2480	6.014	≤30	Pass		
GFSK 2M	2402	6.219	≤30	Pass		
	2440	6.080	≤30	Pass		
	2480	5.998	≤30	Pass		

Test Graphs of Conducted Output Power

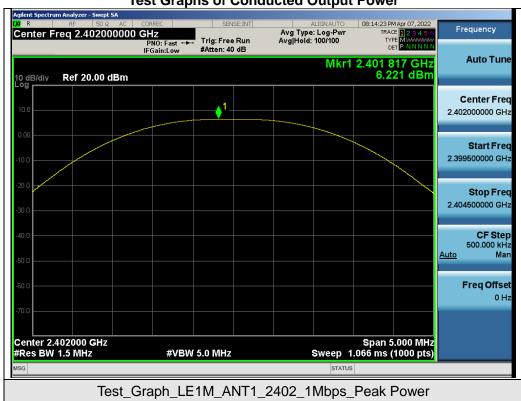







08:27:57 PM Apr 07, 2022

TRACE 1 2 3 4 5 6

TYPE MWWWWW DET P N N N N N Center Freq 2.440000000 GHz Trig: Free Run #Atten: 40 dB **Auto Tune** Mkr1 2.440 123 GHz 6.098 dBm I0 dB/div Ref 20.00 dBm Center Frea 2.440000000 GHz Start Freq 2.437500000 GHz Stop Freq 2.442500000 GHz 500,000 kHz <u>Auto</u> Freq Offset Center 2.440000 GHz #Res BW 1.5 MHz Span 5.000 MHz Sweep 1.066 ms (1000 pts) **#VBW** 5.0 MHz

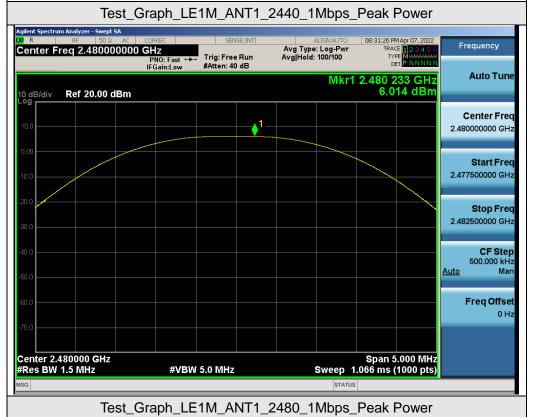















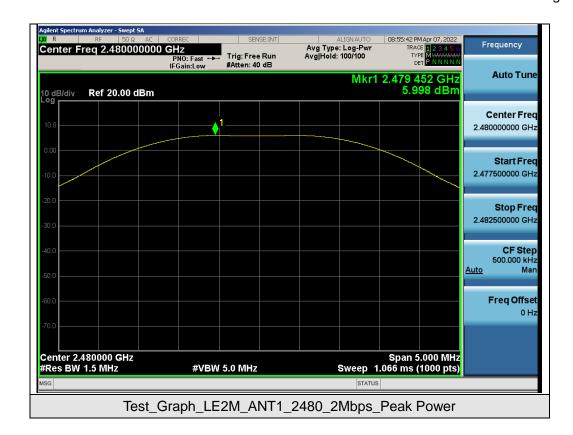



Page 17 of 58

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
GFSK 1M	2402	1.040	0.670	≥0.5	Pass
	2440	1.044	0.687	≥0.5	Pass
	2480	1.048	0.679	≥0.5	Pass
GFSK 2M	2402	2.076	1.399	≥0.5	Pass
	2440	2.082	1.369	≥0.5	Pass
	2480	2.086	1.370	≥0.5	Pass






Test Graphs of Occupied Bandwidth 08:13:39 PM Apr 07, 2022 Radio Std: None Frequency Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB #IFGain:Low Radio Device: BTS Ref 30.00 dBm Center Freq 2.402000000 GHz Center 2.402 GHz #Res BW 30 kHz Span 3 MHz Sweep 4.133 ms CF Step 300.000 kHz #VBW 100 kHz Mar <u>Auto</u> Occupied Bandwidth Total Power 14.8 dBm 1.0399 MHz Freq Offset -6.841 kHz **Transmit Freq Error OBW Power** 99.00 % x dB Bandwidth 1.321 MHz x dB -26.00 dB STATUS Test Graph LE1M ANT1 2402 1Mbps OBW SENSE:INT| ALIGNAUTO
Center Freq: 2.440000000 GHz
Trig: Free Run Avg|Hold:>10/10
#Atten: 30 dB 08:27:13 PM Apr 07, 2022 Radio Std: None Frequency Center Freq 2.440000000 GHz Radio Device: BTS Ref 30.00 dBm Center Freq 2 440000000 GHz Center 2.44 GHz #Res BW 30 kHz Span 3 MHz Sweep 4.133 ms CF Step #VBW 100 kHz <u>Auto</u> Mar 14.6 dBm Occupied Bandwidth **Total Power** 1.0438 MHz Freq Offset **Transmit Freq Error** -4.856 kHz **OBW Power** 99.00 % 0 Hz -26.00 dB x dB Bandwidth 1.316 MHz x dB

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_OBW







Span 5 MHz Sweep 6.867 ms

14.6 dBm

99.00 %

-26.00 dB

CF Step 500.000 kHz

Freq Offset

Mar

<u>Auto</u>

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#VBW 100 kHz

x dB

Total Power

OBW Power

Test_Graph_LE2M_ANT1_2402_2Mbps_OBW

Center 2.402 GHz #Res BW 30 kHz

Occupied Bandwidth


Transmit Freq Error

x dB Bandwidth

2.0760 MHz


-6.076 kHz


2.604 MHz







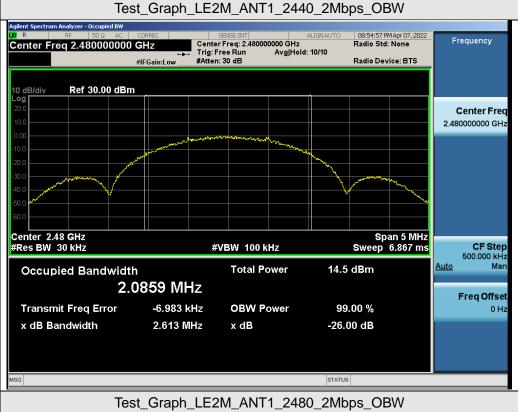






Test Graphs of DTS Bandwidth 08:14:10 PM Apr 07, 2022 Radio Std: None Frequency Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Avg|Hold:>10/10 Trig: Free Run #Atten: 30 dB #IFGain:Low Radio Device: BTS 2.402243 GHz 6.1024 dBm Ref 30.00 dBm Center Freq 2.402000000 GHz Center 2.402 GHz #Res BW 100 kHz Span 3 MHz Sweep 1 ms CF Step 300.000 kHz #VBW 300 kHz Mar <u>Auto</u> Occupied Bandwidth **Total Power** 13.0 dBm 1.0517 MHz Freq Offset -2.791 kHz **Transmit Freq Error OBW Power** 99.00 % x dB Bandwidth 669.6 kHz x dB -6.00 dB STATUS Test Graph LE1M ANT1 2402 1Mbps DTSBW 08:27:44 PM Apr 07, 2022 Radio Std: None Center Freq: 2.440000000 GHz Trig: Free Run Avg|Hold #Atten: 30 dB Frequency Center Freq 2.440000000 GHz Avg|Hold: 10/10 Radio Device: BTS 2.439757 GHz 5.9144 dBm Ref 30.00 dBm Center Freq 2 440000000 GHz Center 2.44 GHz #Res BW 100 kHz Span 3 MHz CF Step #VBW 300 kHz Sweep 1 ms <u>Auto</u> Mar 12.9 dBm Occupied Bandwidth **Total Power** 1.0574 MHz Freq Offset -3.231 kHz **Transmit Freq Error OBW Power** 99.00 % 0 Hz -6.00 dB x dB Bandwidth 686.5 kHz x dB


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2440_1Mbps_DTSBW








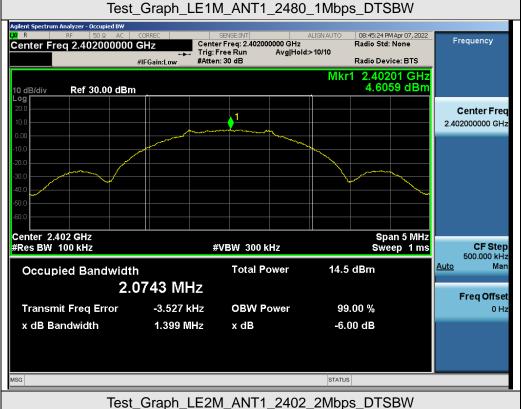





08:52:10 PM Apr 07, 2022 Radio Std: None Center Freq: 2.440000000 GHz Trig: Free Run Avg|Hold:>10/10 #Atten: 30 dB Center Freq 2.440000000 GHz Radio Device: BTS #IFGain:Low 2.43951 GHz 4.6188 dBm Ref 30.00 dBm Center Freq 2.440000000 GHz Center 2.44 GHz #Res BW 100 kHz Span 5 MHz Sweep 1 ms **#VBW 300 kHz CF Step** 500.000 kHz **Total Power** 14.3 dBm Occupied Bandwidth 2.0823 MHz Freq Offset Transmit Freq Error -2.539 kHz **OBW Power** 99.00 % 0 H x dB Bandwidth 1.369 MHz x dB -6.00 dB

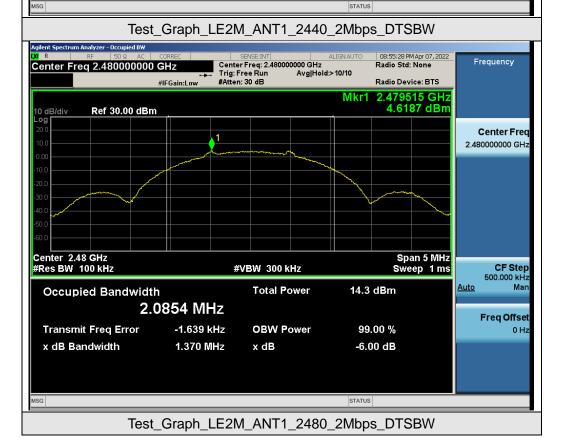

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 24 of 58

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Applicable Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Web: http://www.agccert.com/
















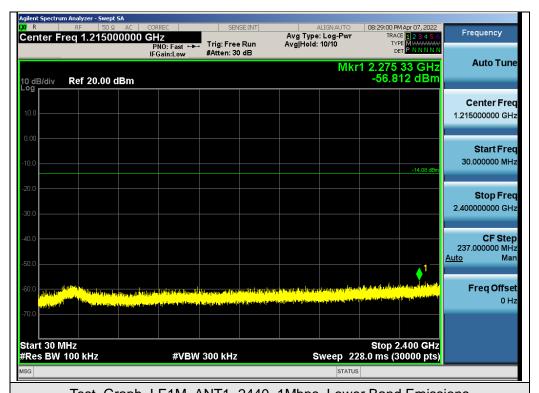


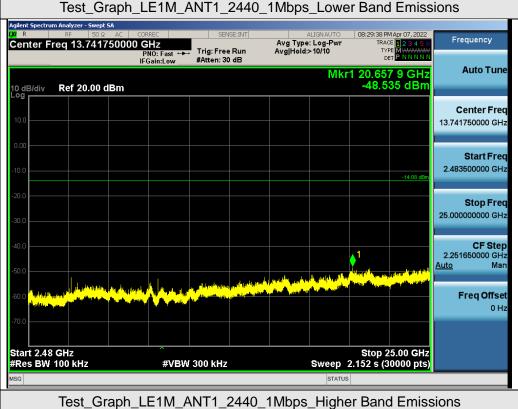










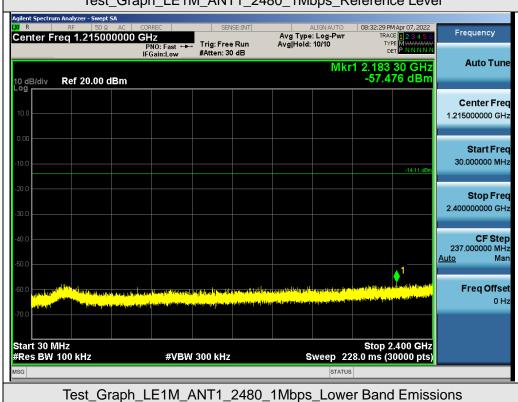







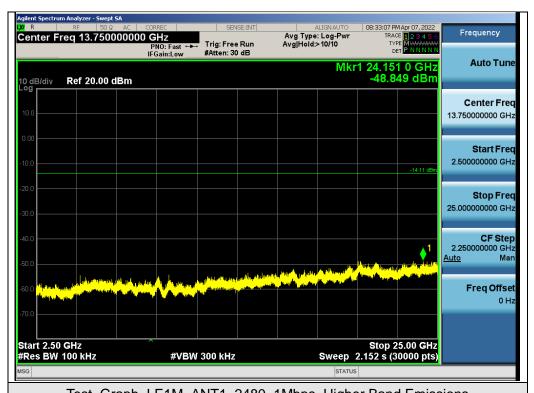

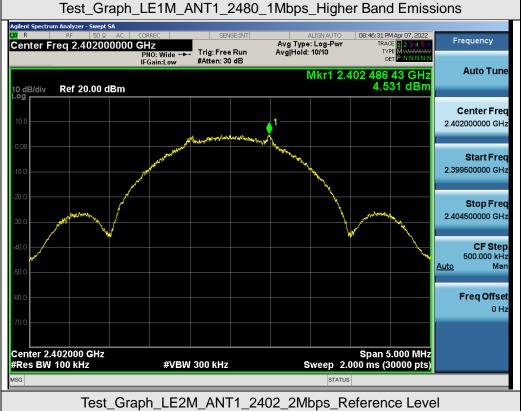






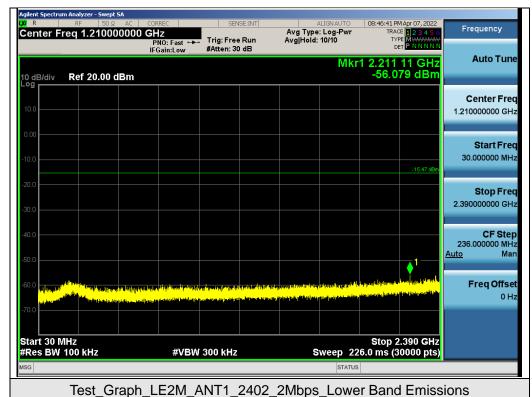












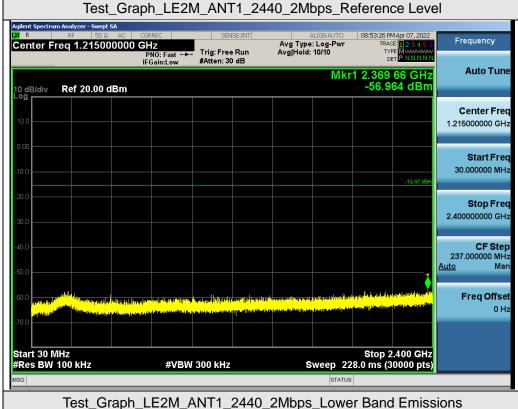







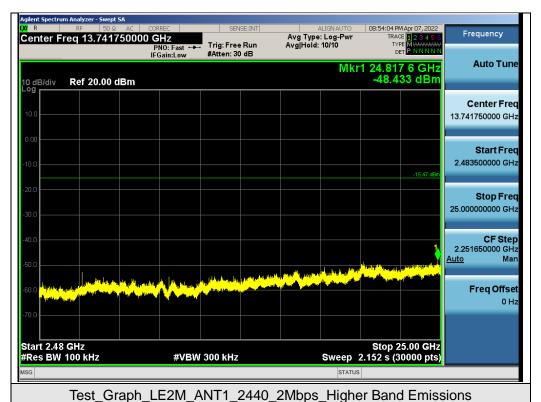









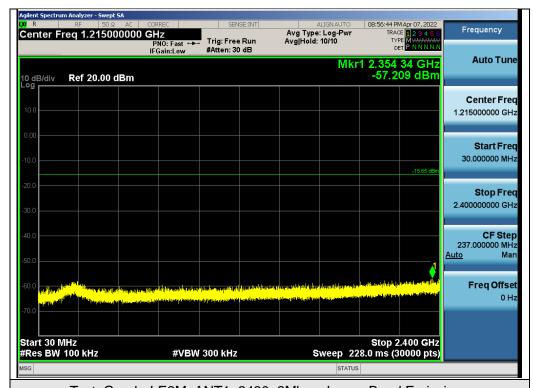


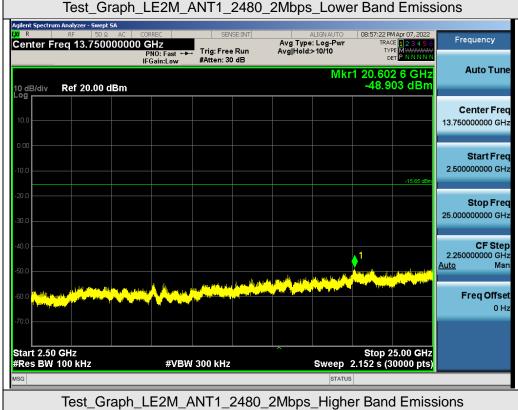






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands 08:16:26 PM Apr 07, 2022 Frequency

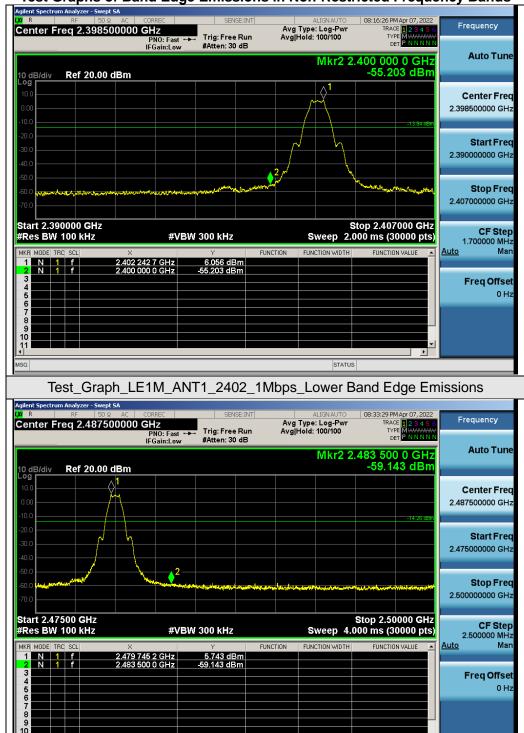


Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Edge Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





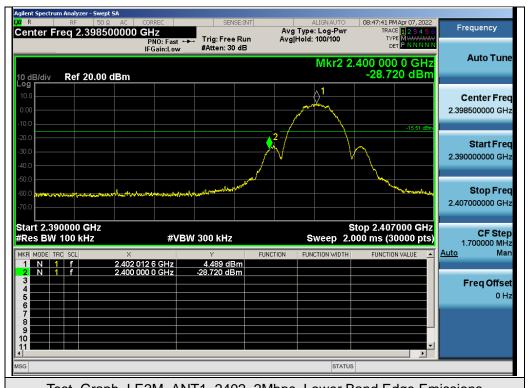

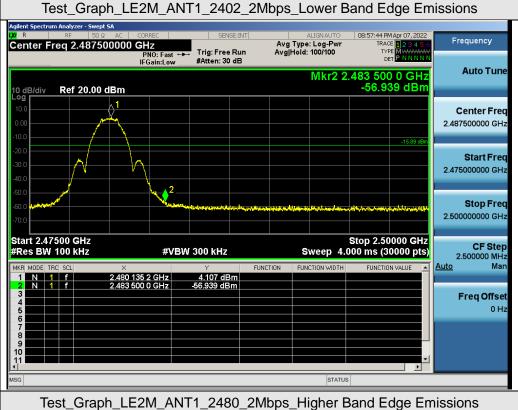



Page 36 of 58

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-4.874	≪8	Pass	
GFSK 1M	2440	-6.071	≪8	Pass	
	2480	-5.979	≪8	Pass	
GFSK 2M	2402	-8.646	≪8	Pass	
	2440	-8.179	≪8	Pass	
	2480	-8.713	≪8	Pass	





Test Graphs of Conducted Output Power Spectral Density Agilent Spectrum

R

RF

SO Q AL

Center Freq 2.402000000 GHz

PNO: Wide ->
IFGain:Low 08:14:45 PM Apr 07, 2022

TRACE

TYPE


MWWWWW

DET

P N N N N Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB Auto Tune Mkr1 2.401 996 5 GHz -4.874 dBm Ref 20.00 dBm 10 dB/div Center Freq 2.402000000 GHz Start Fred 2.401497500 GHz Stop Freq 2.402502500 GHz CF Step 100.500 kHz Mar Auto Freq Offset Center 2.4020000 GHz #Res BW 3.0 kHz Span 1.005 MHz #VBW 10 kHz Sweep 106.0 ms (1000 pts) Test Graph LE1M ANT1 2402 1Mbps PSD Frequency Center Freq 2.440000000 GHz Avg Type: Log-Pwr Avg|Hold: 94/100 Trig: Free Run #Atten: 30 dB PNO: Wide Auto Tune Mkr1 2.439 913 9 GHz -6.071 dBm Ref 20.00 dBm 10 dB/div Log Center Freq 2 440000000 GHz Start Freq 2.439484750 GHz Stop Freq 2.440515250 GHz CF Step <u>Auto</u> Mar Freq Offset 0 Hz Center 2.4400000 GHz #Res BW 3.0 kHz Span 1.031 MHz Sweep 108.7 ms (1000 pts) #VBW 10 kHz


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_PSD






08:31:48 PM Apr 07, 2022 Center Freq 2.480000000 GHz Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 2.480 085 1 GHz -5.979 dBm Ref 20.00 dBm Center Frea 2.480000000 GHz Start Freq 2.479490750 GHz Stop Freq 2.480509250 GHz 101.850 kHz <u>Auto</u> Freq Offset Center 2.4800000 GHz #Res BW 3.0 kHz Span 1.019 MHz Sweep 107.4 ms (1000 pts) #VBW 10 kHz

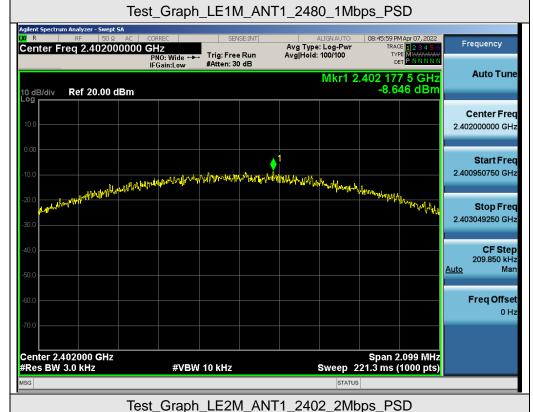


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







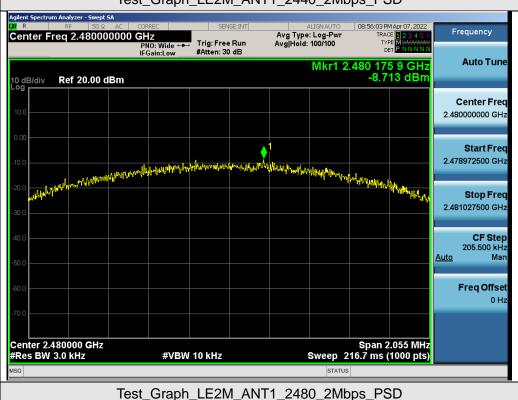

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Page 40 of 58

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

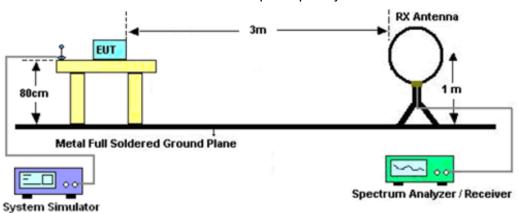

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

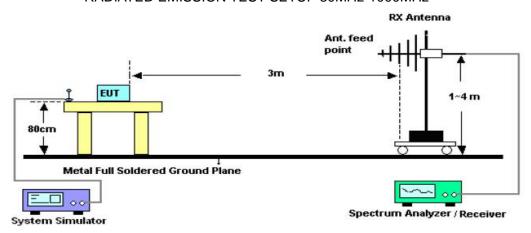

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

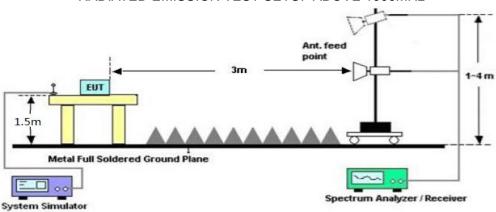



Page 42 of 58

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 43 of 58

Radiated emission from 30MHz to 1000MHz

EUT	Smart watch	Model Name	139H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

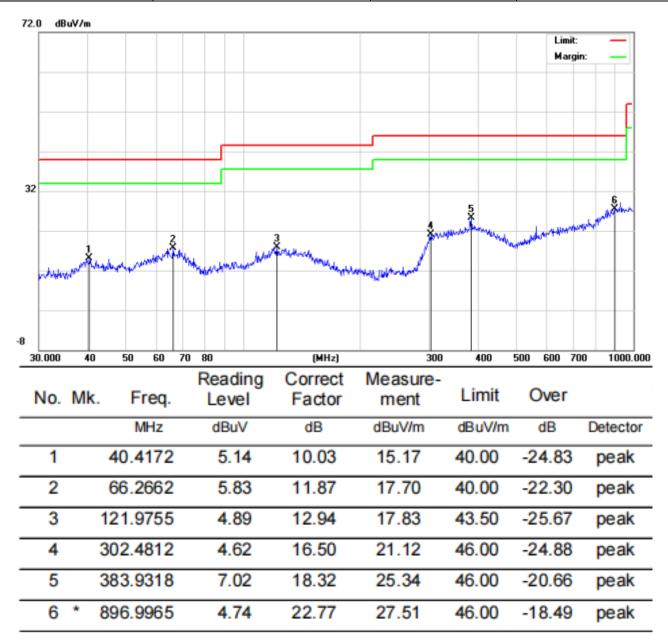


RESULT: PASS



Page 44 of 58

EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

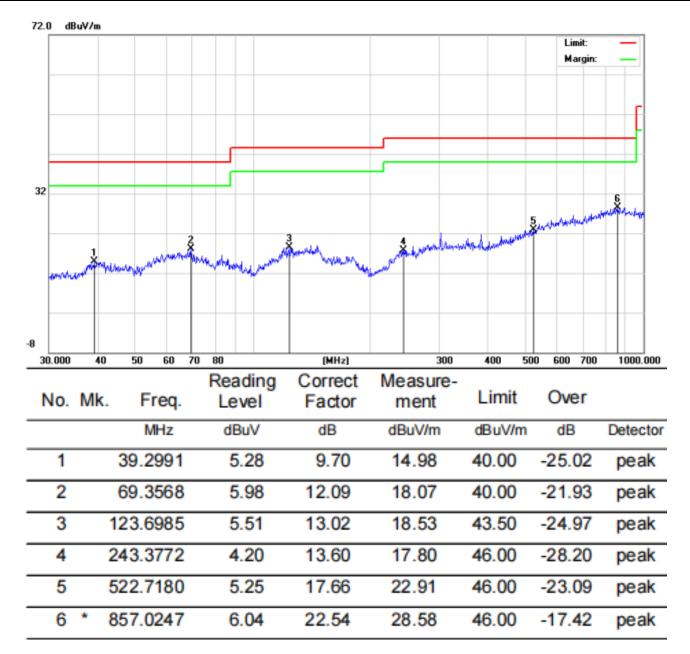

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.



Page 45 of 58

Radiated emission above 1GHz

EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	48.76	0.08	48.84	74	-25.16	peak
4804.000	36.46	0.08	36.54	54	-17.46	AVG
7206.000	42.18	2.21	44.39	74	-29.61	peak
7206.000	32.64	2.21	34.85	54	-19.15	AVG
temark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
46.85	0.08	46.93	74	-27.07	peak
35.24	0.08	35.32	54	-18.68	AVG
41.06	2.21	43.27	74	-30.73	peak
30.67	2.21	32.88	54	-21.12	AVG
	46.85 35.24 41.06	46.85 0.08 35.24 0.08 41.06 2.21	46.85 0.08 46.93 35.24 0.08 35.32 41.06 2.21 43.27	46.85 0.08 46.93 74 35.24 0.08 35.32 54 41.06 2.21 43.27 74	46.85 0.08 46.93 74 -27.07 35.24 0.08 35.32 54 -18.68 41.06 2.21 43.27 74 -30.73

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 46 of 58

EUT	Smart watch	Model Name	139H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	48.32	0.14	48.46	74	-25.54	peak
4880.000	35.43	0.14	35.57	54	-18.43	AVG
7320.000	42.79	2.36	45.15	74	-28.85	peak
7320.000	30.68	2.36	33.04	54	-20.96	AVG
Remark:						
actor - Anter	na Factor + Cabl	a I ass _ Pra-	amplifier			

EUT	Smart watch	Model Name	139H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	47.25	0.14	47.39	74	-26.61	peak
4880.000	35.85	0.14	35.99	54	-18.01	AVG
7320.000	41.38	2.36	43.74	74	-30.26	peak
7320.000	33.02	2.36	35.38	54	-18.62	AVG
Remark:						
Factor = Anten	Factor = Antenna Factor + Cable Loss - Pre-amplifier.					



Page 47 of 58

EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
48.72	0.22	48.94	74	-25.06	peak
34.67	0.22	34.89	54	-19.11	AVG
43.67	2.64	46.31	74	-27.69	peak
28.79	2.64	31.43	54	-22.57	AVG
Remark:					
	(dBµV) 48.72 34.67 43.67	(dBµV) (dB) 48.72 0.22 34.67 0.22 43.67 2.64	(dBμV) (dB) (dBμV/m) 48.72 0.22 48.94 34.67 0.22 34.89 43.67 2.64 46.31	(dBμV) (dB) (dBμV/m) (dBμV/m) 48.72 0.22 48.94 74 34.67 0.22 34.89 54 43.67 2.64 46.31 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 48.72 0.22 48.94 74 -25.06 34.67 0.22 34.89 54 -19.11 43.67 2.64 46.31 74 -27.69

|Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Smart watch	Model Name	139H
Temperature	25°C	Relative Humidity	55%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.75	0.22	46.97	74	-27.03	peak	
4960.000	35.32	0.22	35.54	54	-18.46	AVG	
7440.000	41.08	2.64	43.72	74	-30.28	peak	
7440.000	30.75	2.64	33.39	54	-20.61	AVG	
Remark:	Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.				
RESULT: PASS							

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.







Test result for band edge emission at restricted bands (BLE 1M)

EUT	Smart watch	Model Name	139H
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

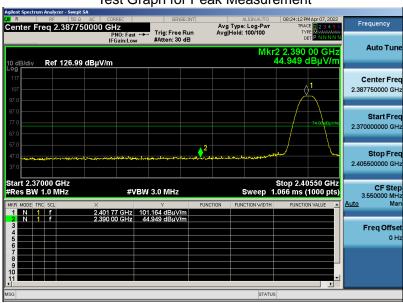



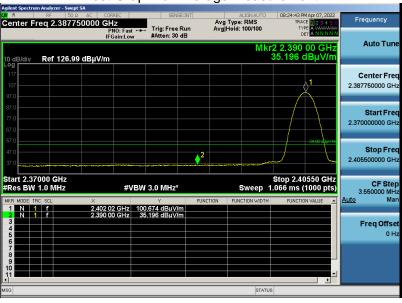


RESULT: PASS






EUT Model Name 139H Smart watch 25°C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 1 **Antenna** Vertical


Test Graph for Peak Measurement

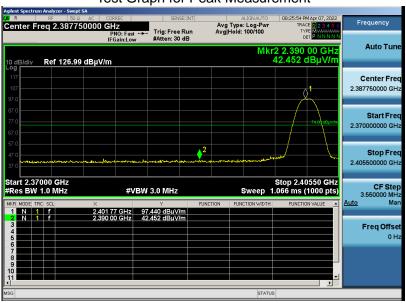

Test Graph for Average Measurement

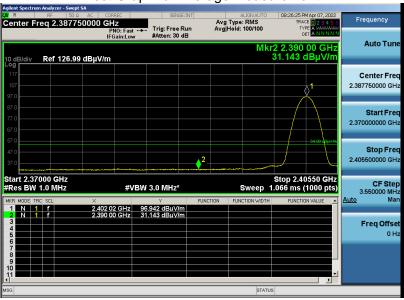


RESULT: PASS






EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal


Test Graph for Peak Measurement

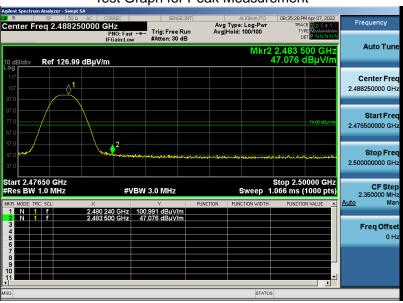

Test Graph for Average Measurement

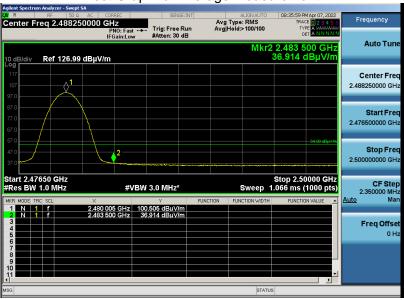


RESULT: PASS






EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical


Test Graph for Peak Measurement

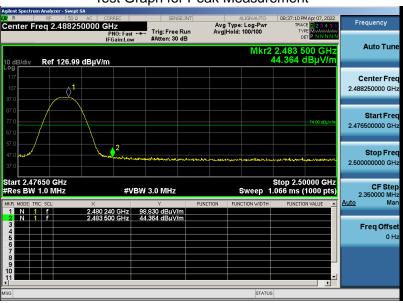

Test Graph for Average Measurement

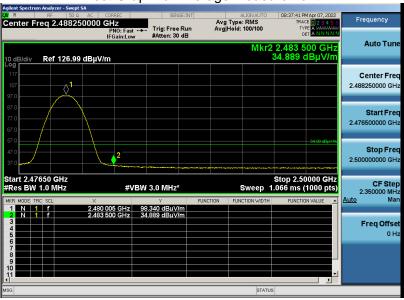

RESULT: PASS







Test result for band edge emission at restricted bands (BLE 2M)

EUT	Smart watch	Model Name	139H
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

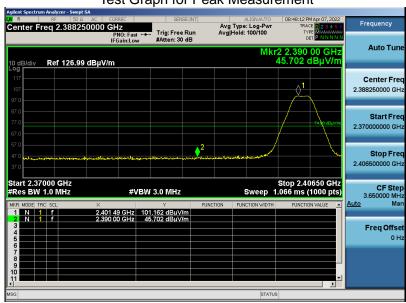

Test Graph for Average Measurement

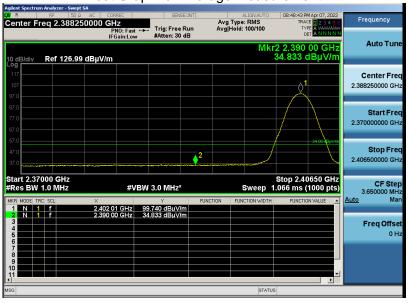


RESULT: PASS






EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical


Test Graph for Peak Measurement

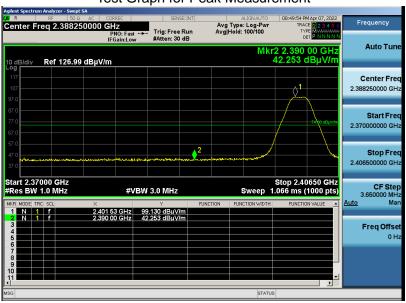

Test Graph for Average Measurement

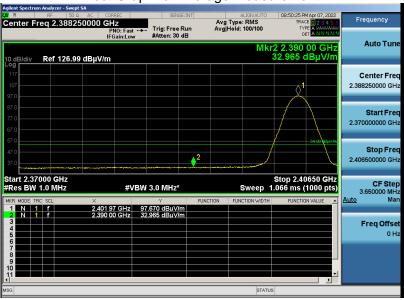


RESULT: PASS






EUT	Smart watch	Model Name	I39H
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal


Test Graph for Peak Measurement

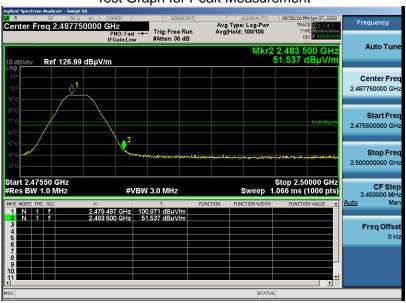

Test Graph for Average Measurement

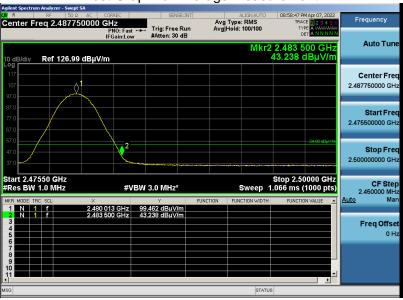


RESULT: PASS






EUT Model Name Smart watch 139H 25°C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 3 **Antenna** Vertical

Test Graph for Peak Measurement

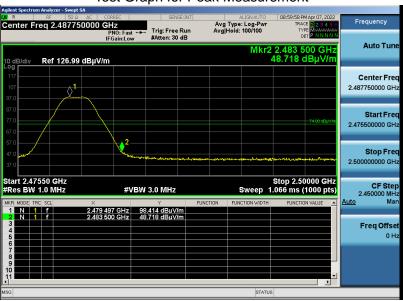

Test Graph for Average Measurement

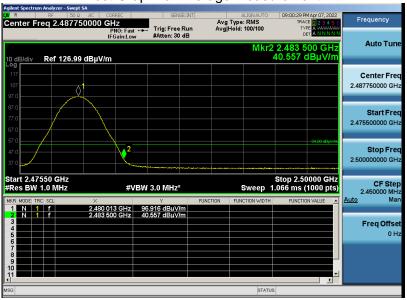

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 56 of 58

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage		
Frequency	Q.P.(dBuV)	Average(dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range $0.15\,\mathrm{MHz}$ to $0.50\,\mathrm{MHz}$.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

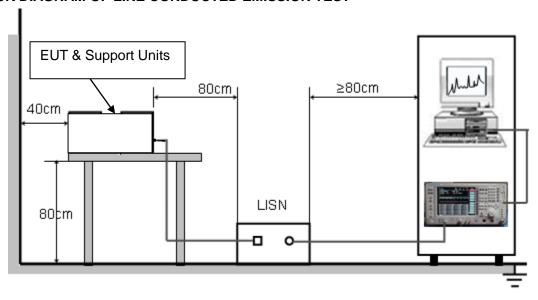



Page 57 of 58

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function cannot transmit when charging.



Page 58 of 58

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC12912220303AP01

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC12912220303AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.