

TEST REPORT

Report No.: BCTC2207279726-2E

Applicant: HHO (Hangzhou) Digital Technology Co., Ltd.

Product Name: HHOLOVE iPet Smart Feeder Wi-Fi Plus

Model/Type Ref.: CT-FDWWP

Tested Date: 2022-07-20 to 2022-07-26

Issued Date: 2022-07-26


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A5DZ-CTFDWWP

Product Name: HHOLOVE iPet Smart Feeder Wi-Fi Plus
Trademark: HHOLOVE
Model/Type Ref.: CT-FDWWP
Prepared For: HHO (Hangzhou) Digital Technology Co., Ltd.
Address: Room 106-2, Building 1, 1818-2 West Wenyi Road, Yuhang District, Hangzhou City, China
Manufacturer: Huizhou Dudu Pet Products Co., Ltd.
Address: Floor 2/3/4, Building 2 District D Qiaosheng Industrial Park, Lilin Town, Huicheng District, Huizhou, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China.
Sample Received Date: 2022-07-20
Sample tested Date: 2022-07-20 to 2022-07-26
Issue Date: 2022-07-26
Report No.: BCTC2207279726-2E
Test Standards: FCC Part15.247
ANSI C63.10-2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test Procedure	13
6.4 EUT Operating Conditions	13
6.5 Test Result	14
7. Radiated Emissions	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	17
7.3 Test Procedure	18
7.4 EUT Operating Conditions	19
7.5 Test Result	20
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test Procedure	28
8.4 EUT Operating Conditions	28
8.5 Test Result	29
9. Power Spectral Density Test	31
9.1 Block Diagram Of Test Setup	31
9.2 Limit	31
9.3 Test Procedure	31
9.4 EUT Operating Conditions	31
9.5 Test Result	32
10. Bandwidth Test	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test Procedure	39
10.4 EUT Operating Conditions	39
10.5 Test Result	40
11. Peak Output Power Test	47
11.1 Block Diagram Of Test Setup	47


11.2	Limit	47
11.3	Test Procedure	47
11.4	EUT Operating Conditions	47
11.5	Test Result.....	48
12.	100 Khz Bandwidth Of Frequency Band Edge	49
12.1	Block Diagram Of Test Setup.....	49
12.2	Limit	49
12.3	Test Procedure	49
12.4	EUT Operating Conditions	49
12.5	Test Result.....	50
13.	Duty Cycle Of Test Signal	58
13.1	Standard Requirement.....	58
13.2	Formula.....	58
13.3	Test Procedure	58
13.4	Test Result.....	58
14.	Antenna Requirement	61
14.1	Limit	61
14.2	Test Result.....	61
15.	EUT Photographs.....	62
16.	EUT Test Setup Photographs.....	63

(Note: N/A Means Not Applicable)

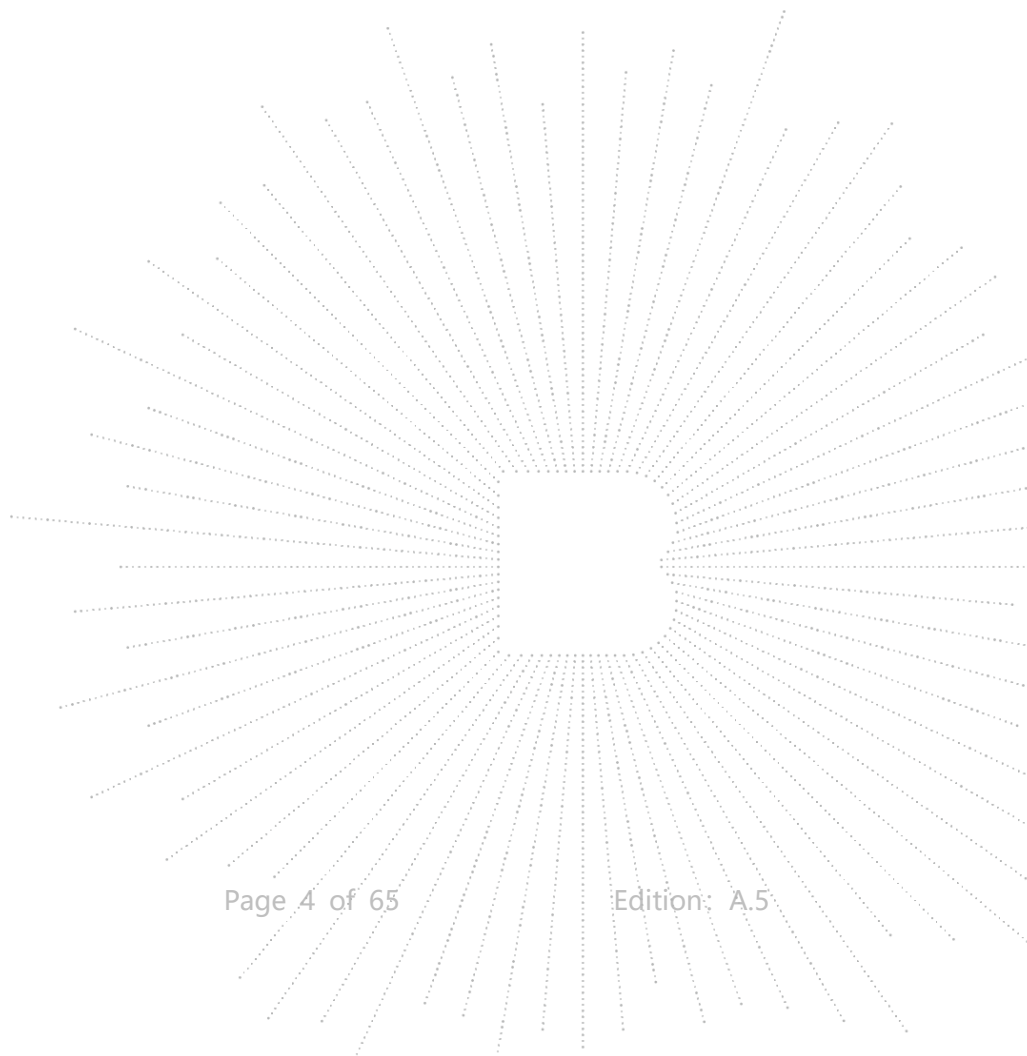

1. Version

Report No.	Issue Date	Description	Approved
BCTC2207279726-2E	2022-07-26	Original	Valid

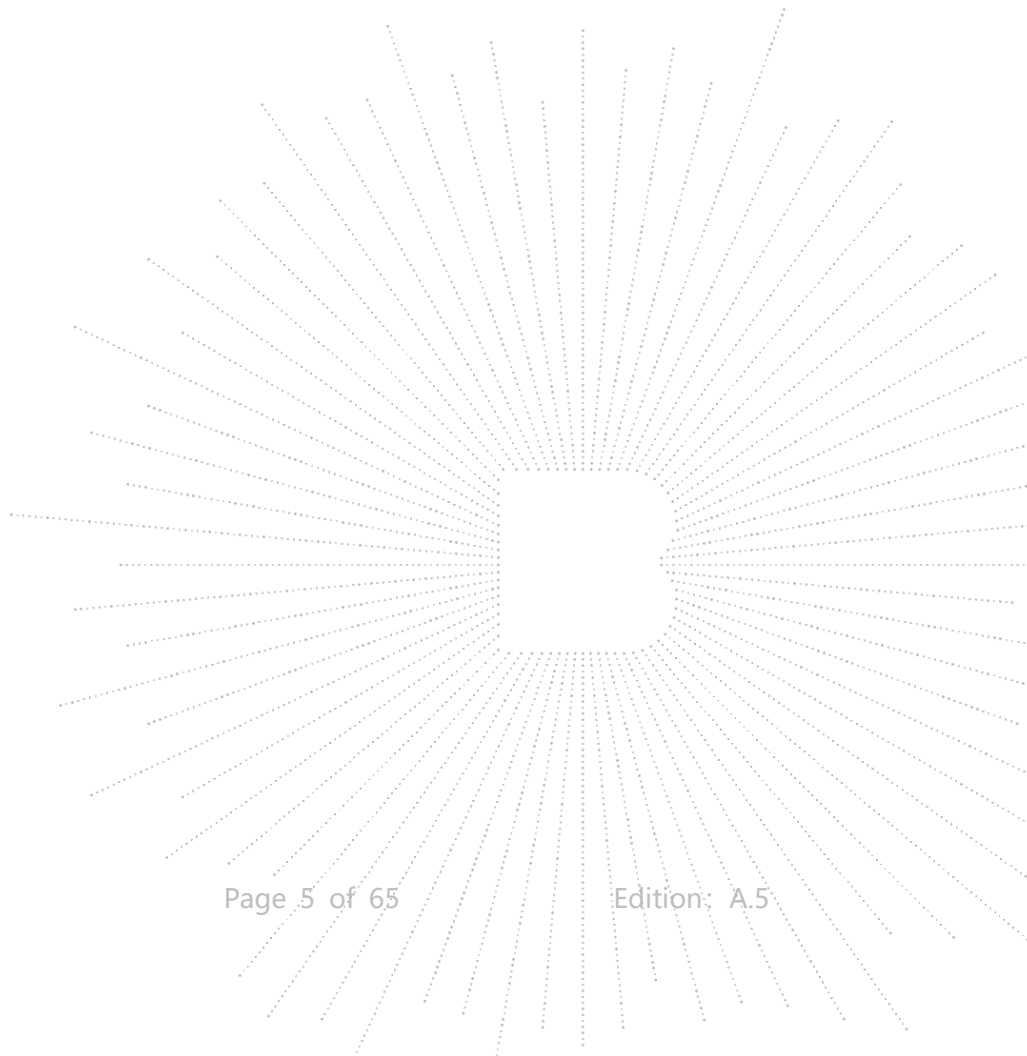

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type Ref.:	CT-FDWWP
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
Type of Modulation:	WIFI: OFDM/DSSS
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
Antenna installation:	Chip antenna
Antenna Gain:	2.71dBi
Ratings:	USB: DC 5V Battery: DC 4.5V

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission & Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	HHOLOVE iPet Smart Feeder	HHOLOVE	CT-FDWWP	N/A	EUT
E-2	Adapter	UGreen	CD122	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.5M	USB cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 03	802.11n40
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Link mode (Conducted emission and Radiated emission)	

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	Wifi Test Tool v1.6.0		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used


Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
LISN	R&S	ENV216	101375	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB C-6GHz	1650	May 24, 2022	May 23, 2023

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 24, 2022	May 23, 2023
Power Sensor (AV)	Keysight	E9300A	\	May 24, 2022	May 23, 2023
Signal Analyzer20kH z-26.5GHz	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	\	May 24, 2022	May 23, 2023

Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 26, 2022	May 25, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 26, 2022	May 25, 2023
Horn Antenn(18GH z-40GHz)	Schwarzbeck	BBHA9170	00822	May 26, 2022	May 25, 2023
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 26, 2022	May 25, 2023
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 26, 2022	May 25, 2023
RF cables1(9kHz- 30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	May 26, 2022	May 25, 2023
RF cables2(30MH z-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	May 26, 2022	May 25, 2023
RF cables3(1GHz -40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419	\	May 26, 2022	May 25, 2023
Power Sensor (AV)	Keysight	E9300A	\	May 26, 2022	May 25, 2023
Signal Analyzer20kH z-26.5GHz	Keysight	N9020A	MY49100060	May 26, 2022	May 25, 2023
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	\	May 26, 2022	May 25, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

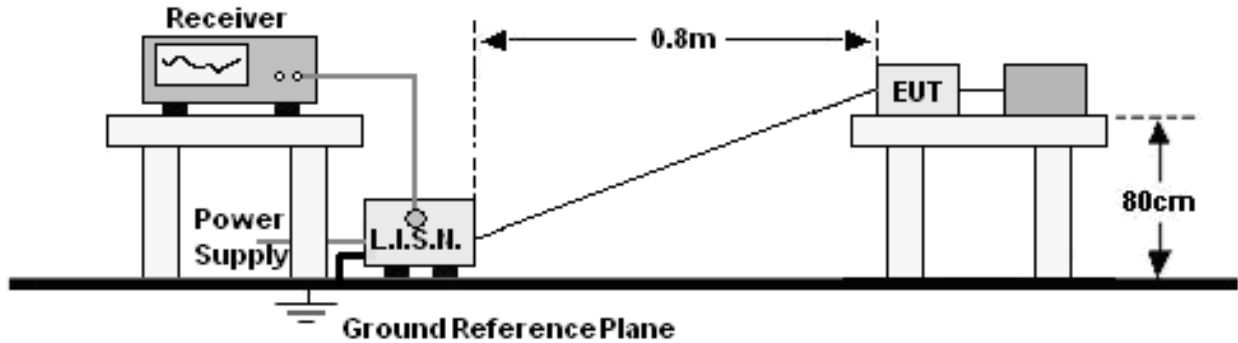

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	L

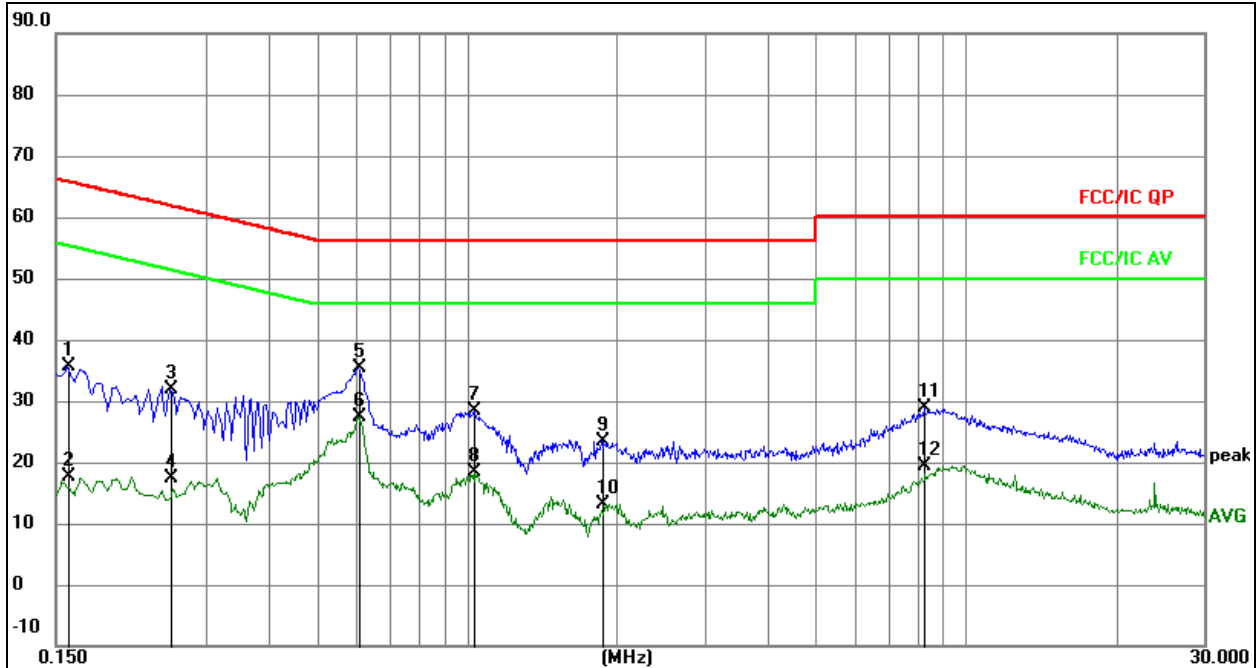


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1590	15.86	19.69	35.55	65.52	-29.97	QP
2	0.1590	-2.17	19.69	17.52	55.52	-38.00	AVG
3	0.2535	12.02	19.79	31.81	61.64	-29.83	QP
4	0.2535	-2.53	19.79	17.26	51.64	-34.38	AVG
5	0.6045	15.61	19.73	35.34	56.00	-20.66	QP
6 *	0.6045	7.66	19.73	27.39	46.00	-18.61	AVG
7	1.0320	8.58	19.76	28.34	56.00	-27.66	QP
8	1.0320	-1.39	19.76	18.37	46.00	-27.63	AVG
9	1.8735	3.62	19.86	23.48	56.00	-32.52	QP
10	1.8735	-6.65	19.86	13.21	46.00	-32.79	AVG
11	8.2545	8.57	20.22	28.79	60.00	-31.21	QP
12	8.2545	-0.84	20.22	19.38	50.00	-30.62	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	N

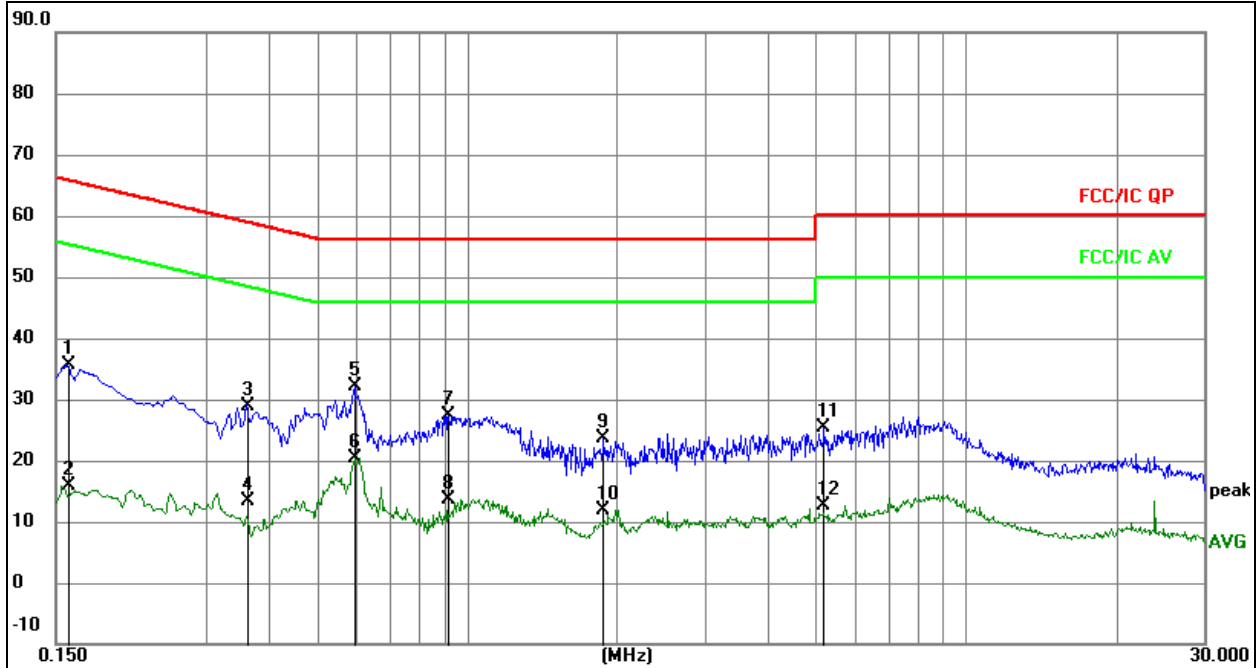
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1582	15.95	19.69	35.64	65.56	-29.92	QP
2	0.1582	-3.90	19.69	15.79	55.56	-39.77	AVG
3	0.3615	9.24	19.76	29.00	58.69	-29.69	QP
4	0.3615	-6.34	19.76	13.42	48.69	-35.27	AVG
5 *	0.5948	12.30	19.73	32.03	56.00	-23.97	QP
6	0.5948	0.76	19.73	20.49	46.00	-25.51	AVG
7	0.9184	7.52	19.75	27.27	56.00	-28.73	QP
8	0.9184	-6.03	19.75	13.72	46.00	-32.28	AVG
9	1.8779	3.78	19.87	23.65	56.00	-32.35	QP
10	1.8779	-7.96	19.87	11.91	46.00	-34.09	AVG
11	5.1937	5.19	20.13	25.32	60.00	-34.68	QP
12	5.1937	-7.46	20.13	12.67	50.00	-37.33	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

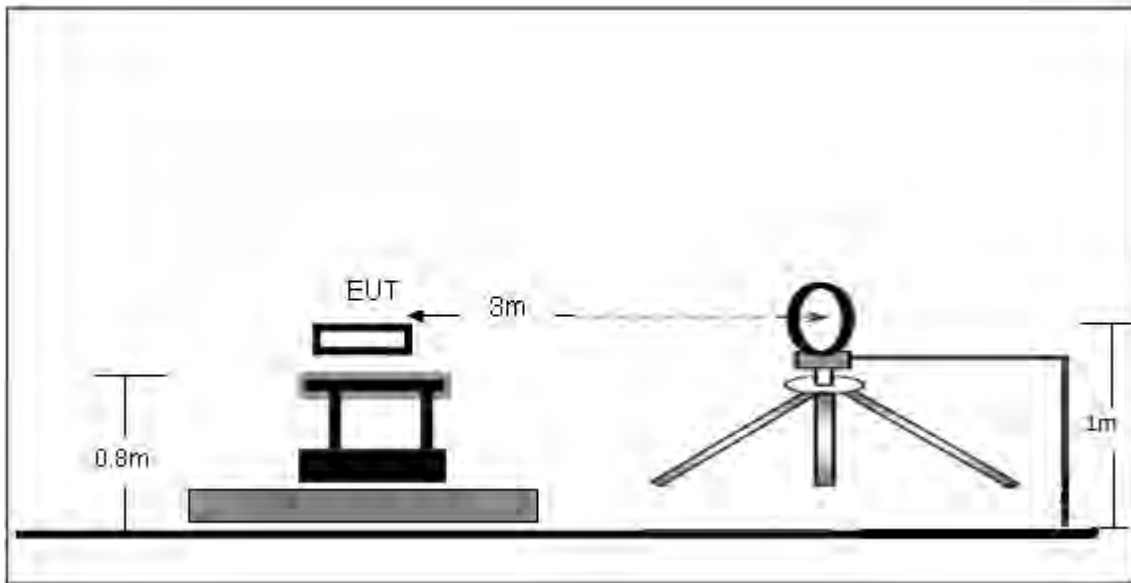

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

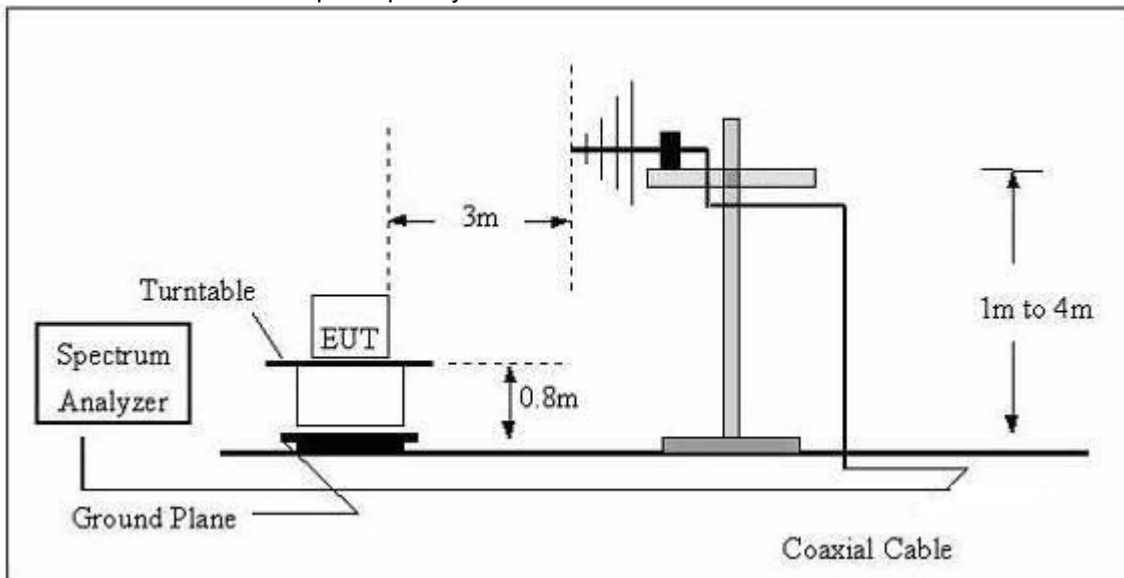

(C) Radiated Emission Test-Up Frequency Above 1GHz

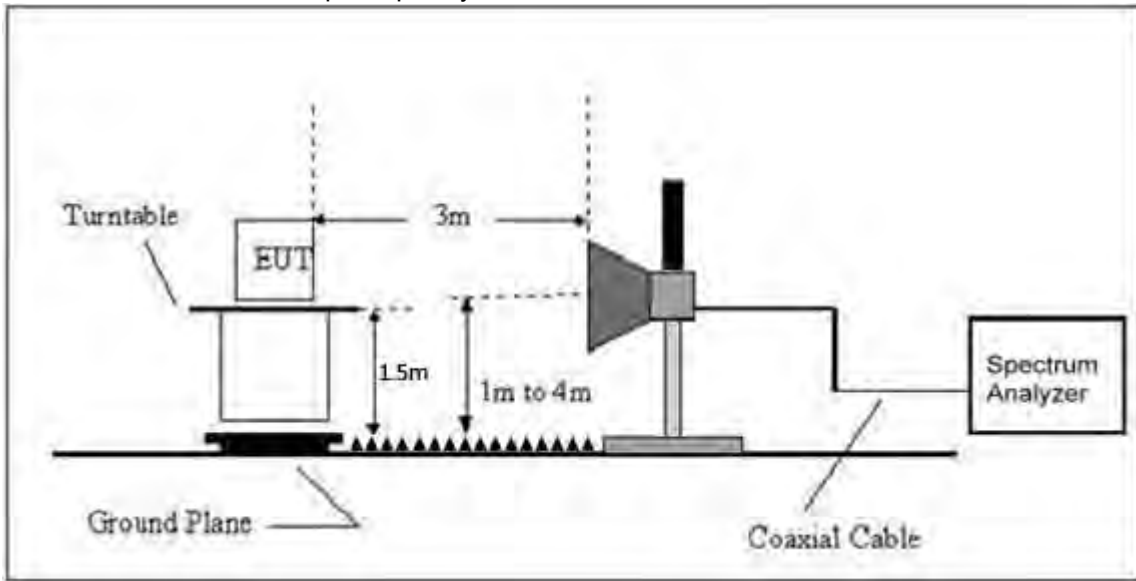

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

7.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 13	Polarization :	--


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

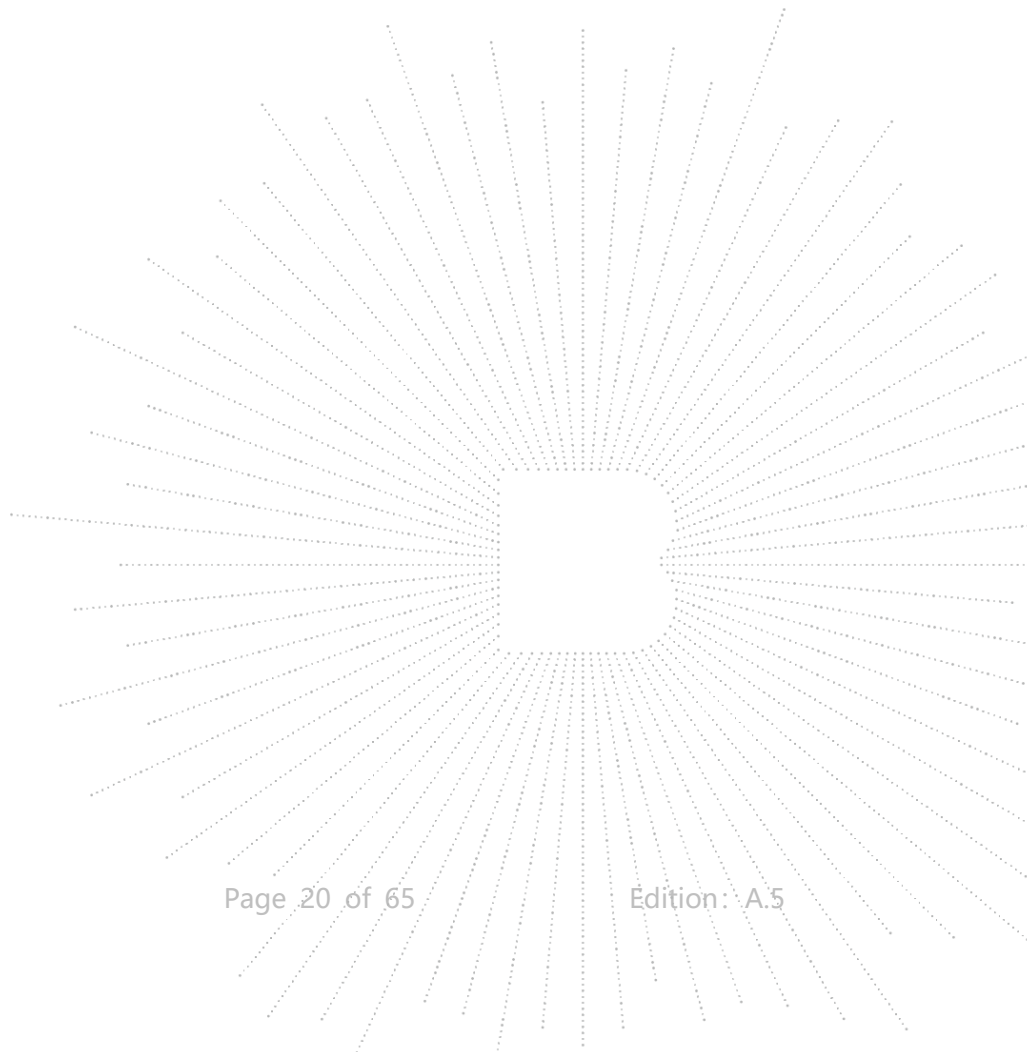

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	Horizontal

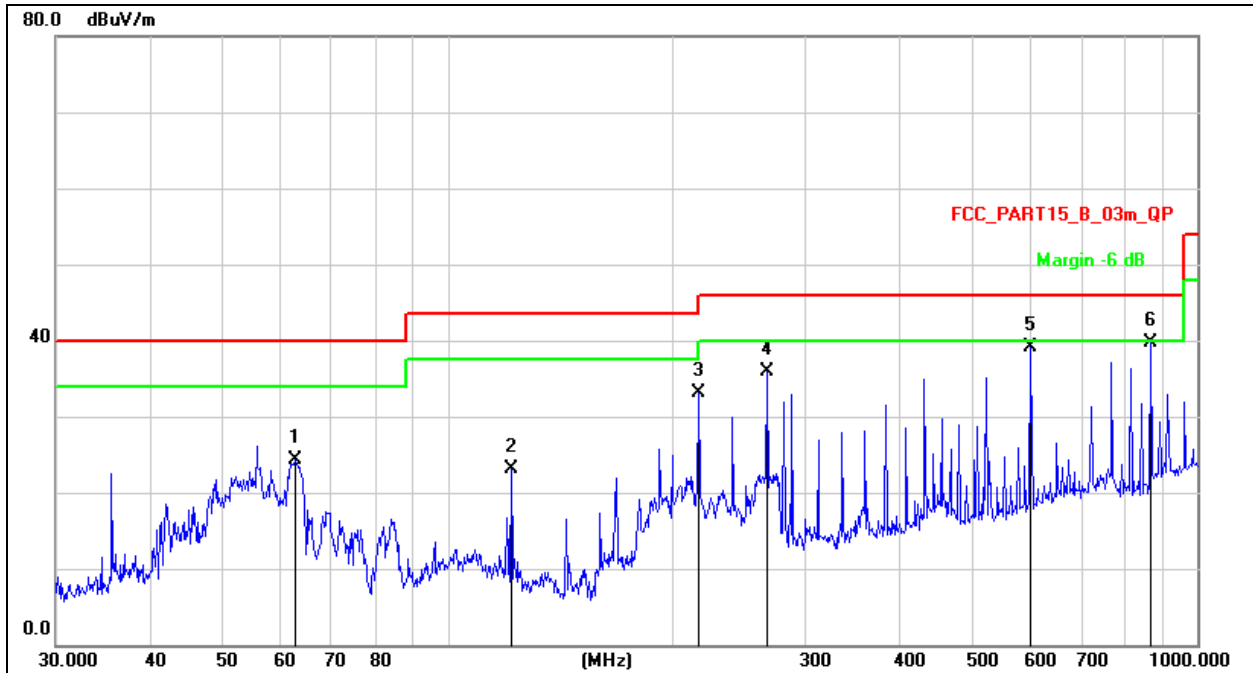


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	62.6507	41.51	-17.22	24.29	40.00	-15.71	QP
2	121.5486	41.19	-18.08	23.11	43.50	-20.39	QP
3	216.0240	48.52	-15.39	33.13	46.00	-12.87	QP
4	266.6089	49.71	-13.78	35.93	46.00	-10.07	QP
5	599.3211	44.60	-5.54	39.06	46.00	-6.94	QP
6 *	866.0878	41.15	-1.45	39.70	46.00	-6.30	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization :	Vertical

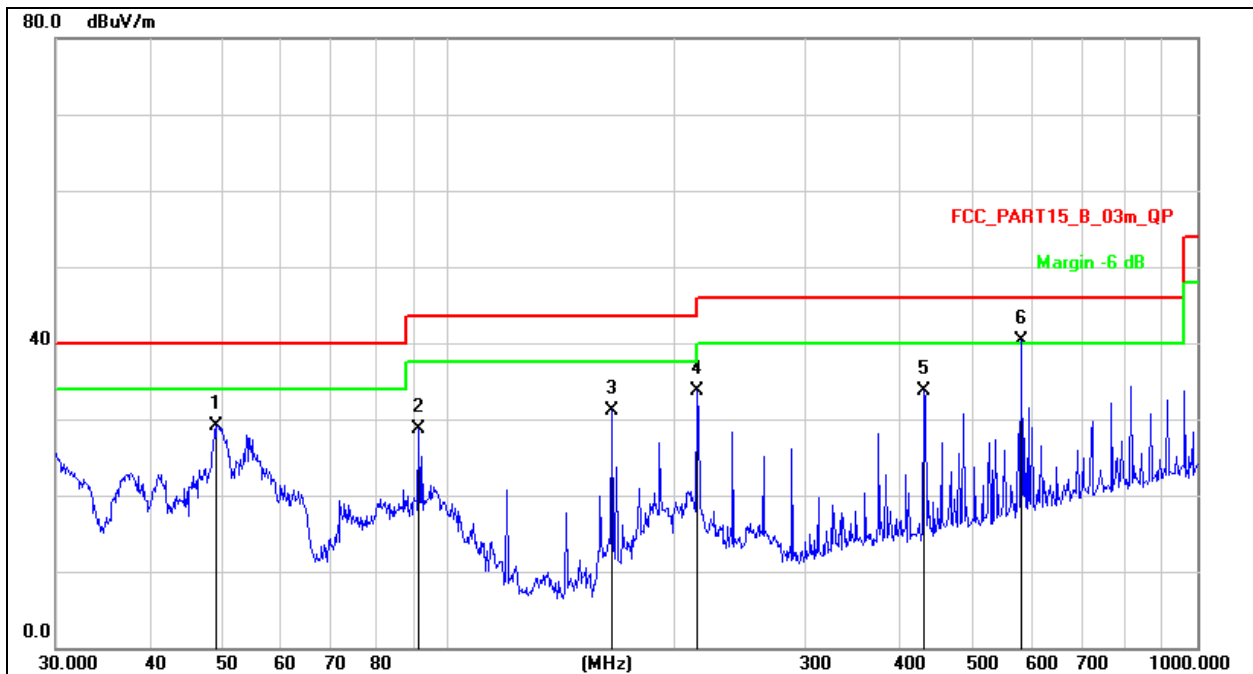

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		49.1865	44.31	-15.14	29.17	40.00	-10.83	QP
2		91.4949	46.76	-18.10	28.66	43.50	-14.84	QP
3		165.4866	49.66	-18.65	31.01	43.50	-12.49	QP
4		215.2678	49.15	-15.41	33.74	43.50	-9.76	QP
5		432.5457	43.16	-9.54	33.62	46.00	-12.38	QP
6	*	582.7425	46.18	-5.97	40.21	46.00	-5.79	QP

Between 1GHz – 25GHz
802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.76	-0.43	53.33	74.00	-20.67	PK
V	4824.00	43.50	-0.43	43.07	54.00	-10.93	AV
V	7236.00	43.47	8.31	51.78	74.00	-22.22	PK
V	7236.00	34.43	8.31	42.74	54.00	-11.26	AV
H	4824.00	49.65	-0.43	49.22	74.00	-24.78	PK
H	4824.00	40.58	-0.43	40.15	54.00	-13.85	AV
H	7236.00	42.17	8.31	50.48	74.00	-23.52	PK
H	7236.00	34.91	8.31	43.22	54.00	-10.78	AV
Middle channel:2437MHz							
V	4874.00	52.68	-0.38	52.30	74.00	-21.70	PK
V	4874.00	46.62	-0.38	46.24	54.00	-7.76	AV
V	7311.00	43.33	8.83	52.16	74.00	-21.84	PK
V	7311.00	34.10	8.83	42.93	54.00	-11.07	AV
H	4874.00	49.36	-0.38	48.98	74.00	-25.02	PK
H	4874.00	39.96	-0.38	39.58	54.00	-14.42	AV
H	7311.00	41.48	8.83	50.31	74.00	-23.69	PK
H	7311.00	33.62	8.83	42.45	54.00	-11.55	AV
High channel:2462MHz							
V	4924.00	54.79	-0.32	54.47	74.00	-19.53	PK
V	4924.00	46.60	-0.32	46.28	54.00	-7.72	AV
V	7386.00	48.05	9.35	57.40	74.00	-16.60	PK
V	7386.00	38.46	9.35	47.81	54.00	-6.19	AV
H	4924.00	52.53	-0.32	52.21	74.00	-21.79	PK
H	4924.00	43.22	-0.32	42.90	54.00	-11.10	AV
H	7386.00	45.48	9.35	54.83	74.00	-19.17	PK
H	7386.00	37.46	9.35	46.81	54.00	-7.19	AV

Remark:

1. Emission Level = Meter Reading + Factor,
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.57	-0.43	53.14	74.00	-20.86	PK
V	4824.00	45.42	-0.43	44.99	54.00	-9.01	AV
V	7236.00	46.29	8.31	54.60	74.00	-19.40	PK
V	7236.00	36.32	8.31	44.63	54.00	-9.37	AV
H	4824.00	51.72	-0.43	51.29	74.00	-22.71	PK
H	4824.00	41.81	-0.43	41.38	54.00	-12.62	AV
H	7236.00	43.41	8.31	51.72	74.00	-22.28	PK
H	7236.00	35.09	8.31	43.40	54.00	-10.60	AV
Middle channel:2437MHz							
V	4874.00	51.41	-0.38	51.03	74.00	-22.97	PK
V	4874.00	42.72	-0.38	42.34	54.00	-11.66	AV
V	7311.00	41.00	8.83	49.83	74.00	-24.17	PK
V	7311.00	31.57	8.83	40.40	54.00	-13.60	AV
H	4874.00	48.08	-0.38	47.70	74.00	-26.30	PK
H	4874.00	37.15	-0.38	36.77	54.00	-17.23	AV
H	7311.00	38.24	8.83	47.07	74.00	-26.93	PK
H	7311.00	30.90	8.83	39.73	54.00	-14.27	AV
High channel:2462MHz							
V	4924.00	52.79	-0.32	52.47	74.00	-21.53	PK
V	4924.00	44.47	-0.32	44.15	54.00	-9.85	AV
V	7386.00	45.82	9.35	55.17	74.00	-18.83	PK
V	7386.00	36.81	9.35	46.16	54.00	-7.84	AV
H	4924.00	50.67	-0.32	50.35	74.00	-23.65	PK
H	4924.00	40.01	-0.32	39.69	54.00	-14.31	AV
H	7386.00	44.03	9.35	53.38	74.00	-20.62	PK
H	7386.00	36.46	9.35	45.81	54.00	-8.19	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.68	-0.43	53.25	74.00	-20.75	PK
V	4824.00	43.29	-0.43	42.86	54.00	-11.14	AV
V	7236.00	46.12	8.31	54.43	74.00	-19.57	PK
V	7236.00	36.92	8.31	45.23	54.00	-8.77	AV
H	4824.00	49.83	-0.43	49.40	74.00	-24.60	PK
H	4824.00	40.65	-0.43	40.22	54.00	-13.78	AV
H	7236.00	43.18	8.31	51.49	74.00	-22.51	PK
H	7236.00	34.85	8.31	43.16	54.00	-10.84	AV
Middle channel:2437MHz							
V	4874.00	51.79	-0.38	51.41	74.00	-22.59	PK
V	4874.00	45.63	-0.38	45.25	54.00	-8.75	AV
V	7311.00	41.04	8.83	49.87	74.00	-24.13	PK
V	7311.00	31.06	8.83	39.89	54.00	-14.11	AV
H	4874.00	50.42	-0.38	50.04	74.00	-23.96	PK
H	4874.00	39.91	-0.38	39.53	54.00	-14.47	AV
H	7311.00	39.29	8.83	48.12	74.00	-25.88	PK
H	7311.00	31.98	8.83	40.81	54.00	-13.19	AV
High channel:2462MHz							
V	4924.00	53.36	-0.32	53.04	74.00	-20.96	PK
V	4924.00	43.46	-0.32	43.14	54.00	-10.86	AV
V	7386.00	47.26	9.35	56.61	74.00	-17.39	PK
V	7386.00	37.80	9.35	47.15	54.00	-6.85	AV
H	4924.00	50.74	-0.32	50.42	74.00	-23.58	PK
H	4924.00	40.78	-0.32	40.46	54.00	-13.54	AV
H	7386.00	44.93	9.35	54.28	74.00	-19.72	PK
H	7386.00	37.37	9.35	46.72	54.00	-7.28	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	53.14	-0.43	52.71	74.00	-21.29	PK
V	4844.00	42.73	-0.43	42.30	54.00	-11.70	AV
V	7266.00	43.18	8.31	51.49	74.00	-22.51	PK
V	7266.00	33.60	8.31	41.91	54.00	-12.09	AV
H	4844.00	51.79	-0.43	51.36	74.00	-22.64	PK
H	4844.00	41.91	-0.43	41.48	54.00	-12.52	AV
H	7266.00	41.09	8.31	49.40	74.00	-24.60	PK
H	7266.00	32.56	8.31	40.87	54.00	-13.13	AV
Middle channel:2437MHz							
V	4874.00	51.12	-0.38	50.74	74.00	-23.26	PK
V	4874.00	43.77	-0.38	43.39	54.00	-10.61	AV
V	7311.00	40.25	8.83	49.08	74.00	-24.92	PK
V	7311.00	31.86	8.83	40.69	54.00	-13.31	AV
H	4874.00	49.79	-0.38	49.41	74.00	-24.59	PK
H	4874.00	40.56	-0.38	40.18	54.00	-13.82	AV
H	7311.00	37.58	8.83	46.41	74.00	-27.59	PK
H	7311.00	29.26	8.83	38.09	54.00	-15.91	AV
High channel:2452MHz							
V	4904.00	53.44	-0.32	53.12	74.00	-20.88	PK
V	4904.00	45.16	-0.32	44.84	54.00	-9.16	AV
V	7356.00	47.28	9.35	56.63	74.00	-17.37	PK
V	7356.00	37.44	9.35	46.79	54.00	-7.21	AV
H	4904.00	51.75	-0.32	51.43	74.00	-22.57	PK
H	4904.00	42.06	-0.32	41.74	54.00	-12.26	AV
H	7356.00	44.88	9.35	54.23	74.00	-19.77	PK
H	7356.00	36.62	9.35	45.97	54.00	-8.03	AV


Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

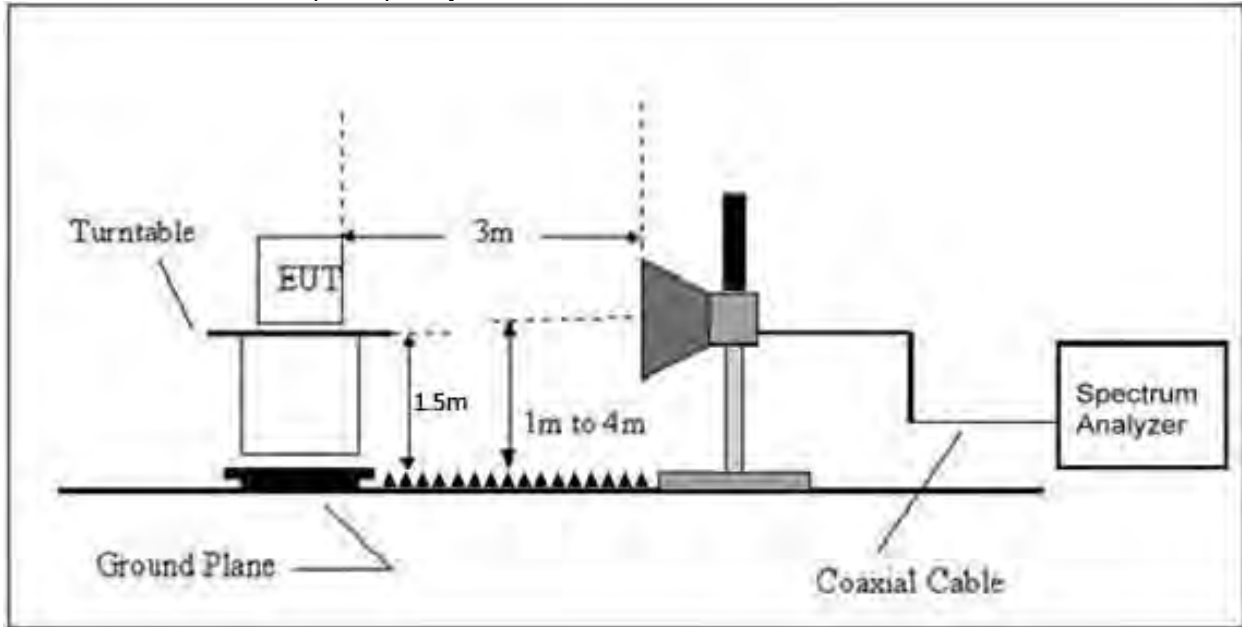

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	53.24	-6.70	46.54	74.00	54.00	PASS
	H	2400.00	58.01	-6.71	51.30	74.00	54.00	PASS
	V	2390.00	53.05	-6.70	46.35	74.00	54.00	PASS
	V	2400.00	54.72	-6.71	48.01	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	52.73	-6.79	45.94	74.00	54.00	PASS
	H	2500.00	48.52	-6.81	41.71	74.00	54.00	PASS
	V	2483.50	51.49	-6.79	44.70	74.00	54.00	PASS
	V	2500.00	47.62	-6.81	40.81	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	53.56	-6.70	46.86	74.00	54.00	PASS
	H	2400.00	56.69	-6.71	49.98	74.00	54.00	PASS
	V	2390.00	53.93	-6.70	47.23	74.00	54.00	PASS
	V	2400.00	54.95	-6.71	48.24	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	52.33	-6.79	45.54	74.00	54.00	PASS
	H	2500.00	49.26	-6.81	42.45	74.00	54.00	PASS
	V	2483.50	52.09	-6.79	45.30	74.00	54.00	PASS
	V	2500.00	47.41	-6.81	40.60	74.00	54.00	PASS
Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11 n20	Low Channel 2412MHz							
	H	2390.00	53.45	-6.70	46.75	74.00	54.00	PASS
	H	2400.00	57.02	-6.71	50.31	74.00	54.00	PASS
	V	2390.00	52.48	-6.70	45.78	74.00	54.00	PASS
	V	2400.00	52.27	-6.71	45.56	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	51.93	-6.79	45.14	74.00	54.00	PASS
	H	2500.00	49.72	-6.81	42.91	74.00	54.00	PASS
	V	2483.50	51.39	-6.79	44.60	74.00	54.00	PASS
	V	2500.00	46.57	-6.81	39.76	74.00	54.00	PASS
802.11 n40	Low Channel 2422MHz							
	H	2390.00	52.64	-6.70	45.94	74.00	54.00	PASS
	H	2400.00	55.88	-6.71	49.17	74.00	54.00	PASS
	V	2390.00	51.83	-6.70	45.13	74.00	54.00	PASS
	V	2400.00	53.41	-6.71	46.70	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	50.96	-6.79	44.17	74.00	54.00	PASS
	H	2500.00	48.55	-6.81	41.74	74.00	54.00	PASS
	V	2483.50	52.07	-6.79	45.28	74.00	54.00	PASS
	V	2500.00	47.25	-6.81	40.44	74.00	54.00	PASS

Remark:

1. Emission Level = Meter Reading + Factor,
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 Over= Emission Level - Limit

2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

9.3 Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



9.5 Test Result



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz



Test Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-3.146	8	PASS
	2437 MHz	-2.764	8	PASS
	2462 MHz	-4.150	8	PASS
TX g Mode	2412 MHz	-6.815	8	PASS
	2437 MHz	-6.362	8	PASS
	2462 MHz	-7.279	8	PASS
TX n Mode(20M)	2412 MHz	-8.515	8	PASS
	2437 MHz	-8.309	8	PASS
	2462 MHz	-9.821	8	PASS
TX n Mode(40M)	2422 MHz	-10.932	8	PASS
	2437 MHz	-11.900	8	PASS
	2452 MHz	-11.545	8	PASS


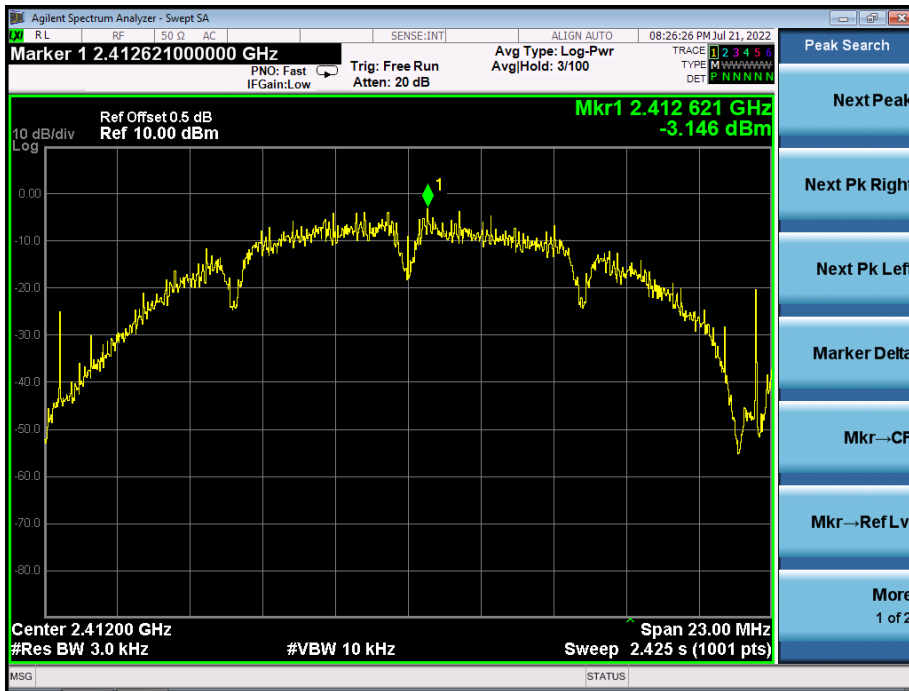
**b Mode
TX CH01**

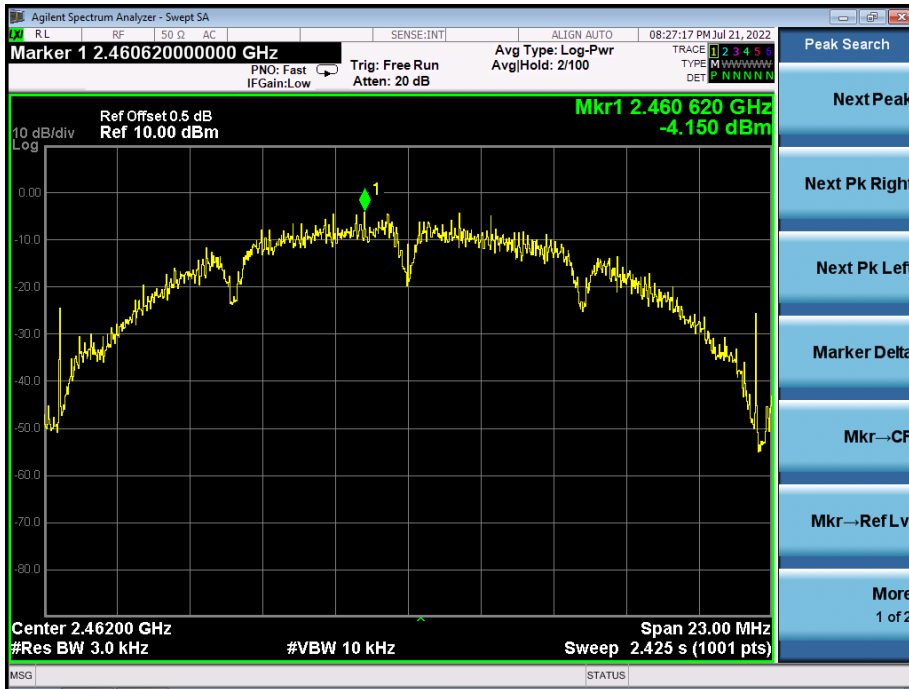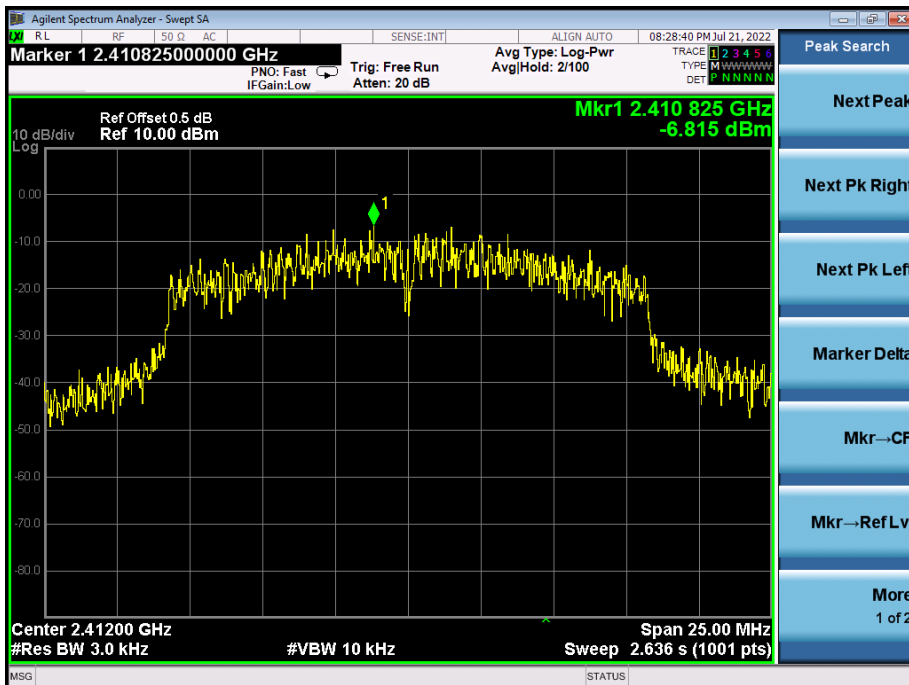TX CH06

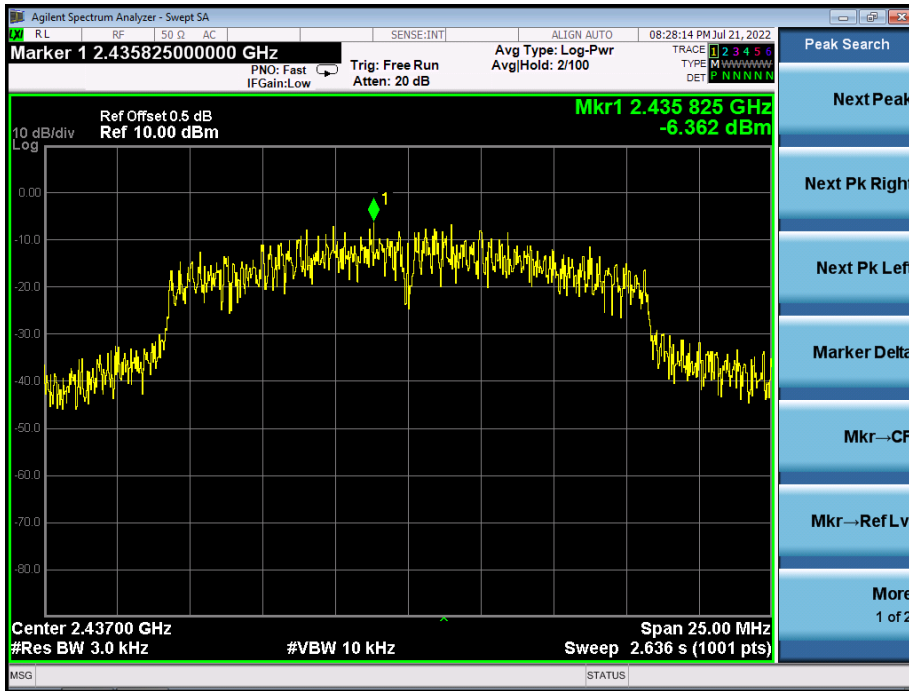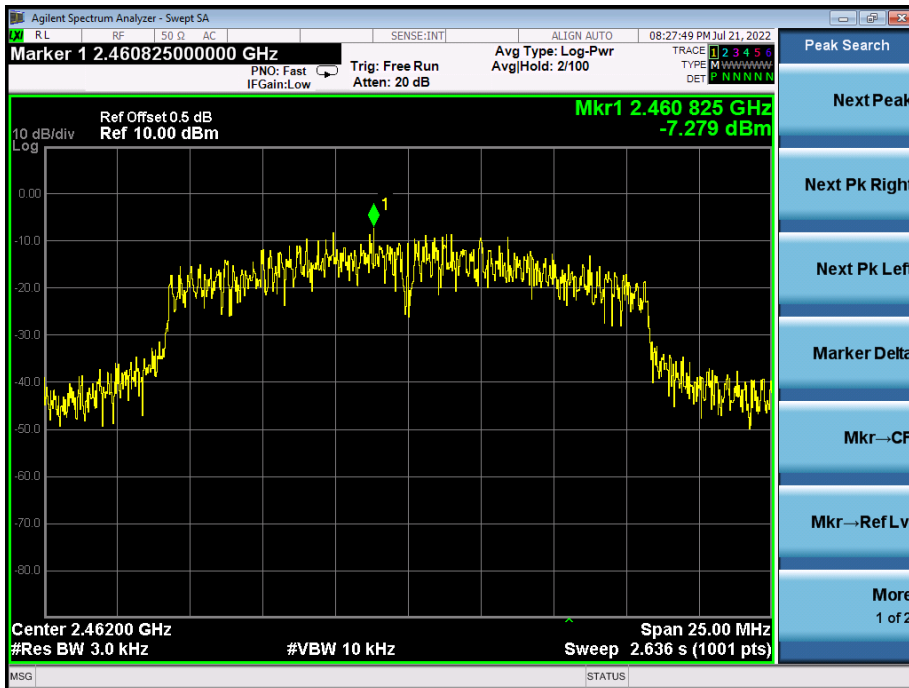
TX CH11

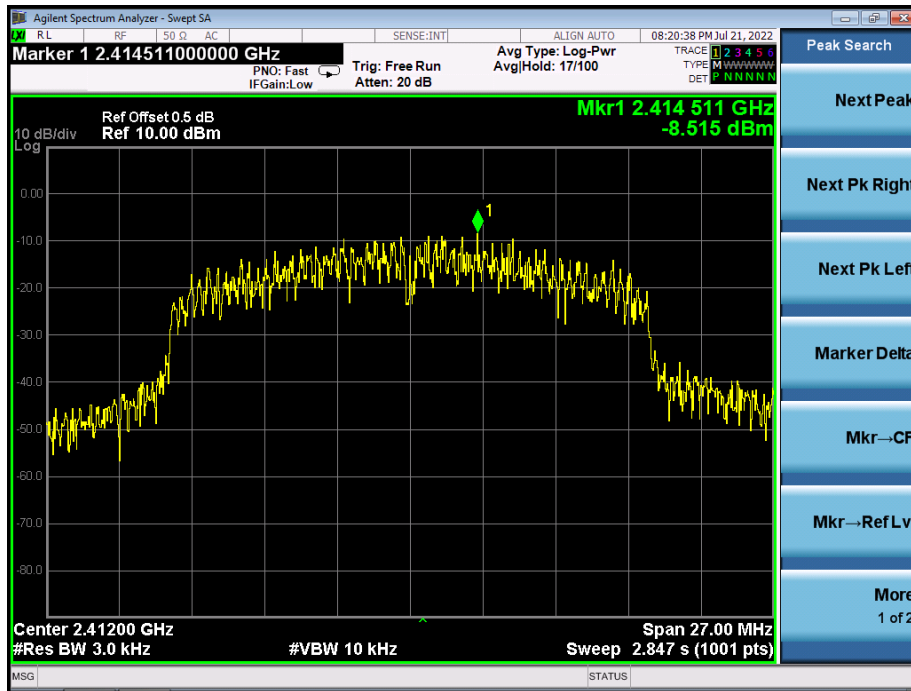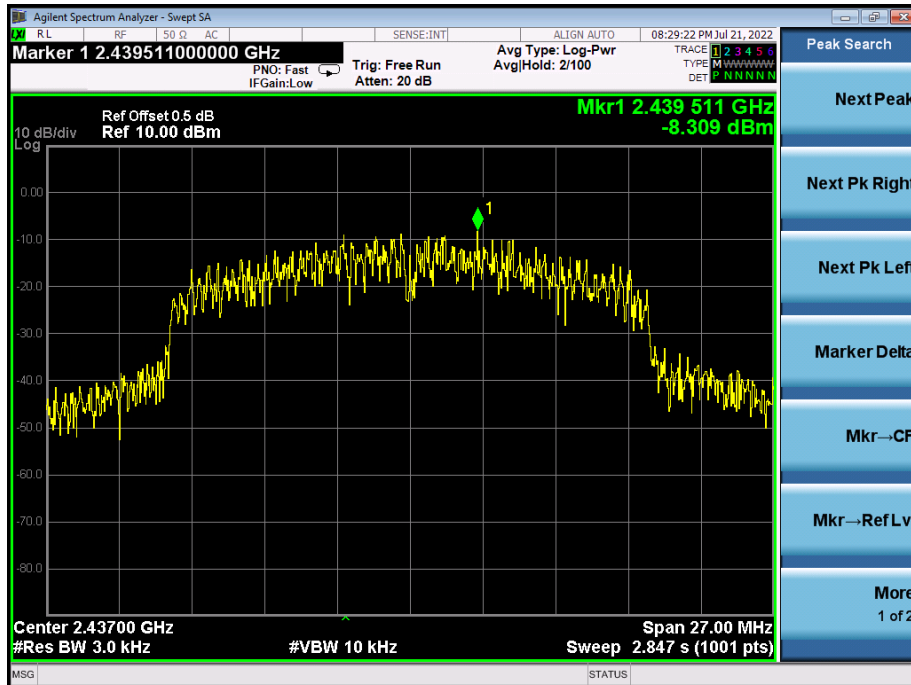**g Mode
TX CH01**

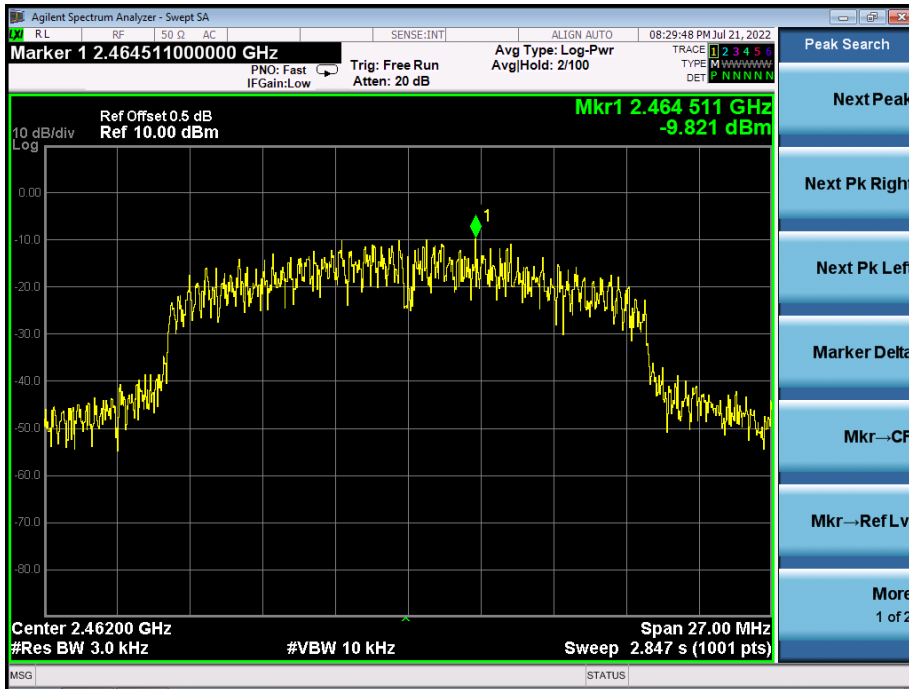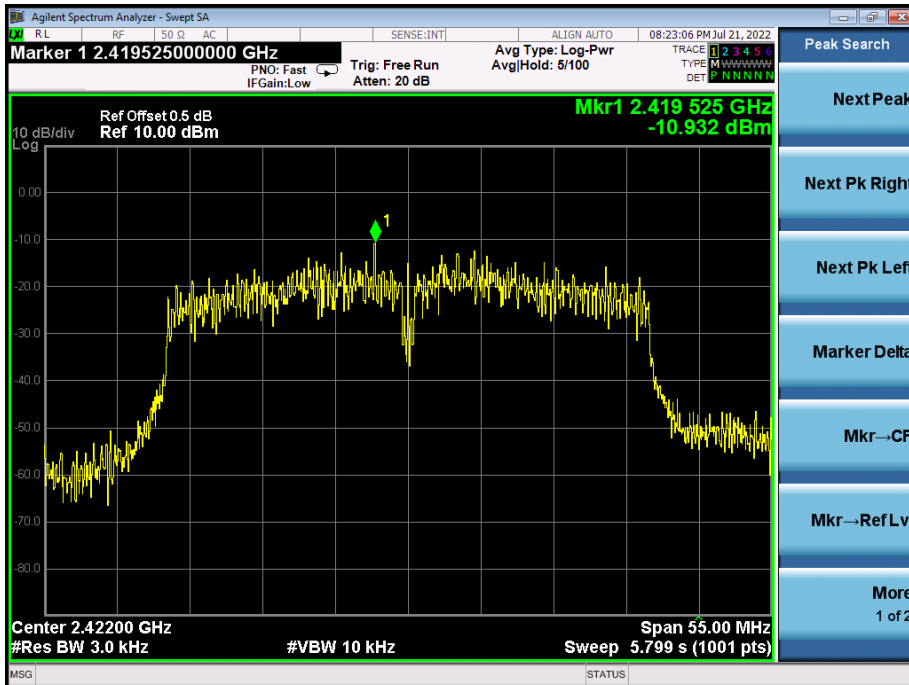
TX CH06

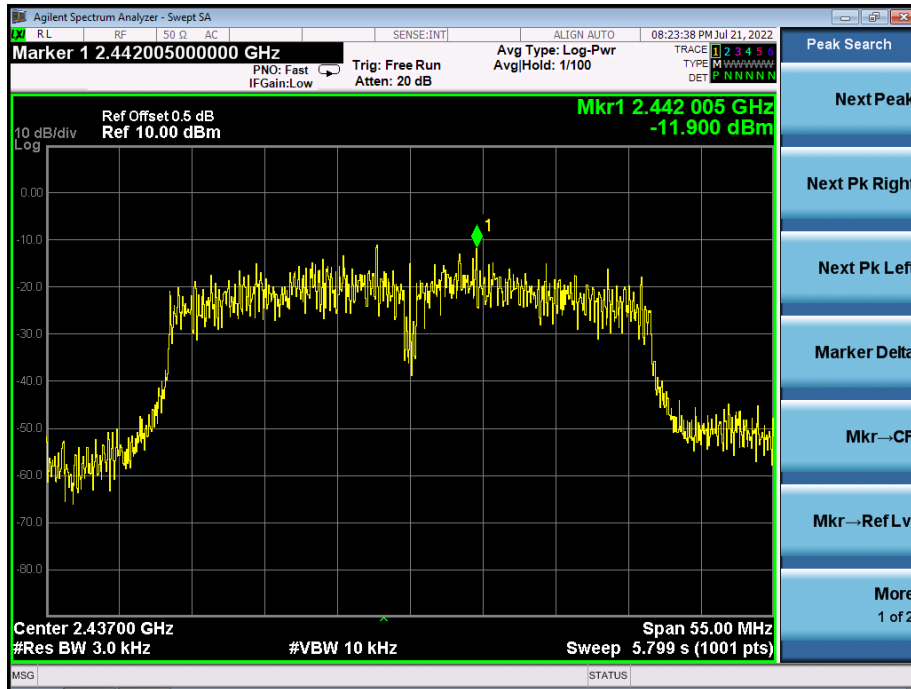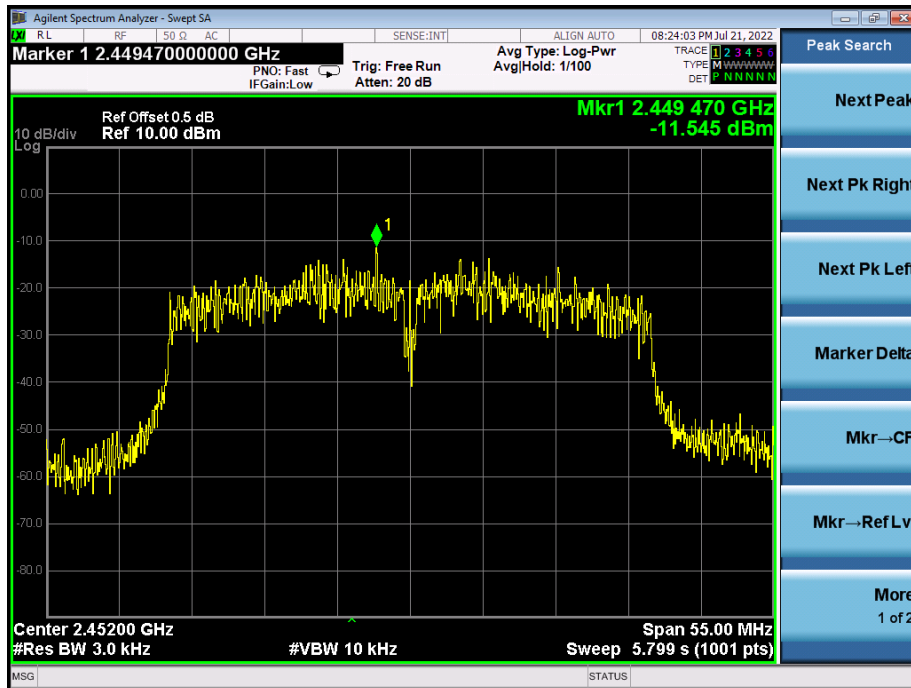TX CH11


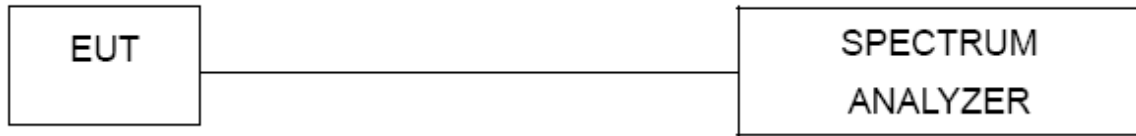
**N20 Mode
TX CH01**

TX CH06


TX CH11

**N40 Mode
TX CH03**


TX CH06

TX CH09


10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test Procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions



The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



10.5 Test Result



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz



Test Mode	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	9.571	500	Pass
	2437	9.554	500	Pass
	2462	9.548	500	Pass
TX g Mode	2412	12.52	500	Pass
	2437	11.33	500	Pass
	2462	13.75	500	Pass
TX n Mode(20M)	2412	10.11	500	Pass
	2437	10.12	500	Pass
	2462	11.33	500	Pass
TX n Mode(40M)	2422	33.80	500	Pass
	2437	32.56	500	Pass
	2452	32.55	500	Pass

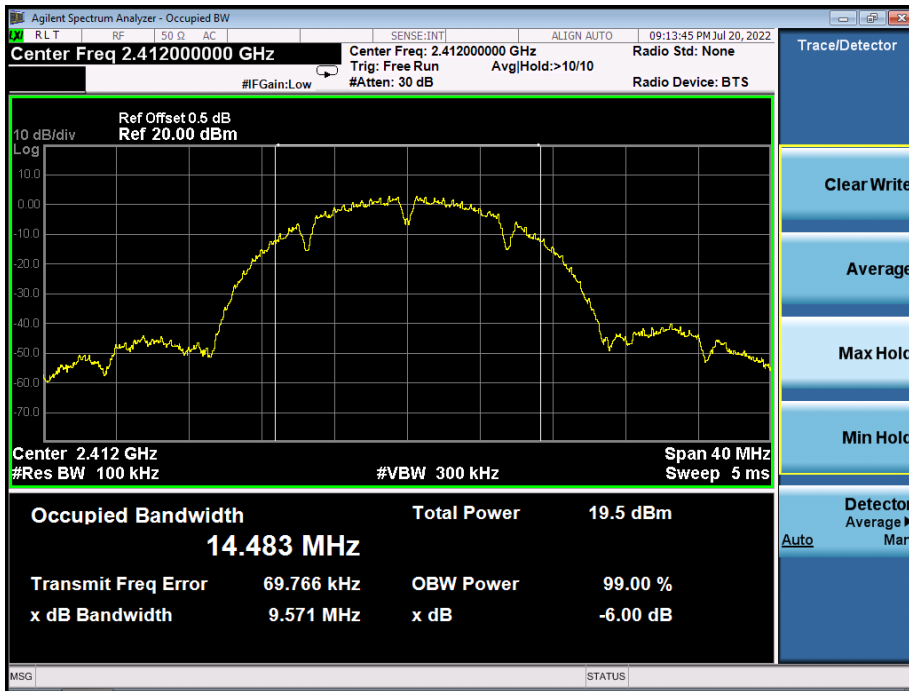
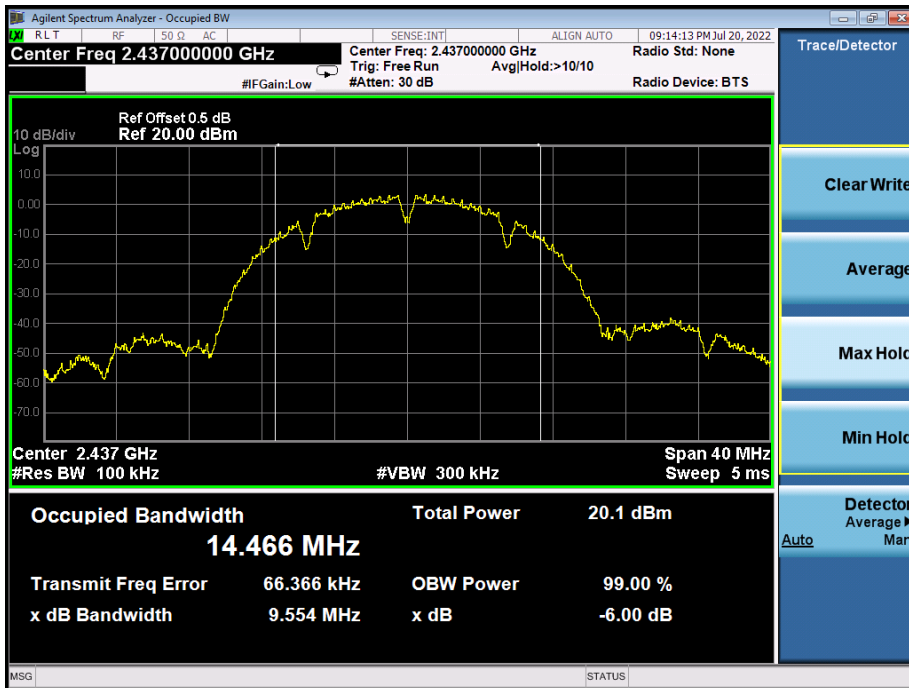
**b Mode
TX CH 01**

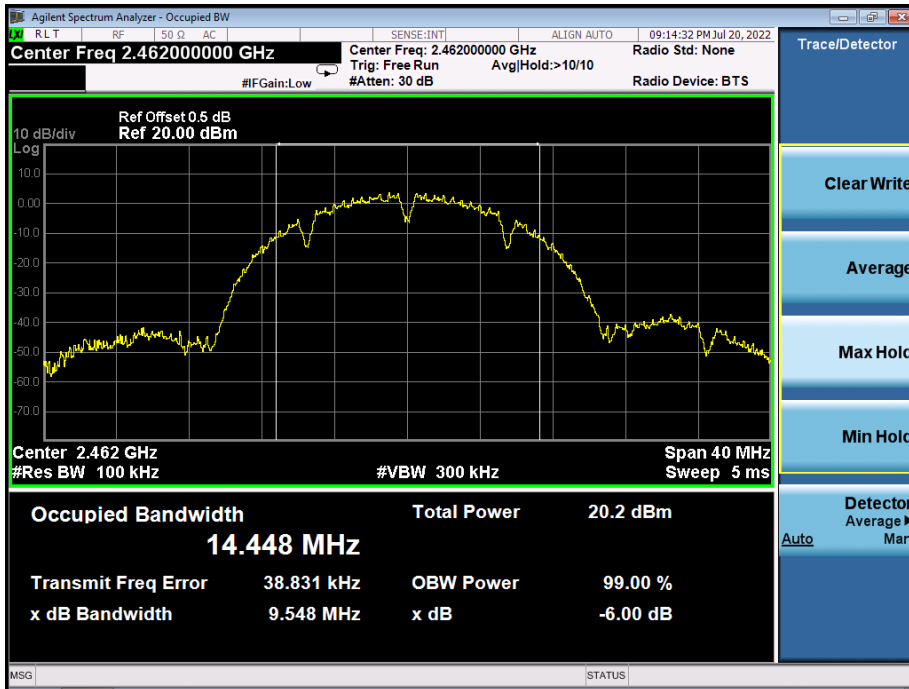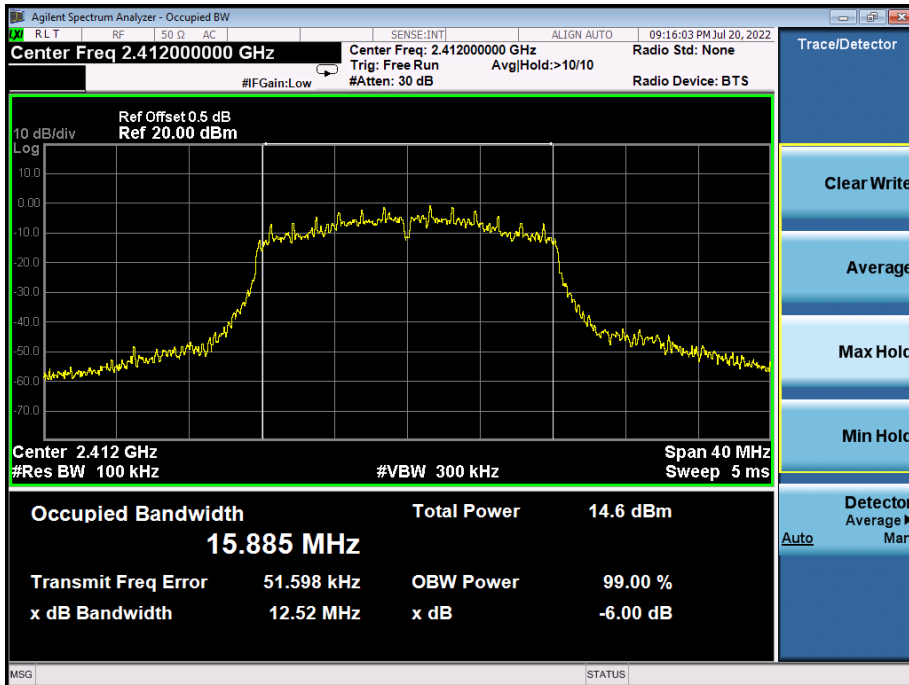TX CH 06

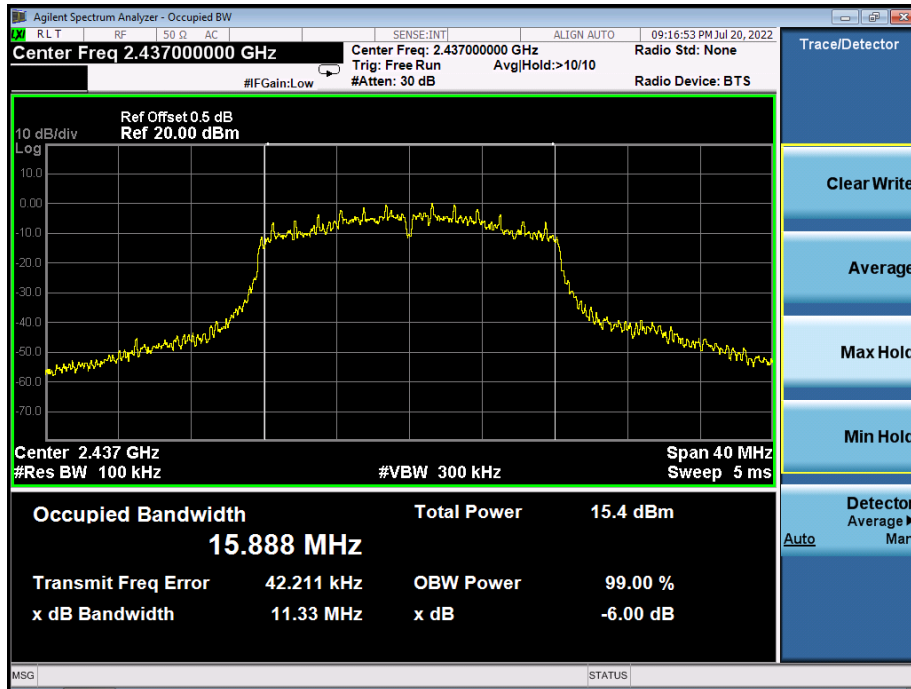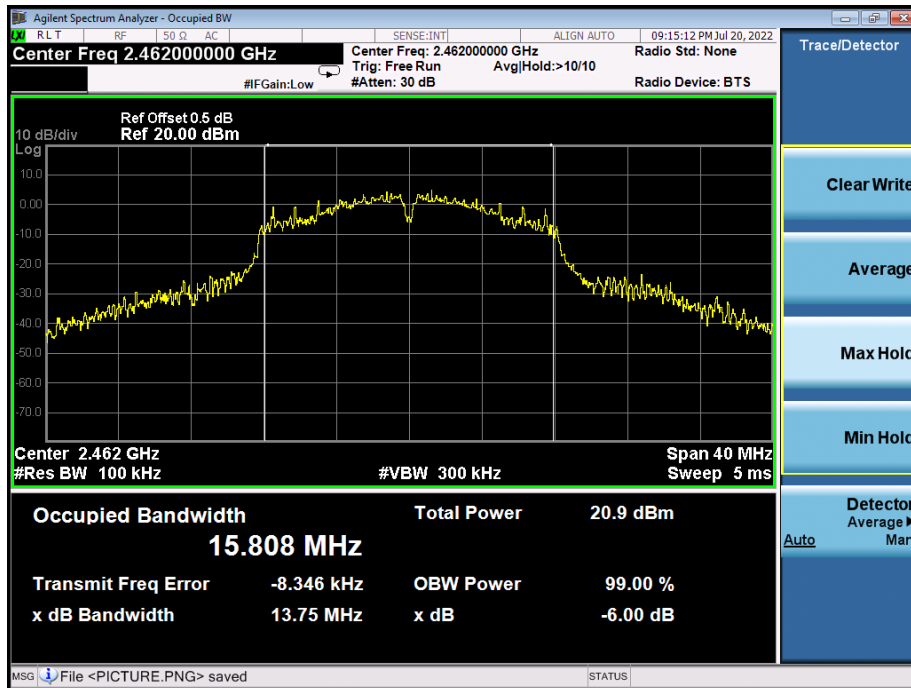
TX CH 11

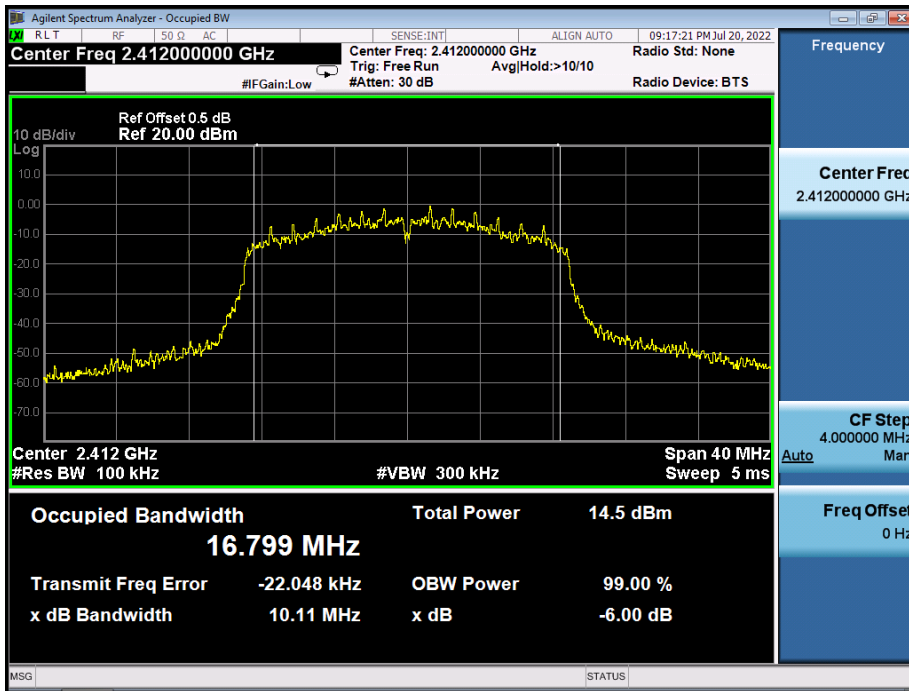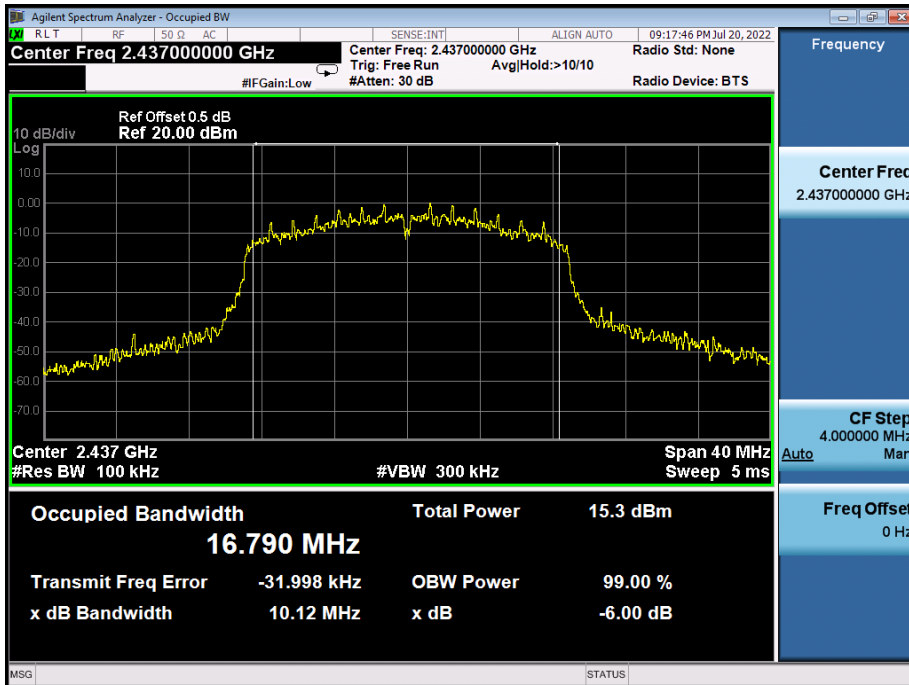**g Mode
TX CH 01**

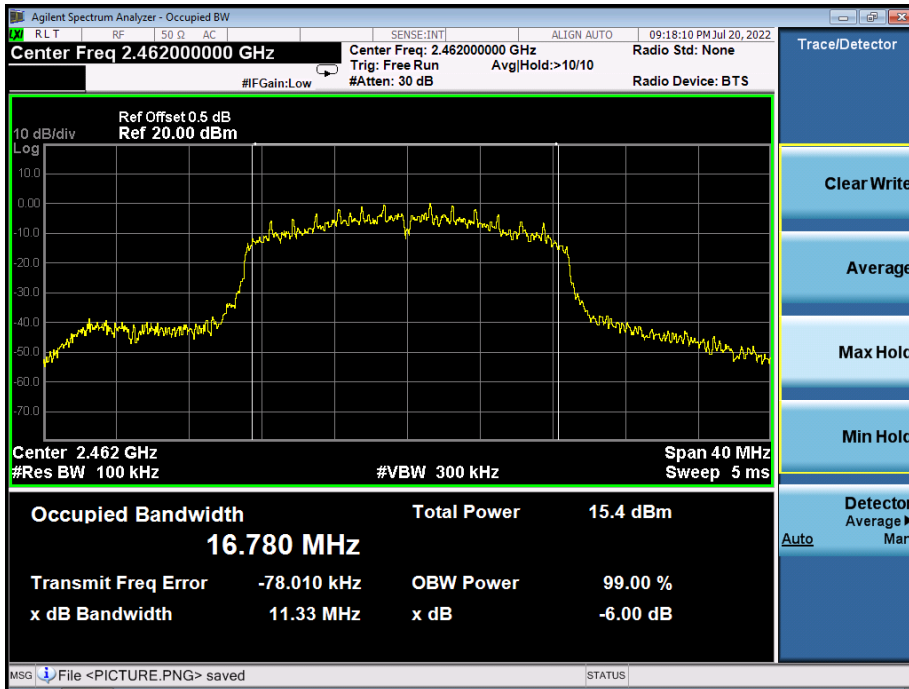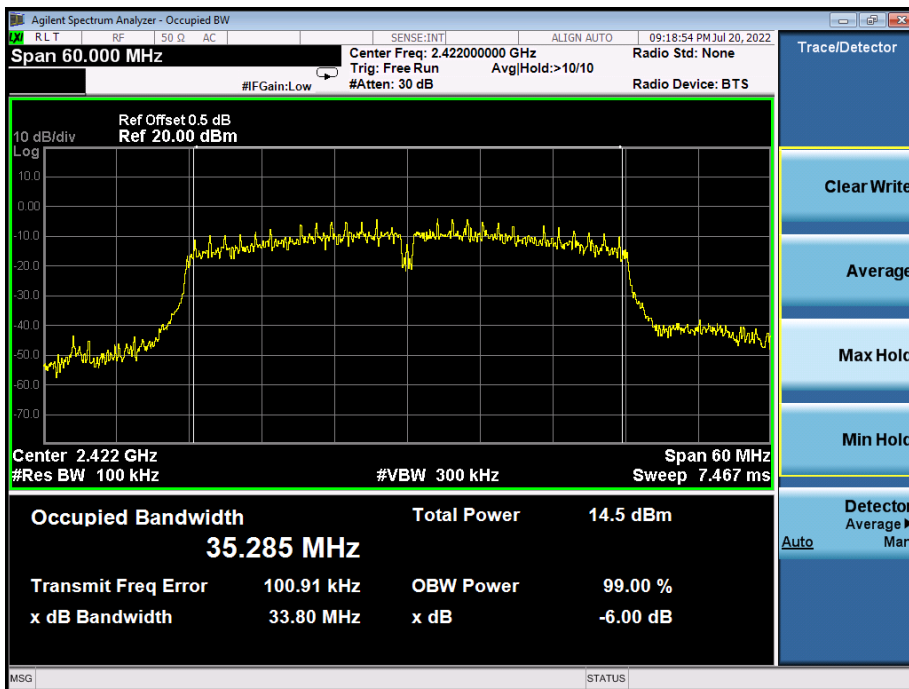
TX CH 06

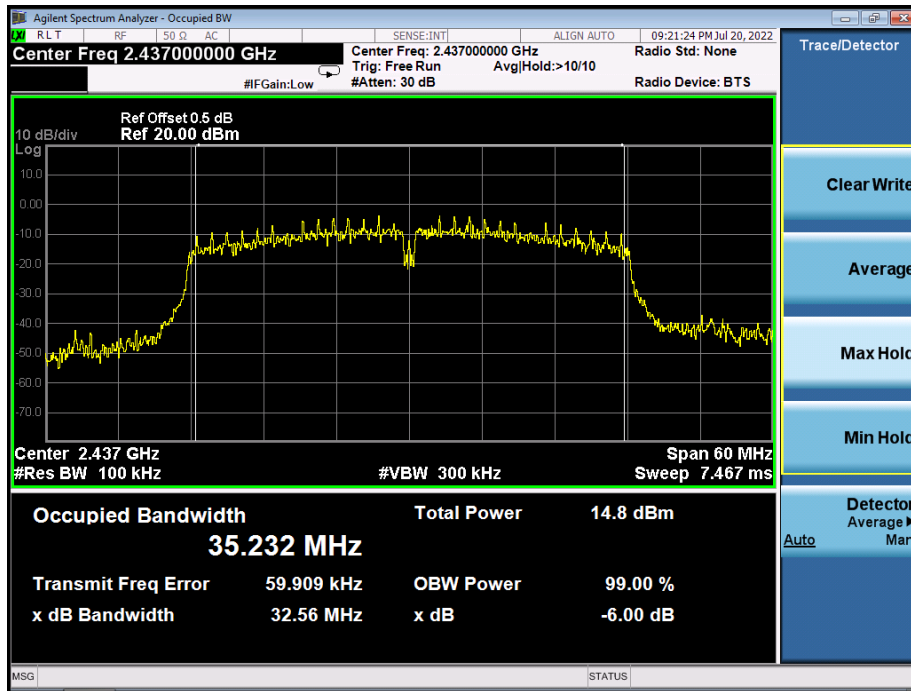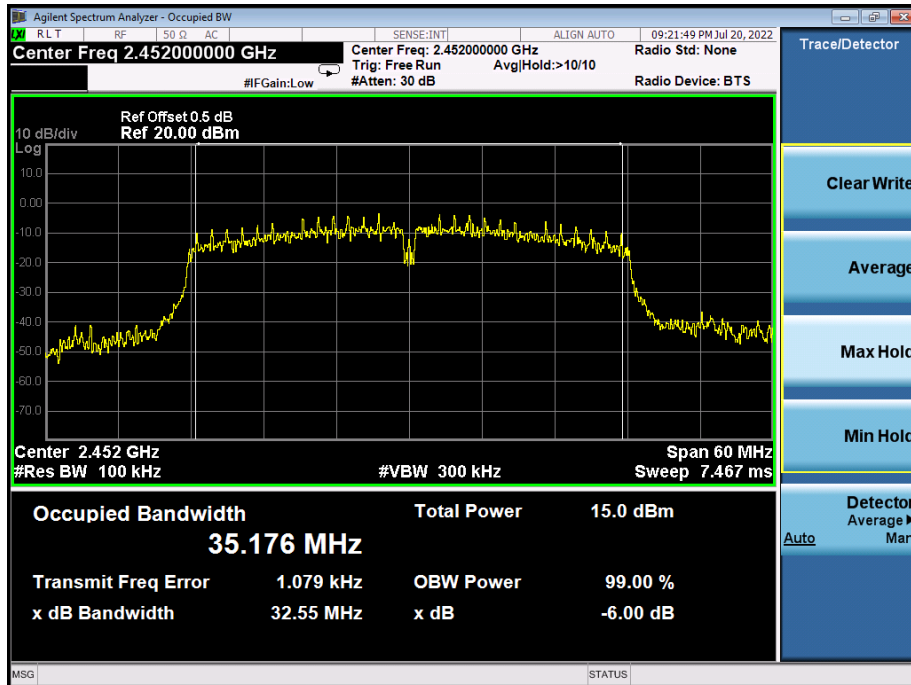TX CH 11


**N20 Mode
TX CH 01**

TX CH 06


TX CH 11

**N40 Mode
TX CH 03**


TX CH 06

TX CH 09


11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

11.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	12.31	30
	2437	12.97	30
	2462	13.11	30
802.11g	2412	10.35	30
	2437	11.22	30
	2462	11.36	30
802.11n20	2412	9.42	30
	2437	10.41	30
	2462	10.43	30
802.11n40	2422	8.27	30
	2437	8.78	30
	2452	8.93	30

12. 100 Khz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

- Set the RBW = 100KHz.
- Set the VBW = 300KHz.
- Sweep time = auto couple.
- Detector function = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize..

12.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

12.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz


802.11b: Band Edge, Left Side

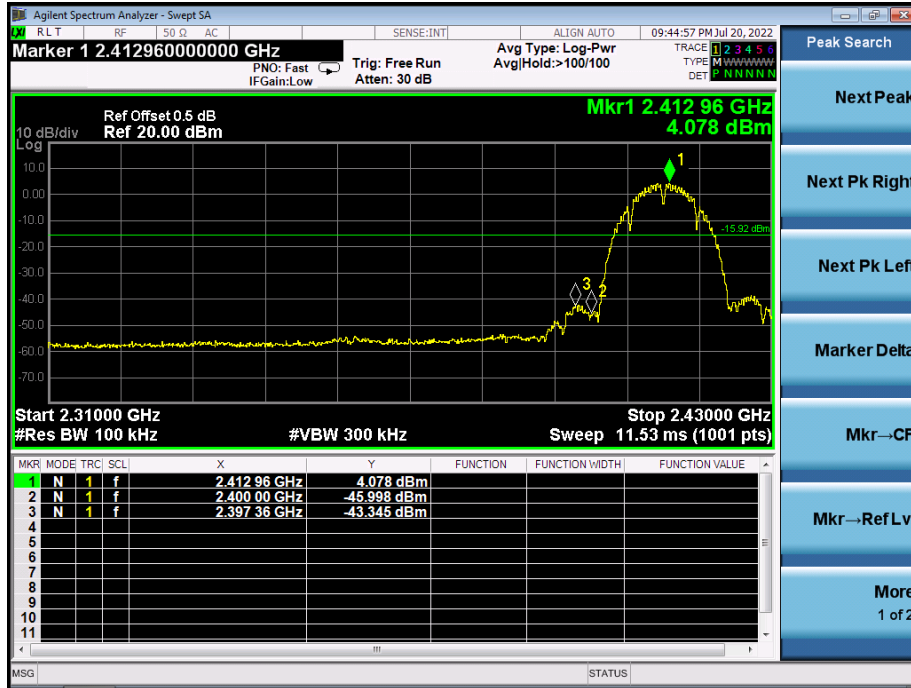

802.11b: Band Edge, Right Side




802.11g: Band Edge, Left Side

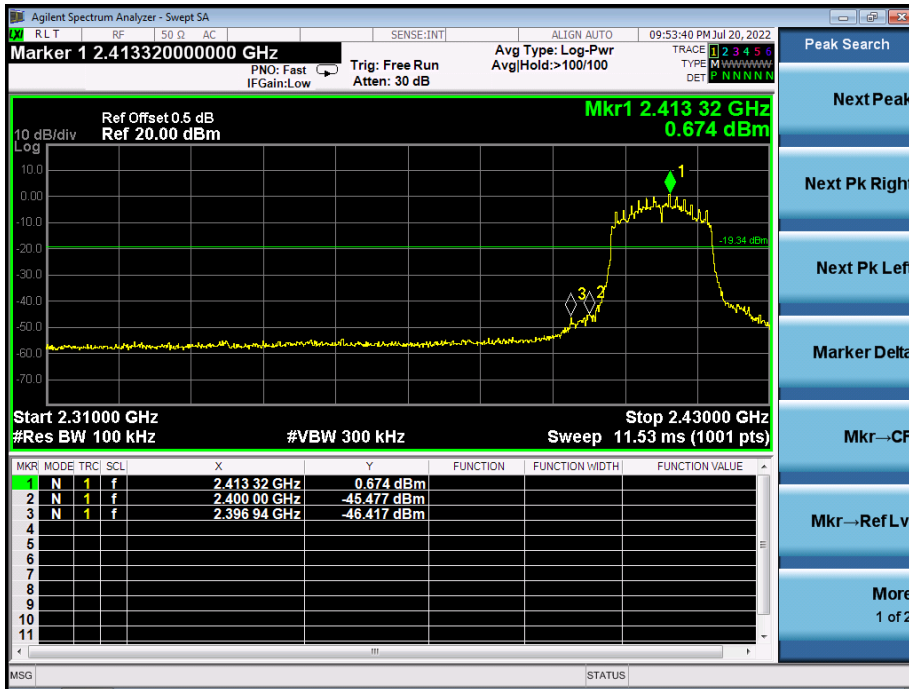

802.11g: Band Edge, Right Side




802.11n-HT20: Band Edge, Left Side

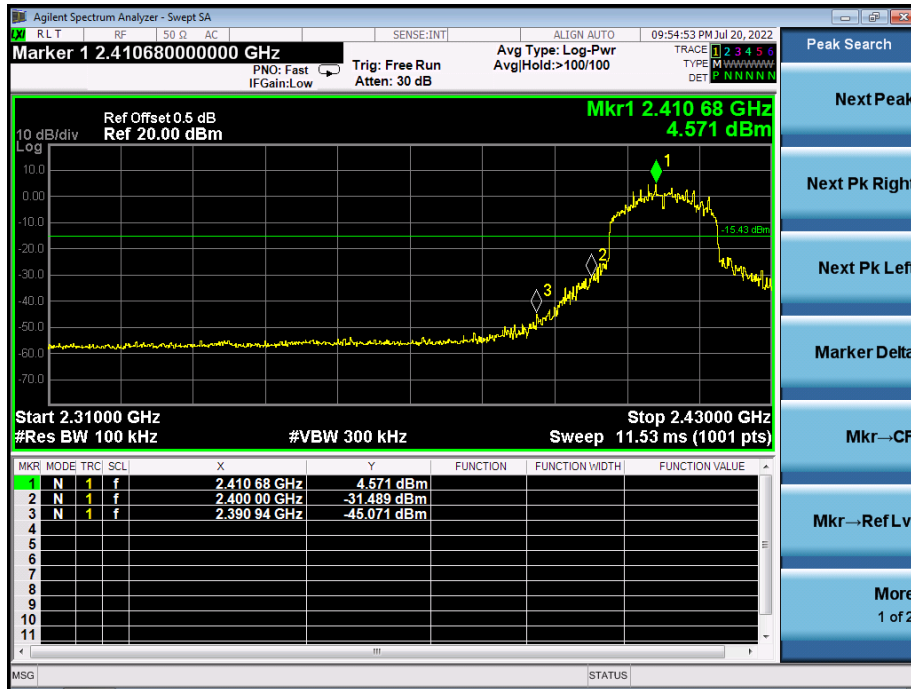


802.11n-HT20: Band Edge, Right Side






802.11n-HT40: Band Edge, Left Side

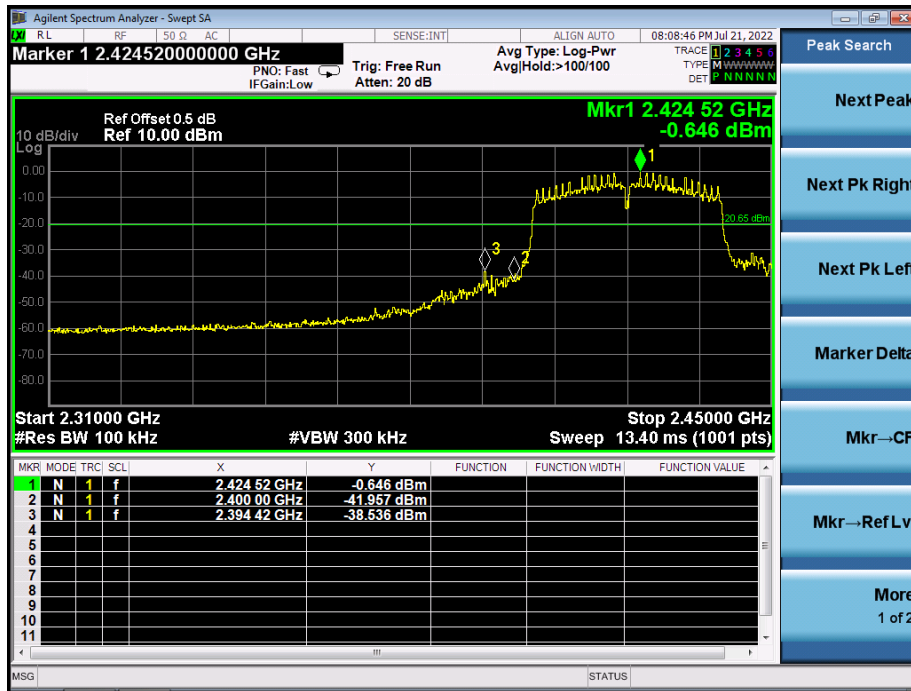

802.11n-HT40: Band Edge, Right Side

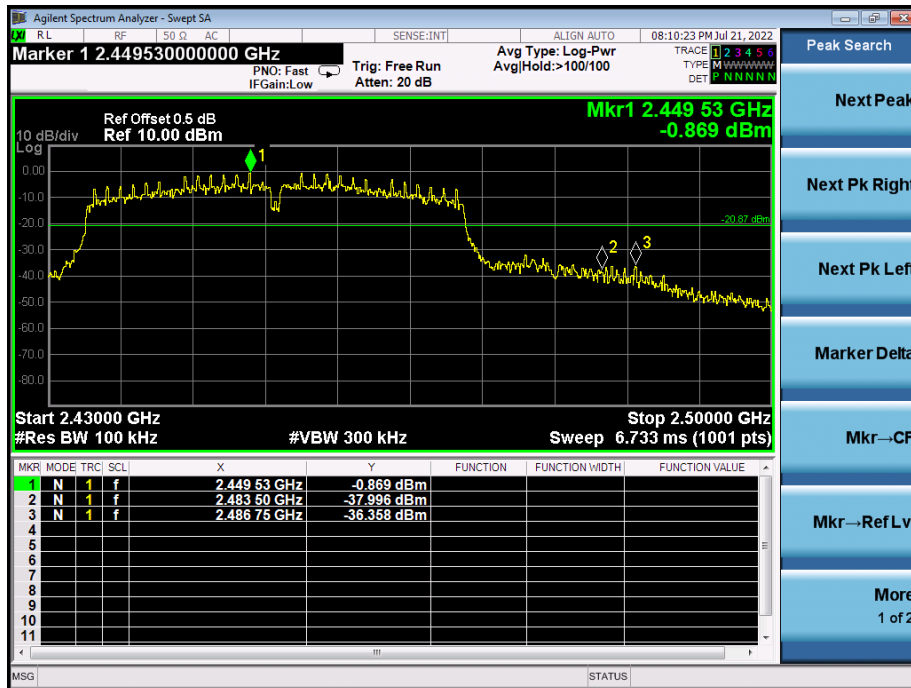


CONDUCTED EMISSION MEASUREMENT
 802.11b

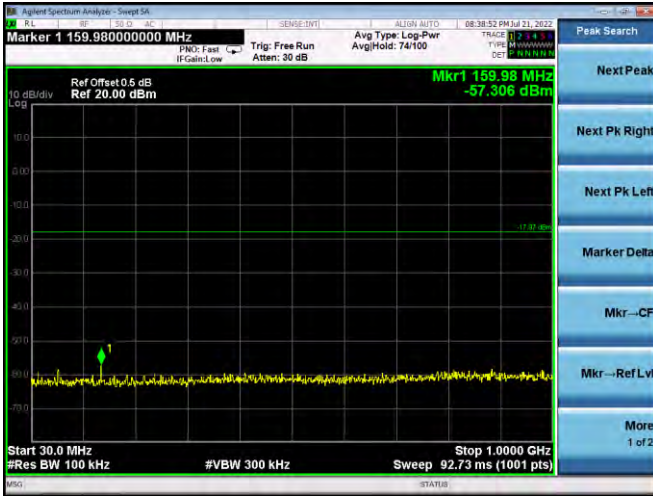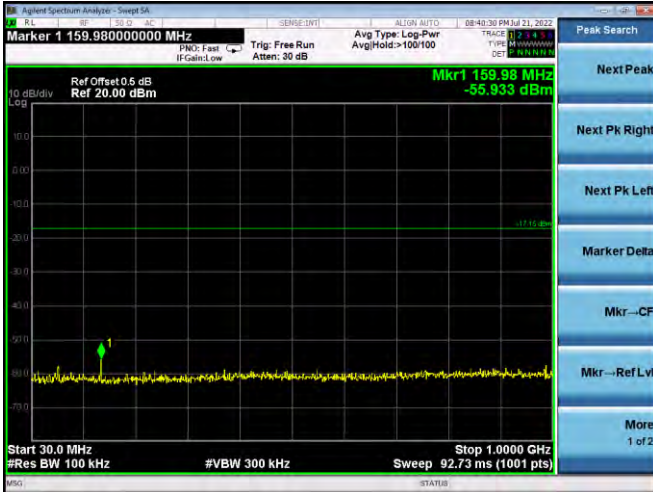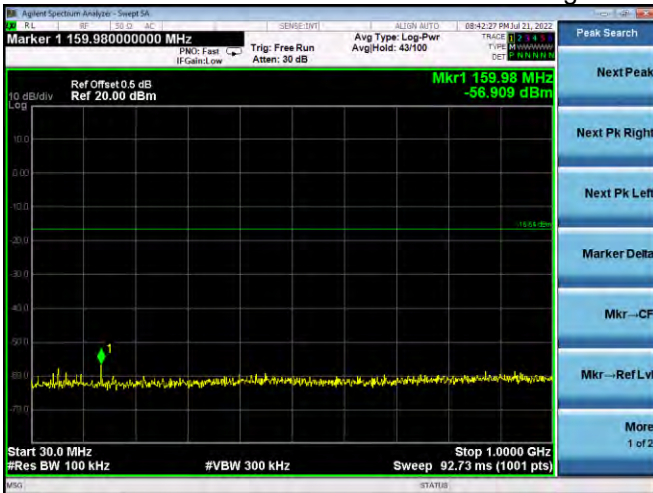
Low Channel 2412MHz

Middle Channel 2437MHz

High Channel 2462MHz

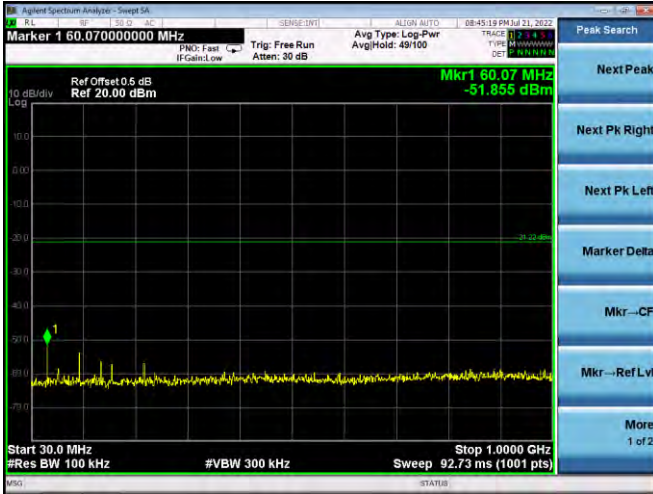
802.11g


Low Channel 2412MHz

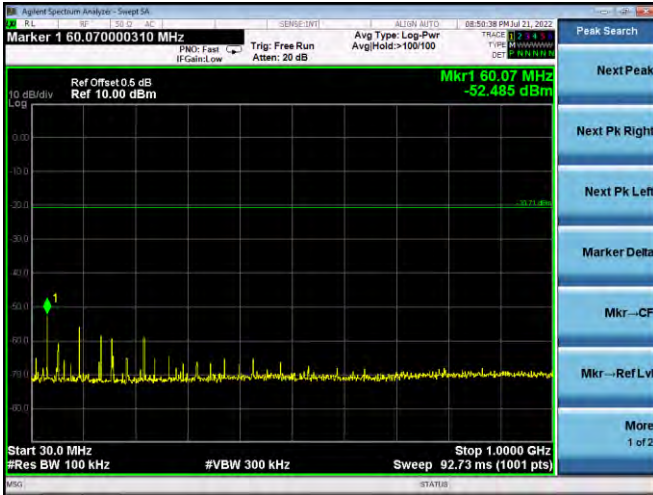

Middle Channel 2437MHz




High Channel 2462MHz

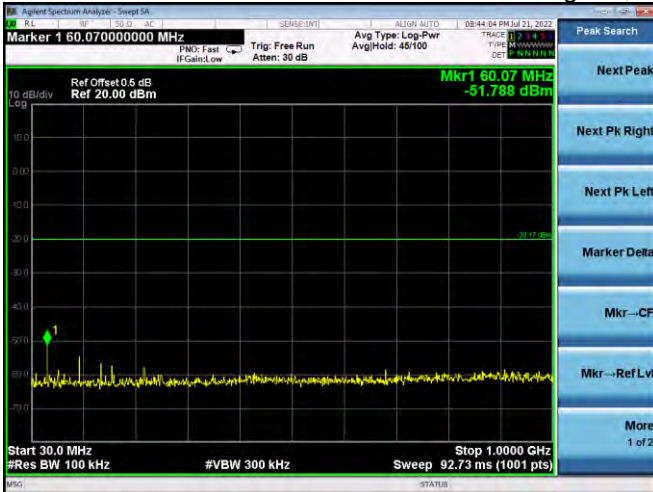


802.11n20


Low Channel 2412MHz

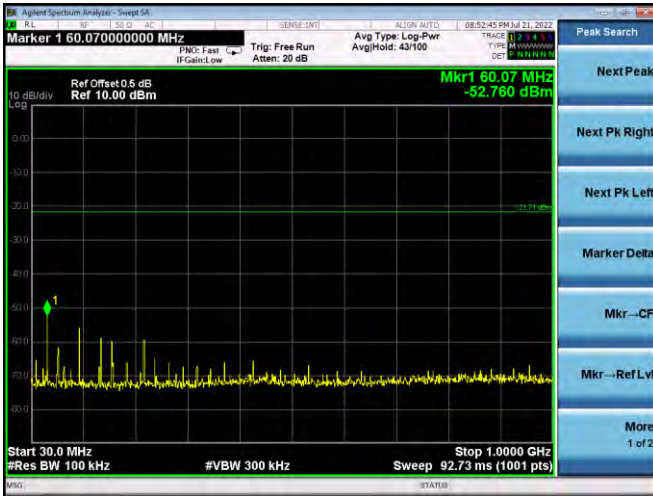

Middle Channel 2437MHz

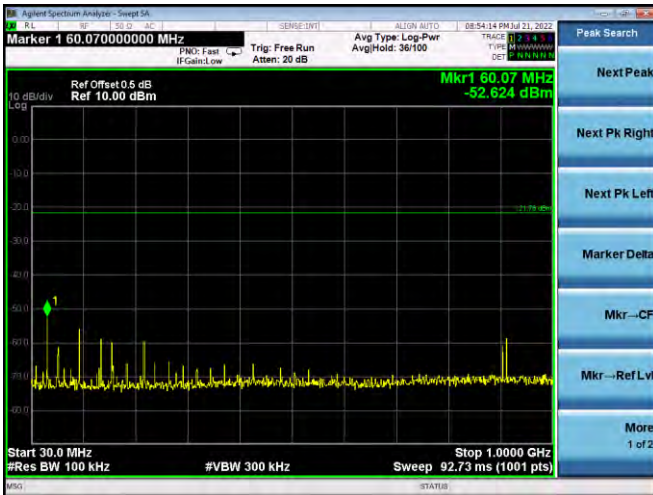


High Channel 2462MHz

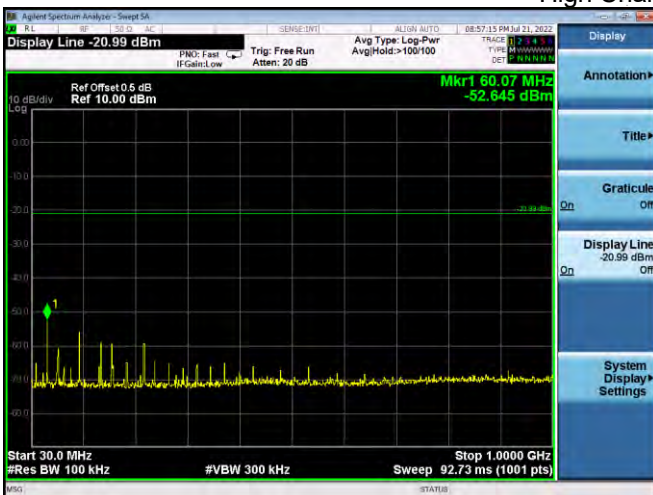


802.11n40


Low Channel 2422MHz

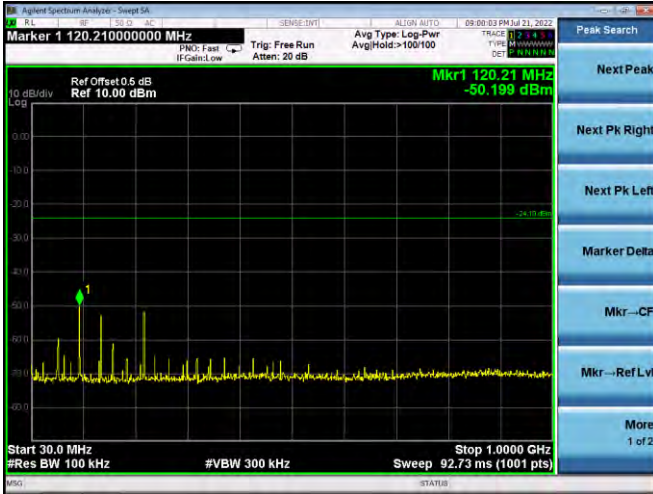

Middle Channel 2437MHz

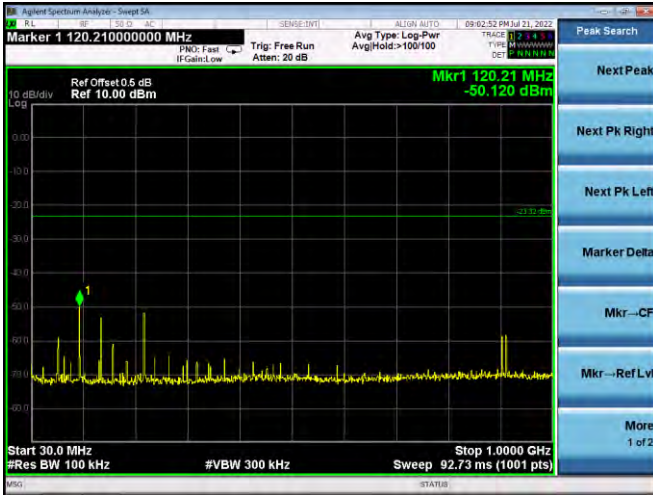

High Channel 2452MHz

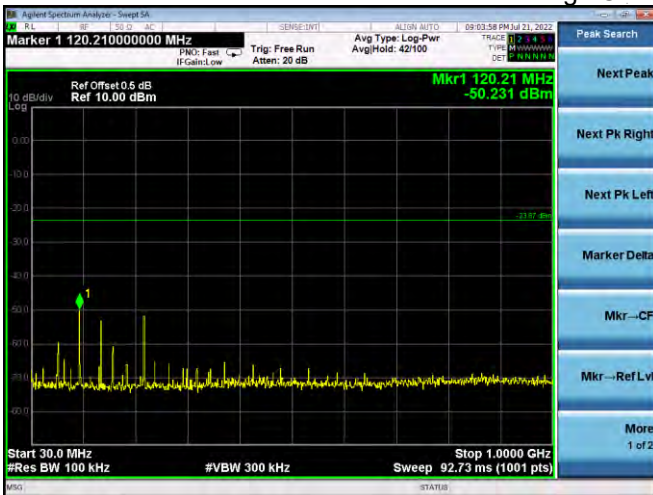

13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$


13.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak


13.4 Test Result

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0


**b Mode
TX CH 06**

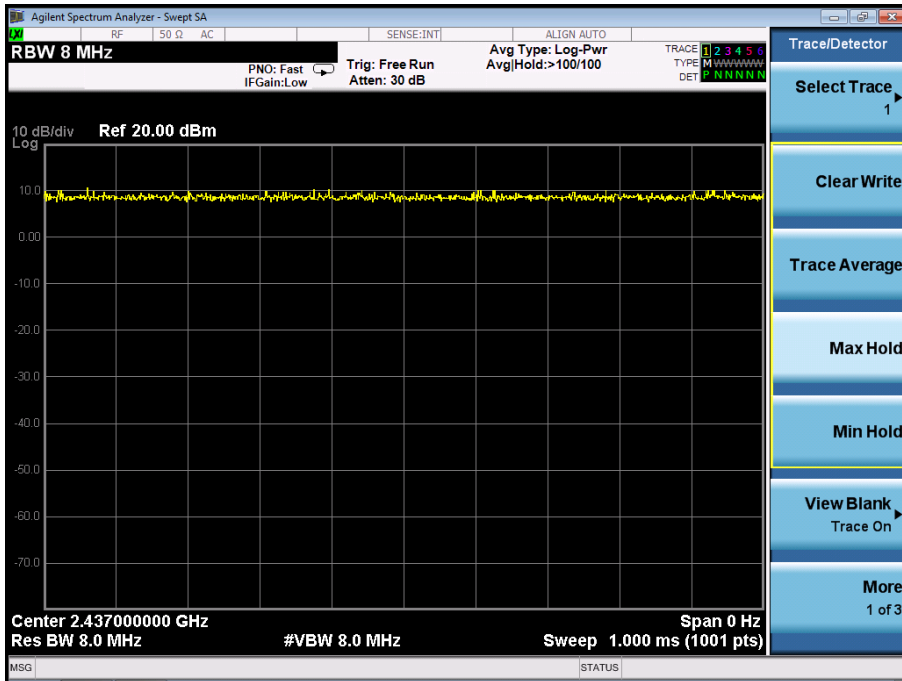


**g Mode
TX CH 06**

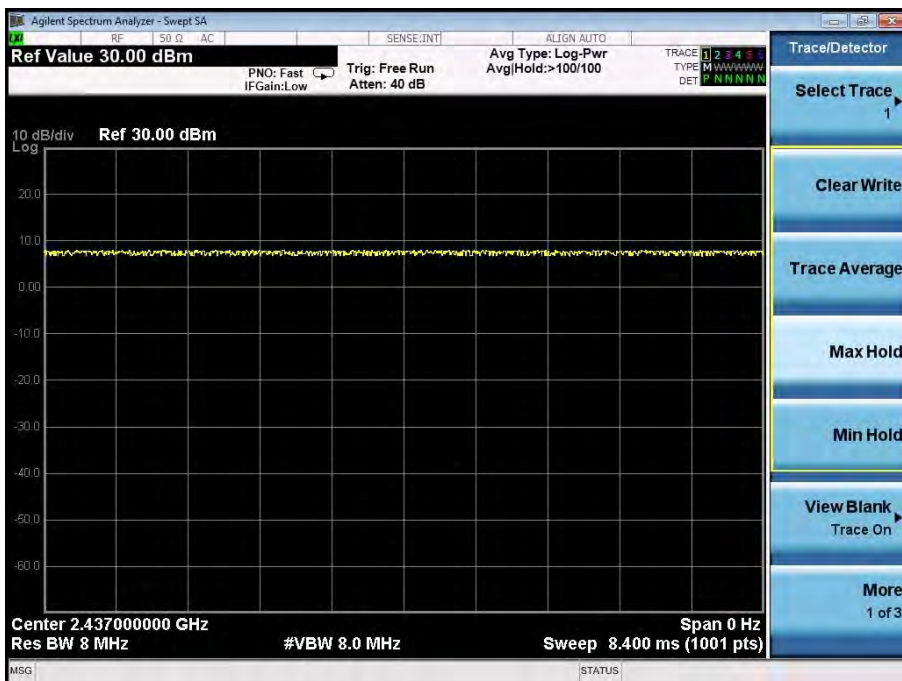

**n20 Mode
TX CH 06**

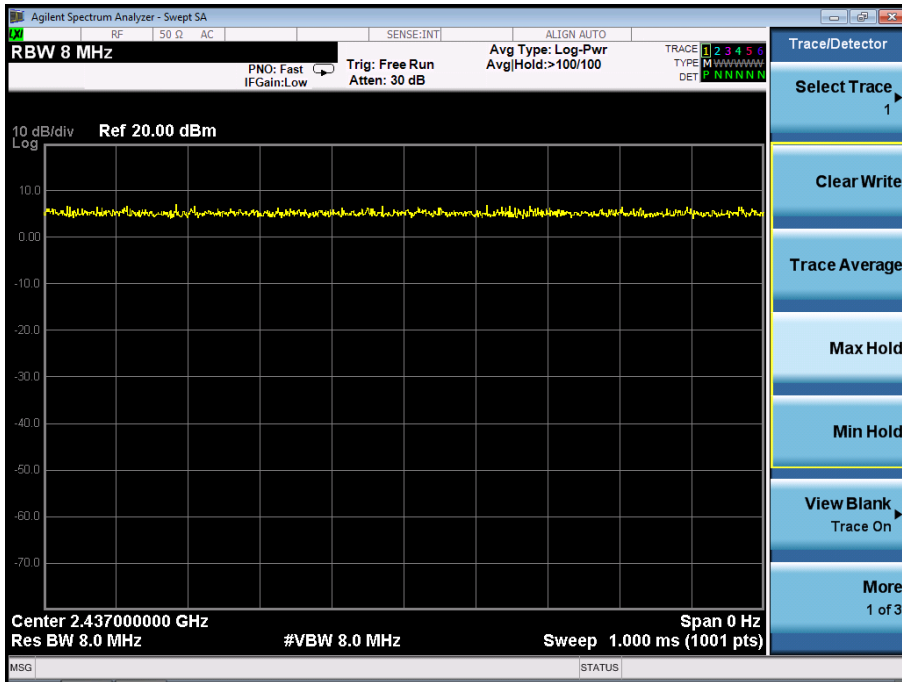

**N40 Mode
TX CH 06**

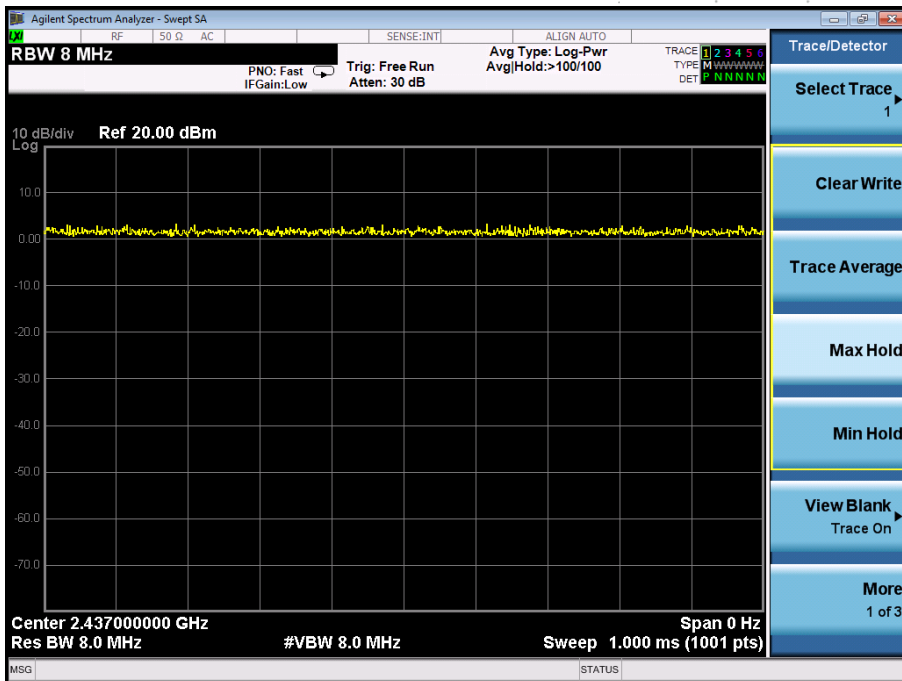

14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.2 Test Result


The EUT antenna is Chip antenna, fulfill the requirement of this section.

15. EUT Photographs

EUT Photo



NOTE: Appendix-Photographs Of EUT Constructional Details

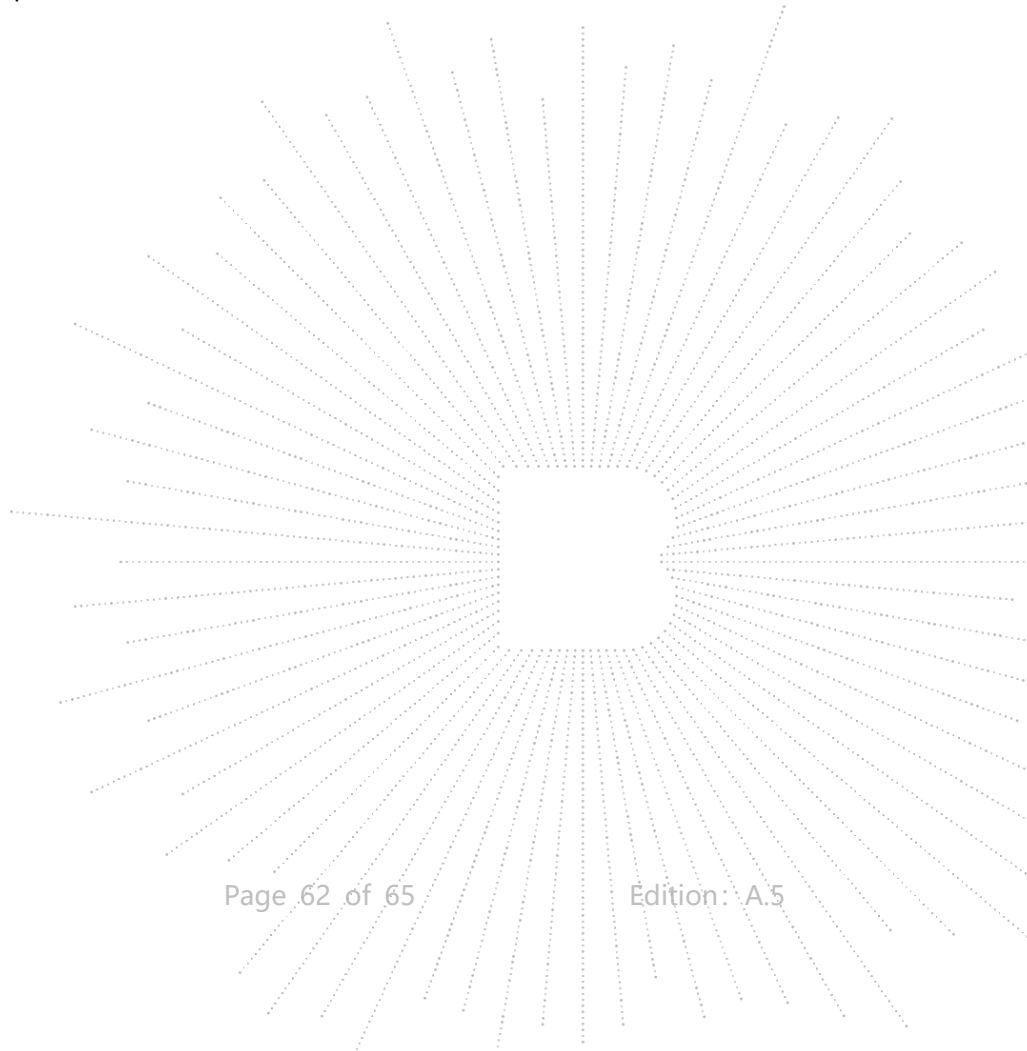


16. EUT Test Setup Photographs

Conducted Measurement Photo



Radiated Measurement Photos



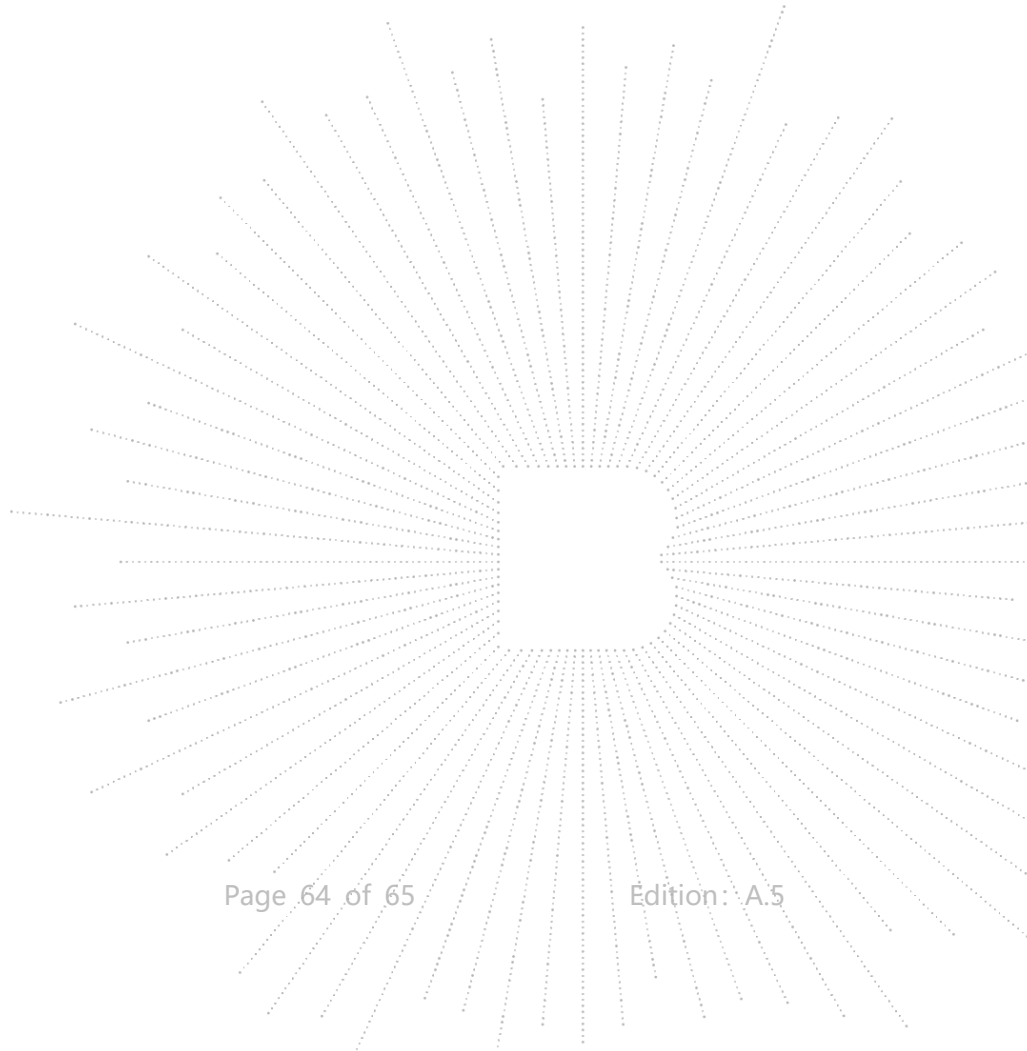

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, CT EL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****