



FCC Part 15C Test Report

FCC ID: 2A5FV-X-PLUS3

Applicant: ZHEJIANG QIDI TECHNOLOGY CO.,LTD

Address: No.29 Building, Number 178, East 2 Road,Gexiang New District, Ruian Economic Development Zone, Ruian, Wenzhou City, Zhejiang Province, China

Manufacturer: ZHEJIANG QIDI TECHNOLOGY CO.,LTD

Address: No.29 Building, Number 178, East 2 Road,Gexiang New District, Ruian Economic Development Zone, Ruian, Wenzhou City, Zhejiang Province, China

EUT: 3D Printer

Trade Mark: 
QIDI TECH

Model Number: X-Plus3
X-MAX3, X-Smart3, X-Mate3

Date of Receipt: Apr. 05, 2023

Test Date: Apr. 05, 2023 – Apr. 20, 2023

Date of Report: Apr. 20, 2023

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20230420016E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	14
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ~25GHZ)	19
3.3 RADIATED BAND EMISSION MEASUREMENT	23
3.3.1 TEST REQUIREMENT:	23
3.3.2 TEST PROCEDURE	23
3.3.3 DEVIATION FROM TEST STANDARD	23
3.3.4 TEST SETUP	24
3.3.5 EUT OPERATING CONDITIONS	24
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	29
3.4.1 APPLICABLE STANDARD	29



Table of Contents	Page
3.4.2 TEST PROCEDURE	29
3.4.3 DEVIATION FROM STANDARD	29
3.4.4 TEST SETUP	29
3.4.5 EUT OPERATION CONDITIONS	29
3.4.6 TEST RESULTS	29
4 . AVERAGE OUTPUT POWER	37
4.1 APPLIED PROCEDURES / LIMIT	37
4.1.1 TEST PROCEDURE	37
4.1.2 DEVIATION FROM STANDARD	37
4.1.3 TEST SETUP	37
4.1.4 EUT OPERATION CONDITIONS	37
4.1.5 TEST RESULTS	38
5 . POWER SPECTRAL DENSITY TEST	44
5.1 APPLIED PROCEDURES / LIMIT	44
5.1.1 TEST PROCEDURE	44
5.1.2 DEVIATION FROM STANDARD	44
5.1.3 TEST SETUP	44
5.1.4 EUT OPERATION CONDITIONS	44
5.1.5 TEST RESULTS	45
6 . 6DB BANDWIDTH TEST	48
6.1 APPLIED PROCEDURES / LIMIT	48
6.1.1 TEST PROCEDURE	48
6.1.2 DEVIATION FROM STANDARD	48
6.1.3 TEST SETUP	48
6.1.4 EUT OPERATION CONDITIONS	48
6.1.5 TEST RESULTS	49
7 . ANTENNA REQUIREMENT	52
7.1 STANDARD REQUIREMENT	52
7.2 EUT ANTENNA	52
8 . TEST SEUUP PHOTO	53
9 . EUT PHOTO	55



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.205, 15.247(d)	Band Edge Emission& Conducted Spurious Emissions	PASS	
15.247(b)	Average Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	3D Printer
Trademark	
Model No.:	X-Plus3 X-MAX3, X-Smart3, X-Mate3
Model Difference	The product's different for model number, appearance color and power.
Operation Frequency:	2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40
Channel numbers:	11 Channels for 802.11b/g/n(HT20) 7 channels for 802.11nHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20): DSSS (CCK, DQPSK,DBPSK)+OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Antenna Type:	PCB Antenna
Antenna gain:	1.0dBi
Power supply:	AC 100-240V 50/60Hz 900W max

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List(802.11b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		

Channel List(802.11nHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode
For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode
For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode


Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated & Conducted Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	3D Printer	X-Plus3	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: AXDN-0002.0			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	1Mbps	MSC0	MSC0
Power Setting of Softwave	60	60	60	66



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 05, 2022	Nov. 04, 2023
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 05, 2022	Nov. 04, 2023
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 05, 2022	Nov. 04, 2023
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 05, 2022	Nov. 04, 2023
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 05, 2022	Nov. 04, 2023
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 05, 2022	Nov. 04, 2023
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 05, 2022	Nov. 04, 2023
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 05, 2022	Nov. 04, 2023
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 05, 2022	Nov. 04, 2023
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 05, 2022	Nov. 04, 2023
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 05, 2022	Nov. 04, 2023
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 05, 2022	Nov. 04, 2023
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 05, 2022	Nov. 04, 2023
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 05, 2022	Nov. 04, 2023
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 05, 2022	Nov. 04, 2023
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 05, 2022	Nov. 04, 2023

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
2	EMI Receiver	R&S	ESR	101421	Nov. 05, 2022	Nov. 04, 2023
3	LISN	R&S	ENV216	102417	Nov. 05, 2022	Nov. 04, 2023
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 05, 2022	Nov. 04, 2023

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

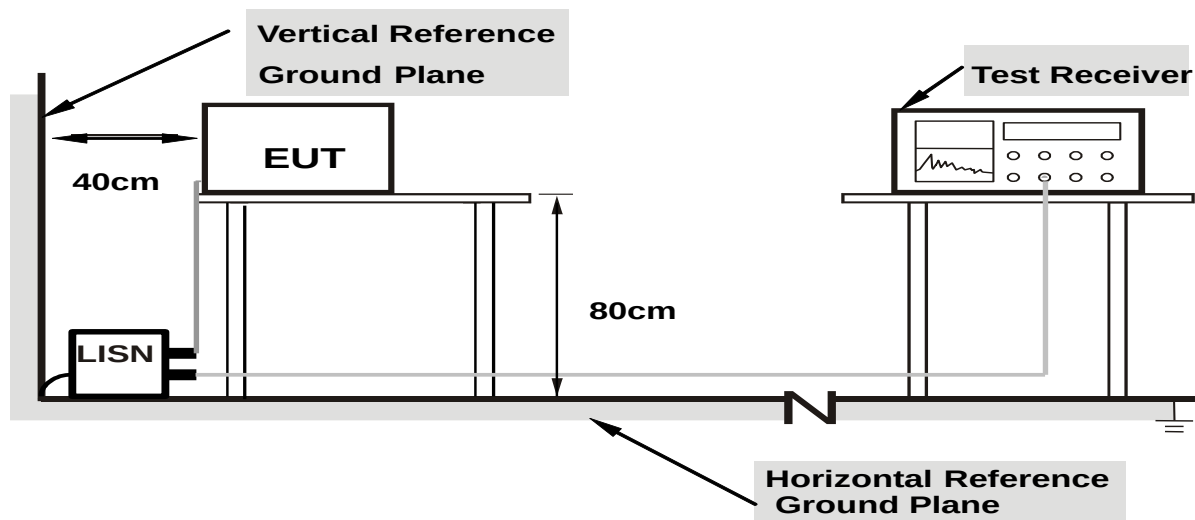

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

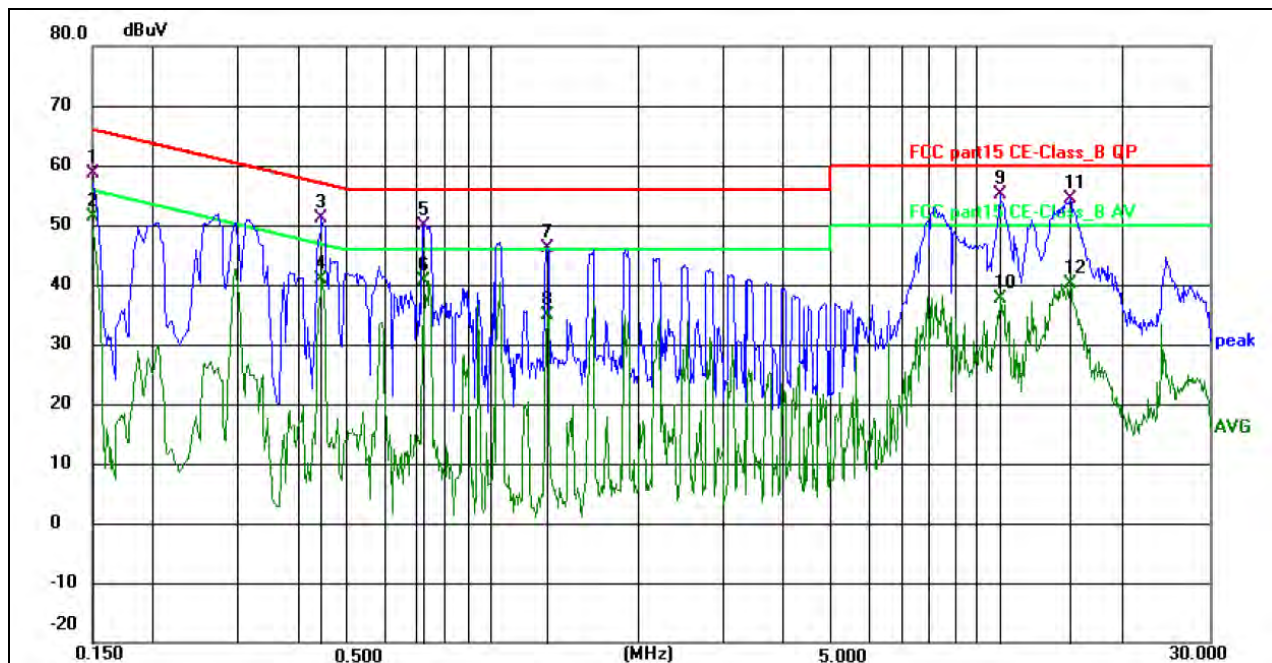


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.150000	48.40	10.35	58.75	66.00	-7.25	QP	P	
2 *	0.150000	41.00	10.35	51.35	56.00	-4.65	AVG	P	
3	0.442500	41.86	9.30	51.16	57.01	-5.85	QP	P	
4	0.442500	31.59	9.30	40.89	47.01	-6.12	AVG	P	
5	0.725800	40.73	9.21	49.94	56.00	-6.06	QP	P	
6	0.725800	31.52	9.21	40.73	46.00	-5.27	AVG	P	
7	1.302000	36.69	9.54	46.23	56.00	-9.77	QP	P	
8	1.302000	25.44	9.54	34.98	46.00	-11.02	AVG	P	
9	11.130000	44.95	10.12	55.07	60.00	-4.93	QP	P	
10	11.130000	27.46	10.12	37.58	50.00	-12.42	AVG	P	
11	15.531000	44.15	10.29	54.44	60.00	-5.56	QP	P	
12	15.531000	29.82	10.29	40.11	50.00	-9.89	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

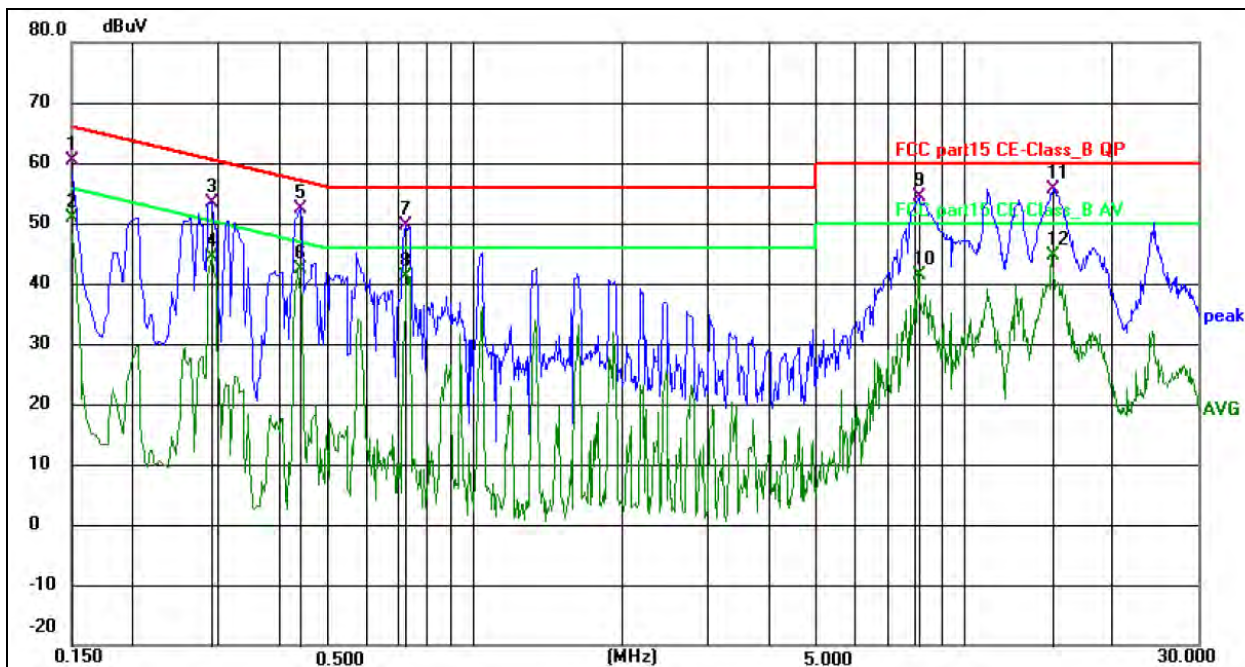

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.150000	49.84	10.50	60.34	66.00	-5.66	QP	P	
2	0.150000	40.34	10.50	50.84	56.00	-5.16	AVG	P	
3	0.289400	44.31	9.07	53.38	60.54	-7.16	QP	P	
4	0.289400	35.28	9.07	44.35	50.54	-6.19	AVG	P	
5	0.438000	43.27	9.16	52.43	57.10	-4.67	QP	P	
6	0.438000	33.18	9.16	42.34	47.10	-4.76	AVG	P	
7	0.725900	40.34	9.38	49.72	56.00	-6.28	QP	P	
8	0.725900	31.67	9.38	41.05	46.00	-4.95	AVG	P	
9	8.074500	44.47	9.80	54.27	60.00	-5.73	QP	P	
10	8.074500	31.58	9.80	41.38	50.00	-8.62	AVG	P	
11 *	15.202500	45.58	10.14	55.72	60.00	-4.28	QP	P	
12	15.202500	34.45	10.14	44.59	50.00	-5.41	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 0.8 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

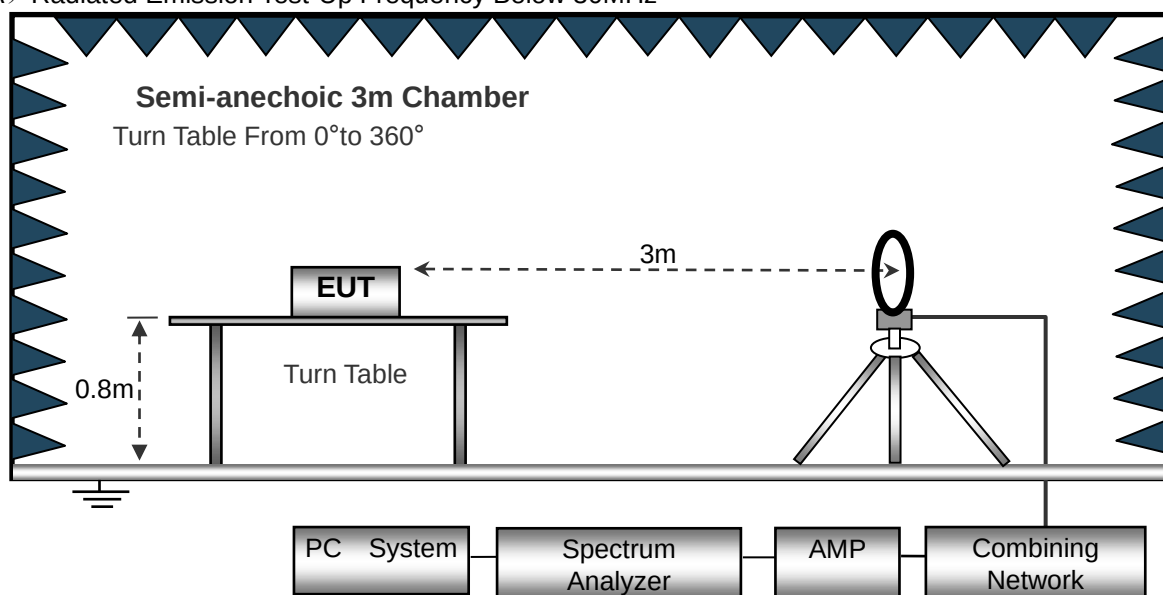

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

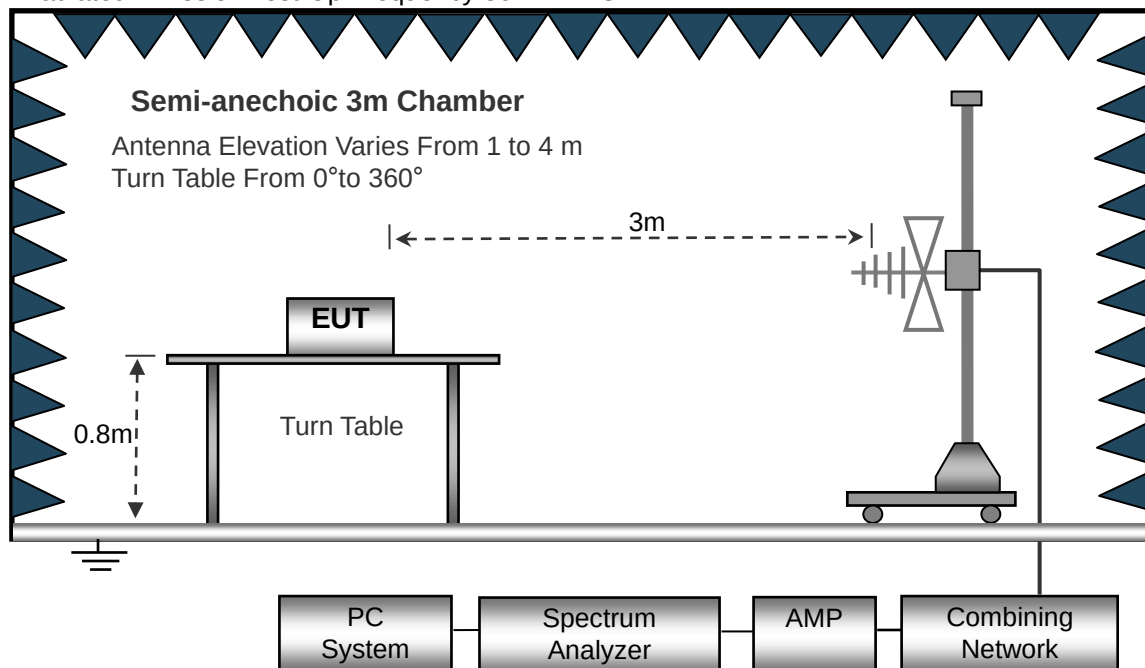

(C) Radiated Emission Test-Up Frequency Above 1GHz

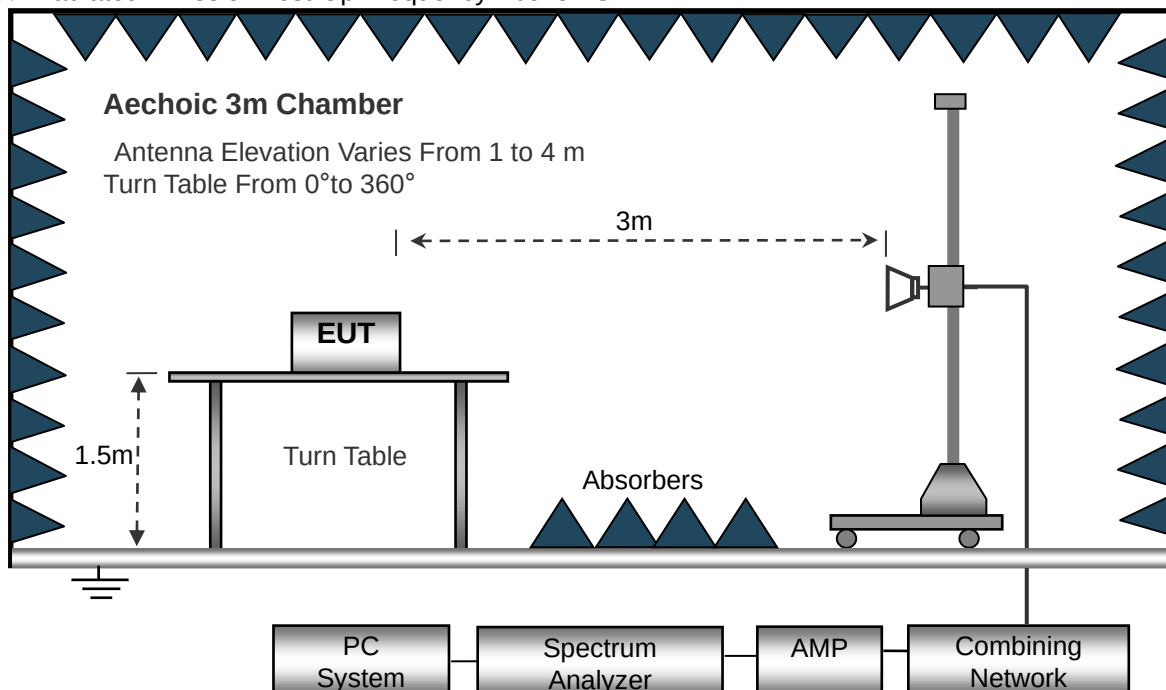

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 5		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.6796	45.18	-13.11	32.07	40.00	-7.93	QP
2		63.9827	42.60	-13.17	29.43	40.00	-10.57	QP
3	*	81.2116	53.17	-16.91	36.26	40.00	-3.74	QP
4		139.3611	49.79	-16.15	33.64	43.50	-9.86	QP
5		263.8190	43.61	-10.58	33.03	46.00	-12.97	QP
6		547.0976	37.45	-5.31	32.14	46.00	-13.86	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 5		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		38.4808	26.41	-12.50	13.91	40.00	-26.09	QP
2	!	81.4969	52.45	-16.27	36.18	40.00	-3.82	QP
3	!	140.3420	54.66	-16.12	38.54	43.50	-4.96	QP
4	!	179.3863	53.71	-14.59	39.12	43.50	-4.38	QP
5	*	264.7456	53.86	-11.44	42.42	46.00	-3.58	QP
6		543.2741	45.90	-6.29	39.61	46.00	-6.39	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	70.79	50.65	6.88	31.29	58.31	74	-15.69	PK
V	4824	58.32	50.65	6.88	31.29	45.84	54	-8.16	AV
V	7236	70.25	49.98	7.16	36.63	64.06	74	-9.94	PK
V	7236	49.27	49.98	7.16	36.63	43.08	54	-10.92	AV
V	16087	50.78	51.53	11.34	41.52	52.11	74	-21.89	PK
H	4824	69.89	50.65	6.88	31.29	57.41	74	-16.59	PK
H	4824	58.79	50.65	6.88	31.29	46.31	54	-7.69	AV
H	7236	73.03	49.98	7.16	36.63	66.84	74	-7.16	PK
H	7236	47.55	49.98	7.16	36.63	41.36	54	-12.64	AV
H	16087	50.77	51.53	11.34	41.52	52.10	74	-21.90	PK
operation frequency:2437									
V	4874	70.95	50.67	6.89	31.38	58.55	74	-15.45	PK
V	4874	58.50	50.67	6.89	31.38	46.10	54	-7.90	AV
V	7311	73.34	50.02	7.24	36.63	67.19	74	-6.81	PK
V	7311	49.15	50.02	7.24	36.63	43.00	54	-11.00	AV
V	16087	50.66	51.53	11.34	41.52	51.99	74	-22.01	PK
H	4874	70.22	50.67	6.89	31.38	57.82	74	-16.18	PK
H	4874	58.41	50.67	6.89	31.38	46.01	54	-7.99	AV
H	7311	72.99	50.02	7.24	36.63	66.84	74	-7.16	PK
H	7311	50.05	50.02	7.24	36.63	43.90	54	-10.10	AV
H	16087	51.25	51.53	11.34	41.52	52.58	74	-21.42	PK
operation frequency:2462									
V	4924	71.94	50.79	6.83	31.36	59.34	74	-14.66	PK
V	4924	58.63	50.79	6.83	31.36	46.03	54	-7.97	AV
V	7386	72.93	50.11	7.25	36.58	66.65	74	-7.35	PK
V	7386	48.93	50.11	7.25	36.58	42.65	54	-11.35	AV
V	16087	51.94	51.53	11.34	41.52	53.27	74	-20.73	PK
H	4924	71.27	50.79	6.83	31.36	58.67	74	-15.33	PK
H	4924	58.14	50.79	6.83	31.36	45.54	54	-8.46	AV
H	7386	70.86	50.11	7.25	36.58	64.58	74	-9.42	PK
H	7386	50.81	50.11	7.25	36.58	44.53	54	-9.47	AV
H	16087	51.98	51.53	11.34	41.52	53.31	74	-20.69	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	71.01	50.65	6.88	31.29	58.53	74	-15.47	PK
V	4824	58.56	50.65	6.88	31.29	46.08	54	-7.92	AV
V	7236	70.19	49.98	7.16	36.63	64.00	74	-10.00	PK
V	7236	48.63	49.98	7.16	36.63	42.44	54	-11.56	AV
V	16087	52.47	51.53	11.34	41.52	53.80	74	-20.20	PK
H	4824	73.02	50.65	6.88	31.29	60.54	74	-13.46	PK
H	4824	55.27	50.65	6.88	31.29	42.79	54	-11.21	AV
H	7236	69.69	49.98	7.16	36.63	63.50	74	-10.50	PK
H	7236	50.09	49.98	7.16	36.63	43.90	54	-10.10	AV
H	16087	49.96	51.53	11.34	41.52	51.29	74	-22.71	PK
operation frequency:2437									
V	4874	70.93	50.67	6.89	31.38	58.53	74	-15.47	PK
V	4874	58.84	50.67	6.89	31.38	46.44	54	-7.56	AV
V	7311	70.09	50.02	7.24	36.63	63.94	74	-10.06	PK
V	7311	48.68	50.02	7.24	36.63	42.53	54	-11.47	AV
V	16087	50.91	51.53	11.34	41.52	52.24	74	-21.76	PK
H	4874	69.65	50.67	6.89	31.38	57.25	74	-16.75	PK
H	4874	58.26	50.67	6.89	31.38	45.86	54	-8.14	AV
H	7311	69.15	50.02	7.24	36.63	63.00	74	-11.00	PK
H	7311	49.73	50.02	7.24	36.63	43.58	54	-10.42	AV
H	16087	50.70	51.53	11.34	41.52	52.03	74	-21.97	PK
operation frequency:2462									
V	4924	70.58	50.79	6.83	31.36	57.98	74	-16.02	PK
V	4924	58.63	50.79	6.83	31.36	46.03	54	-7.97	AV
V	7386	70.38	50.11	7.25	36.58	64.10	74	-9.90	PK
V	7386	49.73	50.11	7.25	36.58	43.45	54	-10.55	AV
V	16087	49.16	51.53	11.34	41.52	50.49	74	-23.51	PK
H	4924	69.73	50.79	6.83	31.36	57.13	74	-16.87	PK
H	4924	57.36	50.79	6.83	31.36	44.76	54	-9.24	AV
H	7386	68.61	50.11	7.25	36.58	62.33	74	-11.67	PK
H	7386	48.07	50.11	7.25	36.58	41.79	54	-12.21	AV
H	16087	49.98	51.53	11.34	41.52	51.31	74	-22.69	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	69.61	50.65	6.88	31.29	57.13	74	-16.87	PK
V	4824	58.16	50.65	6.88	31.29	45.68	54	-8.32	AV
V	7236	70.17	49.98	7.16	36.63	63.98	74	-10.02	PK
V	7236	48.85	49.98	7.16	36.63	42.66	54	-11.34	AV
V	16087	48.72	51.53	11.34	41.52	50.05	74	-23.95	PK
H	4824	70.08	50.65	6.88	31.29	57.60	74	-16.40	PK
H	4824	58.61	50.65	6.88	31.29	46.13	54	-7.87	AV
H	7236	68.03	49.98	7.16	36.63	61.84	74	-12.16	PK
H	7236	49.80	49.98	7.16	36.63	43.61	54	-10.39	AV
H	16087	49.87	51.53	11.34	41.52	51.20	74	-22.80	PK
operation frequency:2437									
V	4874	69.83	50.67	6.89	31.38	57.43	74	-16.57	PK
V	4874	57.89	50.67	6.89	31.38	45.49	54	-8.51	AV
V	7311	68.59	50.02	7.24	36.63	62.44	74	-11.56	PK
V	7311	50.50	50.02	7.24	36.63	44.35	54	-9.65	AV
V	16087	49.75	51.53	11.34	41.52	51.08	74	-22.92	PK
H	4874	69.00	50.67	6.89	31.38	56.60	74	-17.40	PK
H	4874	56.84	50.67	6.89	31.38	44.44	54	-9.56	AV
H	7311	68.71	50.02	7.24	36.63	62.56	74	-11.44	PK
H	7311	48.82	50.02	7.24	36.63	42.67	54	-11.33	AV
H	16087	49.14	51.53	11.34	41.52	50.47	74	-23.53	PK
operation frequency:2462									
V	4924	70.93	50.79	6.83	31.36	58.33	74	-15.67	PK
V	4924	57.75	50.79	6.83	31.36	45.15	54	-8.85	AV
V	7386	67.95	50.11	7.25	36.58	61.67	74	-12.33	PK
V	7386	48.84	50.11	7.25	36.58	42.56	54	-11.44	AV
V	16087	51.00	51.53	11.34	41.52	52.33	74	-21.67	PK
H	4924	70.91	50.79	6.83	31.36	58.31	74	-15.69	PK
H	4924	57.03	50.79	6.83	31.36	44.43	54	-9.57	AV
H	7386	69.16	50.11	7.25	36.58	62.88	74	-11.12	PK
H	7386	49.86	50.11	7.25	36.58	43.58	54	-10.42	AV
H	16087	49.73	51.53	11.34	41.52	51.06	74	-22.94	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422									
V	4844	69.65	50.67	6.89	31.32	57.19	74	-16.81	PK
V	4844	58.29	50.67	6.89	31.32	45.83	54	-8.17	AV
V	7266	69.99	50.01	7.15	36.62	63.75	74	-10.25	PK
V	7266	49.31	50.01	7.15	36.62	43.07	54	-10.93	AV
V	16087	49.15	51.53	11.34	41.52	50.48	74	-23.52	PK
H	4844	69.98	50.67	6.89	31.32	57.52	74	-16.48	PK
H	4844	58.30	50.67	6.89	31.32	45.84	54	-8.16	AV
H	7266	67.55	50.01	7.15	36.62	61.31	74	-12.69	PK
H	7266	49.85	50.01	7.15	36.62	43.61	54	-10.39	AV
H	16087	50.08	51.53	11.34	41.52	51.41	74	-22.59	PK
operation frequency:2437									
V	4874	69.90	50.67	6.89	31.38	57.50	74	-16.50	PK
V	4874	57.11	50.67	6.89	31.38	44.71	54	-9.29	AV
V	7311	68.82	50.02	7.24	36.63	62.67	74	-11.33	PK
V	7311	48.83	50.02	7.24	36.63	42.68	54	-11.32	AV
V	16087	50.13	51.53	11.34	41.52	51.46	74	-22.54	PK
H	4874	68.79	50.67	6.89	31.38	56.39	74	-17.61	PK
H	4874	56.48	50.67	6.89	31.38	44.08	54	-9.92	AV
H	7311	68.82	50.02	7.24	36.63	62.67	74	-11.33	PK
H	7311	50.09	50.02	7.24	36.63	43.94	54	-10.06	AV
H	16087	48.57	51.53	11.34	41.52	49.90	74	-24.10	PK
operation frequency:2452									
V	4904	71.14	50.76	6.81	31.31	58.50	74	-15.50	PK
V	4904	57.04	50.76	6.81	31.31	44.40	54	-9.60	AV
V	7356	68.15	50.08	7.21	36.52	61.80	74	-12.20	PK
V	7356	50.15	50.08	7.21	36.52	43.80	54	-10.20	AV
V	16087	51.47	51.53	11.34	41.52	52.80	74	-21.20	PK
H	4904	70.80	50.76	6.81	31.31	58.16	74	-15.84	PK
H	4904	57.40	50.76	6.81	31.31	44.76	54	-9.24	AV
H	7356	69.14	50.08	7.21	36.52	62.79	74	-11.21	PK
H	7356	48.84	50.08	7.21	36.52	42.49	54	-11.51	AV
H	16087	49.73	51.53	11.34	41.52	51.06	74	-22.94	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

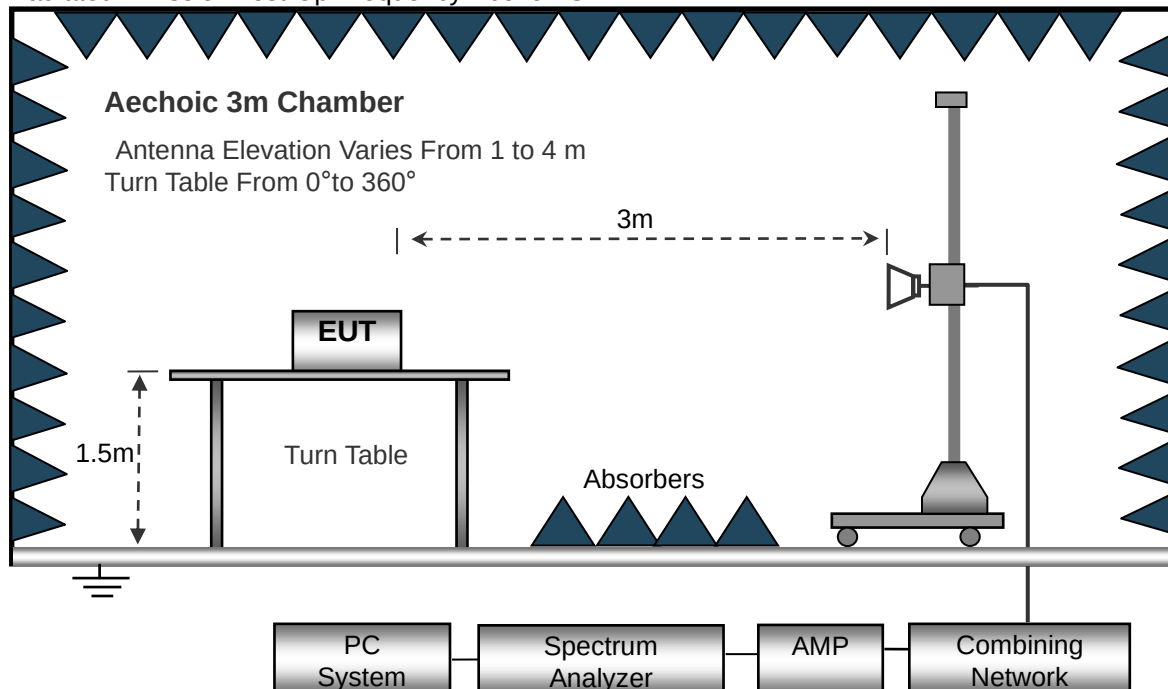

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.65	52.12	2.73	27.38	54.64	74	-19.36	PK
V	2390	65.91	52.12	2.73	27.38	43.90	54	-10.10	AV
V	2400	76.77	52.16	2.78	27.41	54.80	74	-19.20	PK
V	2400	64.77	52.16	2.78	27.41	42.80	54	-11.20	AV
H	2390	77.19	52.12	2.73	27.38	55.18	74	-18.82	PK
H	2390	65.68	52.12	2.73	27.38	43.67	54	-10.33	AV
H	2400	77.08	52.16	2.78	27.41	55.11	74	-18.89	PK
H	2400	66.11	52.16	2.78	27.41	44.14	54	-9.86	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	76.63	52.23	2.86	27.44	54.70	74	-19.30	PK
V	2483.5	66.02	52.23	2.86	27.44	44.09	54	-9.91	AV
V	2500	76.86	52.26	2.88	27.49	54.97	74	-19.03	PK
V	2500	65.17	52.26	2.88	27.49	43.28	54	-10.72	AV
H	2483.5	77.19	52.23	2.86	27.44	55.26	74	-18.74	PK
H	2483.5	65.89	52.23	2.86	27.44	43.96	54	-10.04	AV
H	2500	76.73	52.26	2.88	27.49	54.84	74	-19.16	PK
H	2500	65.53	52.26	2.88	27.49	43.64	54	-10.36	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.73	52.12	2.73	27.38	54.72	74	-19.28	PK
V	2390	65.59	52.12	2.73	27.38	43.58	54	-10.42	AV
V	2400	76.56	52.16	2.78	27.41	54.59	74	-19.41	PK
V	2400	64.52	52.16	2.78	27.41	42.55	54	-11.45	AV
H	2390	76.63	52.12	2.73	27.38	54.62	74	-19.38	PK
H	2390	65.70	52.12	2.73	27.38	43.69	54	-10.31	AV
H	2400	77.04	52.16	2.78	27.41	55.07	74	-18.93	PK
H	2400	66.02	52.16	2.78	27.41	44.05	54	-9.95	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	77.17	52.23	2.86	27.44	55.24	74	-18.76	PK
V	2483.5	65.59	52.23	2.86	27.44	43.66	54	-10.34	AV
V	2500	77.34	52.26	2.88	27.49	55.45	74	-18.55	PK
V	2500	65.52	52.26	2.88	27.49	43.63	54	-10.37	AV
H	2483.5	77.13	52.23	2.86	27.44	55.20	74	-18.80	PK
H	2483.5	66.16	52.23	2.86	27.44	44.23	54	-9.77	AV
H	2500	77.07	52.26	2.88	27.49	55.18	74	-18.82	PK
H	2500	66.20	52.26	2.88	27.49	44.31	54	-9.69	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.76	52.12	2.73	27.38	54.75	74	-19.25	PK
V	2390	65.59	52.12	2.73	27.38	43.58	54	-10.42	AV
V	2400	77.74	52.16	2.78	27.41	55.77	74	-18.23	PK
V	2400	65.56	52.16	2.78	27.41	43.59	54	-10.41	AV
H	2390	77.80	52.12	2.73	27.38	55.79	74	-18.21	PK
H	2390	65.48	52.12	2.73	27.38	43.47	54	-10.53	AV
H	2400	77.26	52.16	2.78	27.41	55.29	74	-18.71	PK
H	2400	65.59	52.16	2.78	27.41	43.62	54	-10.38	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	77.54	52.23	2.86	27.44	55.61	74	-18.39	PK
V	2483.5	65.64	52.23	2.86	27.44	43.71	54	-10.29	AV
V	2500	76.58	52.26	2.88	27.49	54.69	74	-19.31	PK
V	2500	65.78	52.26	2.88	27.49	43.89	54	-10.11	AV
H	2483.5	77.75	52.23	2.86	27.44	55.82	74	-18.18	PK
H	2483.5	65.76	52.23	2.86	27.44	43.83	54	-10.17	AV
H	2500	76.97	52.26	2.88	27.49	55.08	74	-18.92	PK
H	2500	66.52	52.26	2.88	27.49	44.63	54	-9.37	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422									
V	2390	76.76	52.12	2.73	27.38	54.75	74	-19.25	PK
V	2390	65.58	52.12	2.73	27.38	43.57	54	-10.43	AV
V	2400	77.99	52.16	2.78	27.41	56.02	74	-17.98	PK
V	2400	66.00	52.16	2.78	27.41	44.03	54	-9.97	AV
H	2390	77.77	52.12	2.73	27.38	55.76	74	-18.24	PK
H	2390	65.69	52.12	2.73	27.38	43.68	54	-10.32	AV
H	2400	77.33	52.16	2.78	27.41	55.36	74	-18.64	PK
H	2400	65.74	52.16	2.78	27.41	43.77	54	-10.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2452									
V	2483.5	77.64	52.23	2.86	27.44	55.71	74	-18.29	PK
V	2483.5	65.72	52.23	2.86	27.44	43.79	54	-10.21	AV
V	2500	77.04	52.26	2.88	27.49	55.15	74	-18.85	PK
V	2500	65.70	52.26	2.88	27.49	43.81	54	-10.19	AV
H	2483.5	77.77	52.23	2.86	27.44	55.84	74	-18.16	PK
H	2483.5	66.02	52.23	2.86	27.44	44.09	54	-9.91	AV
H	2500	77.12	52.26	2.88	27.49	55.23	74	-18.77	PK
H	2500	66.93	52.26	2.88	27.49	45.04	54	-8.96	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP



3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.6 TEST RESULTS




For Conducted

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-48.02	-30	Pass
NVNT	b	2462	-58.03	-30	Pass
NVNT	g	2412	-39.48	-30	Pass
NVNT	g	2462	-53.37	-30	Pass
NVNT	n20	2412	-31.63	-30	Pass
NVNT	n20	2462	-51.73	-30	Pass
NVNT	n40	2422	-34.38	-30	Pass
NVNT	n40	2452	-44.97	-30	Pass

Band Edge NVNT b 2412MHz Ant1 Ref



Band Edge NVNT b 2412MHz Ant1 Emission

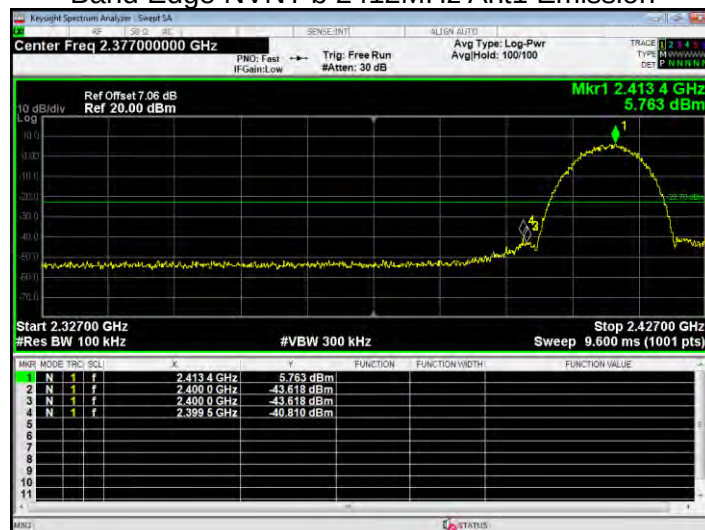




Band Edge NVNT b 2462MHz Ant1 Ref



Band Edge NVNT b 2462MHz Ant1 Emission

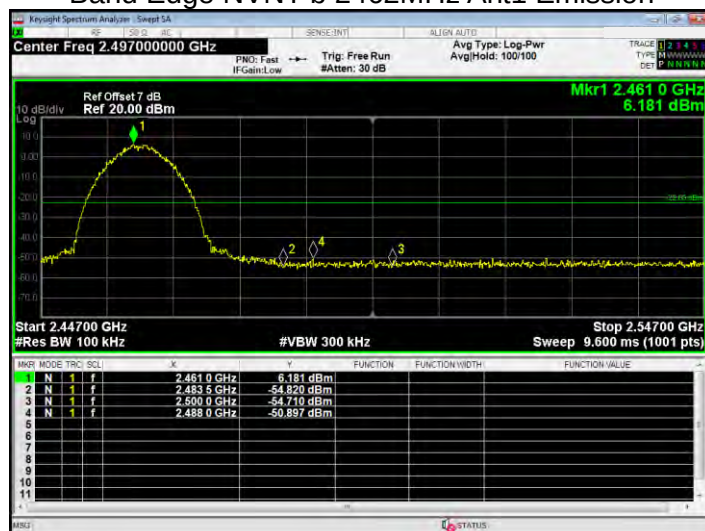


Band Edge NVNT g 2412MHz Ant1 Ref






Band Edge NVNT g 2412MHz Ant1 Emission

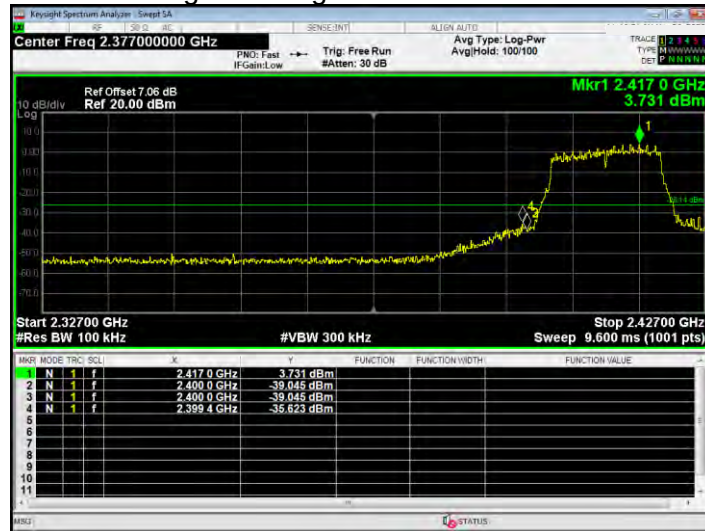

Band Edge NVNT g 2462MHz Ant1 Ref



Band Edge NVNT g 2462MHz Ant1 Emission

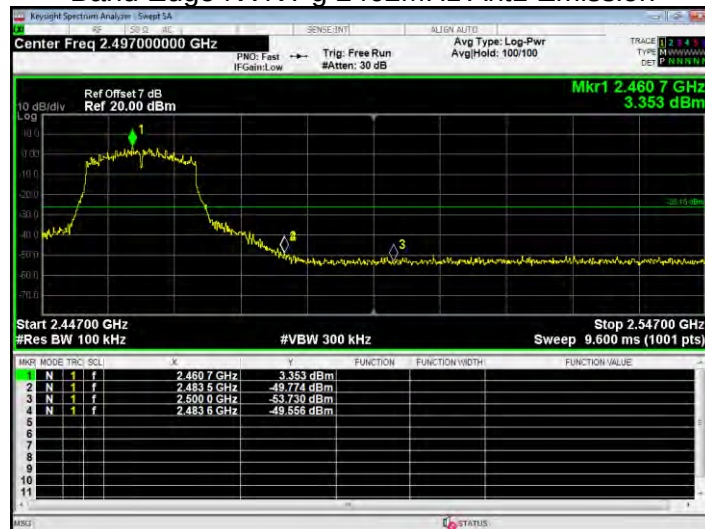




Band Edge NVNT n20 2412MHz Ant1 Ref



Band Edge NVNT n20 2412MHz Ant1 Emission

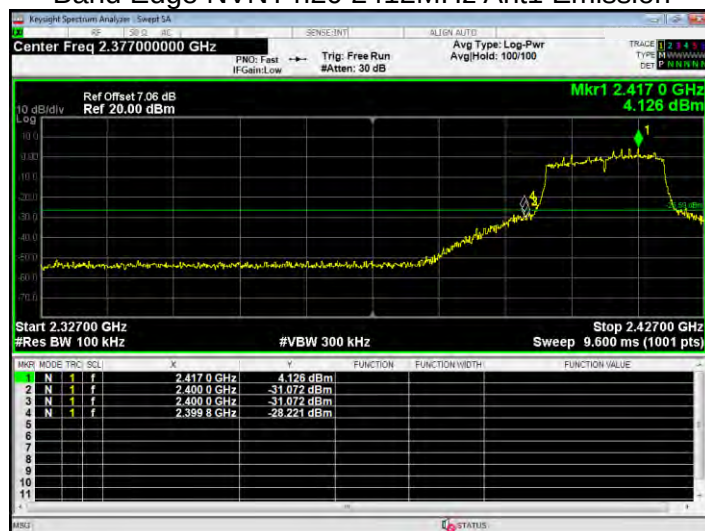


Band Edge NVNT n20 2462MHz Ant1 Ref






Band Edge NVNT n20 2462MHz Ant1 Emission

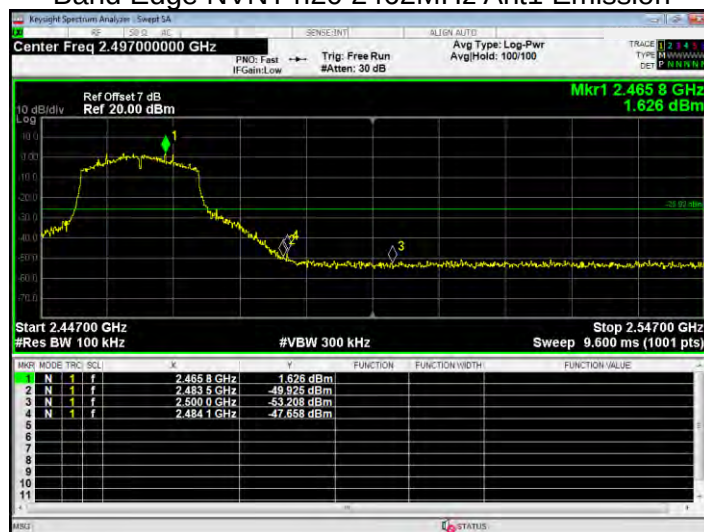

Band Edge NVNT n40 2422MHz Ant1 Ref



Band Edge NVNT n40 2422MHz Ant1 Emission

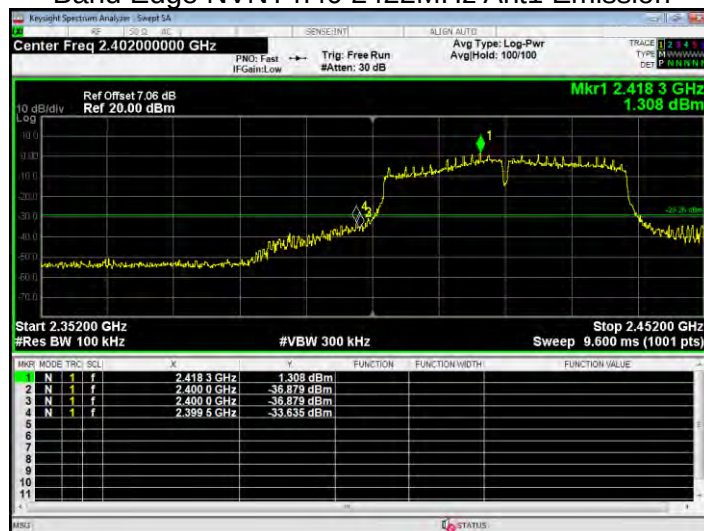



Band Edge NVNT n40 2452MHz Ant1 Ref



Band Edge NVNT n40 2452MHz Ant1 Emission






For Conducted

During the test, pre-scan the all modulation, and found the 802.11b mode which it is worse case.

Test channel:



Lowest channel

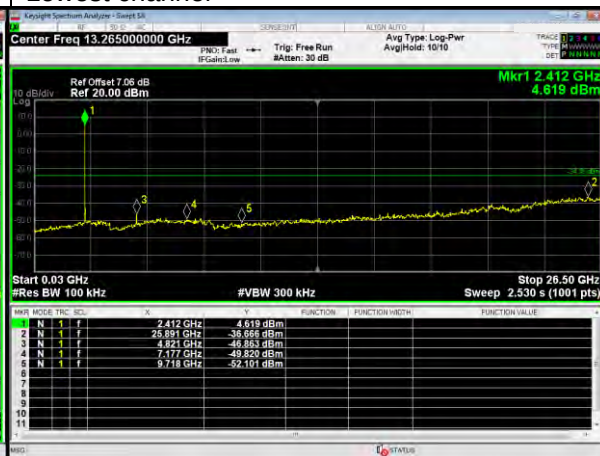


0.03GHz~26.5GHz

Test channel:



Middle channel

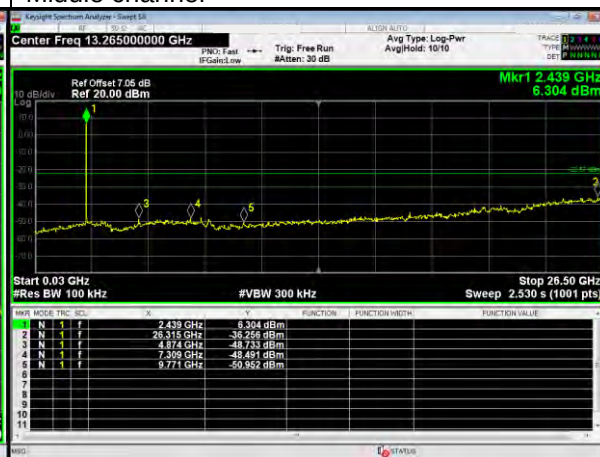


0.03GHz~26.5GHz

Test channel:



Highest channel

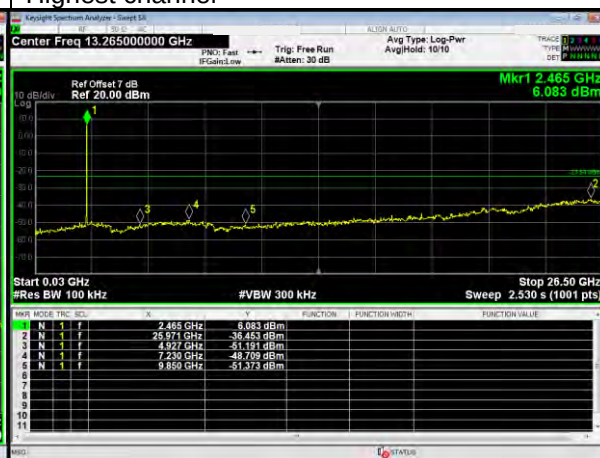

0.03GHz~26.5GHz



4. AVERAGE OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

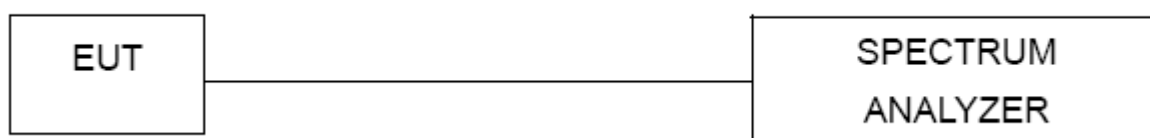

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Mode	Test Channel	Average Output Power (dBm)	Duty Factor (dB)	Total Power (dBm)	LIMIT (dBm)
802.11b	Low	16.66	0.12	16.78	30.00
	Middle	17.07	0.12	17.19	30.00
	High	16.20	0.12	16.32	30.00
802.11g	Low	13.52	0.69	14.21	30.00
	Middle	13.81	0.69	14.50	30.00
	High	12.99	0.69	13.68	30.00
802.11n HT20	Low	14.43	0.11	14.54	30.00
	Middle	14.70	0.11	14.81	30.00
	High	13.82	0.11	13.93	30.00
802.11n HT40	Low	13.89	0.21	14.10	30.00
	Middle	13.87	0.21	14.08	30.00
	High	13.46	0.21	13.67	30.00



802.11b



802.11g



2412MHz



2412MHz



2437MHz



2437MHz



2462MHz

2462MHz



802.11n HT20



802.11n HT40



2412MHz



2422MHz



2437MHz



2437MHz



2462MHz

2452MHz




Duty Cycle factor


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
b	2412	Ant1	97.3	0.12
b	2437	Ant1	97.29	0.12
b	2462	Ant1	97.31	0.12
g	2412	Ant1	85.28	0.69
g	2437	Ant1	85.3	0.69
g	2462	Ant1	85.3	0.69
n20	2412	Ant1	97.59	0.11
n20	2437	Ant1	97.57	0.11
n20	2462	Ant1	97.52	0.11
n40	2422	Ant1	95.31	0.21
n40	2437	Ant1	95.34	0.21
n40	2452	Ant1	95.32	0.21




802.11b

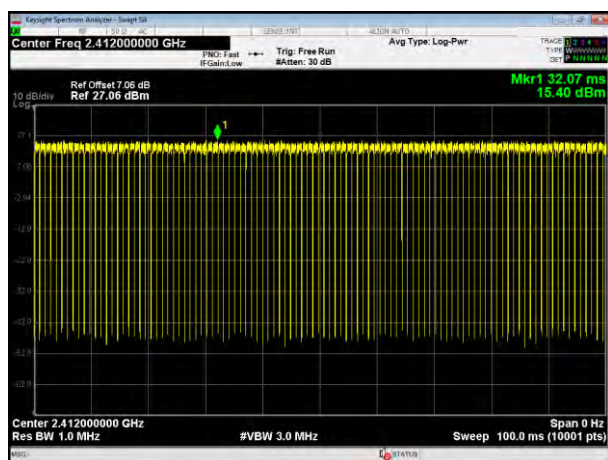

802.11g

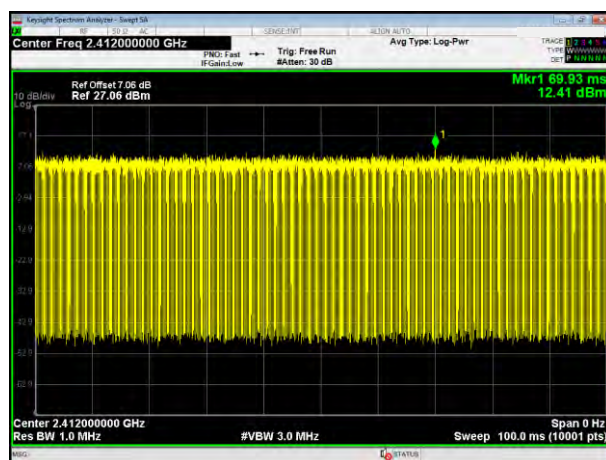

2412MHz

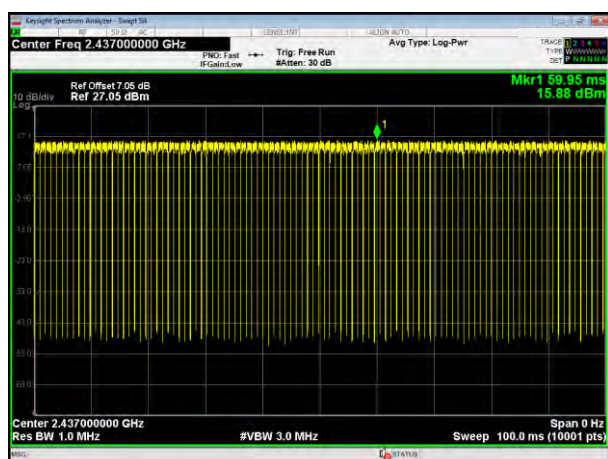


2412MHz



2437MHz



2437MHz

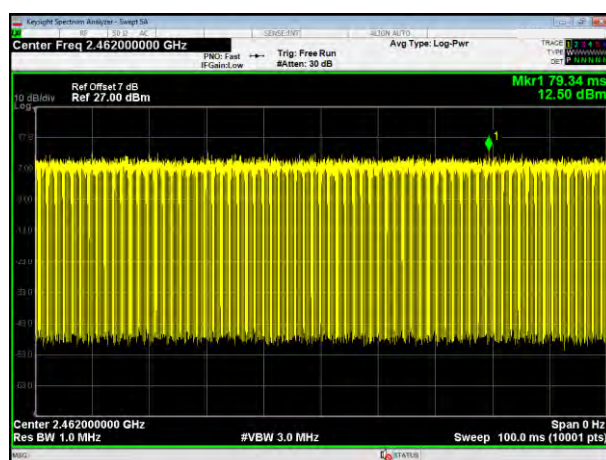

2462MHz

2462MHz



802.11n HT20



802.11n HT40



2412MHz



2422MHz



2437MHz



2437MHz



2462MHz

2452MHz



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3kHz$
VB	$VBW \geq 3RBW$
Detector	power averaging (rms) or sample detector (when rms not available).
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**

Mode	Test Channel	Reading Level (dBm)	Limit (dBm/3kHz)	Result
802.11b	Low	-15.148	8	PASS
	Middle	-15.402	8	PASS
	High	-15.739	8	PASS
802.11g	Low	-19.86	8	PASS
	Middle	-19.352	8	PASS
	High	-19.816	8	PASS
802.11n20	Low	-19.965	8	PASS
	Middle	-19.623	8	PASS
	High	-19.997	8	PASS
802.11n40	Low	-19.841	8	PASS
	Middle	-21.385	8	PASS
	High	-22.215	8	PASS



802.11b



802.11g



2412MHz



2412MHz



2437MHz



2437MHz



2462MHz

2462MHz



802.11n HT20



802.11n HT40



2412MHz




2422MHz



2437MHz



2437MHz

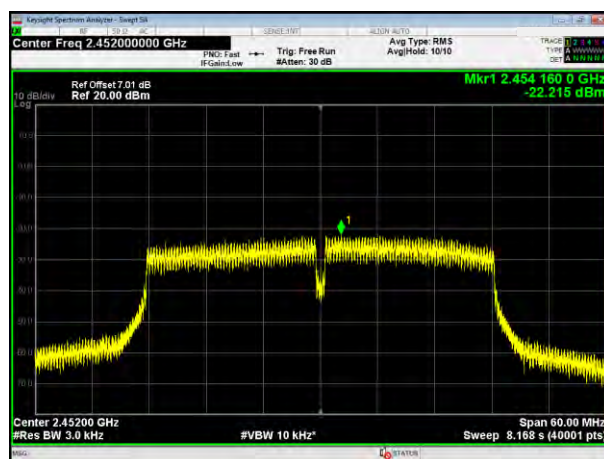

2462MHz

2452MHz



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**


	Test Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	Low	8.347	0.5	Pass
	Middle	7.656	0.5	Pass
	High	7.278	0.5	Pass
802.11g	Low	15.798	0.5	Pass
	Middle	15.901	0.5	Pass
	High	15.364	0.5	Pass
802.11n HT20	Low	14.7	0.5	Pass
	Middle	16.299	0.5	Pass
	High	13.791	0.5	Pass
802.11n HT40	Low	31.284	0.5	Pass
	Middle	32.564	0.5	Pass
	High	33.835	0.5	Pass



802.11b



802.11g

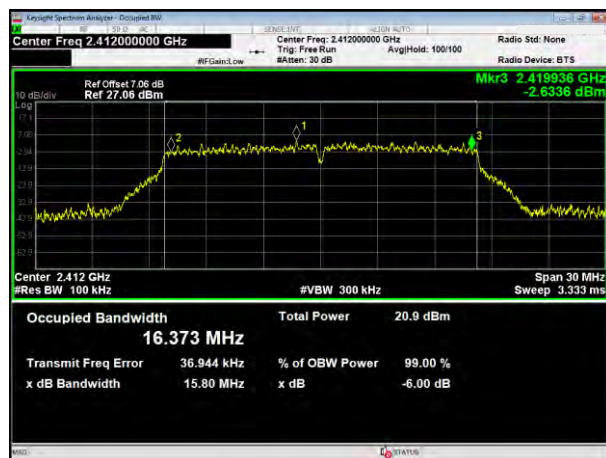

2412MHz



2412MHz



2437MHz



2437MHz



2462MHz

2462MHz



802.11n HT20



802.11n HT40



2412MHz



2422MHz



2437MHz



2437MHz



2462MHz

2452MHz



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is Internal antenna, It comply with the standard requirement.


8. TEST SEUUP PHOTO

Radiated Measurement Photos

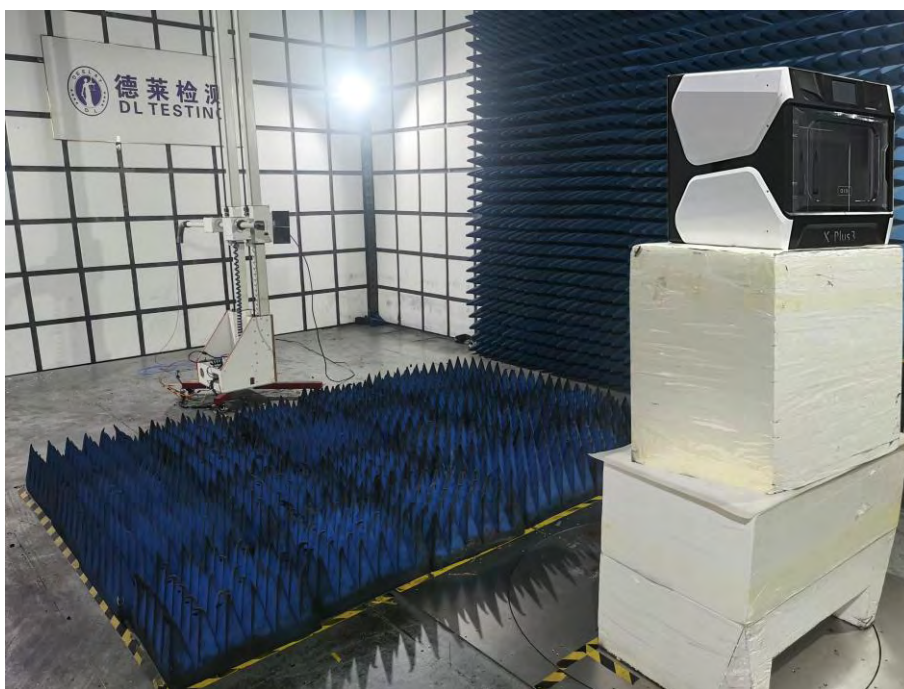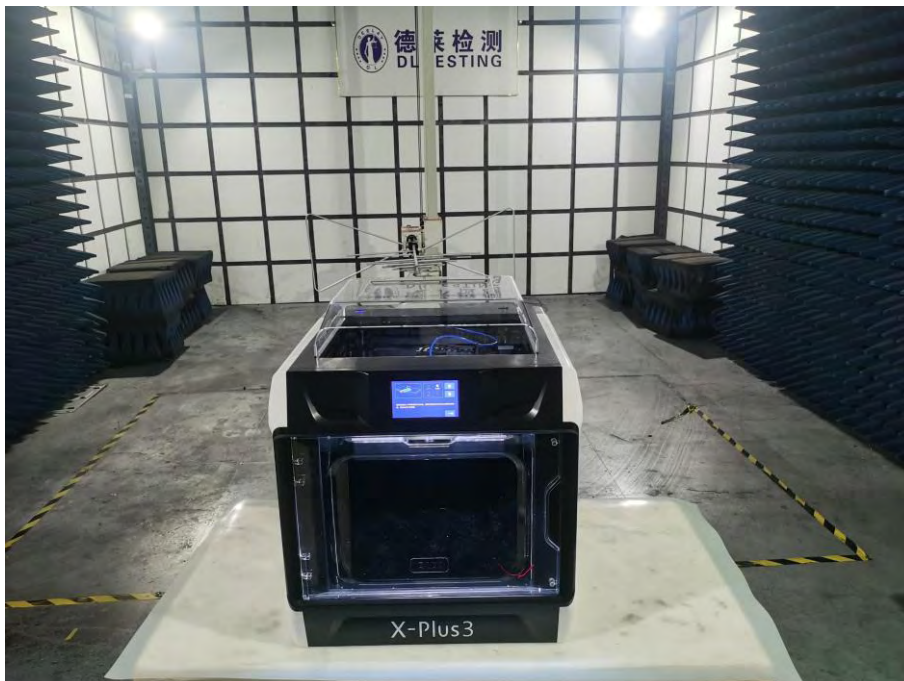






Conducted Measurement Photos

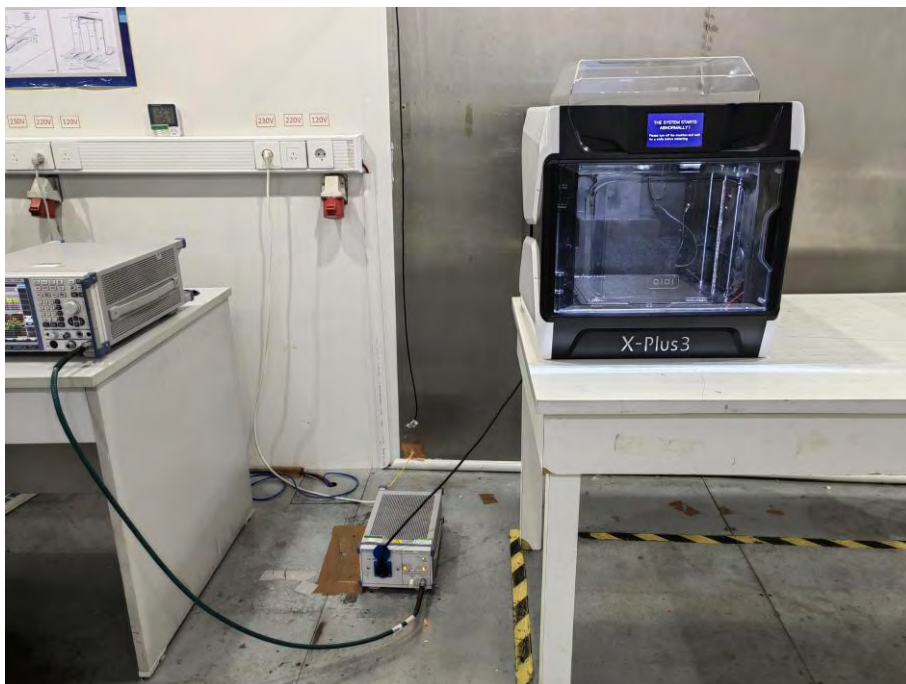



9. EUT PHOTO

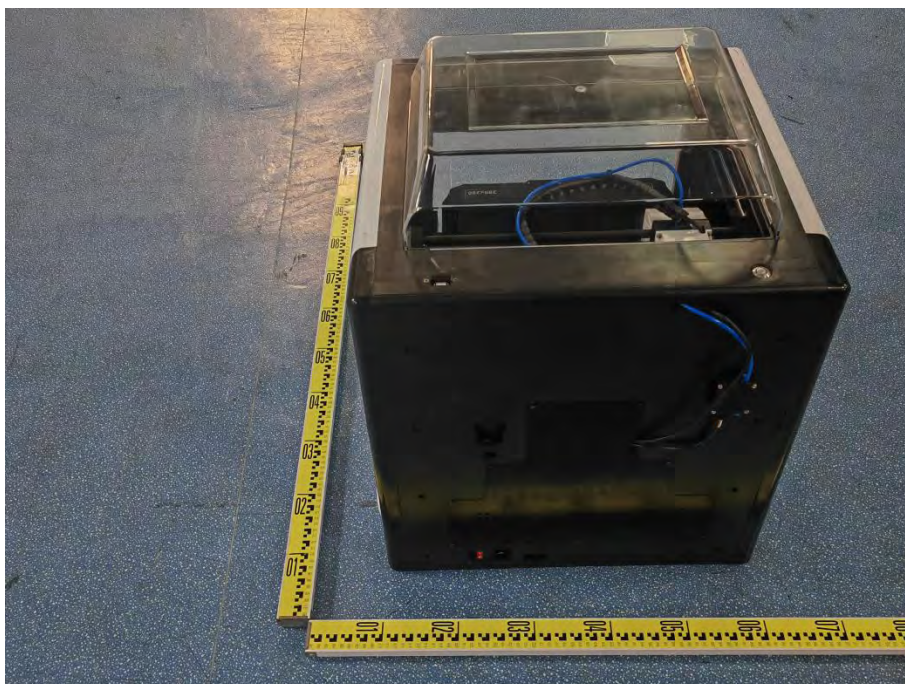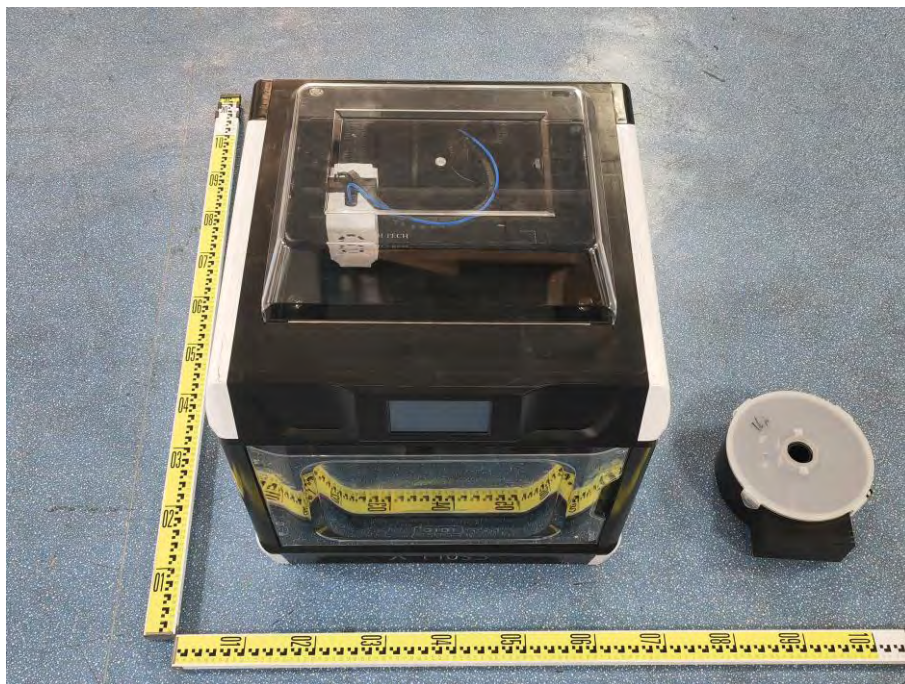

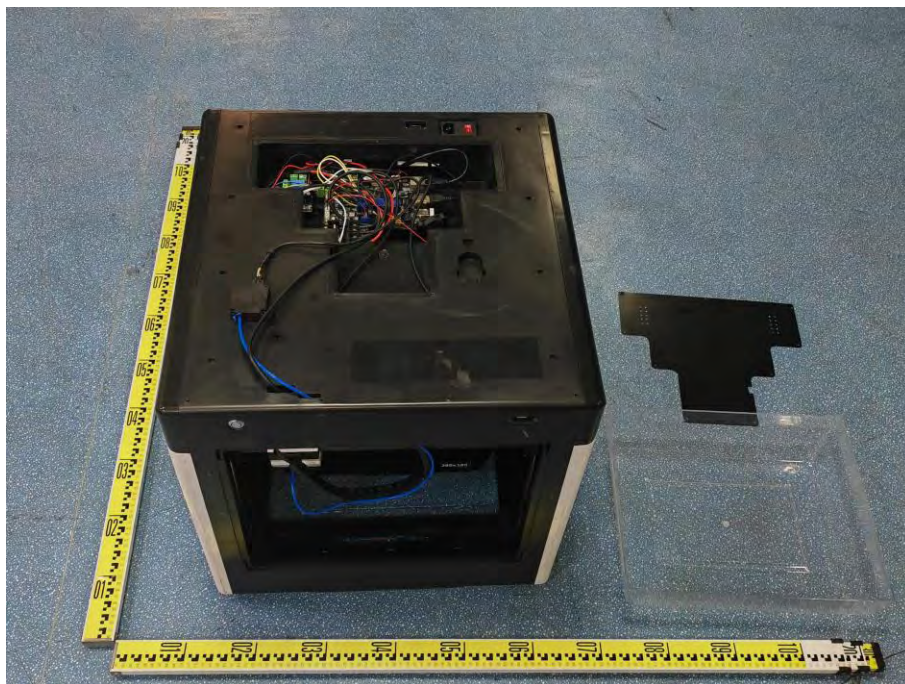

***** END OF REPORT *****