



FCC PART 15.247 TEST REPORT

For

Hangzhou YuShu Technology Co., Ltd.

306 Room, Building 1, 88 Dongliu Rd, XiXing Street, Binjiang District, Hangzhou, Zhejiang, China

FCC ID: 2A5PE-YUSHU008

Report Type: Original Report	Product Name: Humanoid robot
Report Number: <u>RKSA241202004-00C</u>	
Report Date: <u>2025-02-27</u>	
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Kyle Xu</u> 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
TEST SYSTEM SETUP.....	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
TEST RESULTS SUMMARY	17
TEST DATA: SEE APPENDIX	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA: SEE APPENDIX	18
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA: SEE APPENDIX	19
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA: SEE APPENDIX	20
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA: SEE APPENDIX	21
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	22

APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA: SEE APPENDIX	22
FCC §15.247(d) - BAND EDGES TESTING	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA: SEE APPENDIX	23
APPENDIX - TEST DATA.....	24
ENVIRONMENTAL CONDITIONS & TEST INFORMATION.....	24
RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS	25
CHANNEL SEPARATION TEST	43
20 dB BANDWIDTH TEST	45
QUANTITY OF HOPPING CHANNEL TEST	48
TIME OF OCCUPANCY (DWELL TIME).....	49
PEAK OUTPUT POWER MEASUREMENT	52
BAND EDGES.....	55
EUT PHOTOGRAPHS	58
TEST SETUP PHOTOGRAPHS	59

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA241202004-00C	R1V1	2025-02-27	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Hangzhou YuShu Technology Co., Ltd.
Tested Model	G1
Product Name	Humanoid robot
Power Supply	DC 46.8V from battery
RF Function:	Classic BT
Operating Band/Frequency:	2402-2480 MHz
Maximum Output Power:	GFSK: 5.87 dBm $\pi/4$ -DQPSK: 7.92 dBm 8DPSK: 8.41 dBm
Channel Number:	79
Channel Separation:	1 MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	Ceramic Antenna
★Maximum Antenna Gain:	1.5 dBi

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA241202004-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-12-02.)

Objective

This test report is prepared for *Hangzhou YuShu Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test tool: QRCT

★Power level: default

Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
HP	Notebook	4441s	2CE3130VWY

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	Notebook

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

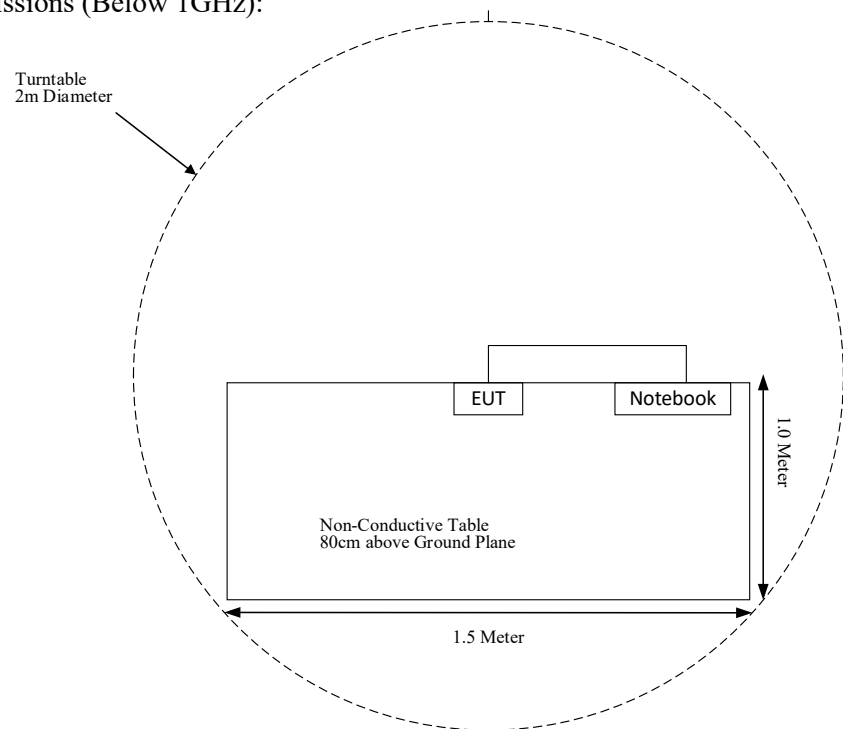

For Radiated Emissions (Above 1GHz):

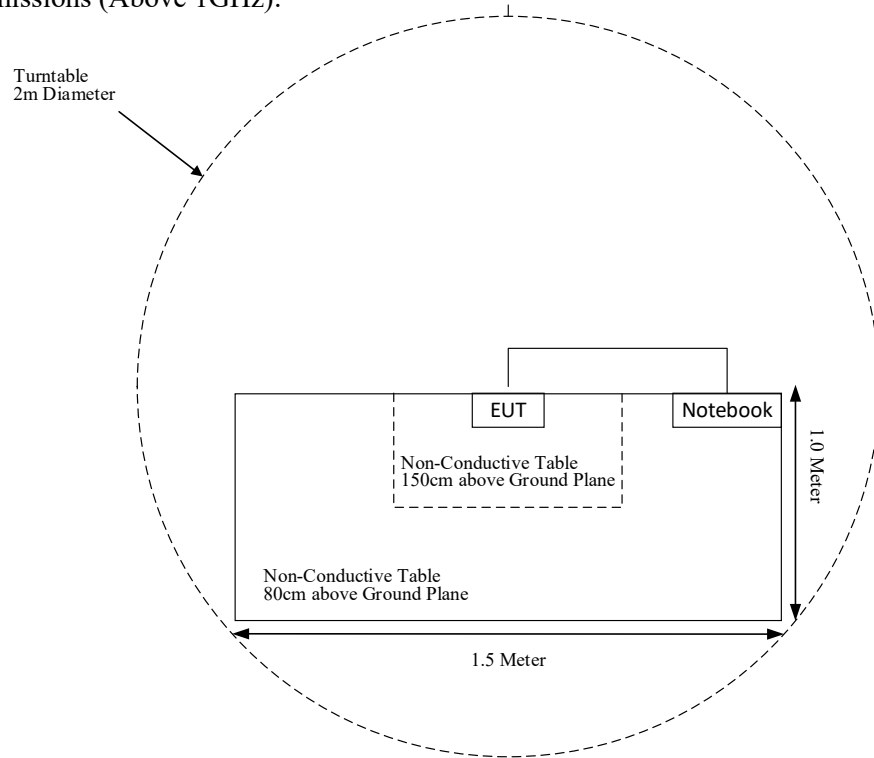

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable (See Note)
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Note: The EUT powered by battery.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-11-08	2027-11-07
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-25	2025-04-24
BACL	Active Loop Antenna	1313-1A	4041511	2024-11-22	2027-11-21
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2024-04-25	2025-04-24
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
SELECTOR	Amplifier	EM18G40G	060726	2024-04-25	2025-04-24
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2024-04-25	2025-04-24
Narda	Attenuator	10dB	010	2024-04-25	2025-04-24
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-13	013	2024-04-25	2025-04-24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2024-04-24	2025-04-23
Narda	Attenuator	10dB	010	2024-04-25	2025-04-24
XHFDZ	RG178 Coaxial Cable	SMA-178	XHF-1102	Each time	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		★Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE ratio
		(dBi)	(numeric)	(dBm)	(mW)				
LoRa	2400.8-2480	3.0	2.0	5.5	3.55	20	0.0014	1.0	0.0014
2.4G Wi-Fi	2412-2462	3.0	2.0	29	794.33	20	0.3160	1.0	0.3160
5G Wi-Fi	5150-5250	4.2	2.63	22.5	177.83	20	0.0930	1.0	0.0930
	5250-5350	4.2	2.63	22.0	158.49	20	0.0829	1.0	0.0829
	5470-5725	4.2	2.63	22.0	158.49	20	0.0829	1.0	0.0829
	5725-5850	4.2	2.63	23.5	223.87	20	0.1171	1.0	0.1171
BLE	2402-2480	1.5	1.41	7.0	5.01	20	0.0014	1.0	0.0014
Classic BT	2402-2480	1.5	1.41	8.5	7.08	20	0.0020	1.0	0.0020

Note:

1. For the above tune up power were declared by the manufacturer.
2. SRD and 2.4G Wi-Fi/5G WIFI/BT/BLE can transmit simultaneously.

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= S_{SRD}/S_{limitSRD} + S_{2.4G Wi-Fi}/S_{limit2.4G Wi-Fi}$$

$$= 0.0014 + 0.3160$$

$$= 0.3174$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Antenna Connector Construction


The EUT has an ceramic antenna which was permanently attached, and the antenna gain is 1.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

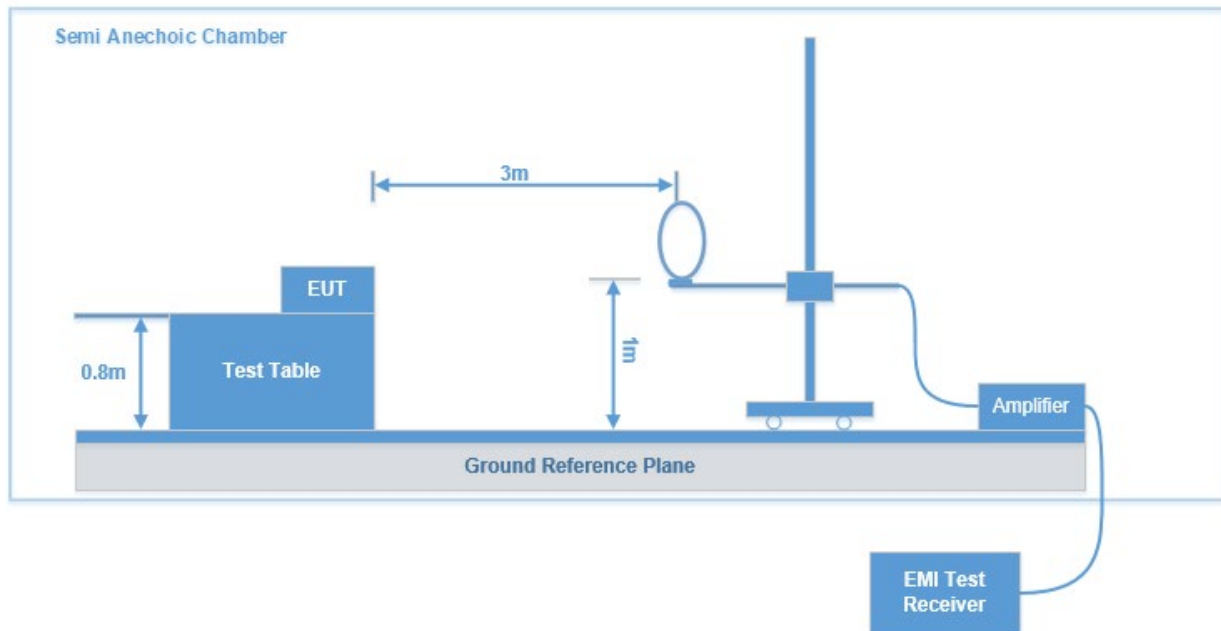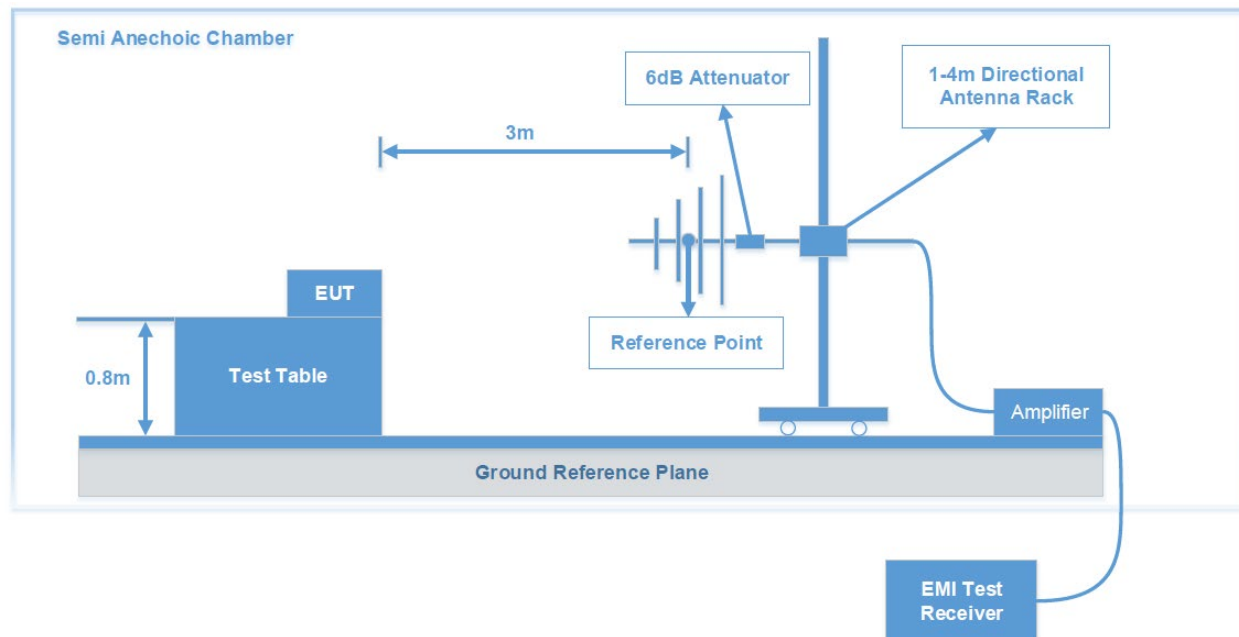Test System Setup**9 kHz-30 MHz:****30 MHz-1 GHz:**

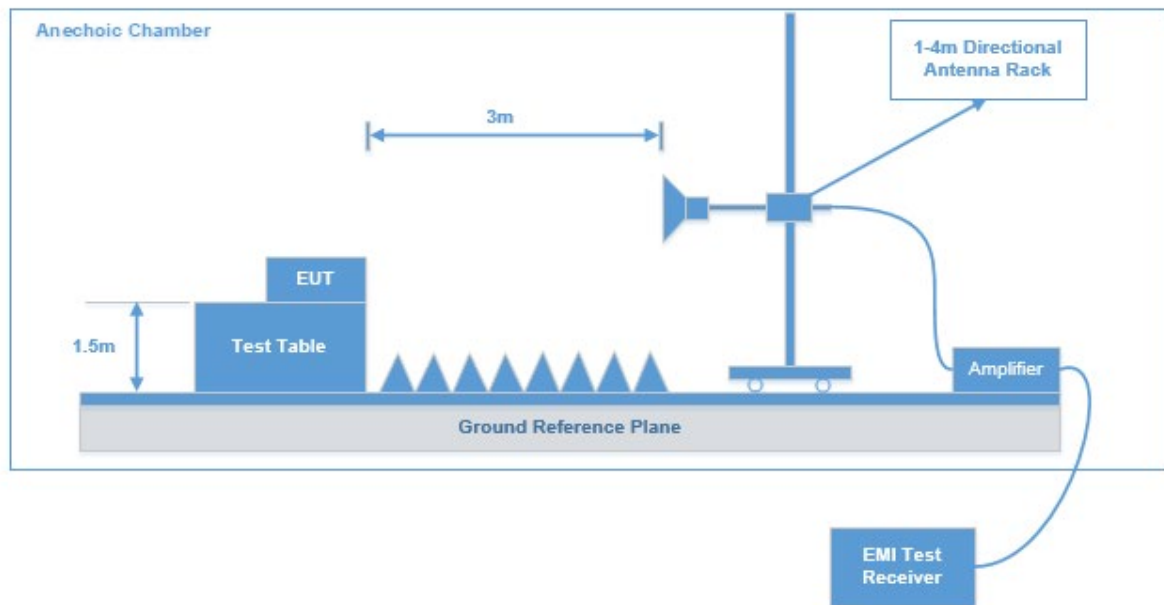Above 1 GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix


FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Zero span, centered on a hopping channel.
- b. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d. Detector function: Peak.
- e. Trace: Max hold.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW ≥ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

APPENDIX - TEST DATA

Environmental Conditions & Test Information

Test Item:	RADIATED EMISSIONS		
	9kHz - 1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz
Test Date:	2025-01-14	2024-12-18	2025-02-27
Temperature:	16.3 °C	22.8 °C	22.6 °C
Relative Humidity:	35 %	53 %	52 %
ATM Pressure:	102.4 kPa	100.5kPa	100.7kPa
Test Result:	Pass	Pass	Pass
Test Engineer:	Jerry Yan	Klein Zhu	Hugh Wu

Test Item:	20 DB BANDWIDTH TEST	CHANNEL SEPARATION TEST	QUANTITY OF HOPPING CHANNEL TEST	TIME OF OCCUPANCY (DWELL TIME)
Test Date:	2025-01-13	2025-01-13	2025-01-13	2025-01-13
Temperature:	23.9 °C	23.9 °C	23.9 °C	23.9 °C
Relative Humidity:	50 %	50 %	50 %	50 %
ATM Pressure:	101.6Pa	101.6Pa	101.6Pa	101.6Pa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou	Neil Zhou	Neil Zhou



Test Item:	TRANSMITTER OUTPUT POWER MEASUREMENT	BAND EDGES
Test Date:	2025-01-13	2025-01-13
Temperature:	23.9 °C	23.9 °C
Relative Humidity:	50 %	50 %
ATM Pressure:	101.6Pa	101.6Pa
Test Result:	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou

RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS

EUT operation mode: Transmitting

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

9 kHz - 30 MHz: Transmitting in Low channel of 8DPSK mode (parallel Worst case)

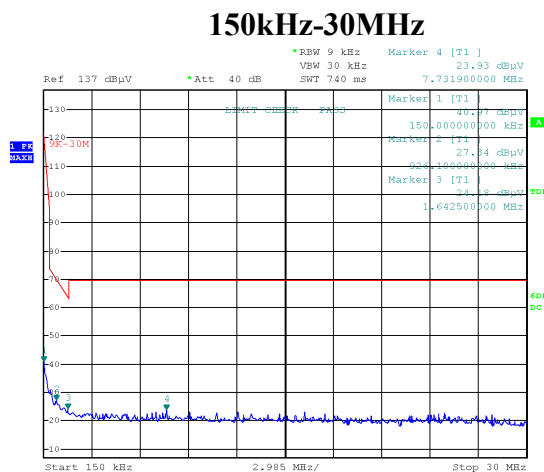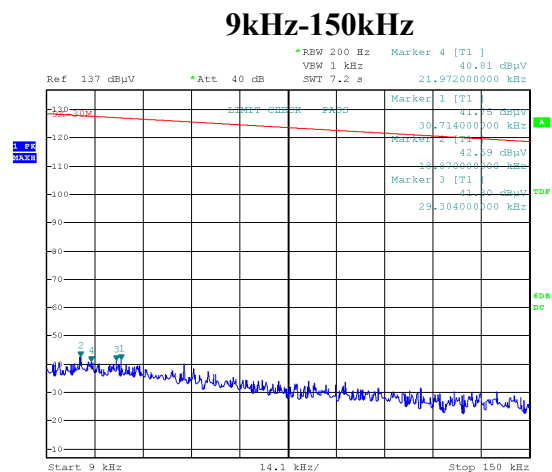

Project No. RKSA241202004
Date: 14.JAN.2025 16:35:09

Tester: Jerry Yan

Project No. RKSA241202004
Date: 14.JAN.2025 16:38:06

Tester: Jerry Yan

9kHz-150kHz


Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.01887	42.59	PK	-0.55	122.09	79.50
0.029304	41.3	PK	-0.61	118.27	76.97
0.021972	40.81	PK	-0.57	120.77	79.96
0.030714	41.75	PK	-0.72	117.86	76.11

150kHz-30MHz

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15000	40.97	PK	-11.34	104.08	63.11
0.92610	27.34	PK	-27.09	68.27	40.93
1.64250	24.18	PK	-29.73	63.29	39.11
7.73190	23.93	PK	-32.47	69.54	45.61

30MHz-1GHz:*EUT operation mode: Transmitting in 8DPSK mode (maximum output power mode)***Low Channel: 2402 MHz****Common Information**


Project No:	RKSA241202004
EUT Model:	G1
Test Mode:	Transmitting in BT mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW: 120 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	16.3°C
Humidity:	35%
Barometric Pressure:	102.4kPa
Test Engineer:	Jerry Yan
Test Date:	2025/1/14

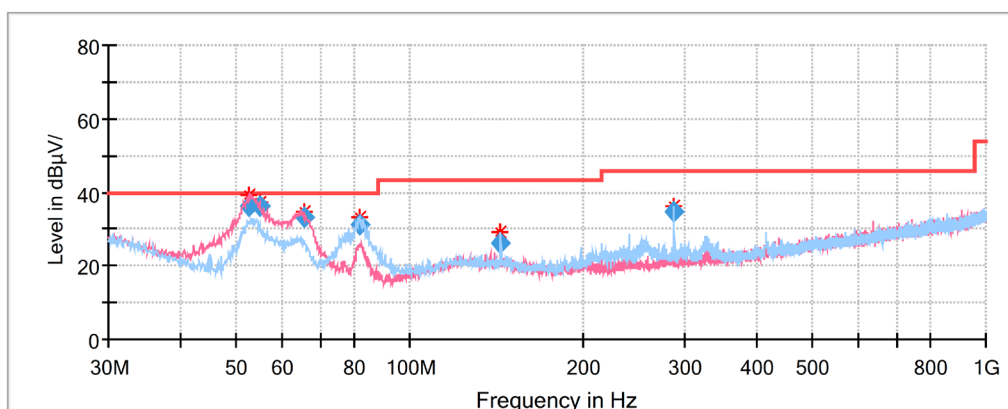**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
52.552500	36.46	40.00	3.54	V	-17.0
54.856250	36.06	40.00	3.94	V	-17.0
65.526000	33.12	40.00	6.88	V	-16.8
81.822000	31.28	40.00	8.72	H	-17.1
144.014000	26.02	43.50	17.48	H	-11.4
287.989100	34.58	46.00	11.42	H	-10.3

1 GHz - 18 GHz:**GFSK:****Low Channel: 2402 MHz****Common Information**


Project No.: RKSA241202004
 Test Mode: BT
 Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

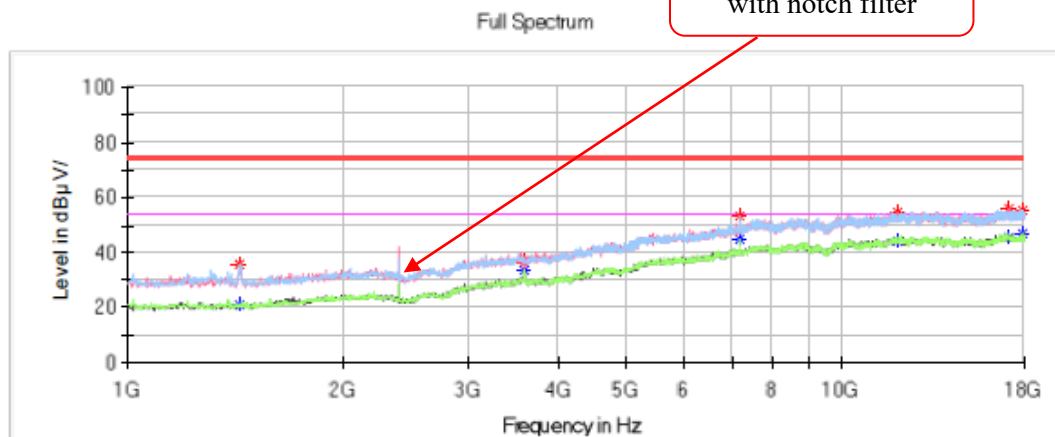**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1435.200000	---	21.16	54.00	32.84	H	-14.8
1435.200000	35.37	---	74.00	38.63	H	-14.8
3597.600000	36.53	---	74.00	37.47	H	-6.3
3597.600000	---	33.85	54.00	20.15	H	-6.3
7205.000000	---	45.05	54.00	8.95	H	3.1
7205.000000	53.44	---	74.00	20.56	H	3.1
11954.800000	---	44.14	54.00	9.86	V	9.0
11954.800000	54.57	---	74.00	19.43	V	9.0
17078.600000	55.72	---	74.00	18.28	V	12.2
17078.600000	---	45.69	54.00	8.31	V	12.2
17853.800000	54.93	---	74.00	19.07	H	11.8
17853.800000	---	46.95	54.00	7.05	H	11.8

Middle Channel: 2441 MHz**Common Information**


Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu

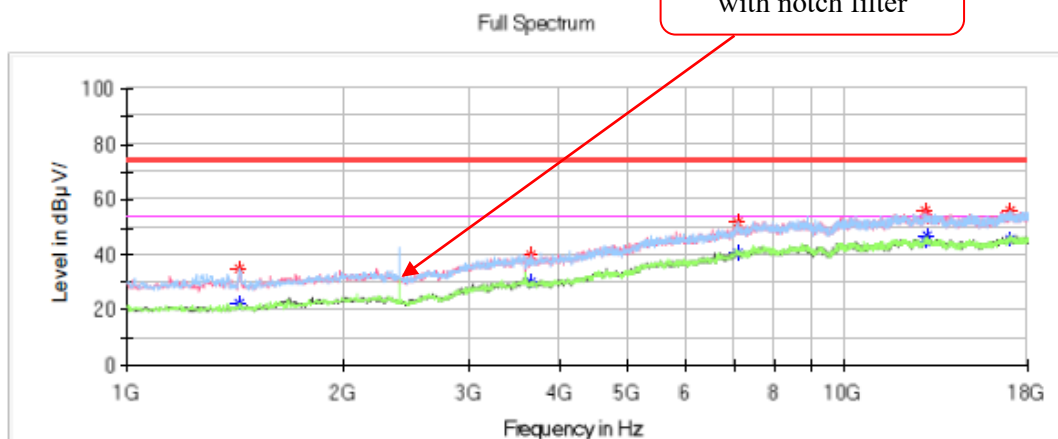**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1435.200000	---	22.06	54.00	31.94	H	-14.8
1435.200000	34.63	---	74.00	39.37	H	-14.8
3658.800000	---	30.19	54.00	23.81	V	-6.2
3658.800000	39.85	---	74.00	34.15	V	-6.2
7079.200000	---	40.74	54.00	13.26	H	2.8
7079.200000	51.54	---	74.00	22.46	H	2.8
12951.000000	55.71	---	74.00	18.29	V	9.7
12951.000000	---	44.59	54.00	9.41	V	9.7
13059.800000	53.31	---	74.00	20.69	V	9.7
13059.800000	---	46.58	54.00	7.42	V	9.7
17048.000000	---	45.27	54.00	8.73	H	12.2
17048.000000	55.66	---	74.00	18.34	H	12.2

High Channel: 2480 MHz**Common Information**

Project No.: RKSA241202004
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

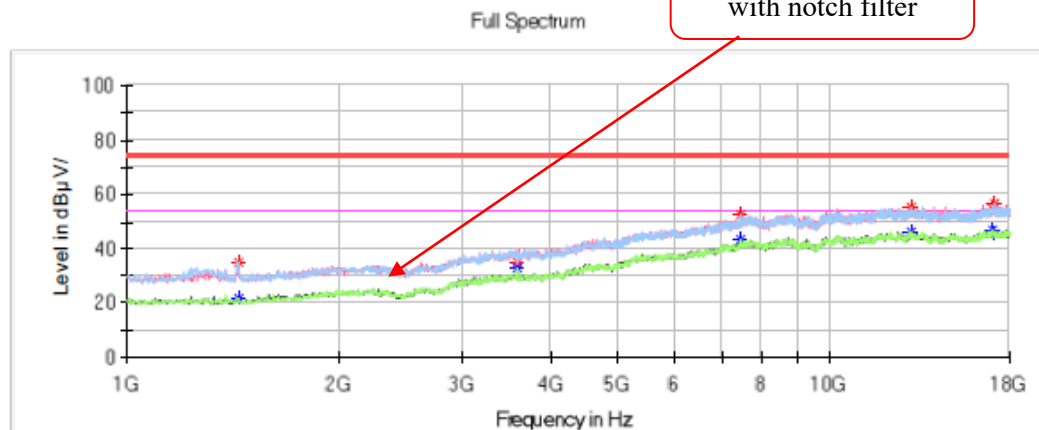**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1438.600000	---	21.38	54.00	32.62	H	-14.8
1438.600000	35.20	---	74.00	38.80	H	-14.8
3597.600000	---	32.80	54.00	21.20	H	-6.3
3597.600000	34.65	---	74.00	39.35	H	-6.3
7439.600000	---	43.20	54.00	10.80	H	3.7
7439.600000	52.77	---	74.00	21.23	H	3.7
13046.200000	55.50	---	74.00	18.50	H	9.7
13046.200000	---	45.93	54.00	8.07	H	9.7
17037.800000	---	46.71	54.00	7.29	V	12.2
17037.800000	54.34	---	74.00	19.66	V	12.2
17122.800000	---	45.21	54.00	8.79	V	12.1
17122.800000	56.49	---	74.00	17.51	V	12.1

$\pi/4$ -DQPSK:

Low Channel: 2402 MHz

Common Information


Project No.: RKSA241202004
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

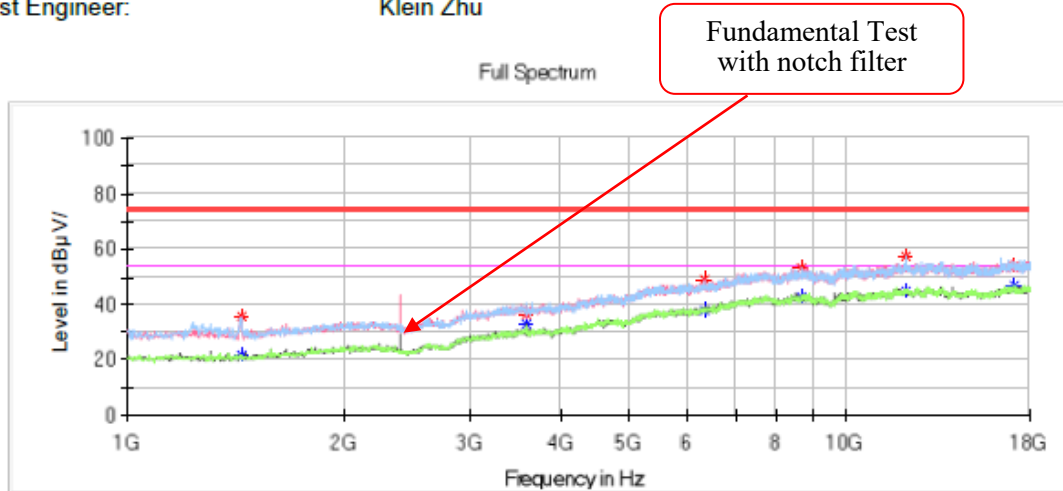**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1438.600000	---	21.88	54.00	32.12	H	-14.8
1438.600000	35.64	---	74.00	38.36	H	-14.8
3597.600000	---	32.58	54.00	21.42	V	-6.3
3597.600000	36.25	---	74.00	37.75	V	-6.3
6341.400000	---	37.65	54.00	16.35	V	0.4
6341.400000	49.23	---	74.00	24.77	V	0.4
8656.800000	---	42.51	54.00	11.49	H	5.4
8656.800000	52.87	---	74.00	21.13	H	5.4
12135.000000	57.34	---	74.00	16.66	H	9.2
12135.000000	---	44.88	54.00	9.12	H	9.2
17082.000000	53.51	---	74.00	20.49	H	12.2
17082.000000	---	46.75	54.00	7.25	H	12.2

Middle Channel: 2441 MHz**Common Information**


Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu

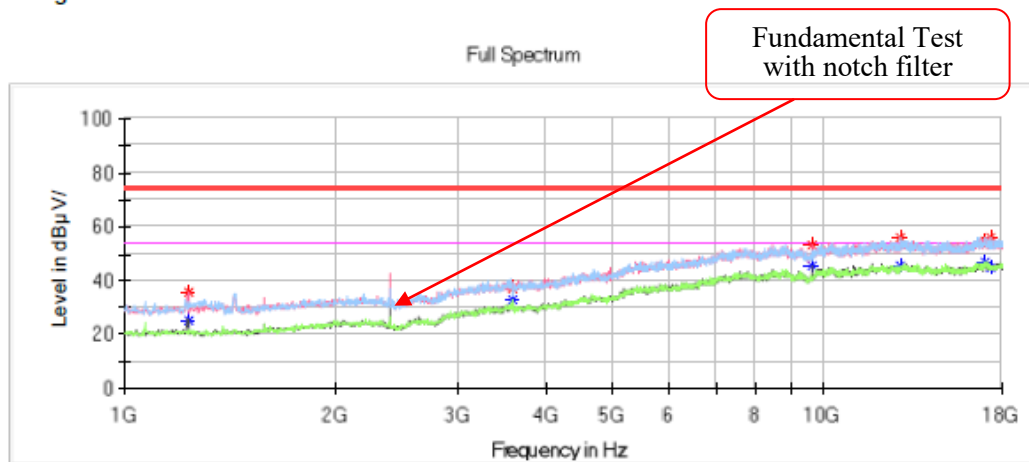**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1231.200000	---	25.24	54.00	28.76	V	-15.1
1231.200000	35.56	---	74.00	38.44	V	-15.1
3597.600000	---	32.75	54.00	21.25	H	-6.3
3597.600000	36.79	---	74.00	37.21	H	-6.3
9602.000000	---	45.11	54.00	8.89	V	5.8
9602.000000	52.92	---	74.00	21.08	V	5.8
12903.400000	---	45.71	54.00	8.29	H	9.7
12903.400000	55.92	---	74.00	18.08	H	9.7
17031.000000	54.48	---	74.00	19.52	H	12.2
17031.000000	---	46.91	54.00	7.09	H	12.2
17347.200000	56.10	---	74.00	17.90	H	11.8
17347.200000	---	44.86	54.00	9.14	H	11.8

High Channel: 2480 MHz**Common Information**


Project No.: RKSA241202004
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

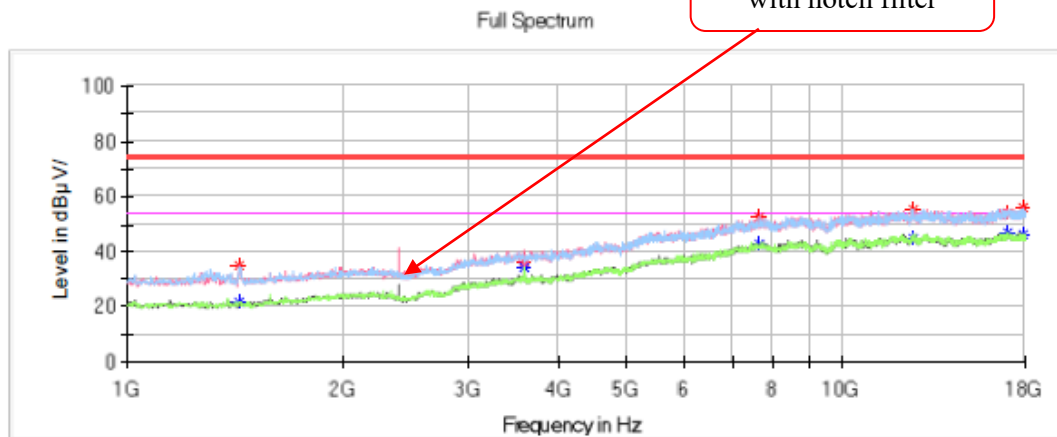**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1435.200000	35.13	---	74.00	38.87	H	-14.8
1435.200000	---	21.85	54.00	32.15	H	-14.8
3597.600000	---	34.06	54.00	19.94	H	-6.3
3597.600000	36.19	---	74.00	37.81	H	-6.3
7647.000000	---	42.72	54.00	11.28	V	3.9
7647.000000	52.28	---	74.00	21.72	V	3.9
12543.000000	---	44.73	54.00	9.27	V	9.7
12543.000000	55.35	---	74.00	18.65	V	9.7
16990.200000	54.02	---	74.00	19.98	H	12.3
16990.200000	---	46.88	54.00	7.12	H	12.3
17847.000000	55.63	---	74.00	18.37	V	11.8
17847.000000	---	46.07	54.00	7.93	V	11.8

8DPSK:**Low Channel: 2402 MHz****Common Information**


Project No.: RKSA241202004
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

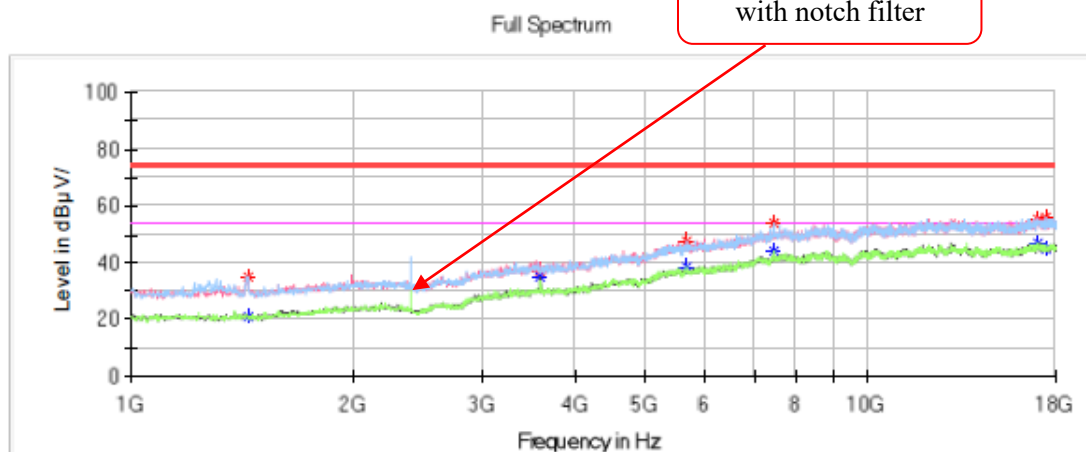**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1438.600000	---	21.25	54.00	32.75	H	-14.8
1438.600000	35.28	---	74.00	38.72	H	-14.8
3597.600000	---	35.03	54.00	18.97	V	-6.3
3597.600000	37.14	---	74.00	36.86	V	-6.3
5664.800000	---	38.26	54.00	15.74	H	-0.2
5664.800000	47.31	---	74.00	26.69	H	-0.2
7439.600000	---	43.74	54.00	10.26	H	3.7
7439.600000	53.50	---	74.00	20.50	H	3.7
17037.800000	55.21	---	74.00	18.79	H	12.2
17037.800000	---	46.81	54.00	7.19	H	12.2
17493.400000	56.14	---	74.00	17.86	H	11.5
17493.400000	---	44.76	54.00	9.24	H	11.5

Middle Channel: 2441 MHz**Common Information**


Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu

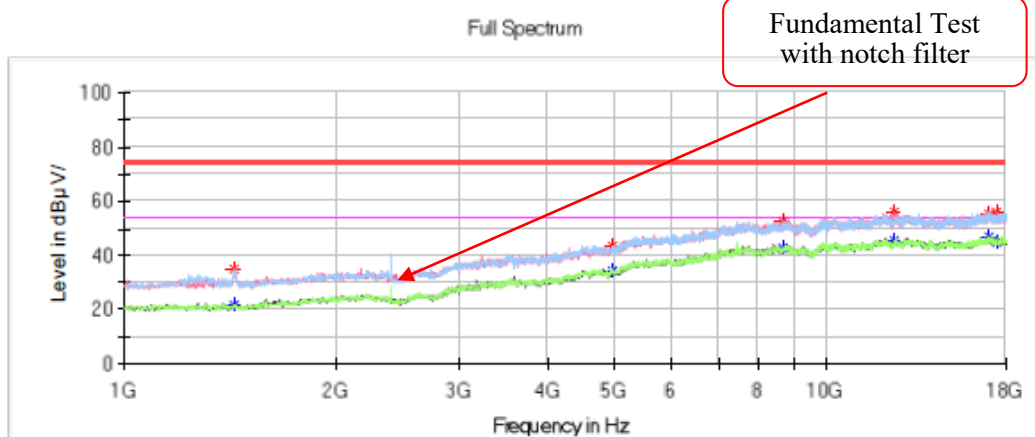**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1435.200000	---	21.89	54.00	32.11	H	-14.8
1435.200000	35.28	---	74.00	38.72	H	-14.8
4954.200000	---	34.58	54.00	19.42	H	-2.6
4954.200000	43.55	---	74.00	30.45	H	-2.6
8684.000000	---	42.84	54.00	11.16	H	5.4
8684.000000	52.71	---	74.00	21.29	H	5.4
12502.200000	---	45.32	54.00	8.68	V	9.7
12502.200000	56.11	---	74.00	17.89	V	9.7
17031.000000	---	47.02	54.00	6.98	H	12.2
17031.000000	55.02	---	74.00	18.98	H	12.2
17425.400000	---	44.99	54.00	9.01	H	11.6
17425.400000	56.17	---	74.00	17.83	H	11.6

High Channel: 2480 MHz**Common Information**

Project No.: RKSA241202004
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

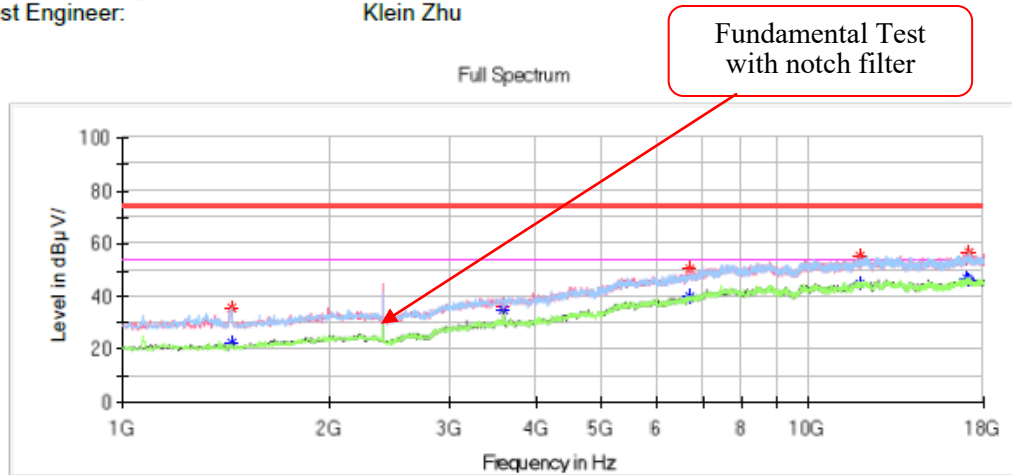**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	PoI	Corr. (dB/m)
1438.600000	---	22.30	54.00	31.70	H	-14.8
1438.600000	35.39	---	74.00	38.61	H	-14.8
3597.600000	---	34.81	54.00	19.19	V	-6.3
3597.600000	36.07	---	74.00	37.93	V	-6.3
6722.200000	---	39.95	54.00	14.05	H	1.5
6722.200000	50.32	---	74.00	23.68	H	1.5
11846.000000	---	44.73	54.00	9.27	V	8.9
11846.000000	55.01	---	74.00	18.99	V	8.9
17020.800000	54.19	---	74.00	19.81	H	12.2
17020.800000	---	46.85	54.00	7.15	H	12.2
17082.000000	56.55	---	74.00	17.45	H	12.2
17082.000000	---	45.84	54.00	8.16	H	12.2


Band Edge:
GFSK:

Left Side

Common Information

Project No.:	RKSA241202004
Test Mode:	BT
Standard:	FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer:	Klein Zhu

Full Spectrum

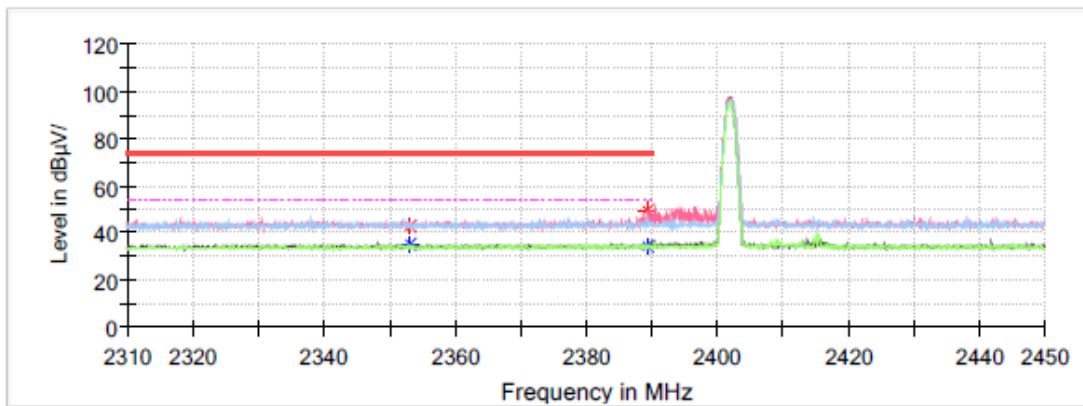


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2353.064000	42.91	---	74.00	31.09	V	-0.7
2353.064000	---	35.32	54.00	18.68	V	-0.7
2389.464000	49.49	---	74.00	24.51	V	-0.6
2389.464000	---	34.52	54.00	19.48	V	-0.6

Right Side**Common Information**

Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu

Full Spectrum

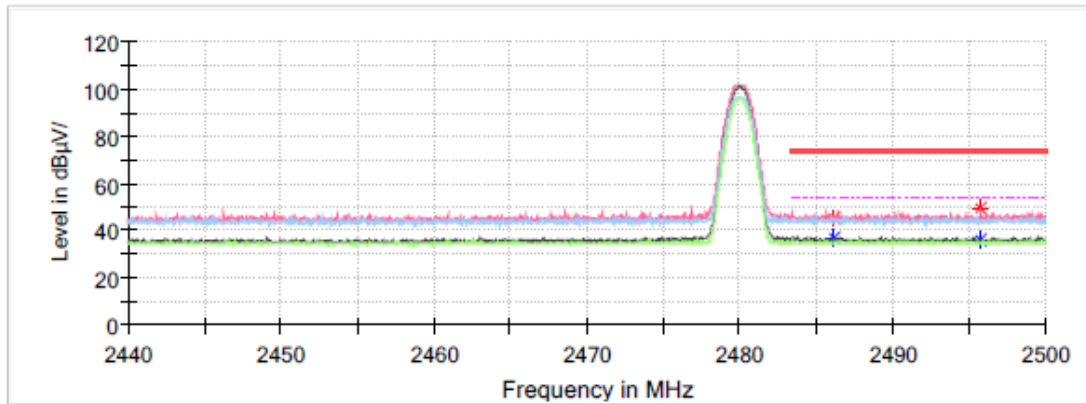**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2486.128000	---	37.16	54.00	16.84	V	-0.2
2486.128000	45.04	---	74.00	28.96	V	-0.2
2495.752000	---	35.94	54.00	18.06	V	-0.2
2495.752000	49.71	---	74.00	24.29	V	-0.2


$\pi/4$ -DQPSK:

Left Side

Common Information

Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu


Full Spectrum

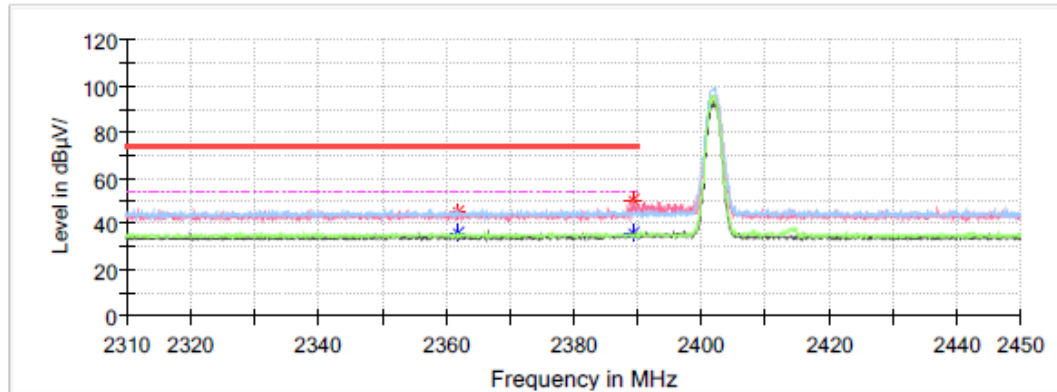**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2361.968000	45.26	---	74.00	28.74	H	-0.7
2361.968000	---	36.15	54.00	17.85	H	-0.7
2389.296000	50.07	---	74.00	23.93	V	-0.6
2389.296000	---	36.04	54.00	17.96	V	-0.6

Right Side**Common Information**

Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu

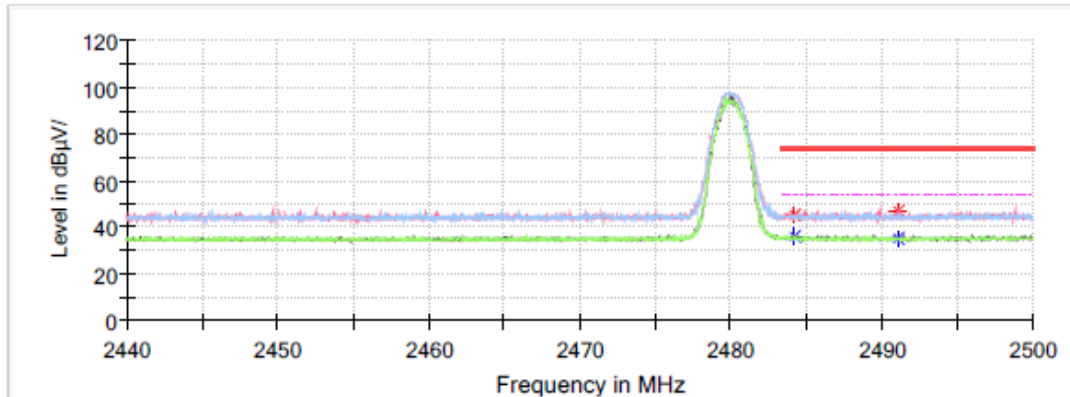Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2484.208000	---	36.44	54.00	17.56	V	-0.3
2484.208000	45.68	---	74.00	28.32	V	-0.3
2491.120000	---	35.13	54.00	18.87	V	-0.2
2491.120000	47.02	---	74.00	26.98	V	-0.2


8DPSK:

Left Side

Common Information

Project No.:	RKSA241202004
Test Mode:	BT
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer:	Klein Zhu

Full Spectrum

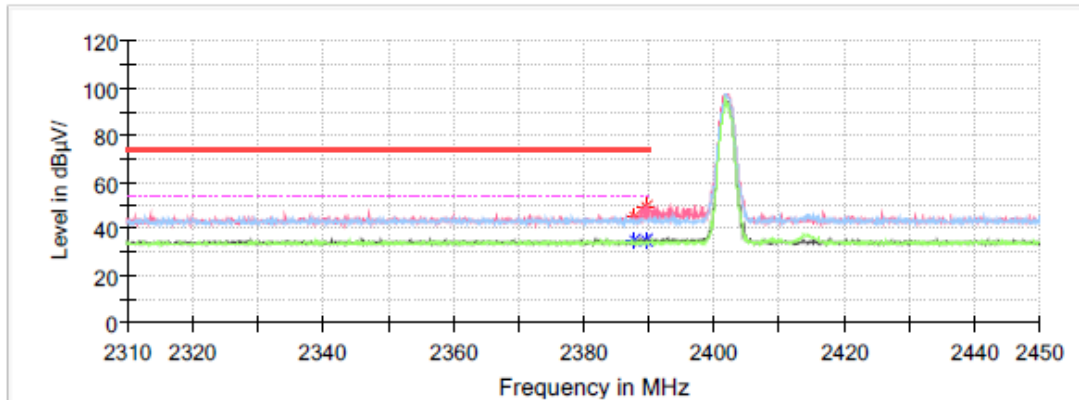
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2387.784000	---	35.61	54.00	18.39	V	-0.6
2387.784000	44.96	---	74.00	29.04	V	-0.6
2389.688000	---	34.88	54.00	19.12	V	-0.6
2389.688000	49.82	---	74.00	24.18	V	-0.6

Right Side**Common Information**


Project No.: RKSA241202004
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu

Full Spectrum

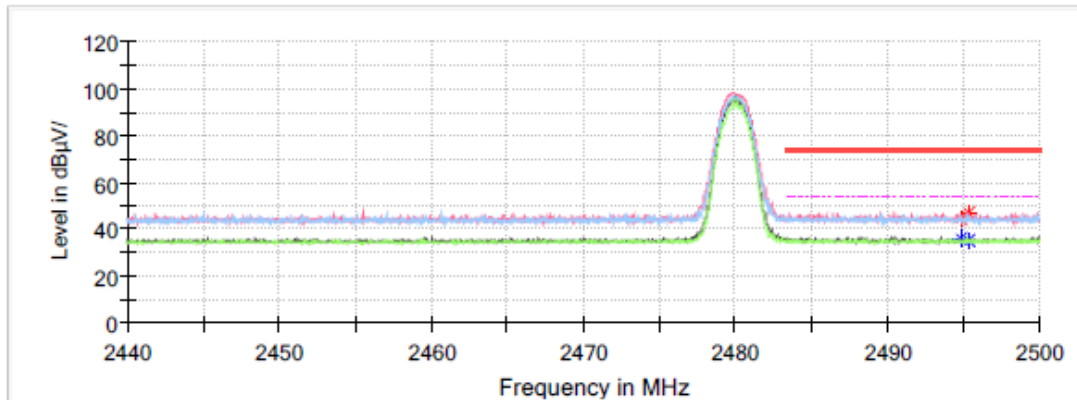**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2494.792000	44.49	---	74.00	29.51	V	-0.2
2494.792000	---	36.35	54.00	17.65	V	-0.2
2495.344000	---	35.61	54.00	18.39	V	-0.2
2495.344000	47.35	---	74.00	26.65	V	-0.2

18GHz-25GHz: EUT operation mode: Transmitting in Low channel of 8DPSK mode (Worst case)

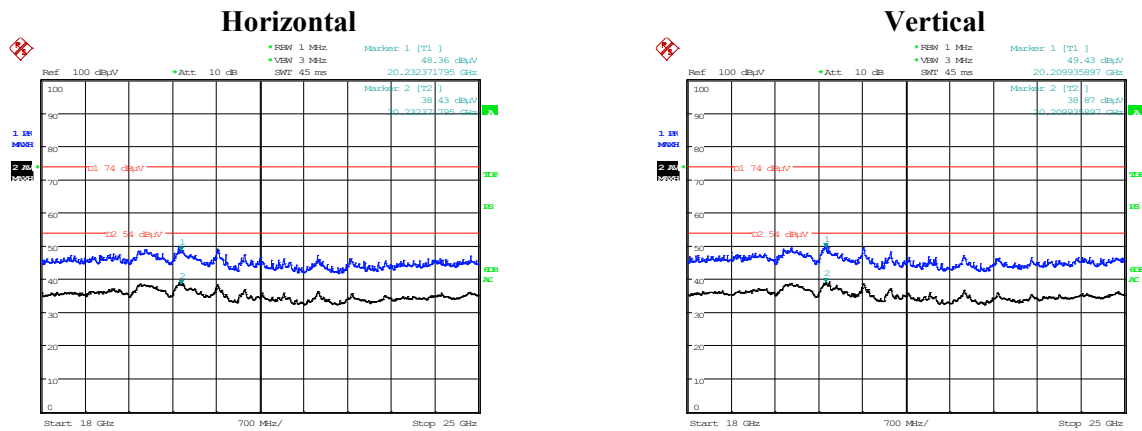

Project No :RKSA241202004
Date: 27.FEB.2025 11:44:12

Tester :Hugh Wu

Project No :RKSA241202004
Date: 27.FEB.2025 12:11:00

Tester :Hugh Wu


Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).

Frequency (GHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
20.21	---	38.87	54	15.13	V	12.47
20.21	49.43	---	74	24.57	V	12.47
20.23	---	38.43	54	15.57	H	12.49
20.23	48.36	---	74	25.64	H	12.49


CHANNEL SEPARATION TEST*EUT operation mode: Transmitting*

Mode	Channel	Channel frequency (MHz)	Result (MHz)	Limit (MHz)
GFSK	Low	2402-2403	0.995	0.918
	Middle	2441-2442	1.014	0.918
	High	2480-2479	1.000	0.918


Note: only GFSK mode result is report since EDR ($\pi/4$ -DQPSK, 8DPSK) has the exact same channel plan and the Limit is maximum 20 dB bandwidth*2/3 Limit = 20 dB bandwidth*2/3.

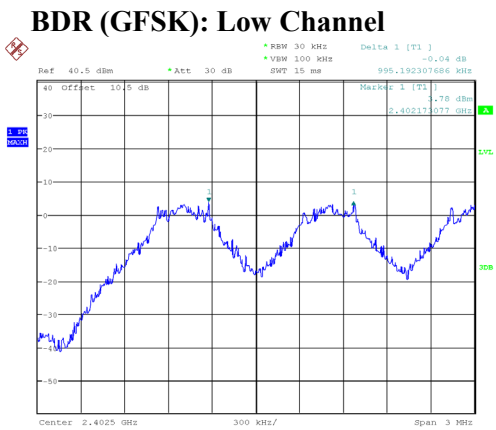

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:38:26

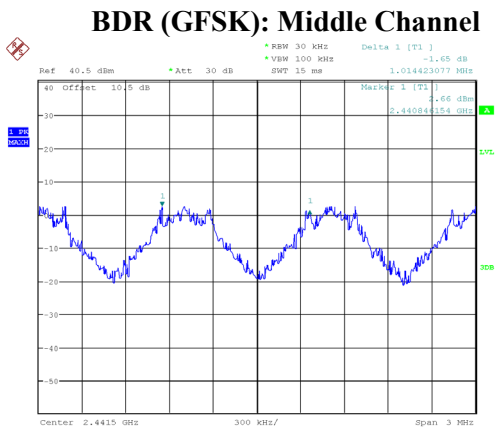


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:45:05

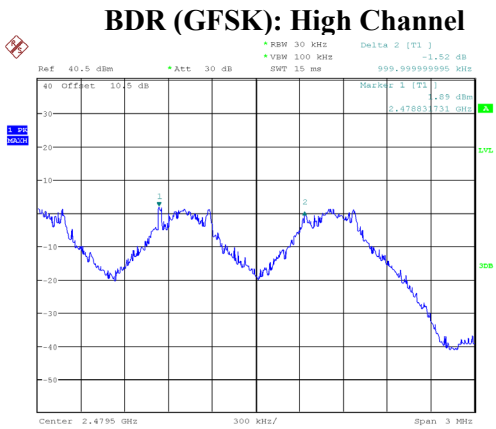


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:52:16

20 dB BANDWIDTH TEST*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.029
	Middle	2441	1.029
	High	2480	1.026
EDR ($\pi/4$-DQPSK)	Low	2402	1.377
	Middle	2441	1.377
	High	2480	1.374
EDR (8DPSK)	Low	2402	1.356
	Middle	2441	1.356
	High	2480	1.359

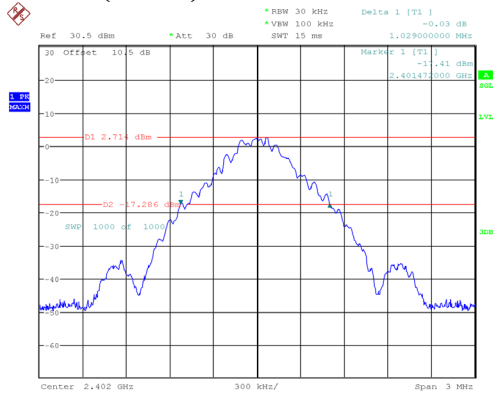BDR (GFSK): Low Channel


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 14:49:04

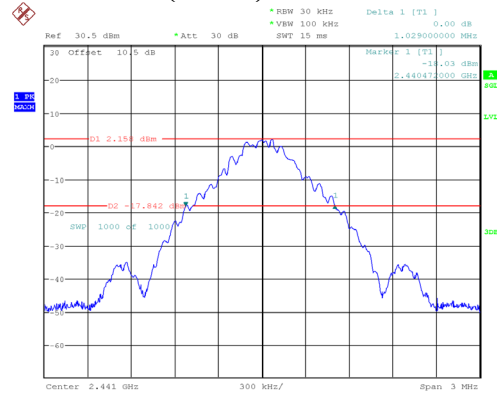BDR (GFSK): Middle Channel


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 14:52:23

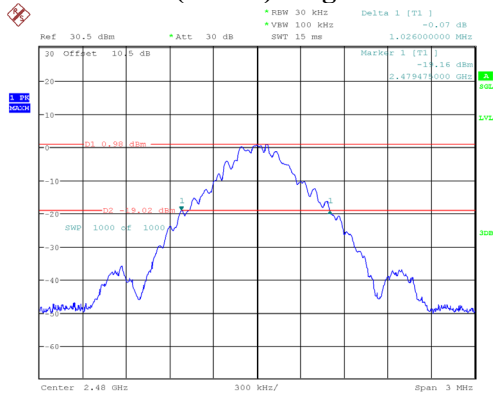BDR (GFSK): High Channel


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 14:56:46

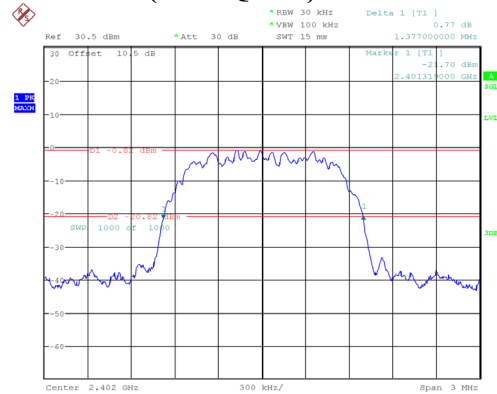EDR ($\pi/4$ -DQPSK): Low Channel

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:00:34

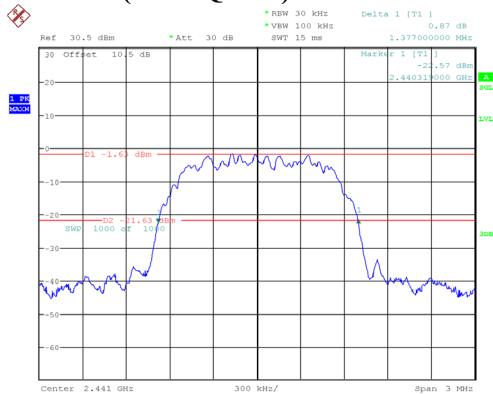
EDR($\pi/4$ -DQPSK): Middle Channel

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:06:47

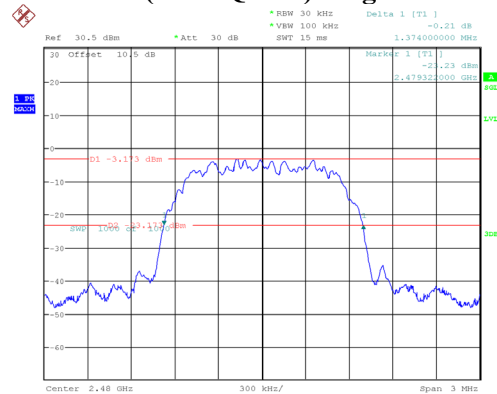EDR ($\pi/4$ -DQPSK): High Channel


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:11:57

EDR (8DPSK): Low Channel

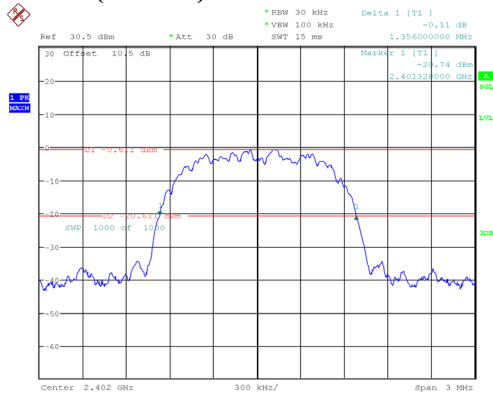


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:15:29

EDR (8DPSK): Middle Channel

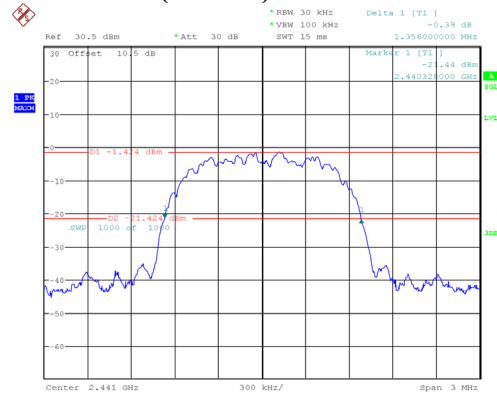

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:19:37


EDR (8DPSK): High Channel

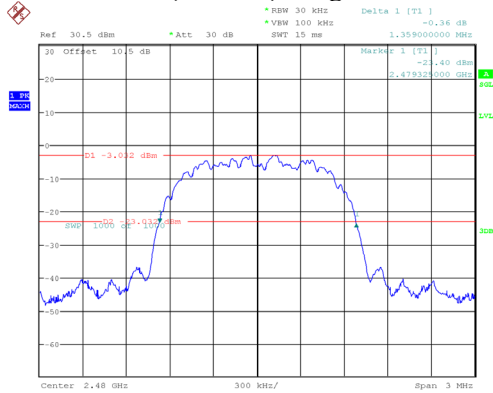


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:40:53

QUANTITY OF HOPPING CHANNEL TEST*EUT operation mode: Hopping*


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15

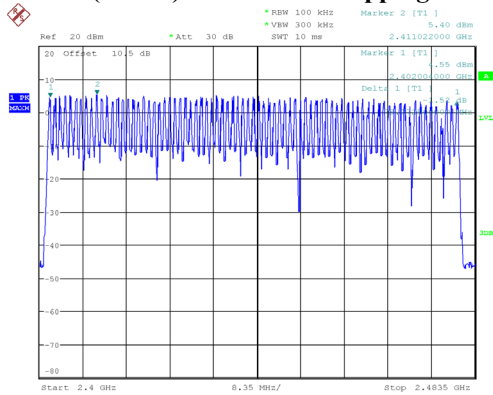BDR (GFSK): Number of Hopping Channels

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:20:23

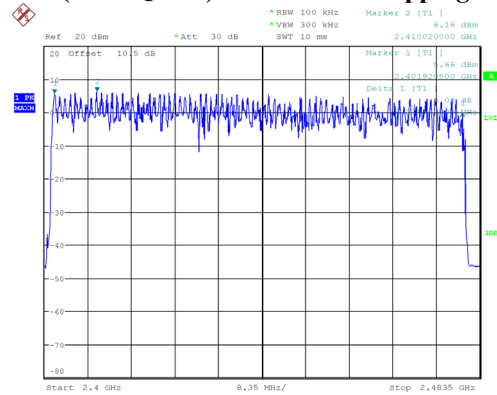EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:29:03

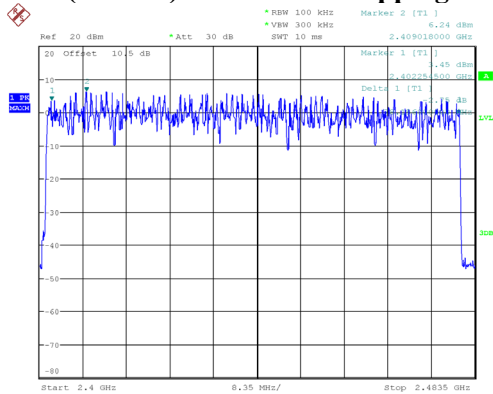EDR (8DPSK): Number of Hopping Channels

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:33:03

TIME OF OCCUPANCY (DWELL TIME)*EUT operation mode: Hopping*

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Middle	0.388	0.124	0.4	Pass
	DH3	Middle	1.650	0.264	0.4	Pass
	DH5	Middle	2.920	0.311	0.4	Pass
EDR ($\pi/4$ -DQPSK)	2DH1	Middle	0.398	0.127	0.4	Pass
	2DH3	Middle	1.656	0.265	0.4	Pass
	2DH5	Middle	2.930	0.313	0.4	Pass
EDR (8DPSK)	3DH1	Middle	0.398	0.127	0.4	Pass
	3DH3	Middle	1.656	0.265	0.4	Pass
	3DH5	Middle	2.930	0.313	0.4	Pass

Note:

DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

DH3: Dwell time = Pulse time*(1600/4/79)*31.6S

DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

2DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

2DH3: Dwell time = Pulse time*(1600/4/79)*31.6S


2DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

3 DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

3DH3: Dwell time = Pulse time*(1600/4/79)*31.6S


3DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

BDR (GFSK): Pulse time, Middle Channel, DH1

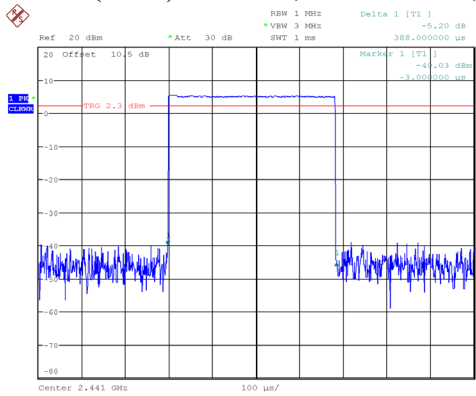


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:24:54

BDR (GFSK): Pulse time, Middle Channel, DH3

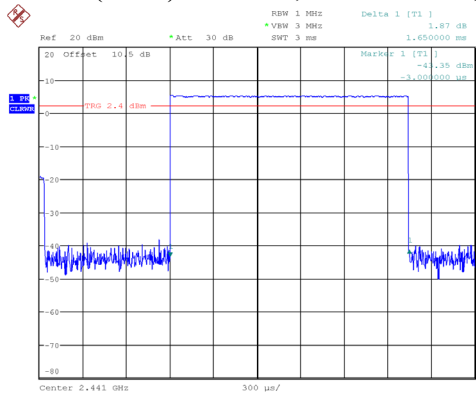


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:26:08

BDR (GFSK): Pulse time, Middle Channel, DH5

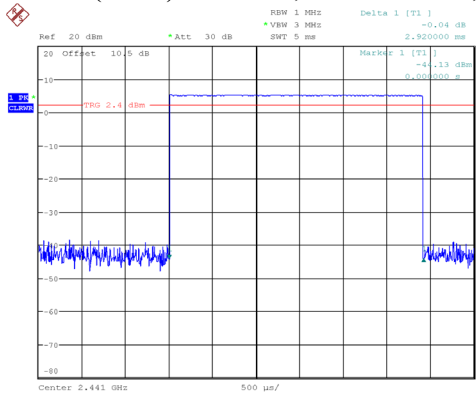


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:27:31

EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH1

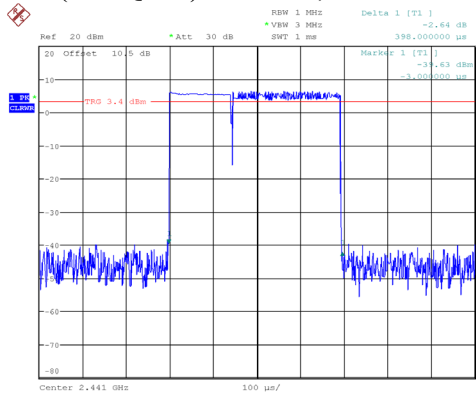


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:29:59

EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH3

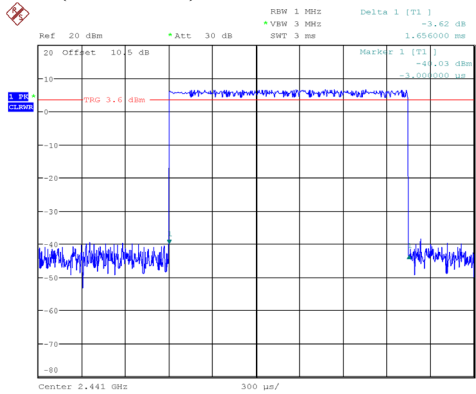


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:30:55

EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH5

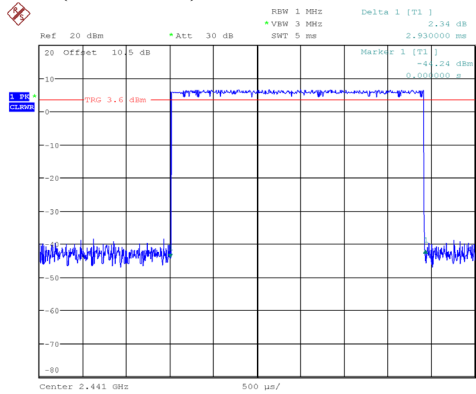

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:31:51

EDR (8DPSK): Pulse time, Middle Channel, 3DH3

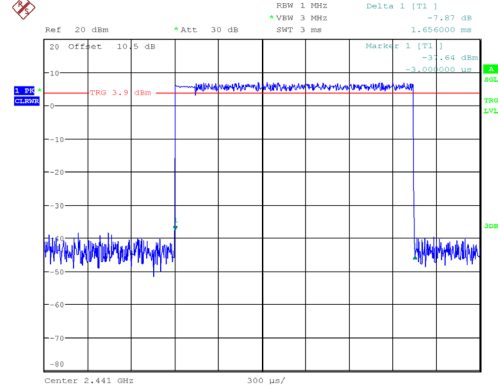


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:34:38

PEAK OUTPUT POWER MEASUREMENT*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)
GFSK	Low	2402	5.87	21
	Middle	2441	5.31	
	High	2480	4.07	
$\pi/4$ DQPSK	Low	2402	7.92	
	Middle	2441	7.15	
	High	2480	5.58	
8DPSK	Low	2402	8.41	
	Middle	2441	7.69	
	High	2480	6.12	

BDR (GFSK): 2402MHz

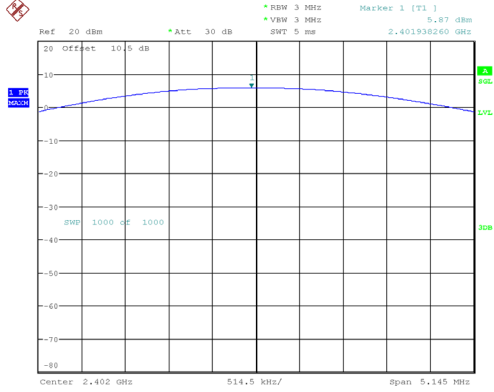


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 14:51:15

BDR (GFSK): 2441MHz

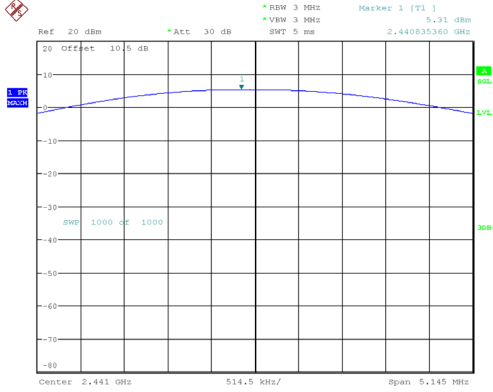


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 14:55:00

BDR (GFSK): 2480MHz

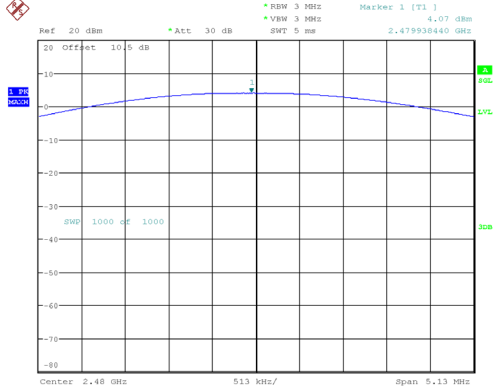


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 14:59:14

EDR($\pi/4$ -DQPSK): 2402MHz

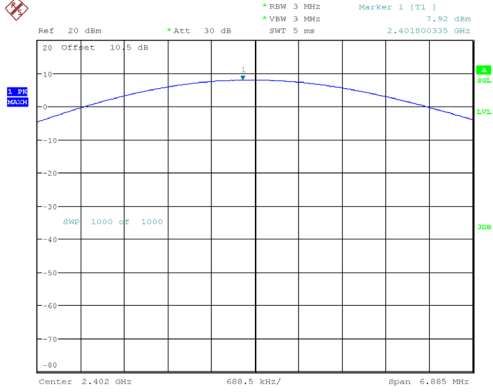


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:03:05

EDR($\pi/4$ -DQPSK): 2441MHz

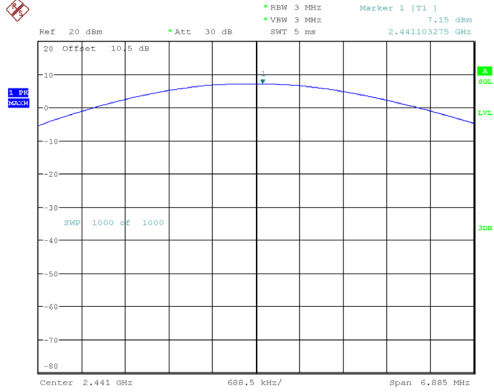


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:10:50

EDR($\pi/4$ -DQPSK): 2480MHz

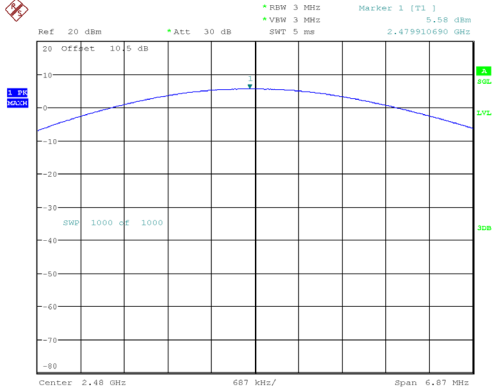


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:14:06

EDR(8DPSK): 2402MHz

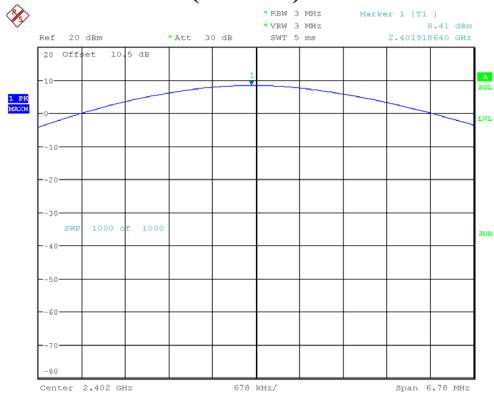


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:17:41

EDR(8DPSK):2441MHz

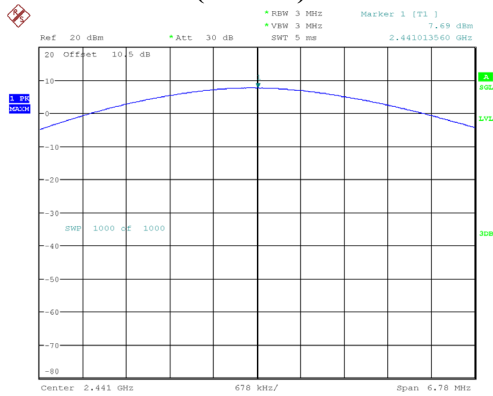

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 15:23:22

EDR(8DPSK): 2480MHz

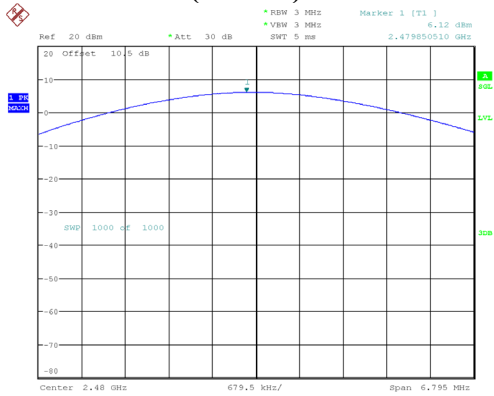


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:13:53

BAND EDGES*EUT operation mode: Transmitting & Hopping**Test Result: Compliant.*

Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
BDR(GFSK)	Low	2402	-47.59	20
	High	2480	-46.10	
EDR($\pi/4$ DQPSK)	Low	2402	-47.34	
	High	2480	-44.99	
EDR (8DPSK)	Low	2402	-46.85	
	High	2480	-45.05	
BDR(GFSK)(Hopping)	Low	2402	-49.16	
	High	2480	-46.95	
EDR($\pi/4$ DQPSK) (Hopping)	Low	2402	-49.12	
	High	2480	-47.69	
EDR(8DPSK)(Hopping)	Low	2402	-50.19	
	High	2480	-47.56	


Band Edge

BDR (GFSK): Left Side

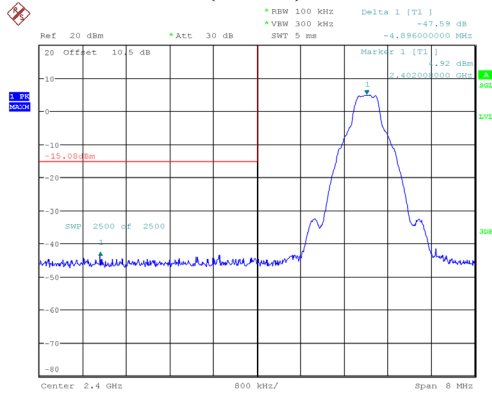


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:55:57


BDR (GFSK): Right Side

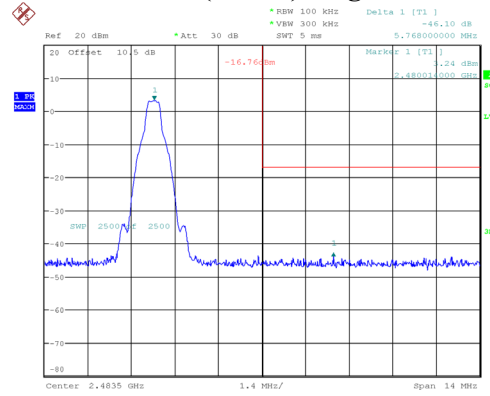

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:59:01

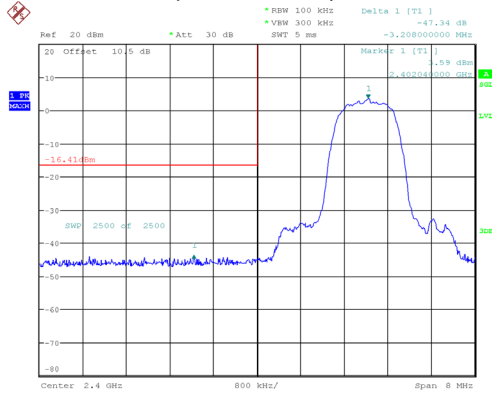
EDR ($\pi/4$ -DQPSK): Left Side

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:01:05

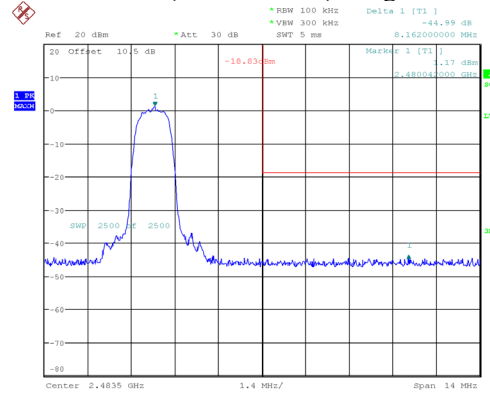EDR ($\pi/4$ -DQPSK): Right Side


ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:18:54

EDR (8DPSK): Left Side

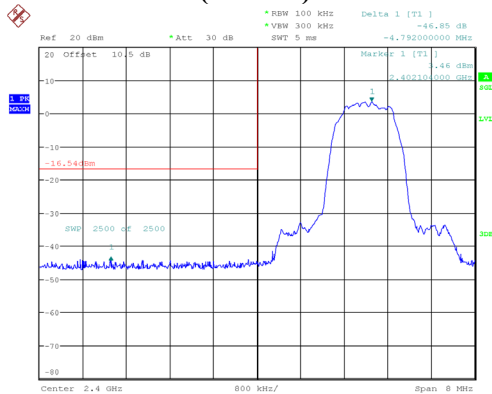

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:21:19

EDR (8DPSK): Right Side

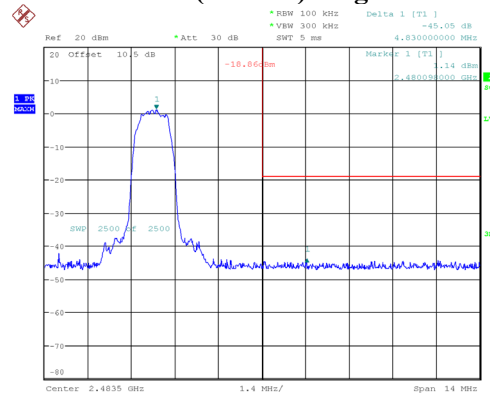

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 17:25:03

ProjectNo.:RKSA241202004 Tester:Neil Zhou
Date: 13.JAN.2025 16:52:16

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - E UT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******