



FCC TEST REPORT

**Test report
On Behalf of
SHENZHEN TRANSCAN TECHNOLOGY LIMITED
For
CPE
Model No.: TR251**

FCC ID: 2A5RQ-TR251

Prepared for : SHENZHEN TRANSCAN TECHNOLOGY LIMITED
Room 03,23F,Unit B Building,No 9,Shenzhen Bay Eco-Technology Park,Yuehai
Street, Nanshan District City Shenzhen

Prepared By : Shenzhen Tongzhou Testing Co.,Ltd
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang Street,
Longhua, Shenzhen, China

Date of Test: 03 July 2023~ 07 August 2023

Date of Report: 07 August 2023

Report Number: TZ230804740-E3

The test report apply only to the specific sample(s) tested under stated test conditions
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**TEST RESULT CERTIFICATION**

Applicant's name : **SHENZHEN TRANSCAN TECHNOLOGY LIMITED**
Address..... : Room 03,23F,Unit B Building,No 9,Shenzhen Bay Eco-Technology
Park,Yuehai Street, Nanshan District City Shenzhen
Manufacture's Name : **SHENZHEN TRANSCAN TECHNOLOGY LIMITED**
Address..... : Room 03,23F,Unit B Building,No 9,Shenzhen Bay Eco-Technology
Park,Yuehai Street, Nanshan District City Shenzhen

Product description

Trade Mark..... : VIMOQ
Product name..... : CPE
Model and/or type reference . : TR251

Standards : FCC CFR Title 47 Part 2, 22H, 27
ANSI C63.26:2015

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Shenzhen Tongzhou Testing Co.,Ltd Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Shenzhen Tongzhou Testing Co.,Ltd Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of performance of tests : **03 July 2023~ 07 August 2023**

Date of Issue : **07 August 2023**

Test Result : **Pass**

Testing Engineer : _____

Anna Hu

(Anna Hu)

Technical Manager : _____

Hugo Chen

(Hugo Chen)

Authorized Signatory : _____

Andy Zhang

(Andy Zhang)



Revision History

Revision	Issue Date	Revisions	Revised By
000	07 August 2023	Initial Issue	Andy Zhang



Contents

1 TEST STANDARDS	5
2 SUMMARY	6
2.1 Product Description	6
2.2 Host System Configuration List and Details.....	8
2.3 Short description of the Equipment under Test (EUT)	8
2.5 Normal Accessory setting.....	8
2.6 EUT configuration.....	8
2.7 Related Submittal(s) / Grant (s).....	8
2.8 Modifications	8
3 TEST ENVIRONMENT	9
3.1 Test Facility	9
3.2 Environmental conditions	9
3.3 Test Description.....	9
3.4 Equipments Used during the Test.....	12
3.5 Measurement uncertainty.....	13
4 TEST CONDITIONS AND RESULTS.....	14
4.1 Conducted Output Power / E.I.R.P / E.R.P / Peak-to-Average Ratio (PAR)	14
4.2 Occupied Bandwidth and Emission Bandwidth	16
4.3 Band Edge compliance	17
4.4 Spurious Emssion on Antenna Port	18
4.5 Radiated Spurious Emssion	19
4.6 Frequency Stability under Temperature & Voltage Variations	24
5 Test Set up Photos of the EUT	26
6 External Photos of the EUT.....	26
7 Internal Photos of the EUT	26



1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS](#)

[FCC Part 22 Subpart H: PRIVATE LAND MOBILE RADIO SERVICES.](#)

[FCC Part 27: Miscellaneous Wireless Communications Services.](#)

[ANSI/TIA-603-E-2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.](#)

[ANSI C63.26-2015: IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services](#)

[FCC KDB 971168D01 Power Meas License Digital Systems](#)



2 SUMMARY

2.1 Product Description

EUT	: CPE
Model Number	: TR251
Model Declaration	: N/A
Test Model	: TR251
Power Supply	: DC 12V by Adapter
Hardware version	: V1.1
Software version	: N/A
Sample ID	: TZ230804740-1# TZ230804740-2#
WiFi	
WLAN	: Supported IEEE 802.11a/b/g/n/ac/ax IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz / 5745-5825MHz IEEE 802.11n HT40: 2422-2452MHz / 5190-5230MHz / 5755-5795MHz
WLAN FCC Operation Frequency	: IEEE 802.11a: 5180-5240MHz / 5745-5825MHz IEEE 802.11ac VHT20: 5180-5240MHz / 5745-5825MHz IEEE 802.11ac VHT40: 5190-5230MHz / 5755-5795MHz IEEE 802.11ac VHT80: 5210MHz / 5775MHz IEEE 802.11ax VHT20: 5180-5240MHz / 5745-5825MHz IEEE 802.11ax VHT40: 5190-5230MHz / 5755-5795MHz IEEE 802.11ax VHT80: 5210MHz / 5775MHz 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20) 7 Channels for 2422-2462MHz(IEEE 802.11n HT40) 4 Channels for 5180-5240MHz (IEEE 802.11a/ac/ax VHT20/n HT20)
WLAN Channel Number	: 2 Channels for 5190-5230MHz (IEEE 802.11ac/ax VHT40/n HT40) 1 Channels for 5210MHz (IEEE 802.11ac/ax VHT80) 5 Channels for 5745-5825MHz(IEEE 802.11a/ac/ax VHT20/n HT20) 2 Channels for 5755-5795MHz(IEEE 802.11ac/ax VHT40/n HT40) 1 Channels for 5775MHz(IEEE 802.11ac/ax VHT80)
WLAN Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM (256QAM, 64QAM, 16QAM, 1024QAM, QPSK, BPSK)
Antenna Type And Gain	: 2.4GWIFI: 5.87dBi 5G WIFI: 5.96dBi
E-UTRA	
E-UTRA FCC Operation Frequency	: FDD Band 4 (UL: 1710 – 1755 MHz/DL: 2110 – 2155 MHz) FDD Band 5 (UL: 824 – 849 MHz/DL: 869 – 894 MHz) FDD Band 7 (UL: 2500 - 2570 MHz/DL: 2620 - 2690 MHz) FDD Band 66 (UL: 1710 – 1780 MHz/DL: 2110 – 2180 MHz)



Channel Separation : 0.1 MHz
Modulation Technology : OFDM (16QAM, QPSK)
Antenna Type And Gain : Internal Antenna
: FDD Band 4: 4.21dBi,
: FDD Band 5: 3.57dBi,
: FDD Band 7: 4.85dBi,
: FDD Band 66: 4.53dBi

NR

E-UTRA FCC Operation Frequency : Band n78 (UL: 3450 - 3550 MHz/DL: 3450 - 3550 MHz)
: Band n78 (UL: 3700 - 3800 MHz/DL: 3700 - 3800 MHz)
Channel Separation : 0.1 MHz
Modulation Technology : DFT-s-OFDM (Pi/2-BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
: CP-OFDM (QPSK, 16-QAM, 64-QAM, 256-QAM)
Network Mode : SA
: NSA
Antenna Type And Gain : Internal Antenna
: Band n78: 4.67dBi

Note 1: Antenna position refer to EUT Photos.

Note 2: the above information was supplied by the applicant.



2.2 Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate

2.3 Short description of the Equipment under Test (EUT)

2.3.1 General Description

EUT is subscriber equipment in the LTE/WCDMA/GSM system. Support bands as list in section 2.1 of this report.


2.5 Normal Accessory setting

Fully charged battery was used during the test.

2.6 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- - supplied by the lab

●	Adapter	Model:	KA2401A-1202000US
		Input:	100-240V-50/60Hz 0.65A Max
		Output:	12V  2000A

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: #FCCID** filing to comply with FCC Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.



3 TEST ENVIRONMENT

3.1 Test Facility

FCC

Designation Number: CN1275

Test Firm Registration Number: 167722

Shenzhen Tongzhou Testing Co.,Ltd has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements

A2LA

Certificate Number: 5463.01

Shenzhen Tongzhou Testing Co.,Ltd has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

IC

ISED#: 22033

CAB identifier: CN0099

Shenzhen Tongzhou Testing Co.,Ltd has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010

3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description



FDD Band 5[Part 22]

Test Item	FCC Rule No.	Requirements	Judgement	Sample ID
Effective (Isotropic) Radiated Power	2.1046, 22.913(a)	ERP ≤ 7W(38.5dBm)	Pass	TZ230804740-1#
Occupied Bandwidth	2.1049	OBW: No limit.	Pass	TZ230804740-1#
Emission Bandwidth	22.917(b)	EBW: No limit.	Pass	TZ230804740-1#
Band Edges Compliance	2.1051, 22.917(a)(b)	-13dBm	Pass	TZ230804740-1#
Spurious Emission at Antenna Terminals	2.1051, 22.917	-13dBm	Pass	TZ230804740-1#
Field Strength of Spurious Radiation	2.1053, 22.917	-13dBm	Pass	TZ230804740-2#
Frequency Stability	2.1055, 22.355	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass	TZ230804740-1#
Peak to average ratio	2.1046, 22.913(a)	<13dB	Pass	TZ230804740-1#

FDD Band 4/66[Part 27]

Test Item	FCC Rule No.	Requirements	Judgement	Sample ID
Effective (Isotropic) Radiated Power	2.1046, 27.50(d)	ERP ≤ 1W(30dBm)	Pass	TZ230804740-1#
Occupied Bandwidth	2.1049	OBW: No limit.	Pass	TZ230804740-1#
Emission Bandwidth	2.1049	EBW: No limit.	Pass	TZ230804740-1#
Band Edges Compliance	2.1051, 27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass	TZ230804740-1#
Spurious Emission at Antenna Terminals	2.1051, 27.53(h)	-13dBm	Pass	TZ230804740-1#
Field Strength of Spurious Radiation	2.1053, 27.53(h)	-13dBm	Pass	TZ230804740-2#
Frequency Stability	2.1055, 27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass	TZ230804740-1#
Peak to average ratio	2.1046, 27.50(d)	<13dB	Pass	TZ230804740-1#

**FDD Band 7[Part 27]**

Test Item	FCC Rule No.	Requirements	Judgement	Sample ID
Effective (Isotropic) Radiated Power	2.1046, 27.50(h)(2)	EIRP \leq 2W(33dBm)	Pass	TZ230804740-1#
Occupied Bandwidth	2.1049	OBW: No limit.	Pass	TZ230804740-1#
Emission Bandwidth	2.1049	EBW: No limit.	Pass	TZ230804740-1#
Band Edges(Out of Band Emission) Compliance	2.1051, 27.53(m)	KDB 971 168 D02 971168 D02 Misc OOB License Digital Systems v01 &27.53(m) for detail the limit is upon different OBW	Pass	TZ230804740-1#
Spurious Emission at Antenna Terminals	2.1051, 27.53(g)	-25dBm	Pass	TZ230804740-1#
Field Strength of Spurious Radiation	2.1053, 27.53(g)	-25dBm	Pass	TZ230804740-2#
Frequency Stability	2.1055, 27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass	TZ230804740-1#
Peak to average ratio	2.1046, 27.50(d)	<13dB	Pass	TZ230804740-1#

Remark: The measurement uncertainty is not included in the test result.



3.4 Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	MXA Signal Analyzer	Keysight	N9020A	MY52091623	2022/12/28	2023/12/27
2	Power Sensor	Agilent	U2021XA	MY5365004	2022/12/28	2023/12/27
3	Loop Antenna	schwarzbeck	FMZB1519 B	00023	2022/11/13	2025/11/12
4	Wideband Antenna	schwarzbeck	VULB 9163	958	2022/11/13	2025/11/12
5	Horn Antenna	schwarzbeck	BBHA 9120D	01989	2022/11/13	2025/11/12
6	EMI Test Receiver	R&S	ESCI	100849/003	2022/12/28	2023/12/27
7	Controller	MF	MF7802	N/A	N/A	N/A
8	Amplifier	schwarzbeck	BBV 9743	209	2022/12/28	2023/12/27
9	Amplifier	Tonscend	TSAMP-0518SE	--	2022/12/28	2023/12/27
10	RF Cable(below 1GHz)	HUBER+SUHNER	RG214	N/A	2022/12/28	2023/12/27
11	RF Cable(above 1GHz)	HUBER+SUHNER	RG214	N/A	2022/12/28	2023/12/27
12	RE test software	Tonscend	JS32-RE	V2.0.2.0	N/A	N/A
12	Test Software	Tonscend	JS1120-3	V2.5.77.0418	N/A	N/A
14	Horn Antenna	A-INFO	LB-180400-KF	J211020657	2022/12/28	2023/12/27
15	Amplifier	CDSA	PAP-1840	17021	2022/12/28	2023/12/27
16	Spectrum Analyzer	R&S	FSP40	100550	2023/1/10	2024/1/9
17	UNIVERSAL RADIO COMMUNICATION	R&S	CMW500	101855	2022/12/28	2023/12/27
18	Signal Generator	Keysight	N5182A	MY4620709	2022/12/28	2023/12/27
19	Spectrum Analyzer	KEYSIGHT	N9010B	MY60241089	2023/1/10	2024/1/9



3.5 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 “ Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics” and is documented in the Shenzhen Tongzhou Testing Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Tongzhou Testing Co.,Ltd is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.10 dB	(1)
Radiated Emission	1~18GHz	3.70 dB	(1)
Radiated Emission	18-40GHz	3.90 dB	(1)
Conducted Disturbance	0.15~30MHz	1.63 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occupied Bandwidth	9KHz~40GHz	-	(1)
Frequency Error	9KHz~40GHz	1×10^{-7}	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.



4 TEST CONDITIONS AND RESULTS

4.1 Conducted Output Power / E.I.R.P / E.R.P / Peak-to-Average Ratio (PAR)

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

LIMIT

For Conducted Power

Within Tune-up Value

For Radiated Power

This is the test for the maximum radiated power from the EUT.

Per Part 22.913(a)(4) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

Per Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Per Part 27.50(d) (4) specifies, Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band are limited to 1W EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications.

Per Part 27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

Per Part 27.50(b) (9) specifies, Control stations and mobile stations transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806 MHz bands are limited to 30 watts ERP.

Per Part 27.50(b)(10) specifies, Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.


Per Part 27.50(a) (3) specifies, *Mobile and portable stations.* (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

Per Part 27.50(h) (2) specifies, The following power limits shall apply in the BRS and EBS: *Mobile and other user stations.* Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

For Peak-to-Average Ratio (PAR)

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13dB.

TEST CONFIGURATION

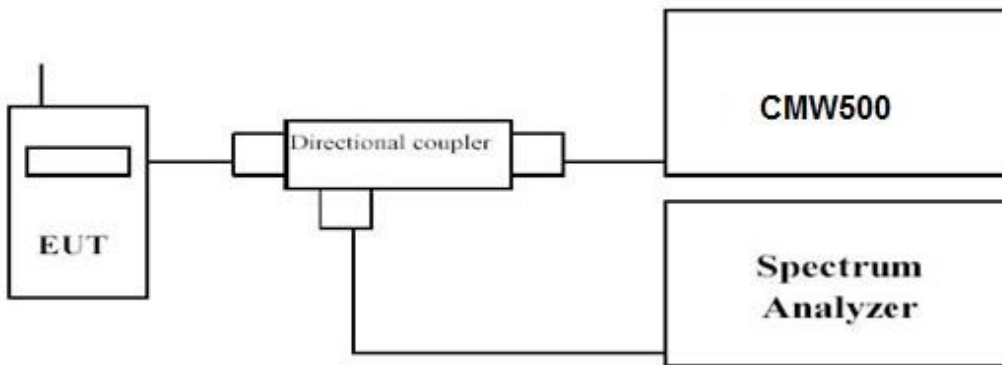

TEST PROCEDURE

1. Place the EUT on a bench and set it in transmitting mode.
2. Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
3. EUT Communicate with CMW500 then selects a channel for testing.
4. Add a correction factor to the display CMW500, and then test.
5. Record the Peak power(P1) and Average power(P2).
6. Peak-to-Average Ratio (PAR) = Peak power(P1) - Average power(P2)
7. EIRP = Average power(P2) + Antenna Gain(dBi), ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST RESULTS

Pass

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth as list in section 3.3 of this report;
2. please refer to Output Power and Peak-to-Average Ratio (PAR) in Appendix Test data for LTE Band4.
3. please refer to Output Power and Peak-to-Average Ratio (PAR) in Appendix Test data for LTE Band5.
4. please refer to Output Power and Peak-to-Average Ratio (PAR) in Appendix Test data for LTE Band7.
5. please refer to Output Power and Peak-to-Average Ratio (PAR) in Appendix Test data for LTE Band66.

4.2 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

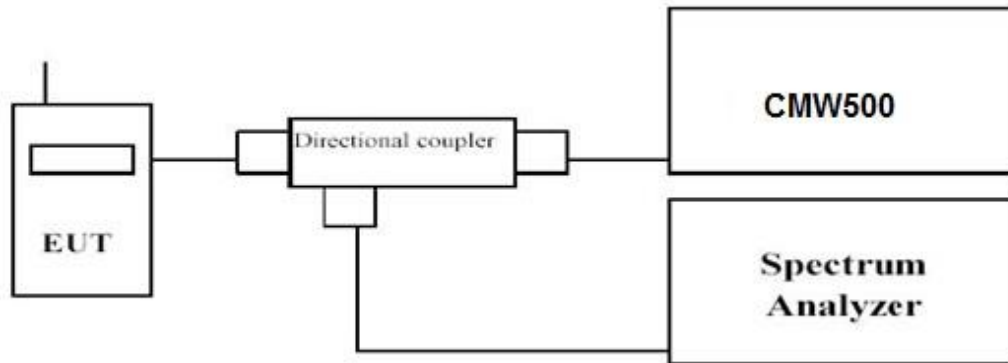

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW \geq 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Pass

Remark:

1. We were tested full RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth as list in section 3.3 of this report;
2. please refer to Emission bandwidth and OBW in Appendix Test data for LTE Band4.
3. please refer to Emission bandwidth and OBW in Appendix Test data for LTE Band5.
4. please refer to Emission bandwidth and OBW in Appendix Test data for LTE Band7.
5. please refer to Emission bandwidth and OBW in Appendix Test data for LTE Band66.
6. please refer to Emission bandwidth and OBW in Appendix Test data for LTE Band12.



4.3 Band Edge compliance


LIMIT

For LTE FDD Band 5: Per 22.917(a): The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 4/66: Per §27.53(h): For operations in the 814–849 MHz band, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For LTE FDD Band 7: Per §27.53(m)(4): For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST CONFIGURATION

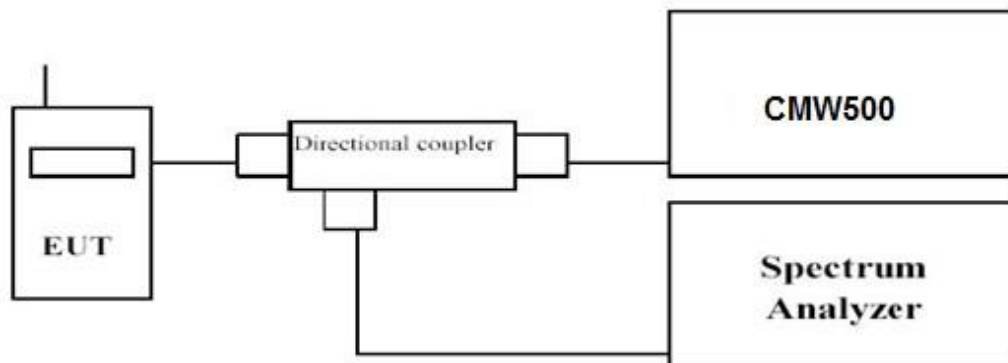

TEST PROCEDURE

8. The transmitter output port was connected to base station.
9. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
10. Set EUT at maximum power through base station.
11. Select lowest and highest channels for each band and different modulation.
12. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Pass

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth as list in section 3.3 of this report;
2. please refer to Band Edge and Emission Mask in Appendix Test data for LTE Band4.
3. please refer to Band Edge and Emission Mask in Appendix Test data for LTE Band5.
4. please refer to Band Edge and Emission Mask in Appendix Test data for LTE Band7.
5. please refer to Band Edge and Emission Mask in Appendix Test data for LTE Band66.

4.4 Spurious Emission on Antenna Port

LIMIT

Refer to section 3.3 of this report for each frequency band

TEST CONFIGURATION

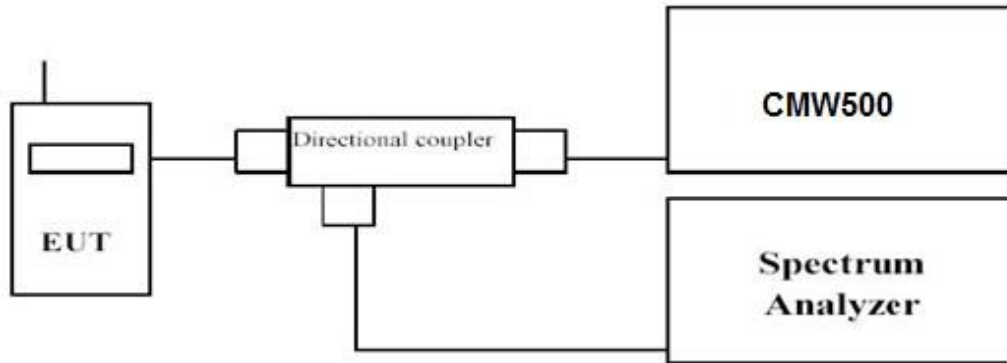

TEST PROCEDURE

The EUT was setup according to ANSI C63.26

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

Sub range (GHz)	RBW	VBW	Sweep time (s)
0.000009~0.000015	1KHz	3KHz	Auto
0.000015~0.03	10KHz	30KHz	Auto
0.03~26	1 MHz	3 MHz	Auto

TEST RESULTS

Pass

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth as list in section 3.3 of this report;
2. please refer to Conducted Spurious Emission in Appendix Test data for LTE Band4.
3. please refer to Conducted Spurious Emission in Appendix Test data for LTE Band5.
4. please refer to Conducted Spurious Emission in Appendix Test data for LTE Band7.
5. please refer to Conducted Spurious Emission in Appendix Test data for LTE Band66.

4.5 Radiated Spurious Emission

LIMIT

Refer to section 3.3 of this report for each frequency band

TEST CONFIGURATION

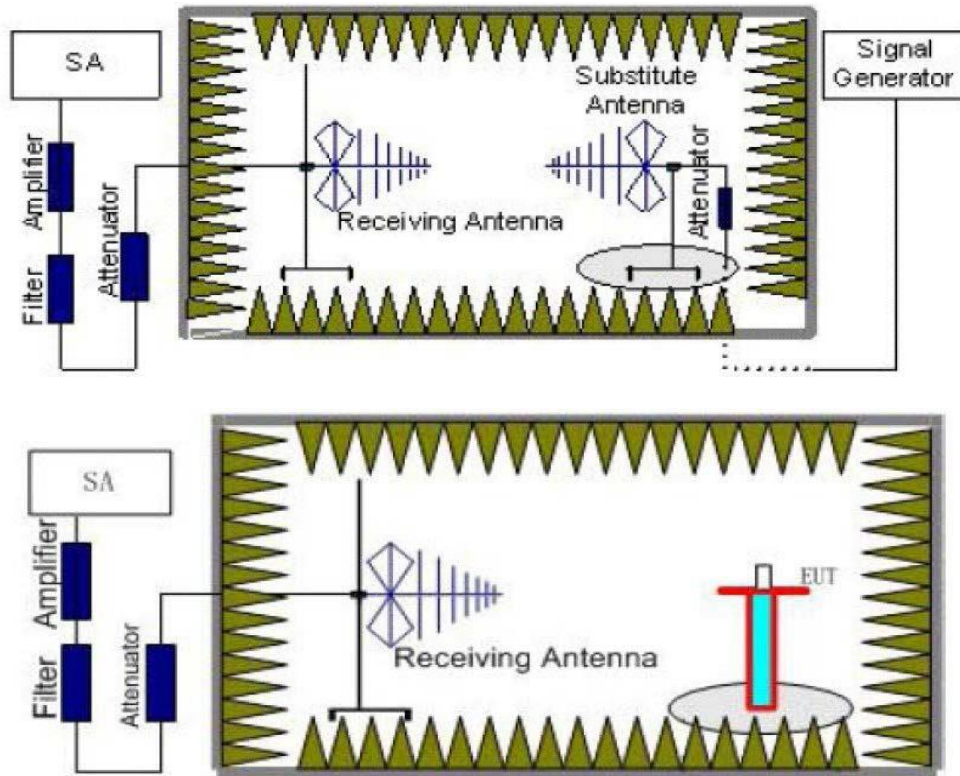

TEST PROCEDURE

1. Setup as illustrated above the DUT placed on the 0.8m height (for frequencies < 1GHz) or 1.5m (for frequencies > 1GHz) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

It can omit power amplifier if signal generator level meets requirement;



6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for different frequency ranges as follows table:

Subrange (GHz)	RBW	VBW	Sweep time (s)
0.00009~0.15	1KHz	3KHz	30
0.00015~0.03	10KHz	30KHz	10
0.03~1	100KHz	300KHz	10
1~2	1 MHz	3 MHz	2
2~5	1 MHz	3 MHz	3
5~8	1 MHz	3 MHz	3
8~10 th	1 MHz	3 MHz	3

TEST LIMITS

According to rules specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Channel	Frequency Range	Verdict
Low	9 KHz – 10 th GHz	PASS
Middle	9 KHz – 10 th GHz	PASS
High	9 KHz – 10 th GHz	PASS

TEST RESULTS

Pass

Temperature	24.8°C	Humidity	58%
Test Engineer	Anna Hu		

List of final test modes:

E-UTRA Bands

This is the worst pattern data

Band 4:

Mode	Bandwidth	UL Channel	Frequency	Modulation	RB Size	RB Offset	Judgement
1	20	20050	1720	Q16	100	LOW	Pass
2	20	20175	1732.5	Q16	100	LOW	Pass
3	20	20300	1745	Q16	100	LOW	Pass

Band 5:

Mode	Bandwidth	UL Channel	Frequency	Modulation	RB Size	RB Offset	Judgement
1	10	20450	829	QPSK	50	LOW	Pass
2	10	20525	836.5	QPSK	50	LOW	Pass
3	10	20600	844	QPSK	50	LOW	Pass

Band 7:

Mode	Bandwidth	UL Channel	Frequency	Modulation	RB Size	RB Offset	Judgement
1	20	20850	2510	QPSK	100	LOW	Pass
2	20	21100	2535	QPSK	100	LOW	Pass
3	20	21350	2560	QPSK	100	LOW	Pass

**Band 66:**

Mode	Bandwidth	UL Channel	Frequency	Modulation	RB Size	RB Offset	Judgement
1	20	132072	1720	QPSK	100	LOW	Pass
2	20	132322	1745	QPSK	100	LOW	Pass
3	20	132572	1770	QPSK	100	LOW	Pass

Note:

1. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:

$$\text{Power} = P_{\text{Mea}} + AR_{pl}$$

2. $AR_{pl} = \text{Cable loss} + \text{Antenna gain}$



E-UTRA Bands

Band 4:

Mode 1					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
3440	-49.37	1.5	-50.87	-13	Horizontal
3440	-49.53	1.5	-51.03	-13	Vertical
5160	-50.04	1.5	-51.54	-13	Horizontal
5160	-54.77	1.5	-56.27	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
3465	-50.90	1.5	-52.40	-13	Horizontal
3465	-56.81	1.5	-58.31	-13	Vertical
5197.5	-54.71	1.5	-56.21	-13	Horizontal
5197.5	-51.65	1.5	-53.15	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
3490	-51.14	1.5	-52.64	-13	Horizontal
3490	-50.56	1.5	-52.06	-13	Vertical
5235	-57.93	1.5	-59.43	-13	Horizontal
5235	-56.07	1.5	-57.57	-13	Vertical

Band 5:

Mode 1					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1658	-59.59	2.38	-61.97	-13	Horizontal
1658	-60.14	2.38	-62.52	-13	Vertical
2487	-59.34	2.38	-61.72	-13	Horizontal
2487	-60.91	2.38	-63.29	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1673	-56.52	2.38	-58.90	-13	Horizontal
1673	-55.38	2.38	-57.76	-13	Vertical
2509.5	-56.24	2.38	-58.62	-13	Horizontal
2509.5	-56.68	2.38	-59.06	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1688	-57.97	2.38	-60.35	-13	Horizontal
1688	-57.46	2.38	-59.84	-13	Vertical
2532	-59.95	2.38	-62.33	-13	Horizontal
2532	-59.85	2.38	-62.23	-13	Vertical

**Band 7:**

Mode 1					
Frequency(MHz)	Power(dBm)	ARpl(dBm)	PMea(dBm)	Limit (dBm)	Polarity
5020	-56.45	2.38	-58.83	-13	Horizontal
5020	-59.25	2.38	-61.63	-13	Vertical
7530	-57.38	2.38	-59.76	-13	Horizontal
7530	-55.67	2.38	-58.05	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	ARpl(dBm)	PMea(dBm)	Limit (dBm)	Polarity
5070	-58.91	2.38	-61.29	-13	Horizontal
5070	-58.00	2.38	-60.38	-13	Vertical
7605	-56.92	2.38	-59.30	-13	Horizontal
7605	-57.59	2.38	-59.97	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	ARpl(dBm)	PMea(dBm)	Limit (dBm)	Polarity
5120	-56.42	2.38	-58.80	-13	Horizontal
5120	-59.95	2.38	-62.33	-13	Vertical
7680	-58.99	2.38	-61.37	-13	Horizontal
7680	-58.06	2.38	-60.44	-13	Vertical

Band 66:

Mode 1					
Frequency(MHz)	Power(dBm)	ARpl(dBm)	PMea(dBm)	Limit (dBm)	Polarity
5440	-59.40	1.52	-60.92	-13	Horizontal
5440	-56.19	1.52	-57.71	-13	Vertical
8160	-57.77	1.52	-59.29	-13	Horizontal
8160	-60.82	1.52	-62.34	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	ARpl(dBm)	PMea(dBm)	Limit (dBm)	Polarity
3490	-55.83	1.52	-57.35	-13	Horizontal
3490	-60.55	1.52	-62.07	-13	Vertical
5235	-58.51	1.52	-60.03	-13	Horizontal
5235	-56.63	1.52	-58.15	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	ARpl(dBm)	PMea(dBm)	Limit (dBm)	Polarity
5540	-60.88	1.52	-62.40	-13	Horizontal
5540	-58.51	1.52	-60.03	-13	Vertical
8310	-56.50	1.52	-58.02	-13	Horizontal
8310	-55.26	1.52	-56.78	-13	Vertical

Test record:

Note:

1. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:

$$\text{Power} = \text{PMea} + \text{ARpl}$$

2. ARpl = Cable loss + Antenna gain




4.6 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to FCC §2.1055, §22.355, §24.235 and §27.54 and §90.213 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

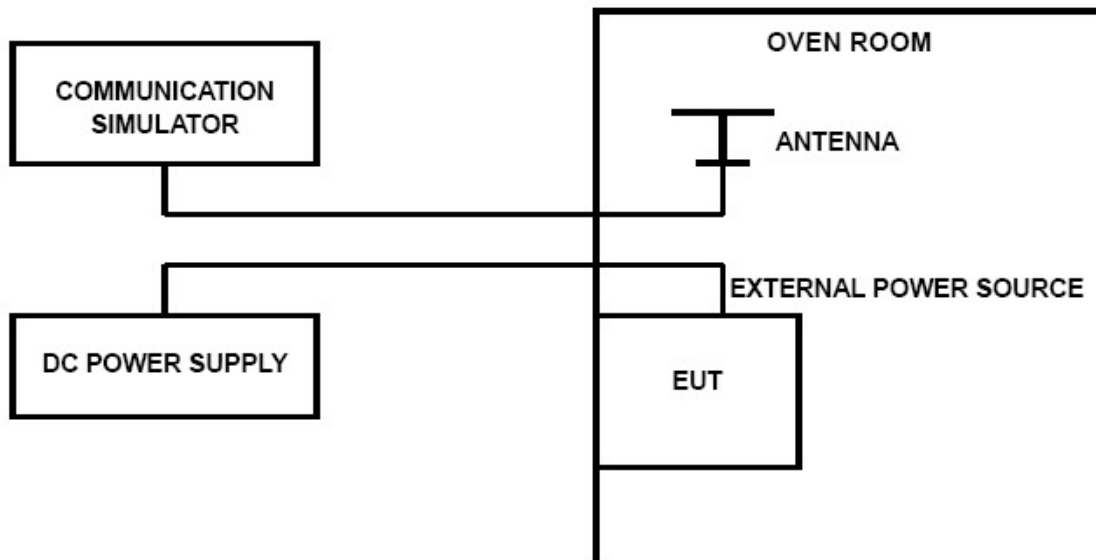

TEST PROCEDURE

The EUT was setup according to ANSI C63.26.

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for Specific band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.



TEST RESULTS

Pass

Remark:

1. *We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth as list in section 3.3 of this report,and record the worst case in this report.*
2. *please refer to Frequency Stability in Appendix Test data for LTE Band4.*
3. *please refer to Frequency Stability in Appendix Test data for LTE Band5.*
4. *please refer to Frequency Stability in Appendix Test data for LTE Band7.*
5. *please refer to Frequency Stability in Appendix Test data for LTE Band66.*



5 Test Set up Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

*****End of Report*****