



SAR Test Report



For

Applicant Name: Zhejiang Lianyong mobile terminal equipment manufacturing Co., Ltd.
Address: No. 1, First Street, Eastern New Area, Wenling, Taizhou, Zhejiang, China
EUT Name: Mobile phone
Brand Name: MAZE SPEED, SOHO STYLE, LUSH MINT
Model Number: MS5424G
Series Model Number: Refer to section 2


Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report Number: BTF230417R01101
Test Standards: FCC 47 CFR§2.1093 IEEE1528-2013 IEEE C95.1-2019
KDB447498 D01 v06 KDB447498 D04 v01
KDB865664 D01 v01r04 KDB865664 D02 v01r02
KDB941225 D01 v03r01 KDB941225 D05 v02r05
KDB248227 D01 v02r02 KDB941225 D06 v02r01
KDB648474 D04 v01r03 KDB690783 D01 v01r03
FCC ID: 2A5ZX-MS5424G
Test Conclusion: Pass
Test Date: 2023-04-19 to 2023-04-21
Date of Issue: 2023-04-23

Prepared By: 
Date: 2023-04-23
Approved By: 
Date: 2023-04-23

Monica Zhou / Project Engineer
Ryan.CJ / EMC Manager

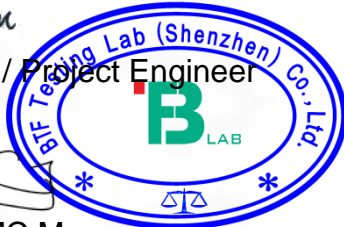

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-04-23	Original
<i>Note:</i>	<i>Once the revision has been made, then previous versions reports are invalid.</i>	

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	5
2.6 Technical Information	5
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Device Category and SAR Limit	7
3.3 Test Result Summary	8
3.4 Test Uncertainty	9
4. Measurement System	11
4.1 Specific Absorption Rate (SAR) Definition	11
4.2 MVG SAR System	11
5. System Verification	16
5.1 Purpose of System Check	16
5.2 System Check Setup	16
6. TEST POSITION CONFIGURATIONS	17
6.1 Head Exposure Conditions	17
6.2 Body-worn Position Conditions	18
6.3 Hotspot Mode Exposure Position Conditions	19
6.4 Product Specific 10g Exposure Consideration	20
7. Measurement Procedure	21
7.1 Measurement Process Diagram	21
7.2 SAR Scan General Requirement	22
7.3 Measurement Procedure	23
7.4 Area & Zoom Scan Procedure	23
8. Conducted RF Output Power	24
8.1 GSM	24
8.2 WCDMA	25
8.3 LTE	26
8.4 Wi-Fi	37
8.5 Bluetooth	37
9. Test Exclusion Consideration	38
9.1 SAR Test Exclusion Consideration Table	39
10. Test Result	40
11. SAR Measurement Variability	44
12. Simultaneous Transmission	44
12.1 Simultaneous Transmission Mode Considerations	44
12.2 Sum SAR of Simultaneous Transmission	45
13. Test Equipment List	49
ANNEX A Simulating Liquid Verification Result	50
ANNEX B System Check Result	50
ANNEX C Test Data	63
ANNEX D SAR Test Setup Photos	115
ANNEX E EUT External and Internal Photos	117
ANNEX F Calibration Information	117

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101,201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1330

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	Zhejiang Lianyong mobile terminal equipment manufacturing Co., Ltd.
Address:	No. 1, First Street, Eastern New Area, Wenling, Taizhou, Zhejiang, China

2.2 Manufacturer Information

Company Name:	Zhejiang Lianyong mobile terminal equipment manufacturing Co., Ltd.
Address:	No. 1, First Street, Eastern New Area, Wenling, Taizhou, Zhejiang, China

2.3 Factory Information

Company Name:	Zhejiang Lianyong mobile terminal equipment manufacturing Co., Ltd.
Address:	No. 1, First Street, Eastern New Area, Wenling, Taizhou, Zhejiang, China

2.4 General Description of Equipment under Test (EUT)

EUT Name	Mobile phone
Under Test Model Name	MS5424G
Series Model Name	SS5424G, LM5424G
Description of Model name differentiation	Only the model name and brand name are different, others are the same.
Sample No.	BTFSN230417E004-2/4

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	2000mAh
	Rated Voltage	3.7V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/12/17/66/71 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/HT40) BT (EDR)
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth		
Frequency Range	GSM 850	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	GSM 1900	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	WCDMA Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 12	TX: 698 ~ 716 MHz	RX: 728 ~ 746 MHz
	LTE Band 17	TX: 704 ~ 716 MHz	RX: 734 ~ 746 MHz
	LTE Band 66	TX: 1710 ~ 1780 MHz	RX: 2110 ~ 2200 MHz
	LTE Band 71	TX: 663 ~ 698 MHz	RX: 617 ~ 652 MHz
	802.11b/g/n(HT20)	2412 ~ 2462 MHz	
	802.11n(HT40)	2422 ~ 2452 MHz	
	Bluetooth	2402 ~ 2480 MHz	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna BT: PIFA Antenna		
Hotspot Function	Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	<input type="checkbox"/> Production unit	<input checked="" type="checkbox"/> Identical prototype	

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB447498 D01	General RF Exposure Guidance v06
5	KDB447498 D04	Interim General RF Exposure Guidance v01
6	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
7	KDB865664 D02	RF Exposure Reporting v01r02
8	KDB941225 D01	3G SAR Procedures v03r01
9	KDB941225 D05	SAR for LTE Devices v02r05
10	KDB248227 D01	802.11 Wi-Fi SAR v02r02
11	KDB941225 D06	Hotspot Mode v02r01
12	KDB648474 D04	Handset SAR v01r03
13	KDB690783 D01	SAR Listings on Grant v01r03

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as follows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Head 1-g SAR (0 mm Gap)	GSM 850	0.301	PCE	0.490
	GSM 1900	0.203		
	WCDMA Band II	0.199		
	WCDMA Band IV	0.283		
	WCDMA Band V	0.193		
	LTE Band 2	0.258		
	LTE Band 4	0.367		
	LTE Band 5	0.241		
	LTE Band 12	0.213		
	LTE Band 17	0.200		
	LTE Band 66	0.386		
	LTE Band 71	0.162		
	WLAN 2.4 GHz	0.490	DTS	
Bluetooth	0.026	DSS		
Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Hotspot(Body) 1-g SAR (10 mm Gap)	GSM 850	0.382	PCB	0.734
	GSM 1900	0.329		
	WCDMA Band II	0.341		
	WCDMA Band IV	0.524		
	WCDMA Band V	0.278		
	LTE Band 2	0.543		
	LTE Band 4	0.702		
	LTE Band 5	0.352		
	LTE Band 12	0.455		
	LTE Band 17	0.438		
	LTE Band 66	0.734		
	LTE Band 71	0.511		
	WLAN 2.4 GHz	0.213	DTS	
Bluetooth	0.013	DSS		

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Head 1-g SAR (0 mm Gap)	LTE Band 66 + 2.4G WIFI	0.876	1.6	Pass
Hotspot(Body) 1-g SAR (10 mm Gap)	LTE Band 66 + 2.4G WIFI	0.947	1.6	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	√0.5	√0.5	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√0.5	√0.5	2.41	2.41	∞
Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1.0	R	√3	1	1	0.58	0.58	∞
Modulation response	3.0	R	√3	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3.0	N	1	1	1	3.00	3.00	7
Output power Variation - SAR drift measurement	5.0	R	√3	1	1	2.89	2.89	∞
SAR scaling	2.0	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4.0	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		k				20.95	20.69	

* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10 g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient Conditions - Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR drift measurement	0.5	R	$\sqrt{3}$	1	1	0.29	0.29	∞
Dipole Axis to Liquid Dist.	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		k				20.32	20.06	

4.2.2 Robot



- A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System
- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
 - Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
 - Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for $f \geq 4\text{GHz}$.
- Probe linearity: $< 0.25\text{dB}$.
- Axial Isotropy: $< 0.25\text{dB}$.
- Spherical Isotropy: $< 0.50\text{dB}$.
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 20° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM Phantom

The thickness of the phantom amounts to $2\text{ mm} \pm 0.2\text{ mm}$. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom

	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2\text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




ELLI Phantom

The shape of the phantom is an ellipse with length $600\text{mm} \pm 5\text{mm}$ and width $400\text{mm} \pm 5\text{mm}$. The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan \delta \leq 0.05$ and relative permittivity:
 $\epsilon_r' \leq 5$ for $f \leq 3\text{ GHz}$
 $3 \leq \epsilon_r' \leq 5$ for $f > 3\text{ GHz}$
 The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of $\pm 0.2\text{ mm}$.

Technical & mechanical characteristics

Shell thickness	$2\text{ mm} \pm 0.2\text{ mm}$
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

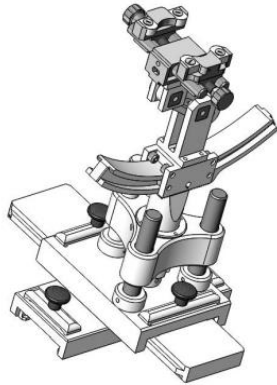

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005

(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028


4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth



Body Liquid Depth

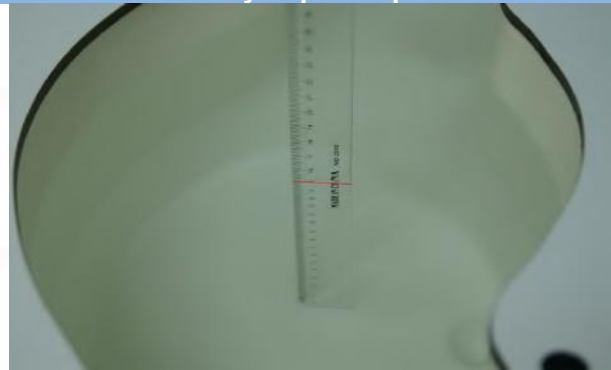

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water (%)	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

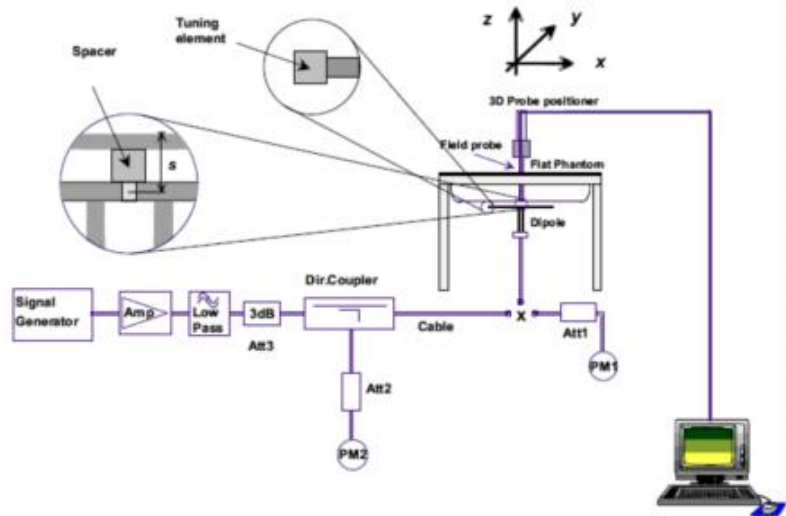

6. TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical center line and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

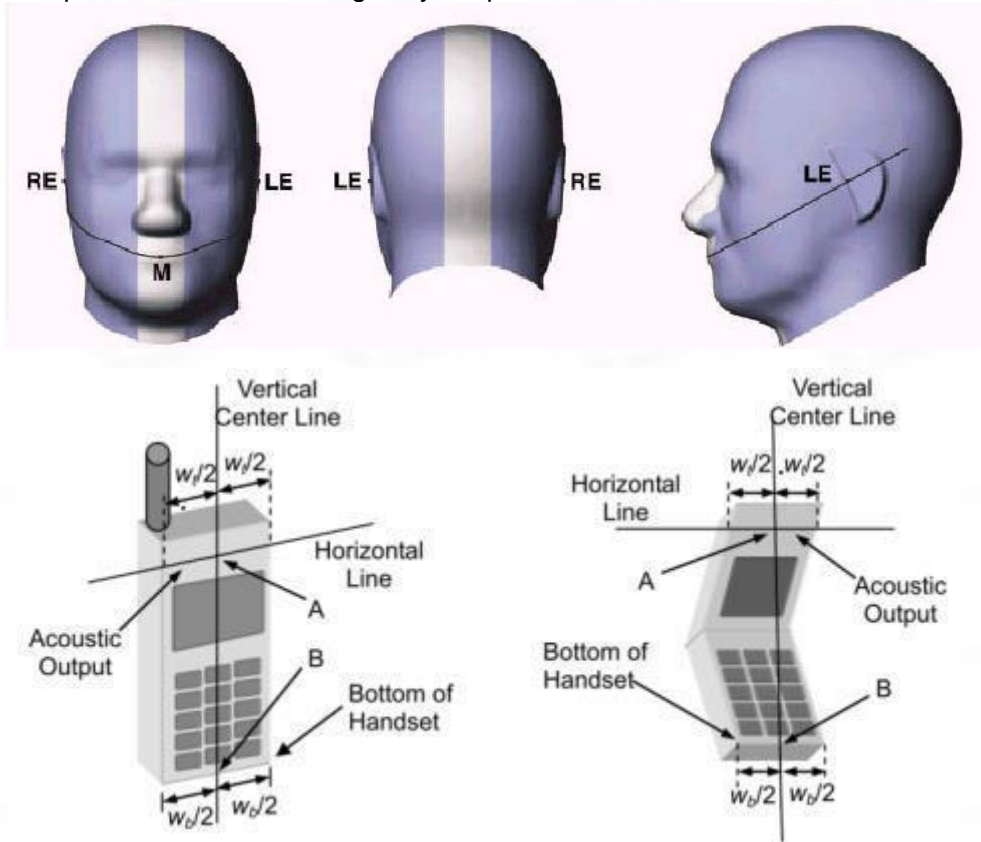


6.1.2 Two Imaginary Lines on the Handset

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



6.1.3 Titled Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

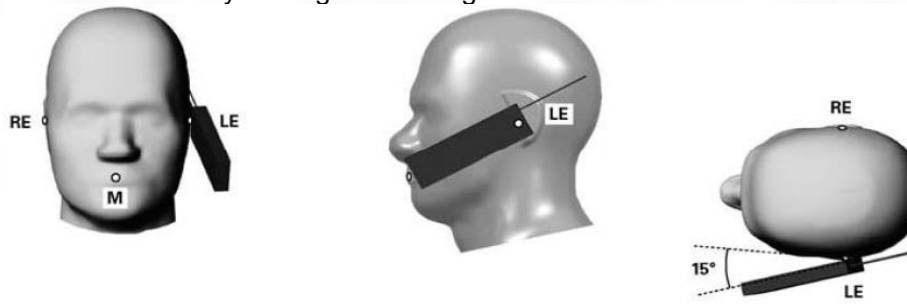


6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

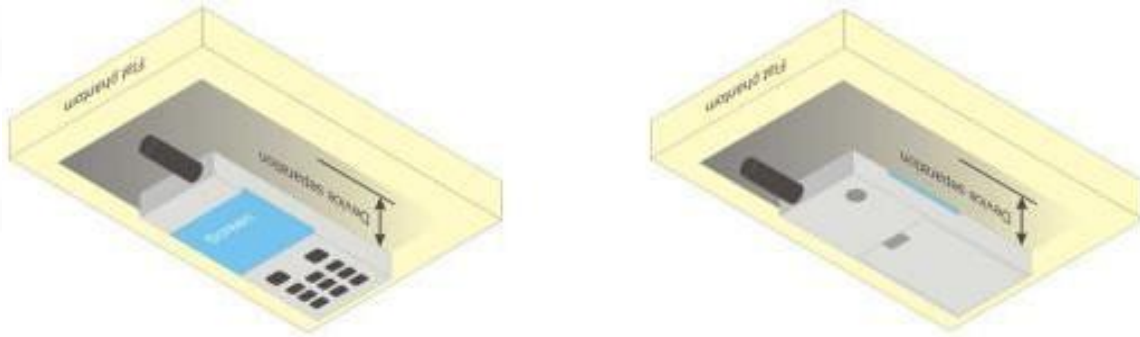

6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

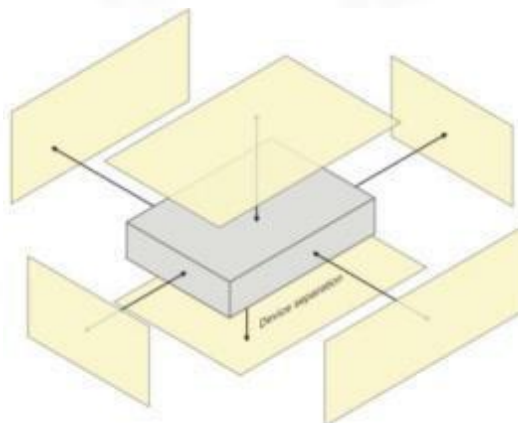

6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

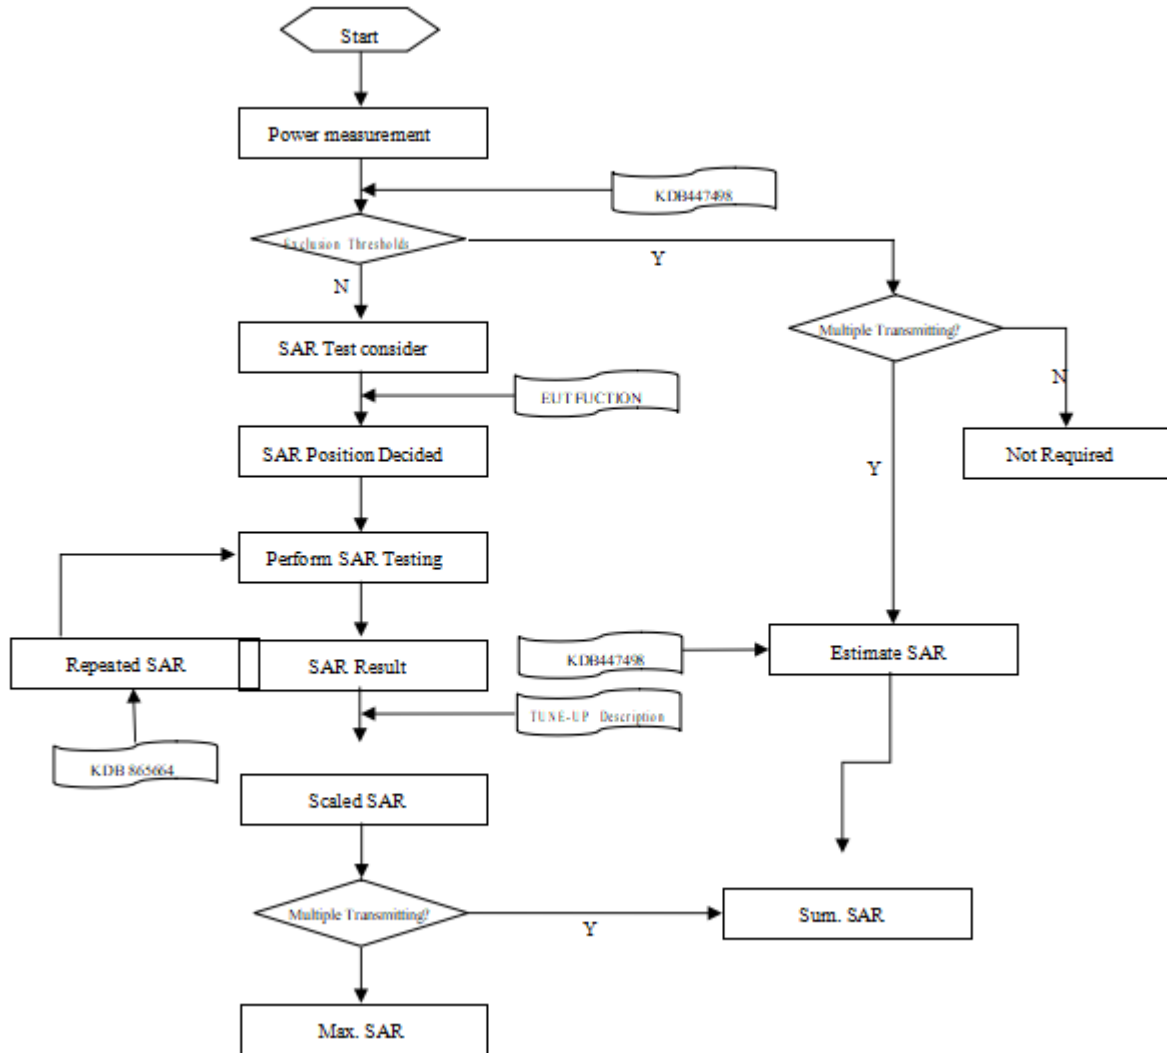

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	5–6 GHz: ≤ 2 mm
				3–4 GHz: ≤ 3 mm 4–5 GHz: ≤ 2.5 mm 5–6 GHz: ≤ 2 mm
	Δz Zoom (n>1): between subsequent points	≤ 1.5·Δz Zoom (n-1)		
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note: 1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details. 2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8. Conducted RF Output Power

8.1 GSM

Mode: GSM850		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH128	CH190	CH251		CH128	CH190	CH251
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		34.00	33.49	33.53	33.51	-9.03	24.46	24.50	24.48
GPRS (GMSK)	1Tx slot	33.50	33.05	33.12	33.08	-9.03	24.02	24.09	24.05
	2Tx slots	32.50	32.27	32.33	32.30	-6.02	26.25	26.31	26.28
	3Tx slots	31.50	31.37	31.43	31.30	-4.26	27.11	27.17	27.04
	4Tx slots	30.50	30.26	30.36	30.32	-3.01	27.25	27.35	27.31
EGPRS (8PSK)	1Tx slot	28.50	28.35	28.42	28.38	-9.03	19.32	19.39	19.35
	2Tx slots	28.00	27.57	27.63	27.60	-6.02	21.55	21.61	21.58
	3Tx slots	27.00	26.67	26.73	26.60	-4.26	22.41	22.47	22.34
	4Tx slots	26.00	25.56	25.66	25.62	-3.01	22.55	22.65	22.61
Mode: GSM1900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH661	CH810		CH512	CH661	CH810
			1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		30.00	29.89	29.93	29.91	-9.03	20.86	20.90	20.88
GPRS (GMSK)	1Tx slot	30.00	29.45	29.52	29.48	-9.03	20.42	20.49	20.45
	2Tx slots	29.00	28.67	28.73	28.70	-6.02	22.65	22.71	22.68
	3Tx slots	28.00	27.77	27.83	27.70	-4.26	23.51	23.57	23.44
	4Tx slots	27.00	26.66	26.76	26.72	-3.01	23.65	23.75	23.71
EGPRS (8PSK)	1Tx slot	25.50	25.22	25.29	25.25	-9.03	16.19	16.26	16.22
	2Tx slots	25.00	24.44	24.50	24.47	-6.02	18.42	18.48	18.45
	3Tx slots	24.00	23.54	23.60	23.47	-4.26	19.28	19.34	19.21
	4Tx slots	23.00	22.43	22.53	22.49	-3.01	19.42	19.52	19.48
Note: 1) Division Factors To average the power, the division factor is as follows: 1Tx-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB 2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB 3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB 4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB									

8.2 WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band II		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
RMC 12.2K		23.00	22.78	22.89	22.86
HSDPA	Subtest-1	22.50	22.32	22.45	22.37
	Subtest-2	22.50	22.02	22.14	22.09
	Subtest-3	22.50	21.96	22.09	22.03
	Subtest-4	22.50	21.90	22.07	22.02
HSUPA	Subtest-1	22.00	21.66	21.79	21.69
	Subtest-2	22.00	21.56	21.69	21.61
	Subtest-3	22.00	21.51	21.32	21.29
	Subtest-4	21.50	21.12	21.26	21.17
	Subtest-5	21.50	21.03	21.10	21.08
Mode		Maximum Tune-up(dBm)	WCDMA Band IV		
			Conducted Power (dBm)		
			CH1312	CH1413	CH1513
RMC 12.2K		23.00	22.71	22.82	22.79
HSDPA	Subtest-1	22.50	22.25	22.38	22.30
	Subtest-2	22.50	21.95	22.07	22.02
	Subtest-3	22.50	21.89	22.02	21.96
	Subtest-4	22.50	21.83	22.00	21.95
HSUPA	Subtest-1	22.00	21.59	21.72	21.62
	Subtest-2	22.00	21.49	21.62	21.54
	Subtest-3	21.50	21.44	21.25	21.22
	Subtest-4	21.50	21.05	21.19	21.10
	Subtest-5	21.50	20.96	21.03	21.01
Mode		Maximum Tune-up(dBm)	WCDMA Band V		
			Conducted Power (dBm)		
			CH4132	CH4182	CH4233
RMC 12.2K		22.50	22.15	22.26	22.23
HSDPA	Subtest-1	22.00	21.69	21.82	21.74
	Subtest-2	22.00	21.39	21.51	21.46
	Subtest-3	21.50	21.33	21.46	21.40
	Subtest-4	21.50	21.27	21.44	21.39
HSUPA	Subtest-1	21.50	21.03	21.16	21.06
	Subtest-2	21.50	20.93	21.06	20.98
	Subtest-3	21.00	20.88	20.69	20.66
	Subtest-4	21.00	20.49	20.63	20.54
	Subtest-5	20.50	20.40	20.47	20.45
Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.					

8.3 LTE Band 2

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		18607	18900	19193	
					1850.7MHz	1880.0MHz	1909.3MHz	
1.4MHz	QPSK	1	0	23.00	22.76	22.71	22.59	
			3	23.00	22.67	22.62	22.50	
			5	23.00	22.72	22.67	22.55	
		3	0	22.50	22.06	22.01	21.89	
			2	22.00	21.90	21.85	21.73	
			3	22.00	21.83	21.78	21.67	
	16QAM	6	0	22.00	21.98	21.93	21.81	
			1	0	22.50	22.18	22.13	22.02
				3	22.50	22.09	22.04	21.93
		5		22.50	22.13	22.09	21.97	
		3	0	21.50	21.49	21.45	21.33	
			2	21.50	21.34	21.29	21.18	
3	21.50		21.27	21.22	21.11			
6	0	21.50	21.42	21.37	21.26			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18615	18900	19185
						1851.5MHz	1880.0MHz	1908.5MHz
3MHz	QPSK	1	0	23.00	22.78	22.73	22.62	
			7	23.00	22.69	22.64	22.52	
			14	23.00	22.74	22.69	22.57	
		8	0	22.50	22.08	22.03	21.91	
			4	22.00	21.92	21.87	21.75	
			7	22.00	21.85	21.80	21.69	
	16QAM	15	0	22.00	22.00	21.95	21.83	
			1	0	22.50	22.20	22.15	22.04
				7	22.50	22.11	22.06	21.95
		14		22.50	22.15	22.10	21.99	
		8	0	22.00	21.51	21.46	21.35	
			4	21.50	21.35	21.31	21.20	
7	21.50		21.29	21.24	21.13			
15	0	21.50	21.43	21.39	21.27			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18625	18900	19175
						1852.5MHz	1880.0MHz	1907.5MHz
5MHz	QPSK	1	0	23.00	22.80	22.75	22.63	
			12	23.00	22.71	22.66	22.54	
			24	23.00	22.75	22.70	22.58	
		12	0	22.50	22.09	22.04	21.93	
			6	22.00	21.93	21.88	21.77	
			13	22.00	21.86	21.82	21.70	
	16QAM	25	0	22.50	22.01	21.96	21.85	
			1	0	22.50	22.21	22.17	22.05
				12	22.50	22.13	22.08	21.96
		24		22.50	22.17	22.12	22.00	
		12	0	22.00	21.53	21.48	21.37	
			6	21.50	21.37	21.32	21.21	
13	21.50		21.30	21.26	21.14			
25	0	21.50	21.45	21.40	21.29			

LTE-FDD Band 2				Maximum Tune-up(dBm)	18650	18900	19150		
Bandwidth	Modulation	RB allocation	RB offset		1855.0MHz	1880.0MHz	1905.0MHz		
10MHz	QPSK	1	0	23.00	22.81	22.76	22.64		
			24	23.00	22.72	22.67	22.55		
			49	23.00	22.76	22.71	22.59		
		25	0	22.50	22.10	22.05	21.94		
			12	22.00	21.94	21.89	21.78		
			25	22.00	21.87	21.83	21.71		
	16QAM	1	0	22.50	22.23	22.18	22.06		
			24	22.50	22.14	22.09	21.97		
			49	22.50	22.18	22.13	22.01		
		25	0	22.00	21.54	21.49	21.38		
			12	21.50	21.38	21.33	21.22		
			25	21.50	21.31	21.27	21.15		
		50	0	21.50	21.46	21.41	21.30		
							18675	18900	19125
							1857.5MHz	1880.0MHz	1902.5MHz
15MHz	QPSK	1	0	23.00	22.77	22.72	22.60		
			37	23.00	22.68	22.63	22.51		
			74	23.00	22.72	22.67	22.55		
		37	0	22.50	22.06	22.02	21.90		
			18	22.00	21.90	21.85	21.74		
			38	22.00	21.84	21.79	21.67		
	16QAM	1	0	22.00	21.98	21.94	21.82		
			37	0	22.50	22.19	22.14	22.02	
			74	22.50	22.10	22.05	21.93		
		37	0	22.50	22.14	22.09	21.97		
			18	21.50	21.50	21.45	21.34		
			38	21.50	21.34	21.29	21.18		
		75	0	21.50	21.28	21.23	21.12		
			0	21.50	21.42	21.37	21.26		
							18700	18900	19100
				1860.0MHz	1880.0MHz	1900.0MHz			
20MHz	QPSK	1	0	23.00	22.84	22.79	22.67		
			49	23.50	23.24	23.10	22.96		
			99	23.00	22.83	22.73	22.64		
		50	0	22.50	22.12	22.08	21.97		
			25	22.50	22.20	21.92	21.81		
			50	22.50	22.11	21.85	21.74		
	16QAM	1	0	22.50	22.05	22.00	21.89		
			49	22.50	22.25	22.21	22.09		
			99	22.50	22.17	22.12	22.00		
		50	0	22.00	22.21	22.16	22.04		
			25	22.00	21.56	21.52	21.40		
			50	21.50	21.41	21.36	21.25		
		100	50	21.50	21.34	21.29	21.18		
			0	21.50	21.49	21.44	21.33		

Band 4

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19957 1710.7MHz	20175 1732.5MHz	20393 1754.3MHz
1.4MHz	QPSK	1	0	23.00	22.99	22.92	22.78
			3	23.00	22.90	22.83	22.69
			5	23.00	22.94	22.87	22.74
		3	0	22.50	22.28	22.21	22.08
			2	22.50	22.12	22.05	21.92
			3	22.50	22.05	21.98	21.85
	6	0	22.50	22.20	22.13	22.00	
	16QAM	1	0	22.50	22.40	22.34	22.20
			3	22.50	22.31	22.25	22.11
			5	22.50	22.36	22.29	22.15
		3	0	22.00	21.71	21.64	21.51
			2	22.00	21.55	21.49	21.35
3			21.50	21.49	21.42	21.29	
6	0	22.00	21.63	21.57	21.43		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19965 1711.5MHz	20175 1732.5MHz	20385 1753.5MHz
3MHz	QPSK	1	0	23.50	23.01	22.94	22.80
			7	23.00	22.92	22.85	22.71
			14	23.00	22.96	22.90	22.76
		8	0	22.50	22.30	22.23	22.10
			4	22.50	22.14	22.07	21.94
			7	22.50	22.07	22.00	21.87
	15	0	22.50	22.22	22.15	22.02	
	16QAM	1	0	22.50	22.42	22.36	22.22
			7	22.50	22.33	22.27	22.13
			14	22.50	22.38	22.31	22.17
		8	0	22.00	21.73	21.66	21.53
			4	22.00	21.57	21.50	21.37
7			22.00	21.50	21.44	21.31	
15	0	22.00	21.65	21.58	21.45		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976 1712.5MHz	20175 1732.5MHz	20375 1752.5MHz
5MHz	QPSK	1	0	23.50	23.03	22.96	22.82
			12	23.00	22.94	22.87	22.73
			24	23.00	22.98	22.91	22.77
		12	0	22.50	22.31	22.25	22.11
			6	22.50	22.15	22.08	21.95
			13	22.50	22.08	22.02	21.88
	25	0	22.50	22.23	22.17	22.03	
	16QAM	1	0	22.50	22.44	22.37	22.23
			12	22.50	22.35	22.28	22.15
			24	22.50	22.39	22.32	22.19
		12	0	22.00	21.74	21.68	21.54
			6	22.00	21.58	21.52	21.39
13			22.00	21.52	21.45	21.32	
25	0	22.00	21.66	21.60	21.47		

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350		
					1715.0MHz	1732.5MHz	1750.0MHz		
10MHz	QPSK	1	0	23.50	23.04	22.97	22.83		
			24	23.00	22.95	22.88	22.74		
			49	23.00	22.99	22.92	22.78		
		25	0	22.50	22.32	22.26	22.12		
			12	22.50	22.16	22.09	21.96		
			25	22.50	22.09	22.03	21.89		
	16QAM	1	0	22.50	22.45	22.38	22.24		
			24	22.50	22.36	22.29	22.16		
			49	22.50	22.40	22.33	22.20		
		25	0	22.00	21.75	21.69	21.55		
			12	22.00	21.59	21.53	21.40		
			25	22.00	21.53	21.46	21.33		
		50	0	22.00	21.67	21.61	21.48		
							20025	20175	20325
							1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	23.00	23.00	22.93	22.79		
			37	23.00	22.91	22.84	22.70		
			74	23.00	22.95	22.88	22.74		
		37	0	22.50	22.29	22.22	22.08		
			18	22.50	22.12	22.06	21.92		
			38	22.50	22.06	21.99	21.86		
	16QAM	1	0	22.50	22.21	22.14	22.00		
			37	22.50	22.41	22.34	22.21		
			74	22.50	22.32	22.25	22.12		
		37	0	22.00	22.36	22.29	22.16		
			18	22.00	21.71	21.65	21.52		
			38	21.50	21.56	21.49	21.36		
		75	0	22.00	21.49	21.43	21.30		
			0	22.00	21.64	21.57	21.44		
							20070	20175	20300
				1722.0MHz	1732.5MHz	1745.0MHz			
20MHz	QPSK	1	0	23.50	23.07	23.00	22.86		
			49	23.50	23.45	23.39	23.22		
			99	23.50	23.01	22.97	22.71		
		50	0	22.50	22.33	22.29	22.15		
			25	22.50	22.29	22.12	21.99		
			50	22.50	22.25	22.06	21.92		
	16QAM	1	0	22.50	22.27	22.21	22.07		
			49	22.50	22.48	22.41	22.27		
			99	22.50	22.39	22.32	22.18		
		50	0	22.00	22.43	22.36	22.23		
			25	22.00	21.78	21.72	21.58		
			50	22.00	21.62	21.56	21.43		
		100	0	22.00	21.56	21.49	21.36		
			0	22.00	21.70	21.64	21.51		

Band 5

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643	
					824.7MHz	836.5MHz	848.3MHz	
1.4MHz	QPSK	1	0	21.00	20.89	20.91	20.92	
			3	21.00	20.80	20.82	20.83	
			5	21.00	20.84	20.86	20.87	
		3	0	20.50	20.24	20.26	20.27	
			2	20.50	20.09	20.11	20.12	
			3	20.50	20.03	20.05	20.06	
	6	0	20.50	20.16	20.18	20.19		
	16QAM	1	0	20.50	20.35	20.37	20.38	
			3	20.50	20.27	20.29	20.30	
			5	20.50	20.31	20.33	20.34	
		3	0	20.00	19.72	19.74	19.75	
			2	20.00	19.58	19.59	19.60	
			3	20.00	19.52	19.53	19.54	
		6	0	20.00	19.65	19.67	19.68	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20405	20525
						824.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	21.00	20.83	20.85	20.86	
			7	21.00	20.75	20.77	20.78	
			14	21.00	20.79	20.81	20.82	
		8	0	20.50	20.19	20.21	20.22	
			4	20.50	20.04	20.06	20.07	
			7	20.50	19.98	20.00	20.01	
	15	0	20.50	20.11	20.13	20.14		
	16QAM	1	0	20.50	20.30	20.32	20.33	
			7	20.50	20.22	20.24	20.25	
			14	20.50	20.26	20.27	20.28	
		8	0	20.00	19.67	19.69	19.70	
			4	20.00	19.53	19.54	19.55	
			7	19.50	19.47	19.48	19.49	
		15	0	20.00	19.60	19.62	19.63	

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625	
					826.5MHz	836.5MHz	846.5MHz	
5MHz	QPSK	1	0	21.00	20.85	20.87	20.88	
			12	21.00	20.77	20.79	20.80	
			24	21.00	20.81	20.83	20.84	
		12	0	20.50	20.21	20.23	20.24	
			6	20.50	20.06	20.08	20.09	
			13	20.50	20.00	20.02	20.03	
		25	0	20.50	20.13	20.15	20.16	
		16QAM	1	0	20.50	20.32	20.34	20.35
				12	20.50	20.24	20.26	20.27
	24			20.50	20.28	20.30	20.31	
	12		0	20.00	19.69	19.71	19.72	
			6	20.00	19.55	19.56	19.57	
			13	20.00	19.49	19.50	19.51	
	25	0	20.00	19.62	19.64	19.65		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600	
					829.0MHz	836.5MHz	844.0MHz	
10MHz	QPSK	1	0	21.00	20.93	20.96	20.96	
			24	21.50	21.11	21.09	21.21	
			49	21.00	20.88	20.92	20.99	
		25	0	20.50	20.28	20.30	20.28	
			12	20.50	20.13	20.15	20.27	
			25	20.50	20.07	20.09	20.22	
	50	0	20.50	20.21	20.23	20.24		
		16QAM	1	0	20.50	20.39	20.41	20.42
				24	20.50	20.31	20.33	20.34
	49			20.50	20.35	20.37	20.38	
	25	0	20.00	19.76	19.78	19.79		
		12	20.00	19.62	19.64	19.64		
		25	20.00	19.56	19.58	19.58		
	50	0	20.00	19.69	19.71	19.72		

Band 12

LTE-FDD Band 12					Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23017	23095	23173	
					699.7MHz	707.5MHz	715.3MHz	
1.4MHz	QPSK	1	0	21.00	20.54	20.55	20.57	
			3	20.50	20.45	20.46	20.48	
			5	21.00	20.49	20.50	20.52	
		3	0	20.00	19.90	19.91	19.93	
			2	20.00	19.75	19.76	19.78	
			3	20.00	19.69	19.70	19.72	
	6	0	20.00	19.83	19.84	19.86		
		16QAM	1	0	20.50	20.01	20.02	20.04
				3	20.00	19.93	19.94	19.96
	5			20.00	19.97	19.98	20.00	
	3		0	19.50	19.39	19.40	19.42	
			2	19.50	19.25	19.26	19.28	
			3	19.50	19.19	19.20	19.22	
	6	0	19.50	19.32	19.33	19.35		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23025	23095	23165
3MHz	QPSK	1	0	21.00	20.48	20.49	20.51	
			7	20.50	20.40	20.41	20.43	
			14	20.50	20.44	20.45	20.47	
		8	0	20.00	19.85	19.86	19.88	
			4	20.00	19.70	19.71	19.73	
			7	20.00	19.64	19.65	19.67	
	15	0	20.00	19.78	19.79	19.81		
		16QAM	1	0	20.00	19.96	19.97	19.99
				7	20.00	19.88	19.89	19.91
	14			20.00	19.92	19.93	19.95	
	8		0	19.50	19.34	19.35	19.37	
			4	19.50	19.20	19.21	19.23	
			7	19.50	19.14	19.15	19.17	
	15	0	19.50	19.27	19.28	19.30		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23035	23095	23155	
					701.5MHz	707.5MHz	713.5MHz	
5MHz	QPSK	1	0	21.00	20.51	20.52	20.54	
			12	20.50	20.42	20.43	20.45	
			24	20.50	20.46	20.47	20.49	
		12	0	20.00	19.87	19.88	19.90	
			6	20.00	19.72	19.73	19.75	
			13	20.00	19.66	19.67	19.69	
	25	0	20.00	19.80	19.81	19.83		
	16QAM	1	0	20.50	19.98	19.99	20.01	
			12	20.00	19.90	19.91	19.93	
			24	20.00	19.94	19.95	19.97	
		12	0	19.50	19.36	19.37	19.39	
			6	19.50	19.22	19.23	19.25	
			13	19.50	19.16	19.17	19.19	
		25	0	19.50	19.29	19.30	19.32	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23060	23095
					704.0MHz	707.5MHz	711.0MHz	
10MHz	QPSK	1	0	21.00	20.58	20.59	20.61	
			24	21.00	20.69	20.68	20.77	
			49	21.50	20.49	20.62	21.06	
		25	0	20.50	19.94	19.95	20.07	
			12	20.50	19.80	19.81	20.06	
			25	20.00	19.74	19.75	19.96	
	50	0	20.00	19.87	19.88	19.90		
	16QAM	1	0	20.50	20.05	20.06	20.08	
			24	20.50	19.97	19.98	20.00	
			49	20.50	20.01	20.02	20.04	
		25	0	19.50	19.43	19.44	19.46	
			12	19.50	19.29	19.30	19.32	
			25	19.50	19.23	19.24	19.26	
		50	0	19.50	19.36	19.37	19.39	

Band 17

LTE-FDD Band 17				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
5MHz	QPSK	1	0	21.50	21.01	21.03	20.68
			12	21.00	20.93	20.95	20.59
			24	21.00	20.97	20.99	20.63
		12	0	20.50	20.36	20.38	20.03
			6	20.50	20.21	20.23	19.89
			13	20.50	20.15	20.17	19.83
	25	0	20.50	20.29	20.31	19.96	
	16QAM	1	0	20.50	20.48	20.49	20.15
			12	20.50	20.39	20.41	20.06
			24	20.50	20.43	20.45	20.10
		12	0	20.00	19.84	19.86	19.52
			6	20.00	19.70	19.71	19.38
			13	20.00	19.64	19.65	19.32
		25	0	20.00	19.77	19.79	19.45

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
10MHz	QPSK	1	0	21.50	21.09	21.11	20.75
			24	21.00	20.99	20.70	20.72
			49	21.00	20.67	20.55	20.63
		25	0	20.50	20.44	19.62	20.11
			12	20.50	20.29	19.77	19.96
			25	20.50	20.22	19.55	19.90
	50	0	20.50	20.36	20.38	20.03	
	16QAM	1	0	21.00	20.55	20.57	20.22
			24	20.50	20.47	20.49	20.14
			49	21.00	20.51	20.52	20.17
		25	0	20.00	19.91	19.93	19.59
			12	20.00	19.77	19.79	19.45
			25	20.00	19.71	19.73	19.39
		50	0	20.00	19.84	19.86	19.52

Band 66

LTE-FDD Band 66					Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131979	132322	132665	
					1710.7MHz	1745.0MHz	1779.3MHz	
1.4MHz	QPSK	1	0	23.50	23.14	23.10	22.85	
			2	23.50	23.05	23.01	22.76	
			5	23.50	23.09	23.05	22.81	
		3	0	22.50	22.43	22.39	22.14	
			2	22.50	22.26	22.22	21.98	
			3	22.50	22.19	22.16	21.92	
	6	0	22.50	22.34	22.31	22.06		
	16QAM	1	0	23.00	22.55	22.51	22.27	
			2	22.50	22.46	22.42	22.18	
			5	23.00	22.50	22.46	22.22	
		3	0	22.00	21.85	21.81	21.58	
			2	22.00	21.69	21.65	21.42	
			3	22.00	21.62	21.59	21.35	
		6	0	22.00	21.77	21.73	21.50	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131987	132322
3MHz		QPSK	1	0	23.50	23.16	23.12	22.87
	7			23.50	23.07	23.03	22.78	
	14			23.50	23.11	23.07	22.83	
	8		0	22.50	22.45	22.41	22.16	
			4	22.50	22.28	22.24	22.00	
			7	22.50	22.21	22.18	21.94	
	15	0	22.50	22.36	22.33	22.08		
	16QAM	1	0	23.00	22.57	22.53	22.29	
			7	22.50	22.48	22.44	22.20	
			14	23.00	22.52	22.48	22.24	
		8	0	22.00	21.87	21.83	21.60	
			4	22.00	21.71	21.67	21.44	
			7	22.00	21.64	21.61	21.37	
		15	0	22.00	21.79	21.75	21.52	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	1711.5MHz	1745.0MHz

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131997	132322	132647
					1712.5MHz	1745.0MHz	1777.5MHz
5MHz	QPSK	1	0	23.50	23.18	23.14	22.89
			13	23.50	23.09	23.05	22.80
			24	23.50	23.13	23.09	22.84
		12	0	22.50	22.46	22.42	22.18
			6	22.50	22.30	22.26	22.02
			13	22.50	22.23	22.19	21.95
	25	0	22.50	22.38	22.34	22.10	
	16QAM	1	0	23.00	22.58	22.55	22.30
			13	22.50	22.49	22.46	22.21
			24	23.00	22.54	22.50	22.25
		12	0	22.00	21.88	21.85	21.61
			6	22.00	21.72	21.69	21.45
13			22.00	21.66	21.62	21.39	
25	0	22.00	21.80	21.77	21.53		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132022	132322	132622
					1715.0MHz	1745.0MHz	1775.0MHz
10MHz	QPSK	1	0	23.50	23.19	23.15	22.90
			25	23.50	23.10	23.06	22.81
			49	23.50	23.14	23.10	22.85
		25	0	22.50	22.47	22.43	22.19
			13	22.50	22.31	22.27	22.03
			25	22.50	22.24	22.20	21.96
	50	0	22.50	22.39	22.35	22.11	
	16QAM	1	0	23.00	22.60	22.56	22.31
			25	23.00	22.50	22.47	22.22
			49	23.00	22.55	22.51	22.27
		25	0	22.00	21.89	21.86	21.62
			13	22.00	21.73	21.70	21.46
25			22.00	21.67	21.63	21.40	
50	0	22.00	21.82	21.78	21.54		

LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		132047	132322	132597
					1717.50MHz	1745.0MHz	1772.50MHz
15MHz	QPSK	1	0	23.50	23.15	23.11	22.86
			38	23.50	23.06	23.02	22.77
			74	23.50	23.10	23.06	22.81
		36	0	22.50	22.43	22.39	22.15
			18	22.50	22.27	22.23	21.99
			39	22.50	22.20	22.16	21.92
	75	0	22.50	22.35	22.31	22.07	
	16QAM	1	0	23.00	22.56	22.52	22.27
			38	22.50	22.47	22.43	22.19
			74	23.00	22.51	22.47	22.23
		36	0	22.00	21.86	21.82	21.58
			18	22.00	21.70	21.66	21.43
39			22.00	21.63	21.59	21.36	
75	0	22.00	21.78	21.74	21.51		

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132072	132322	132572
					1720.0MHz	1745.0MHz	1770.0MHz
20MHz	QPSK	1	0	23.50	23.22	23.18	22.93
			50	24.00	23.62	23.49	23.33
			99	23.50	23.21	23.08	22.89
		50	0	22.50	22.45	22.46	22.22
			25	22.50	22.49	22.30	22.06
			50	22.50	22.38	22.23	21.99
	100	0	22.50	22.42	22.38	22.14	
	16QAM	1	0	23.00	22.62	22.59	22.34
			50	23.00	22.53	22.50	22.25
			99	23.00	22.58	22.54	22.29
		50	0	22.00	21.92	21.89	21.65
			25	22.00	21.76	21.73	21.49
			50	22.00	21.70	21.66	21.43
		100	0	22.00	21.84	21.81	21.57

Band 71

LTE-FDD Band 71				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		133147	133297	133447
					665.5MHz	680.5MHz	695.5MHz
5MHz	QPSK	1	0	22.50	20.88	22.18	22.46
			13	23.00	22.09	22.34	22.66
			24	23.00	21.97	22.23	22.53
		12	0	22.00	21.00	21.44	21.51
			6	22.00	21.05	21.34	21.66
			13	22.00	20.83	21.16	21.50
	25	0	22.00	20.90	21.29	21.50	
	16QAM	1	0	21.50	21.00	21.30	21.32
			13	22.00	21.31	21.42	21.52
			24	21.50	21.19	21.35	21.40
		12	0	21.00	19.97	20.36	20.57
			6	21.00	20.09	20.35	20.69
			13	20.50	19.85	20.20	20.46
		25	0	21.00	19.90	20.36	20.58
Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133172	133297
					668.0MHz	680.5MHz	693.0MHz
10MHz	QPSK	1	0	22.50	21.94	22.18	22.33
			25	23.00	22.21	22.48	22.78
			49	23.00	22.04	22.31	22.60
		25	0	22.00	21.36	21.60	21.38
			13	22.00	21.12	21.40	21.67
			25	22.00	21.27	21.27	21.54
	50	0	21.50	21.26	21.48	21.46	
	16QAM	1	0	21.50	21.36	21.36	21.35
			25	22.00	21.83	21.65	21.76
			49	22.00	21.55	21.49	21.59
		25	0	21.00	20.40	20.63	20.51
			13	21.00	20.18	20.42	20.74
			25	21.00	20.34	20.30	20.61
		50	0	21.00	20.35	20.50	20.50

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133197	133297	133397
					670.5MHz	680.5MHz	690.5MHz
15MHz	QPSK	1	0	22.50	21.79	21.95	22.10
			38	23.00	22.03	22.32	22.53
			74	22.50	22.07	22.17	22.47
		36	0	21.50	21.19	21.38	21.22
			18	22.00	21.09	21.31	21.51
			39	22.00	21.38	21.32	21.62
	75	0	21.50	21.27	21.33	21.46	
	16QAM	1	0	22.00	21.25	21.11	21.50
			38	22.00	21.55	21.45	21.84
			74	22.00	21.62	21.38	21.85
		36	0	20.50	20.19	20.34	20.24
			18	20.50	20.09	20.34	20.45
			39	21.00	20.36	20.31	20.60
		75	0	20.50	20.30	20.33	20.43
Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133222	133322
					673.0MHz	683.0MHz	688.0MHz
20MHz	QPSK	1	0	22.00	21.62	21.84	21.91
			50	22.50	22.22	22.45	22.48
			99	22.50	22.04	22.30	22.30
		50	0	22.00	21.04	21.60	21.44
			25	21.50	21.10	21.33	21.45
			50	22.00	20.95	21.73	21.68
	100	0	22.00	20.99	21.69	21.55	
	16QAM	1	0	21.50	20.83	21.00	21.46
			50	22.00	21.45	21.65	21.97
			99	22.00	21.27	21.46	21.90
		50	0	21.00	20.11	20.65	20.43
			25	20.50	20.10	20.36	20.42
			50	21.00	20.01	20.79	20.67
		100	0	21.00	20.00	20.67	20.58

8.4 Wi-Fi

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	16.50	17.00	No
		6	2437	16.89	17.00	Yes
		11	2462	16.53	17.00	No
	802.11g	1	2412	16.11	16.50	No
		6	2437	15.75	16.00	No
		11	2462	15.41	15.50	No
	802.11n(HT20)	1	2412	15.75	16.00	No
		6	2437	15.67	16.00	No
		11	2462	15.60	16.00	No
	802.11n(HT40)	3	2422	15.49	15.50	No
		6	2437	15.38	15.50	No
		9	2452	15.12	15.50	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2W/kg.

8.5 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
	GFSK	-5.00	-5.36	-5.90	-5.68
	π/4QPSK	-2.50	-2.99	-3.50	-3.34
	8DPSK	-2.00	-2.35	-2.87	-2.47

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Power thresholds (mW)	RF exposure evaluation required
0	2.402	-2.00	0.63	0	2.79	No
0	2.402	-2.00	0.63	10	10.39	No

Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at *test separation distances* ≤ 40 cm are determined by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad \text{(B. 2)}$$

where

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad \text{(B. 1)}$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20\text{cm}}$ is per Formula (B.1).

- *When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.
- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
 - The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

9. Test Exclusion Consideration

Antenna information:



WWAN Main Antenna	GSM/WCDMA/LTE TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
Note: 1. KDB 447498 D01v06, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 2.5cm. 2. Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR < 1.2W/Kg.	

Distance of The Antenna to the EUT surface and edge (mm)						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	<25	<25	55	<25	142	<25
BT/Wifi	<25	<25	<25	60	<25	137

Positions for SAR tests: Hotspot mode						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	Yes	Yes	No	Yes	No	Yes
BT/Wifi	Yes	Yes	Yes	No	Yes	No

9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

Mode	Channel	Frequency (GHz)	Max tune-up power (dBm)	Max. Power (mW)	Exposure Position	Head	Body-worn
					Test Dist.(mm)	5	10
BT	0	2.402	-2.00	0.63	Estimated SAR(W/kg)	0.026	0.013

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Per FCC KDB 447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{(\text{peak location separation,mm})} < 0.04$$

10. Test Result

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 850 voice	Left Cheek	190	836.6	-1.160	0.270	100.00	1.000	33.53	34.00	1.114	0.301	1#
	Left Tilt	190	836.6	0.990	0.153	100.00	1.000	33.53	34.00	1.114	0.170	/
	Right Cheek	190	836.6	-1.820	0.264	100.00	1.000	33.53	34.00	1.114	0.294	/
	Right Tilt	190	836.6	-3.510	0.159	100.00	1.000	33.53	34.00	1.114	0.177	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 850+4slots	Front	190	836.6	-2.850	0.240	100.00	1.000	30.36	30.50	1.033	0.248	/
	Back	190	836.6	2.570	0.370	100.00	1.000	30.36	30.50	1.033	0.382	2#
	Right	190	836.6	0.221	0.164	100.00	1.000	30.36	30.50	1.033	0.169	/
	Bottom	190	836.6	0.054	0.151	100.00	1.000	30.36	30.50	1.033	0.156	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 1900 voice	Left Cheek	661	1880.0	-4.651	0.200	100.00	1.000	29.93	30.00	1.016	0.203	3#
	Left Tilt	661	1880.0	0.090	0.136	100.00	1.000	29.93	30.00	1.016	0.138	/
	Right Cheek	661	1880.0	-0.400	0.194	100.00	1.000	29.93	30.00	1.016	0.197	/
	Right Tilt	661	1880.0	1.510	0.129	100.00	1.000	29.93	30.00	1.016	0.131	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 1900+4slots	Front	661	1880.0	-1.620	0.311	100.00	1.000	26.76	27.00	1.057	0.329	4#
	Back	661	1880.0	-3.280	0.281	100.00	1.000	26.76	27.00	1.057	0.297	/
	Right	661	1880.0	0.322	0.195	100.00	1.000	26.76	27.00	1.057	0.206	/
	Bottom	661	1880.0	0.155	0.125	100.00	1.000	26.76	27.00	1.057	0.132	/
Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Left Cheek	9400	1880.0	-2.940	0.194	100.00	1.000	22.89	23.00	1.026	0.199	5#
	Left Tilt	9400	1880.0	0.990	0.139	100.00	1.000	22.89	23.00	1.026	0.143	/
	Right Cheek	9400	1880.0	-1.100	0.142	100.00	1.000	22.89	23.00	1.026	0.146	/
	Right Tilt	9400	1880.0	0.510	0.105	100.00	1.000	22.89	23.00	1.026	0.108	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Front	9400	1880.0	-3.040	0.332	100.00	1.000	22.89	23.00	1.026	0.341	6#
	Back	9400	1880.0	1.350	0.307	100.00	1.000	22.89	23.00	1.026	0.315	/
	Right	9400	1880.0	0.665	0.194	100.00	1.000	22.89	23.00	1.026	0.199	/
	Bottom	9400	1880.0	-3.600	0.145	100.00	1.000	22.89	23.00	1.026	0.149	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 4 (RMC*)	Left Cheek	1413	1732.6	-0.900	0.272	100.00	1.000	22.82	23.00	1.042	0.283	7#
	Left Tilt	1413	1732.6	0.890	0.222	100.00	1.000	22.82	23.00	1.042	0.231	/
	Right Cheek	1413	1732.6	1.610	0.213	100.00	1.000	22.82	23.00	1.042	0.222	/
	Right Tilt	1413	1732.6	-3.010	0.196	100.00	1.000	22.82	23.00	1.042	0.204	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 4 (RMC*)	Front	1413	1732.6	-3.850	0.463	100.00	1.000	22.82	23.00	1.042	0.482	/
	Back	1413	1732.6	-2.610	0.503	100.00	1.000	22.82	23.00	1.042	0.524	8#
	Right	1413	1732.6	-4.300	0.241	100.00	1.000	22.82	23.00	1.042	0.251	/
	Bottom	1413	1732.6	1.159	0.240	100.00	1.000	22.82	23.00	1.042	0.250	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Left Cheek	4182	836.4	-2.200	0.183	100.00	1.000	22.26	22.50	1.057	0.193	9#
	Left Tilt	4182	836.4	0.977	0.100	100.00	1.000	22.26	22.50	1.057	0.106	/
	Right Cheek	4182	836.4	-3.910	0.178	100.00	1.000	22.26	22.50	1.057	0.188	/
	Right Tilt	4182	836.4	-2.510	0.096	100.00	1.000	22.26	22.50	1.057	0.101	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Front	4182	836.4	2.900	0.167	100.00	1.000	22.26	22.50	1.057	0.177	/
	Back	4182	836.4	-3.010	0.263	100.00	1.000	22.26	22.50	1.057	0.278	10#
	Right	4182	836.4	0.338	0.114	100.00	1.000	22.26	22.50	1.057	0.120	/
	Bottom	4182	836.4	2.316	0.085	100.00	1.000	22.26	22.50	1.057	0.090	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Left Cheek	18700	1860.0	-1.930	0.221	100.00	1.000	23.24	23.50	1.062	0.235	/
		Left Tilt	18700	1860.0	0.890	0.116	100.00	1.000	23.24	23.50	1.062	0.123	/
		Right Cheek	18700	1860.0	1.530	0.243	100.00	1.000	23.24	23.50	1.062	0.258	11#
		Right Tilt	18700	1860.0	-3.110	0.134	100.00	1.000	23.24	23.50	1.062	0.142	/
	50%RB	Left Cheek	18700	1860.0	3.190	0.188	100.00	1.000	22.20	22.50	1.072	0.202	/
		Left Tilt	18700	1860.0	0.551	0.085	100.00	1.000	22.20	22.50	1.072	0.091	/
		Right Cheek	18700	1860.0	1.220	0.213	100.00	1.000	22.20	22.50	1.072	0.228	/
		Right Tilt	18700	1860.0	2.014	0.102	100.00	1.000	22.20	22.50	1.072	0.109	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Front	18700	1860.0	-0.950	0.511	100.00	1.000	23.24	23.50	1.062	0.543	12#
		Back	18700	1860.0	1.880	0.459	100.00	1.000	23.24	23.50	1.062	0.487	/
		Right	18700	1860.0	0.775	0.268	100.00	1.000	23.24	23.50	1.062	0.285	/
		Bottom	18700	1860.0	2.110	0.244	100.00	1.000	23.24	23.50	1.062	0.259	/
	50%RB	Front	18700	1860.0	-1.023	0.478	100.00	1.000	22.20	22.50	1.072	0.512	/
		Back	18700	1860.0	0.653	0.428	100.00	1.000	22.20	22.50	1.072	0.459	/
		Right	18700	1860.0	-0.322	0.238	100.00	1.000	22.20	22.50	1.072	0.255	/
		Bottom	18700	1860.0	2.315	0.211	100.00	1.000	22.20	22.50	1.072	0.226	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Left Cheek	20070	1722.0	0.150	0.332	100.00	1.000	23.45	23.50	1.012	0.336	/
		Left Tilt	20070	1722.0	0.991	0.226	100.00	1.000	23.45	23.50	1.012	0.229	/
		Right Cheek	20070	1722.0	4.100	0.363	100.00	1.000	23.45	23.50	1.012	0.367	13#
		Right Tilt	20070	1722.0	-3.115	0.259	100.00	1.000	23.45	23.50	1.012	0.262	/
	50%RB	Left Cheek	20070	1722.0	2.056	0.300	100.00	1.000	22.33	22.50	1.040	0.312	/
		Left Tilt	20070	1722.0	-0.123	0.196	100.00	1.000	22.33	22.50	1.040	0.204	/
		Right Cheek	20070	1722.0	2.401	0.270	100.00	1.000	22.33	22.50	1.040	0.281	/
		Right Tilt	20070	1722.0	-2.110	0.165	100.00	1.000	22.33	22.50	1.040	0.172	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Front	20070	1722.0	-4.350	0.694	100.00	1.000	23.45	23.50	1.012	0.702	14#
		Back	20070	1722.0	1.950	0.688	100.00	1.000	23.45	23.50	1.012	0.696	/
		Right	20070	1722.0	2.078	0.328	100.00	1.000	23.45	23.50	1.012	0.332	/
		Bottom	20070	1722.0	1.355	0.298	100.00	1.000	23.45	23.50	1.012	0.302	/
	50%RB	Front	20070	1722.0	2.142	0.629	100.00	1.000	22.33	22.50	1.040	0.654	/
		Back	20070	1722.0	3.125	0.612	100.00	1.000	22.33	22.50	1.040	0.636	/
		Right	20070	1722.0	2.511	0.266	100.00	1.000	22.33	22.50	1.040	0.277	/
		Bottom	20070	1722.0	0.802	0.237	100.00	1.000	22.33	22.50	1.040	0.246	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Left Cheek	20600	844.0	-1.760	0.225	100.00	1.000	21.21	21.50	1.069	0.241	15#
		Left Tilt	20600	844.0	0.920	0.131	100.00	1.000	21.21	21.50	1.069	0.140	/
		Right Cheek	20600	844.0	-1.410	0.211	100.00	1.000	21.21	21.50	1.069	0.226	/
		Right Tilt	20600	844.0	-0.510	0.124	100.00	1.000	21.21	21.50	1.069	0.133	/

50%RB	Left Cheek	20600	844.0	0.220	0.210	100.00	1.000	20.28	20.50	1.052	0.221	/	
	Left Tilt	20600	844.0	1.162	0.115	100.00	1.000	20.28	20.50	1.052	0.121	/	
	Right Cheek	20600	844.0	-1.203	0.197	100.00	1.000	20.28	20.50	1.052	0.207	/	
	Right Tilt	20600	844.0	2.110	0.111	100.00	1.000	20.28	20.50	1.052	0.117	/	
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Front	20600	844.0	-2.050	0.196	100.00	1.000	21.21	21.50	1.069	0.210	/
		Back	20600	844.0	-2.240	0.329	100.00	1.000	21.21	21.50	1.069	0.352	16#
		Right	20600	844.0	0.230	0.108	100.00	1.000	21.21	21.50	1.069	0.115	/
		Bottom	20600	844.0	-2.014	0.050	100.00	1.000	21.21	21.50	1.069	0.053	/
	50%RB	Front	20600	844.0	0.230	0.181	100.00	1.000	20.28	20.50	1.052	0.190	/
		Back	20600	844.0	1.115	0.313	100.00	1.000	20.28	20.50	1.052	0.329	/
		Right	20600	844.0	-1.205	0.094	100.00	1.000	20.28	20.50	1.052	0.099	/
		Bottom	20600	844.0	-2.011	0.033	100.00	1.000	20.28	20.50	1.052	0.035	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 12 (BW: 10MHz)	1RB	Left Cheek	23130	711.0	1.020	0.184	100.00	1.000	21.06	21.50	1.107	0.204	/
		Left Tilt	23130	711.0	0.900	0.089	100.00	1.000	21.06	21.50	1.107	0.099	/
		Right Cheek	23130	711.0	1.370	0.192	100.00	1.000	21.06	21.50	1.107	0.213	17#
		Right Tilt	23130	711.0	-2.510	0.099	100.00	1.000	21.06	21.50	1.107	0.110	/
	50%RB	Left Cheek	23130	711.0	1.200	0.172	100.00	1.000	20.07	20.50	1.104	0.190	/
		Left Tilt	23130	711.0	1.048	0.076	100.00	1.000	20.07	20.50	1.104	0.084	/
		Right Cheek	23130	711.0	-0.304	0.180	100.00	1.000	20.07	20.50	1.104	0.199	/
		Right Tilt	23130	711.0	-0.112	0.086	100.00	1.000	20.07	20.50	1.104	0.095	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 12 (BW: 10MHz)	1RB	Front	23130	711.0	-2.060	0.231	100.00	1.000	21.06	21.50	1.107	0.256	/
		Back	23130	711.0	-3.970	0.411	100.00	1.000	21.06	21.50	1.107	0.455	18#
		Right	23130	711.0	2.331	0.231	100.00	1.000	21.06	21.50	1.107	0.256	/
		Bottom	23130	711.0	-0.338	0.149	100.00	1.000	21.06	21.50	1.107	0.165	/
	50%RB	Front	23130	711.0	2.610	0.218	100.00	1.000	20.07	20.50	1.104	0.241	/
		Back	23130	711.0	-0.235	0.399	100.00	1.000	20.07	20.50	1.104	0.440	/
		Right	23130	711.0	0.198	0.219	100.00	1.000	20.07	20.50	1.104	0.242	/
		Bottom	23130	711.0	0.315	0.136	100.00	1.000	20.07	20.50	1.104	0.150	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 17 (BW: 10MHz)	1RB	Left Cheek	23790	710.0	3.180	0.155	100.00	1.000	21.11	21.50	1.094	0.170	/
		Left Tilt	23790	710.0	0.890	0.099	100.00	1.000	21.11	21.50	1.094	0.108	/
		Right Cheek	23790	710.0	-1.580	0.183	100.00	1.000	21.11	21.50	1.094	0.200	19#
		Right Tilt	23790	710.0	-0.510	0.112	100.00	1.000	21.11	21.50	1.094	0.123	/
	50%RB	Left Cheek	23790	710.0	1.112	0.148	100.00	1.000	19.77	20.00	1.054	0.156	/
		Left Tilt	23790	710.0	1.230	0.093	100.00	1.000	19.77	20.00	1.054	0.098	/
		Right Cheek	23790	710.0	2.150	0.178	100.00	1.000	19.77	20.00	1.054	0.188	/
		Right Tilt	23790	710.0	-1.620	0.106	100.00	1.000	19.77	20.00	1.054	0.112	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 17 (BW: 10MHz)	1RB	Front	23790	710.0	-2.050	0.248	100.00	1.000	21.11	21.50	1.094	0.271	/
		Back	23790	710.0	-3.480	0.400	100.00	1.000	21.11	21.50	1.094	0.438	20#
		Right	23790	710.0	-1.003	0.211	100.00	1.000	21.11	21.50	1.094	0.231	/
		Bottom	23790	710.0	2.006	0.150	100.00	1.000	21.11	21.50	1.094	0.164	/
	50%RB	Front	23790	710.0	1.054	0.241	100.00	1.000	19.77	20.00	1.054	0.254	/
		Back	23790	710.0	0.221	0.394	100.00	1.000	19.77	20.00	1.054	0.415	/
		Right	23790	710.0	1.326	0.206	100.00	1.000	19.77	20.00	1.054	0.217	/
		Bottom	23790	710.0	-0.955	0.144	100.00	1.000	19.77	20.00	1.054	0.152	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 66 (BW: 20MHz)	1RB	Left Cheek	132072	1720.0	3.180	0.331	100.00	1.000	23.62	24.00	1.091	0.361	/
		Left Tilt	132072	1720.0	0.890	0.229	100.00	1.000	23.62	24.00	1.091	0.250	/
		Right Cheek	132072	1720.0	1.460	0.354	100.00	1.000	23.62	24.00	1.091	0.386	21#
		Right Tilt	132072	1720.0	-0.510	0.256	100.00	1.000	23.62	24.00	1.091	0.279	/
	50%RB	Left Cheek	132072	1720.0	1.112	0.273	100.00	1.000	22.49	22.50	1.002	0.274	/
		Left Tilt	132072	1720.0	1.230	0.170	100.00	1.000	22.49	22.50	1.002	0.170	/

		Right Cheek	132072	1720.0	2.150	0.297	100.00	1.000	22.49	22.50	1.002	0.298	/
		Right Tilt	132072	1720.0	-1.620	0.200	100.00	1.000	22.49	22.50	1.002	0.200	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 66 (BW: 20MHz)	1RB	Front	132072	1720.0	-2.050	0.619	100.00	1.000	23.62	24.00	1.091	0.675	/
		Back	132072	1720.0	-1.370	0.673	100.00	1.000	23.62	24.00	1.091	0.734	22#
		Right	132072	1720.0	-1.003	0.317	100.00	1.000	23.62	24.00	1.091	0.346	/
		Bottom	132072	1720.0	2.006	0.293	100.00	1.000	23.62	24.00	1.091	0.320	/
	50%RB	Front	132072	1720.0	1.054	0.561	100.00	1.000	22.49	22.50	1.002	0.562	/
		Back	132072	1720.0	0.221	0.614	100.00	1.000	22.49	22.50	1.002	0.615	/
		Right	132072	1720.0	1.326	0.260	100.00	1.000	22.49	22.50	1.002	0.261	/
		Bottom	132072	1720.0	-0.955	0.236	100.00	1.000	22.49	22.50	1.002	0.236	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 71 (BW: 20MHz)	1RB	Left Cheek	133372	688.0	-2.000	0.161	100.00	1.000	22.48	22.50	1.005	0.162	23#
		Left Tilt	133372	688.0	0.890	0.136	100.00	1.000	22.48	22.50	1.005	0.137	/
		Right Cheek	133372	688.0	-2.860	0.158	100.00	1.000	22.48	22.50	1.005	0.159	/
		Right Tilt	133372	688.0	3.290	0.131	100.00	1.000	22.48	22.50	1.005	0.132	/
	50%RB	Left Cheek	133372	688.0	3.190	0.140	100.00	1.000	21.68	22.00	1.076	0.151	/
		Left Tilt	133372	688.0	0.551	0.115	100.00	1.000	21.68	22.00	1.076	0.124	/
		Right Cheek	133372	688.0	1.220	0.136	100.00	1.000	21.68	22.00	1.076	0.146	/
		Right Tilt	133372	688.0	2.190	0.112	100.00	1.000	21.68	22.00	1.076	0.121	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 71 (BW: 20MHz)	1RB	Front	133372	688.0	2.200	0.475	100.00	1.000	22.48	22.50	1.005	0.477	/
		Back	133372	688.0	-1.470	0.508	100.00	1.000	22.48	22.50	1.005	0.511	24#
		Right	133372	688.0	-2.930	0.255	100.00	1.000	22.48	22.50	1.005	0.256	/
		Bottom	133372	688.0	1.130	0.192	100.00	1.000	22.48	22.50	1.005	0.193	/
	50%RB	Front	133372	688.0	-1.023	0.403	100.00	1.000	21.68	22.00	1.076	0.434	/
		Back	133372	688.0	0.653	0.443	100.00	1.000	21.68	22.00	1.076	0.477	/
		Right	133372	688.0	-0.322	0.180	100.00	1.000	21.68	22.00	1.076	0.194	/
		Bottom	133372	688.0	2.315	0.145	100.00	1.000	21.68	22.00	1.076	0.156	/

Head(0mm gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
2.4g (2.4~2.4835)	Left Cheek	6	2437	1.550	0.277	100.00	1.000	16.89	17.00	1.026	0.284	/	
	Left Tilt	6	2437	0.390	0.247	100.00	1.000	16.89	17.00	1.026	0.253	/	
	Right Cheek	6	2437	-4.620	0.478	100.00	1.000	16.89	17.00	1.026	0.490	25#	
	Right Tilt	6	2437	-3.310	0.297	100.00	1.000	16.89	17.00	1.026	0.305	/	
Body(hotspot open, 10mm Gap)													
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.	
2.4g (2.4~2.4835)	Front	6	2437	-2.750	0.132	100.00	1.000	16.89	17.00	1.026	0.135	/	
	Back	6	2437	-3.920	0.208	100.00	1.000	16.89	17.00	1.026	0.213	26#	
	Left	6	2437	-1.002	0.142	100.00	1.000	16.89	17.00	1.026	0.146	/	
	Top	6	2437	2.054	0.112	100.00	1.000	16.89	17.00	1.026	0.115	/	

Note:

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- Per KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor=10^[(tune-up limit power(dBm) - Ave.power power (dBm))/10], where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg)=Measured SAR (W/kg)/Scaling Factor.
- Per KDB865664D01 v01r04 perform a second repeated measurement only the ratio of largest to smallest SAR for the original and first repeated measurement is >1.20 or when the original or repeated measurement is ≥ 1.45W/kg.
- Perform a second measurement only if the original, first and second repeated measurement is ≥1.5w/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is >1.20.
- When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is $0.694 < 0.80$ W/kg, repeated measurement is not required.

12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna, Wifi/BT antenna supports 2.4G Wi-Fi and BT. The 2 antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

NO.	Configuration	Head	Body-worn
1	WWAN+WIFI(2.4g)	Yes	Yes
2	WWAN+BT	Yes	Yes

12.2 Sum SAR of Simultaneous Transmission

Head

Band	Test Position	Scaled SAR			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	Bluetooth				
GSM850 (voice)	Left Cheek	0.301	0.284	0.026	0.585	0.327	N/A	N/A
	Left Tilt	0.170	0.253	0.026	0.423	0.196	N/A	N/A
	Right Cheek	0.294	0.490	0.026	0.784	0.320	N/A	N/A
	Right Tilt	0.177	0.305	0.026	0.482	0.203	N/A	N/A
GSM1900 (voice)	Left Cheek	0.203	0.284	0.026	0.487	0.229	N/A	N/A
	Left Tilt	0.138	0.253	0.026	0.391	0.164	N/A	N/A
	Right Cheek	0.197	0.490	0.026	0.687	0.223	N/A	N/A
	Right Tilt	0.131	0.305	0.026	0.436	0.157	N/A	N/A
WCDMA Band II	Left Cheek	0.199	0.284	0.026	0.483	0.225	N/A	N/A
	Left Tilt	0.143	0.253	0.026	0.396	0.169	N/A	N/A
	Right Cheek	0.146	0.490	0.026	0.636	0.172	N/A	N/A
	Right Tilt	0.108	0.305	0.026	0.413	0.134	N/A	N/A
WCDMA Band IV	Left Cheek	0.283	0.284	0.026	0.567	0.309	N/A	N/A
	Left Tilt	0.231	0.253	0.026	0.484	0.257	N/A	N/A
	Right Cheek	0.222	0.490	0.026	0.712	0.248	N/A	N/A
	Right Tilt	0.204	0.305	0.026	0.509	0.230	N/A	N/A
WCDMA Band V	Left Cheek	0.193	0.284	0.026	0.477	0.219	N/A	N/A
	Left Tilt	0.106	0.253	0.026	0.359	0.132	N/A	N/A
	Right Cheek	0.188	0.490	0.026	0.678	0.214	N/A	N/A
	Right Tilt	0.101	0.305	0.026	0.406	0.127	N/A	N/A

Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	Bluetooth				
LTE Band 2 QPSK (20MHz)	Left Cheek	1RB	0.235	0.284	0.026	0.519	0.261	N/A	N/A
	Left Tilt		0.123	0.253	0.026	0.376	0.149	N/A	N/A
	Right Cheek		0.258	0.490	0.026	0.748	0.284	N/A	N/A
	Right Tilt	0.142	0.305	0.026	0.447	0.168	N/A	N/A	
	Left Cheek	50%RB	0.202	0.284	0.026	0.486	0.228	N/A	N/A
	Left Tilt		0.091	0.253	0.026	0.344	0.117	N/A	N/A
Right Cheek	0.228		0.490	0.026	0.718	0.254	N/A	N/A	
LTE Band 4 QPSK (20MHz)	Right Tilt	0.109	0.305	0.026	0.414	0.135	N/A	N/A	
	Left Cheek	1RB	0.336	0.284	0.026	0.620	0.362	N/A	N/A
	Left Tilt		0.229	0.253	0.026	0.482	0.255	N/A	N/A
	Right Cheek		0.367	0.490	0.026	0.857	0.393	N/A	N/A
	Right Tilt	0.262	0.305	0.026	0.567	0.288	N/A	N/A	
	Left Cheek	50%RB	0.312	0.284	0.026	0.596	0.338	N/A	N/A
Left Tilt	0.204		0.253	0.026	0.457	0.230	N/A	N/A	
Right Cheek	0.281		0.490	0.026	0.771	0.307	N/A	N/A	
LTE Band 5 QPSK (10MHz)	Right Tilt	0.172	0.305	0.026	0.477	0.198	N/A	N/A	
	Left Cheek	1RB	0.241	0.284	0.026	0.525	0.267	N/A	N/A
	Left Tilt		0.140	0.253	0.026	0.393	0.166	N/A	N/A
	Right Cheek		0.226	0.490	0.026	0.716	0.252	N/A	N/A
	Right Tilt	0.133	0.305	0.026	0.438	0.159	N/A	N/A	
	Left Cheek	50%RB	0.221	0.284	0.026	0.505	0.247	N/A	N/A
Left Tilt	0.121		0.253	0.026	0.374	0.147	N/A	N/A	
Right Cheek	0.207		0.490	0.026	0.697	0.233	N/A	N/A	
LTE Band 12 QPSK (10MHz)	Right Tilt	0.117	0.305	0.026	0.422	0.143	N/A	N/A	
	Left Cheek	1RB	0.204	0.284	0.026	0.488	0.230	N/A	N/A
	Left Tilt		0.099	0.253	0.026	0.352	0.125	N/A	N/A
	Right Cheek		0.213	0.490	0.026	0.703	0.239	N/A	N/A
	Right Tilt	0.110	0.305	0.026	0.415	0.136	N/A	N/A	
	Left Cheek	50%RB	0.190	0.284	0.026	0.474	0.216	N/A	N/A
Left Tilt	0.084		0.253	0.026	0.337	0.110	N/A	N/A	
Right Cheek	0.199		0.490	0.026	0.689	0.225	N/A	N/A	
LTE Band 17 QPSK (10MHz)	Right Tilt	0.095	0.305	0.026	0.400	0.121	N/A	N/A	
	Left Cheek	1RB	0.170	0.284	0.026	0.454	0.196	N/A	N/A
	Left Tilt		0.108	0.253	0.026	0.361	0.134	N/A	N/A
	Right Cheek		0.200	0.490	0.026	0.690	0.226	N/A	N/A
	Right Tilt	0.123	0.305	0.026	0.428	0.149	N/A	N/A	
Right Cheek	50%RB	0.156	0.284	0.026	0.440	0.182	N/A	N/A	
			0.098	0.253	0.026	0.351	0.124	N/A	N/A

	Right Tilt		0.188	0.490	0.026	0.678	0.214	N/A	N/A
			0.112	0.305	0.026	0.417	0.138	N/A	N/A
LTE Band 66 QPSK (20MHz)	Left Cheek	1RB	0.361	0.284	0.026	0.645	0.387	N/A	N/A
	Left Tilt		0.250	0.253	0.026	0.503	0.276	N/A	N/A
	Right Cheek		0.386	0.490	0.026	0.876	0.412	N/A	N/A
	Right Tilt		0.279	0.305	0.026	0.584	0.305	N/A	N/A
	Left Cheek	50%RB	0.274	0.284	0.026	0.558	0.300	N/A	N/A
	Left Tilt		0.170	0.253	0.026	0.423	0.196	N/A	N/A
	Right Cheek		0.298	0.490	0.026	0.788	0.324	N/A	N/A
Right Tilt	0.200		0.305	0.026	0.505	0.226	N/A	N/A	
LTE Band 71 QPSK (20MHz)	Left Cheek	1RB	0.162	0.284	0.026	0.446	0.188	N/A	N/A
	Left Tilt		0.137	0.253	0.026	0.390	0.163	N/A	N/A
	Right Cheek		0.159	0.490	0.026	0.649	0.185	N/A	N/A
	Right Tilt		0.132	0.305	0.026	0.437	0.158	N/A	N/A
	Left Cheek	50%RB	0.151	0.284	0.026	0.435	0.177	N/A	N/A
	Left Tilt		0.124	0.253	0.026	0.377	0.150	N/A	N/A
	Right Cheek		0.146	0.490	0.026	0.636	0.172	N/A	N/A
	Right Tilt		0.121	0.305	0.026	0.426	0.147	N/A	N/A

Hotspot(body-worn)

Band	Test Position	Scaled SAR			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	Bluetooth				
GSM850 (GPRS 4slots)	Front	0.248	0.135	0.013	0.383	0.261	N/A	N/A
	Back	0.382	0.213	0.013	0.595	0.395	N/A	N/A
	Left	/	0.146	0.013	0.146	0.013	N/A	N/A
	Right	0.169	/	/	0.169	0.169	N/A	N/A
	Top	/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom	0.156	/	/	0.156	0.156	N/A	N/A
GSM1900 (GPRS 4slots)	Front	0.329	0.135	0.013	0.464	0.342	N/A	N/A
	Back	0.297	0.213	0.013	0.510	0.310	N/A	N/A
	Left	/	0.146	0.013	0.146	0.013	N/A	N/A
	Right	0.206	/	/	0.206	0.206	N/A	N/A
	Top	/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom	0.132	/	/	0.132	0.132	N/A	N/A
WCDMA Band II	Front	0.341	0.135	0.013	0.476	0.354	N/A	N/A
	Back	0.315	0.213	0.013	0.528	0.328	N/A	N/A
	Left	/	0.146	0.013	0.146	0.013	N/A	N/A
	Right	0.199	/	/	0.199	0.199	N/A	N/A
	Top	/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom	0.149	/	/	0.149	0.149	N/A	N/A
WCDMA Band IV	Front	0.482	0.135	0.013	0.617	0.495	N/A	N/A
	Back	0.524	0.213	0.013	0.737	0.537	N/A	N/A
	Left	/	0.146	0.013	0.146	0.013	N/A	N/A
	Right	0.251	/	/	0.251	0.251	N/A	N/A
	Top	/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom	0.250	/	/	0.250	0.250	N/A	N/A
WCDMA Band V	Front	0.177	0.135	0.013	0.312	0.190	N/A	N/A
	Back	0.278	0.213	0.013	0.491	0.291	N/A	N/A
	Left	/	0.146	0.013	0.146	0.013	N/A	N/A
	Right	0.120	/	/	0.120	0.120	N/A	N/A
	Top	/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom	0.090	/	/	0.090	0.090	N/A	N/A

Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	Bluetooth				
LTE Band 2 QPSK (20MHz)	Front	1RB	0.543	0.135	0.013	0.678	0.556	N/A	N/A
	Back		0.487	0.213	0.013	0.700	0.500	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.285	/	/	0.285	0.285	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.259	/	/	0.259	0.259	N/A	N/A
	Front	50%RB	0.512	0.135	0.013	0.647	0.525	N/A	N/A
	Back		0.459	0.213	0.013	0.672	0.472	N/A	N/A

	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.255	/	/	0.255	0.255	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.226	/	/	0.226	0.226	N/A	N/A
LTE Band 4 QPSK (20MHz)	Front	1RB	0.702	0.135	0.013	0.837	0.715	N/A	N/A
	Back		0.696	0.213	0.013	0.909	0.709	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.332	/	/	0.332	0.332	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.302	/	/	0.302	0.302	N/A	N/A
	Front	50%RB	0.654	0.135	0.013	0.789	0.667	N/A	N/A
	Back		0.636	0.213	0.013	0.849	0.649	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.277	/	/	0.277	0.277	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.246	/	/	0.246	0.246	N/A	N/A
LTE Band 5 QPSK (10MHz)	Front	1RB	0.210	0.135	0.013	0.345	0.223	N/A	N/A
	Back		0.352	0.213	0.013	0.565	0.365	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.115	/	/	0.115	0.115	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.053	/	/	0.053	0.053	N/A	N/A
	Front	50%RB	0.190	0.135	0.013	0.325	0.203	N/A	N/A
	Back		0.329	0.213	0.013	0.542	0.342	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.099	/	/	0.099	0.099	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.035	/	/	0.035	0.035	N/A	N/A
LTE Band 12 QPSK (10MHz)	Front	1RB	0.256	0.135	0.013	0.391	0.269	N/A	N/A
	Back		0.455	0.213	0.013	0.668	0.468	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.256	/	/	0.256	0.256	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.165	/	/	0.165	0.165	N/A	N/A
	Front	50%RB	0.241	0.135	0.013	0.376	0.254	N/A	N/A
	Back		0.440	0.213	0.013	0.653	0.453	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.242	/	/	0.242	0.242	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.150	/	/	0.150	0.150	N/A	N/A
LTE Band 17 QPSK (10MHz)	Front	1RB	0.271	0.135	0.013	0.406	0.284	N/A	N/A
	Back		0.438	0.213	0.013	0.651	0.451	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.231	/	/	0.231	0.231	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.164	/	/	0.164	0.164	N/A	N/A
	Front	50%RB	0.254	0.135	0.013	0.389	0.267	N/A	N/A
	Back		0.415	0.213	0.013	0.628	0.428	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.217	/	/	0.217	0.217	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.152	/	/	0.152	0.152	N/A	N/A
LTE Band 66 QPSK (20MHz)	Front	1RB	0.675	0.135	0.013	0.810	0.688	N/A	N/A
	Back		0.734	0.213	0.013	0.947	0.747	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.346	/	/	0.346	0.346	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.320	/	/	0.320	0.320	N/A	N/A
	Front	50%RB	0.562	0.135	0.013	0.697	0.575	N/A	N/A
	Back		0.615	0.213	0.013	0.828	0.628	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.261	/	/	0.261	0.261	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.236	/	/	0.236	0.236	N/A	N/A
LTE Band 71 QPSK (20MHz)	Front	1RB	0.477	0.135	0.013	0.612	0.490	N/A	N/A
	Back		0.511	0.213	0.013	0.724	0.524	N/A	N/A
	Left		/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.256	/	/	0.256	0.256	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.236	/	/	0.236	0.236	N/A	N/A

	Bottom		0.193	/	/	0.193	0.193	N/A	N/A
	Front		0.434	0.135	0.013	0.569	0.447	N/A	N/A
	Back		0.477	0.213	0.013	0.690	0.490	N/A	N/A
	Left	50%RB	/	0.146	0.013	0.146	0.013	N/A	N/A
	Right		0.194	/	/	0.194	0.194	N/A	N/A
	Top		/	0.115	0.013	0.115	0.013	N/A	N/A
	Bottom		0.156	/	/	0.156	0.156	N/A	N/A

13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	04/22 EPGO365	2023/02/06	2024/02/05
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2022/11/24	2023/11/23
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2022/11/24	2023/11/23
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2022/11/24	2023/11/23
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2023/03/25	2024/03/24
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2023/03/25	2024/03/24
10dB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2023/03/25	2024/03/24
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2023/03/25	2024/03/24
750MHz Validation Dipole	MVG	SID750	07/22 DIP 0G835-655	2023/02/06	2024/02/05
835MHz Validation Dipole	MVG	SID835	07/22 DIP 0G835-656	2023/02/06	2024/02/05
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2023/02/06	2024/02/05
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2023/02/06	2024/02/05
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2023/02/06	2024/02/05
2600MHz Validation Dipole	MVG	SID2600	07/22 DIP 2G600-663	2023/02/06	2024/02/05
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	/	/
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2022/11/24	2023/11/23
Thermometer	Riters	DT-232	21A11	2023/03/25	2024/03/24
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/
SAM Phantom	MVG	SAM	07/22 SAM149	/	/
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	/	/
Mechanical Calibration Kit	PNA	/	/	/	/
Open SAR test software	MVG	/	V5.3.5	/	/

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	41.80	0.89	0.86	0.24%	3.37%	±5%	20.0	19/4/2023
835	41.50	41.41	0.90	0.87	0.22%	3.33%	±5%	20.0	19/4/2023
1800	40.00	39.91	1.40	1.37	0.23%	2.14%	±5%	20.0	20/4/2023
1900	40.00	39.88	1.40	1.41	0.30%	-0.71%	±5%	20.0	20/4/2023
2450	39.20	39.08	1.80	1.81	0.31%	-0.56%	±5%	20.0	21/4/2023
2600	39.00	38.88	1.96	1.97	0.31%	-0.51%	±5%	20.0	21/4/2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	1g SAR (W/Kg)	10g SAR (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Deviation	10g SAR Deviation
750	16	0.138	0.092	8.63	5.75	8.25	5.38	4.55%	6.88%
835	16	0.163	0.106	10.19	6.63	9.79	6.17	4.06%	7.37%
1800	16	0.588	0.312	36.75	19.50	39.33	20.61	-6.56%	-5.39%
1900	16	0.630	0.322	39.38	20.13	40.97	20.7	-3.89%	-2.78%
2450	16	0.793	0.352	49.56	22.00	54.4	23.86	-8.89%	-7.80%
2600	16	0.866	0.421	54.13	26.31	57.14	24.48	-5.28%	7.49%

System Performance Check Data (750 MHz)

System check at 750 MHz

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	750.000
Relative permittivity (real part)	41.800
Relative permittivity (imaginary part)	21.460
Conductivity (S/m)	0.860

C. SAR Surface and Volume

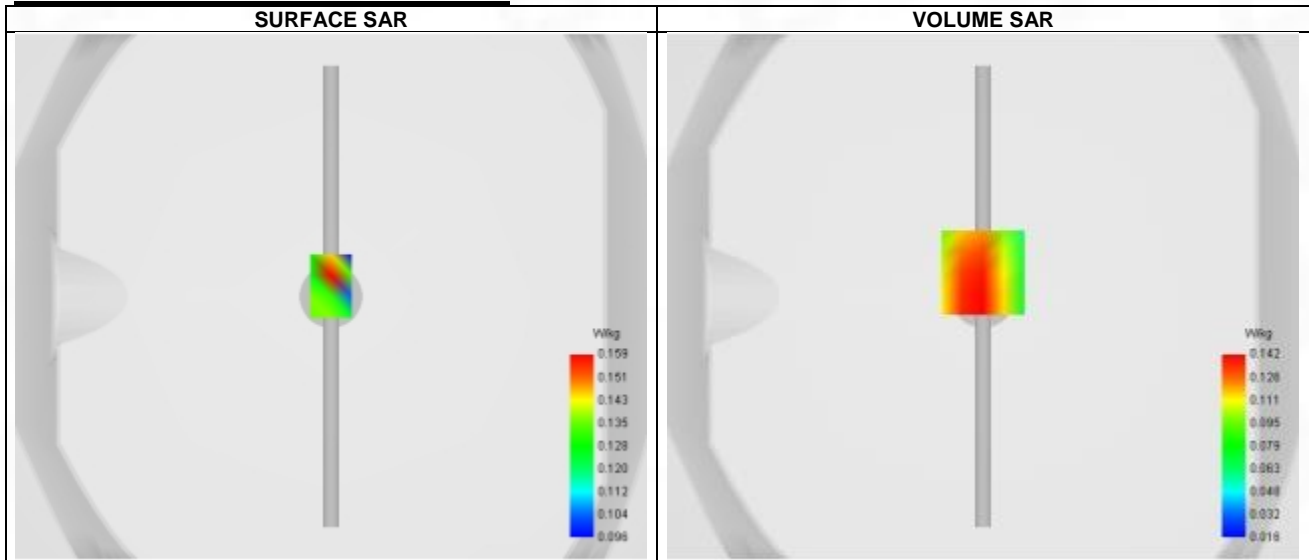


Maximum location: X=0.00, Y=9.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.138
Variation (%)	-2.190
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.287	0.142	0.092	0.073	0.042

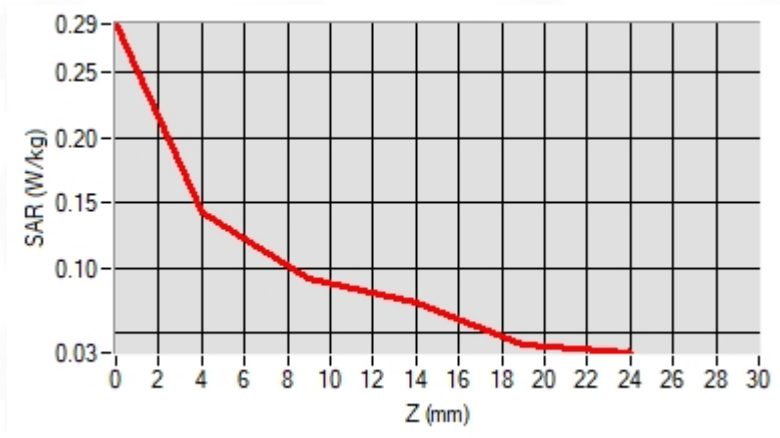

F. 3D Image

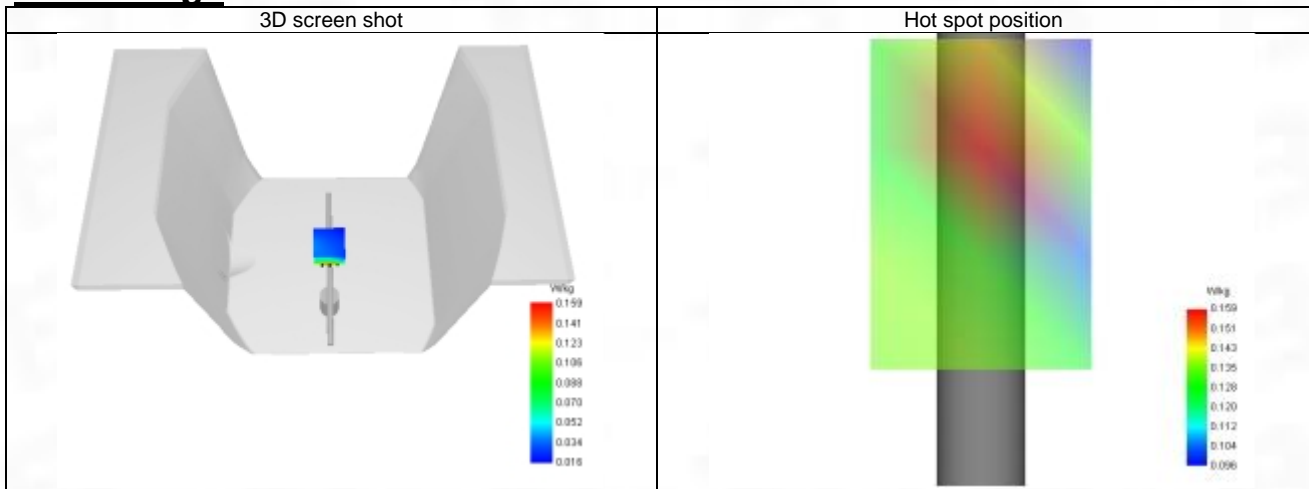

System Performance Check Data (835 MHz)

System check at 835 MHz

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	41.410
Relative permittivity (imaginary part)	19.490
Conductivity (S/m)	0.870

C. SAR Surface and Volume

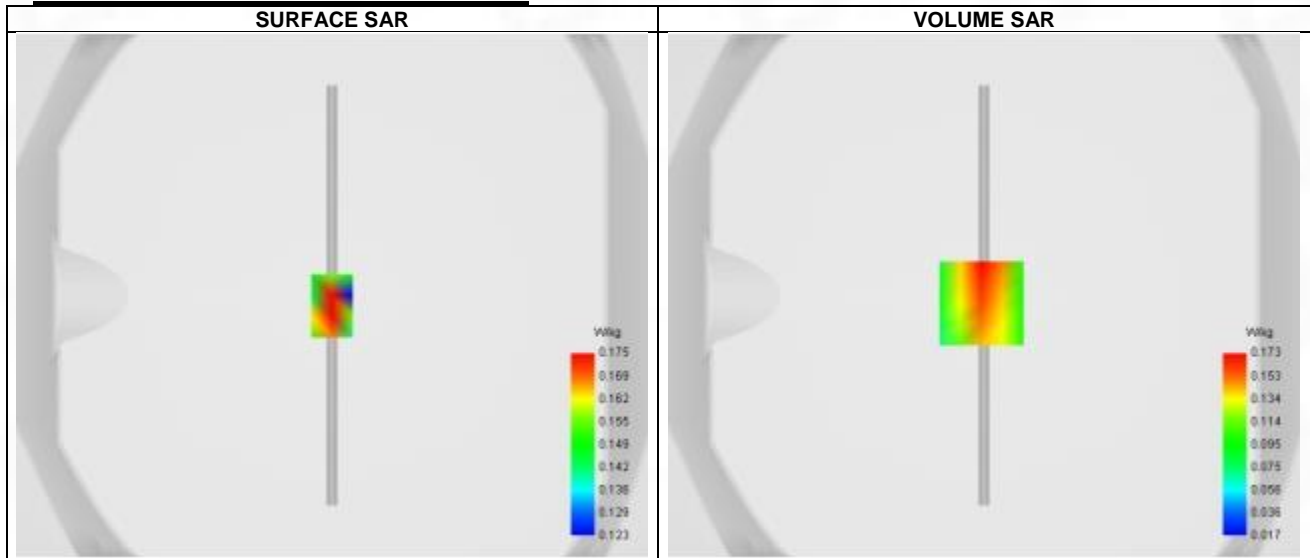


Maximum location: X=-1.00, Y=-3.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.163
Variation (%)	-3.390
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.059	0.173	0.115	0.061	0.072

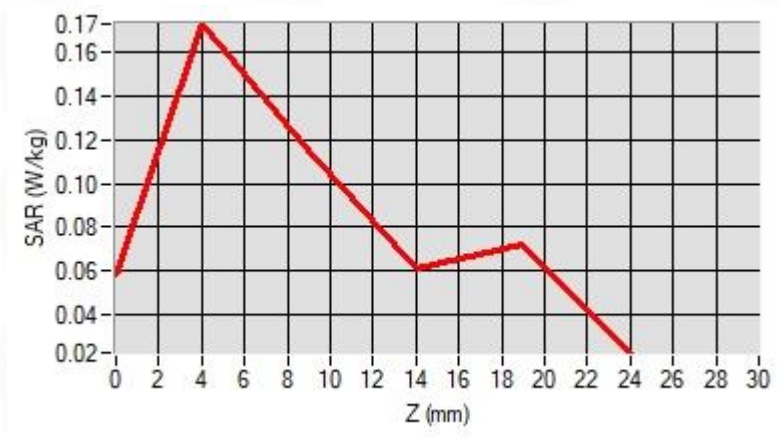

F. 3D Image

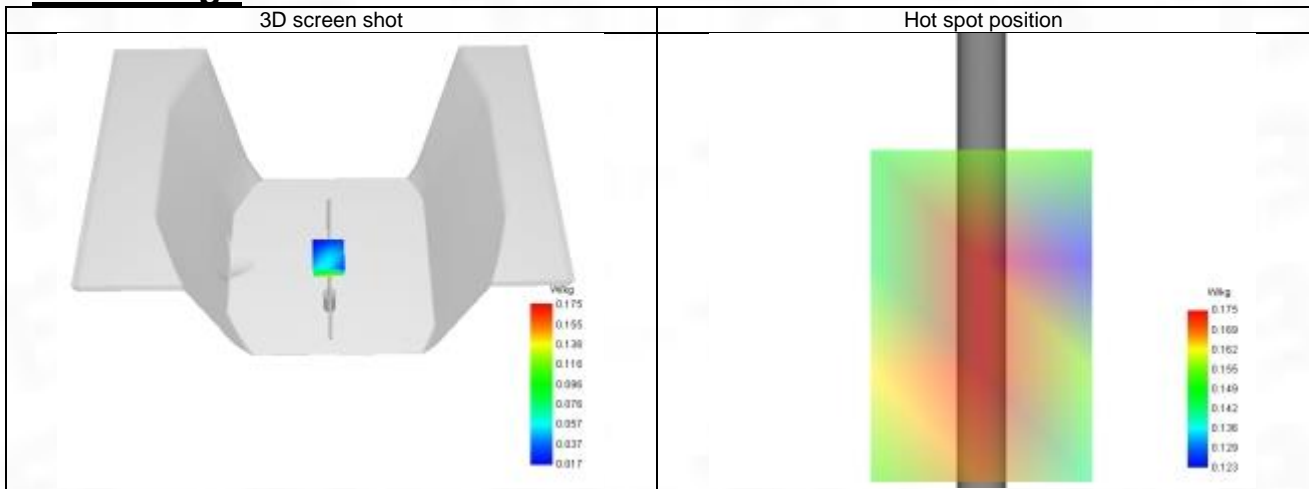

System Performance Check Data (1800 MHz)

System check at 1800 MHz

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	39.910
Relative permittivity (imaginary part)	14.090
Conductivity (S/m)	1.370

C. SAR Surface and Volume

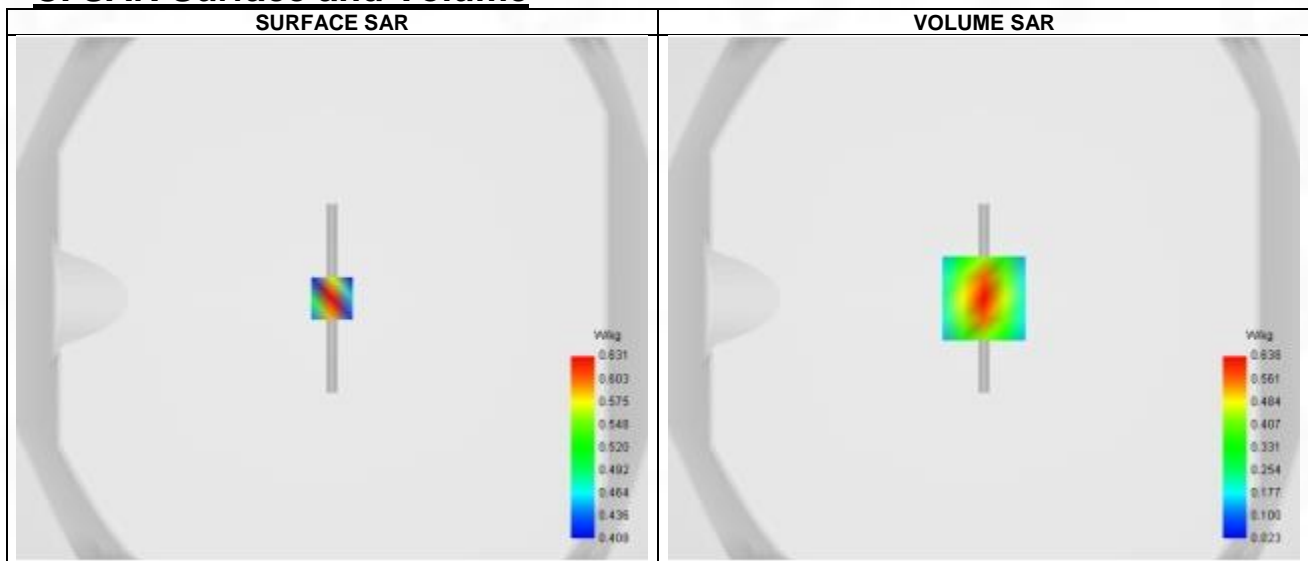


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.588
Variation (%)	-0.250
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.003	0.638	0.356	0.204	0.127

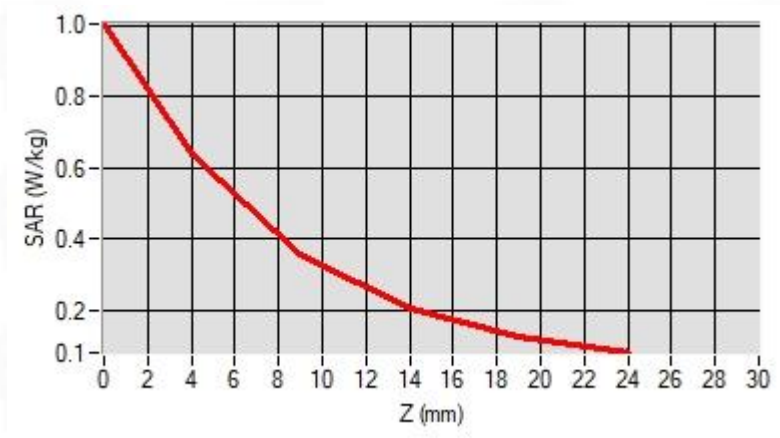

F. 3D Image

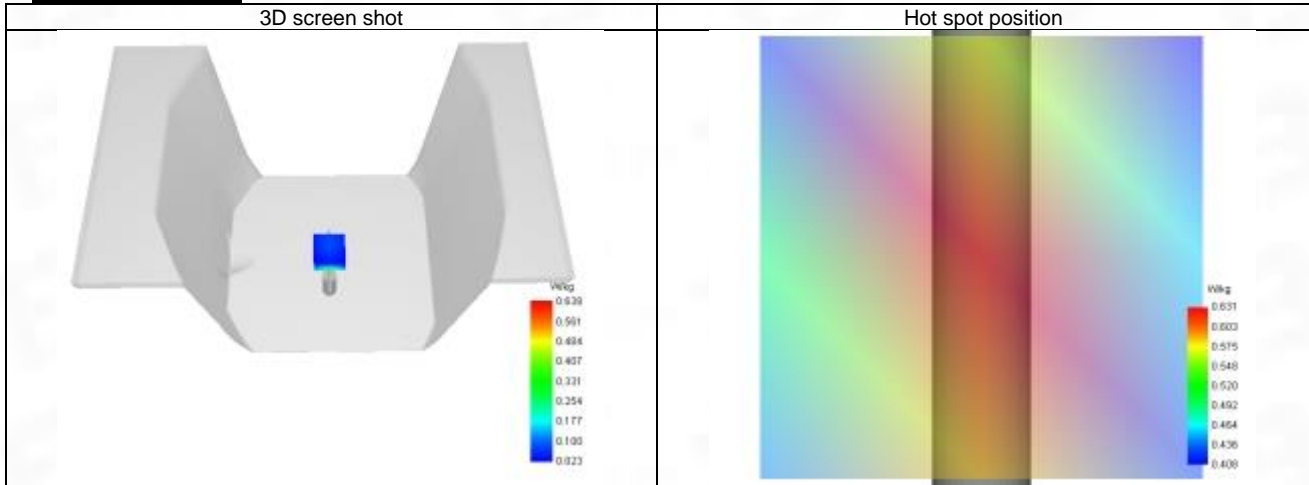

System Performance Check Data (1900 MHz)

System check at 1900 MHz

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

C. SAR Surface and Volume

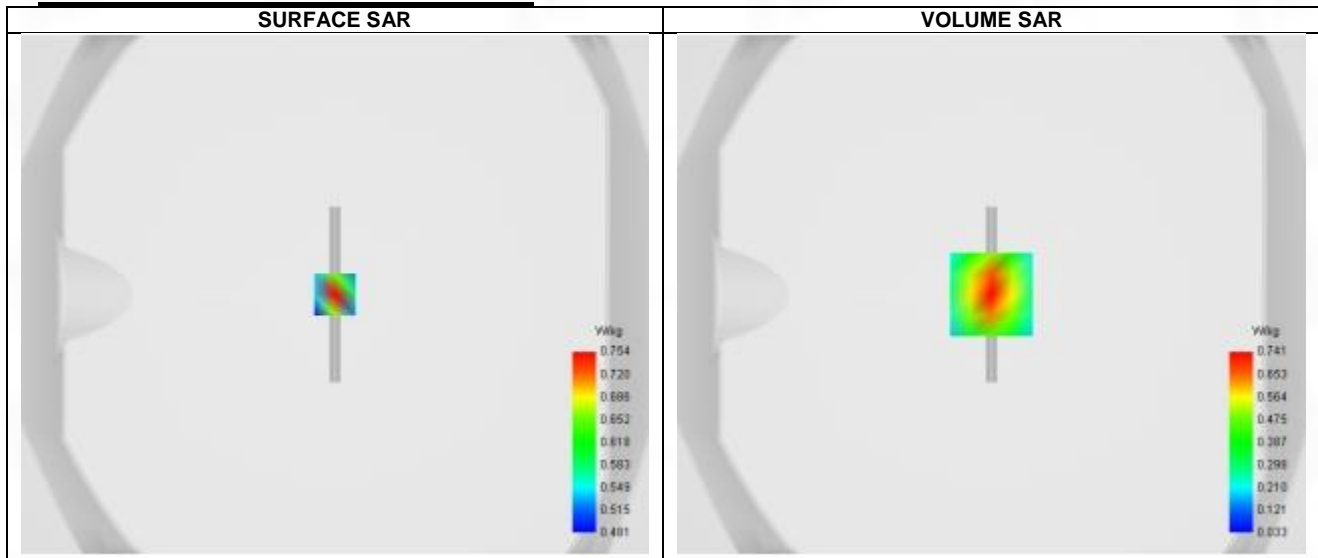


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.630
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.201	0.759	0.402	0.239	0.156

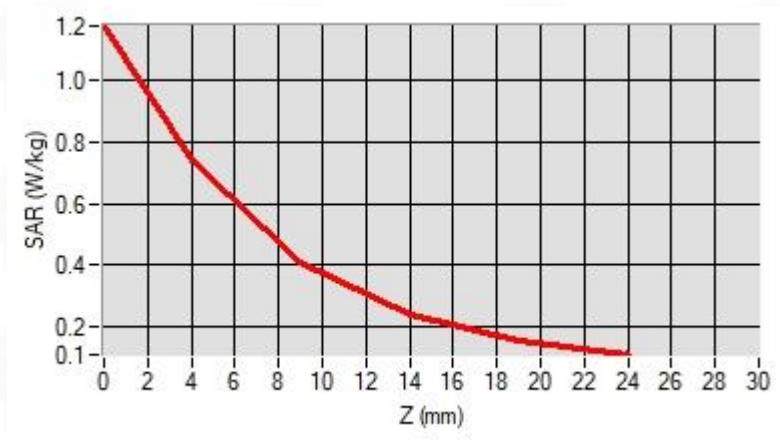

F. 3D Image

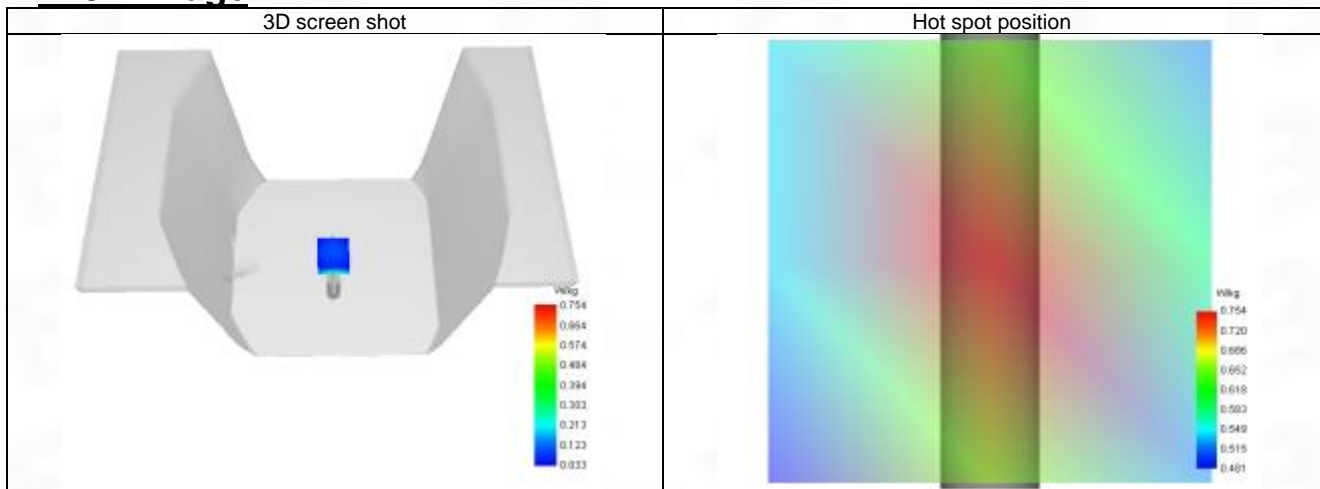

System Performance Check Data (2450 MHz)

System check at 2450 MHz

Date of measurement: 21/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	39.080
Relative permittivity (imaginary part)	13.340
Conductivity (S/m)	1.810

C. SAR Surface and Volume

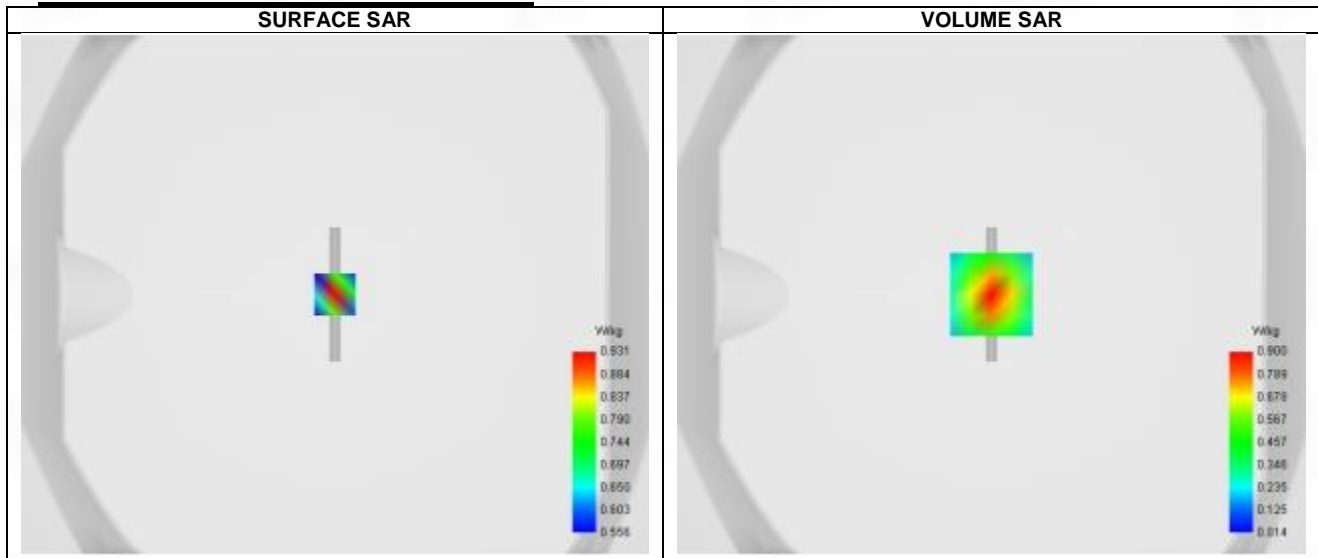


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.793
Variation (%)	-2.570
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.466	0.900	0.477	0.261	0.158

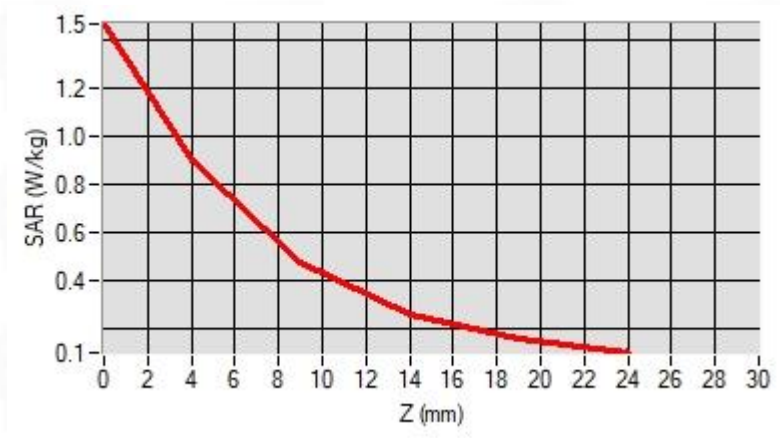

F. 3D Image

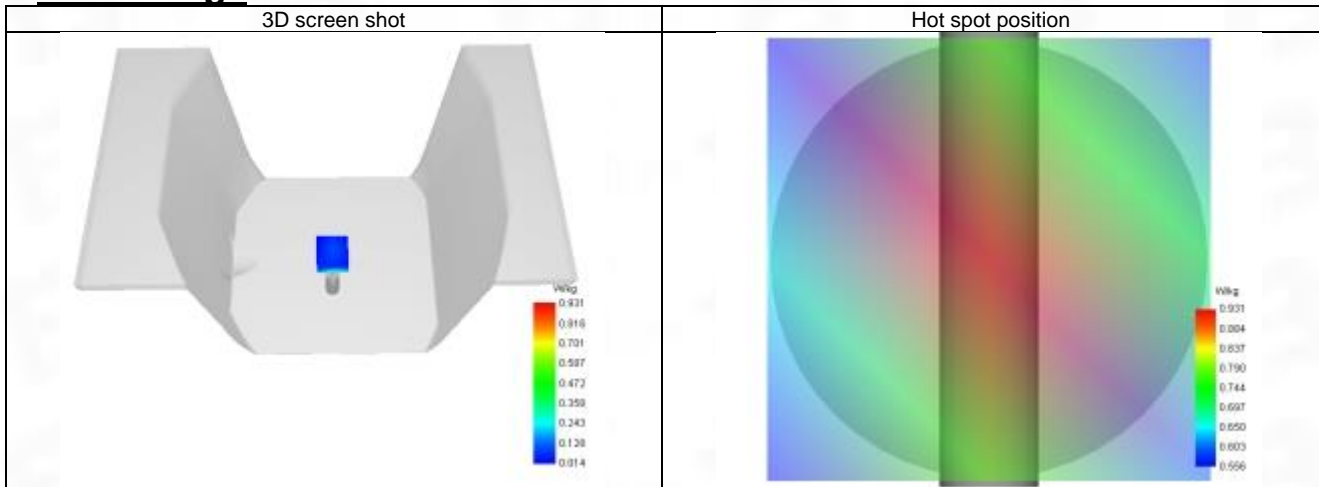

System Performance Check Data (2600 MHz)

System check at 2600 MHz

Date of measurement: 21/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	38.880
Relative permittivity (imaginary part)	12.690
Conductivity (S/m)	1.970

C. SAR Surface and Volume

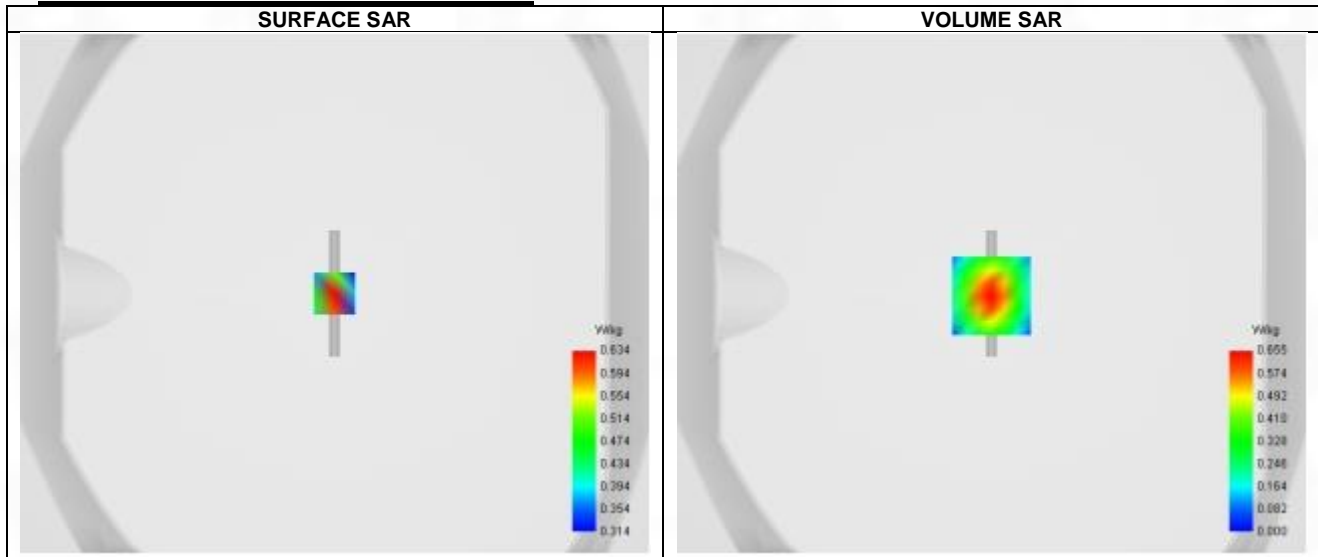


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 1.02 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.421
SAR 1g (W/Kg)	0.866
Variation (%)	2.980
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.020	0.655	0.359	0.187	0.091

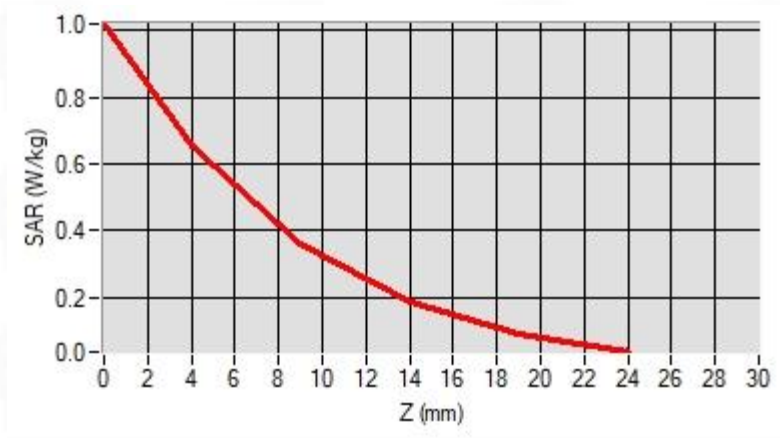

F. 3D Image

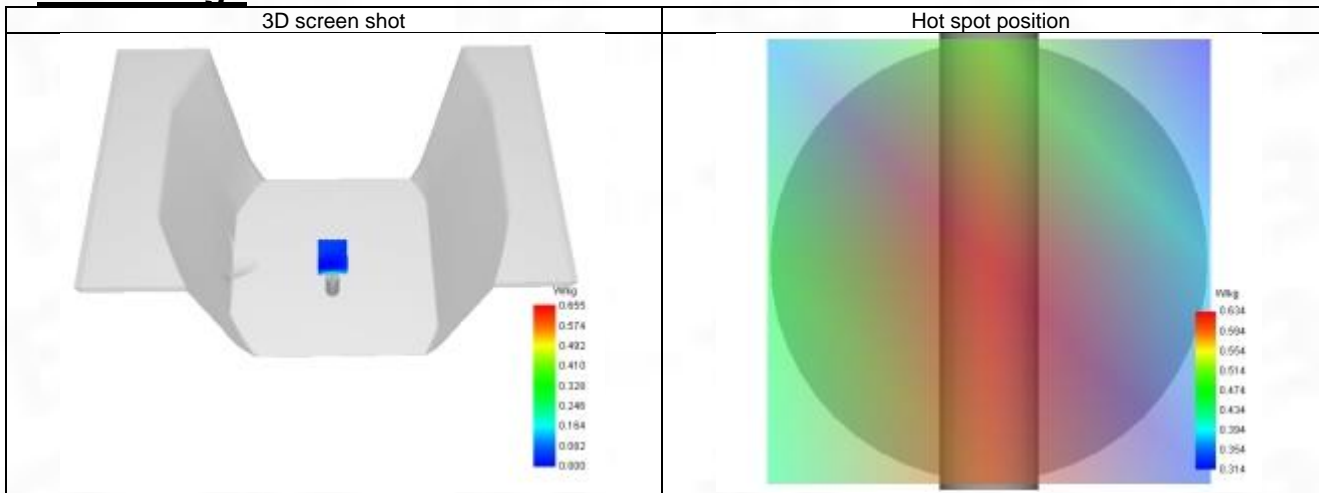

ANNEX C Test Data

1-Head with front position in dist. 0mm on Channel 190 in GSM850 voice

SAR Measurement at GSM850 (Cheek, Left)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle (190)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	836.600
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.492
Conductivity (S/m)	0.871

C. SAR Surface and Volume

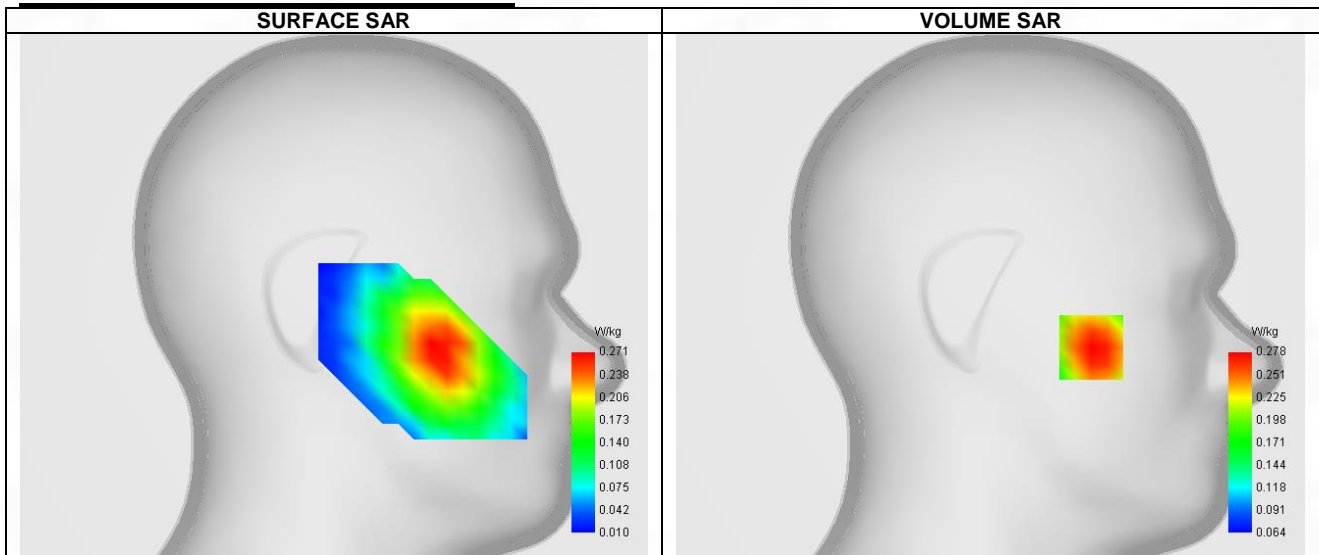

Maximum location: X=-50.00, Y=-26.00 ; SAR Peak: 0.35 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.200
SAR 1g (W/Kg)	0.270
Variation (%)	-1.160
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
--------	------	------	------	-------	-------

SAR (W/Kg)	0.348	0.278	0.213	0.168	0.137
------------	-------	-------	-------	-------	-------

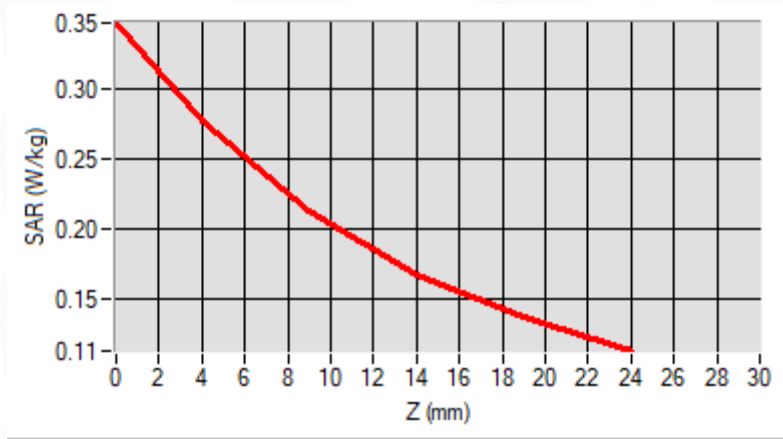

F. 3D Image

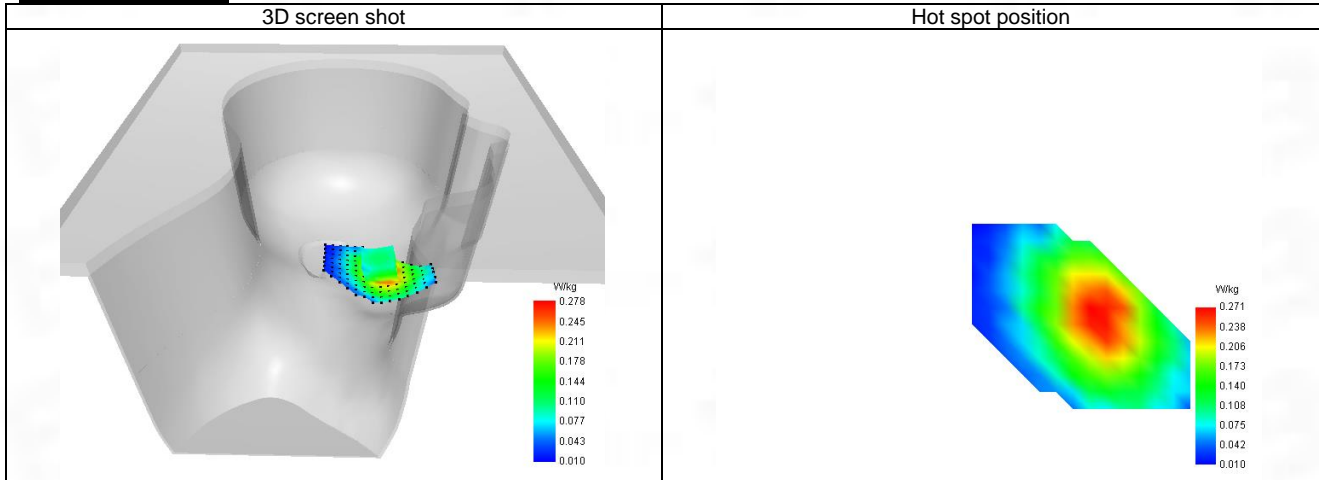

2-Body with back position in dist. 10mm on Channel 190 in GPRS850+4slots

SAR Measurement at GPRS850 (Body, Validation Plane)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Channels	Middle (190)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

B. Permittivity

Frequency (MHz)	836.600
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.492
Conductivity (S/m)	0.871

C. SAR Surface and Volume

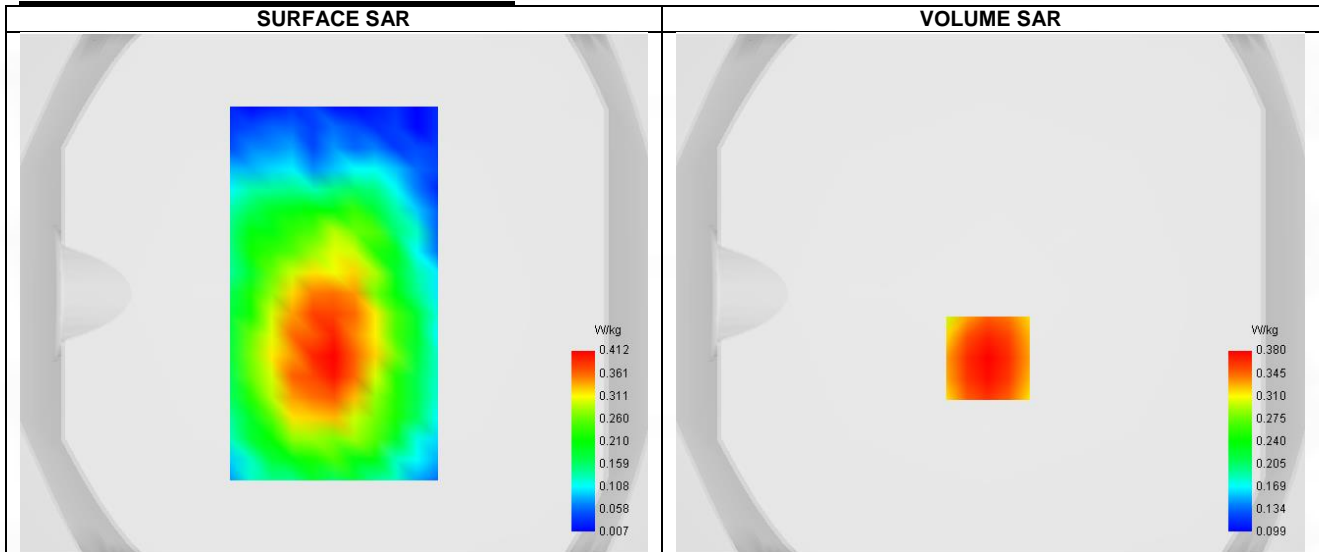


Maximum location: X=-1.00, Y=-25.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.272
SAR 1g (W/Kg)	0.370
Variation (%)	2.570
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.481	0.380	0.286	0.222	0.178

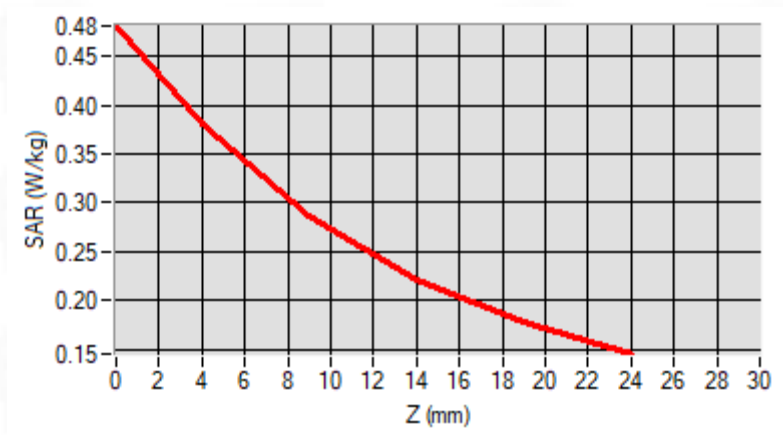

F. 3D Image

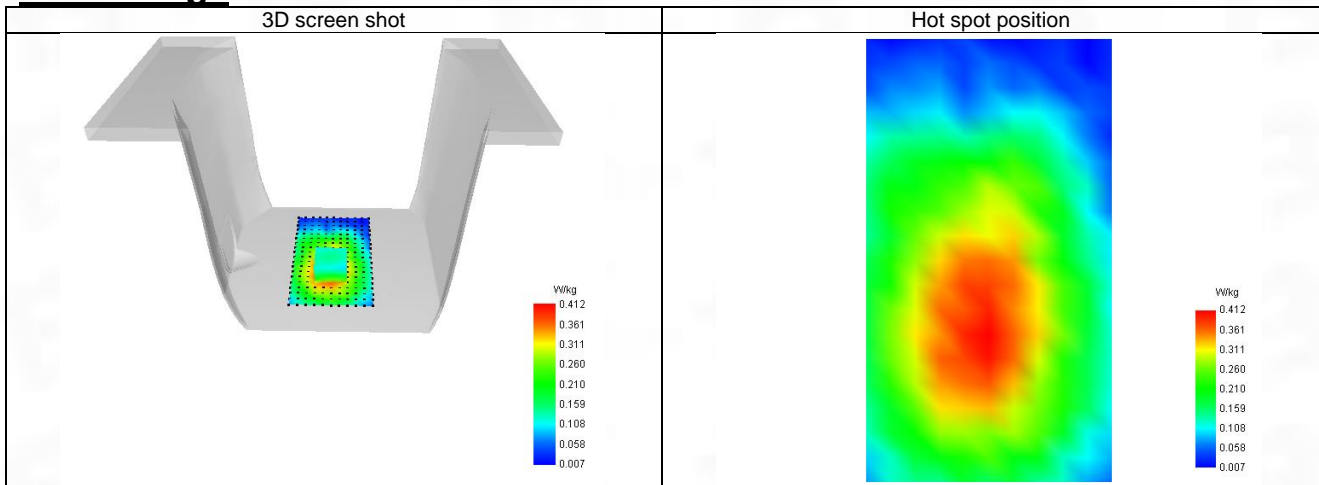

3-Head with front position in dist. 0mm on Channel 661 in GSM1900 voice

SAR Measurement at GSM1900 (Cheek, Left)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle (661)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	1880.000
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

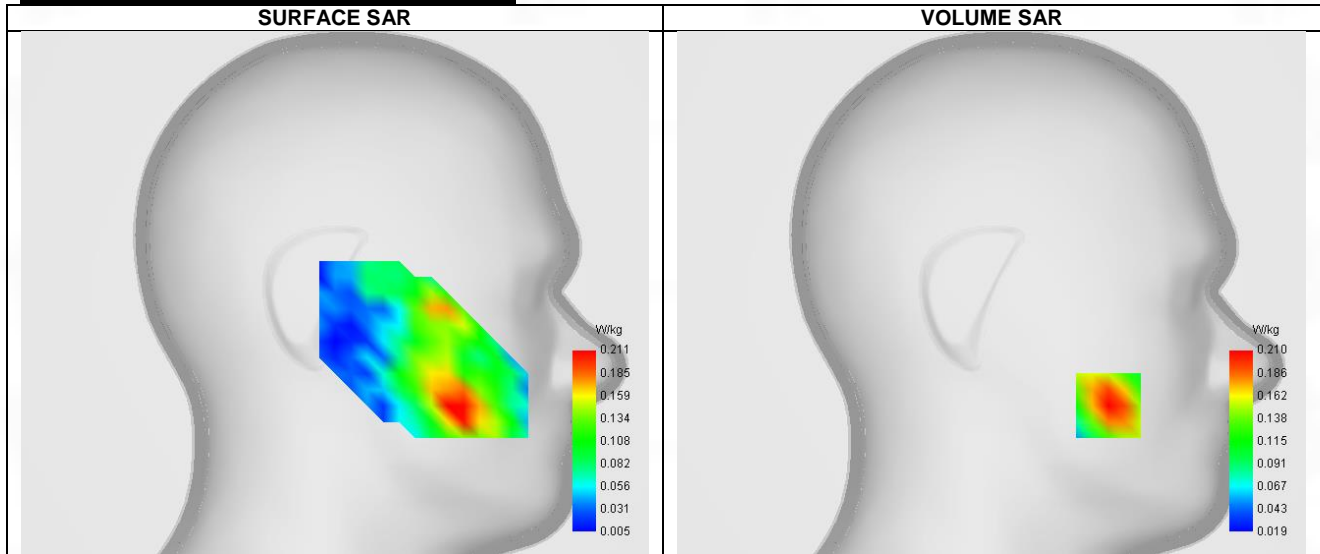


Maximum location: X=-58.00, Y=-56.00 ; SAR Peak: 0.28 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.200
Variation (%)	-4.650
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.267	0.210	0.147	0.095	0.053

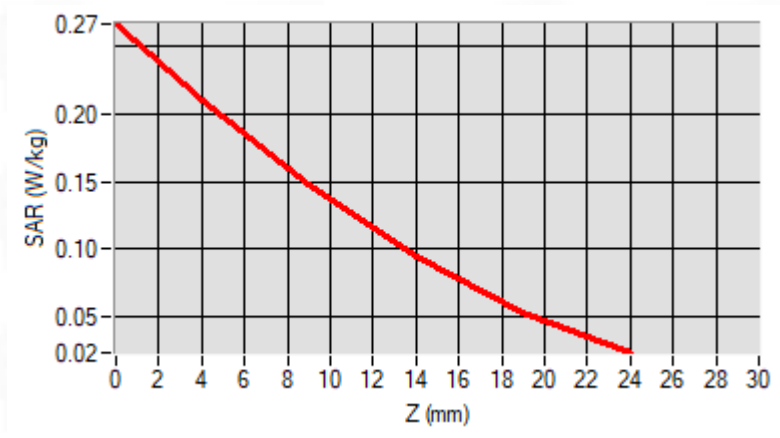

F. 3D Image

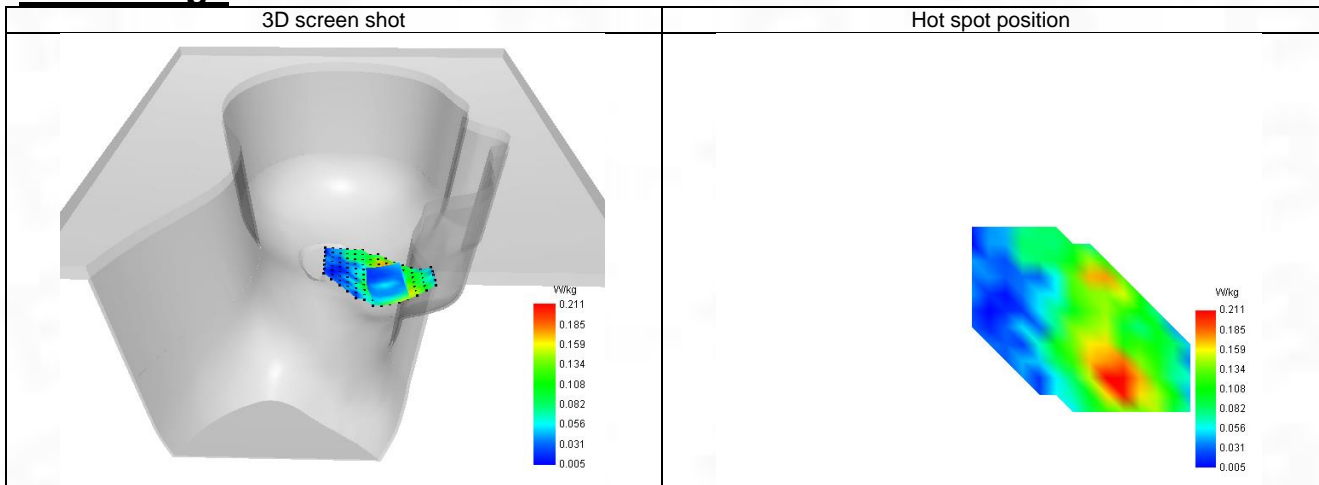

4- Body with front position in dist. 10mm on Channel 661 in GPRS1900+4slots

SAR Measurement at GPRS1900 (Body, Validation Plane)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Channels	Middle (661)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

B. Permittivity

Frequency (MHz)	1880.000
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

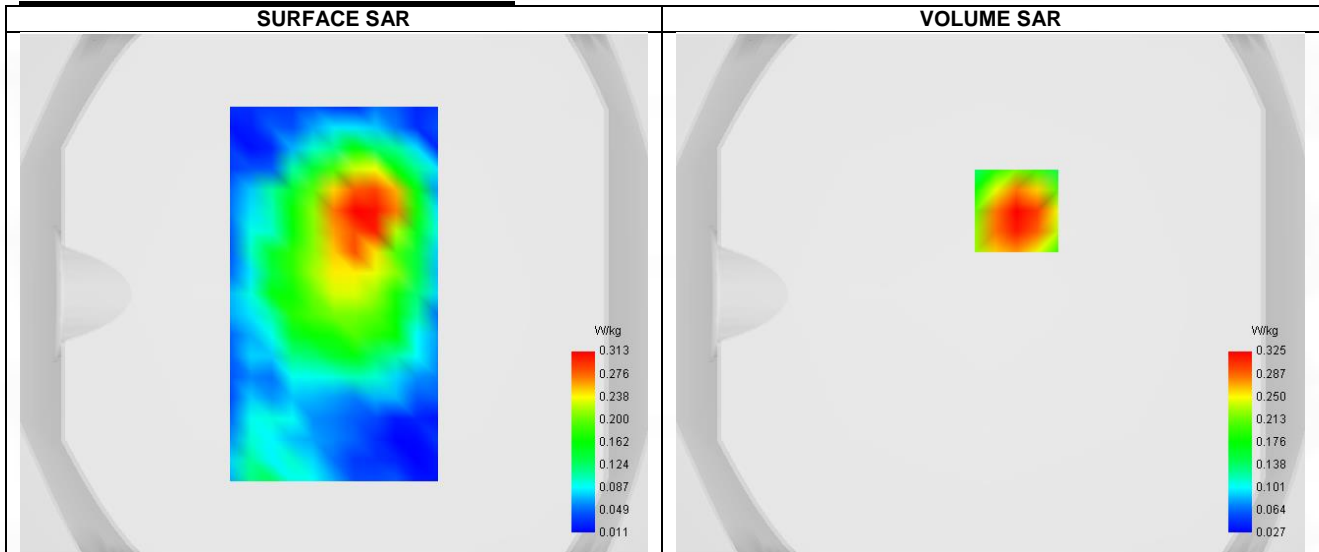


Maximum location: X=10.00, Y=32.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.190
SAR 1g (W/Kg)	0.311
Variation (%)	-1.620
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.486	0.325	0.197	0.127	0.091

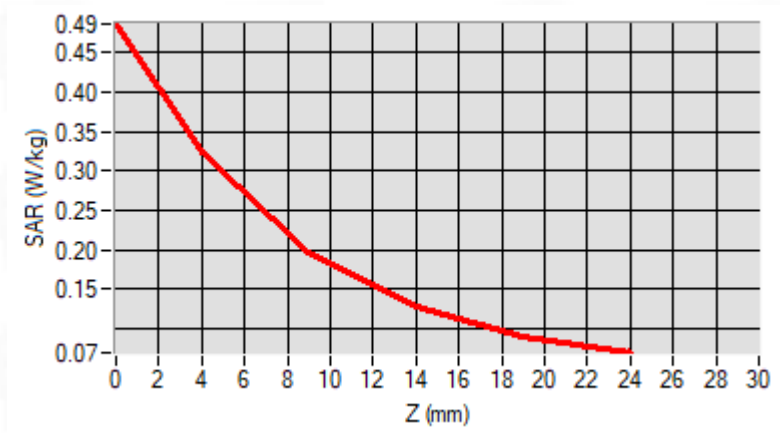

F. 3D Image

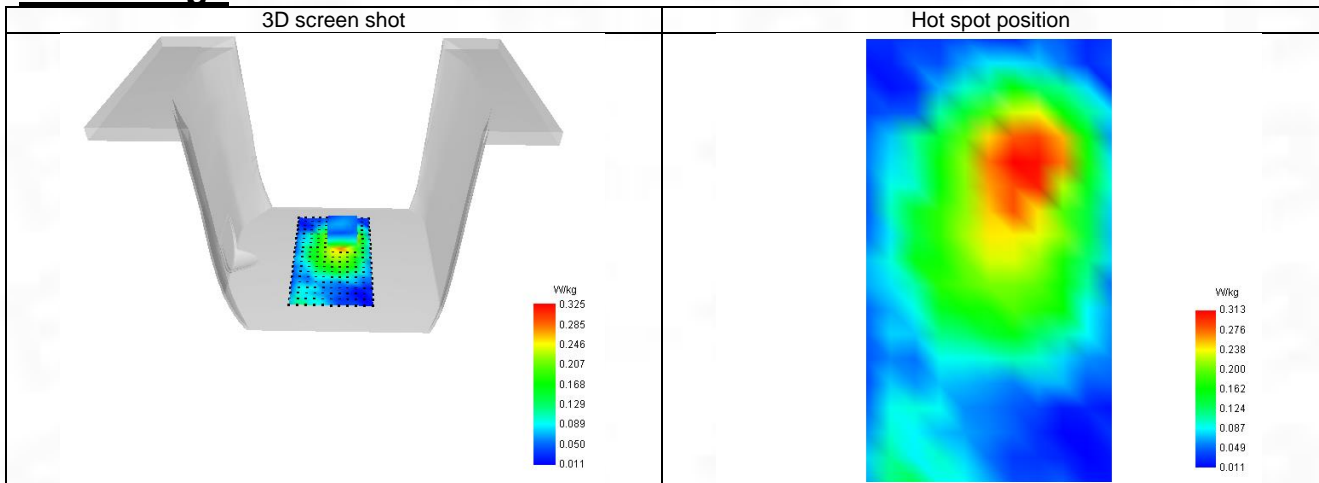

5-Head with front position in dist. 0mm on Channel 9400 in WCDMA Band 2

SAR Measurement at Band 2 (1900) (Cheek, Left)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Channels	Middle (9400)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1880.000
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

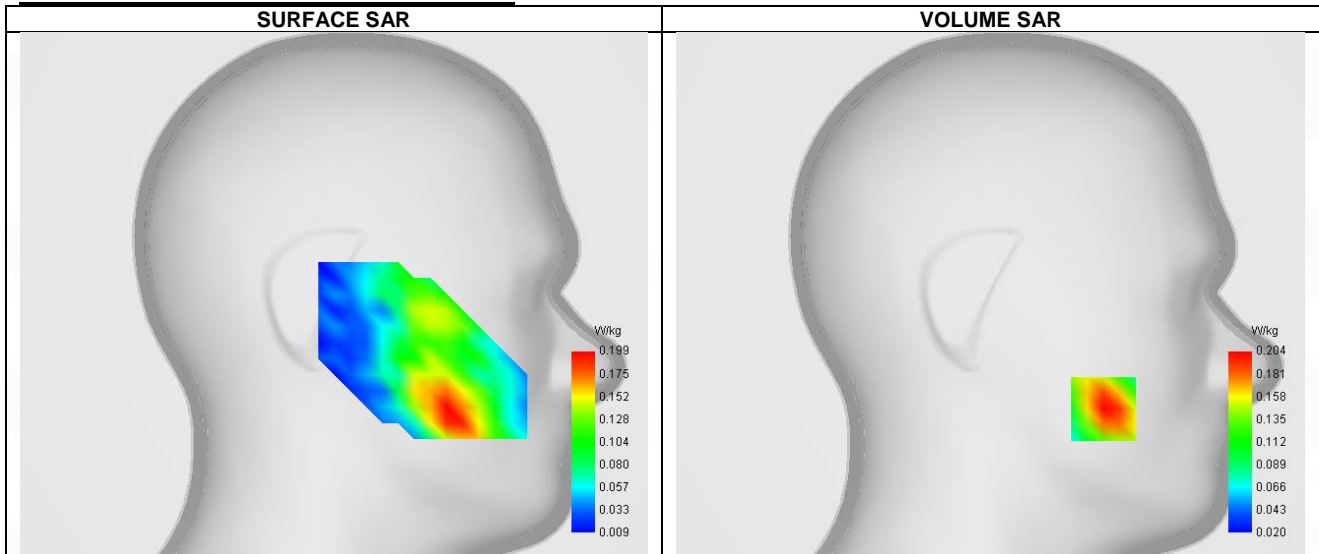


Maximum location: X=-56.00, Y=-57.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.194
Variation (%)	-2.940
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.292	0.204	0.131	0.087	0.061

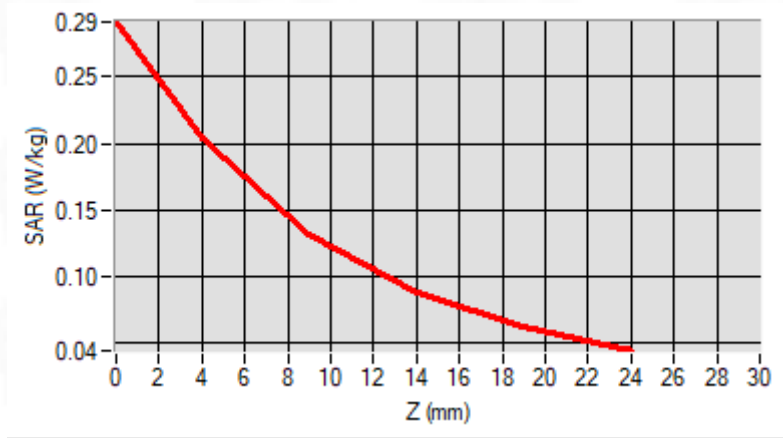

F. 3D Image

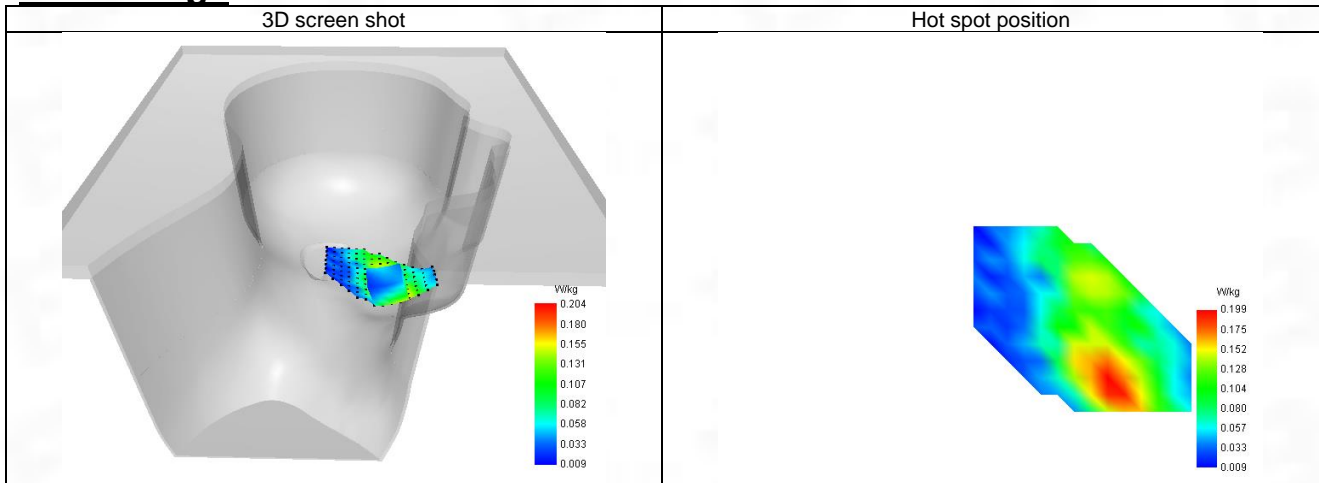

6-Body with front position in dist. 10mm on Channel 9400 in WCDMA Band 2

SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels	Middle (9400)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1880.000
Relative permittivity (real part)	39.909
Relative permittivity (imaginary part)	13.351
Conductivity (S/m)	1.395

C. SAR Surface and Volume

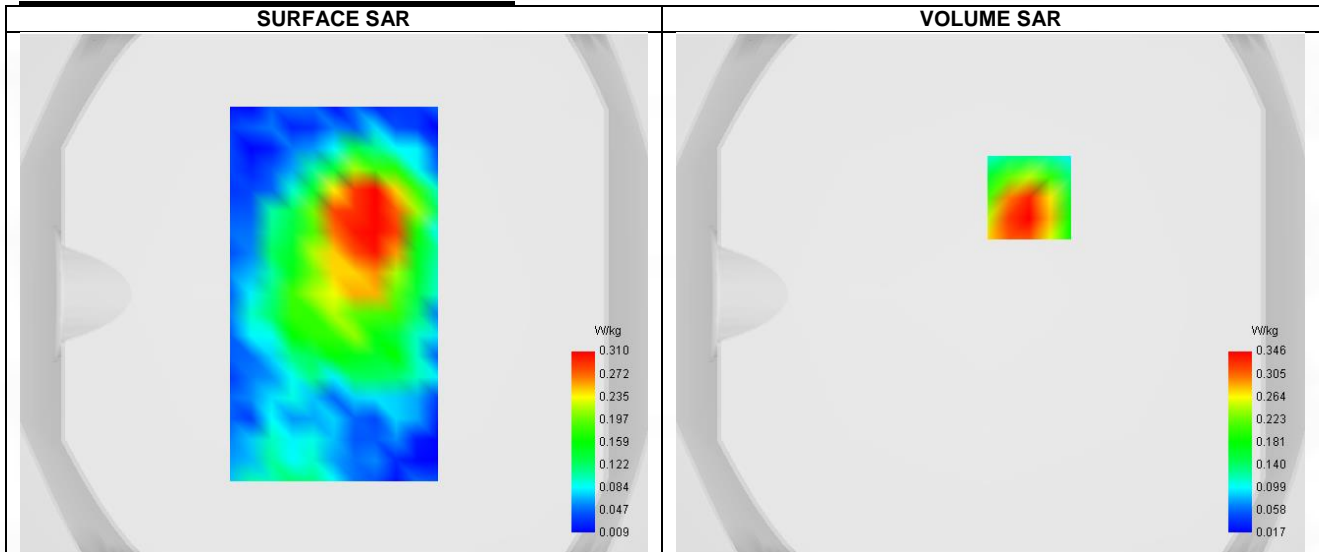


Maximum location: X=15.00, Y=37.00 ; SAR Peak: 0.58 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.185
SAR 1g (W/Kg)	0.332
Variation (%)	-3.040
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.843	0.346	0.147	0.104	0.059

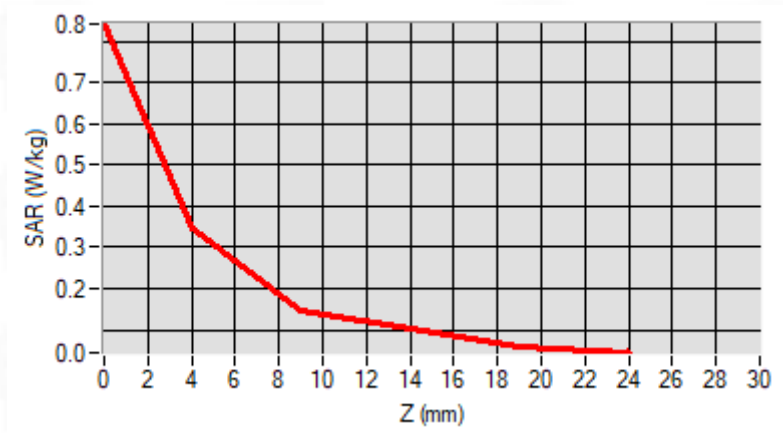

F. 3D Image

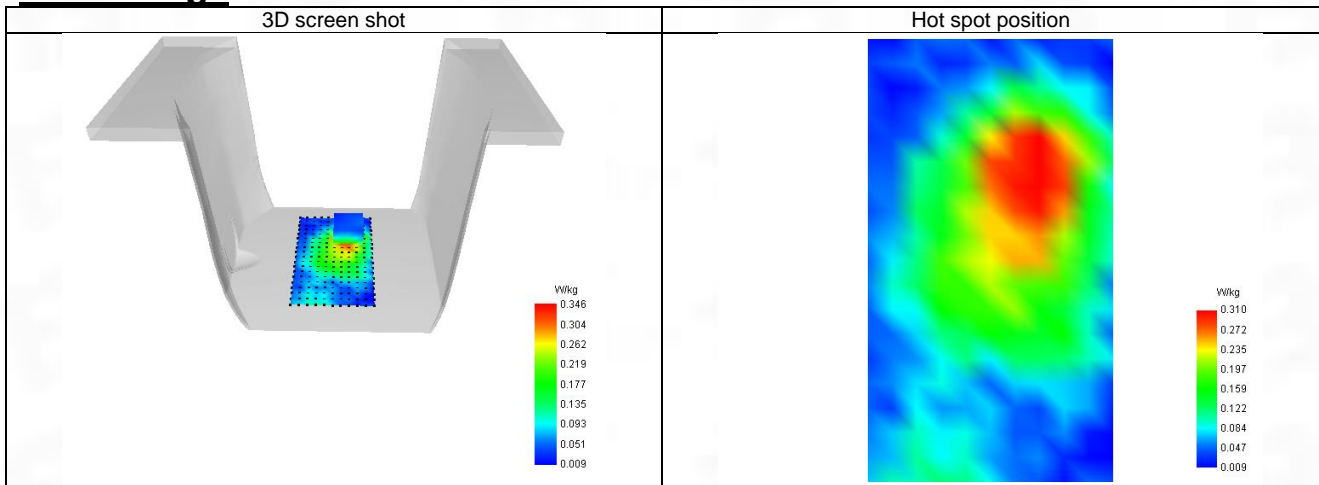

7-Head with front position in dist. 0mm on Channel 1413 in WCDMA Band 4

SAR Measurement at Band 4 (1700) (Cheek, Left)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Channels	Middle (1413)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1732.600
Relative permittivity (real part)	40.015
Relative permittivity (imaginary part)	13.985
Conductivity (S/m)	1.335

C. SAR Surface and Volume

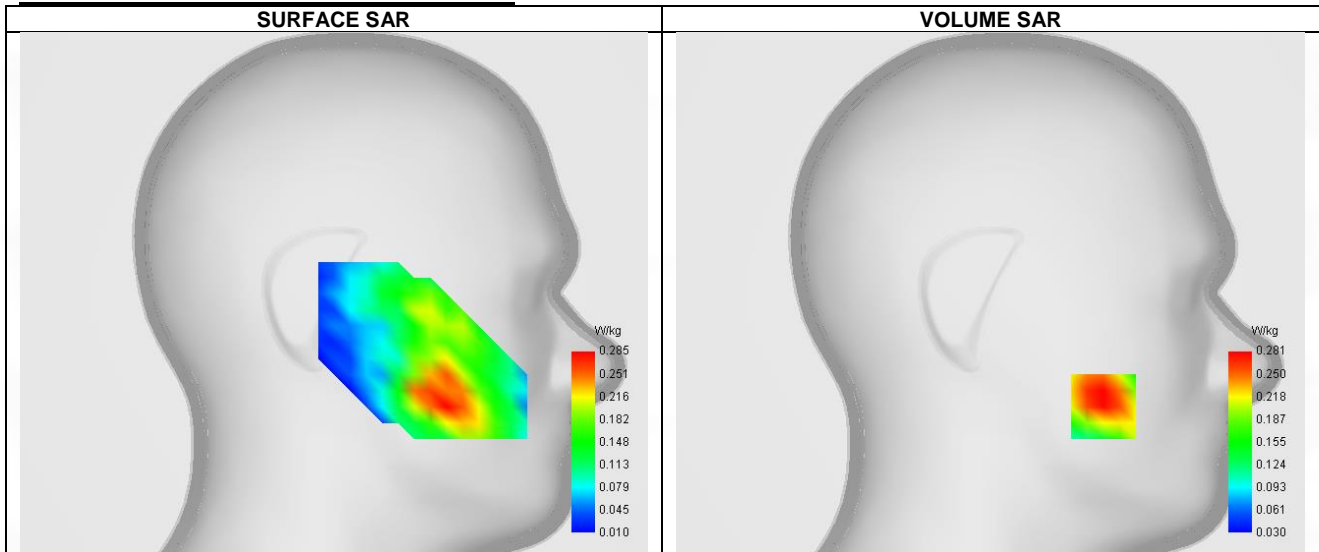


Maximum location: X=-56.00, Y=-56.00 ; SAR Peak: 0.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.175
SAR 1g (W/Kg)	0.272
Variation (%)	-0.900
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.684	0.281	0.145	0.125	0.083

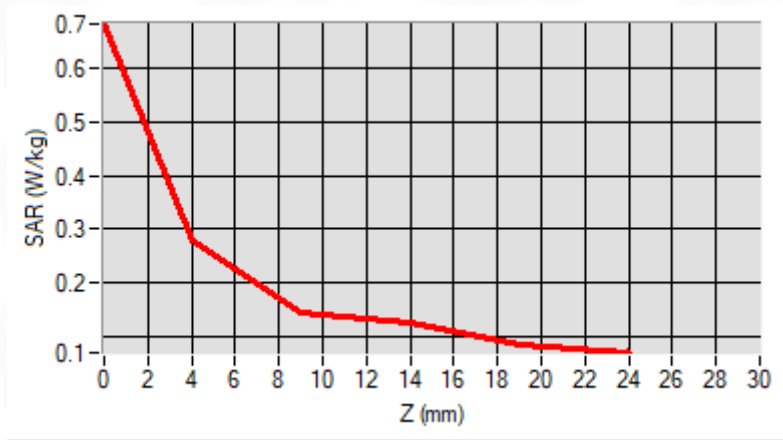

F. 3D Image

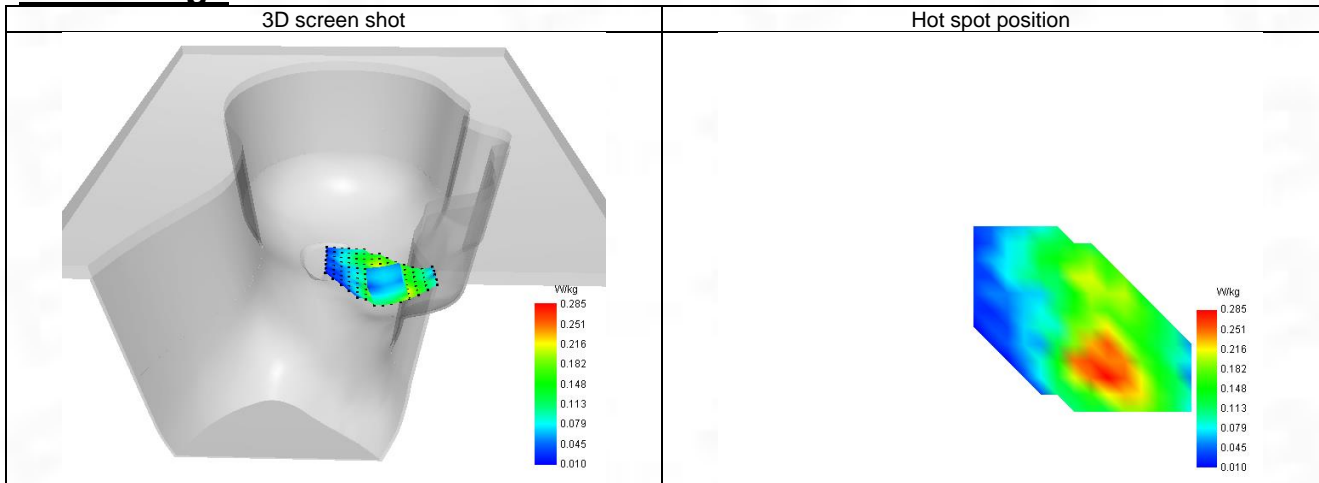

8-Body with Back position in dist. 10mm on Channel 1413 in WCDMA Band 4

SAR Measurement at Band 4 (1700) (Body, Validation Plane)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Channels	Middle (1413)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1732.600
Relative permittivity (real part)	40.015
Relative permittivity (imaginary part)	13.985
Conductivity (S/m)	1.335

C. SAR Surface and Volume

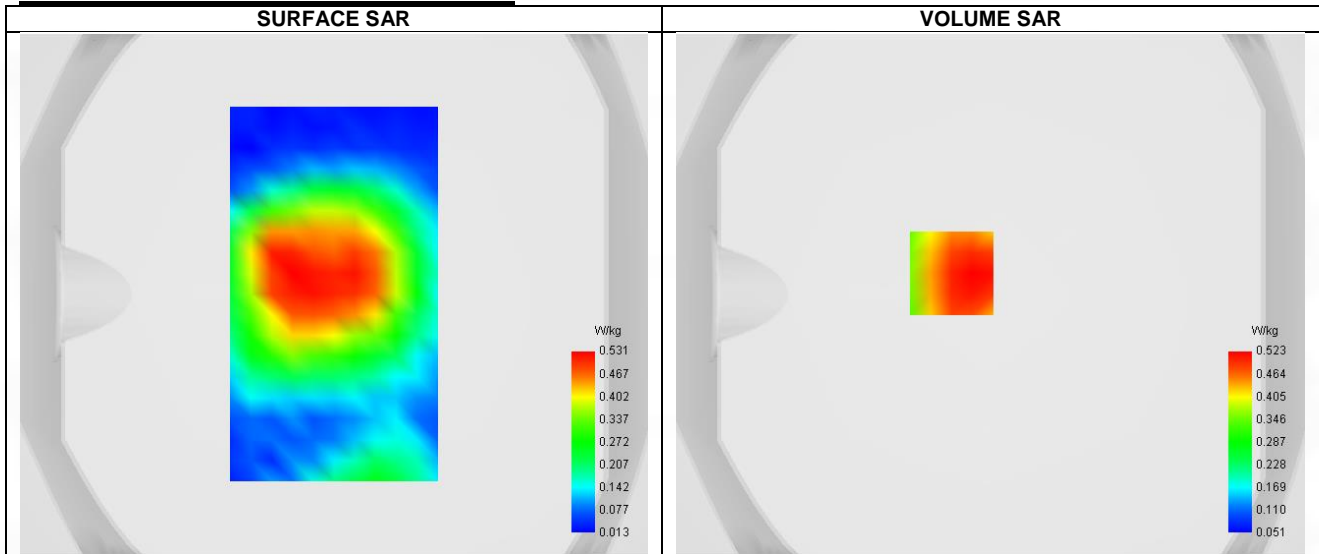


Maximum location: X=-15.00, Y=8.00 ; SAR Peak: 0.73 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.332
SAR 1g (W/Kg)	0.503
Variation (%)	-2.610
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.238	0.523	0.284	0.231	0.128

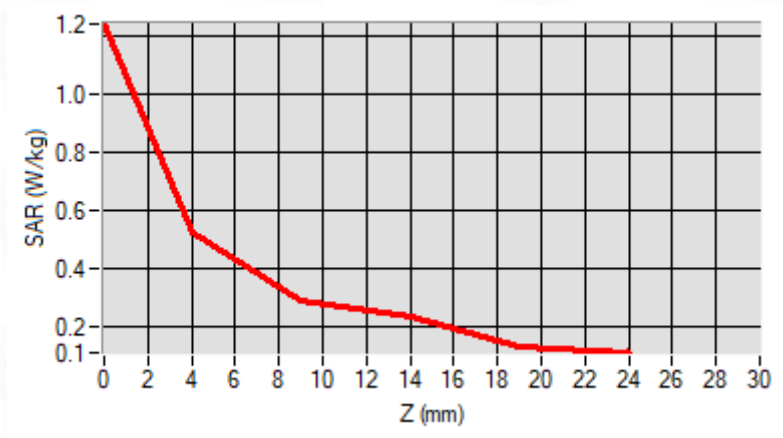

F. 3D Image

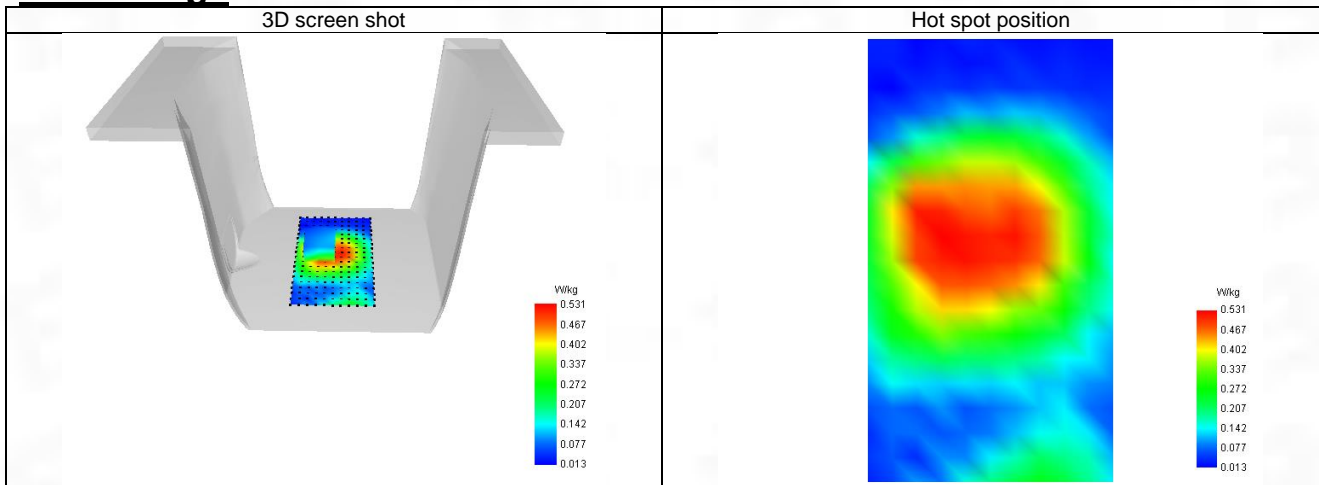

9-Head with front position in dist. 0mm on Channel 4182 in WCDMA Band 5

SAR Measurement at Band 5 (850) (Cheek, Left)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Channels	Middle (4182)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	836.400
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.492
Conductivity (S/m)	0.871

C. SAR Surface and Volume

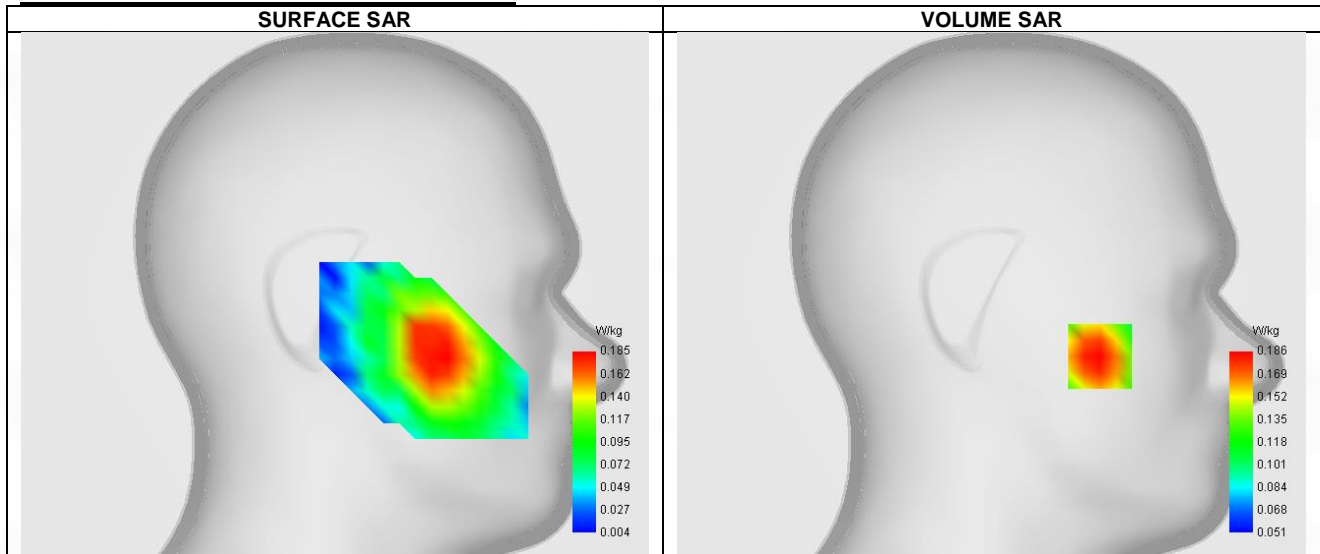


Maximum location: X=-54.00, Y=-31.00 ; SAR Peak: 0.22 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.145
SAR 1g (W/Kg)	0.183
Variation (%)	-2.200
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.196	0.186	0.168	0.146	0.120

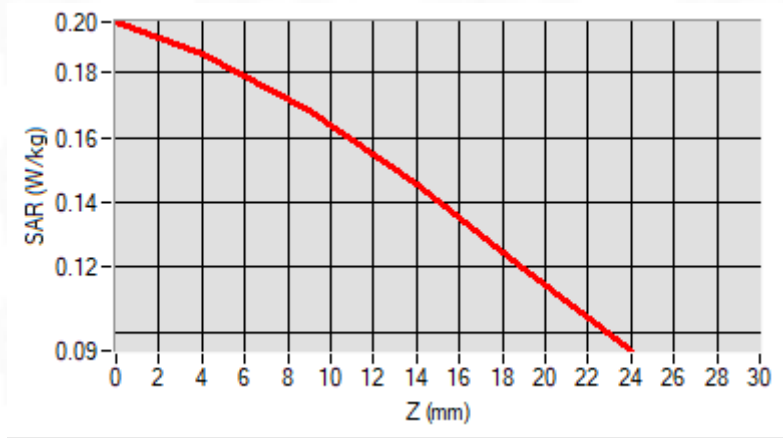

F. 3D Image

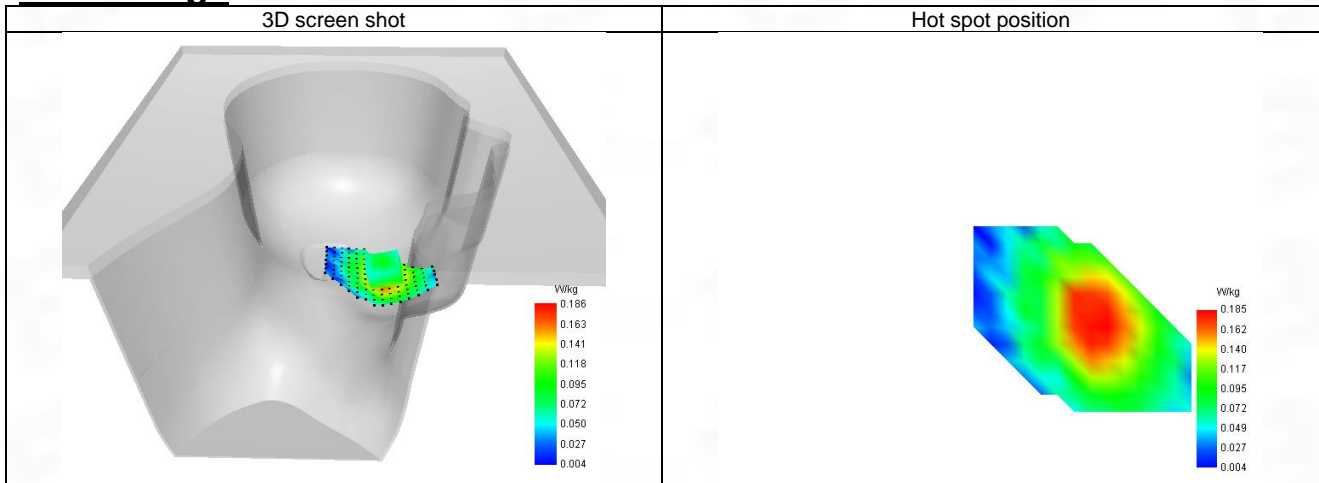

10-Body with back position in dist. 10mm on Channel 4182 in WCDMA Band 5

SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels	Middle (4182)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	836.400
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.492
Conductivity (S/m)	0.871

C. SAR Surface and Volume

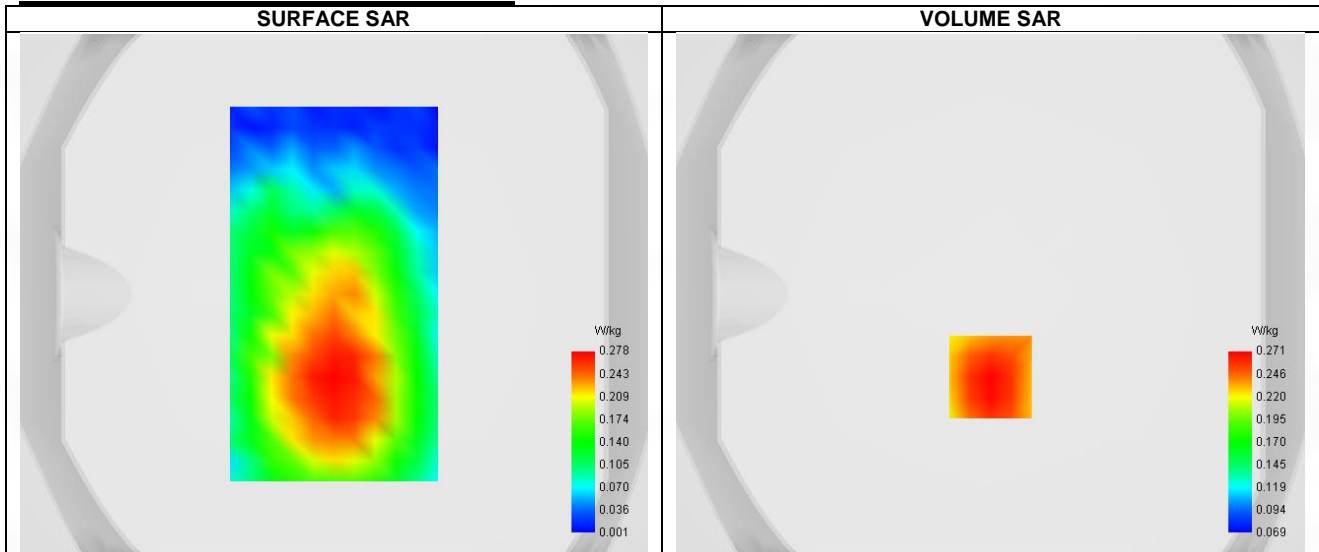


Maximum location: X=0.00, Y=-32.00 ; SAR Peak: 0.35 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.195
SAR 1g (W/Kg)	0.263
Variation (%)	-3.010
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.352	0.271	0.199	0.154	0.126

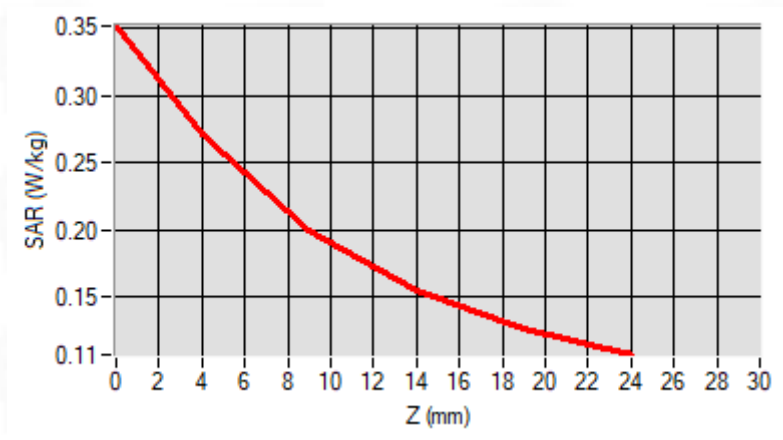

F. 3D Image

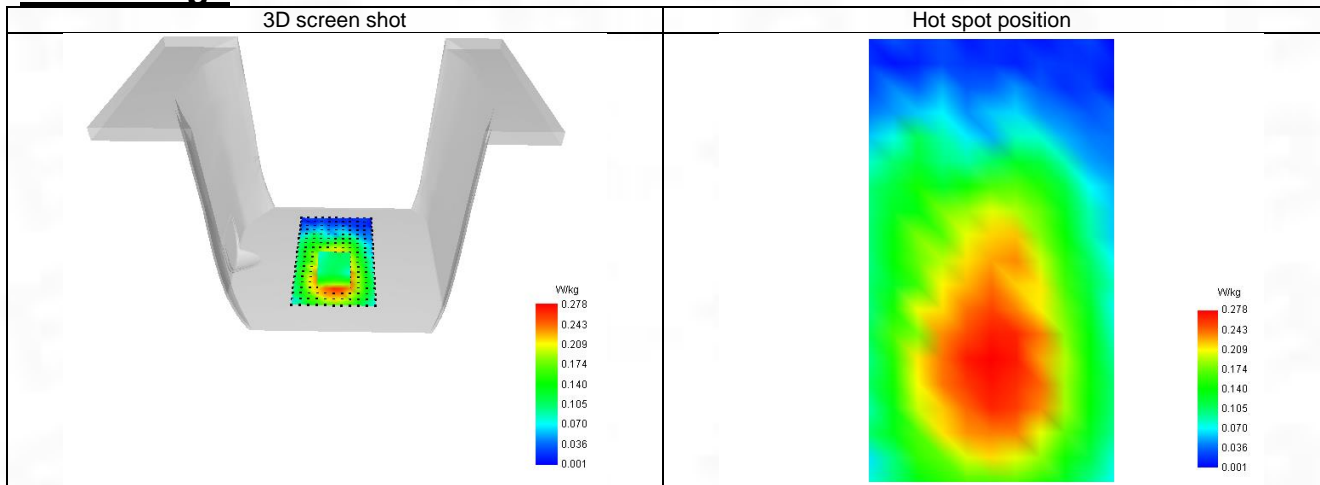

11-Head with front position in dist. 0mm on Channel 18700 in LTE band 2

SAR Measurement at LTE band 2 (Cheek, Right)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Channels	Lower (18700)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1860.000
Relative permittivity (real part)	39.938
Relative permittivity (imaginary part)	13.322
Conductivity (S/m)	1.381

C. SAR Surface and Volume

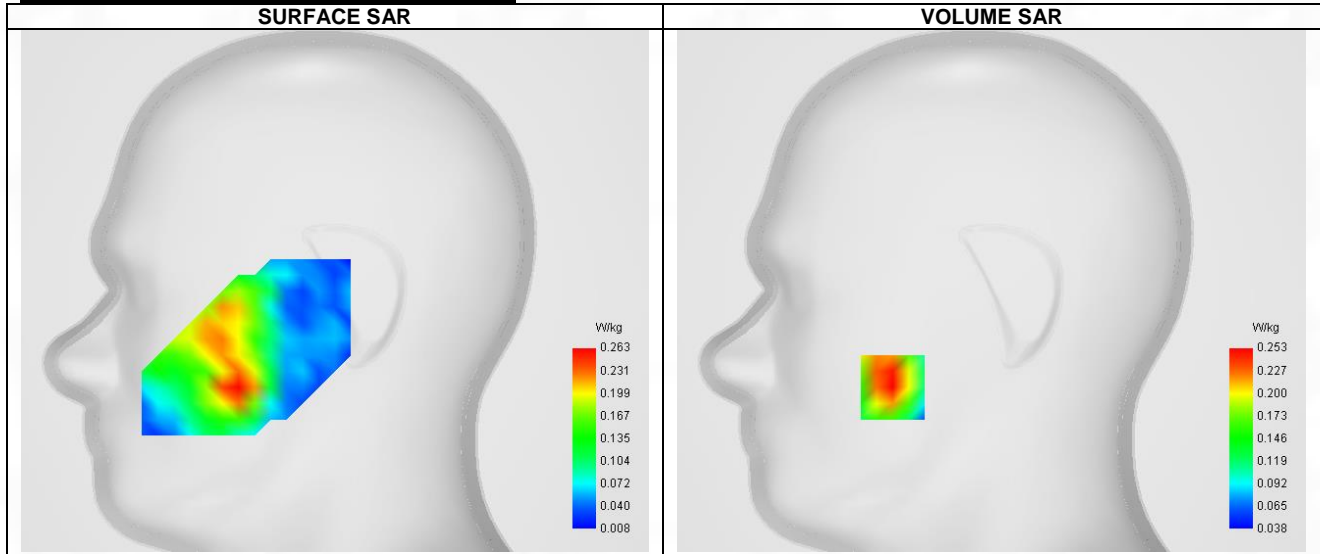


Maximum location: X=-49.00, Y=-48.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.243
Variation (%)	1.530
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.358	0.253	0.168	0.121	0.096

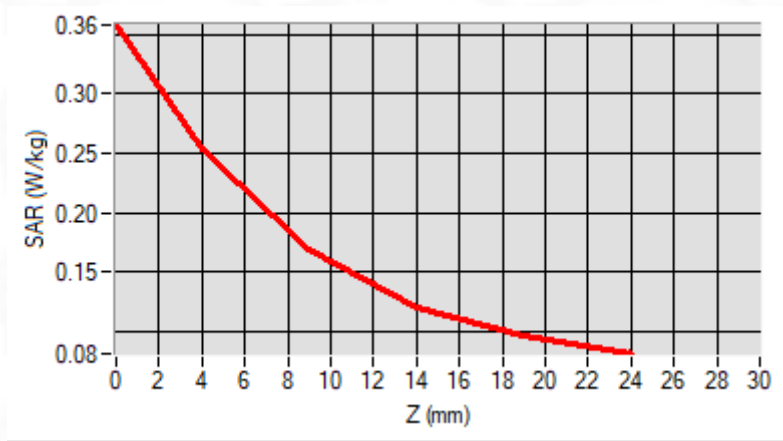

F. 3D Image

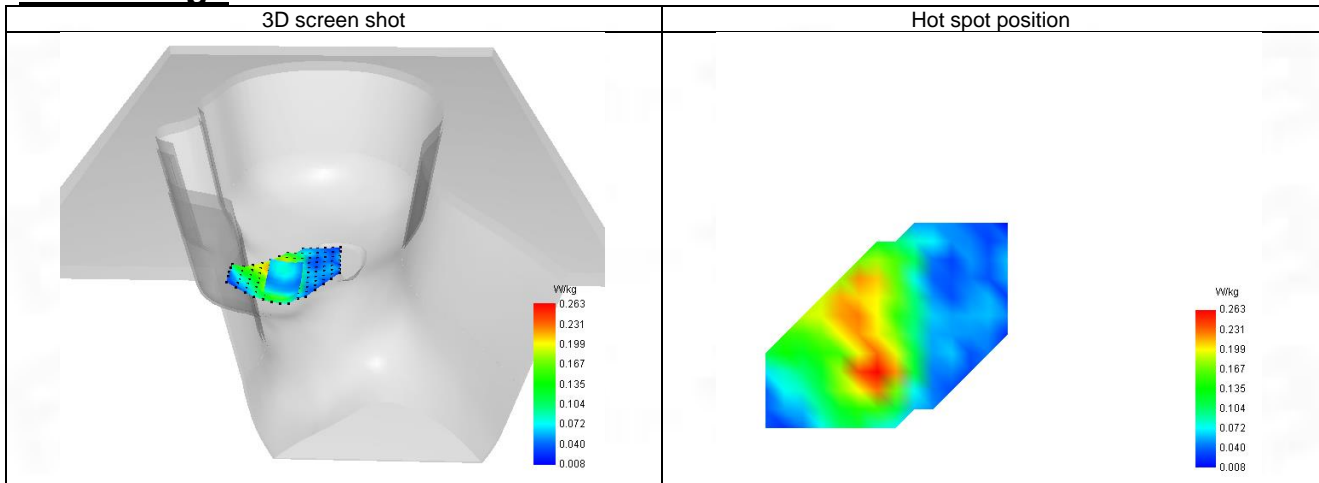

12-Body with front position in dist. 10mm on Channel 18700 in LTE Band 2

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Lower (18700)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1860.000
Relative permittivity (real part)	39.938
Relative permittivity (imaginary part)	13.322
Conductivity (S/m)	1.381

C. SAR Surface and Volume

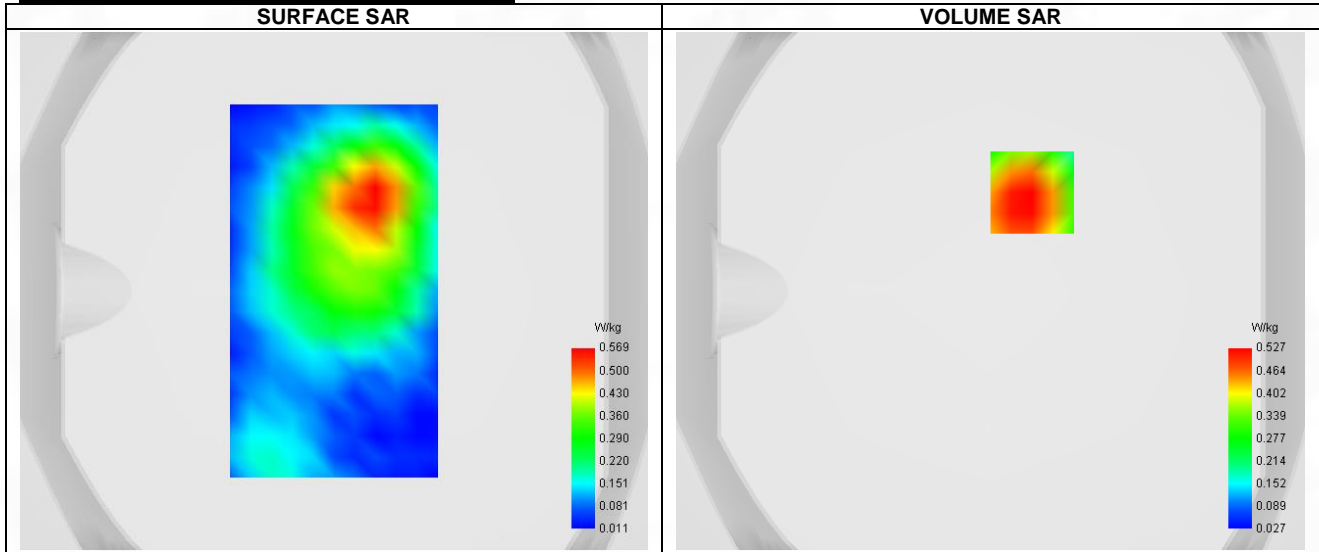


Maximum location: X=16.00, Y=38.00 ; SAR Peak: 0.76 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.511
Variation (%)	-0.950
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.743	0.527	0.339	0.221	0.148

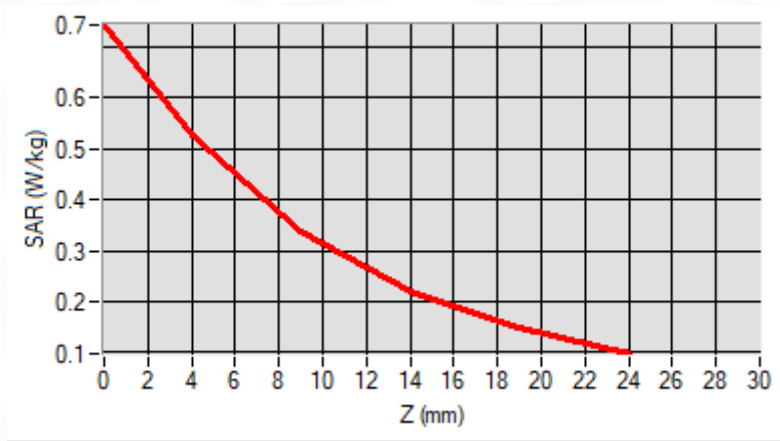

F. 3D Image

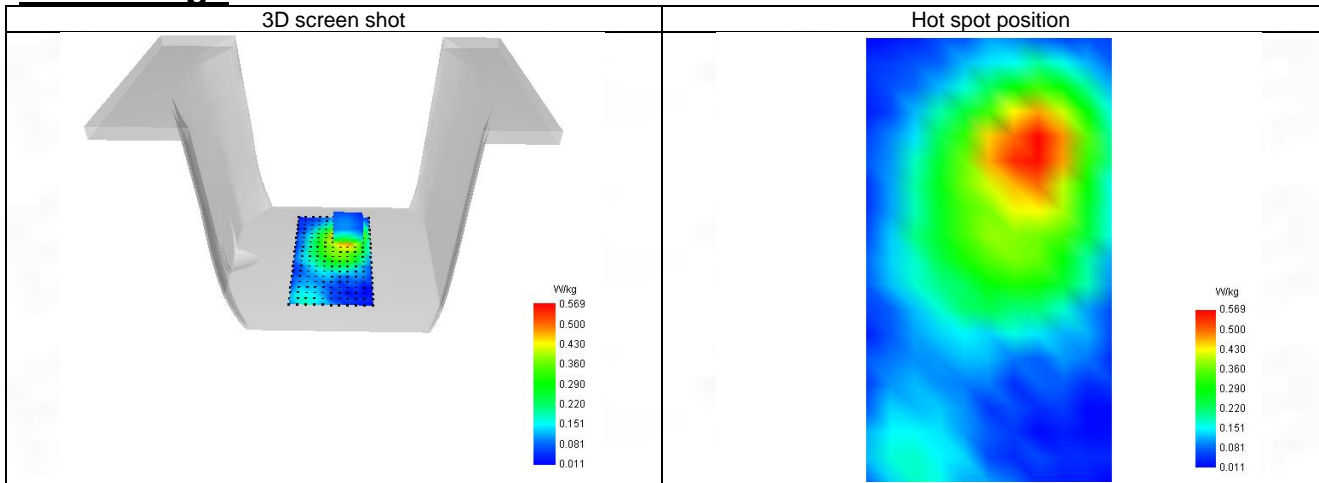

13-Head with front position in dist. 0mm on Channel 20070 in LTE band 4

SAR Measurement at LTE band 4 (Cheek, Right)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Channels	Lower (20070)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1722.000
Relative permittivity (real part)	40.031
Relative permittivity (imaginary part)	13.969
Conductivity (S/m)	1.330

C. SAR Surface and Volume

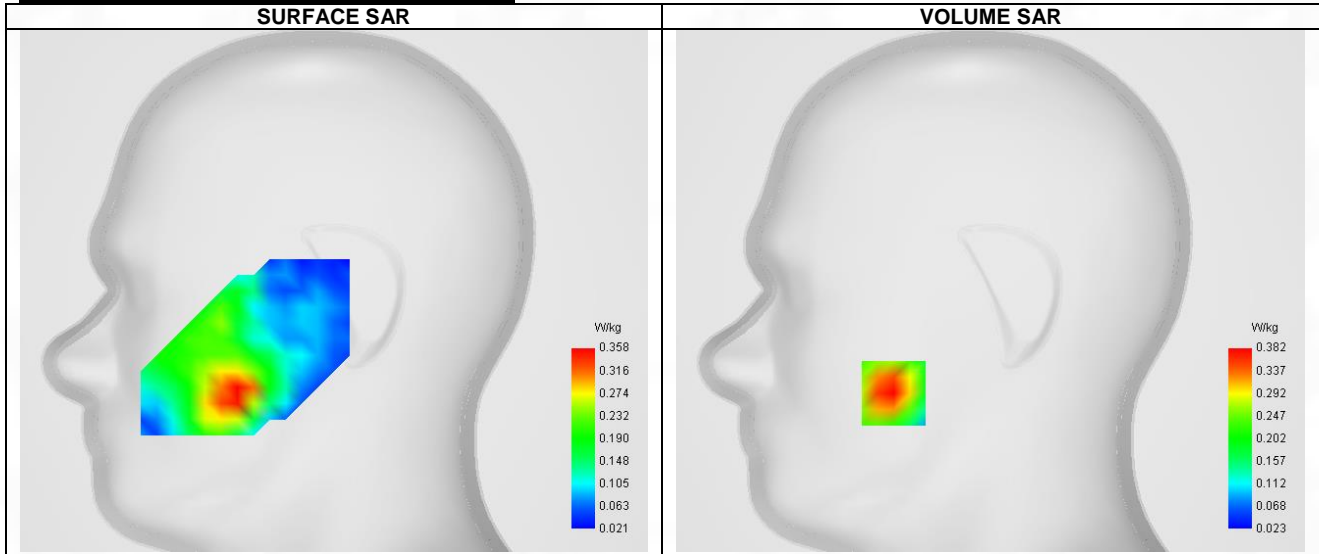


Maximum location: X=-48.00, Y=-51.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.235
SAR 1g (W/Kg)	0.363
Variation (%)	4.100
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.483	0.382	0.282	0.208	0.153

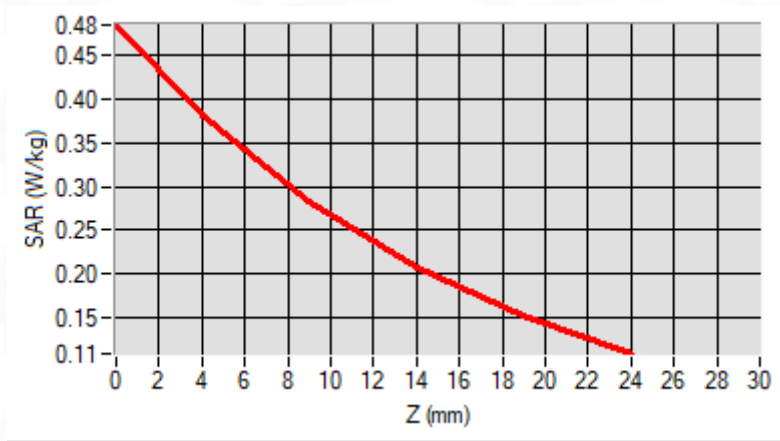

F. 3D Image

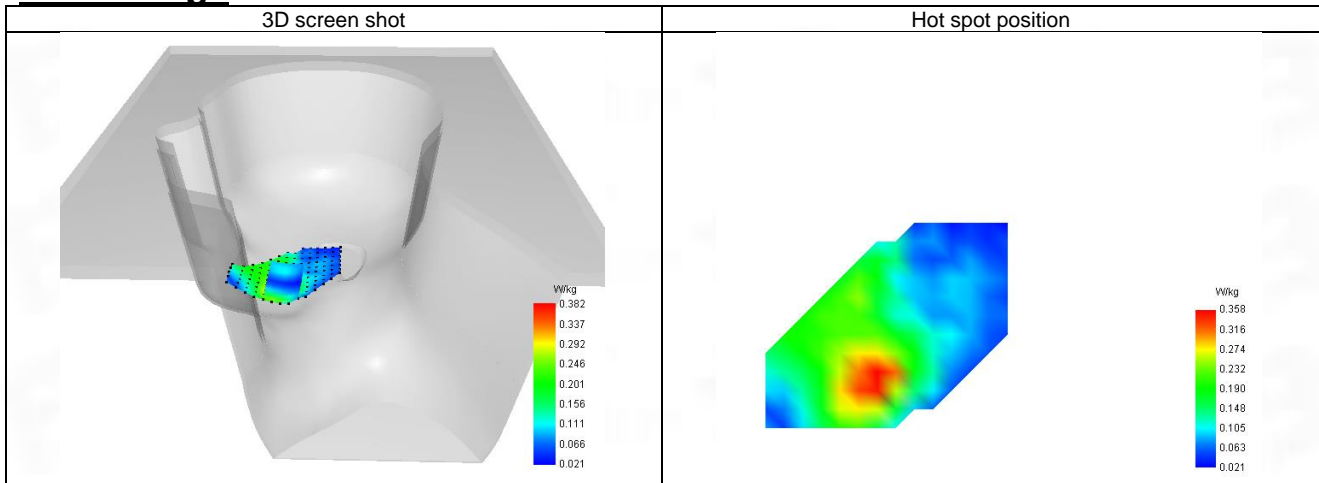

14-Body with front position in dist. 10mm on Channel 20070 in LTE Band 4

SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Lower (20070)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	1722.000
Relative permittivity (real part)	40.031
Relative permittivity (imaginary part)	13.969
Conductivity (S/m)	1.330

C. SAR Surface and Volume

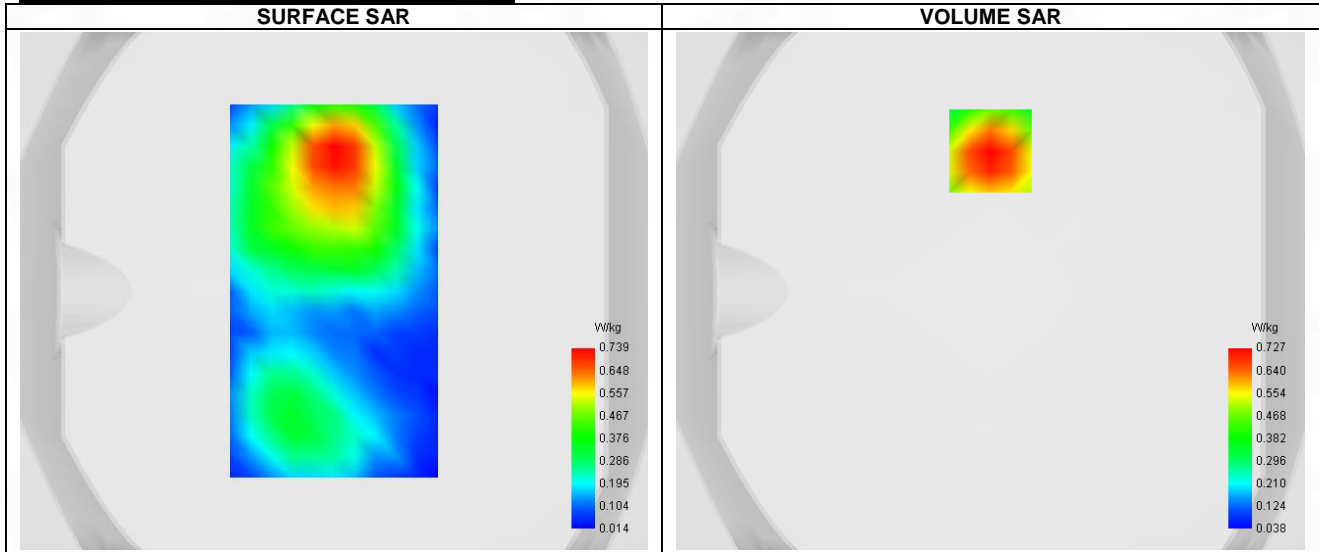


Maximum location: X=0.00, Y=54.00 ; SAR Peak: 1.07 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.428
SAR 1g (W/Kg)	0.694
Variation (%)	-4.350
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.072	0.727	0.443	0.277	0.182

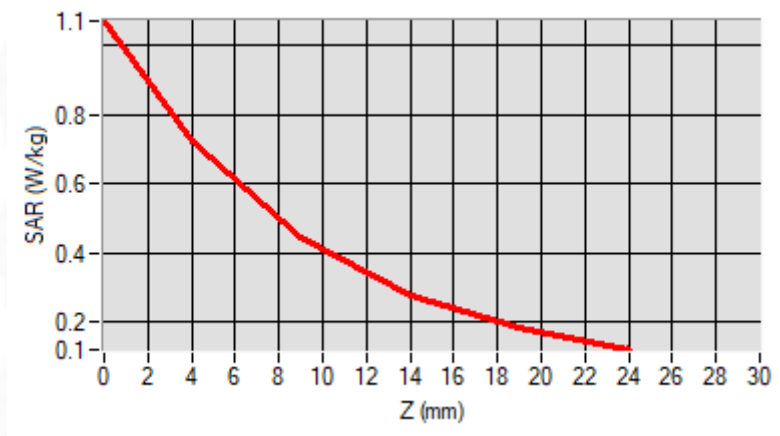

F. 3D Image

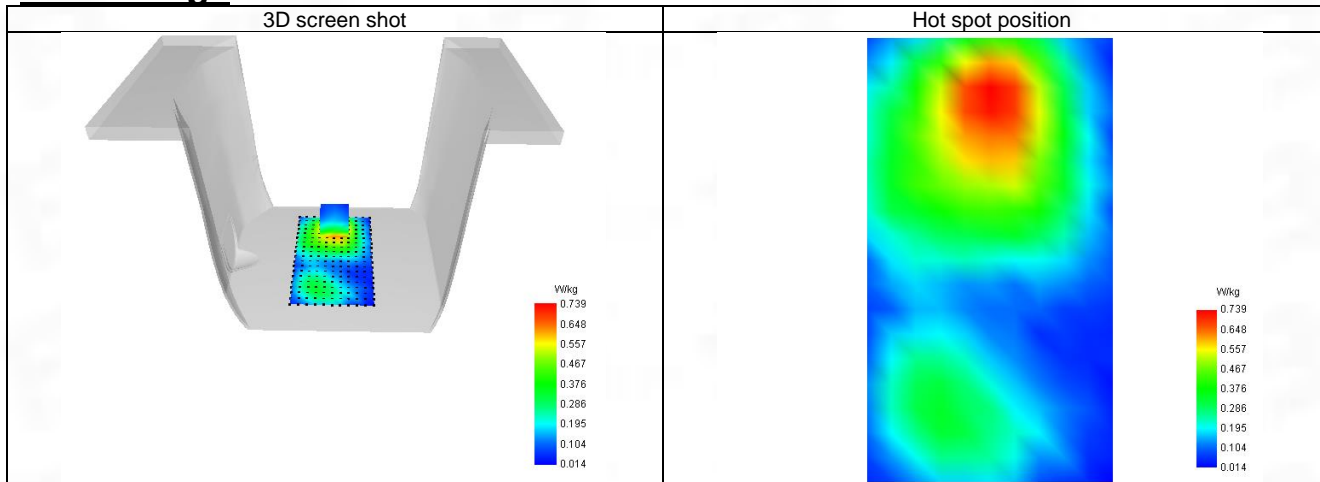

15-Head with front position in dist. 0mm on Channel 20600 in LTE band 5

SAR Measurement at LTE band 5 (Cheek, Left)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Channels	Higher (20600)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	844.000
Relative permittivity (real part)	41.396
Relative permittivity (imaginary part)	19.504
Conductivity (S/m)	0.875

C. SAR Surface and Volume

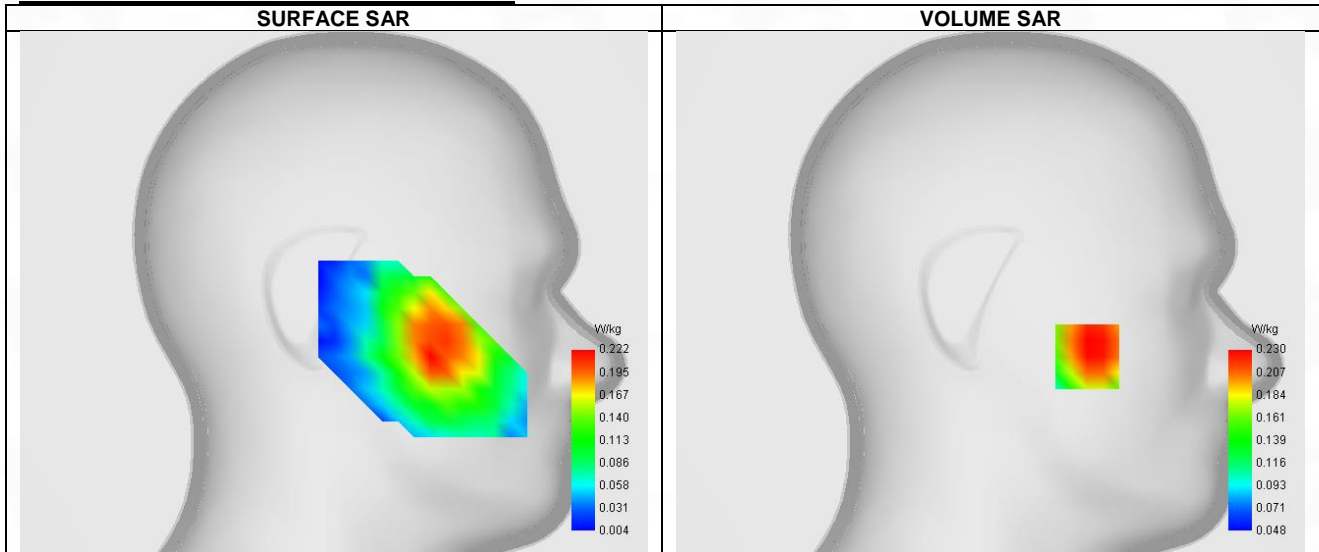


Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.225
Variation (%)	-1.760
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.573	0.230	0.152	0.146	0.091

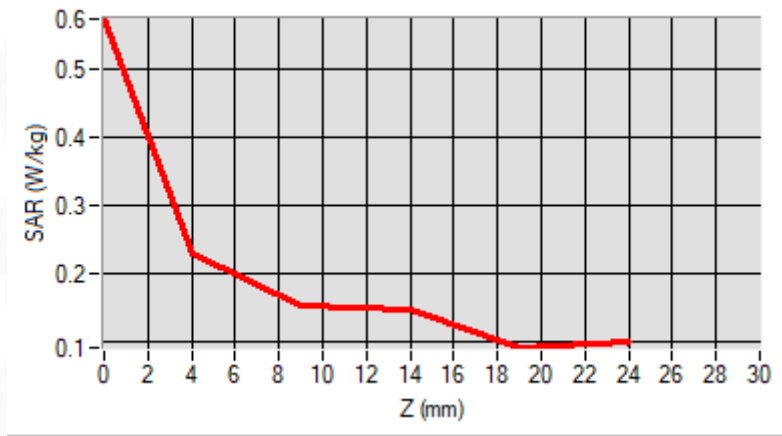

F. 3D Image

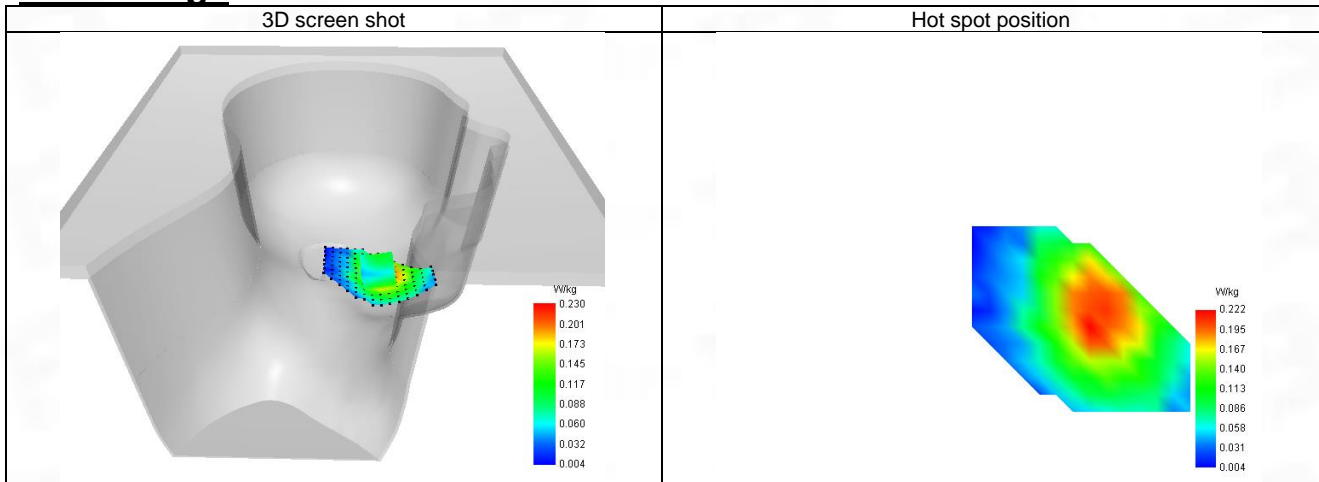

16-Body with back position in dist. 10mm on Channel 20600 in LTE Band 5

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	Higher (20600)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	24
RB size	1

B. Permittivity

Frequency (MHz)	844.000
Relative permittivity (real part)	41.396
Relative permittivity (imaginary part)	19.504
Conductivity (S/m)	0.875

C. SAR Surface and Volume

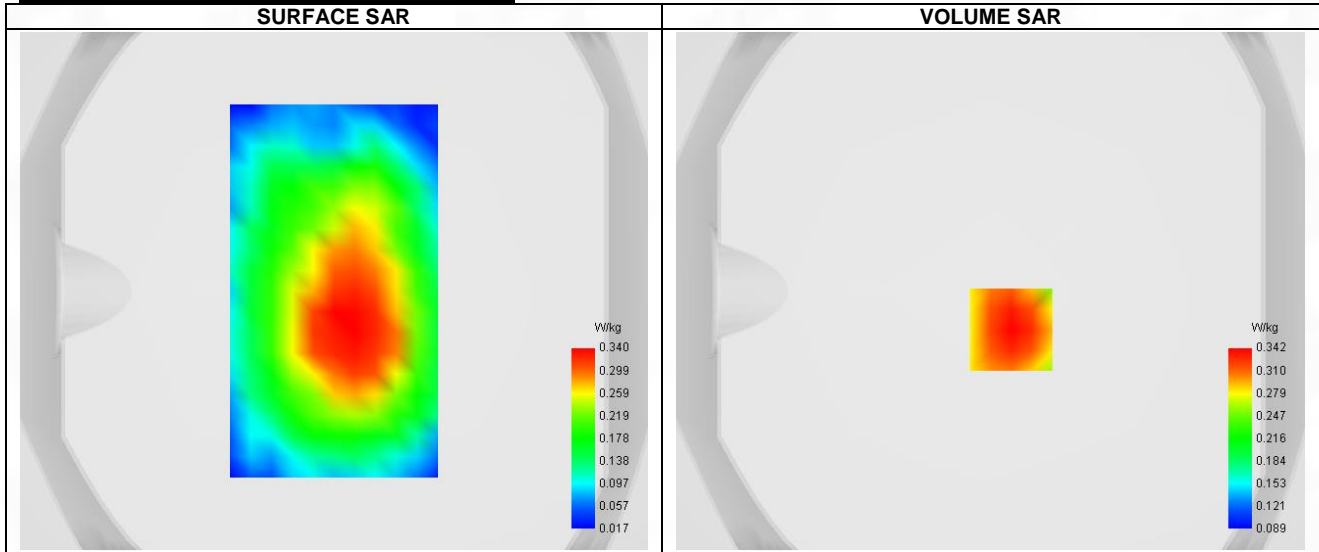


Maximum location: X=8.00, Y=-15.00 ; SAR Peak: 0.45 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.237
SAR 1g (W/Kg)	0.329
Variation (%)	-2.240
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.452	0.342	0.245	0.184	0.147

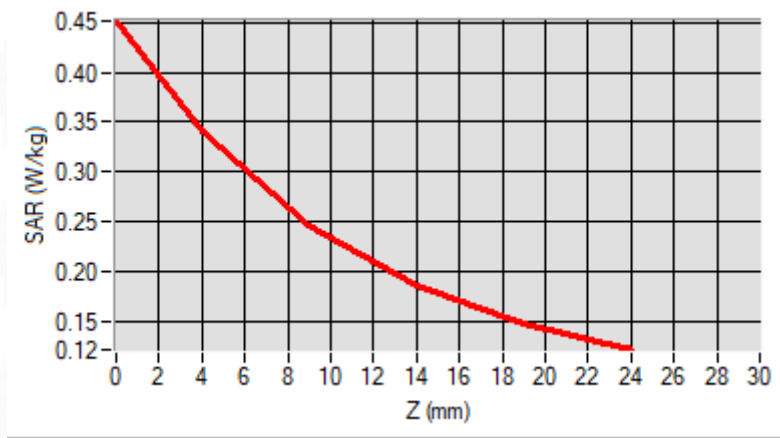

F. 3D Image

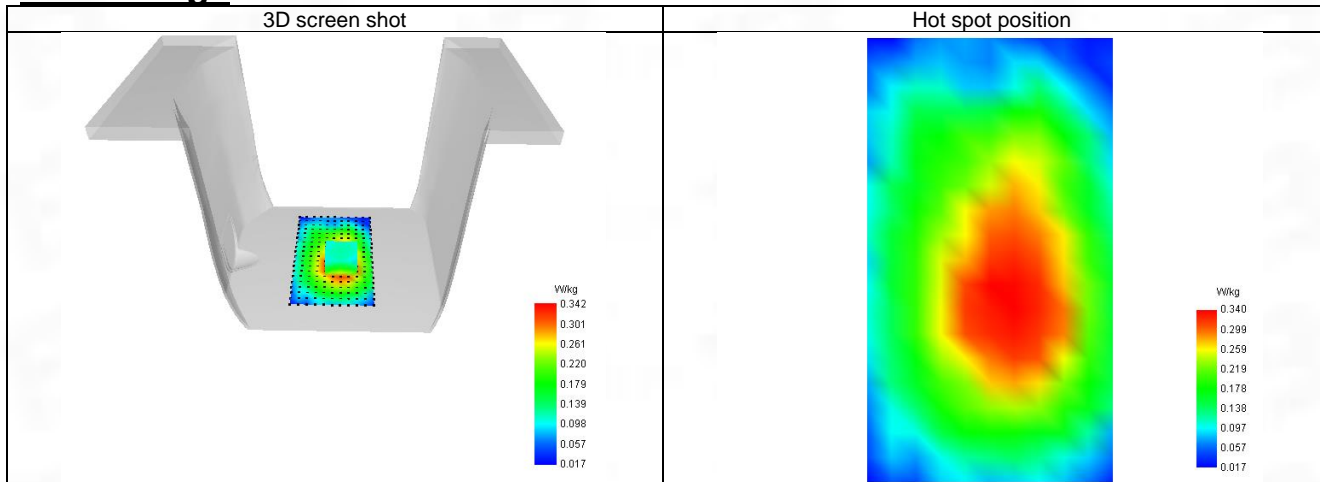

17-Head with front position in dist. 0mm on Channel 23130 in LTE band 12

SAR Measurement at LTE band 12 (Cheek, Right)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Channels	Higher (23130)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	711.000
Relative permittivity (real part)	41.603
Relative permittivity (imaginary part)	19.297
Conductivity (S/m)	0.806

C. SAR Surface and Volume

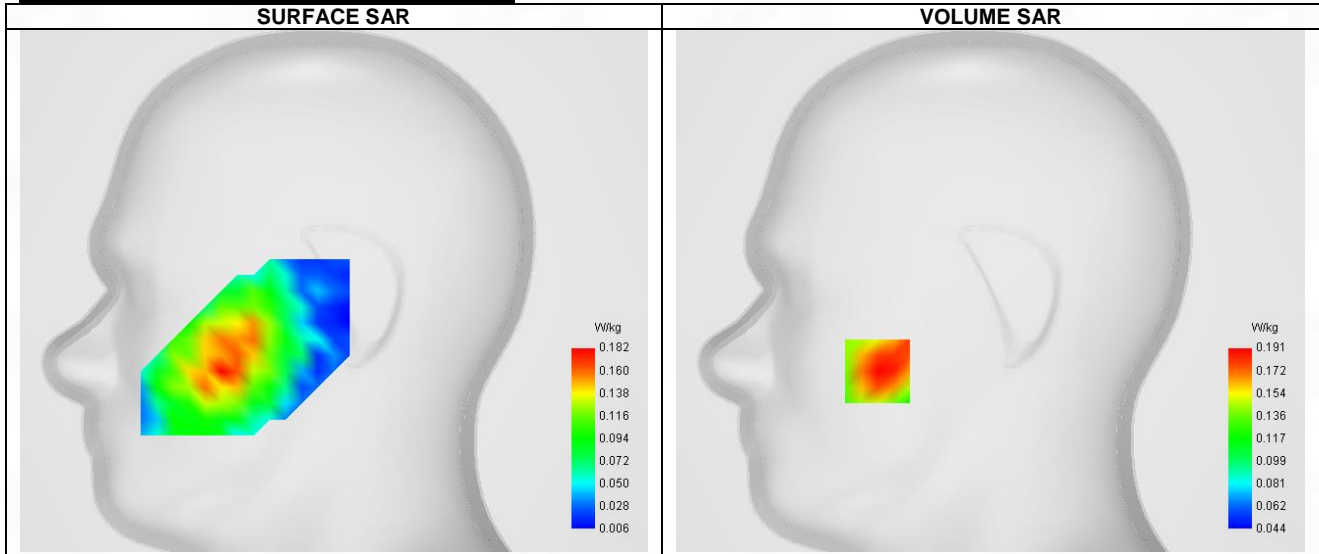


Maximum location: X=-56.00, Y=-40.00 ; SAR Peak: 0.24 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.192
Variation (%)	1.370
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.204	0.191	0.169	0.143	0.115

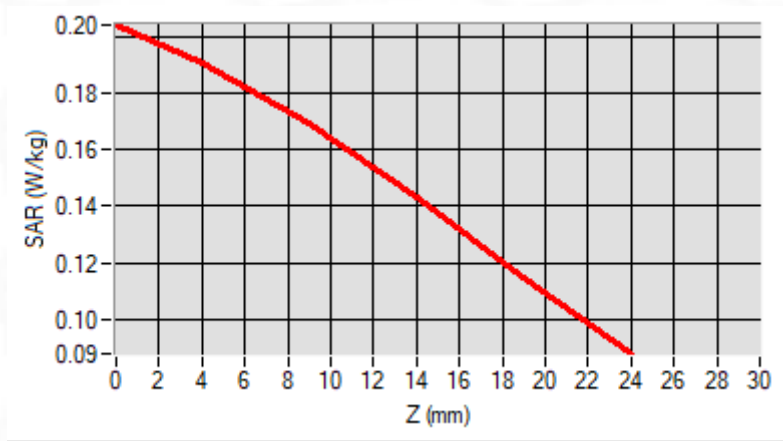

F. 3D Image

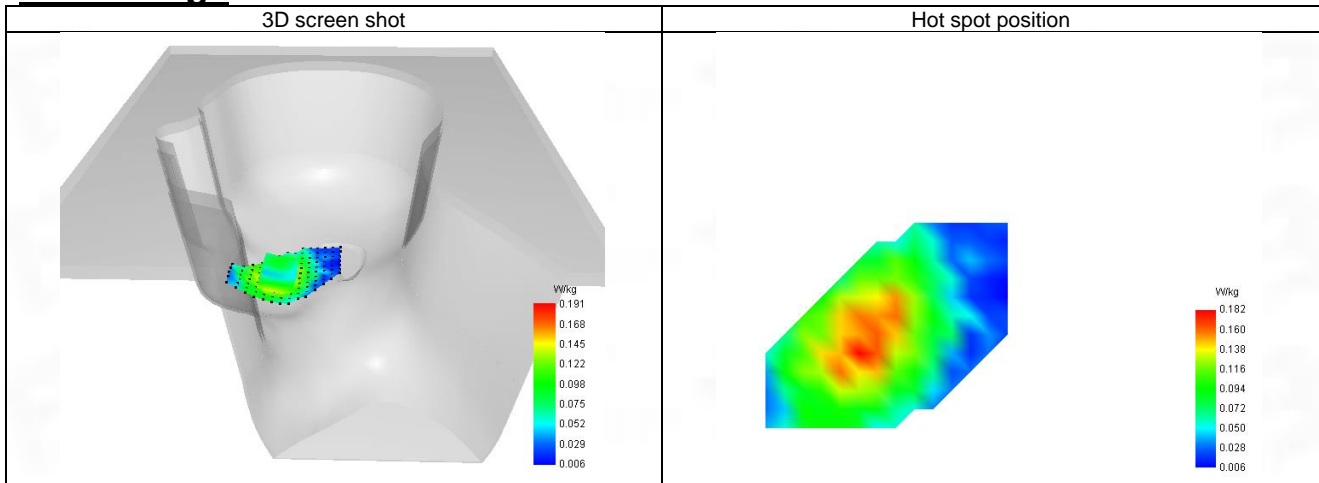

18-Body with back position in dist. 10mm on Channel 23130 in LTE Band 12

SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	Higher (23130)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	49
RB size	1

B. Permittivity

Frequency (MHz)	711.000
Relative permittivity (real part)	41.603
Relative permittivity (imaginary part)	19.297
Conductivity (S/m)	0.806

C. SAR Surface and Volume

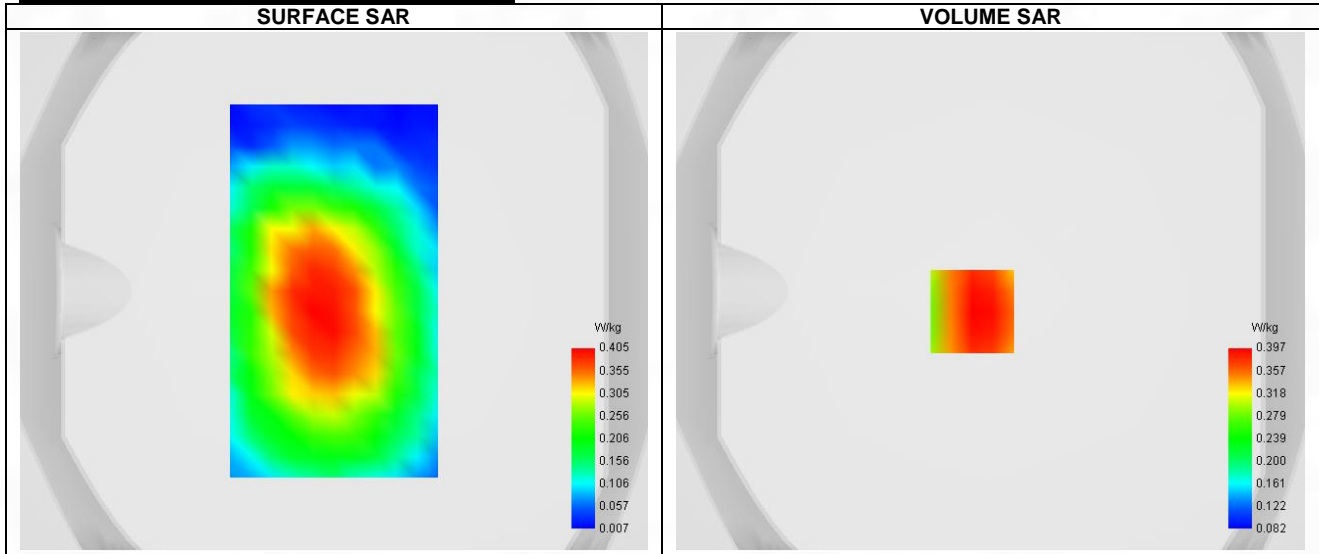


Maximum location: X=-7.00, Y=-8.00 ; SAR Peak: 0.54 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.293
SAR 1g (W/Kg)	0.411
Variation (%)	-3.970
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.540	0.397	0.274	0.198	0.154

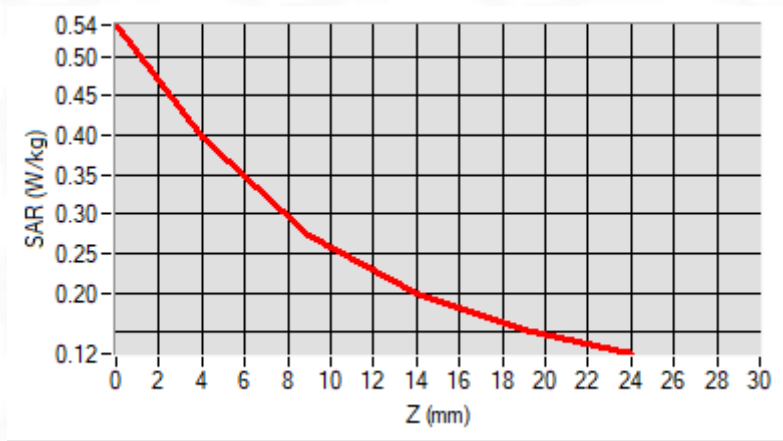

F. 3D Image

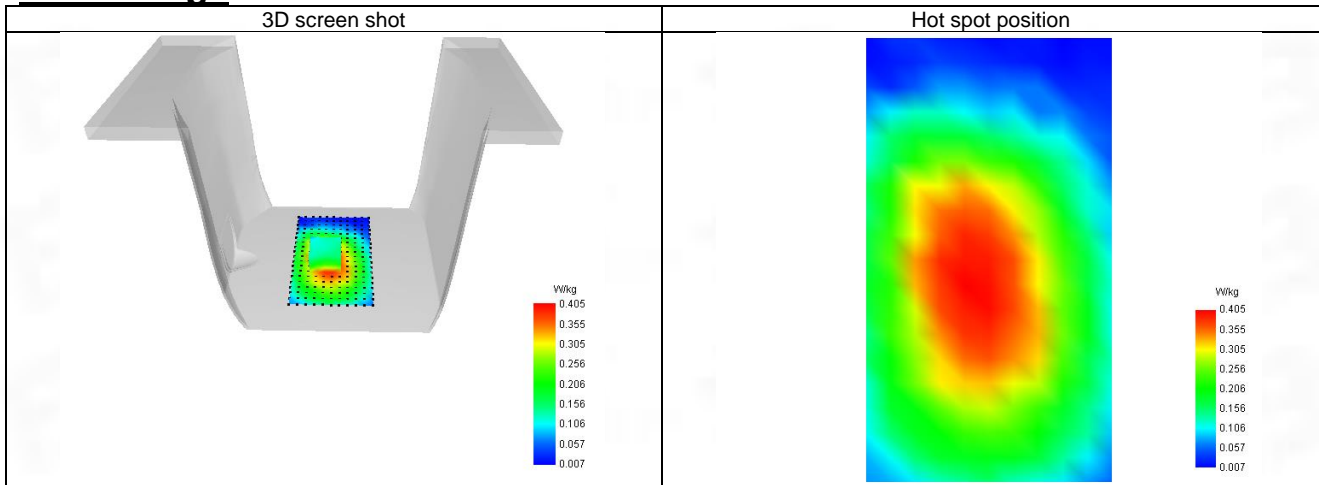

19-Head with front position in dist. 0mm on Channel 23790 in LTE band 17

SAR Measurement at LTE band 17 (Cheek, Right)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Channels	Middle (23790)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	710.000
Relative permittivity (real part)	41.604
Relative permittivity (imaginary part)	19.296
Conductivity (S/m)	0.805

C. SAR Surface and Volume

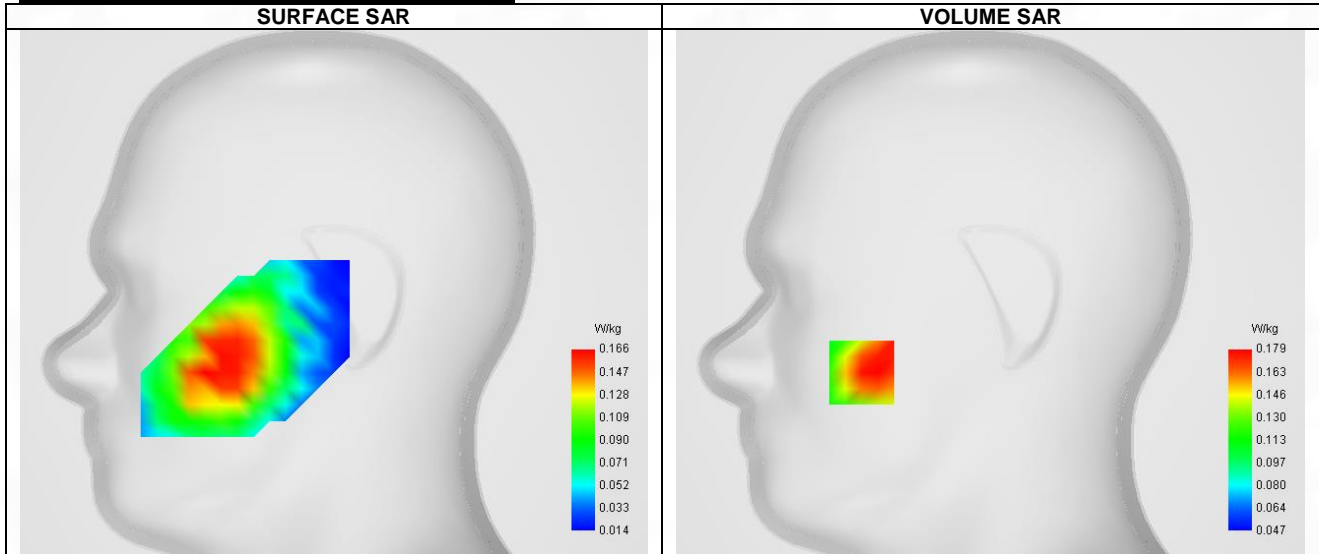


Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 0.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.183
Variation (%)	-1.580
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.542	0.179	0.109	0.118	0.071

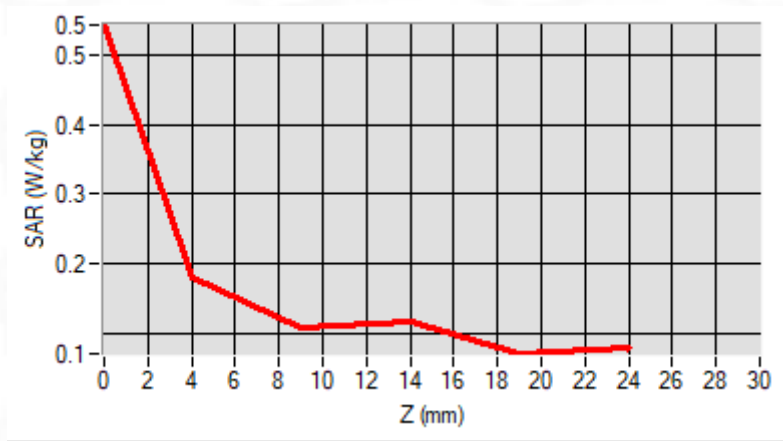

F. 3D Image

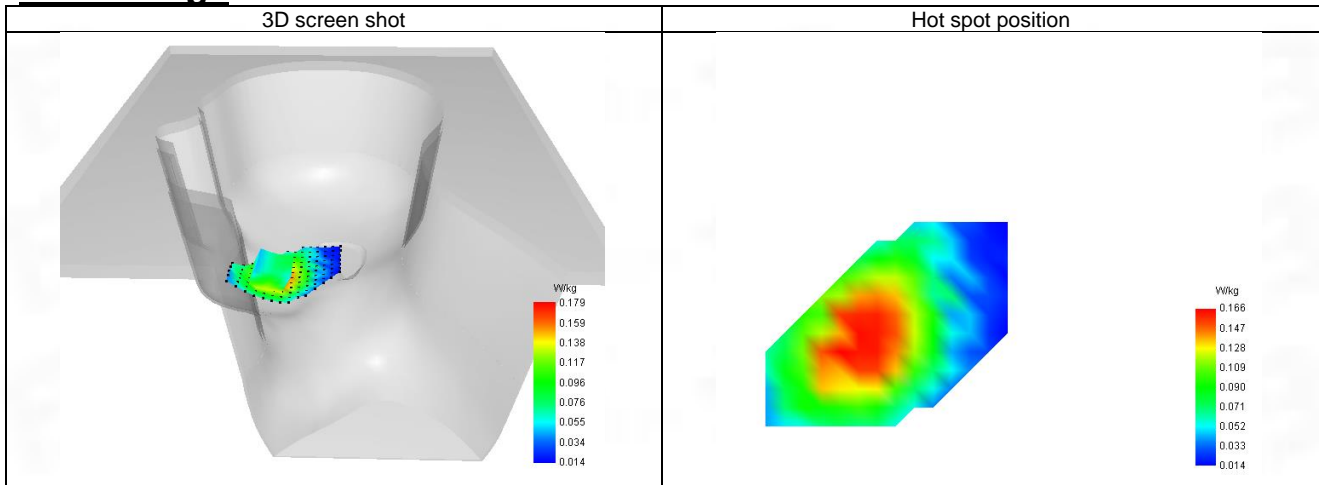

20-Body with back position in dist. 10mm on Channel 23790 in LTE Band 17

SAR Measurement at LTE band 17 (Body, Validation Plane)

Date of measurement: 19/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels	Middle (23790)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	710.000
Relative permittivity (real part)	41.604
Relative permittivity (imaginary part)	19.296
Conductivity (S/m)	0.805

C. SAR Surface and Volume

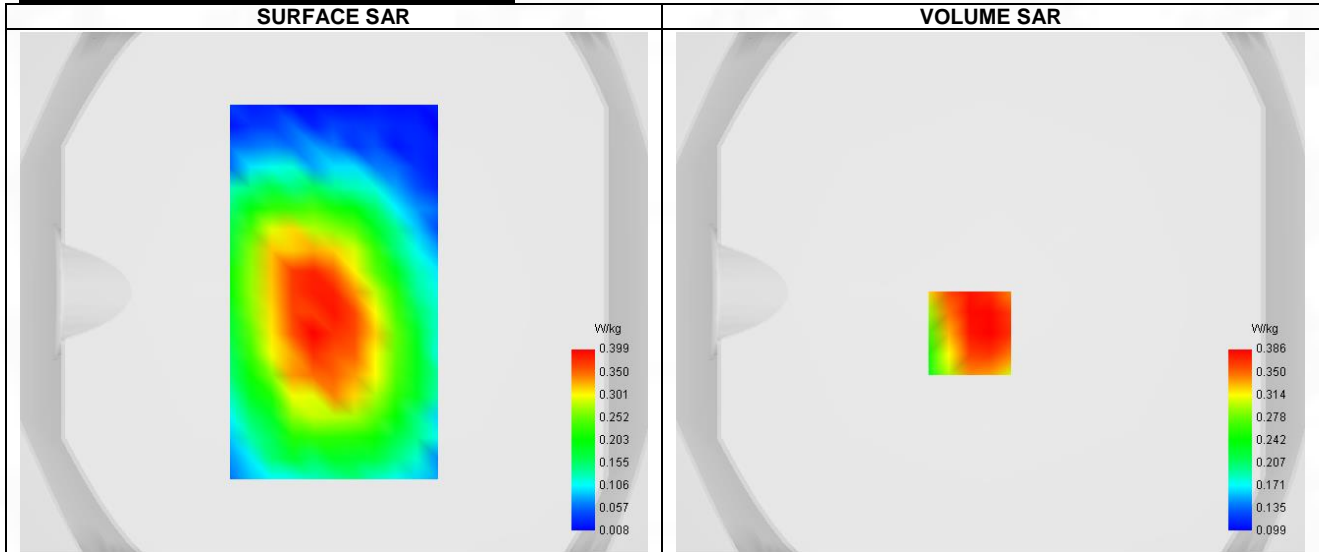


Maximum location: X=-8.00, Y=-16.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.294
SAR 1g (W/Kg)	0.400
Variation (%)	-3.480
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.659	0.386	0.269	0.223	0.168

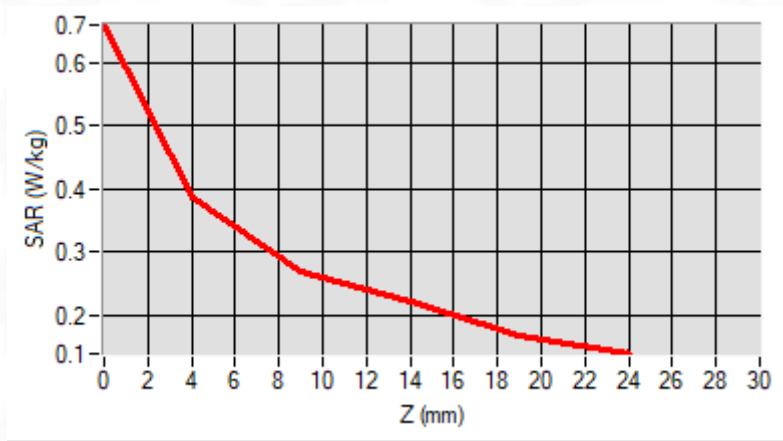

F. 3D Image

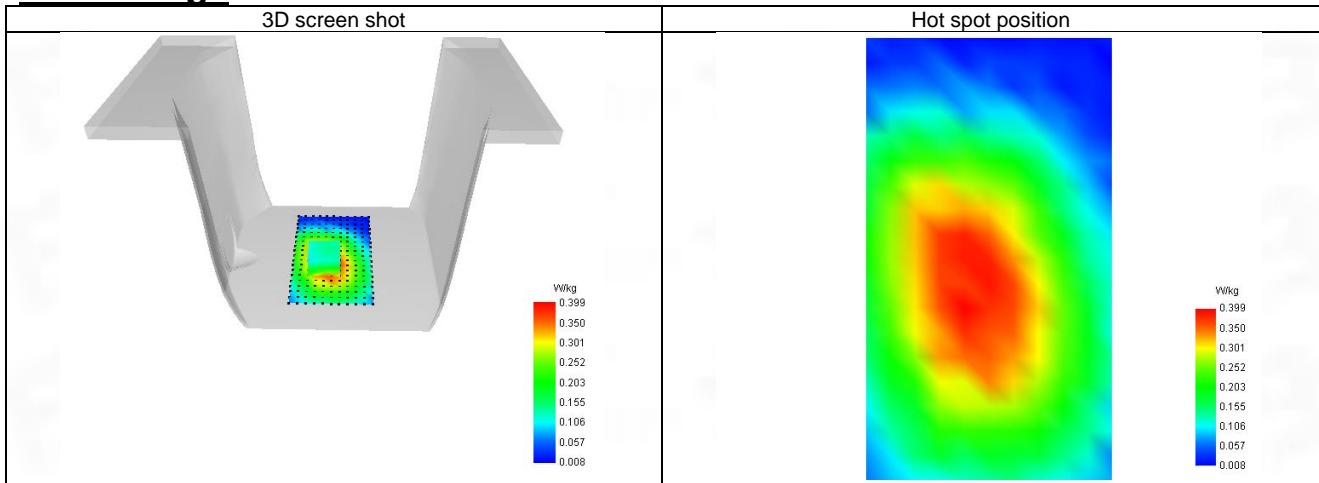

21-Head with front position in dist. 0mm on Channel 132072 in LTE band 66

SAR Measurement at LTE band 66 (Cheek, Right)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 66
Channels	Lower (132072)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Frequency (MHz)	1720.090
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

C. SAR Surface and Volume

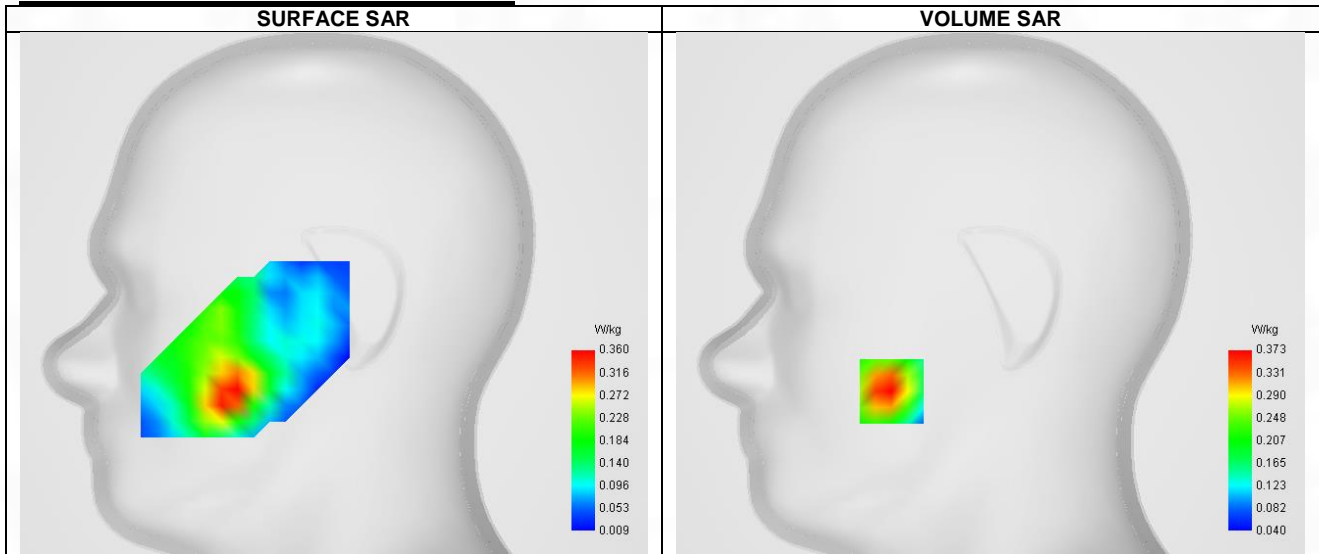


Maximum location: X=-49.00, Y=-49.00 ; SAR Peak: 0.54 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.215
SAR 1g (W/Kg)	0.354
Variation (%)	1.460
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.535	0.373	0.237	0.156	0.108

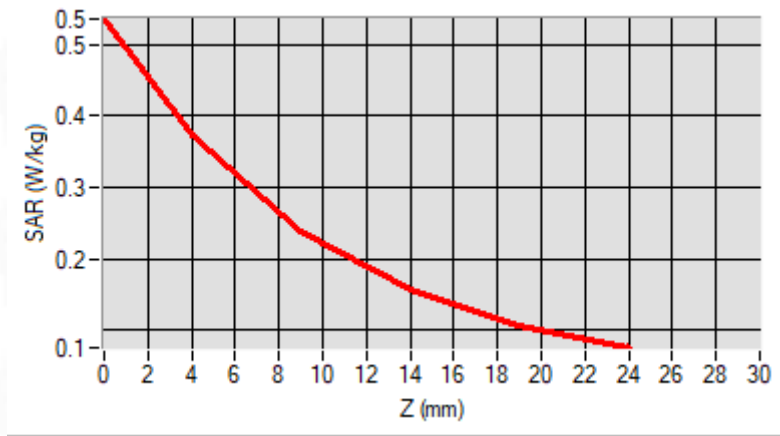

F. 3D Image

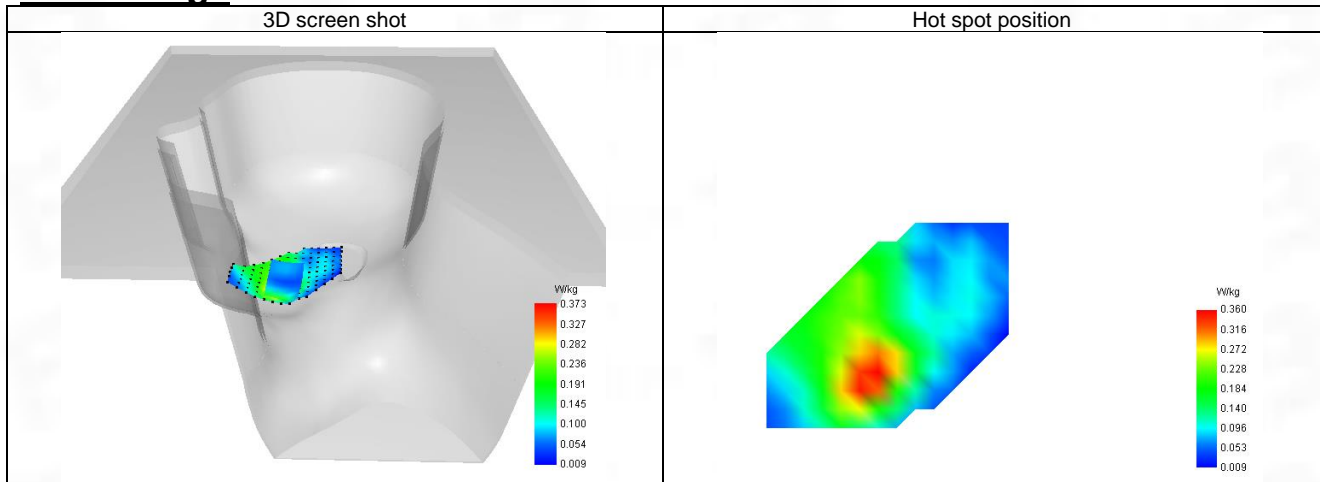

22-Body with back position in dist. 10mm on Channel 132072 in LTE Band 66

SAR Measurement at LTE band 66 (Body, Validation Plane)

Date of measurement: 20/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 66
Channels	Lower (132072)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Frequency (MHz)	1720.090
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

C. SAR Surface and Volume

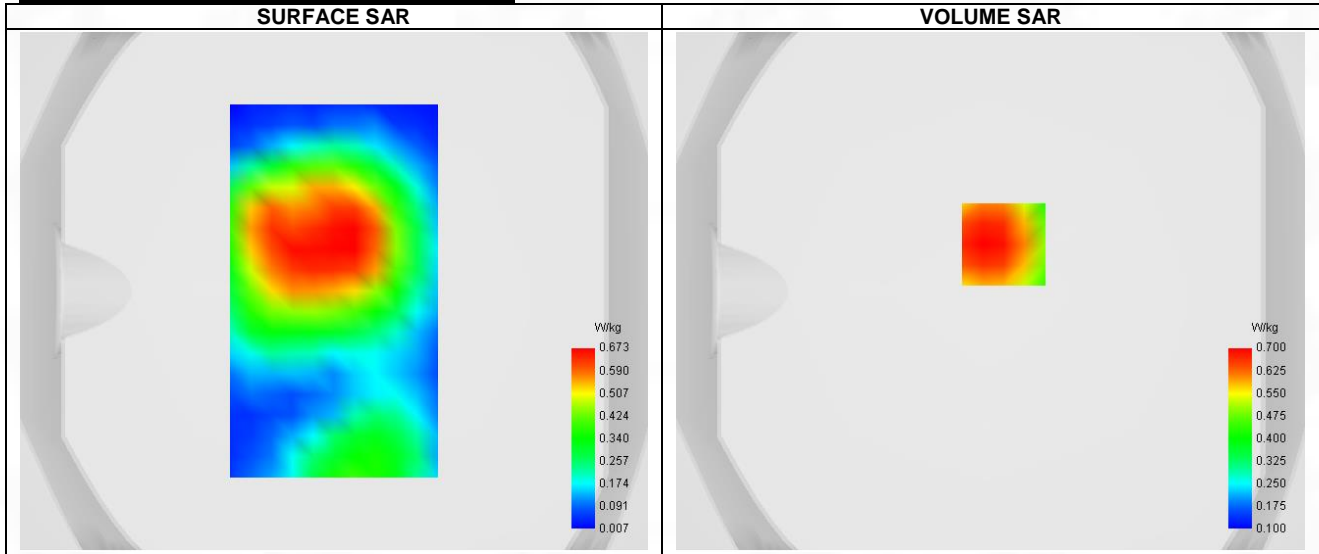


Maximum location: X=5.00, Y=18.00 ; SAR Peak: 0.97 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.441
SAR 1g (W/Kg)	0.673
Variation (%)	-1.370
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.323	0.700	0.418	0.309	0.197

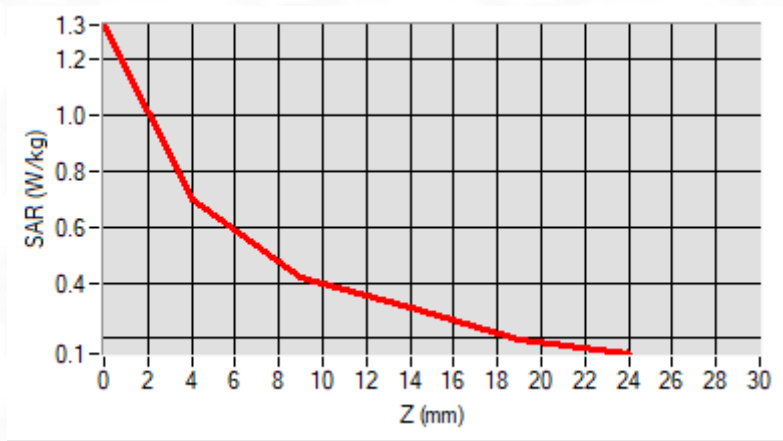

F. 3D Image

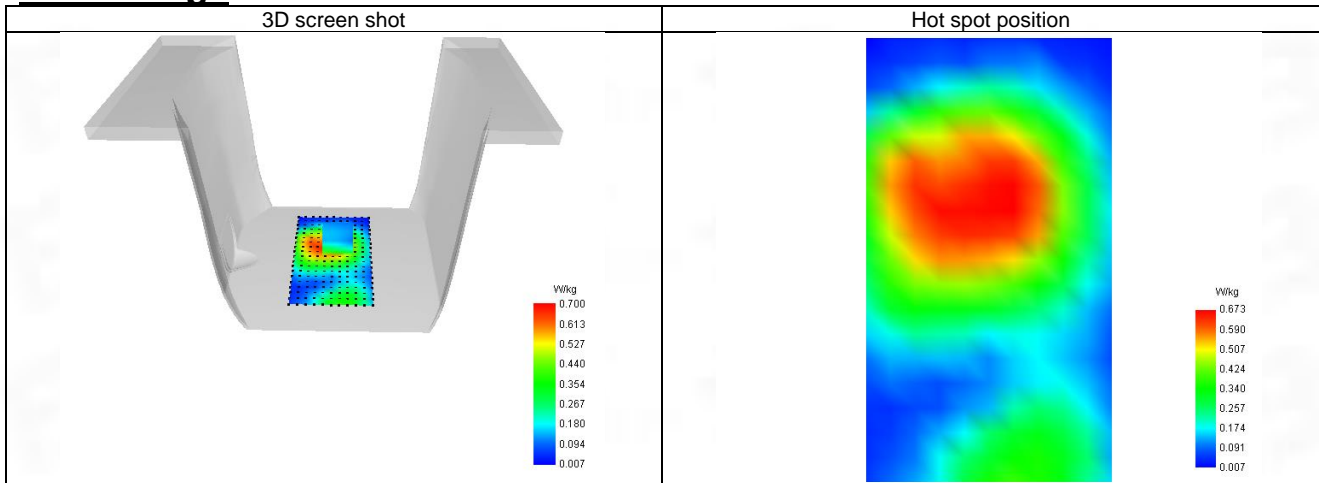

23-Head with front position in dist. 0mm on Channel 133372 in LTE band 71

SAR Measurement at LTE band 71 (Cheek, Right)

Date of measurement: 17/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 71
Channels	Higher (133372)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Frequency (MHz)	688.000
Relative permittivity (real part)	41.638
Relative permittivity (imaginary part)	19.262
Conductivity (S/m)	0.794

C. SAR Surface and Volume

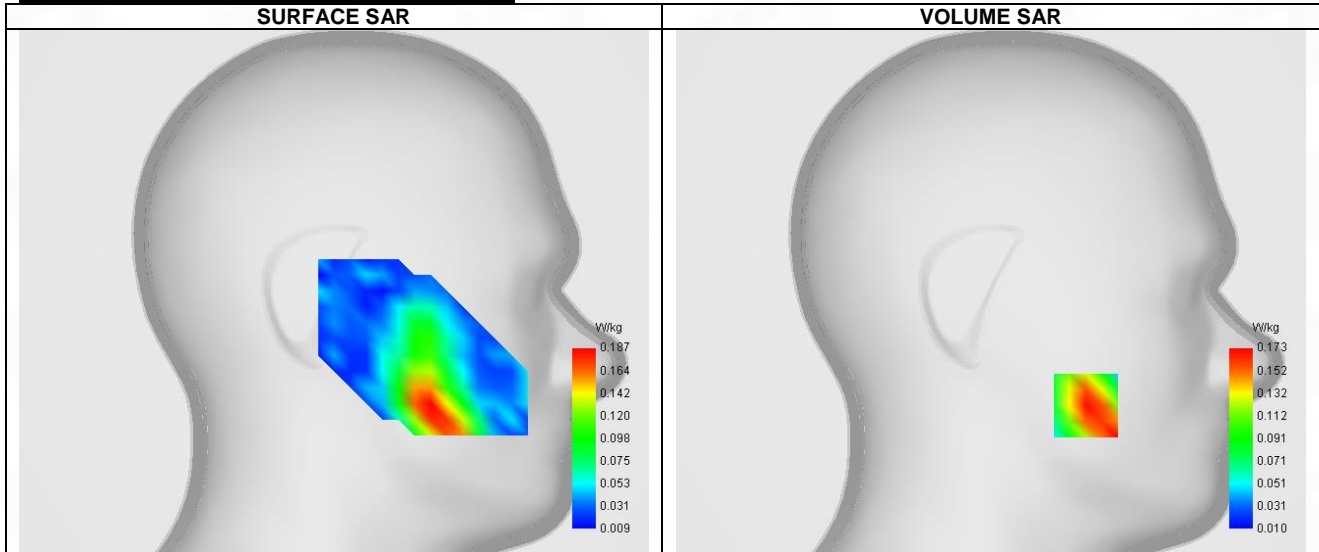


Maximum location: X=-47.00, Y=-57.00 ; SAR Peak: 0.25 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.102
SAR 1g (W/Kg)	0.161
Variation (%)	-2.000
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.668	0.173	0.060	0.071	0.024

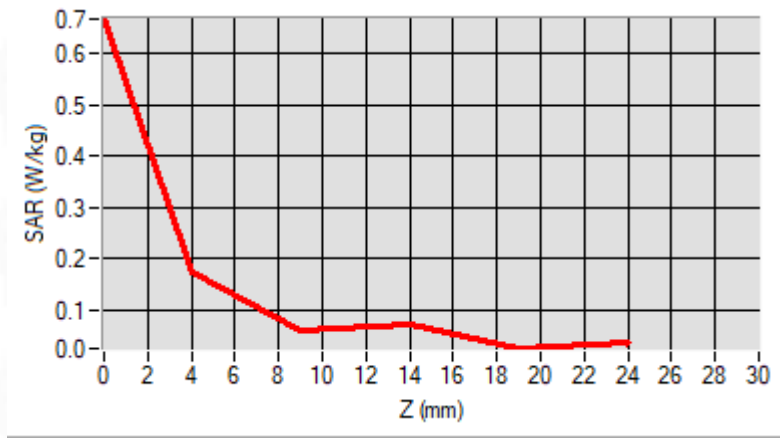

F. 3D Image

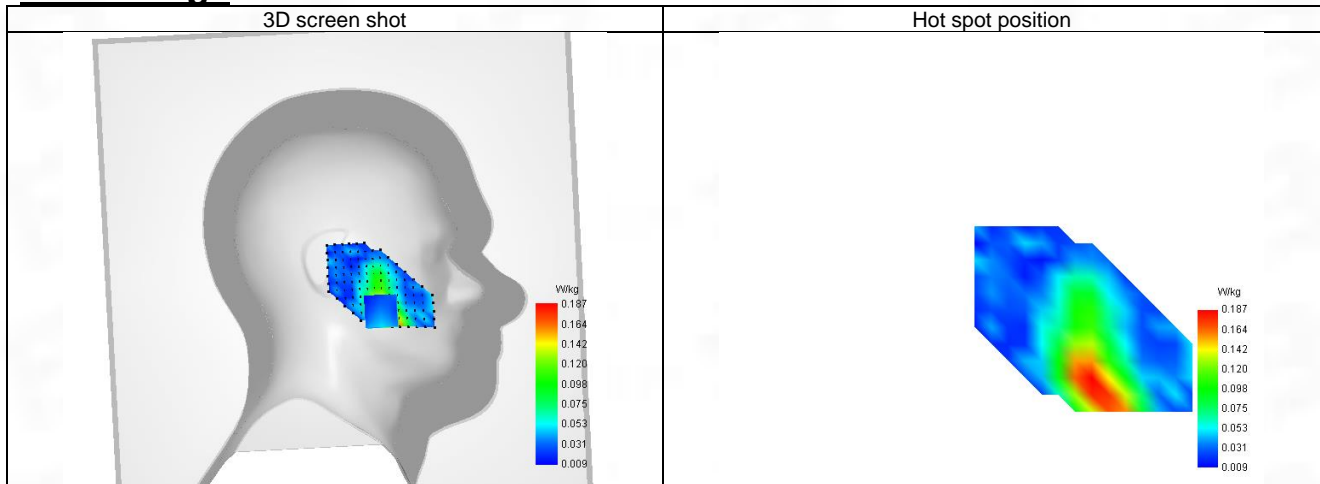

24-Body with bottom position in dist. 10mm on Channel 133372 in LTE band 71

SAR Measurement at LTE band 71 (Body, Validation Plane)

Date of measurement: 17/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 71
Channels	Higher (133372)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Frequency (MHz)	688.000
Relative permittivity (real part)	41.638
Relative permittivity (imaginary part)	19.262
Conductivity (S/m)	0.794

C. SAR Surface and Volume

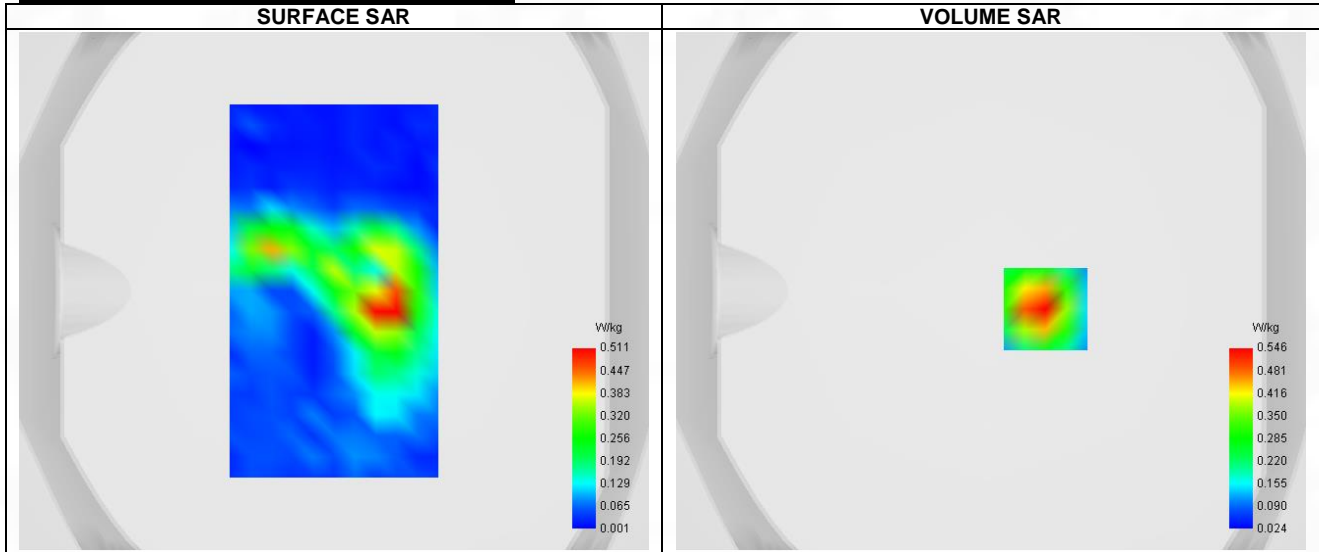


Maximum location: X=21.00, Y=-7.00 ; SAR Peak: 0.86 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.262
SAR 1g (W/Kg)	0.508
Variation (%)	-1.470
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.850	0.546	0.305	0.170	0.098

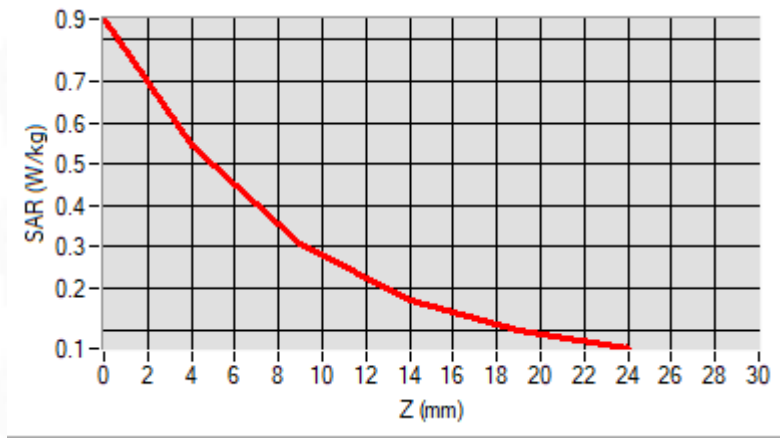

F. 3D Image

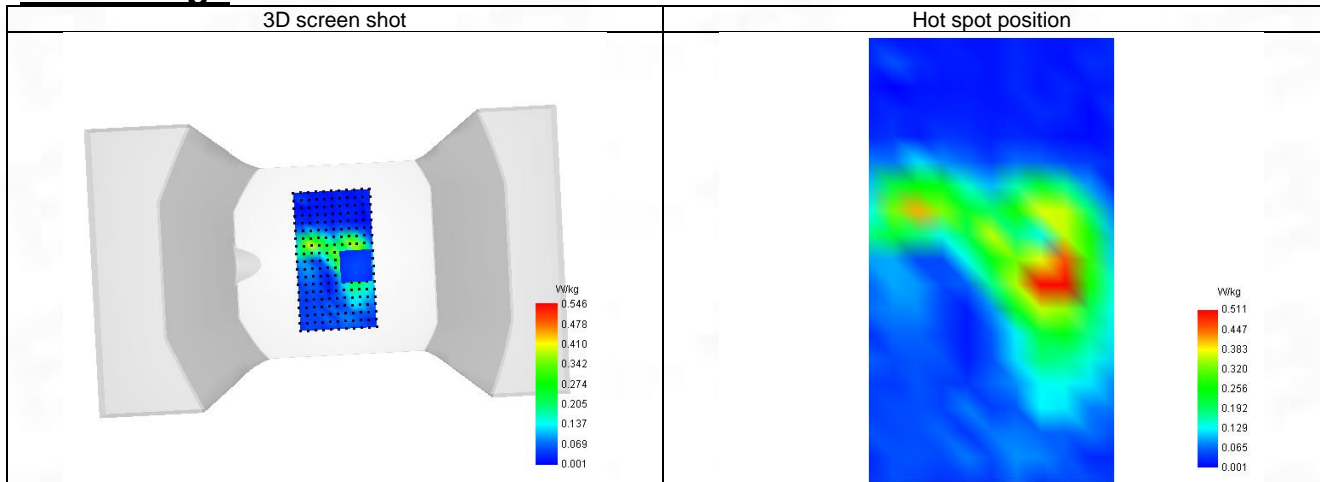

25-Head with front position in dist. 0mm on Channel 6 in IEEE 802.11b ISM
SAR Measurement at IEEE 802.11b ISM (Cheek, Right)


Date of measurement: 21/4/2023

A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Middle (6)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2437.000
Relative permittivity (real part)	39.097
Relative permittivity (imaginary part)	13.396
Conductivity (S/m)	1.796

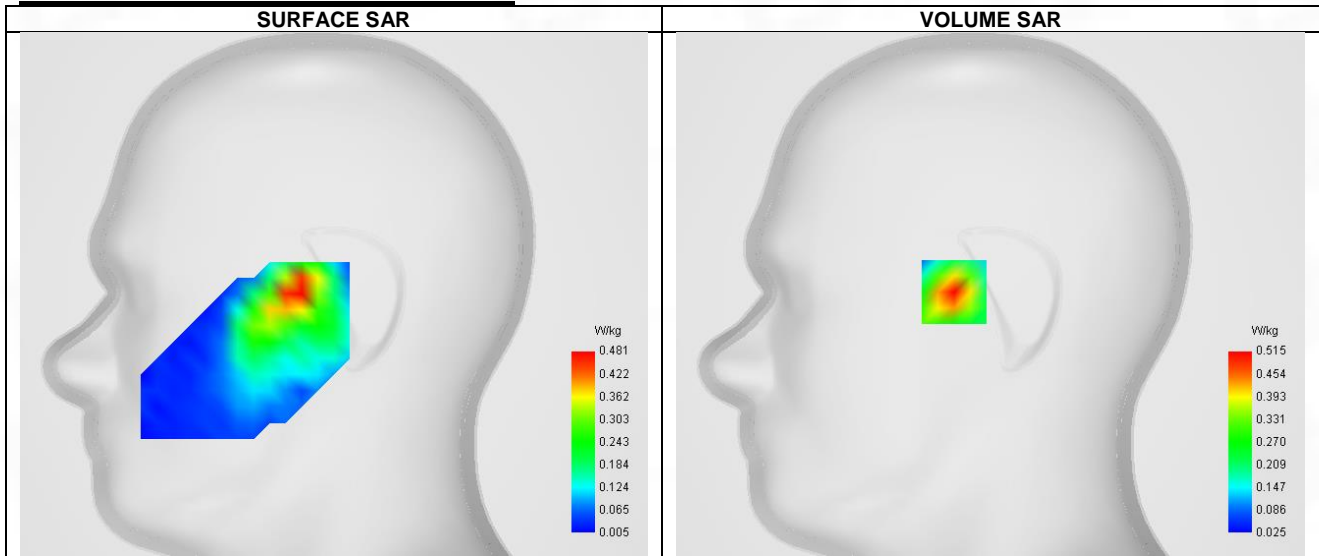C. SAR Surface and Volume


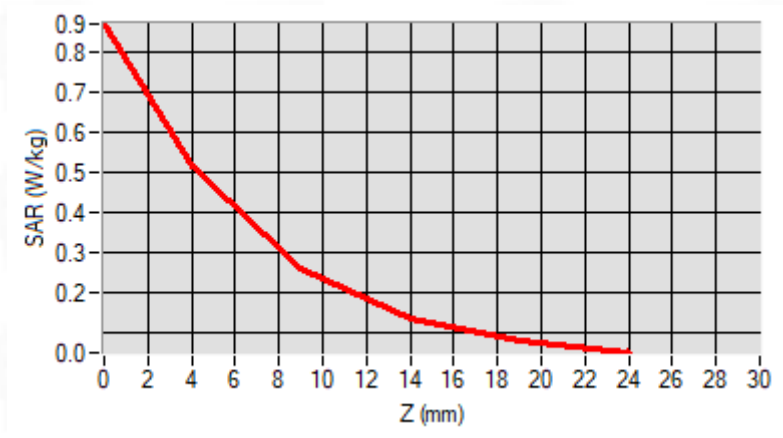
Maximum location: X=-18.00, Y=1.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.478
Variation (%)	-4.620
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.868	0.515	0.259	0.134	0.079



F. 3D Image

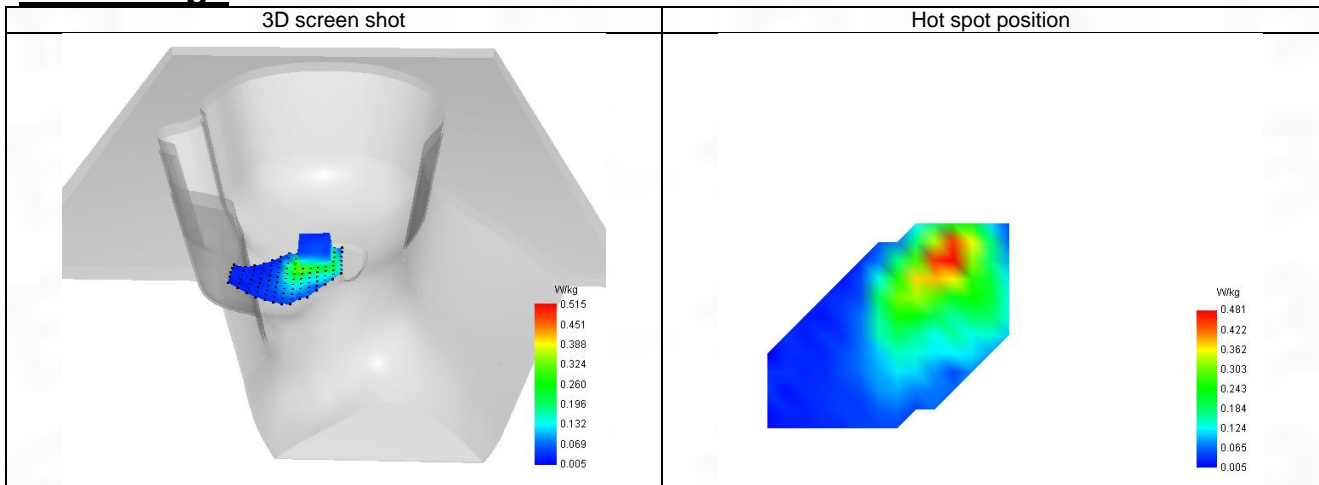

24-Body with back position in dist. 10mm on Channel 6 in 802.11b ISM

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 21/4/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle (6)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2437.000
Relative permittivity (real part)	39.097
Relative permittivity (imaginary part)	13.396
Conductivity (S/m)	1.796

C. SAR Surface and Volume

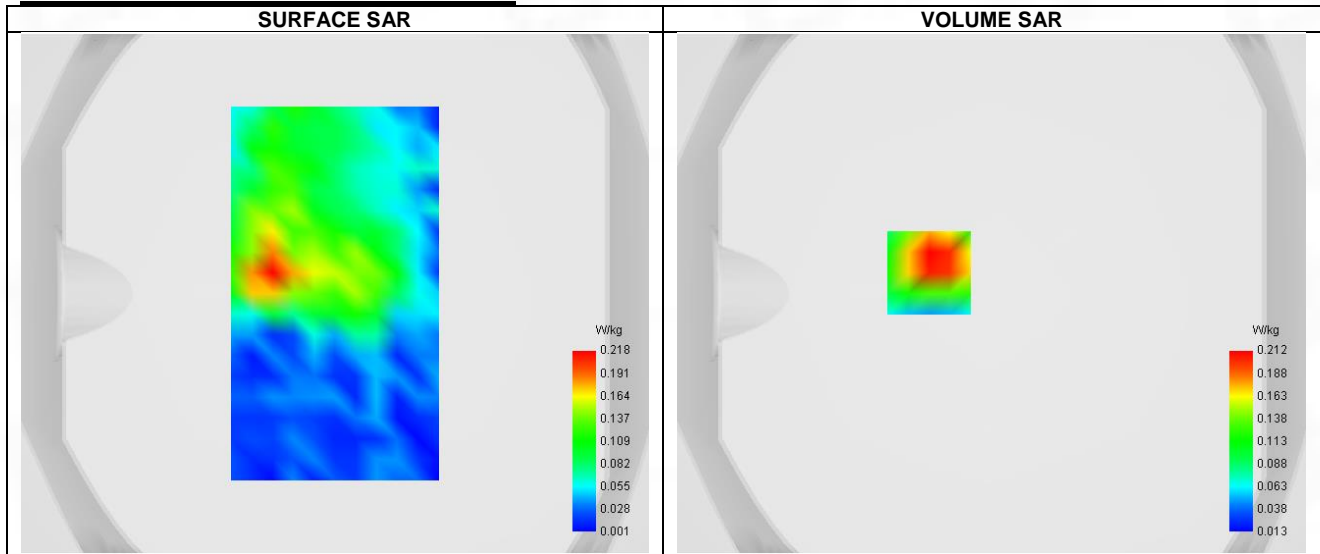


Maximum location: X=-24.00, Y=8.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.208
Variation (%)	-3.920
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.696	0.212	0.074	0.076	0.044

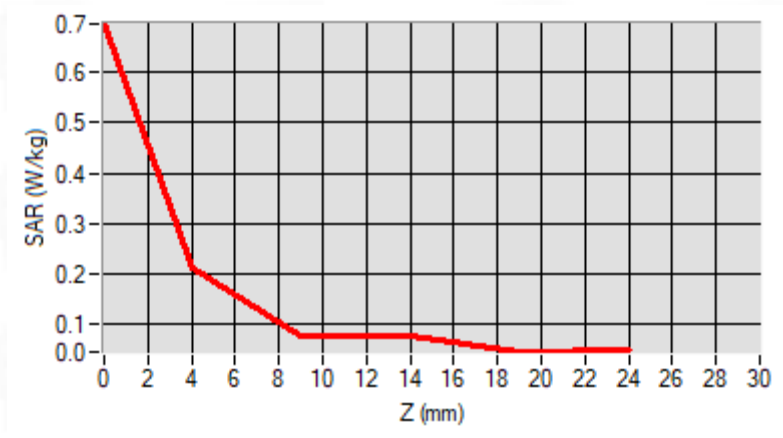


F. 3D Image

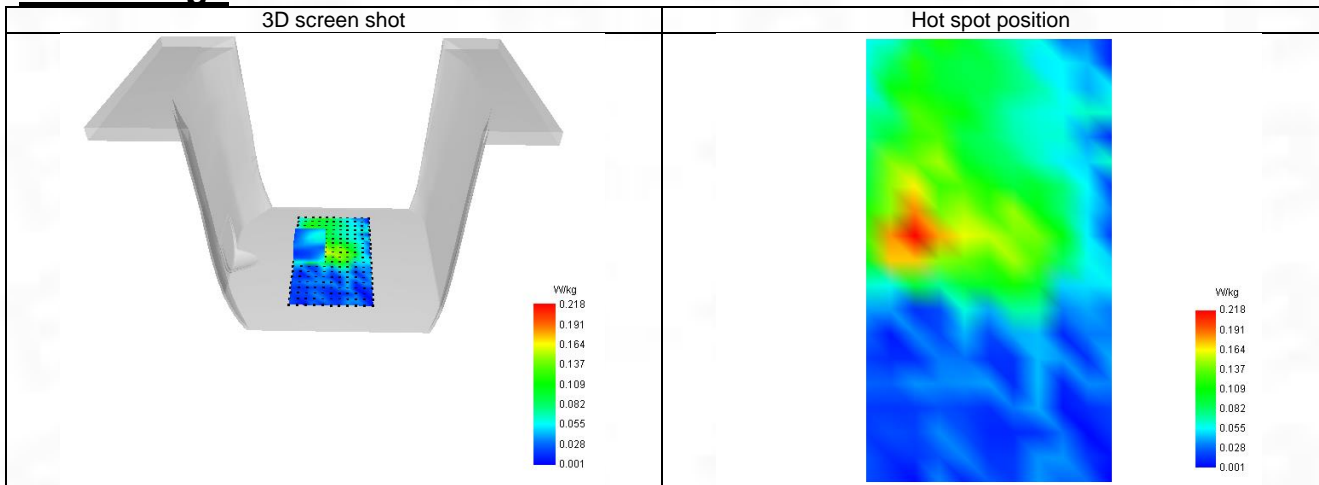

ANNEX D SAR Test Setup Photos

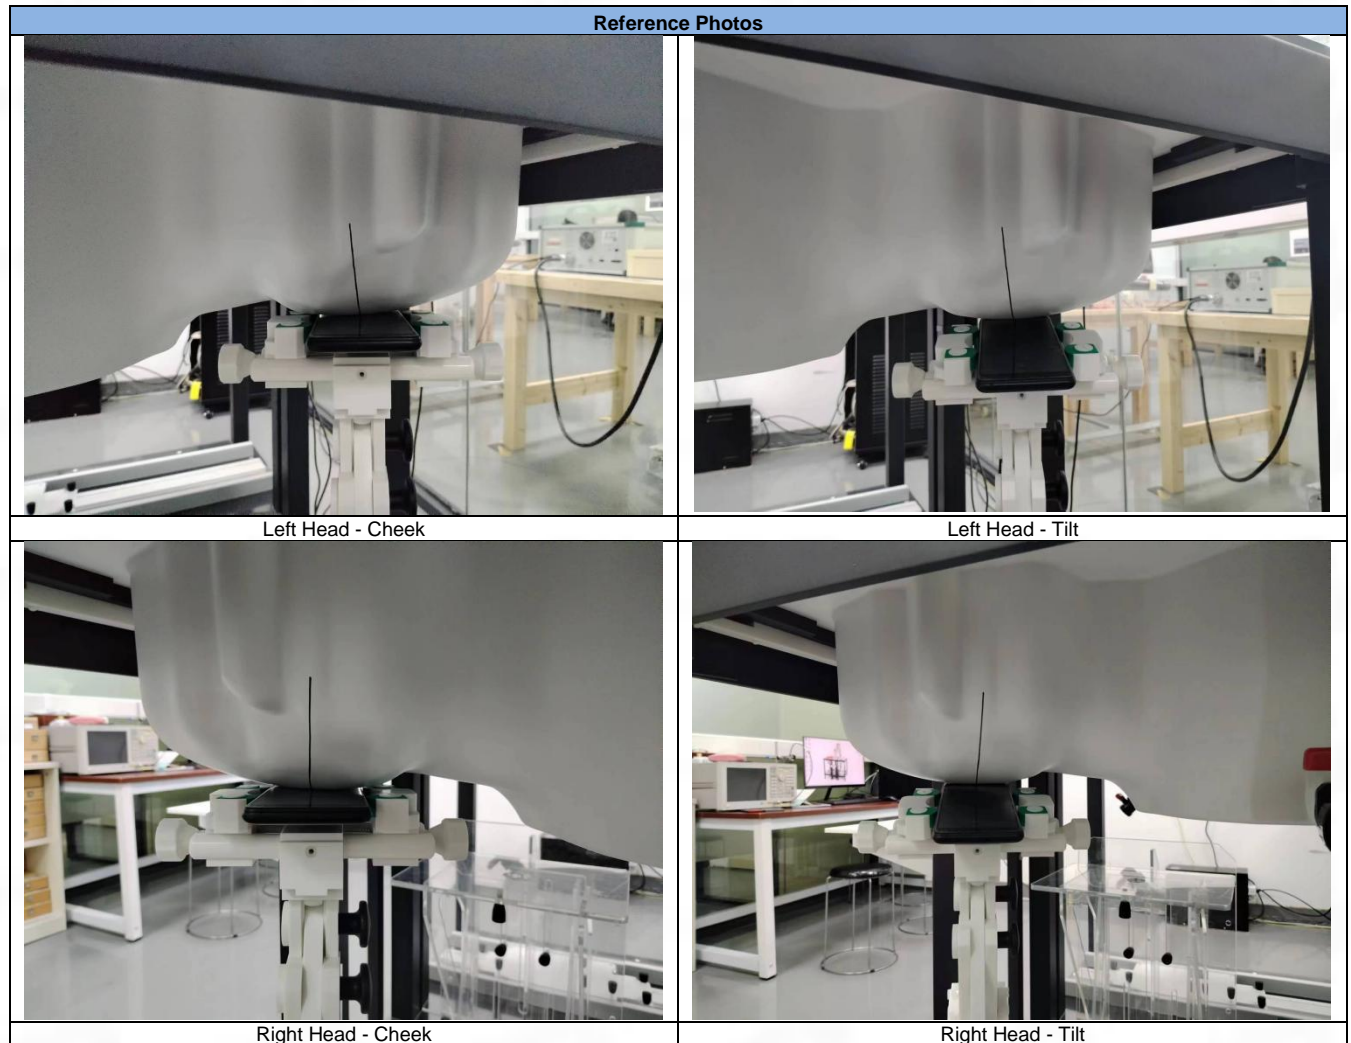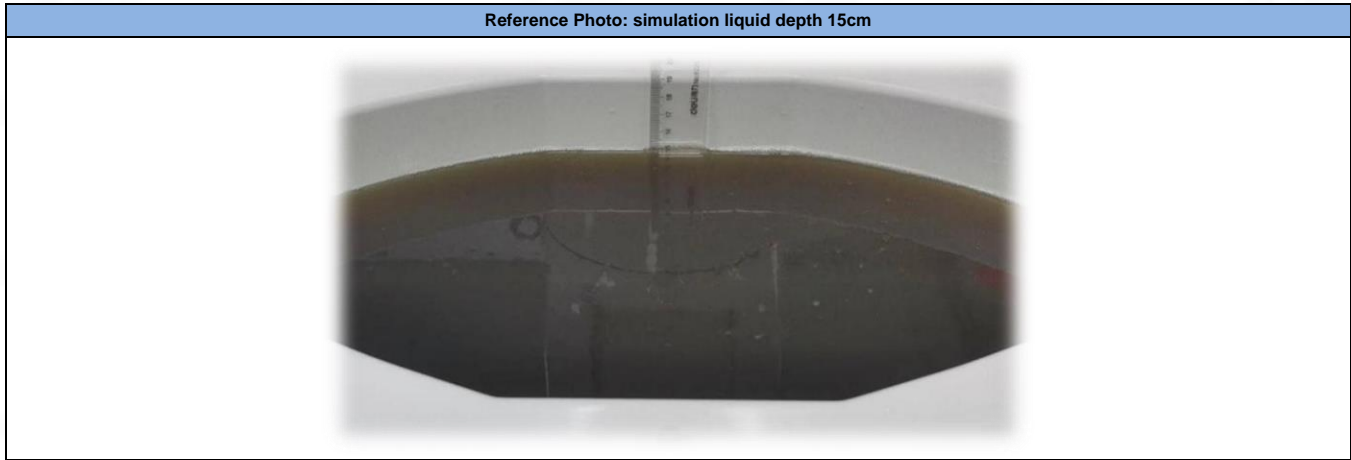

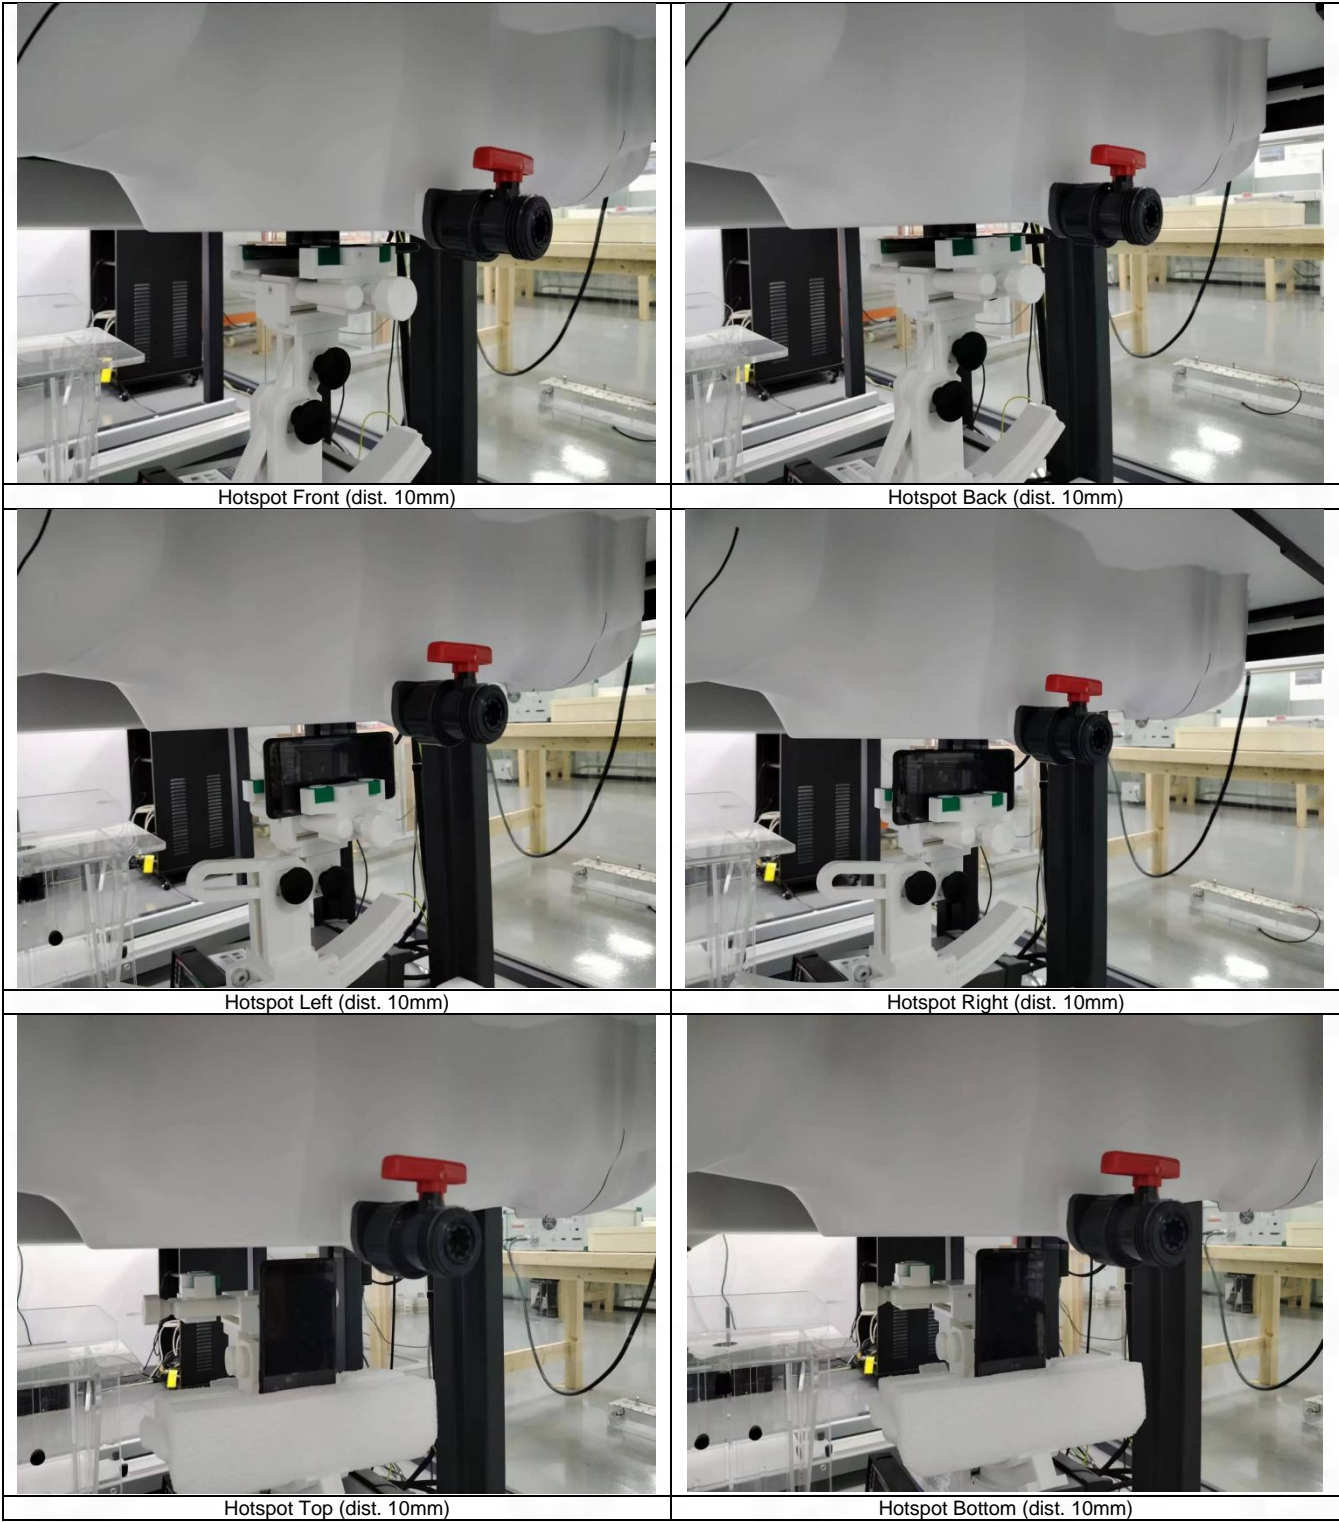

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--