



# **FCC TEST REPORT**

**FCC ID: 2A6CI-DB809S**

On Behalf of

**SHENZHEN DADOUTEK ELECTRONICS CO.,LTD**

**BLE Module**

**Model No.: DB809S**

Prepared for : SHENZHEN DADOUTEK ELECTRONICS CO.,LTD  
Address : 4F East, Building No.11.Rundongsheng Industry Park, Xixiang Street,  
Baoan District, Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2203310-C01-R01  
Date of Receipt : April 6, 2022  
Date of Test : April 6, 2022- April 12, 2022  
Date of Report : April 12, 2022  
Version Number : V0

## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards and Results -----</b>	<b>6</b>
1.1. Description of Standards and Results -----	6
<b>2. General information -----</b>	<b>7</b>
2.1. Description of Device (EUT)-----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details -----	8
2.4. Block Diagram of connection between EUT and simulators -----	8
2.5. Test Mode Description -----	8
2.6. Test Conditions -----	8
2.7. Test Facility -----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
<b>3. Spurious Emission -----</b>	<b>11</b>
3.1. Test Limits -----	11
3.2. Test Procedure -----	11
3.3. Test Setup -----	12
3.4. Test Results -----	13
<b>4. Power Line Conducted Emission-----</b>	<b>19</b>
4.1. Test Limits -----	19
4.2. Test Procedure -----	19
4.3. Test Setup -----	19
4.4. Test Results -----	19
<b>5. Conducted Maximum Output Power -----</b>	<b>21</b>
5.1. Test limits -----	21
5.2. Test Procedure -----	21
5.3. Test Setup -----	21
5.4. Test Results -----	21
<b>6. Power Spectral Density -----</b>	<b>22</b>
6.1. Test limits -----	22
6.2. Test Procedure -----	22
6.3. Test Setup -----	22
6.4. Test Results -----	22
<b>7. Bandwidth-----</b>	<b>26</b>
7.1. Test limits -----	26
7.2. Test Procedure -----	26
7.3. Test Setup -----	26
7.4. Test Results -----	26
<b>8. Band Edge Check-----</b>	<b>33</b>
8.1. Test limits -----	33
8.2. Test Procedure -----	33
8.3. Test Setup -----	33
8.4. Test Results -----	33
<b>9. Antenna Requirement -----</b>	<b>36</b>
9.1. Standard Requirement -----	36
9.2. Antenna Connected Construction-----	36

9.3. Results .....	36
<b>10. Test Setup Photo .....</b>	<b>37</b>
10.1. Photos of Radiated emission .....	37
10.2. Photos of Conducted Emission test.....	39
<b>11. EUT Photo .....</b>	<b>40</b>

## TEST REPORT DECLARATION

Applicant : SHENZHEN DADOUTEK ELECTRONICS CO.,LTD  
 Address : 4F East, Building No.11.Rundongsheng Industry Park, Xixiang Street, Baoan District, Shenzhen, China  
 Manufacturer : SHENZHEN DADOUTEK ELECTRONICS CO.,LTD  
 Address : 4F East, Building No.11.Rundongsheng Industry Park, Xixiang Street, Baoan District, Shenzhen, China  
 EUT Description : BLE Module  
                   (A) Model No. : DB809S  
                   (B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10-2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen  
Project Engineer

*Yannis Wen*

Approved by (name + signature).....: Simple Guan  
Project Manager

*Simple Guan*

Date of issue..... : April 11, 2022

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	April 11, 2022	Initial released Issue	Yannis Wen

## 1. Summary of Standards and Results

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

<b>Test Item</b>	<b>Test Requirement</b>	<b>Standards Paragraph</b>	<b>Result</b>
Conducted Emission	FCC PART 15	15.207	P
6dB Bandwidth	FCC PART 15	15.247 (a)(2)	P
Output Power	FCC PART 15	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15	15.247 (d)	P
Power Spectral Density	FCC PART 15	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15	15.205	P
Antenna Requirement	FCC PART 15	15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

## 2. General information

### 2.1. Description of Device (EUT)

Description/PMN : BLE Module

Model  
Number/HVIN(s) : DB809S  
Diff. : N/A

Trademark : N/A

Test Voltage : DC 3.3V from DC Power

Radio Technology : Bluetooth LE

Operation  
frequency : 2402-2480MHz

Channel No. : 40 Channels

Modulation type : GFSK

Antenna Type : Internal antenna, Maximum Gain is 1.72dBi

Software version : V04

Hardware  
Version/FVIN : V1.0

Remark: The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for Bluetooth LE function, and there is no other transmitter involved.


## 2.2. Accessories of Device (EUT)

Accessories1 : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1.	Notebook	Lenovo	ThinkPad E14	N/A	N/A
2	DC Power	MCP	M10-AD370-6	1303117617	N/A

## 2.4. Block Diagram of connection between EUT and simulators



## 2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH20	2440
	High: CH40	2480

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa



## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
 Registration Number: 293961

July 15, 2019 Certificated by IC  
 Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2020.09.02	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2021.08.25	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2021.08.25	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2021.08.25	1Year
Receiver	R&S	ESCI	101165	2021.08.25	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2020.04.12	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
RF Cable	Resenberger	Cable 1	RE1	2021.08.25	1Year
RF Cable	Resenberger	Cable 2	RE2	2021.08.25	1Year
RF Cable	Resenberger	Cable 3	CE1	2021.08.25	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2021.08.25	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2021.08.25	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2021.08.25	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2021.08.25	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	SK2018101801	2021.08.25	1 Year
Power Meter	Agilent	E9300A	MY41496628	2021.08.25	1 Year
Power Sensor	DARE	RPR3006W	15100041SNO91	2021.08.25	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000 -40-880	100631	2021.04.21	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2021.08.25	1 Year
Adjustable attenuator	MWRfTest	N/A	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

### 3. Spurious Emission

#### 3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uv/m)

#### 3.2. Test Procedure


The measuring distance of 3m shall be used for measurements at frequency up to 1GH and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation

The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.


The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured

If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz. For the actual test configuration, please see the test setup photo.


### 3.3. Test Setup

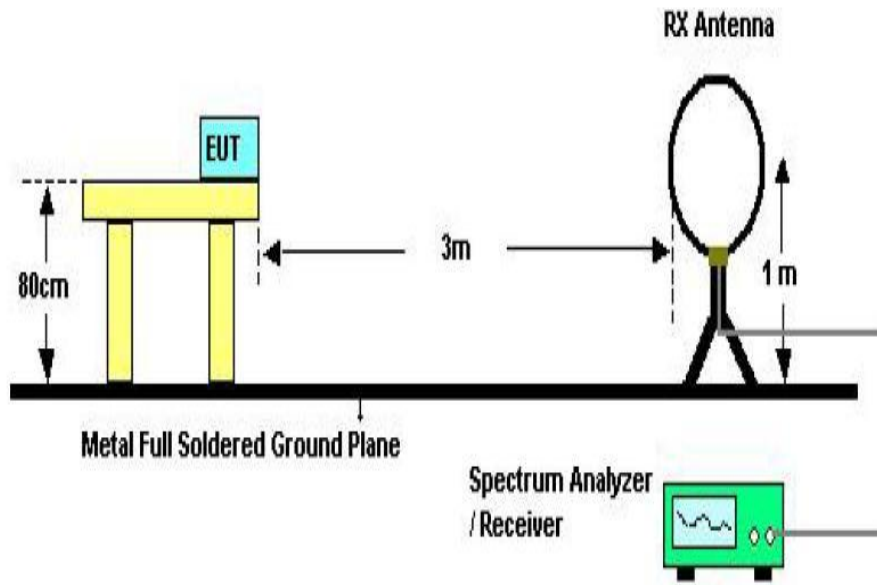

Below 30MHz Test Setup

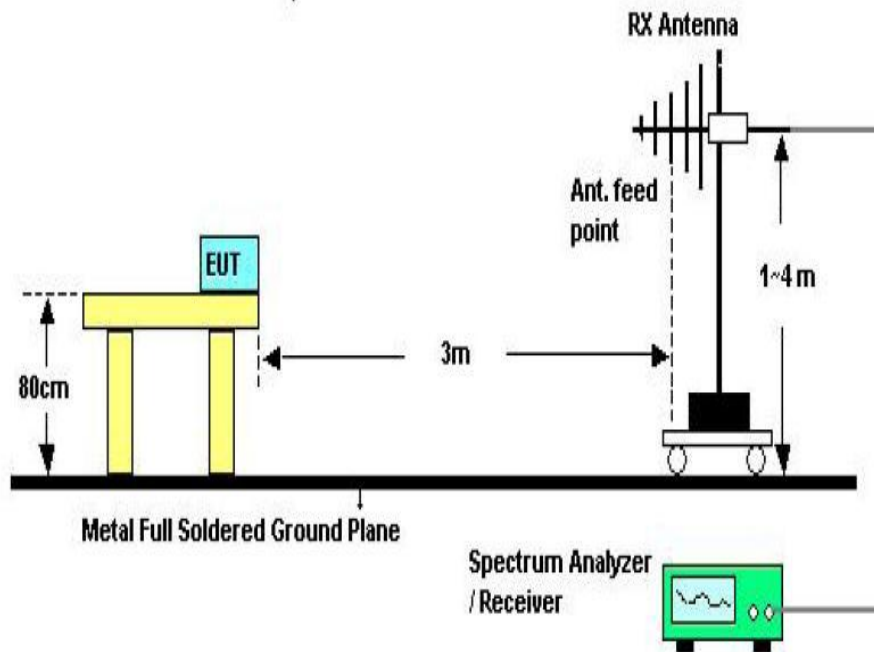

Above 30MHz Test Setup

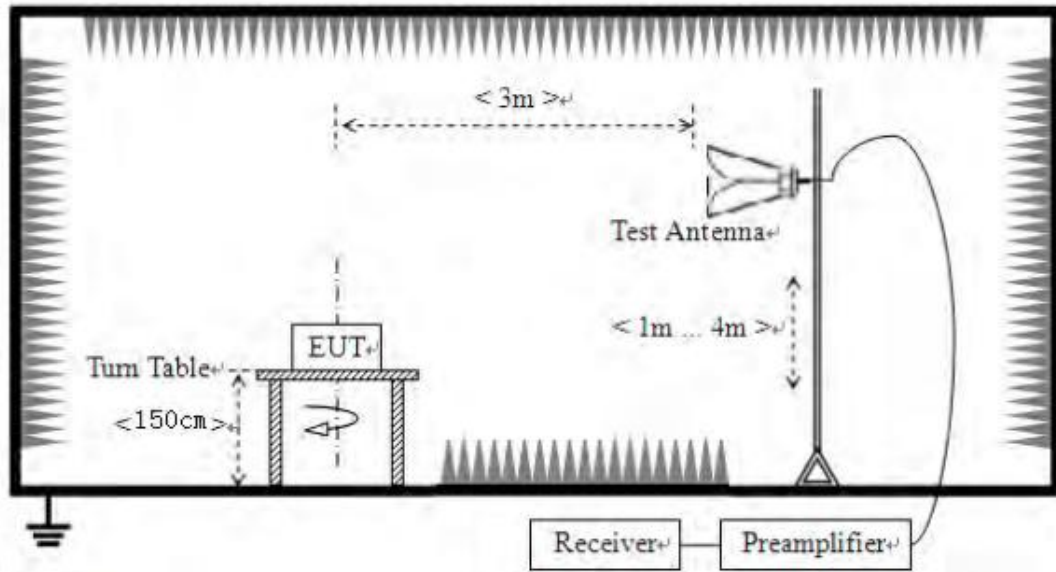

Above 1GHz Test Setup

### 3.4. Test Results

#### Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the 10th harmonic from 9 kHz to the EUT.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2. Only show the test data of the worst Channel in this report.


From 30MHz to 1000MHz: Conclusion: PASS

<b>EUT Description</b>	BLE Module	<b>Model No.</b>	DB809S
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test date</b>	2022/04/08
<b>Test Voltage</b>	DC 3.3V from DC Power	<b>Test mode</b>	GFSK 1Mbps (2480MHz)

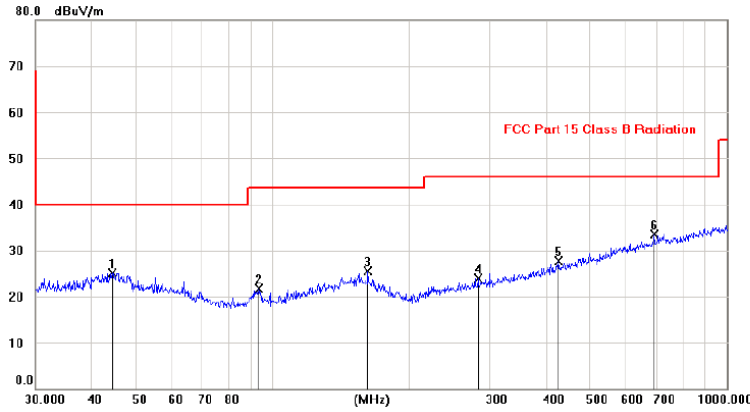

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	44.2804	10.89	14.19	25.08	40.00	-14.92	peak			
2	93.1676	11.32	10.35	21.67	43.50	-21.83	peak			
3	162.0982	10.73	14.84	25.57	43.50	-17.93	peak			
4	283.2168	10.22	13.67	23.89	46.00	-22.11	peak			
5	426.0228	10.75	16.94	27.69	46.00	-18.31	peak			
6 *	692.3103	11.90	21.58	33.48	46.00	-12.52	peak			

**Pol** Horizontal

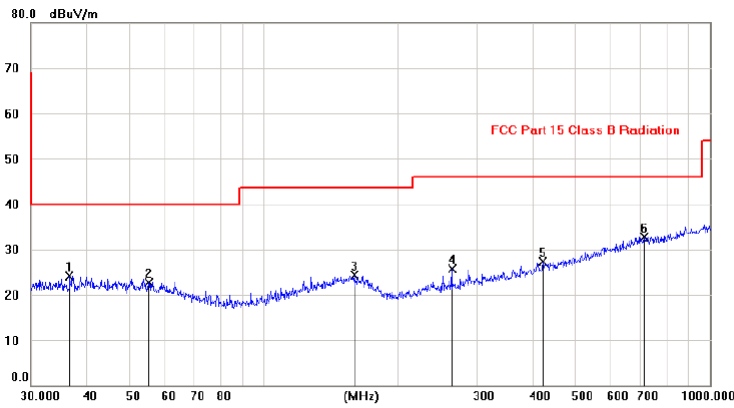

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	36.7490	10.09	14.01	24.10	40.00	-15.90	peak			
2	55.2336	9.22	13.57	22.79	40.00	-17.21	peak			
3	159.2623	9.18	15.04	24.22	43.50	-19.28	peak			
4	264.5292	12.60	13.11	25.71	46.00	-20.29	peak			
5	423.4413	10.40	16.85	27.25	46.00	-18.75	peak			
6 *	713.0056	10.79	21.91	32.70	46.00	-13.30	peak			

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK 1Mbps (2480MHz) was listed in this report.

From 1G-25GHz

For 1Mbps

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	44.90	V	33.95	10.18	34.26	54.77	74	-19.23	PK
4804	37.16	V	33.95	10.18	34.26	47.03	54	-6.97	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	43.77	H	33.95	10.18	34.26	53.64	74	-20.36	PK
4804	35.77	H	33.95	10.18	34.26	45.64	54	-8.36	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	41.66	V	33.93	10.2	34.29	51.50	74	-22.50	PK
4880	34.25	V	33.93	10.2	34.29	44.09	54	-9.91	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	46.42	H	33.93	10.2	34.29	56.26	74	-17.74	PK
4880	36.71	H	33.93	10.2	34.29	46.55	54	-7.45	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	45.97	V	33.98	10.22	34.25	55.92	74	-18.08	PK
4960	33.75	V	33.98	10.22	34.25	43.70	54	-10.30	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	45.19	H	33.98	10.22	34.25	55.14	74	-18.86	PK
4960	34.87	H	33.98	10.22	34.25	44.82	54	-9.18	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									




**For 2Mbps**

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	42.25	V	33.95	10.18	34.26	52.12	74	-21.88	PK
4804	38.69	V	33.95	10.18	34.26	48.56	54	-5.44	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	45.73	H	33.95	10.18	34.26	55.60	74	-18.40	PK
4804	36.70	H	33.95	10.18	34.26	46.57	54	-7.43	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	43.30	V	33.93	10.2	34.29	53.14	74	-20.86	PK
4880	35.45	V	33.93	10.2	34.29	45.29	54	-8.71	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	43.22	H	33.93	10.2	34.29	53.06	74	-20.94	PK
4880	36.56	H	33.93	10.2	34.29	46.40	54	-7.60	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	44.15	V	33.98	10.22	34.25	54.10	74	-19.90	PK
4960	35.46	V	33.98	10.22	34.25	45.41	54	-8.59	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.38	H	33.98	10.22	34.25	53.33	74	-20.67	PK
4960	34.96	H	33.98	10.22	34.25	44.91	54	-9.09	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									





Conducted method:  
For 1Mbps

<b>EUT Description</b>	BLE Module	<b>Model No.</b>	DB809S
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Test mode</b>	GFSK (2402MHz)	<b>Test mode</b>	GFSK (2440MHz)

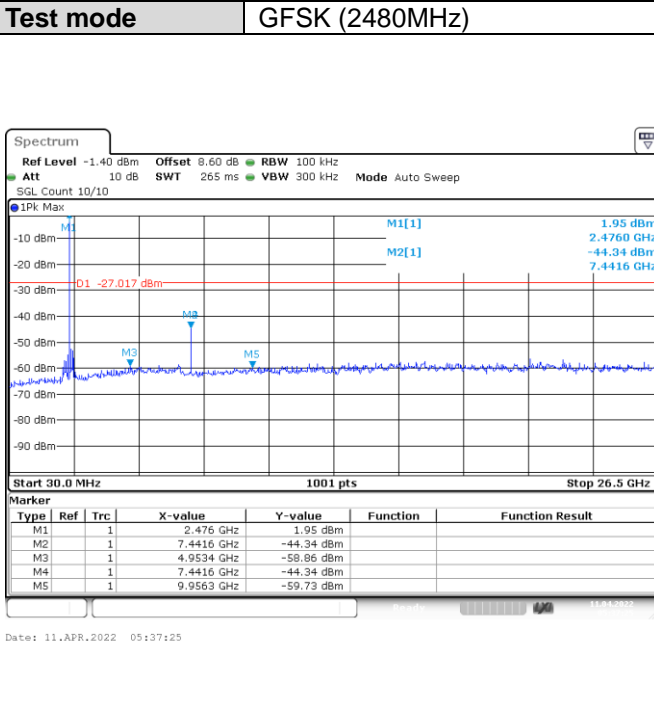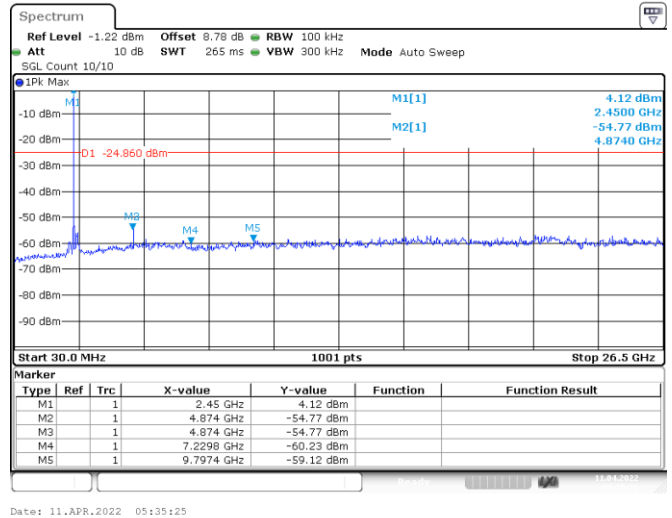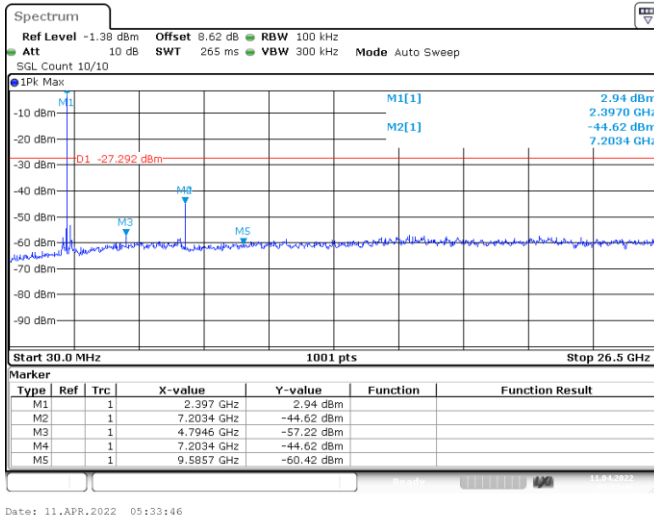


For 2Mbps

<b>EUT Description</b>	BLE Module	<b>Model No.</b>	DB809S
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Test mode</b>	GFSK (2402MHz)	<b>Test mode</b>	GFSK (2440MHz)

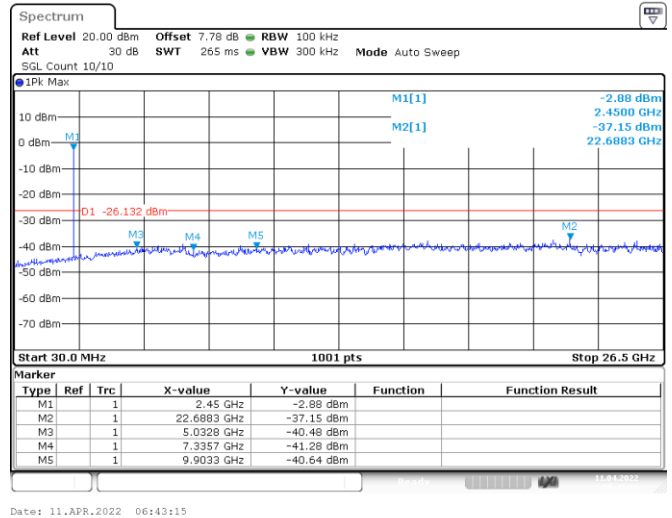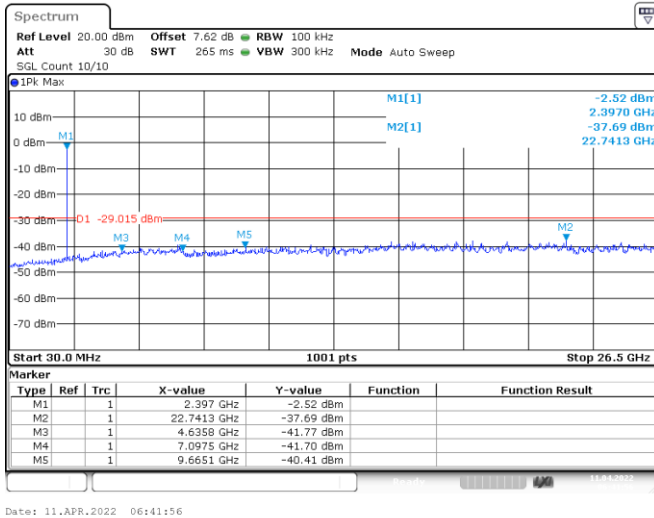

<b>Test mode</b>	GFSK (2480MHz)
------------------	----------------

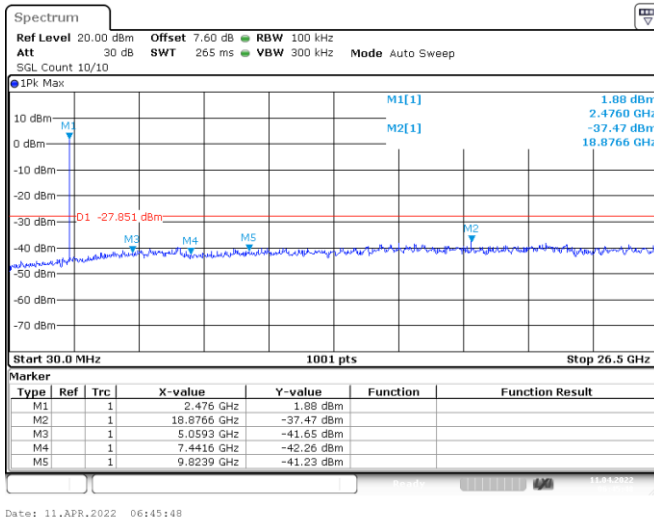

## 4. Power Line Conducted Emission

### 4.1. Test Limits

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


Notes: 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.  
 3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

### 4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

### 4.3. Test Setup

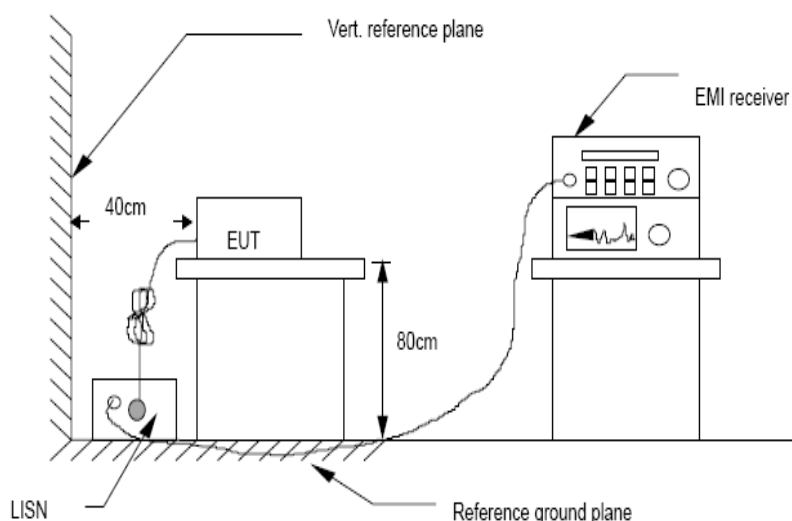


### 4.4. Test Results

<b>EUT Description</b>	BLE Module	<b>Model No.</b>	DB809S
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test date</b>	2022/04/08
<b>Test Voltage</b>	DC 3.3V from DC Power	<b>Test mode</b>	GFSK 1Mbps (2480MHz)

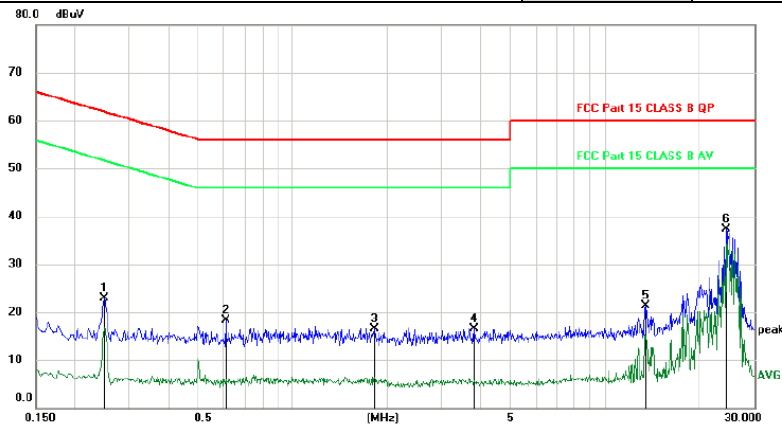

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2490	13.00	9.97	22.97	61.79	-38.82	peak	
2		0.6090	8.47	9.92	18.39	56.00	-37.61	peak	
3		1.8270	6.63	9.89	16.52	56.00	-39.48	peak	
4		3.8190	6.56	9.96	16.52	56.00	-39.48	peak	
5		13.4820	11.02	10.29	21.31	60.00	-38.69	peak	
6	*	24.3540	26.93	10.44	37.37	60.00	-22.63	peak	

<b>Pol</b>	Neutral
------------	---------

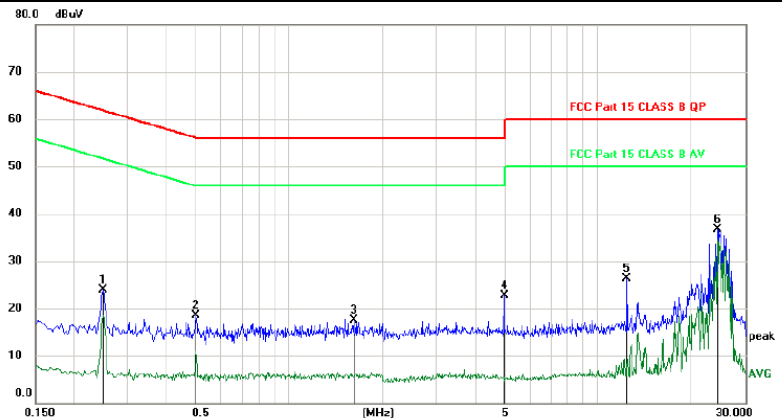

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2490	13.93	9.97	23.90	61.79	-37.89	peak	
2		0.4980	8.47	9.96	18.43	56.03	-37.60	peak	
3		1.6170	7.60	9.90	17.50	56.00	-38.50	peak	
4		4.9650	12.68	10.04	22.72	56.00	-33.28	peak	
5		12.4440	16.08	10.27	26.35	60.00	-33.65	peak	
6	*	24.3540	26.28	10.44	36.72	60.00	-23.28	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK 1Mbps (2480MHz) was listed in this report.

## 5. Conducted Maximum Output Power

### 5.1. Test limits

Please refer section RSS-247 & 15.247.

### 5.2. Test Procedure


Details see the KDB558074 D01 Meas Guidance V05

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands AVG output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

### 5.3. Test Setup



### 5.4. Test Results

For 1Mbps			
Channel	Frequency (MHz)	AVG Output Power (dBm)	Limit (dBm)
CH1	2402	3.351	30
CH20	2440	5.197	30
CH40	2480	3.141	30
Conclusion: PASS			

For 2Mbps			
Channel	Frequency (MHz)	AVG Output Power (dBm)	Limit (dBm)
CH1	2402	2.686	30
CH20	2440	4.507	30
CH40	2480	2.137	30
Conclusion: PASS			

## 6. Power Spectral Density

### 6.1. Test limits

6.1.1 Please refer section RSS-247 & 15.247.

6.1.2 For direct sequence systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance V05

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Detector = RMS. Set the spectrum analyzer as RBW = 100kHz(Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ ), VBW = 300kHz(Set the VBW  $\geq 3 \times \text{RBW}$ ), span= $1.5 \times \text{DTS}$  bandwidth., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

### 6.3. Test Setup



### 6.4. Test Results

For 1Mbps					
Channel	Frequency (MHz)	Max PSD (dBm/100K)	Max PSD (dBm/3K)	Limit (dBm/3K)	Result
CH1	2402	1.956	-13.273	8	PASS
CH20	2440	4.892	-10.337	8	PASS
CH40	2480	2.825	-12.404	8	PASS
Conclusion: PASS					


Note: Max PSD (dBm/3K)= Max PSD (dBm/100K)-Log(100/3)\*10



Lowest channel



Middle channel

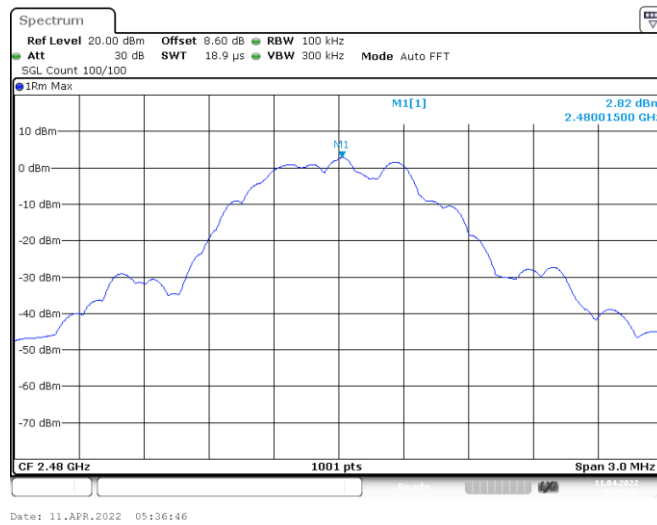


Highest channel

<b>For 2Mbps</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Max PSD (dBm/100K)</b>	<b>Max PSD (dBm/3K)</b>	<b>Limit (dBm)</b>	<b>Result</b>
CH1	2402	2.312	-12.917	8	PASS
CH20	2440	4.113	-11.116	8	PASS
CH40	2480	2.136	-13.093	8	PASS


Conclusion: PASS

Note: Max PSD (dBm/3K)= Max PSD (dBm/100K)-Log(100/3)\*10




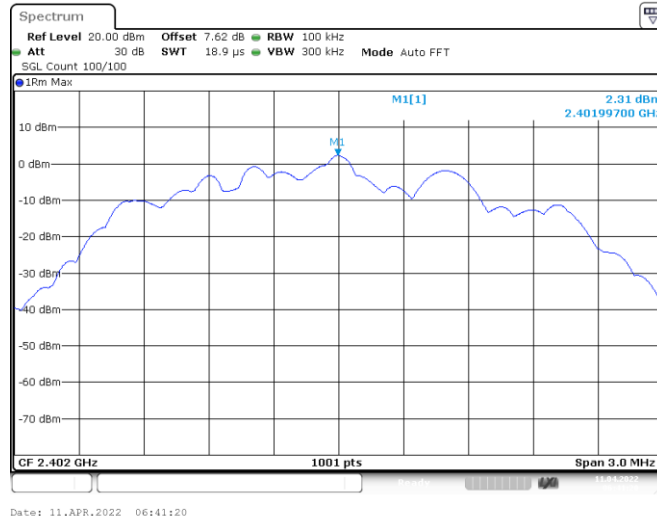

Lowest channel

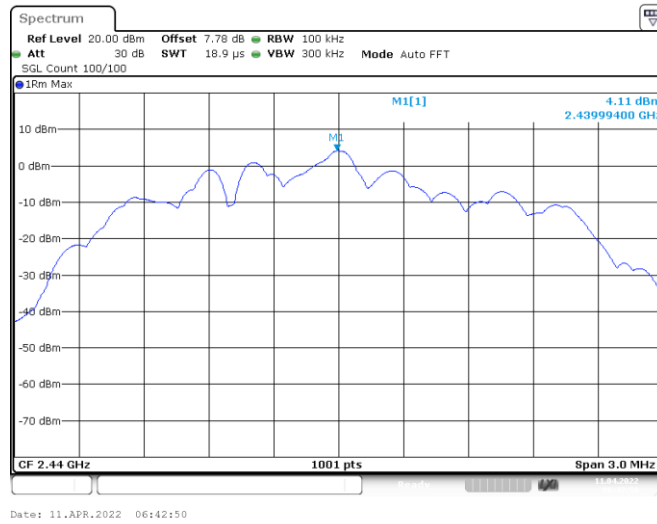

Middle channel

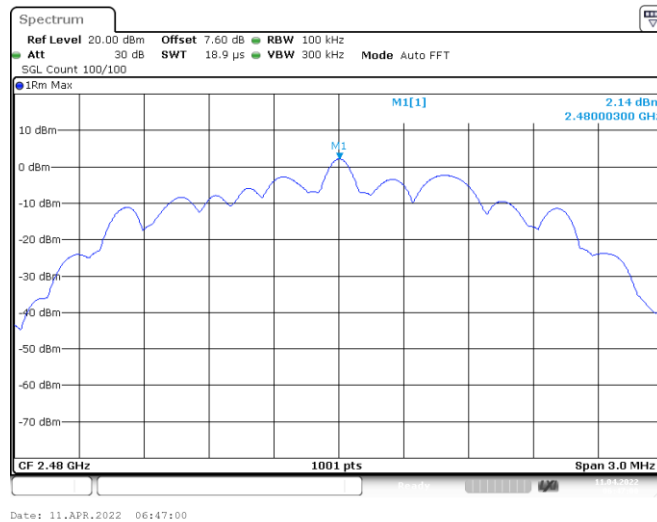

Highest channel

## 7. Bandwidth

### 7.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW  $\geq 3 \times$  RBW = 300kHz,, Sweep time set auto, detail see the test plot.


### 7.3. Test Setup



### 7.4. Test Results


For 1Mbps							
Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	1.041	0.535	0.5	Pass
NVNT	BLE	2440	Ant 1	1.017	0.68	0.5	Pass
NVNT	BLE	2480	Ant 1	1.017	0.685	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

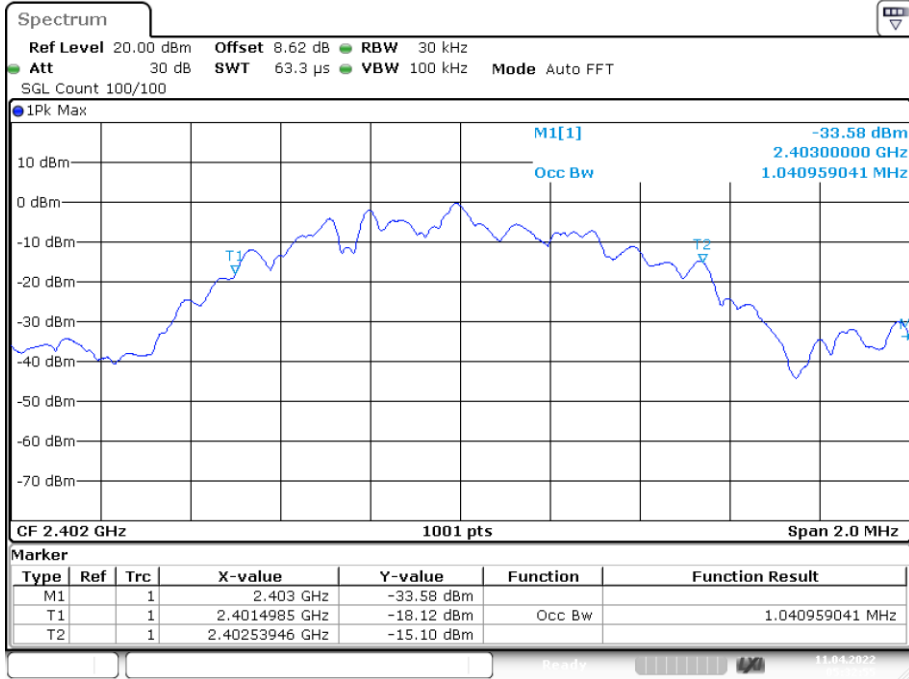


Date: 11.APR.2022 05:32:56

-6 dB BW NVNT BLE 2402MHz Ant1

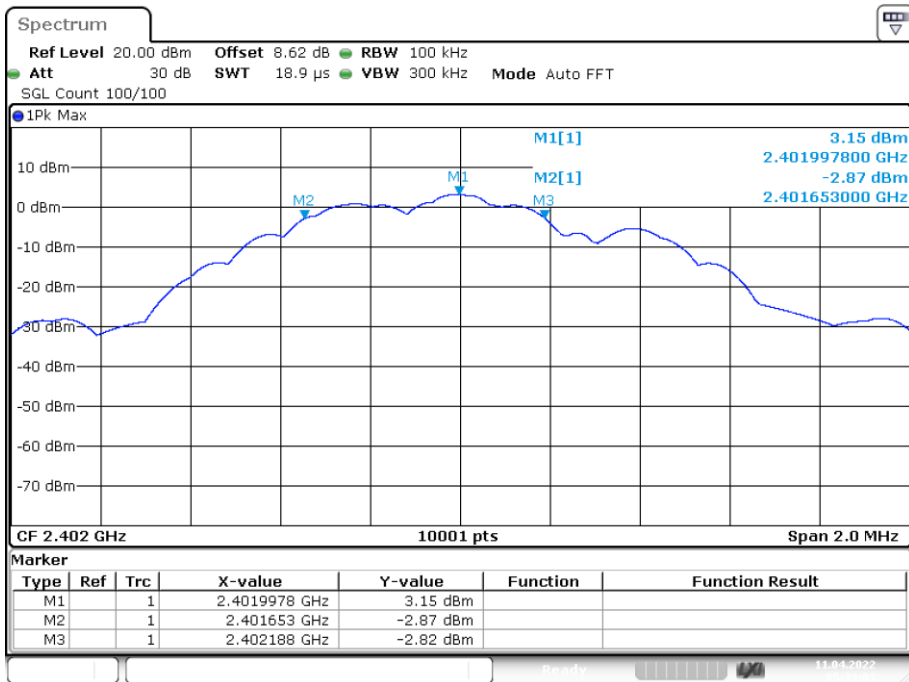


Date: 11.APR.2022 05:33:04

OBW NVNT BLE 2440MHz Ant1

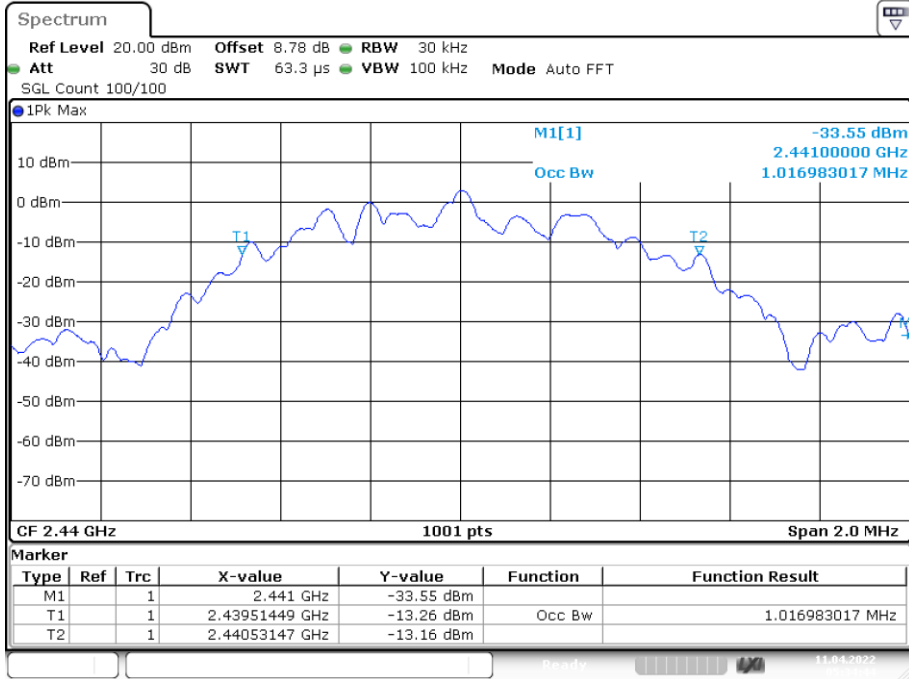


Date: 11.APR.2022 05:34:44

-6 dB BW NVNT BLE 2440MHz Ant1

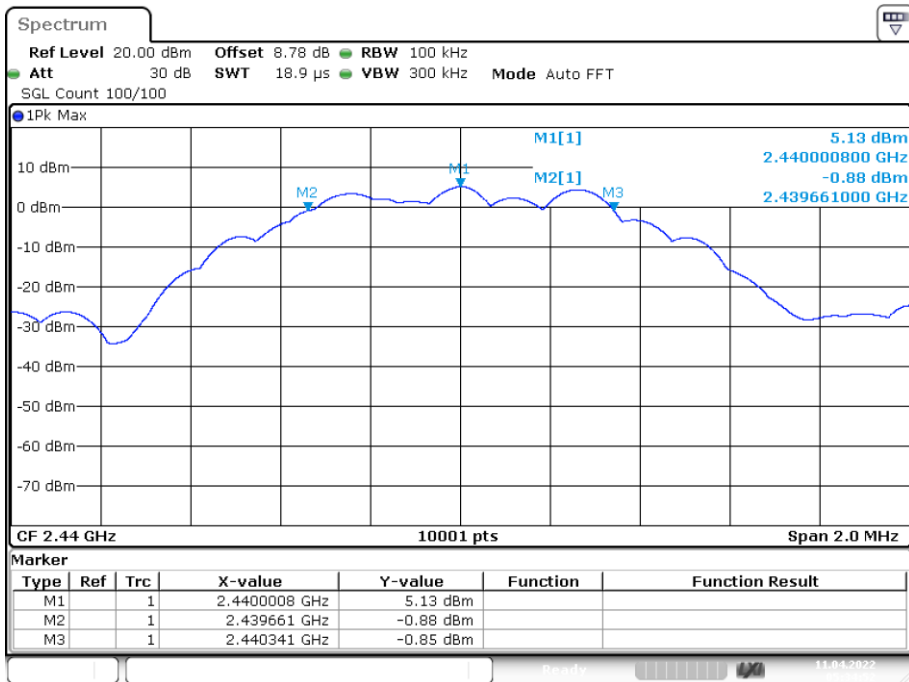


Date: 11.APR.2022 05:34:52

OBW NVNT BLE 2480MHz Ant1

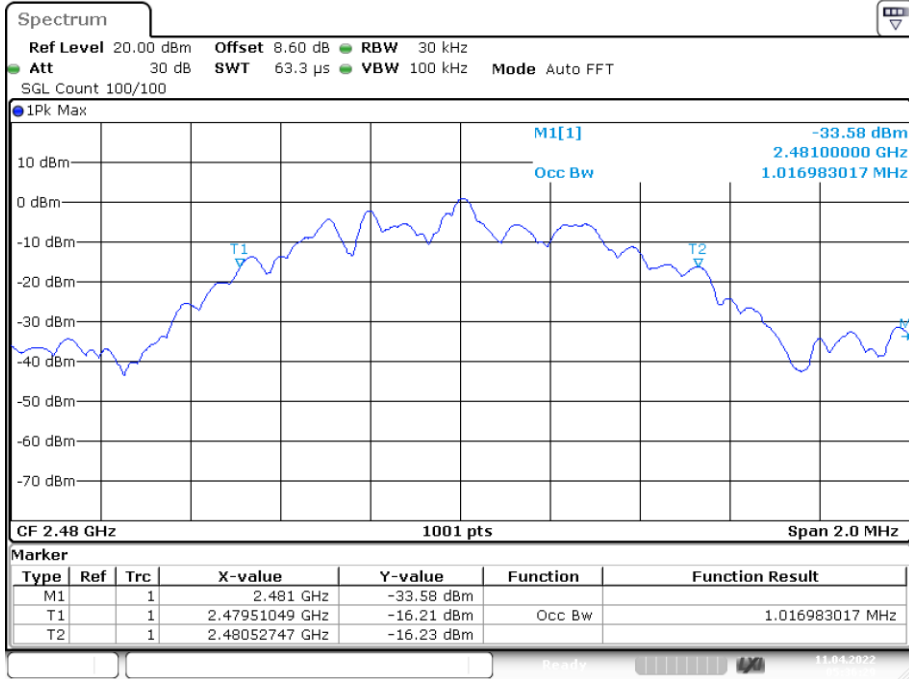

Date: 11.APR.2022 05:36:28


-6 dB BW NVNT BLE 2480MHz Ant1

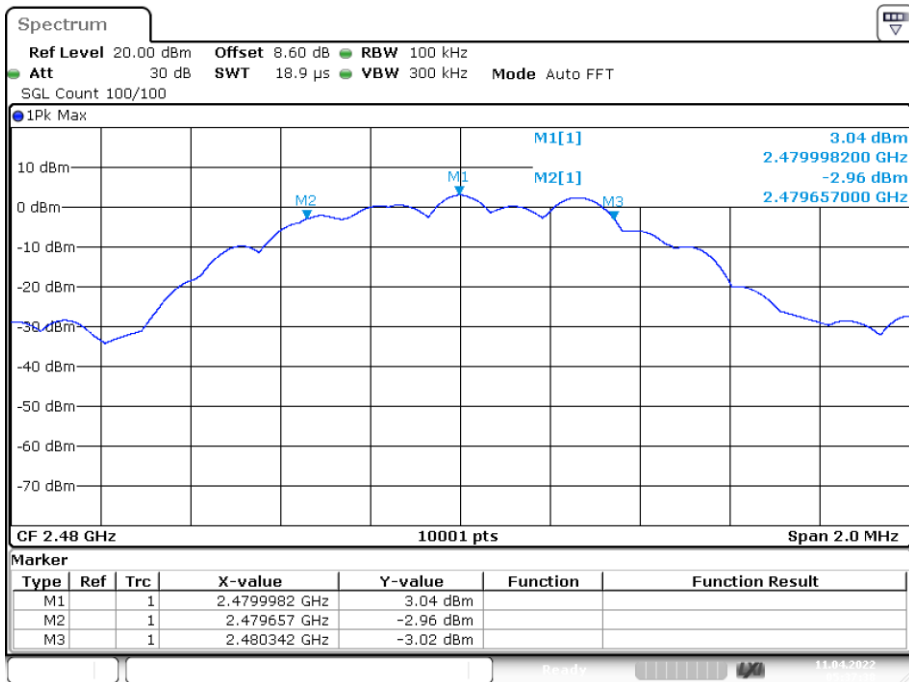

Date: 11.APR.2022 05:37:38


For 2Mbps							
Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	2.07	1.184	0.5	Pass
NVNT	BLE	2440	Ant 1	2.058	0.966	0.5	Pass
NVNT	BLE	2480	Ant 1	2.046	0.848	0.5	Pass

OBW NVNT BLE 2402MHz Ant1

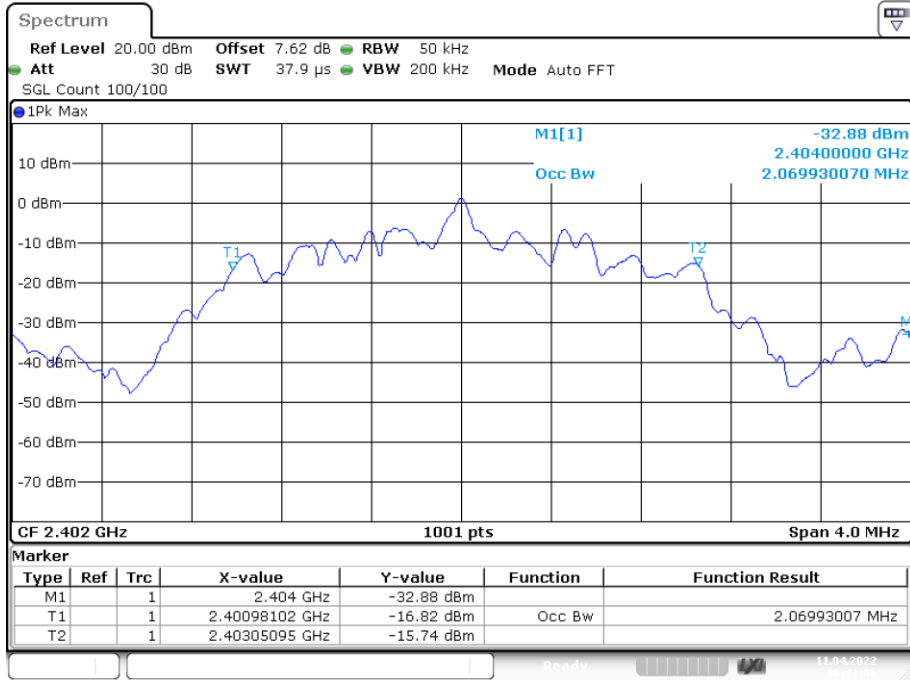


Date: 11.APR.2022 06:41:06

-6 dB BW NVNT BLE 2402MHz Ant1

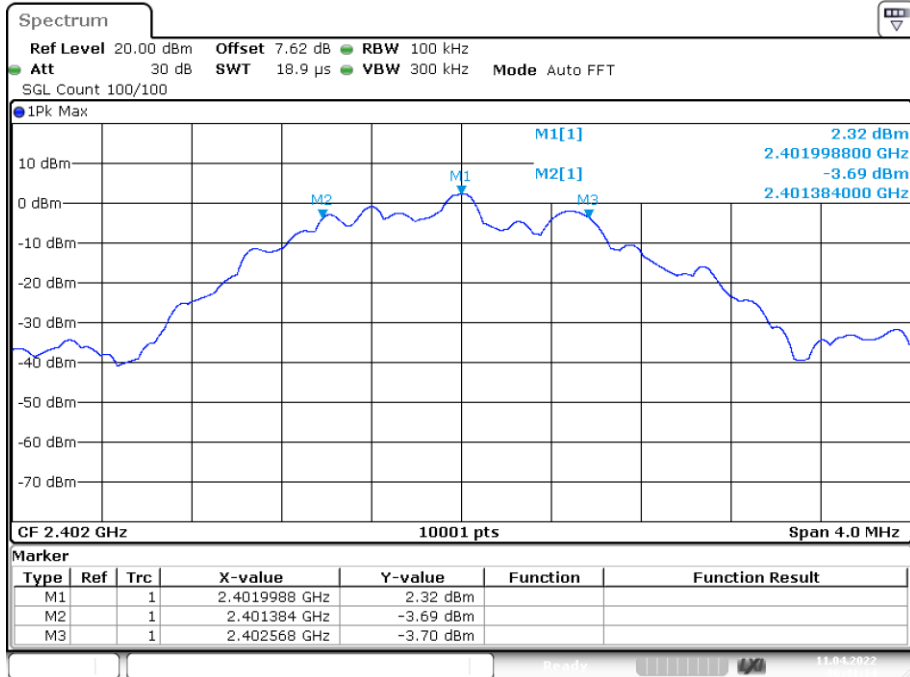


Date: 11.APR.2022 06:41:14


OBW NVNT BLE 2440MHz Ant1

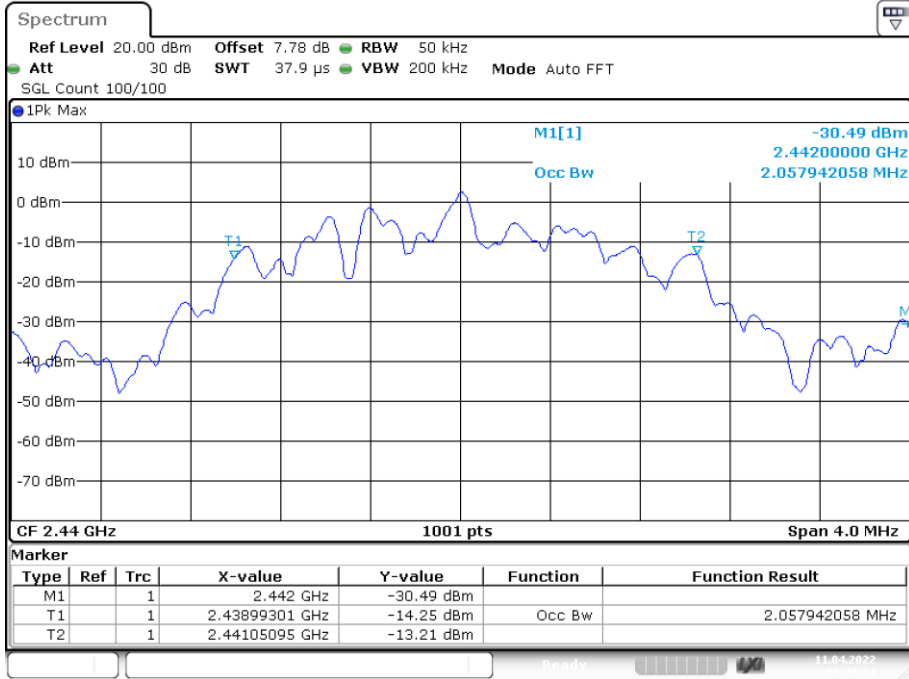

-6 dB BW NVNT BLE 2440MHz Ant1

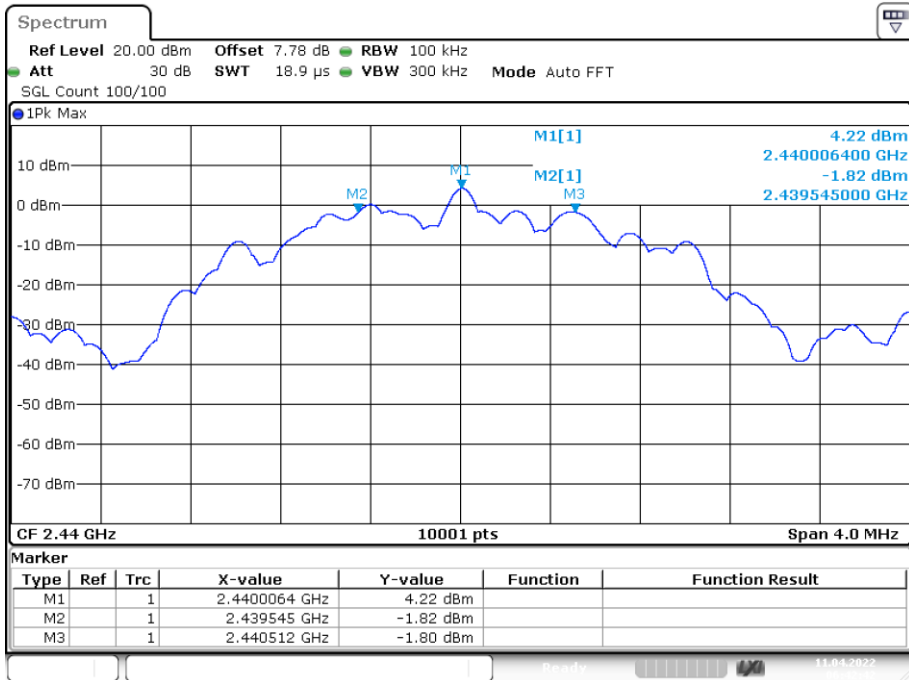


OBW NVNT BLE 2480MHz Ant1

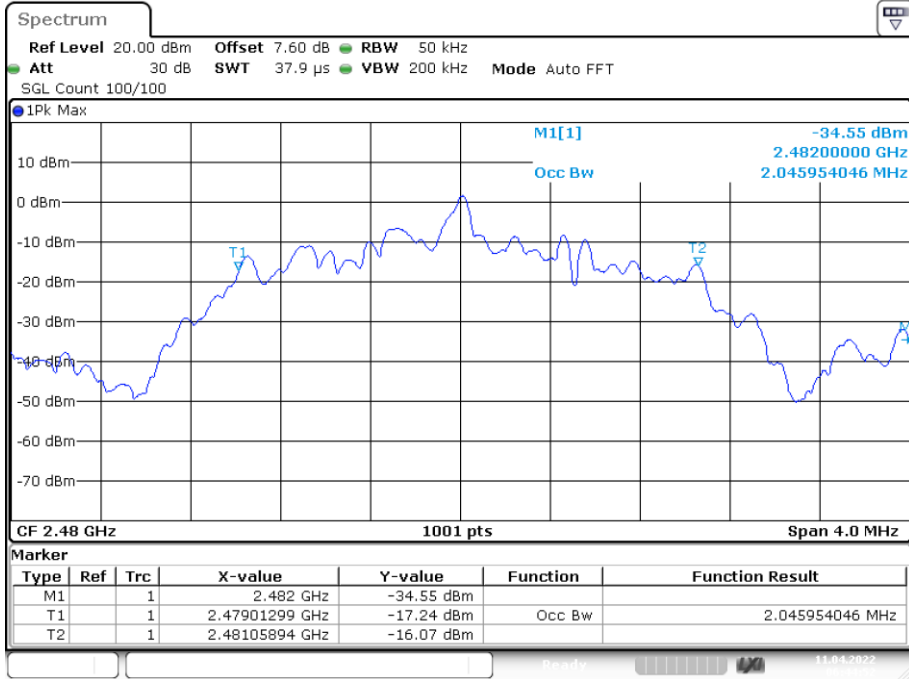

Date: 11.APR.2022 06:44:52

-6 dB BW NVNT BLE 2480MHz Ant1

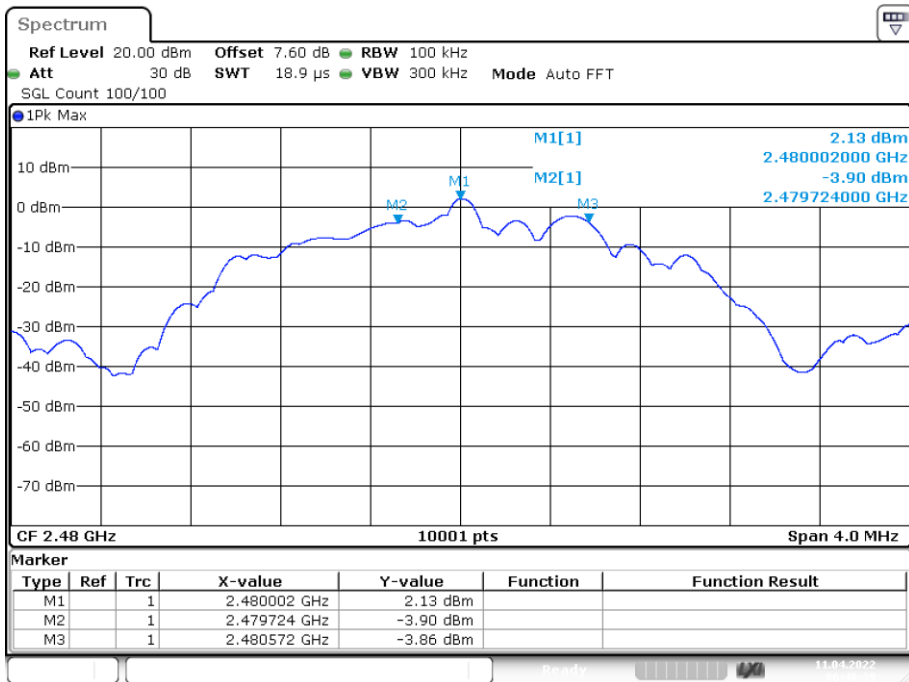

Date: 11.APR.2022 06:46:39



## **8. Band Edge Check**

### **8.1. Test limits**

Please refer section RSS-GEN&15.247.

### **8.2. Test Procedure**

Details see the KDB558074 D01 Meas Guidance V05

8.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz ,VBW 3MHz ,peak detector for peak value , RBW 1MHz ,VBW 3MHz ,RMS detector for AV value.

### **8.3. Test Setup**


Same as 5.2.2.

### **8.4. Test Results**


**For 1Mbps**

Radiated Method:

Test Mode: Low

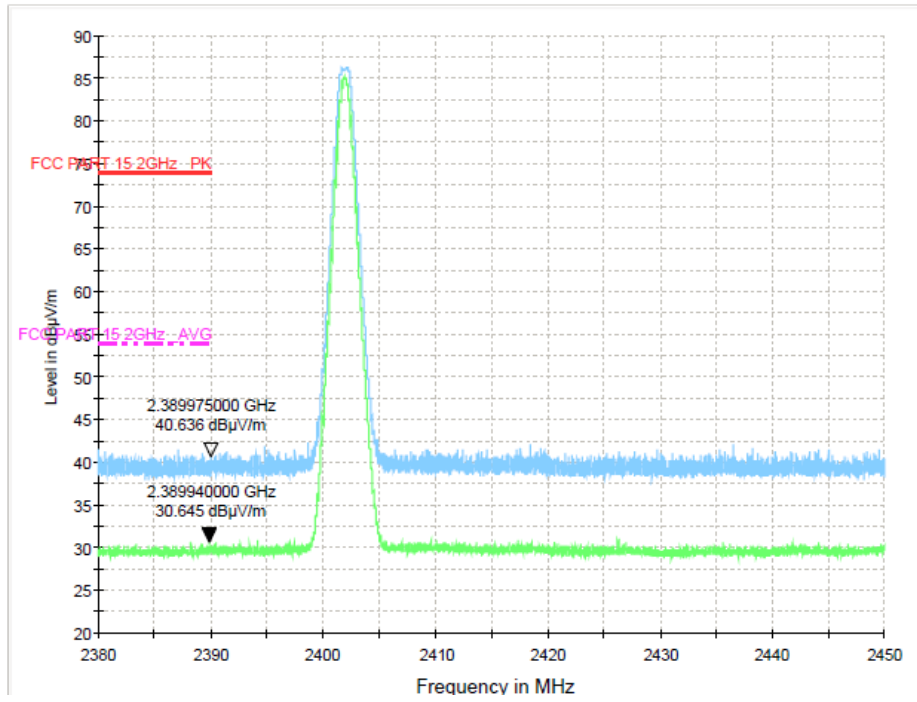


Test Mode: High

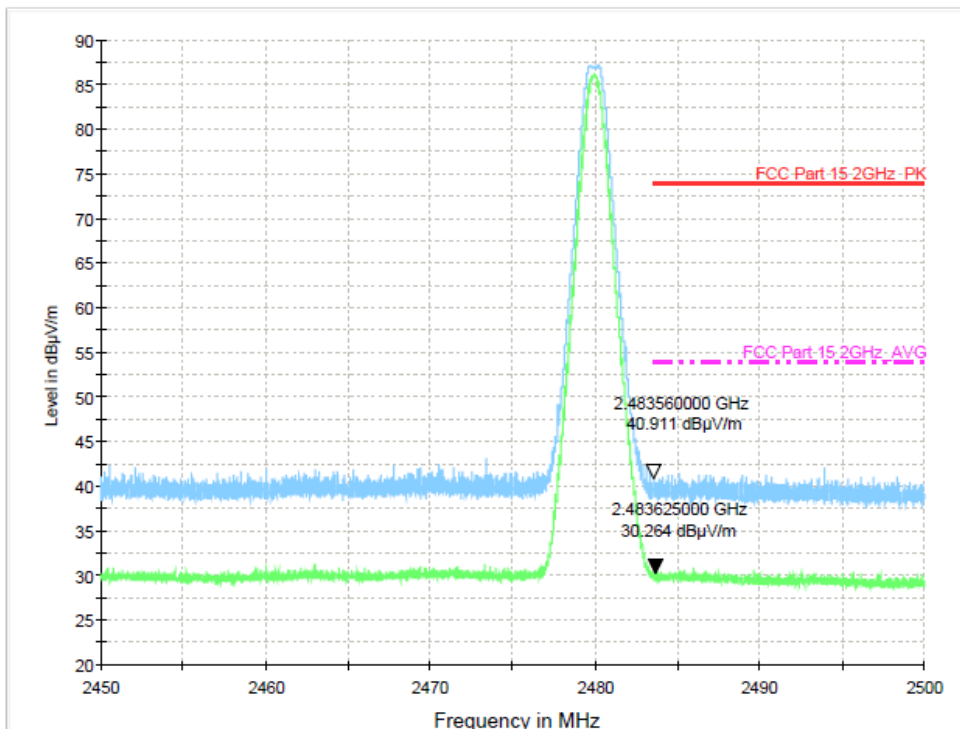


**For 1Mbps**

Conducted Method:

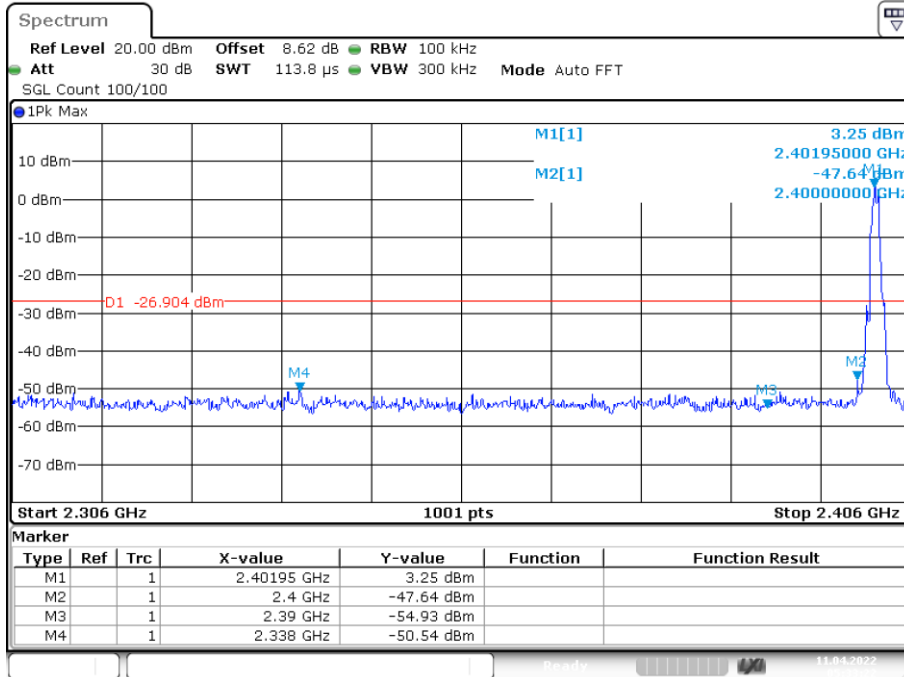

Lowest channel

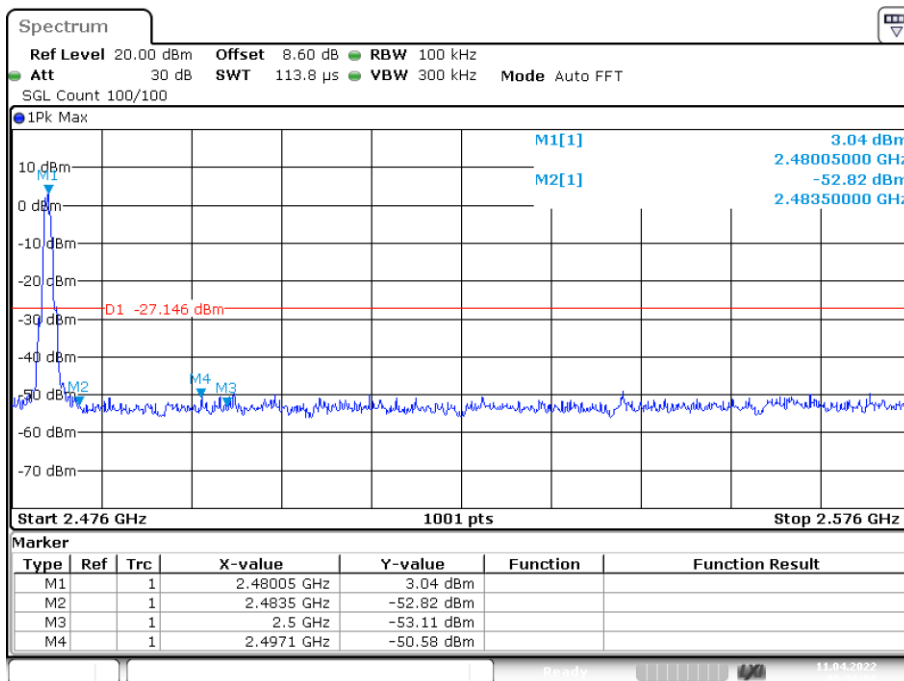

Highest channel

Remark: All modes have been tested, and only worst data was listed in this report.

## **9. Antenna Requirement**

### **9.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **9.2. Antenna Connected Construction**


The antenna is PCB antenna and no consideration of replacement. Please see EUT photo for details.


### **9.3. Results**

The EUT antenna 1 is Internal antenna. It complies with the standard requirement.

## 10. Test Setup Photo

### 10.1. Photos of Radiated emission

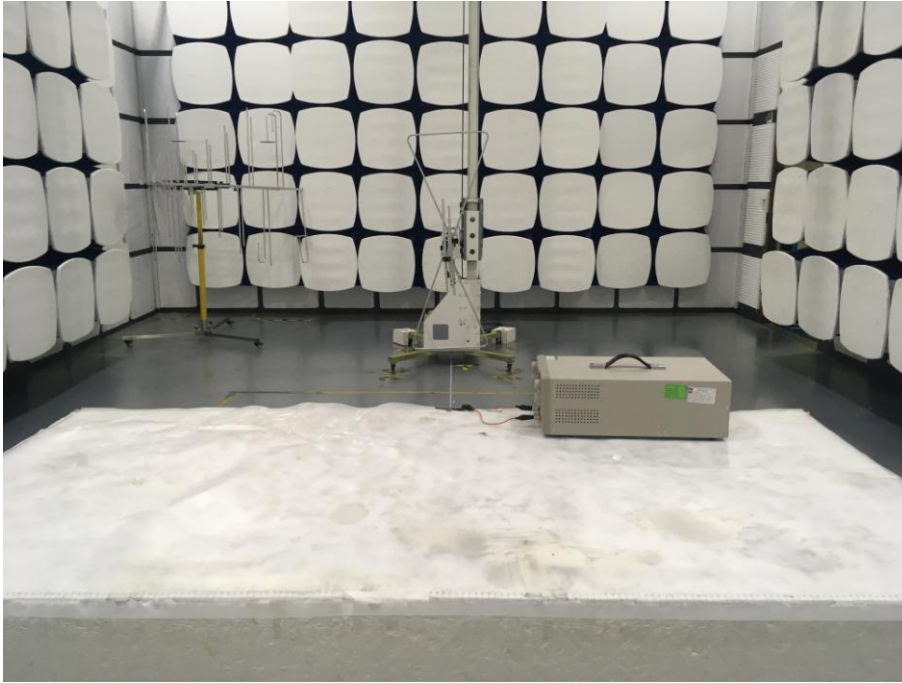


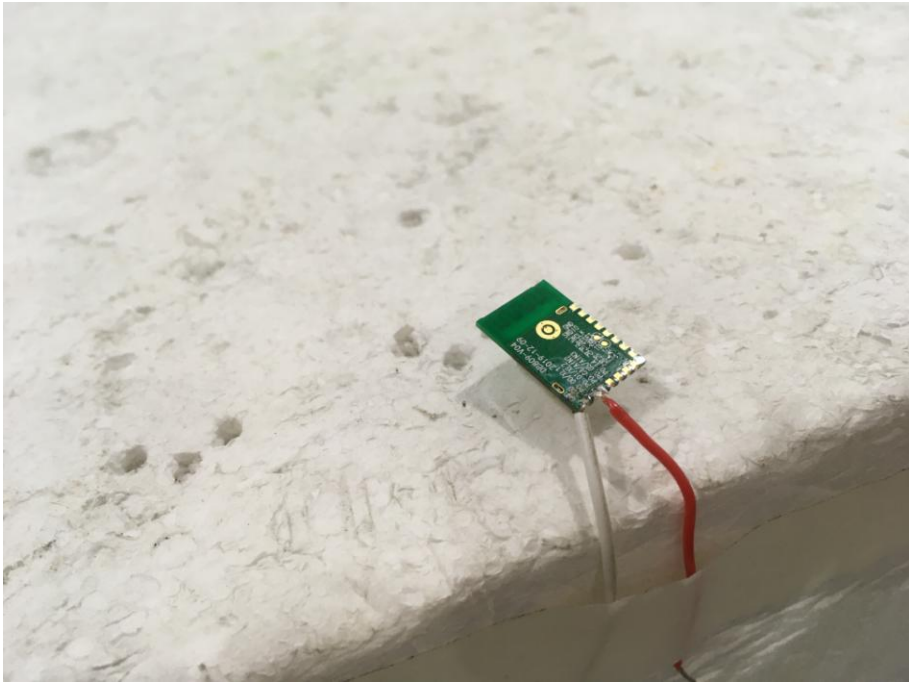


## 10.2.Photos of Conducted Emission test







### 11.EUT Photo

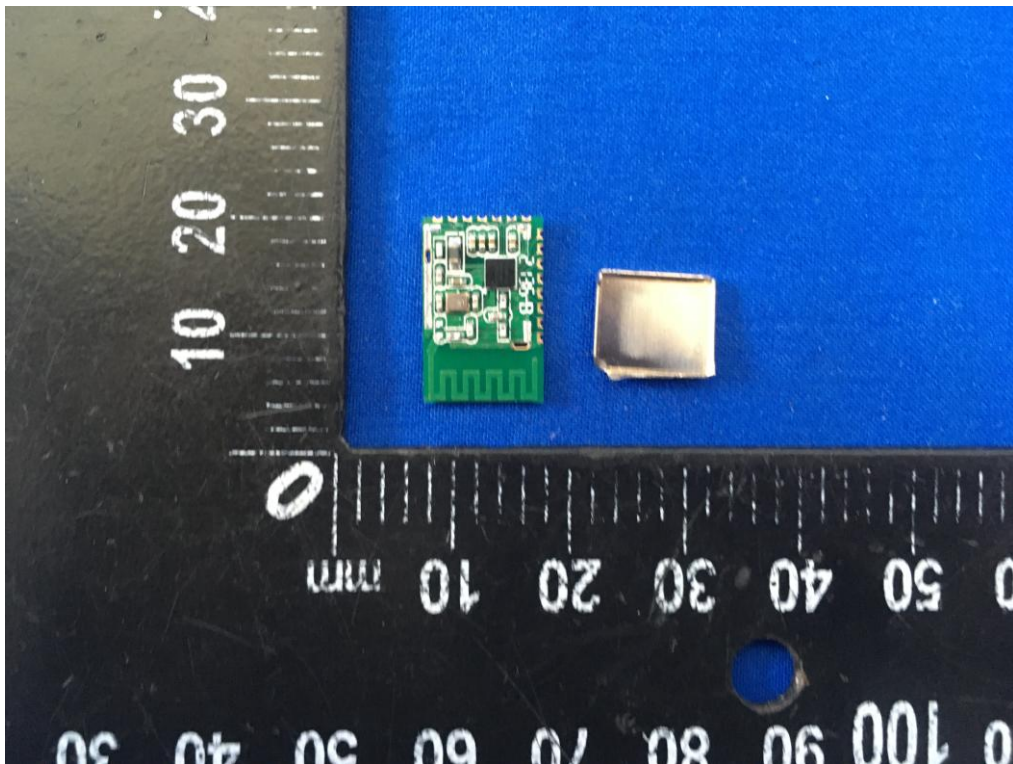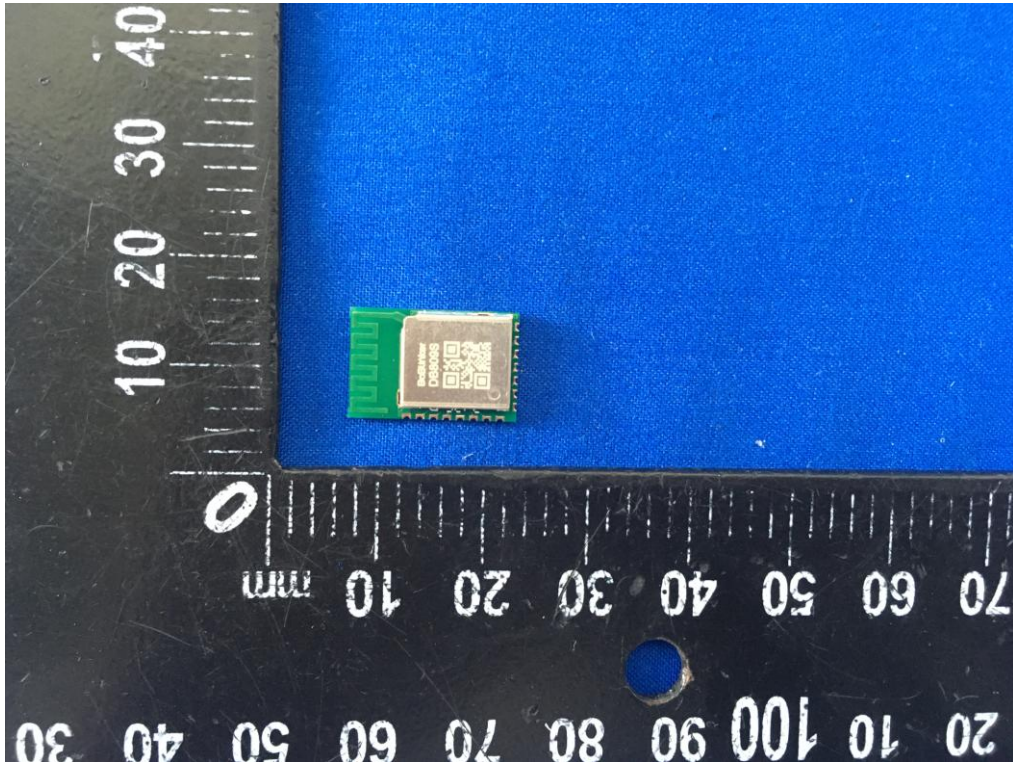



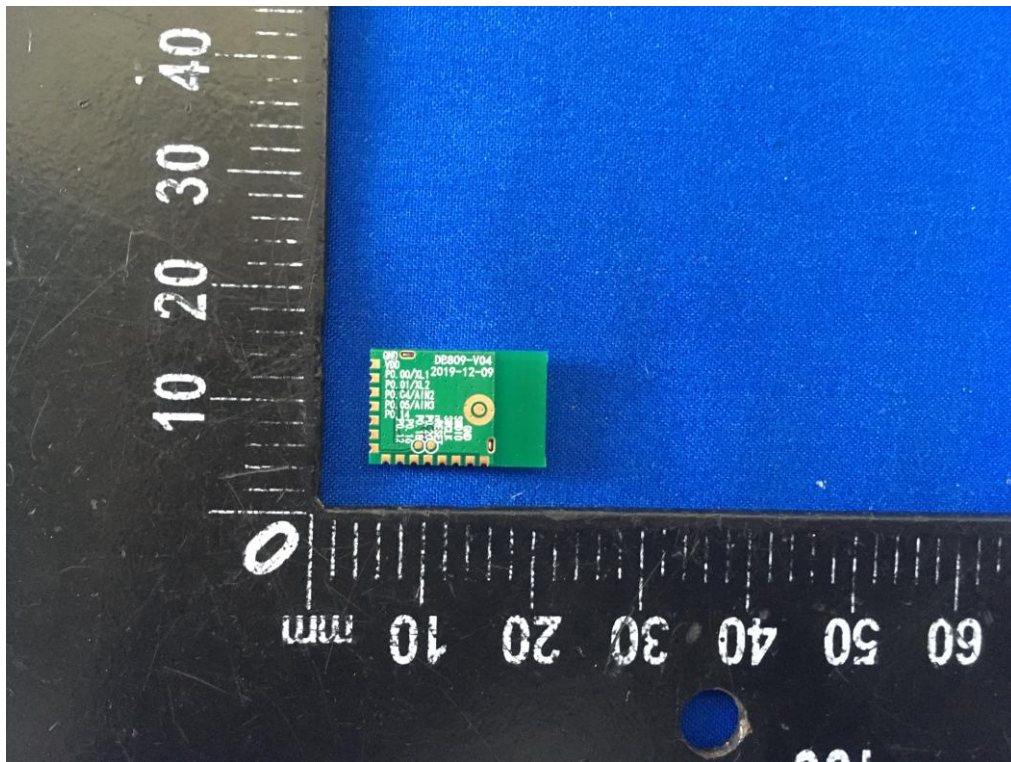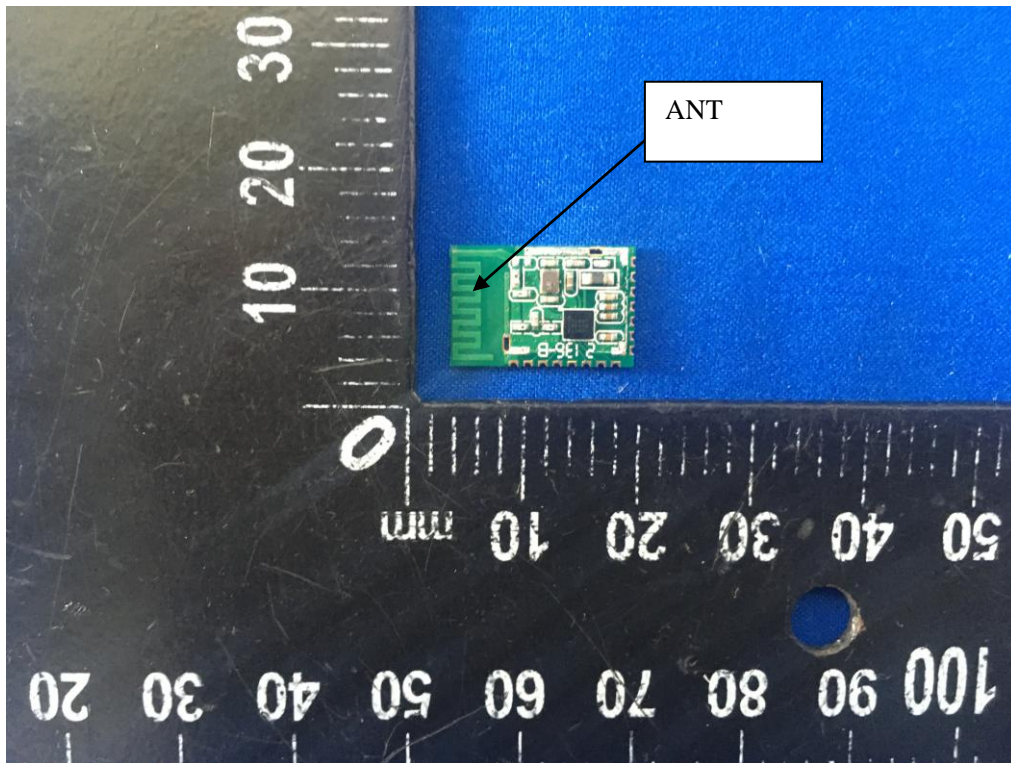

-----THE END OF REPORT-----