

# FCC TEST REPORT

## FCC ID: 2A6FB-ES05

Report Number. .... : ZKT-220411L2329

Date of Test ..... : Apr. 06, 2022 -- Apr. 14, 2022

Date of issue ..... : Apr. 14, 2022

Total number of pages..... : 58

Test Result ..... : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name ..... : Shenzhen CuanTianHou Electronic Technology Co. Ltd

Address ..... : Room 603, 6th Floor, Building 1, Liuwei Business Center, No. 5, Longjing Community, Yangmei Community, Bantian Street, Longgang District, Shenzhen

Manufacturer's name ..... : Shenzhen Lanhu Electronic Technology Co., Ltd.

Address ..... : Room 301, Building 2, No. 403, East Pinglong Road, Pinghu Street, Longgang District, Shenzhen

Test specification:

Standard ..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
KDB558074 D0115.247 Meas Guidance v 05r02

Test procedure..... : /

Non-standard test method ..... : N/A

**Test Report Form No.** ..... : TRF-EL-112\_V0

**Test Report Form(s) Originator** .... : ZKT Testing

**Master TRF** ..... : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Bluetooth earphone

Trademark ..... : vinley

Model/Type reference ..... : ES05, ES01, ES02, ES06

Ratings..... : DC 3.7V from battery

**Testing procedure and testing location:**

**Testing Laboratory** ..... : **Shenzhen ZKT Technology Co., Ltd.**

**Address**..... : 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District,  
Shenzhen, China

---

**Tested by (name + signature)**..... : Alen He 

---

**Reviewer (name + signature)**..... : Joe Liu 

---

**Approved (name + signature)** ..... : Lake Xie 

---

**Table of Contents**

	<b>Page</b>
<b>1. VERSION</b> .....	<b>5</b>
<b>2. TEST SUMMARY</b> .....	<b>6</b>
2.1 TEST FACILITY .....	6
2.2 MEASUREMENT UNCERTAINTY .....	7
<b>3. GENERAL INFORMATION</b> .....	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 Test Setup Configuration .....	9
3.3 Support Equipment .....	9
3.4 Test Mode .....	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....	11
<b>4. EMC EMISSION TEST</b> .....	<b>12</b>
4.1 Conducted emissions .....	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits .....	12
4.1.2 TEST PROCEDURE .....	12
4.1.3 DEVIATION FROM TEST STANDARD .....	12
4.1.4 TEST SETUP .....	13
4.1.5 EUT OPERATING CONDITIONS .....	13
4.1.6 Test Result .....	14
4.2 Radiated emissions .....	16
4.2.1 Radiated Emission Limits .....	16
4.2.2 TEST PROCEDURE .....	16
4.2.3 DEVIATION FROM TEST STANDARD .....	17
4.2.4 TEST SETUP .....	17
4.2.5 EUT OPERATING CONDITIONS .....	18
4.2.6 TEST RESULTS .....	19
<b>5. RADIATED BAND EMISSION MEASUREMENT</b> .....	<b>27</b>
5.1 Test Requirement: .....	27
5.2 TEST PROCEDURE .....	27
5.3 DEVIATION FROM TEST STANDARD .....	28
5.4 TEST SETUP .....	28
5.5 EUT OPERATING CONDITIONS .....	28
5.6 TEST RESULT .....	29
<b>6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b> .....	<b>30</b>
6.1 Limit .....	30
6.2 Test Setup .....	30
6.3 Test procedure .....	30
6.4 DEVIATION FROM STANDARD .....	30
6.5 Test Result .....	30
<b>7. 20DB BANDWIDTH</b> .....	<b>41</b>
7.1 Test Setup .....	41
7.2 Limit .....	41

7.3 Test procedure	41
7.4 DEVIATION FROM STANDARD	41
7.5 Test Result	41
<b>8. MAXIMUM PEAK OUTPUT POWER</b>	<b>44</b>
8.1 Block Diagram Of Test Setup	44
8.2 Limit	44
8.3 Test procedure	44
8.4 DEVIATION FROM STANDARD	44
8.5 Test Result	44
<b>9. HOPPING CHANNEL SEPARATION</b>	<b>45</b>
9.1 Test Setup	45
9.2 Test procedure	45
9.3 DEVIATION FROM STANDARD	45
9.4 Test Result	45
<b>10. NUMBER OF HOPPING FREQUENCY</b>	<b>49</b>
10.1 Test Setup	49
10.2 Test procedure	49
10.3 DEVIATION FROM STANDARD	49
10.4 Test Result	50
<b>11. DWELL TIME</b>	<b>51</b>
11.1 Test Setup	51
11.2 Test procedure	51
11.3 DEVIATION FROM STANDARD	51
11.4 Test Result	51
<b>12. ANTENNA REQUIREMENT</b>	<b>55</b>
<b>13. TEST SETUP PHOTO</b>	<b>56</b>
<b>14. EUT CONSTRUCTIONAL DETAILS</b>	<b>58</b>

**1. VERSION**

Report No.	Version	Description	Approved
ZKT-220411L2329	Rev.01	Initial issue of report	Apr. 14, 2022

## 2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission	PASS	
15.247(d)	Band Edge	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report

### 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.  
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,  
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225  
Designation Number: CN1299  
IC Registered No.: 27033

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Bluetooth earphone
Model No.:	ES05
Serial No.:	ES01,ES02,ES06
Hardware Version:	V1.1
Software Version:	FCC_assist_1.0.2.2
Sample(s) Status:	Engineer sample
Channel numbers:	79
Channel separation:	2402MHz~2480MHz
Modulation technology:	GFSK, $\pi/4$ DQPSK
Antenna Type:	FPC antenna
Antenna gain:	1.5dBi
Power supply:	DC 3.7V from battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:



Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

### 3.2 Test Setup Configuration

#### Conducted Emission



#### Radiated Emission



#### Conducted Spurious



### 3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	GAT-0501000 Input:AC100-240V 0.4A 50/60Hz Output:5.0V 1A	/	Provide by lab


Item	Shielded Type	Ferrite Core	Length	Note

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

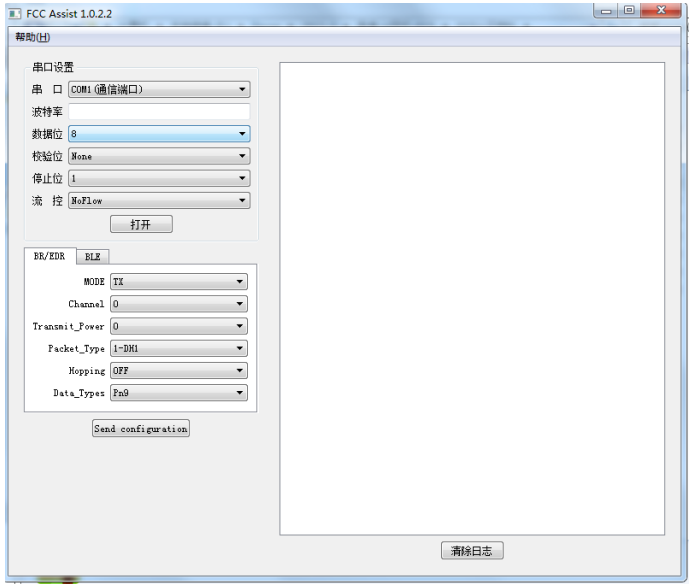Test Software	<p>BT Test Tool</p>  <p>The screenshot shows the 'FCC Assist 1.0.2.2' software window. It has a '帮助(H)' menu. Under '串口设置' (Serial Port Settings), there are dropdowns for '串口' (COM1 (通信端口)), '波特率' (Baud Rate), '数据位' (8), '校验位' (None), '停止位' (1), and '流控' (NoFlow), with an '打开' (Open) button. Under 'BR/EDR' and 'BLE' tabs, there are dropdowns for 'MODE' (TX), 'Channel' (0), 'Transmit_Power' (0), 'Packet_Type' (1-2M), 'Hopping' (OFF), and 'Data_Types' (Fsk), with a 'Send configuration' button. A '清除日志' (Clear Log) button is at the bottom right.</p>
Power level setup	Level-10 <5dBm

## 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 21, 2021	Sep. 22, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 21, 2021	Sep. 22, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 21, 2021	Sep. 22, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 21, 2021	Sep. 22, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Sep. 21, 2021	Sep. 22, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 21, 2021	Sep. 22, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 21, 2021	Sep. 22, 2022
8	Amplifier (1GHz-40GHz)	QUANJUDA	DLE-161	097	Sep. 21, 2021	Sep. 22, 2022
9	Loop Antenna (9kHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Sep. 21, 2021	Sep. 22, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 21, 2021	Sep. 22, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 21, 2021	Sep. 22, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 21, 2021	Sep. 22, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 21, 2021	Sep. 22, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

## Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 21, 2021	Sep. 22, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 21, 2021	Sep. 22, 2022
3	Test Cable	N/A	C01	N/A	Sep. 21, 2021	Sep. 22, 2022
4	Test Cable	N/A	C02	N/A	Sep. 21, 2021	Sep. 22, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 21, 2021	Sep. 22, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 21, 2021	Sep. 22, 2022

#### 4. EMC EMISSION TEST

##### 4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

##### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.


##### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

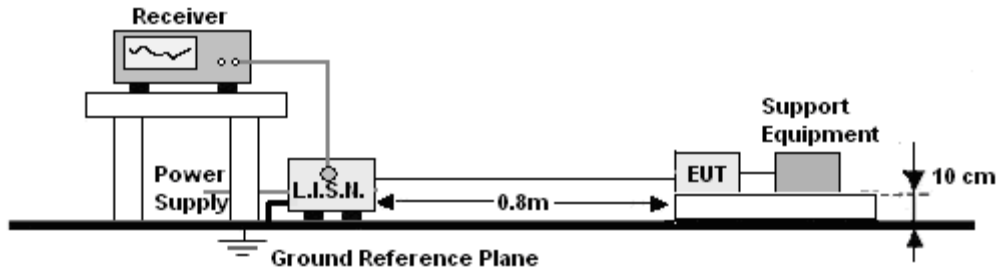


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test mode	charging

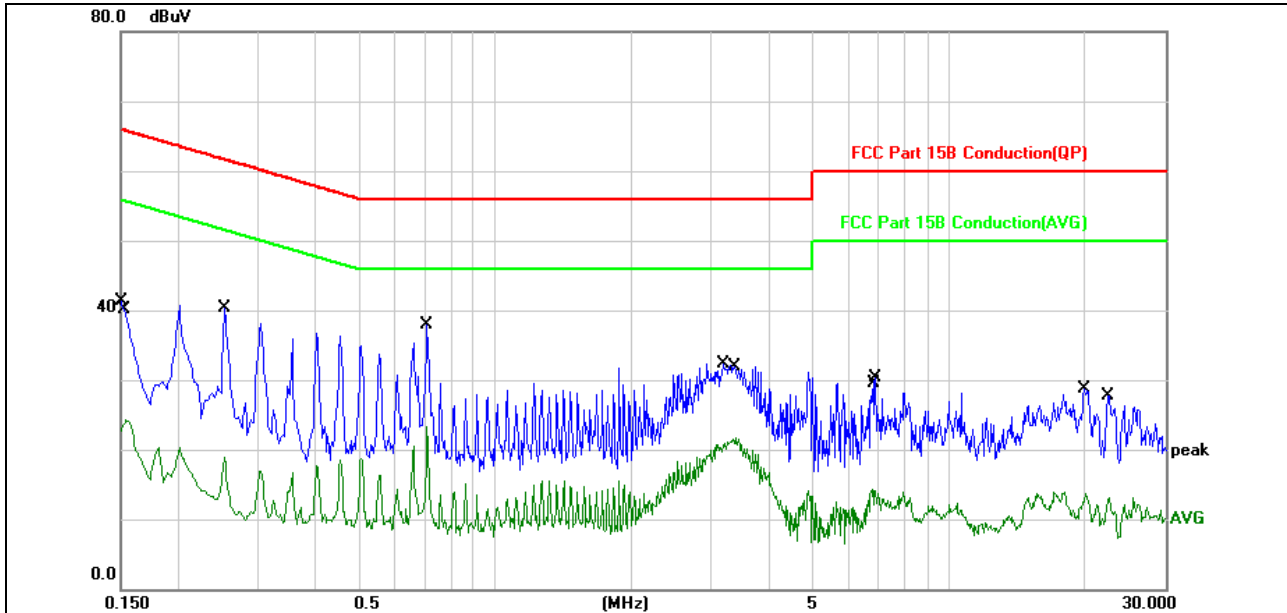


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	31.50	9.75	41.25	65.99	-24.74	QP	
2		0.1539	14.52	9.75	24.27	55.78	-31.51	AVG	
3		0.2540	30.45	9.77	40.22	61.62	-21.40	QP	
4		0.2540	9.18	9.77	18.95	51.62	-32.67	AVG	
5	*	0.7100	28.16	9.82	37.98	56.00	-18.02	QP	
6		0.7100	13.49	9.82	23.31	46.00	-22.69	AVG	
7		3.1940	22.66	9.70	32.36	56.00	-23.64	QP	
8		3.3820	12.00	9.69	21.69	46.00	-24.31	AVG	
9		6.8020	4.71	9.62	14.33	50.00	-35.67	AVG	
10		6.9020	20.71	9.61	30.32	60.00	-29.68	QP	
11		20.0500	4.12	9.53	13.65	50.00	-36.35	AVG	
12		22.4340	18.22	9.50	27.72	60.00	-32.28	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test mode	charging

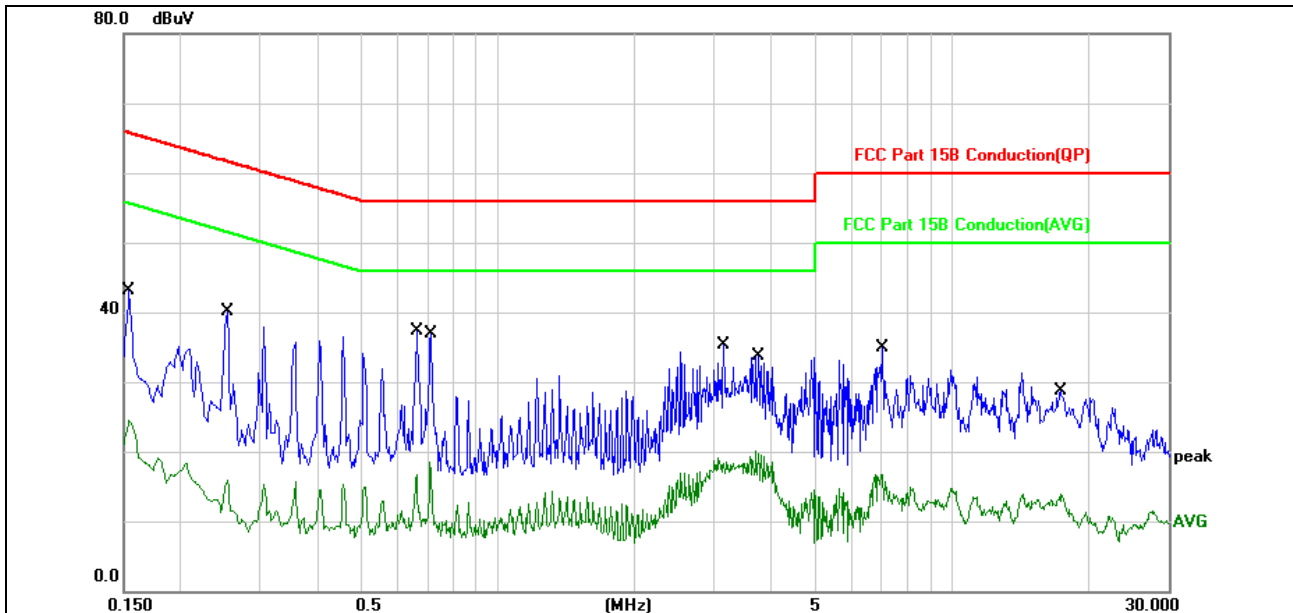

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1539	33.45	9.75	43.20	65.78	-22.58	QP	
2		0.1539	14.79	9.75	24.54	55.78	-31.24	AVG	
3		0.2540	30.42	9.77	40.19	61.62	-21.43	QP	
4		0.2540	6.17	9.77	15.94	51.62	-35.68	AVG	
5	*	0.6620	27.45	9.83	37.28	56.00	-18.72	QP	
6		0.7100	8.75	9.82	18.57	46.00	-27.43	AVG	
7		3.1460	25.61	9.70	35.31	56.00	-20.69	QP	
8		3.7060	10.33	9.69	20.02	46.00	-25.98	AVG	
9		7.0540	25.31	9.61	34.92	60.00	-25.08	QP	
10		7.0540	7.08	9.61	16.69	50.00	-33.31	AVG	
11		17.3580	19.19	9.60	28.79	60.00	-31.21	QP	
12		17.3580	4.25	9.60	13.85	50.00	-36.15	AVG	

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. when charging, BT can not transmit

#### 4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

##### 4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

##### LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

##### 4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

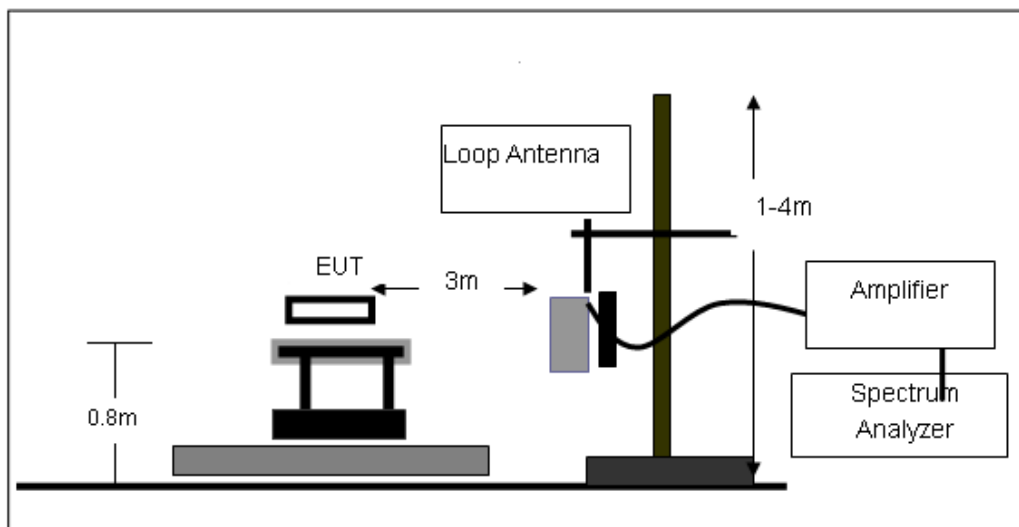

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

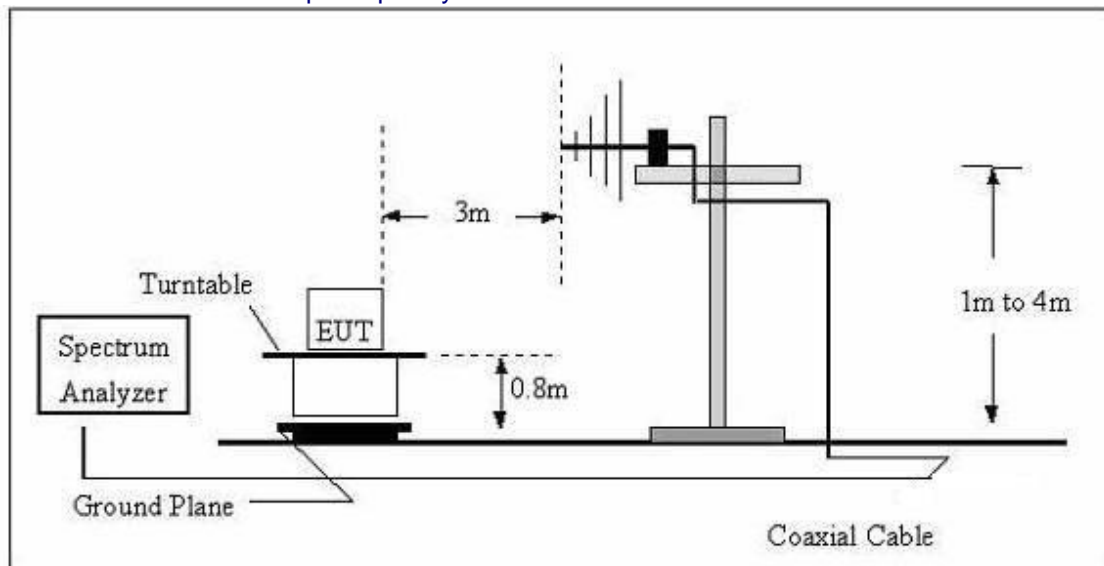

(C) Radiated Emission Test-Up Frequency Above 1GHz

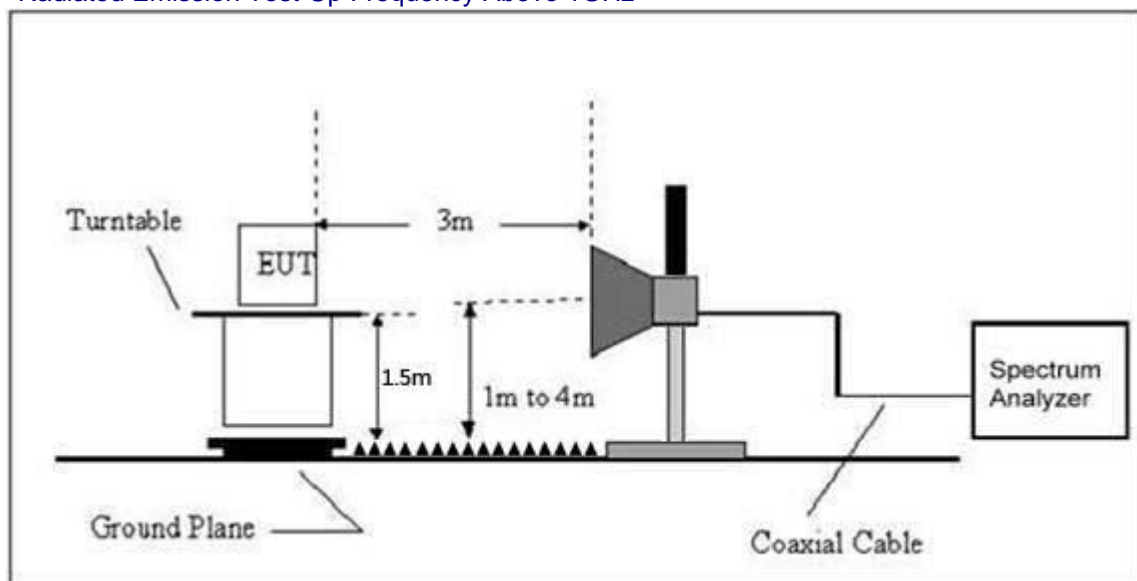

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test mode	charging




Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test mode	charging

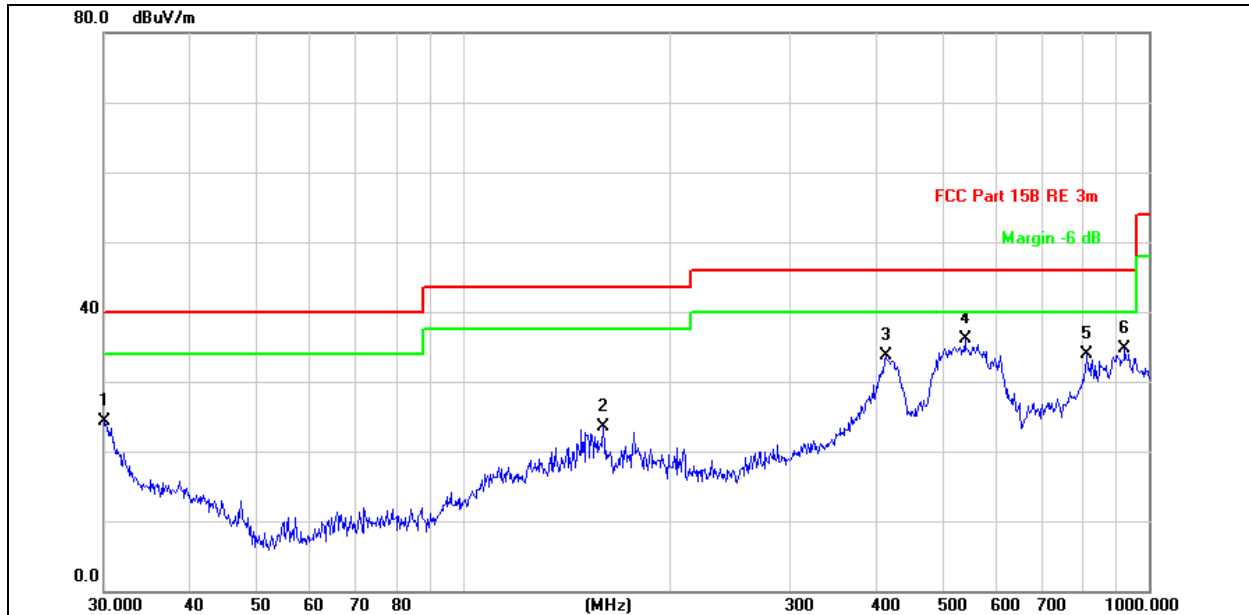


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.1054	22.81	1.43	24.24	40.00	-15.76	QP	100	360	
2		160.3456	29.16	-5.75	23.41	43.50	-20.09	QP	100	360	
3		413.2706	34.96	-1.31	33.65	46.00	-12.35	QP	100	360	
4	*	539.4775	35.30	0.85	36.15	46.00	-9.85	QP	100	360	
5		813.1115	27.50	6.31	33.81	46.00	-12.19	QP	100	360	
6		922.5157	27.46	7.22	34.68	46.00	-11.32	QP	100	360	

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test mode	BT

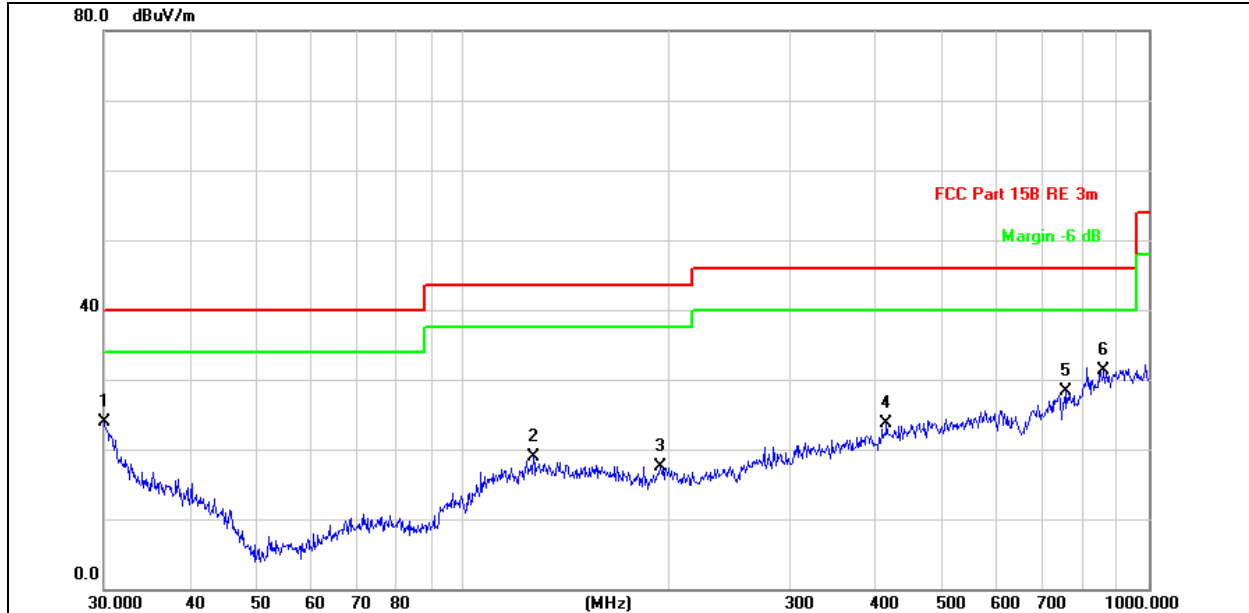

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.0000	22.22	1.62	23.84	40.00	-16.16	QP	100	360	
2		126.7723	24.18	-5.28	18.90	43.50	-24.60	QP	100	360	
3		193.7728	23.89	-6.31	17.58	43.50	-25.92	QP	100	360	
4		414.7223	24.91	-1.30	23.61	46.00	-22.39	QP	100	360	
5		758.0408	24.96	3.32	28.28	46.00	-17.72	QP	100	360	
6	*	860.0352	24.41	6.89	31.30	46.00	-14.70	QP	100	360	

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test mode	BT

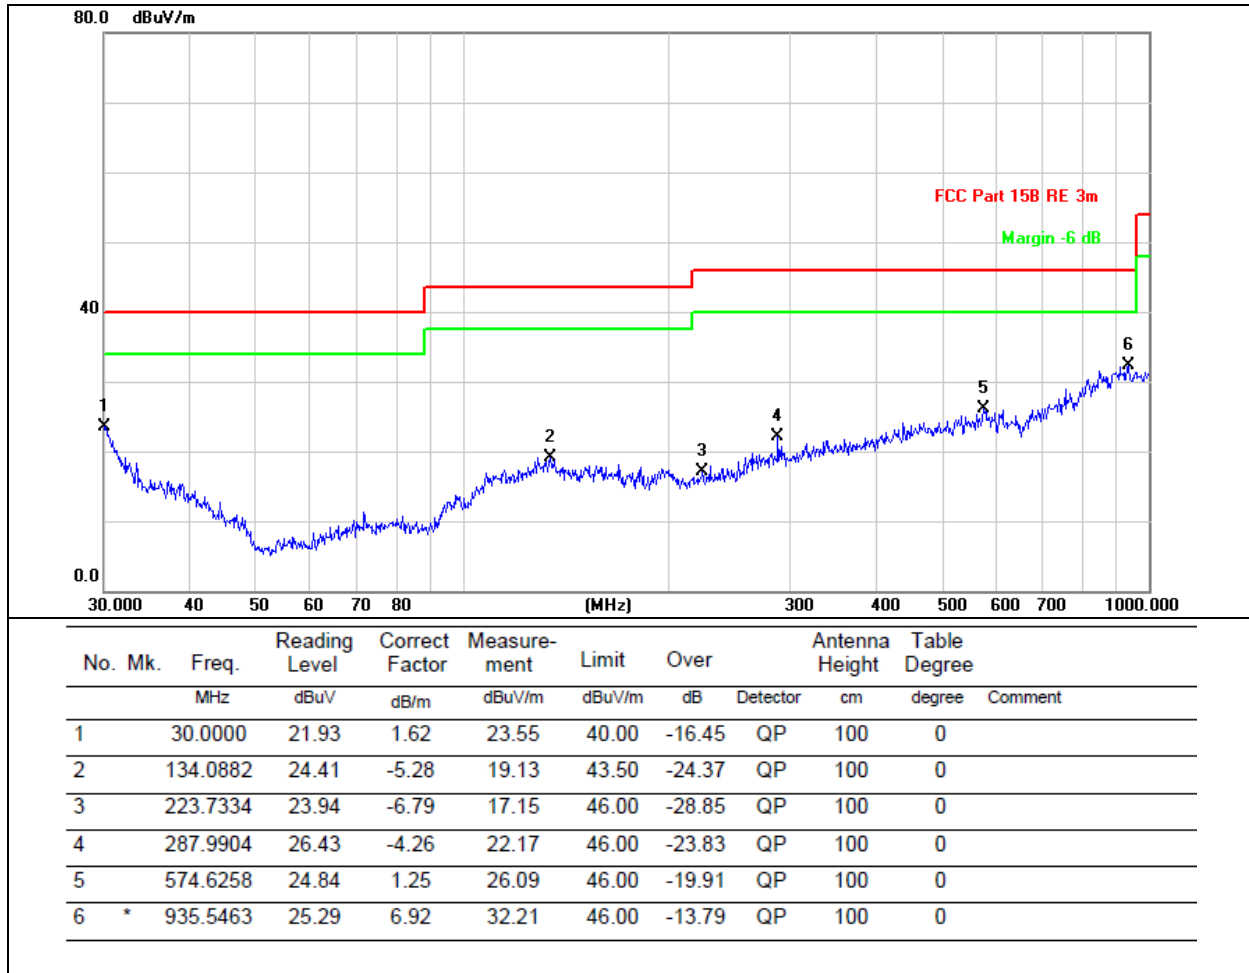

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

1GHz~25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	54.62	30.55	5.77	24.66	54.50	74.00	-19.50	Pk
V	4804	39.45	30.55	5.77	24.66	39.33	54.00	-14.67	AV
V	7206	52.95	30.33	6.32	24.55	53.49	74.00	-20.51	Pk
V	7206	41.72	30.33	6.32	24.55	42.26	54.00	-11.74	AV
V	9608	50.99	30.85	7.45	24.69	52.28	74.00	-21.72	Pk
V	9608	36.91	30.85	7.45	24.69	38.20	54.00	-15.80	AV
H	4804	56.07	30.55	5.77	24.66	55.95	74.00	-18.05	Pk
H	4804	40.85	30.55	5.77	24.66	40.73	54.00	-13.27	AV
H	7206	53.11	30.33	6.32	24.55	53.65	74.00	-20.35	Pk
H	7206	41.55	30.33	6.32	24.55	42.09	54.00	-11.91	AV
H	9608	50.87	30.85	7.45	24.69	52.16	74.00	-21.84	Pk
H	9608	38.18	30.85	7.45	24.69	39.47	54.00	-14.53	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	55.73	30.55	5.77	24.66	55.61	74.00	-18.39	Pk
V	4882	42.20	30.55	5.77	24.66	42.08	54.00	-11.92	AV
V	7323	53.63	30.33	6.32	24.55	54.17	74.00	-19.83	Pk
V	7323	40.43	30.33	6.32	24.55	40.97	54.00	-13.03	AV
V	9764	50.23	30.85	7.45	24.69	51.52	74.00	-22.48	Pk
V	9764	37.87	30.85	7.45	24.69	39.16	54.00	-14.84	AV
H	4882	55.30	30.55	5.77	24.66	55.18	74.00	-18.82	Pk
H	4882	40.74	30.55	5.77	24.66	40.62	54.00	-13.38	AV
H	7323	53.84	30.33	6.32	24.55	54.38	74.00	-19.62	Pk
H	7323	39.84	30.33	6.32	24.55	40.38	54.00	-13.62	AV
H	9764	52.14	30.85	7.45	24.69	53.43	74.00	-20.57	Pk
H	9764	37.02	30.85	7.45	24.69	38.31	54.00	-15.69	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	53.79	30.55	5.77	24.66	53.67	74.00	-20.33	Pk
V	4960	41.37	30.55	5.77	24.66	41.25	54.00	-12.75	AV
V	7440	53.24	30.33	6.32	24.55	53.78	74.00	-20.22	Pk
V	7440	40.38	30.33	6.32	24.55	40.92	54.00	-13.08	AV
V	9920	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	Pk
V	9920	36.55	30.85	7.45	24.69	37.84	54.00	-16.16	AV
H	4960	53.91	30.55	5.77	24.66	53.79	74.00	-20.21	Pk
H	4960	40.55	30.55	5.77	24.66	40.43	54.00	-13.57	AV
H	7440	52.76	30.33	6.32	24.55	53.30	74.00	-20.70	Pk
H	7440	39.53	30.33	6.32	24.55	40.07	54.00	-13.93	AV
H	9920	51.30	30.85	7.45	24.69	52.59	74.00	-21.41	Pk
H	9920	37.91	30.85	7.45	24.69	39.20	54.00	-14.80	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	55.46	30.55	5.77	24.66	55.34	74.00	-18.66	Pk
V	4804	39.30	30.55	5.77	24.66	39.18	54.00	-14.82	AV
V	7206	54.68	30.33	6.32	24.55	55.22	74.00	-18.78	Pk
V	7206	39.82	30.33	6.32	24.55	40.36	54.00	-13.64	AV
V	9608	51.52	30.85	7.45	24.69	52.81	74.00	-21.19	Pk
V	9608	37.73	30.85	7.45	24.69	39.02	54.00	-14.98	AV
H	4804	54.50	30.55	5.77	24.66	54.38	74.00	-19.62	Pk
H	4804	39.53	30.55	5.77	24.66	39.41	54.00	-14.59	AV
H	7206	52.92	30.33	6.32	24.55	53.46	74.00	-20.54	Pk
H	7206	40.49	30.33	6.32	24.55	41.03	54.00	-12.97	AV
H	9608	51.61	30.85	7.45	24.69	52.90	74.00	-21.10	Pk
H	9608	37.83	30.85	7.45	24.69	39.12	54.00	-14.88	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	54.52	30.55	5.77	24.66	54.40	74.00	-19.60	Pk
V	4882	39.87	30.55	5.77	24.66	39.75	54.00	-14.25	AV
V	7323	54.64	30.33	6.32	24.55	55.18	74.00	-18.82	Pk
V	7323	39.26	30.33	6.32	24.55	39.80	54.00	-14.20	AV
V	9764	51.61	30.85	7.45	24.69	52.90	74.00	-21.10	Pk
V	9764	39.23	30.85	7.45	24.69	40.52	54.00	-13.48	AV
H	4882	54.81	30.55	5.77	24.66	54.69	74.00	-19.31	Pk
H	4882	40.73	30.55	5.77	24.66	40.61	54.00	-13.39	AV
H	7323	53.37	30.33	6.32	24.55	53.91	74.00	-20.09	Pk
H	7323	40.42	30.33	6.32	24.55	40.96	54.00	-13.04	AV
H	9764	52.37	30.85	7.45	24.69	53.66	74.00	-20.34	Pk
H	9764	38.01	30.85	7.45	24.69	39.30	54.00	-14.70	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	55.49	30.55	5.77	24.66	55.37	74.00	-18.63	Pk
V	4960	39.25	30.55	5.77	24.66	39.13	54.00	-14.87	AV
V	7440	54.74	30.33	6.32	24.55	55.28	74.00	-18.72	Pk
V	7440	38.86	30.33	6.32	24.55	39.40	54.00	-14.60	AV
V	9920	49.98	30.85	7.45	24.69	51.27	74.00	-22.73	Pk
V	9920	39.05	30.85	7.45	24.69	40.34	54.00	-13.66	AV
H	4960	54.95	30.55	5.77	24.66	54.83	74.00	-19.17	Pk
H	4960	40.73	30.55	5.77	24.66	40.61	54.00	-13.39	AV
H	7440	53.19	30.33	6.32	24.55	53.73	74.00	-20.27	Pk
H	7440	40.83	30.33	6.32	24.55	41.37	54.00	-12.63	AV
H	9920	50.87	30.85	7.45	24.69	52.16	74.00	-21.84	Pk
H	9920	38.93	30.85	7.45	24.69	40.22	54.00	-13.78	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 5. RADIATED BAND EMISSION MEASUREMENT

### 5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

### 5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.3 DEVIATION FROM TEST STANDARD

No deviation

### 5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

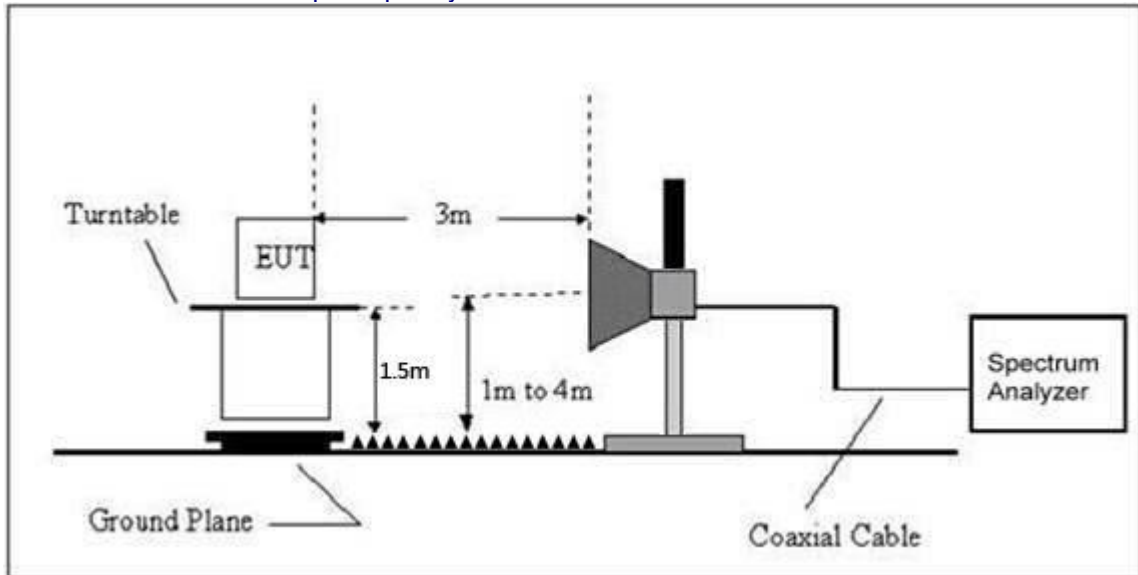

### 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dB)	Detector Type
GFSK	Low Channel: 2402MHz									
	H	2390.00	53.13	30.22	4.85	23.98	51.74	74	-22.26	PK
	H	2390.00	36.15	30.22	4.85	23.98	34.76	54	-19.24	AV
	H	2400.00	52.35	30.22	4.85	23.98	50.96	74	-23.04	PK
	H	2400.00	38.35	30.22	4.85	23.98	36.96	54	-17.04	AV
	V	2390.00	51.41	30.22	4.85	23.98	50.02	74	-23.98	PK
	V	2390.00	41.23	30.22	4.85	23.98	39.84	54	-14.16	AV
	V	2400.00	52.02	30.22	4.85	23.98	50.63	74	-23.37	PK
	V	2400.00	37.72	30.22	4.85	23.98	36.33	54	-17.67	AV
	High Channel: 2480MHz									
	H	2483.50	49.06	30.22	4.85	23.98	47.67	74	-26.33	PK
	H	2485.50	36.58	30.22	4.85	23.98	35.19	54	-18.81	AV
	H	2483.50	51.00	30.22	4.85	23.98	49.61	74	-24.39	PK
	H	2485.50	37.86	30.22	4.85	23.98	36.47	54	-17.53	AV
	V	2483.50	53.08	30.22	4.85	23.98	51.69	74	-22.31	PK
	V	2485.50	42.87	30.22	4.85	23.98	41.48	54	-12.52	AV
V	2483.50	55.45	30.22	4.85	23.98	54.06	74	-19.94	PK	
V	2485.50	42.89	30.22	4.85	23.98	41.50	54	-12.50	AV	
π/4-DQ PSK	Low Channel: 2402MHz									
	H	2390.00	54.37	30.22	4.85	23.98	52.98	74	-21.02	PK
	H	2390.00	38.03	30.22	4.85	23.98	36.64	54	-17.36	AV
	H	2400.00	54.62	30.22	4.85	23.98	53.23	74	-20.77	PK
	H	2400.00	38.71	30.22	4.85	23.98	37.32	54	-16.68	AV
	V	2390.00	53.16	30.22	4.85	23.98	51.77	74	-22.23	PK
	V	2390.00	41.56	30.22	4.85	23.98	40.17	54	-13.83	AV
	V	2400.00	52.84	30.22	4.85	23.98	51.45	74	-22.55	PK
	V	2400.00	38.44	30.22	4.85	23.98	37.05	54	-16.95	AV
	High Channel: 2480MHz									
	H	2483.50	48.63	30.22	4.85	23.98	47.24	74	-26.76	PK
	H	2485.50	38.49	30.22	4.85	23.98	37.10	54	-16.90	AV
	H	2483.50	54.20	30.22	4.85	23.98	52.81	74	-21.19	PK
	H	2485.50	38.64	30.22	4.85	23.98	37.25	54	-16.75	AV
V	2483.50	58.87	30.22	4.85	23.98	57.48	74	-16.52	PK	
V	2485.50	40.09	30.22	4.85	23.98	38.70	54	-15.30	AV	
V	2483.50	59.32	30.22	4.85	23.98	57.93	74	-16.07	PK	
V	2485.50	39.62	30.22	4.85	23.98	38.23	54	-15.77	AV	
<b>Remark:</b>										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

## 6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

### 6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.2 Test Setup



### 6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.



### 6.4 DEVIATION FROM STANDARD

No deviation.

### 6.5 Test Result





Test channel: Middle channel

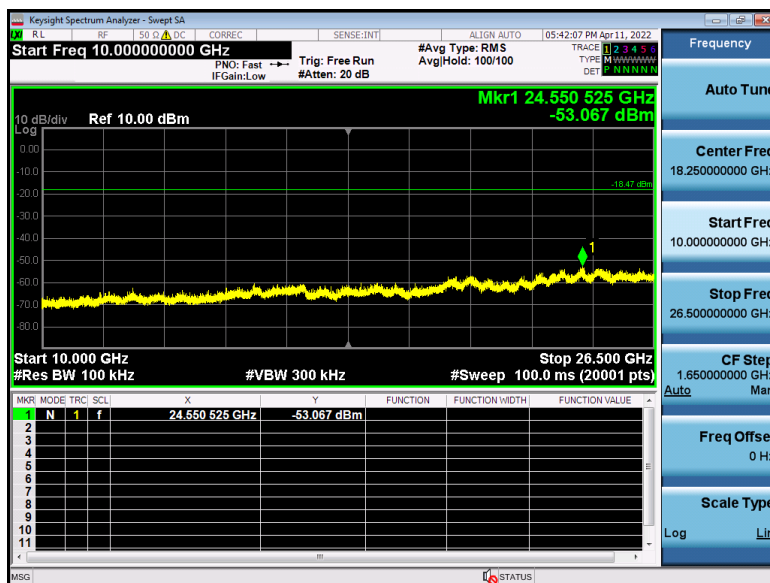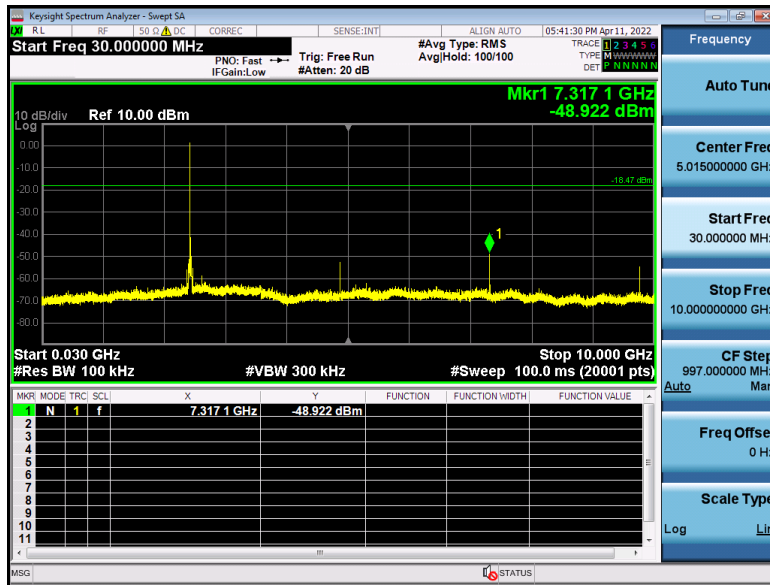





Test channel: Highest channel

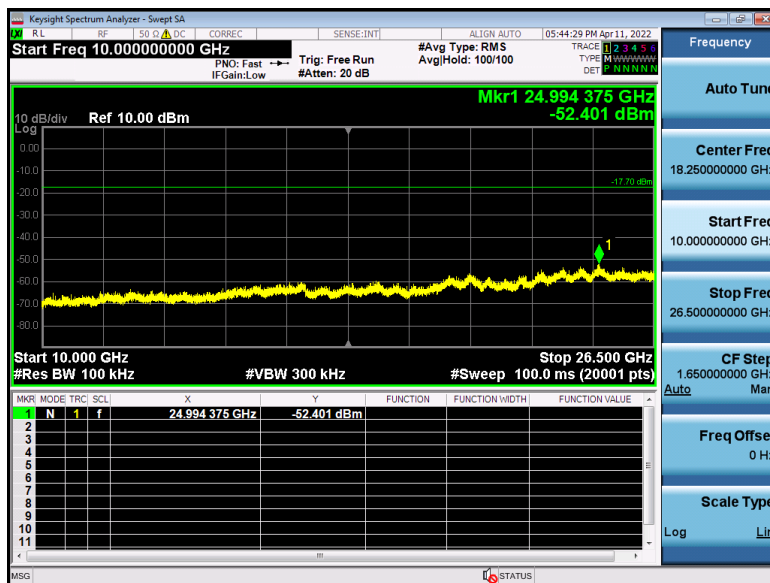
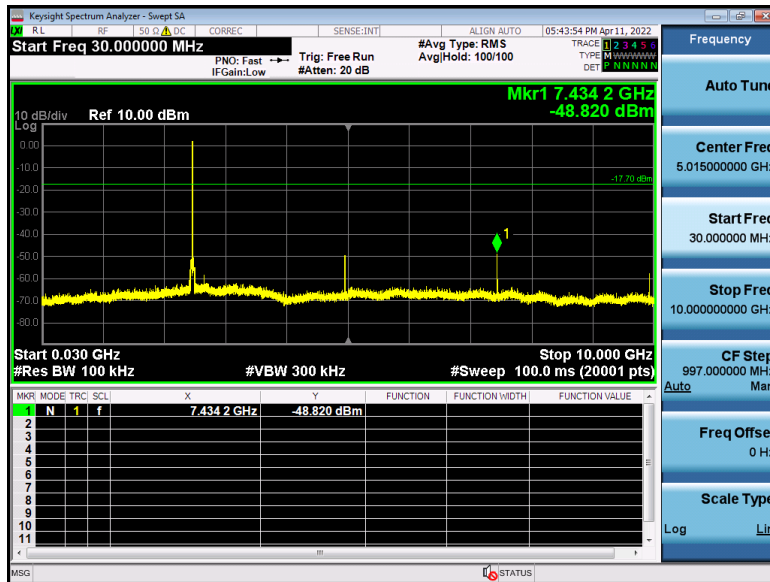


$\pi/4$ -DQPSK mode:

Test channel:	Lowest channel
---------------	----------------

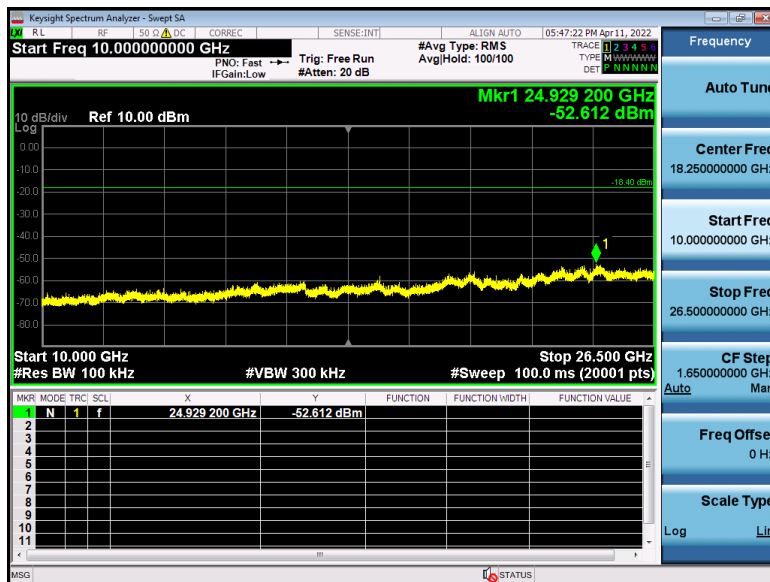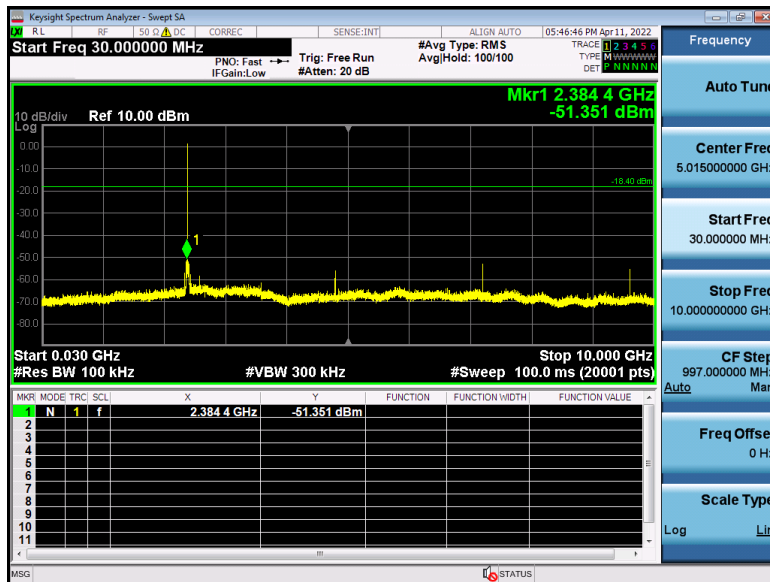

Test channel: Middle channel

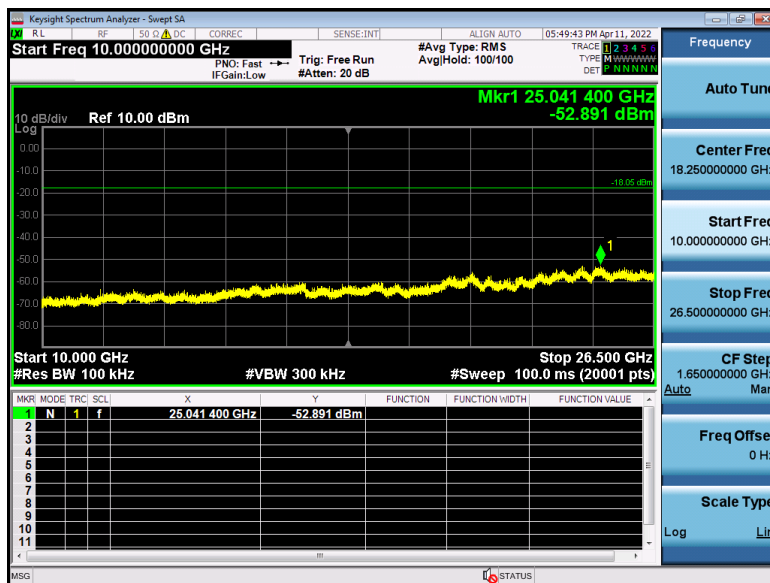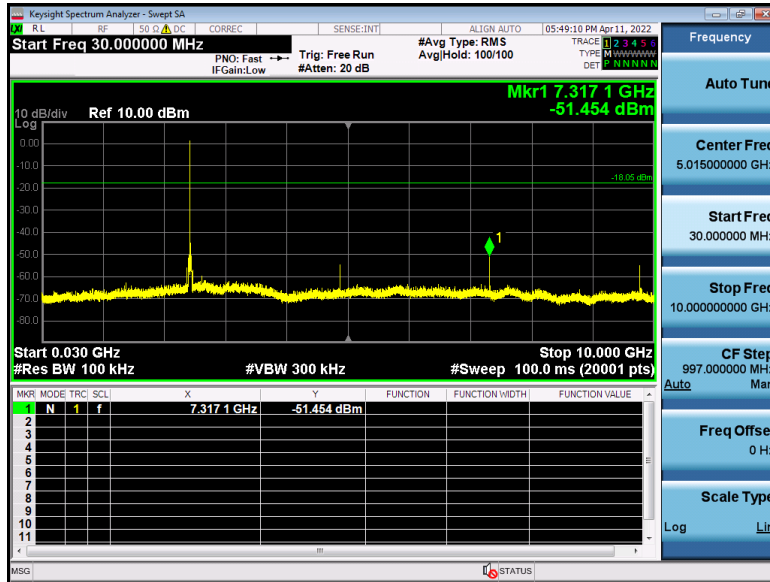














**7. 20DB BANDWIDTH**

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 20 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.887	Pass
	Middle	0.8869	
	Highest	0.8864	
π/4-DQPSK	Lowest	1.254	Pass
	Middle	1.258	
	Highest	1.252	

Test plots

### GFSK Low Channel




### GFSK Middle Channel




### GFSK High Channel




### π/4-DQPSK Low Channel

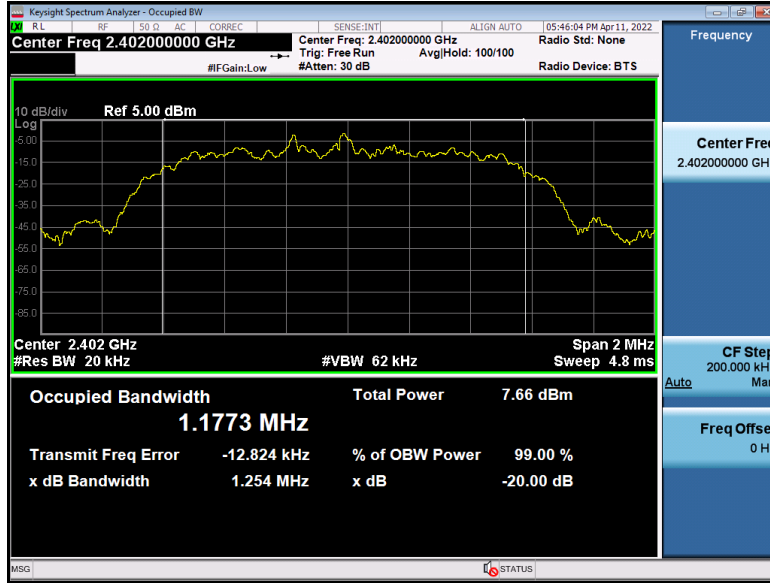

### π/4-DQPSK Middle Channel

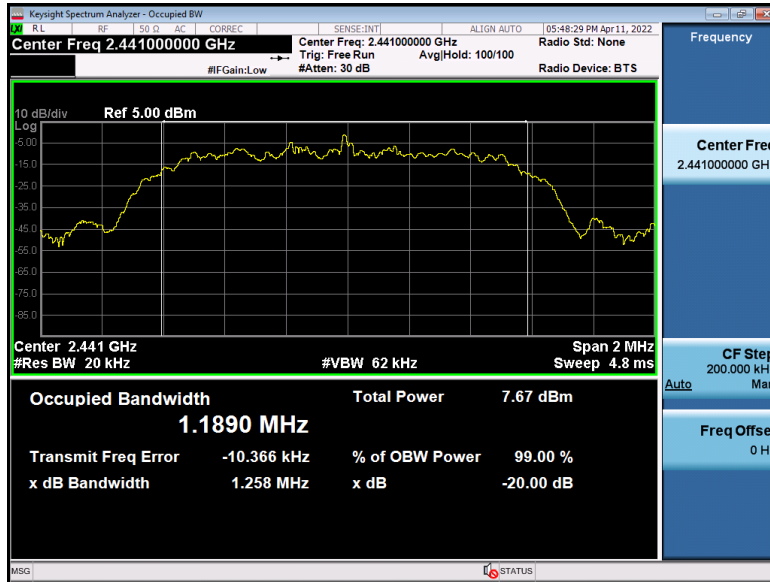

### π/4-DQPSK High Channel

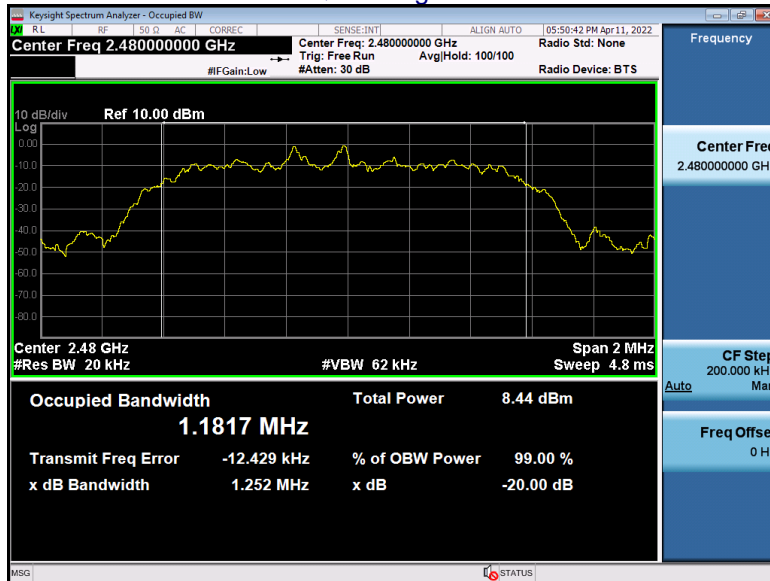

## 8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	21

### 8.1 Block Diagram Of Test Setup



### 8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 8.4 DEVIATION FROM STANDARD

No deviation.

### 8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	1.612	21	Pass
	Middle	2.105		
	Highest	2.517		
$\pi/4$ -DQPSK	Lowest	2.585	21	Pass
	Middle	3.021		
	Highest	3.417		

### 9. Hopping Channel Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

#### 9.1 Test Setup



#### 9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


#### 9.3 DEVIATION FROM STANDARD

No deviation.


#### 9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
DH5	Low	0.999	0.887	PASS
DH5	Middle	1.000	0.8869	PASS
DH5	High	0.997	0.8864	PASS
2DH1	Low	0.997	0.836	PASS
2DH3	Middle	0.994	0.839	PASS
2DH5	High	0.999	0.835	PASS


### Test plots DH5-Low Channel

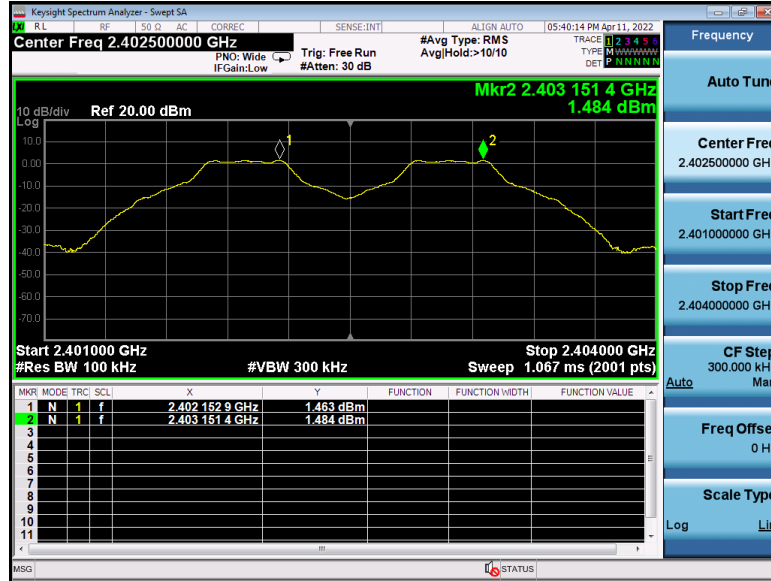


### DH5-Middle Channel

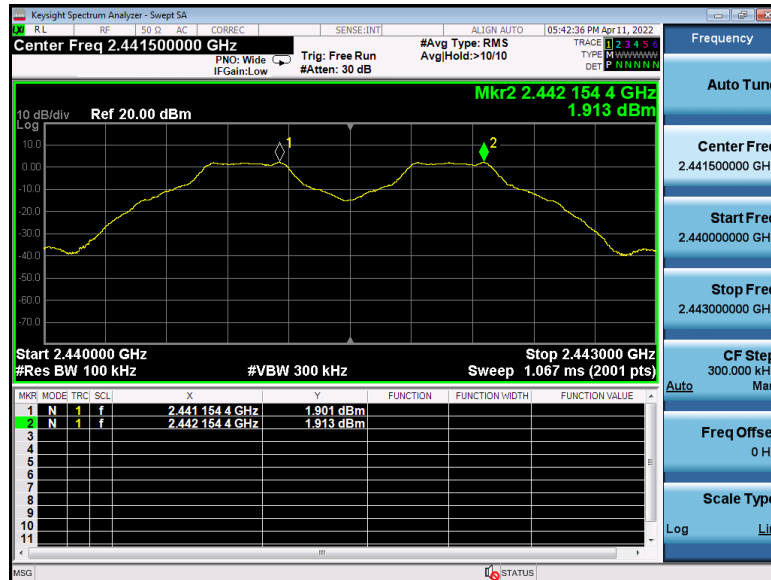


### DH5-High Channel

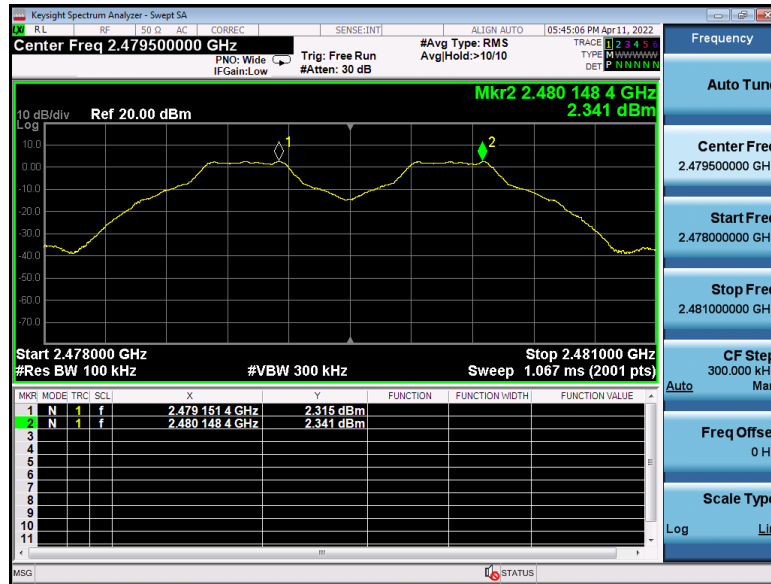


### 2DH1-Low Channel

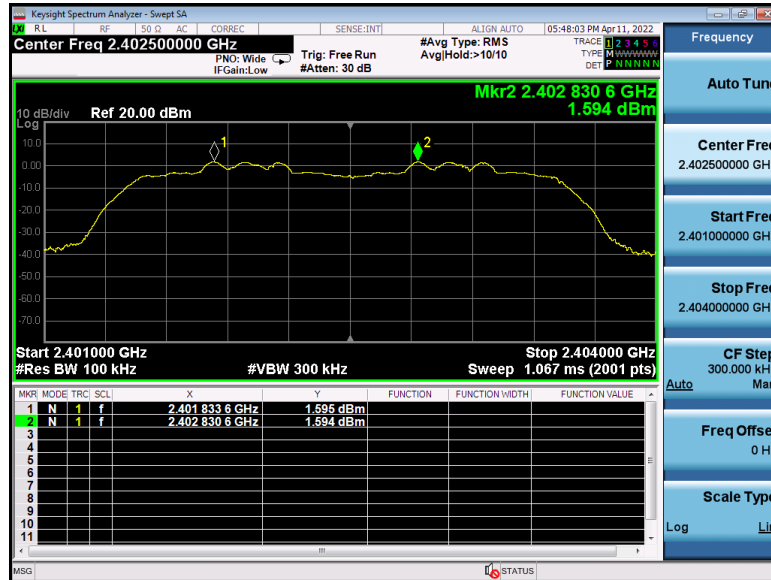

### 2DH3-Middle Channel

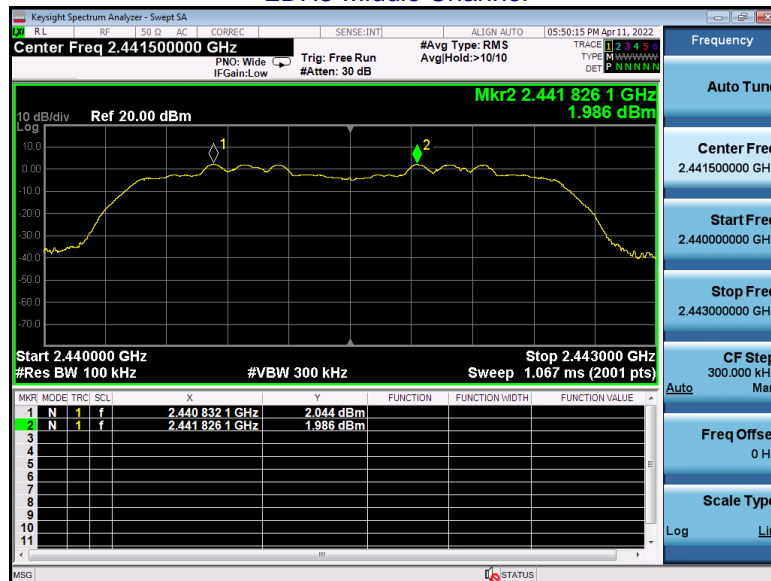

### 2DH5-High Channel

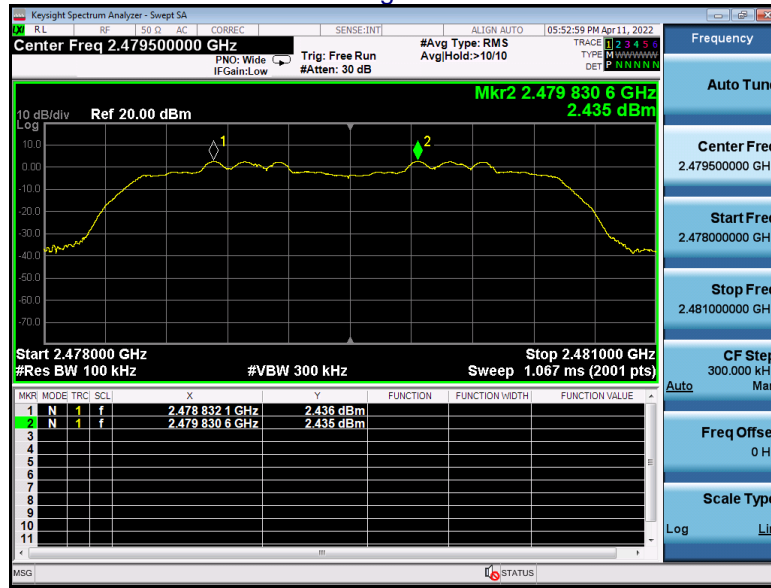



### 10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

#### 10.1 Test Setup



#### 10.2 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

#### 10.3 DEVIATION FROM STANDARD


No deviation.

### 10.4 Test Result

### Test Plots: 79 Channels in total GFSK

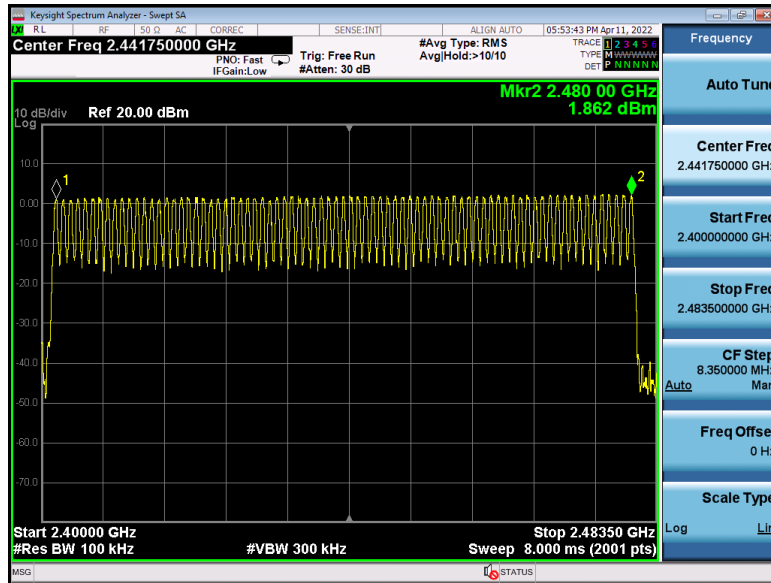

### $\pi/4$ -DQPSK

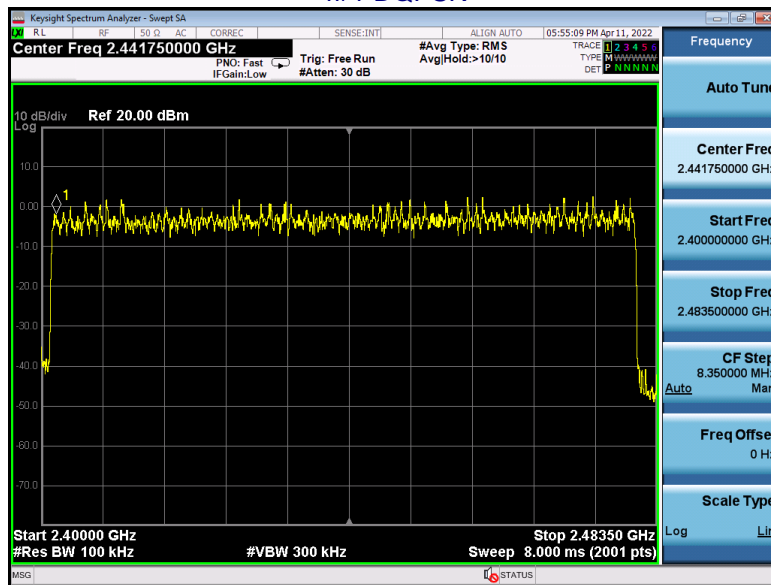

## 11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

### 11.1 Test Setup



### 11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 11.3 DEVIATION FROM STANDARD

No deviation.


### 11.4 Test Result

Frequency	Packet	Burst Width [ms/hop/ch]	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	0.3897	124.704	400	Pass
2441MHz	DH3	1.645	263.200	400	Pass
2441MHz	DH5	2.894	308.693	400	Pass
2441MHz	2DH1	0.3988	127.616	400	Pass
2441MHz	2DH3	1.65	264.000	400	Pass
2441MHz	2DH5	2.895	308.800	400	Pass


#### Remarks:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$   
 Test channel: 2402MHz as blow  
 DH1 2DH1 3DH1 time slot=  $\text{Burst Width(ms)} \times (1600 / (2 \times 79)) \times 31.6$   
 DH3 2DH3 3DH3 time slot=  $\text{Burst Width(ms)} \times (1600 / (4 \times 79)) \times 31.6$   
 DH5 2DH5 3DH5 time slot=  $\text{Burst Width(ms)} \times (1600 / (6 \times 79)) \times 31.6$


### Test Plots DH1 Middle Channel

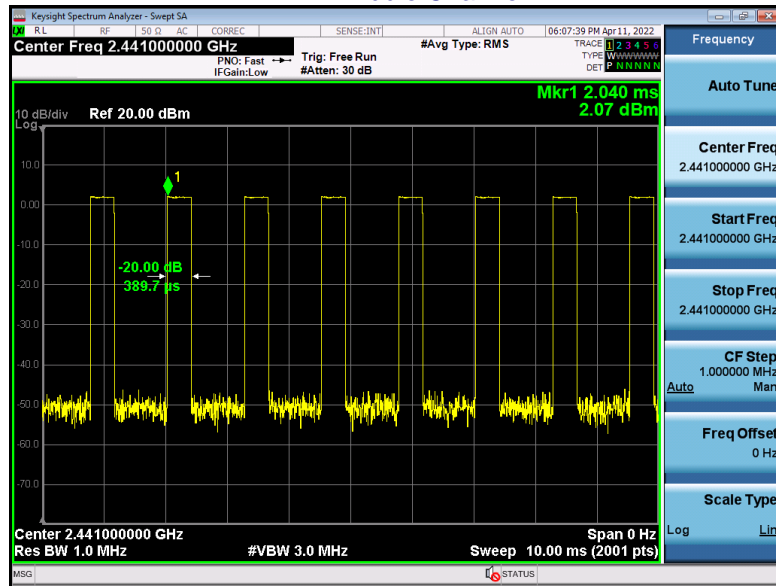


### DH3 Middle Channel

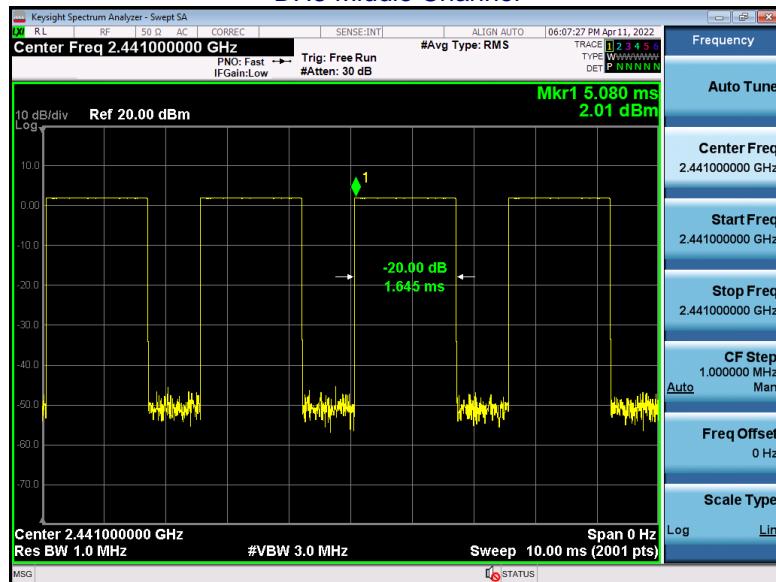


### DH5 Middle Channel

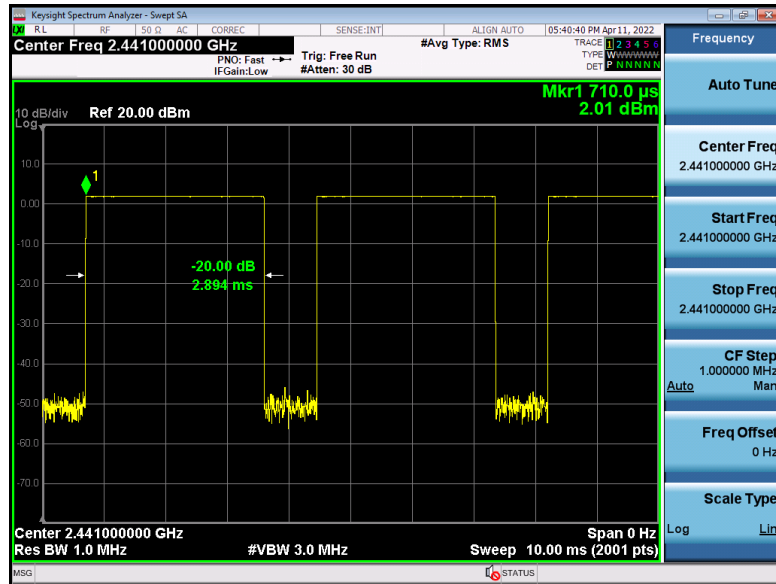


2DH1 Middle Channel

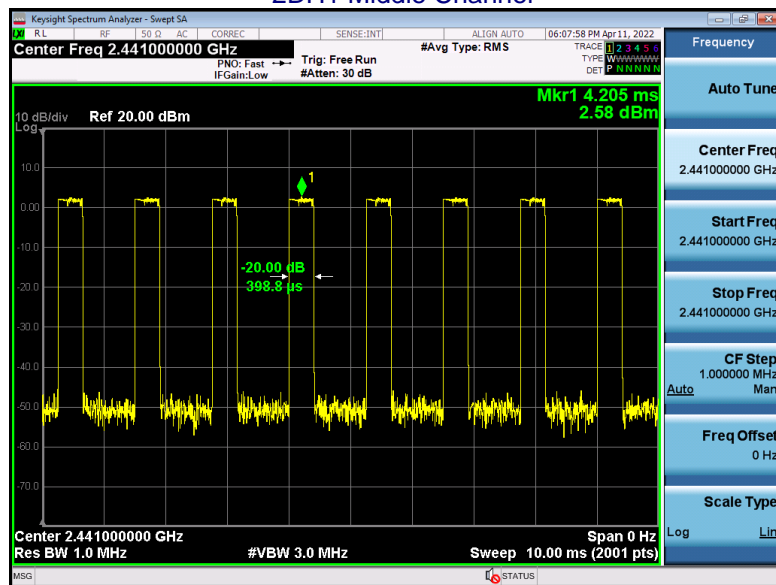


2DH3 Middle Channel

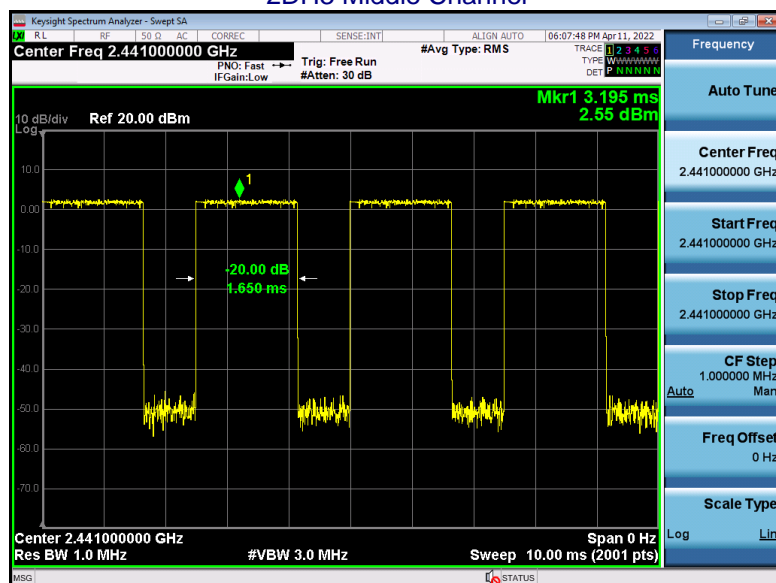

### 2DH5 Middle Channel

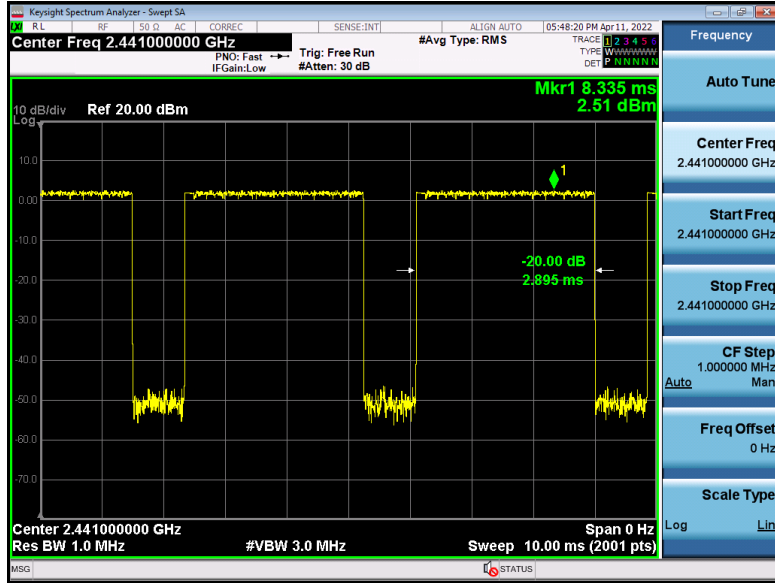

## 12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
EUT Antenna:	
<p>The antenna is FPC antenna , the best case gain of the antennas are 1.5dBi, reference to the below photo for details</p> <p style="text-align: center;">ANT for BT</p> 	

13. Test Setup Photo







#### 14. EUT Constructional Details

Please refer to external photos file and internal photos file

**\*\*\*\*\* END OF REPORT \*\*\*\*\***