

TEST REPORT

Reference No...... : WTF22D04070742W001 V1
FCC ID : 2A6J9C300-0200
Applicant..... : Bkav Corporation
Address..... : 2nd Floor, HH1 Building, Yen Hoa Ward, Cau Giay District, Ha Noi, 100000 Vietnam
Manufacturer : Bkav Corporation
Address..... : 2nd Floor, HH1 Building, Yen Hoa Ward, Cau Giay District, Ha Noi, 100000 Vietnam
Brand Name..... : N/A
Product..... : IP Camera
Model(s) : C300-0200
Standards..... : CFR47 FCC Part15 Subpart C §15.247
Date of Receipt sample : 2022-04-15
Date of Test : 2022-04-15 to 2022-06-13
Date of Issue..... : 2022-08-02
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Approved by:

Estel Qian

Estel Qian / Project Engineer



Deval Qian

Deval Qian / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST.....	5
4.4 TEST FACILITY.....	6
4.5 SUBCONTRACTED.....	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.7 TEST MODE	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS	9
6.3 MEASUREMENT UNCERTAINTY	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION	12
7.4 CONDUCTED EMISSION TEST RESULT	12
8 DUTY CYCLE.....	14
9 RADIATED EMISSIONS.....	16
9.1 EUT OPERATION.....	16
9.2 TEST SETUP	17
9.3 SPECTRUM ANALYZER SETUP	18
9.4 TEST PROCEDURE	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
9.6 SUMMARY OF TEST RESULTS.....	20
10 BAND EDGE MEASUREMENT	23
10.1 TEST PROCEDURE	23
10.2 TEST RESULT	24
11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	26
11.1 TEST PROCEDURE:.....	26
11.2 TEST RESULT:	26
12 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	31
12.1 TEST PROCEDURE:.....	31
12.2 TEST RESULT:	31
13 POWER SPECTRAL DENSITY	36
13.1 TEST PROCEDURE:.....	36
13.2 TEST RESULT:	36
14 ANTENNA REQUIREMENT	41

15	RF EXPOSURE.....	41
16	PHOTOGRAPHS OF TEST SETUP AND EUT.....	41

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF22D04070742 W001	2022-04-15	2022-04-15 to 2022-06-13	2022-07-29	Original	-	Replaced
WTF22D04070742 W001 V1	2022-04-15	2022-04-15 to 2022-06-13	2022-08-02	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	IP Camera
Model(s):	C300-0200
Model Description:	N/A
Wi-Fi Specification:	802.11b/g/n HT20/n HT40
Hardware Version:	V2.1.1
Software Version:	1.2.3.6

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n HT20: 2412~2462MHz, 11CH 802.11n HT40: 2422~2452MHz, 7CH
Max. RF output power:	2.4G Wi-Fi: 17.32dBm Conducted power
Type of Modulation:	802.11b: DBPSK, DQPSK, CCK 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM(BPSK, QPSK, 16QAM, 64QAM)
Antenna installation:	External antenna
Antenna Gain:	2.5dBi
Ratings:	DC 12V from adapter
Adapter:	Manufacturer XING YUAN ELECTRONICS CO., LTD Model No.: XY12J-1201000Q-UW Input: 100-240VAC, 0.5A Max 50/60Hz Output: 12V $\overline{=}$ 1.0A

4.3 Channel List

Wi-Fi

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	N/A
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
Conducted Emissions 1#						
1	EMI Test Receiver	R&S	ESCI	100947	2021-07-26 2022-07-22	1Year
2	LISN	R&S	ENV216	100115	2021-07-26 2022-07-22	1Year
3	Cable	Top	TYPE16(3.5M)	-	2021-07-26 2022-07-22	1Year
4	Test software	EZ-EMC	RA-03A1-1	-	N/A	N/A
3m Semi-anechoic Chamber for Radiation Emissions (SAEMC)						
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-27 2022-04-26	1Year
2	Amplifier	Agilent	8447D	2944A10178	2021-07-26 2022-07-22	1Year
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2021-08-23	1Year
4	Coaxial Cable	Top	TYPE16(13M)	-	2021-04-27 2022-04-26	1Year
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2021-05-10 2022-04-30	1Year
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2021-07-30 2022-07-22	1Year
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2021-07-26 2022-07-22	1Year
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2021-04-27 2022-04-26	1Year
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2021-07-26 2022-07-22	1Year
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2021-04-27 2022-04-26	1Year
11	Test software	EZ-EMC	RA-03A1-1	-	N/A	N/A
3m Semi-anechoic Chamber for Radiation Emissions (TDK)						
1	Test Receiver	R&S	ESCI	101296	2021-04-27 2022-04-26	1Year
2	Tri-log Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-10-30	1Year
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2021-04-30 2022-04-29	1Year
4	Amplifier	ANRITSU	MH648A	M43381	2021-04-27 2022-04-26	1Year
5	Cable	HUBER+SUHNER	CBL2	525178	2021-04-27 2022-04-26	1Year
6	Test software	EZ-EMC	RA-03A1-1	-	N/A	N/A
RF Conducting						
1	Spectrum Analyzer	R&S	FSP40	100501	2021-07-26 2022-07-22	1Year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021-07-26 2022-07-22	1Year

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64\text{dB}$ (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08\text{dB}$ (Bilog antenna 30M~1000MHz)
	$\pm 5.47\text{ dB}$ (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}\text{Hz}$
RF Power	$\pm 0.42\text{ dB}$
RF Power Density	$\pm 0.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.76\text{ dB}$ (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207
 Test Method: ANSI C63.10:2013
 Test Result: PASS
 Frequency Range: 150kHz to 30MHz
 Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50


*Decreases with the logarithm of the frequency.

7.1 E.U.T. Operation

Operating Environment:
 Temperature: 21.4 °C
 Humidity: 50.7 % RH
 Atmospheric Pressure: 101.6kPa
 Test Voltage: AC 120V, 60Hz
 EUT Operation: Please refer to 4.7.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

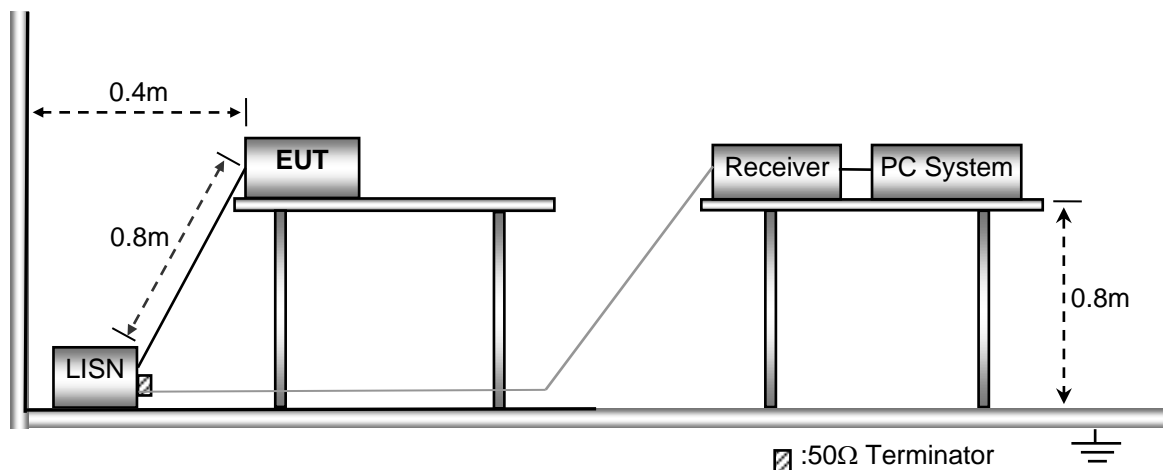


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


Remark: only the worst data (11n HT40 mode High channel mode) were reported

Live line:

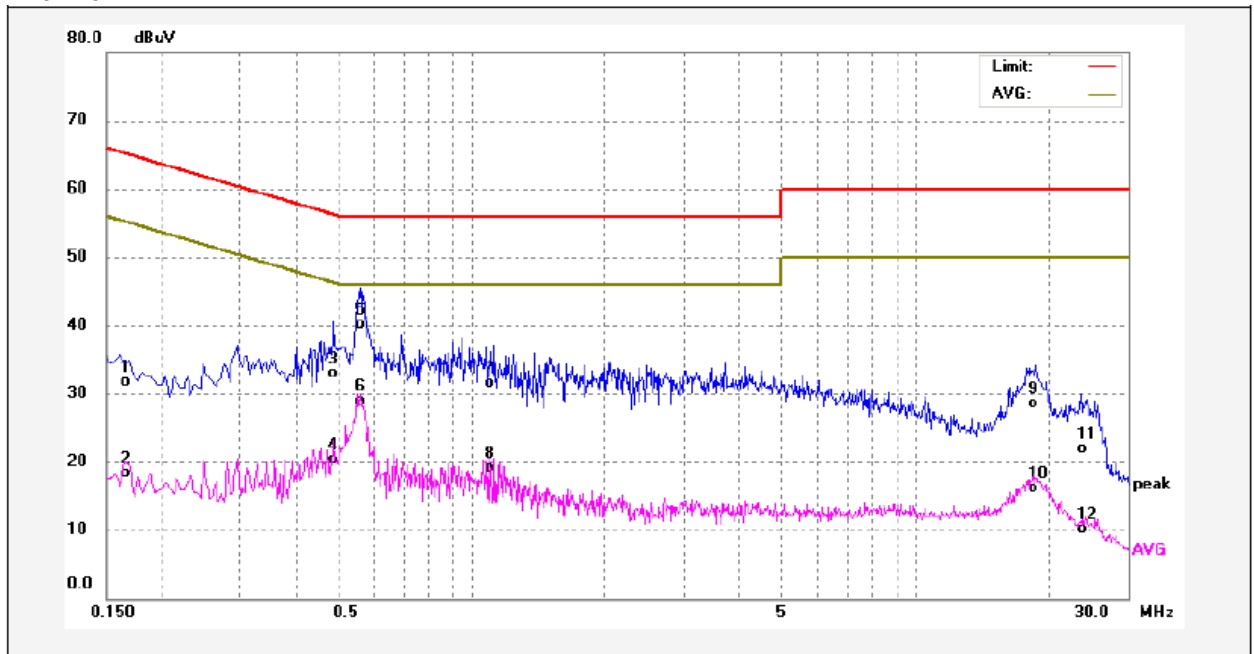

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	21.39	10.23	31.62	65.15	-33.53	QP	
2	0.1660	8.17	10.23	18.40	55.15	-36.75	AVG	
3	0.4900	22.63	10.20	32.83	56.17	-23.34	QP	
4	0.4900	10.02	10.20	20.22	46.17	-25.95	AVG	
5	0.5620	29.83	10.22	40.05	56.00	-15.95	QP	
6	0.5620	18.66	10.22	28.88	46.00	-17.12	AVG	
7	1.0940	21.21	10.29	31.50	56.00	-24.50	QP	
8	1.0940	8.79	10.29	19.08	46.00	-26.92	AVG	
9	18.2340	18.01	10.40	28.41	60.00	-31.59	QP	
10	18.2340	5.62	10.40	16.02	50.00	-33.98	AVG	
11	23.4380	11.62	10.31	21.93	60.00	-38.07	QP	
12	23.4380	-0.18	10.31	10.13	50.00	-39.87	AVG	

Neutral line:

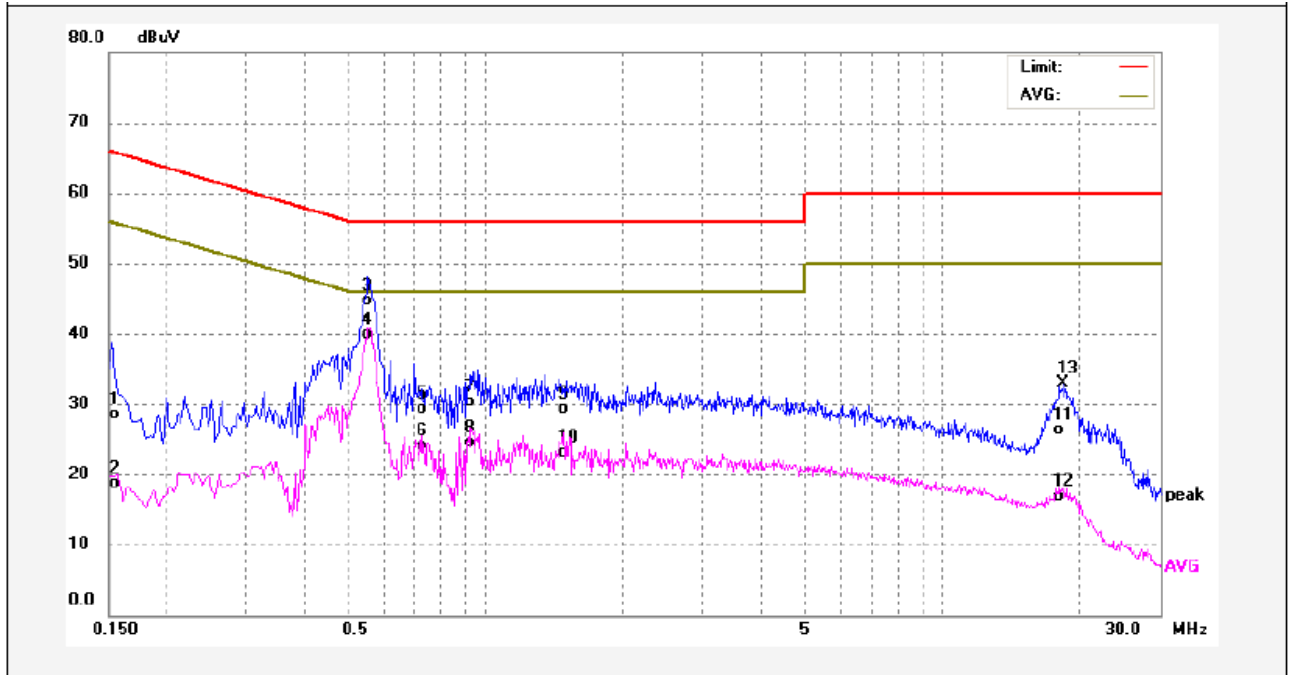

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	18.34	10.26	28.60	65.78	-37.18	QP	
2	0.1539	8.53	10.26	18.79	55.78	-36.99	AVG	
3	0.5580	34.58	10.22	44.80	56.00	-11.20	QP	
4	0.5580	29.68	10.22	39.90	46.00	-6.10	AVG	
5	0.7300	18.93	10.30	29.23	56.00	-26.77	QP	
6	0.7300	13.76	10.30	24.06	46.00	-21.94	AVG	
7	0.9300	20.03	10.30	30.33	56.00	-25.67	QP	
8	0.9300	14.24	10.30	24.54	46.00	-21.46	AVG	
9	1.4900	19.09	10.30	29.39	56.00	-26.61	QP	
10	1.4900	12.85	10.30	23.15	46.00	-22.85	AVG	
11	18.0020	15.88	10.52	26.40	60.00	-33.60	QP	
12	18.0020	6.39	10.52	16.91	50.00	-33.09	AVG	
13	18.4078	22.32	10.51	32.83	60.00	-27.17	peak	

8 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	4.1800	4.4400	0.94	94.14	0.26	-0.52
802.11g	0.6900	0.9040	0.76	76.33	1.17	-2.35
802.11n-HT20	0.6540	0.8560	0.76	76.40	1.17	-2.34
802.11n-HT40	0.3360	0.5400	0.62	62.22	2.06	-4.12


Remark:

Duty cycle=On Time/period;


Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$


Wi-Fi 802.11b

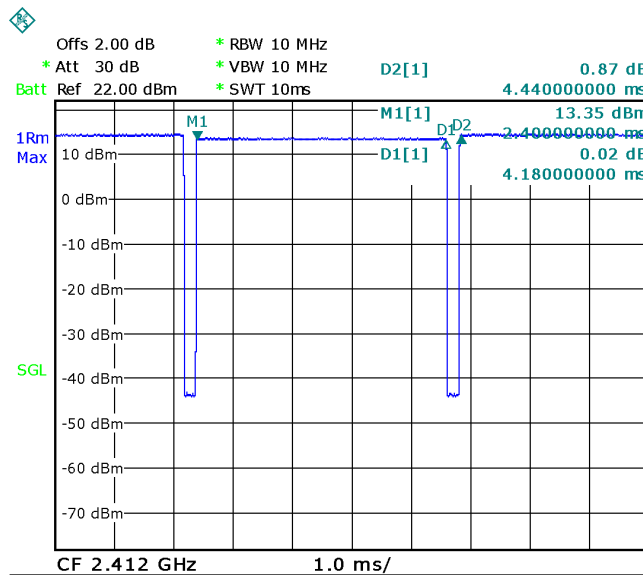


Wi-Fi 802.11g

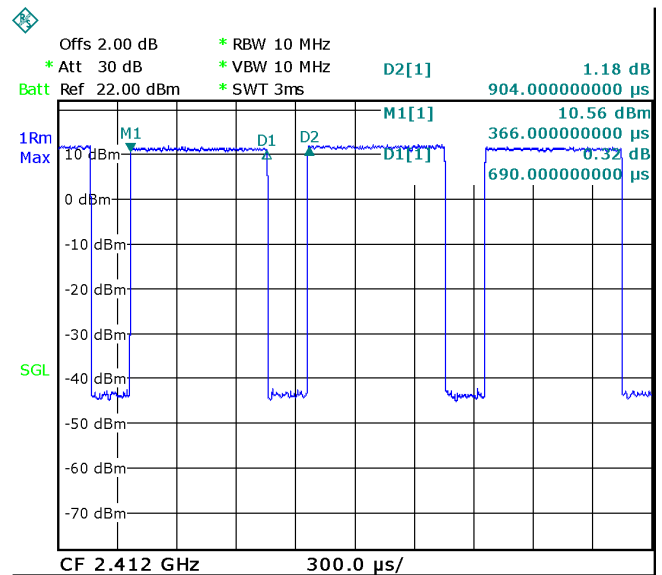

Wi-Fi 802.11n-HT20

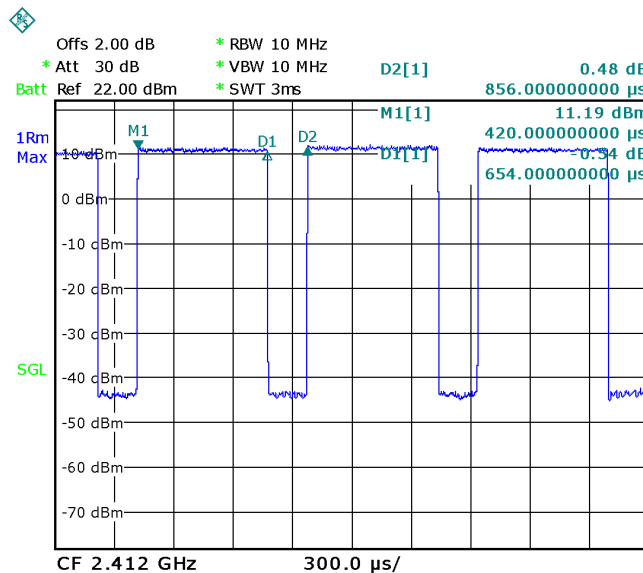

Wi-Fi 802.11n-HT40

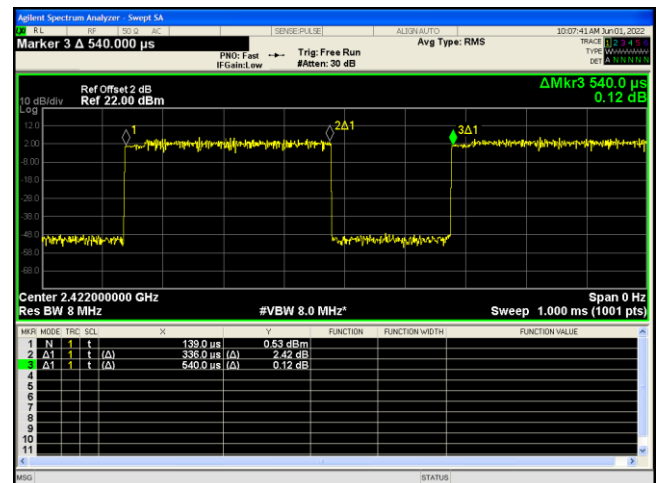

9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in TX transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

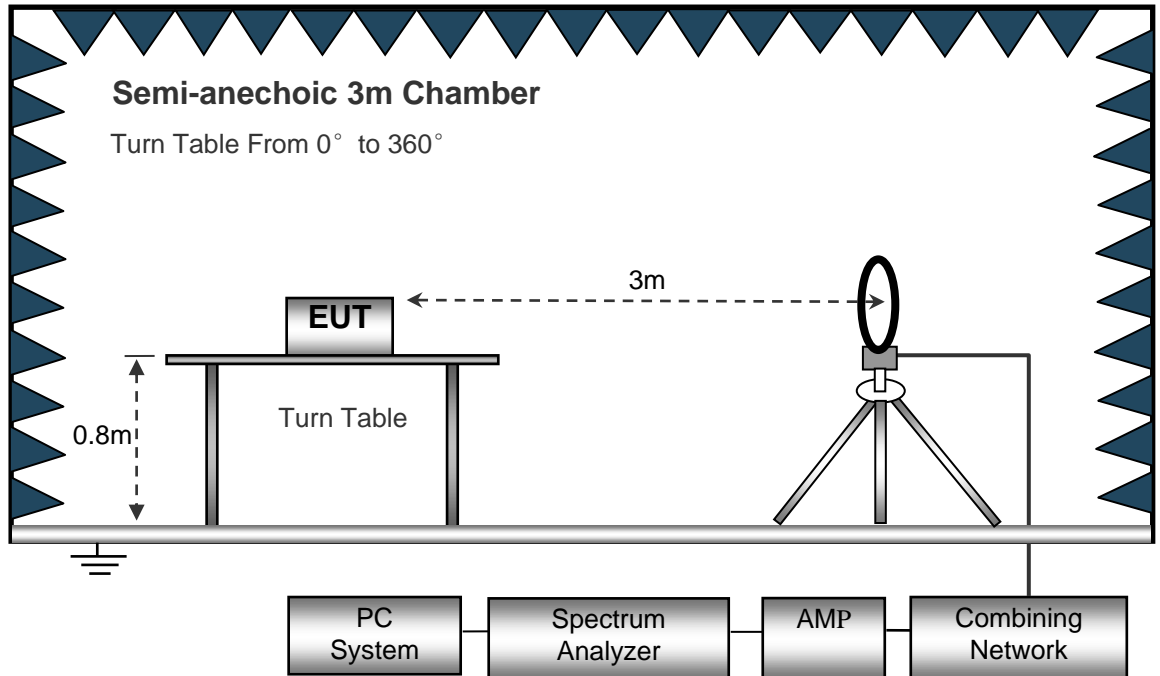

The test setup for emission measurement from 30 MHz to 1 GHz.

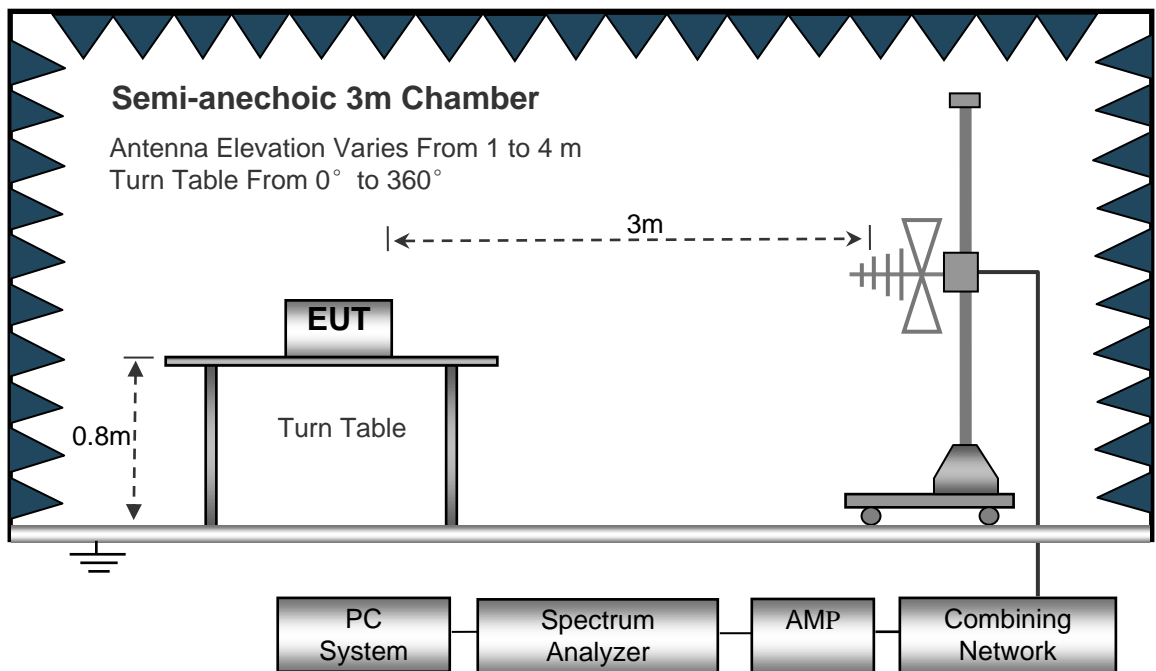

The test setup for emission measurement above 1 GHz.

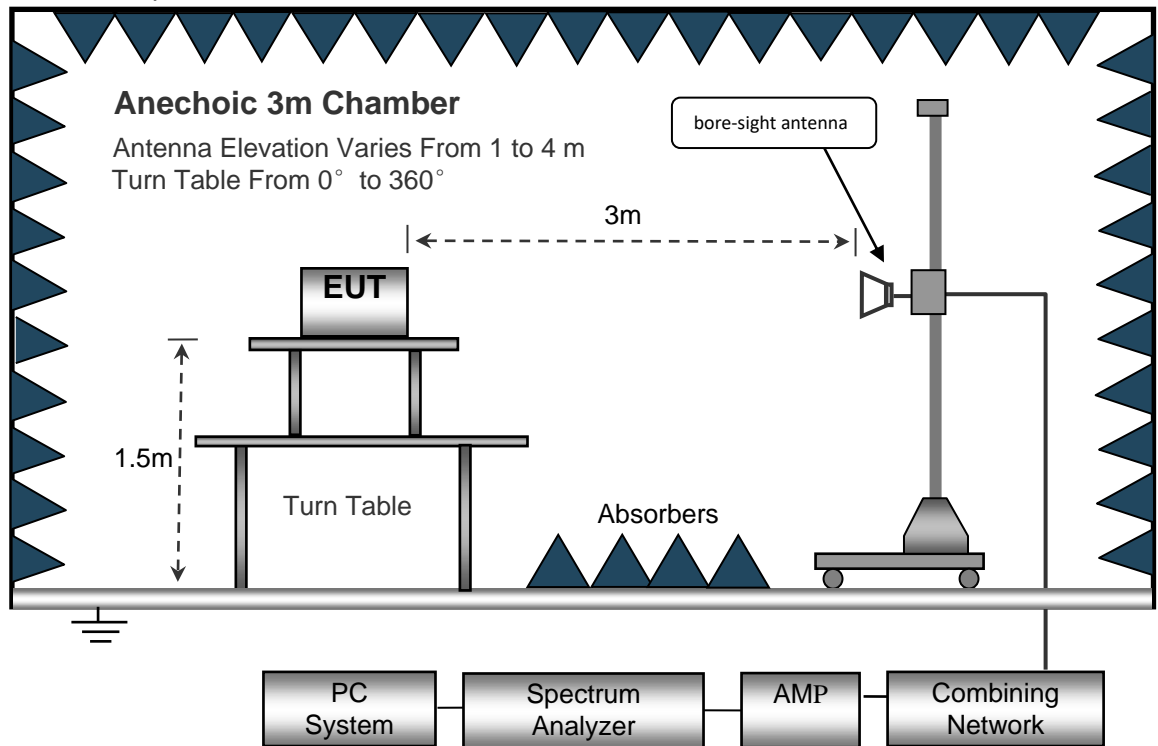

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X, Y and Z axis positioning (X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), the worst condition was tested putting the EUT in Z axis, so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Note:

Only the worst-case 11b mode were record in the report.

Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	39.73	QP	254	1.3	H	-11.62	28.11	46.00	-17.89
223.45	32.84	QP	155	1.1	V	-11.62	21.22	46.00	-24.78
4824.00	46.78	PK	132	1.9	V	-1.06	45.72	74.00	-28.28
4824.00	43.45	Ave	132	1.9	V	-1.06	42.39	54.00	-11.61
7236.00	49.66	PK	153	1.1	H	1.33	50.99	74.00	-23.01
7236.00	35.81	Ave	153	1.1	H	1.33	37.14	54.00	-16.86
2320.45	45.28	PK	242	1.8	V	-13.19	32.09	74.00	-41.91
2320.45	38.55	Ave	242	1.8	V	-13.19	25.36	54.00	-28.64
2369.23	42.78	PK	237	1.7	H	-13.14	29.64	74.00	-44.36
2369.23	37.72	Ave	237	1.7	H	-13.14	24.58	54.00	-29.42
2484.51	44.08	PK	283	1.1	V	-13.08	31.00	74.00	-43.00
2484.51	38.75	Ave	283	1.1	V	-13.08	25.67	54.00	-28.33

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	40.13	QP	303	1.7	H	-11.62	28.51	46.00	-17.49
223.45	31.73	QP	33	1.8	V	-11.62	20.11	46.00	-25.89
4874.00	47.51	PK	308	1.6	V	-0.62	46.89	74.00	-27.11
4874.00	43.63	Ave	308	1.6	V	-0.62	43.01	54.00	-10.99
7311.00	49.94	PK	211	1.6	H	2.21	52.15	74.00	-21.85
7311.00	34.98	Ave	211	1.6	H	2.21	37.19	54.00	-16.81
2316.85	45.02	PK	306	1.3	V	-13.19	31.83	74.00	-42.17
2316.85	37.12	Ave	306	1.3	V	-13.19	23.93	54.00	-30.07
2356.68	42.85	PK	222	1.7	H	-13.14	29.71	74.00	-44.29
2356.68	36.59	Ave	222	1.7	H	-13.14	23.45	54.00	-30.55
2498.88	43.04	PK	191	1.2	V	-13.08	29.96	74.00	-44.04
2498.88	38.43	Ave	191	1.2	V	-13.08	25.35	54.00	-28.65

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
223.45	40.50	QP	9	1.5	H	-11.62	28.88	46.00	-17.12
223.45	31.94	QP	82	1.4	V	-11.62	20.32	46.00	-25.68
4924.00	47.33	PK	73	1.6	V	-0.24	47.09	74.00	-26.91
4924.00	43.64	Ave	73	1.6	V	-0.24	43.40	54.00	-10.60
7386.00	50.91	PK	247	1.4	H	2.84	53.75	74.00	-20.25
7386.00	36.06	Ave	247	1.4	H	2.84	38.90	54.00	-15.10
2315.69	46.53	PK	239	1.8	V	-13.19	33.34	74.00	-40.66
2315.69	38.09	Ave	239	1.8	V	-13.19	24.90	54.00	-29.10
2383.95	43.66	PK	65	2.0	H	-13.14	30.52	74.00	-43.48
2383.95	37.86	Ave	65	2.0	H	-13.14	24.72	54.00	-29.28
2484.10	43.48	PK	345	1.7	V	-13.08	30.40	74.00	-43.60
2484.10	38.21	Ave	345	1.7	V	-13.08	25.13	54.00	-28.87

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Limit:

Test Mode: Transmitting


10.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


10.2 Test Result

Test result plots shown as follows:


TX 11b: Band edge-left side

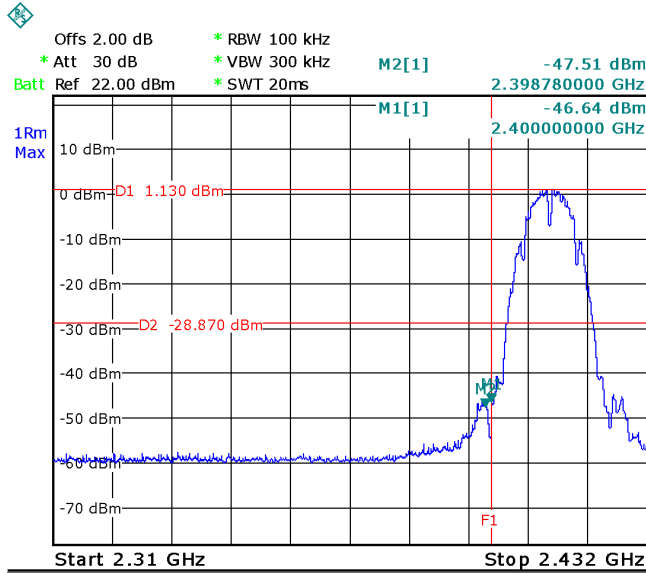


TX 11b: Band edge-right side

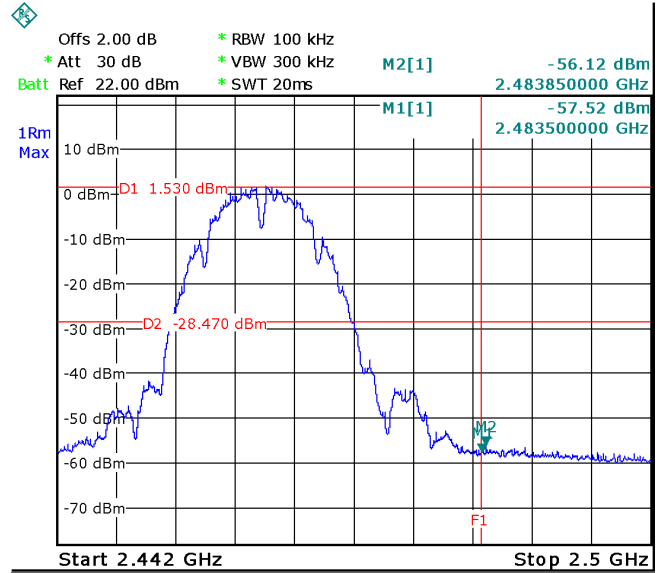


TX 11g: Band edge-left side

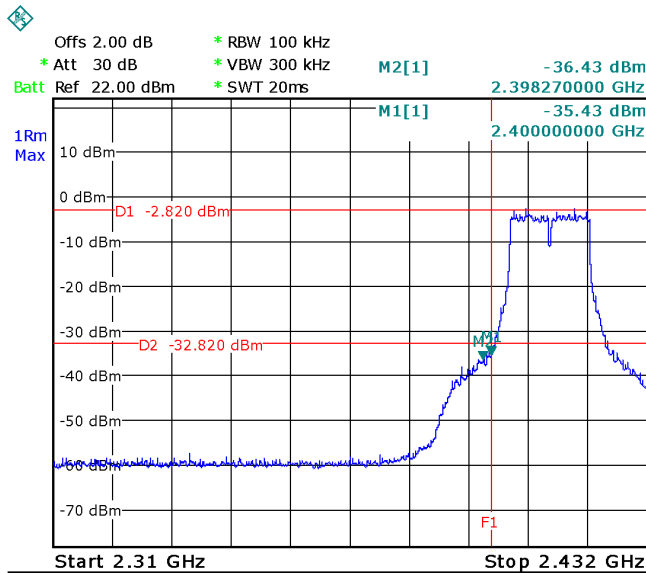


TX 11g: Band edge-right side

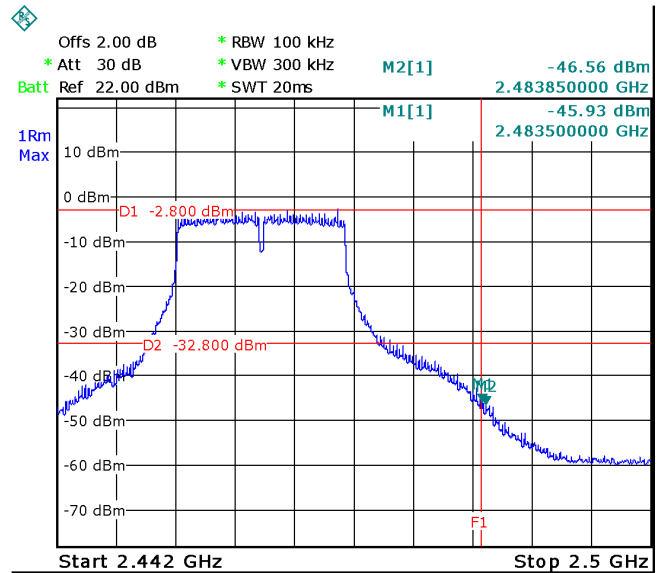


TX 11n HT20: Band edge-left side

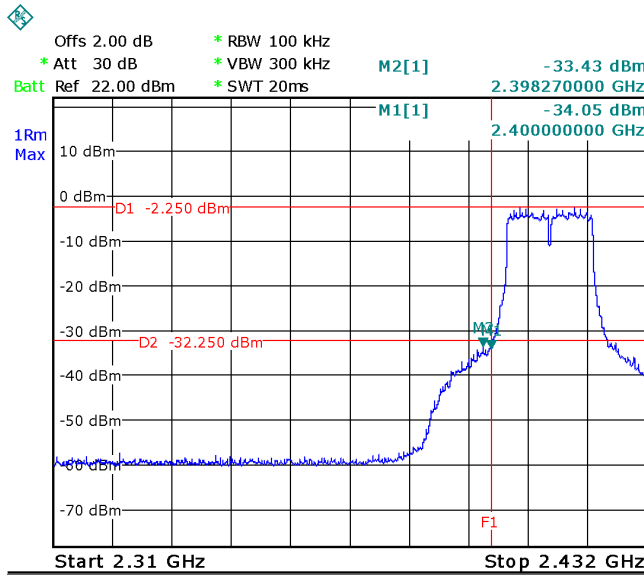


TX 11n HT20: Band edge-right side

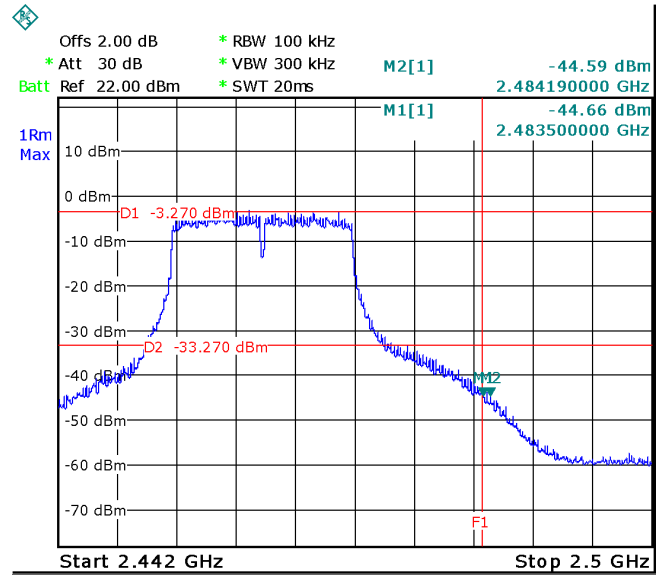

TX 11n HT40: Band edge-left side

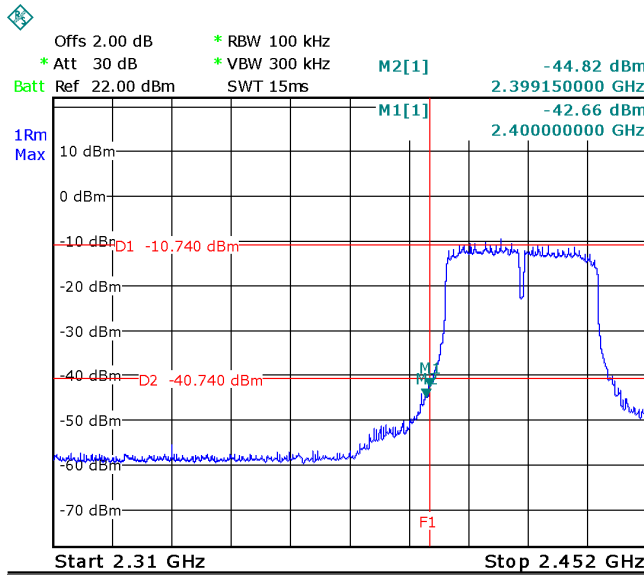

TX 11n HT40: Band edge-right side

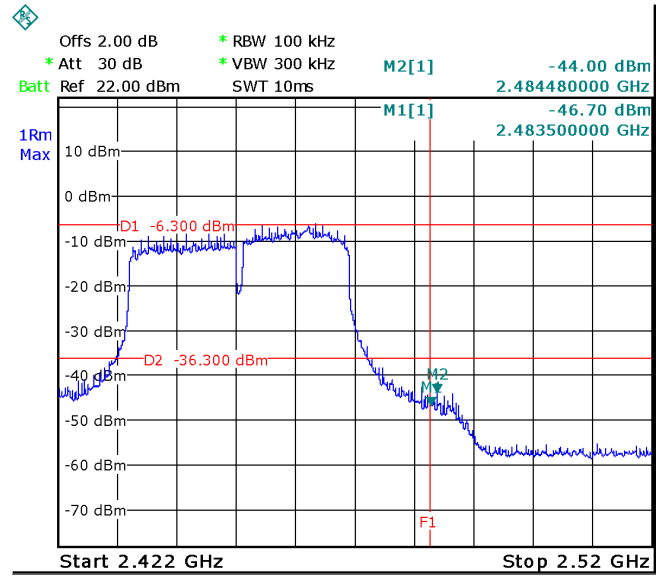

11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: ANSI C63.10:2013

KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Test Limit: §15.247(a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Mode: Transmitting

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

11.2 Test Result:


Operation mode	Test Channel	6dB Bandwidth (MHz)
TX 11b	Channel 1	8.527
	Channel 6	9.070
	Channel 11	8.974
TX 11g	Channel 1	16.367
	Channel 6	16.467
	Channel 11	16.367
TX 11n HT20	Channel 1	17.407
	Channel 6	17.677
	Channel 11	17.515
TX 11n HT40	Channel 3	35.06
	Channel 6	35.45
	Channel 9	35.07

Test result plot:


TX 11b channel 1

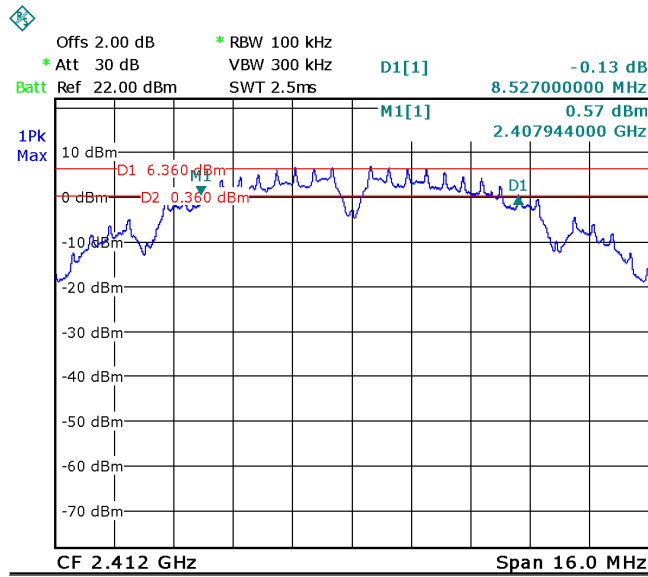


TX 11b channel 6

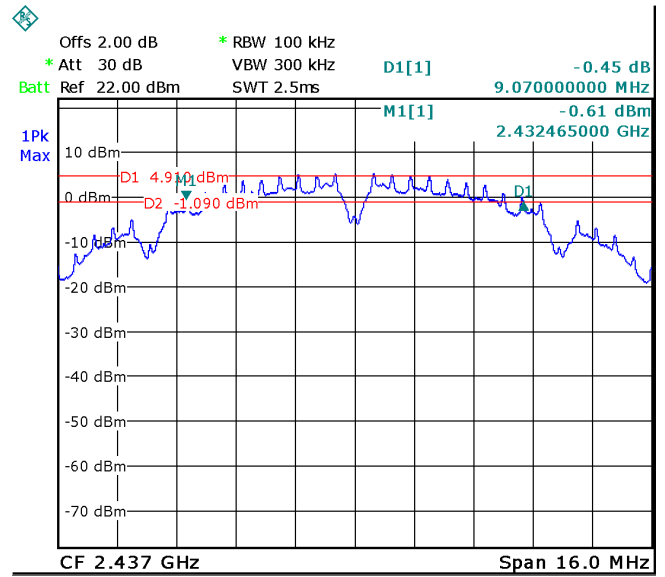


TX 11b channel 11

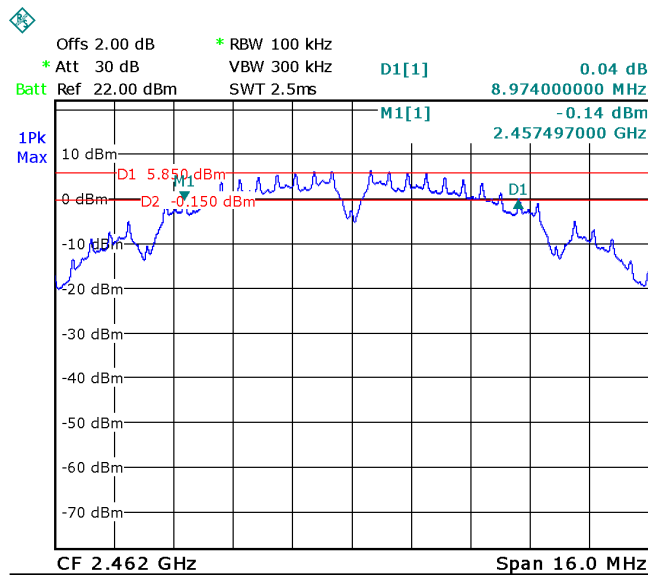


TX 11g channel 1

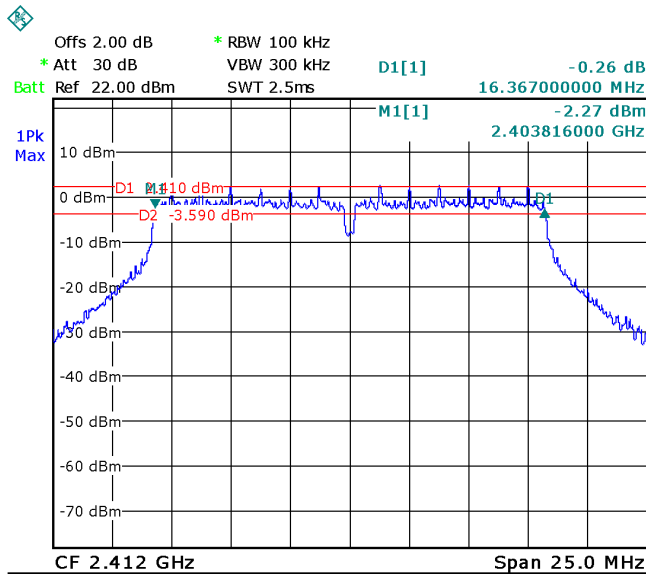


TX 11g channel 6

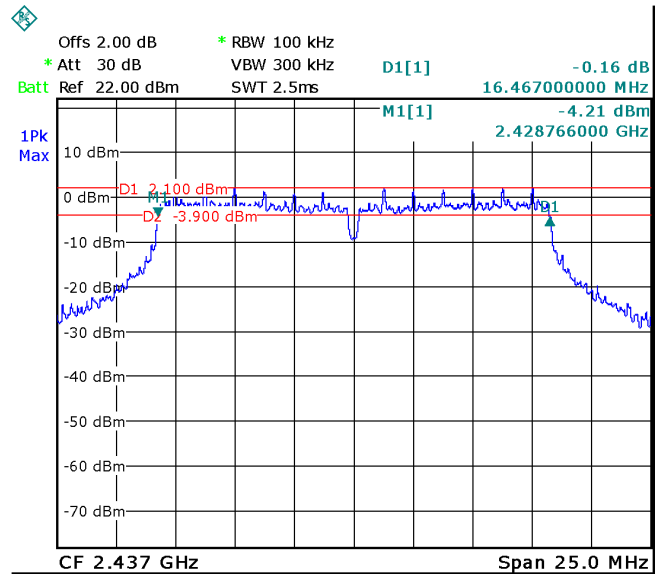


TX 11g channel 11

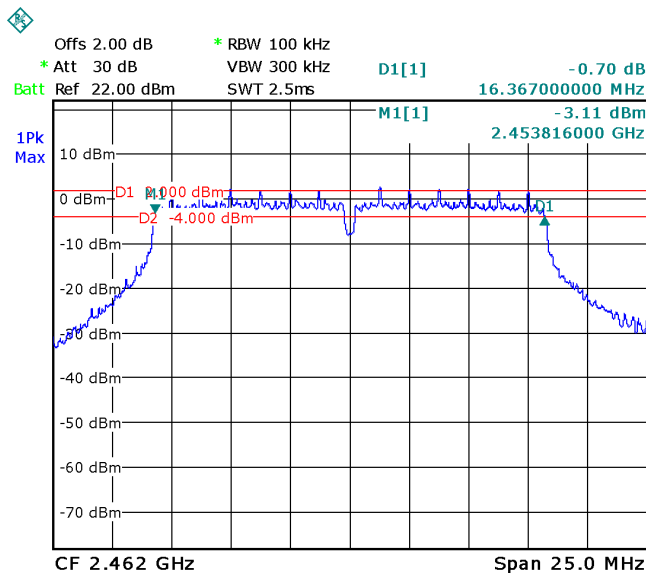


TX 11n HT20 channel 1

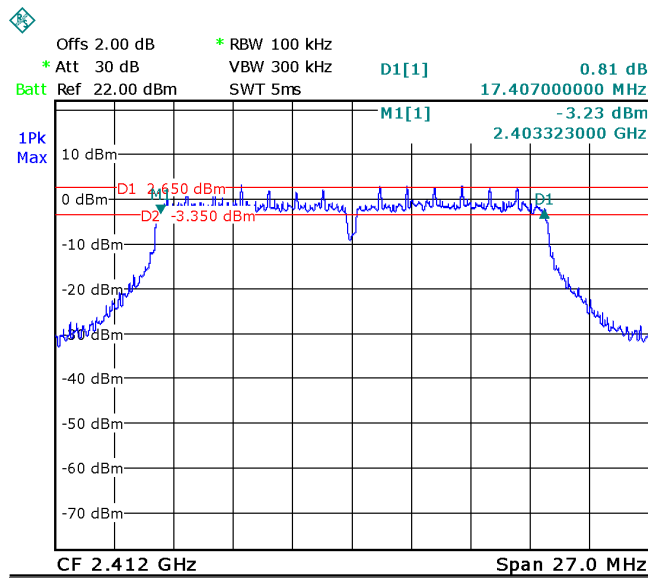


TX 11n HT20 channel 6

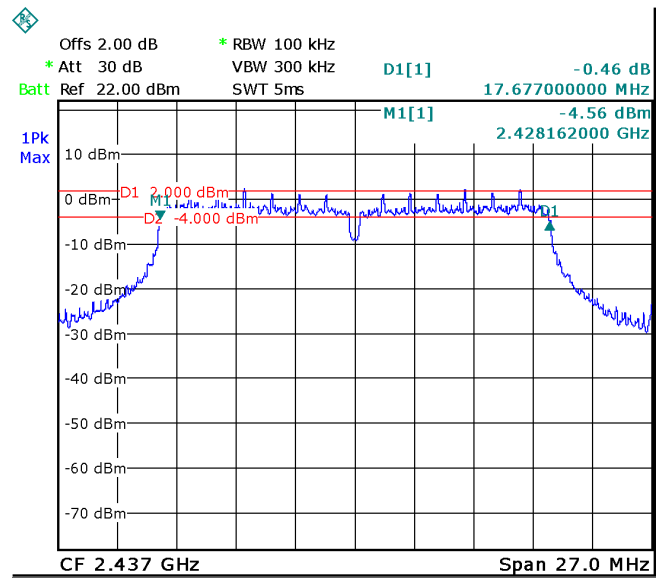


TX 11n HT20 channel 11

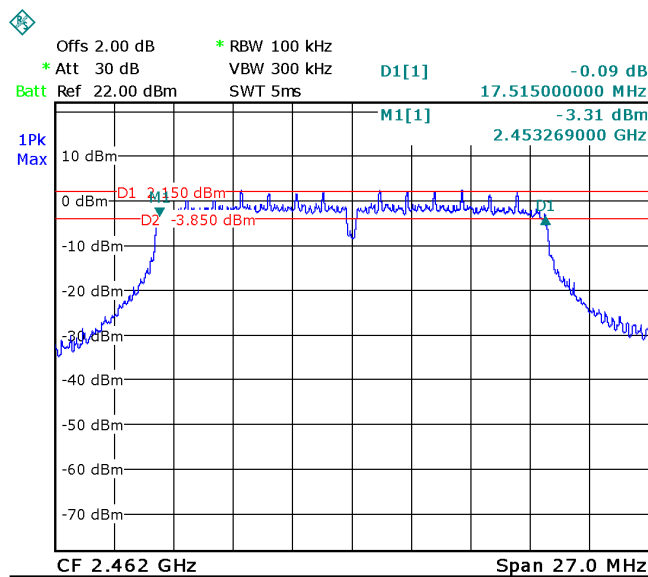


TX 11n HT40 channel 3

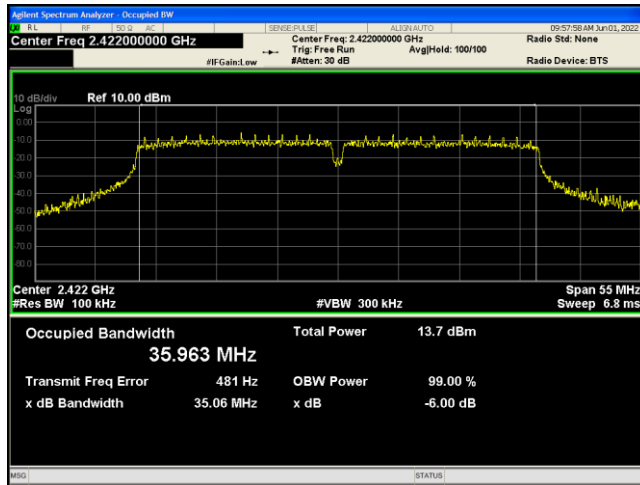

TX 11n HT40 channel 6

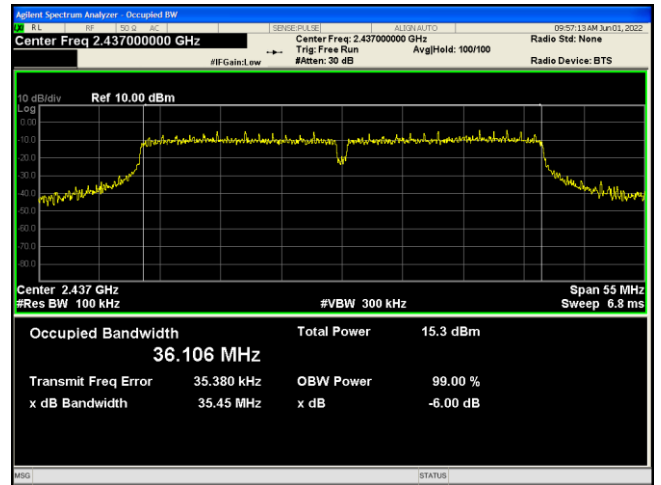

TX 11n HT40 channel 9

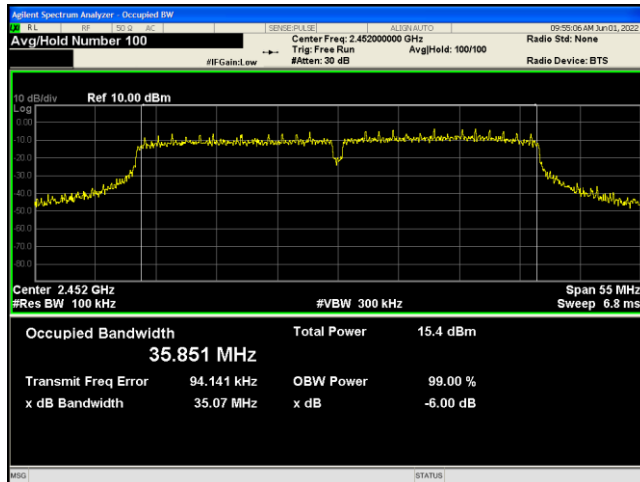

12 Maximum Peak conducted Output Power

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019 §15.247(b)
Test Limit:	The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

12.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW \geq DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.


Subclause 11.9.2 of ANSI C63.10 is applicable.

12.2 Test Result:


Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	15.89	0.26	16.15	1W/30dBm
	Middle-2437	14.25		14.51	1W/30dBm
	High-2462	14.89		15.15	1W/30dBm
TX 11g	Low-2412	15.60	1.17	16.77	1W/30dBm
	Middle-2437	14.42		15.59	1W/30dBm
	High-2462	15.17		16.34	1W/30dBm
TX 11n HT20	Low-2412	15.68	1.17	16.85	1W/30dBm
	Middle-2437	14.66		15.83	1W/30dBm
	High-2462	15.07		16.24	1W/30dBm
TX 11n HT40	Low-2422	12.90	2.06	14.96	1W/30dBm
	Middle-2437	13.56		15.62	1W/30dBm
	High-2452	15.26		17.32	1W/30dBm

Test Plot:


Mode: TX 11b channel 1

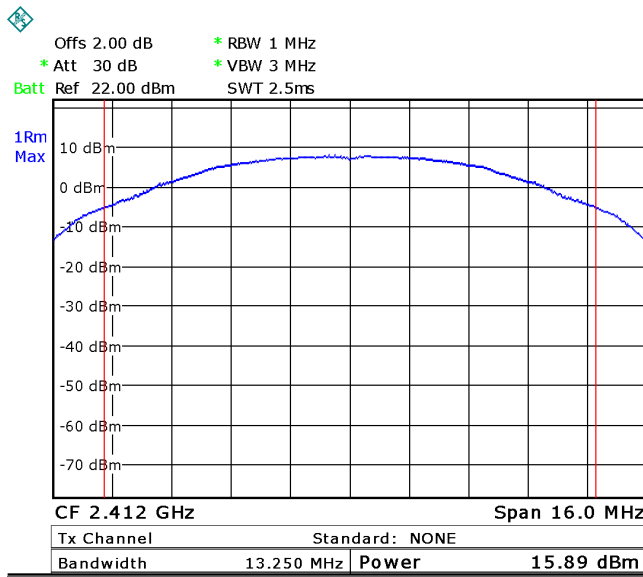


Mode: TX 11b channel 6

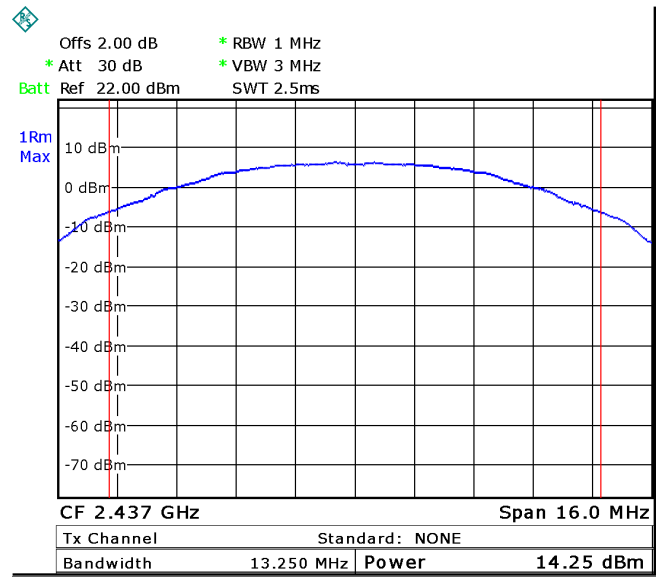


Mode: TX 11b channel 11

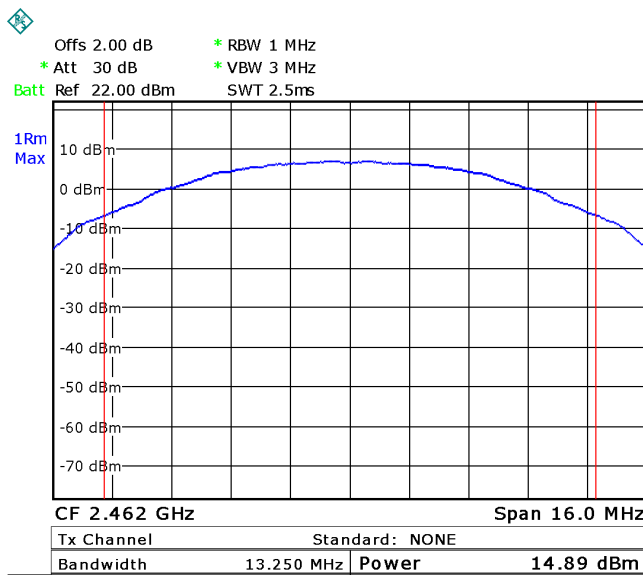


Mode: TX 11g channel 1

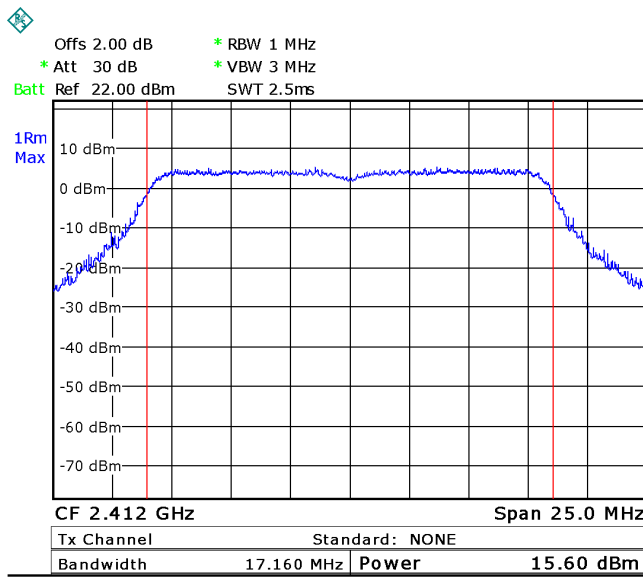


Mode: TX 11g channel 6

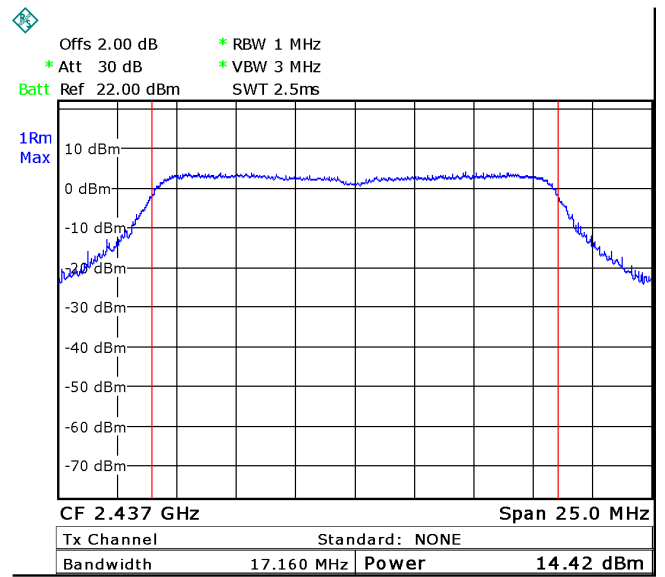


Mode: TX 11g channel 11

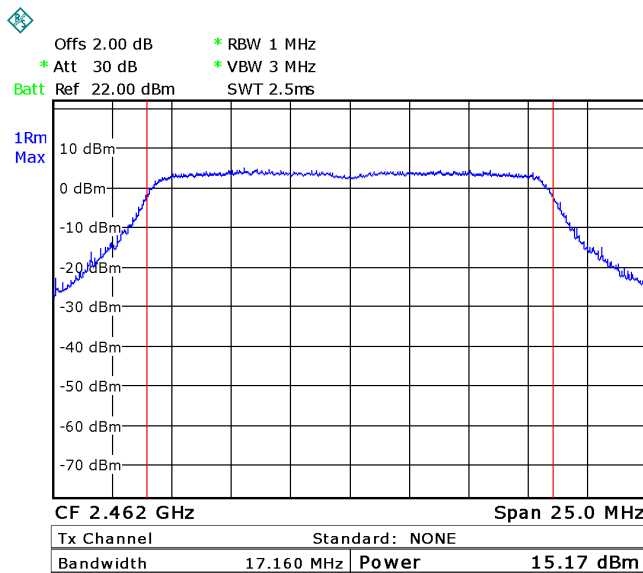


Mode: TX 11n HT20 channel 1

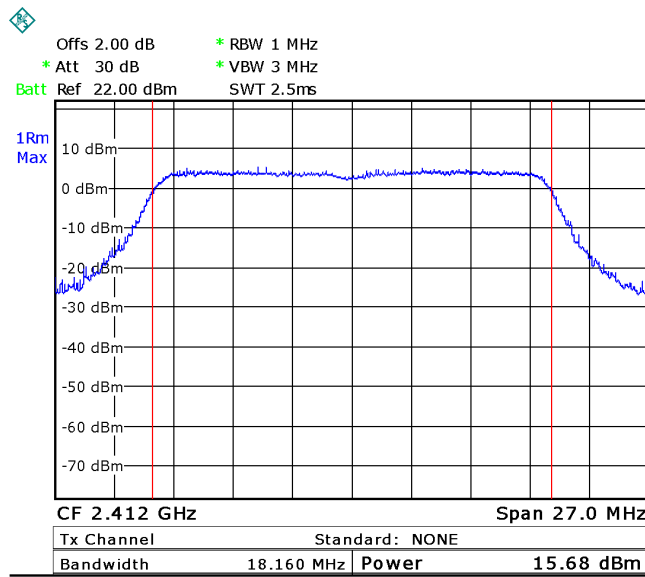


Mode: TX 11n HT20 channel 6

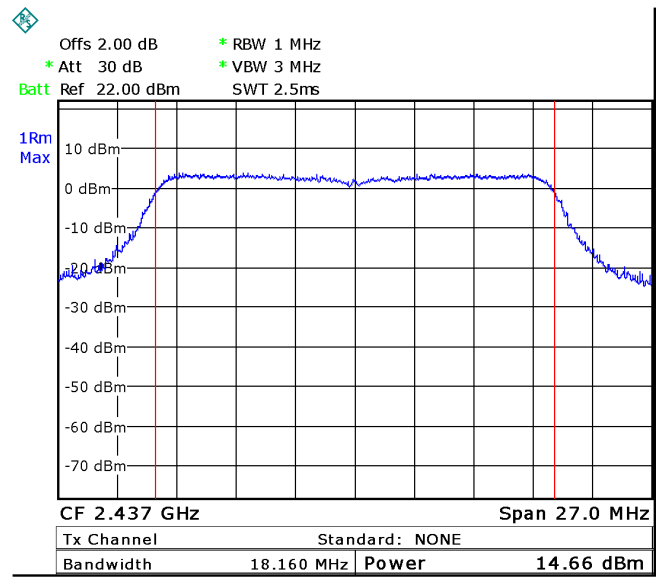


Mode: TX 11n HT20 channel 11

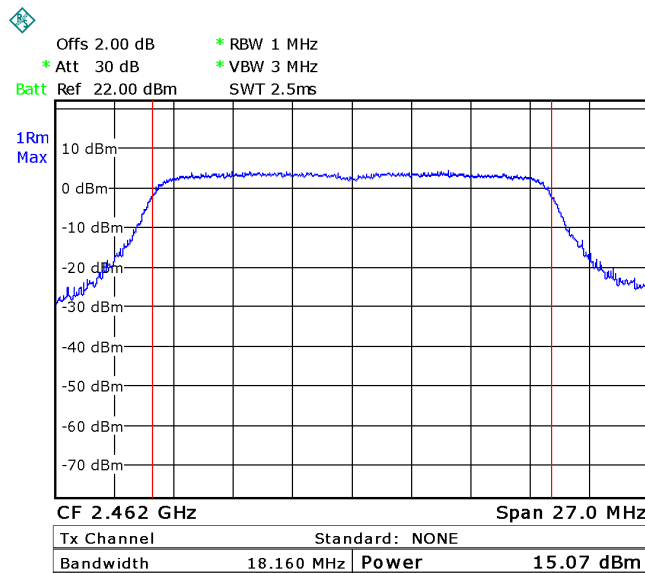


Mode: TX 11n HT40 channel 3

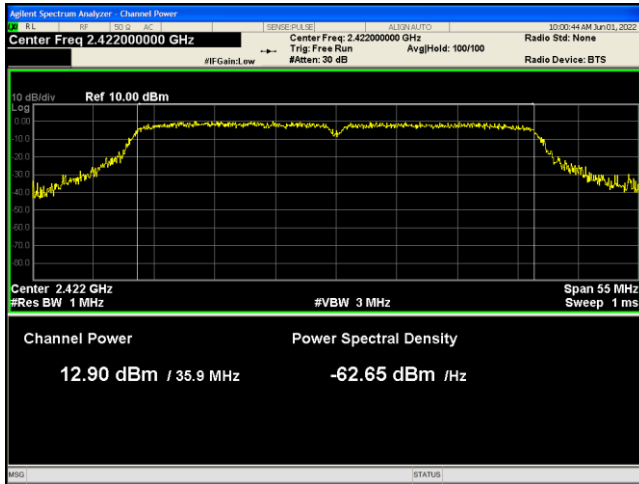

Mode: TX 11n HT40 channel 6

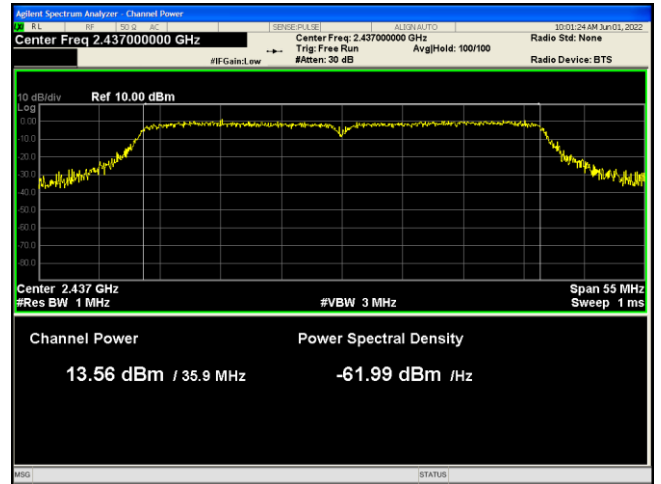

Mode: TX 11n HT40 channel 9

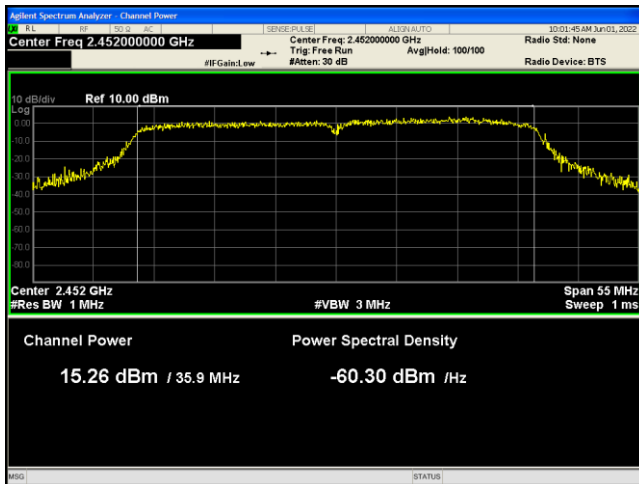

13 Power Spectral density

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019 §15.247(e)
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

13.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD


Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

13.2 Test Result:


Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	-17.27	0.26	-17.01	8dBm per 3kHz
	Middle-2437	-17.48		-17.22	8dBm per 3kHz
	High-2462	-16.11		-15.85	8dBm per 3kHz
TX 11g	Low-2412	-19.92	1.17	-18.75	8dBm per 3kHz
	Middle-2437	-21.62		-20.45	8dBm per 3kHz
	High-2462	-20.75		-19.58	8dBm per 3kHz
TX 11n HT20	Low-2412	-20.29	1.17	-19.12	8dBm per 3kHz
	Middle-2437	-19.92		-18.75	8dBm per 3kHz
	High-2462	-22.36		-21.19	8dBm per 3kHz
TX 11n HT40	Low-2422	-27.40	2.06	-25.34	8dBm per 3kHz
	Middle-2437	-28.58		-26.52	8dBm per 3kHz
	High-2452	-26.58		-24.52	8dBm per 3kHz

Test Plot:


Mode: TX 11b channel 1

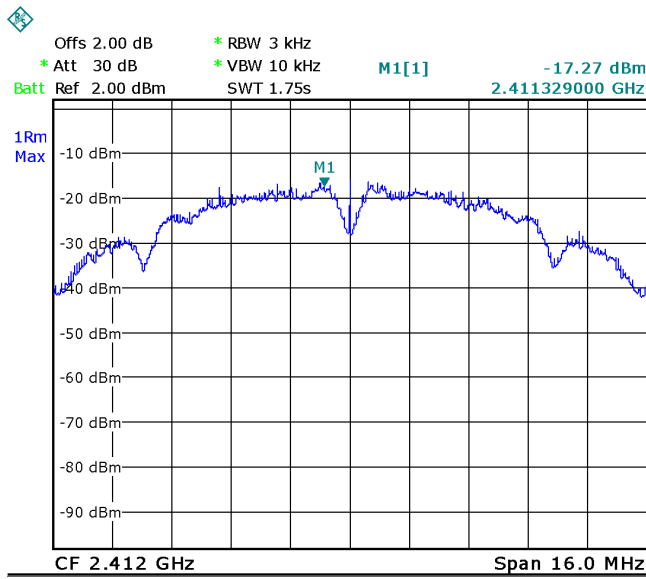


Mode: TX 11b channel 6

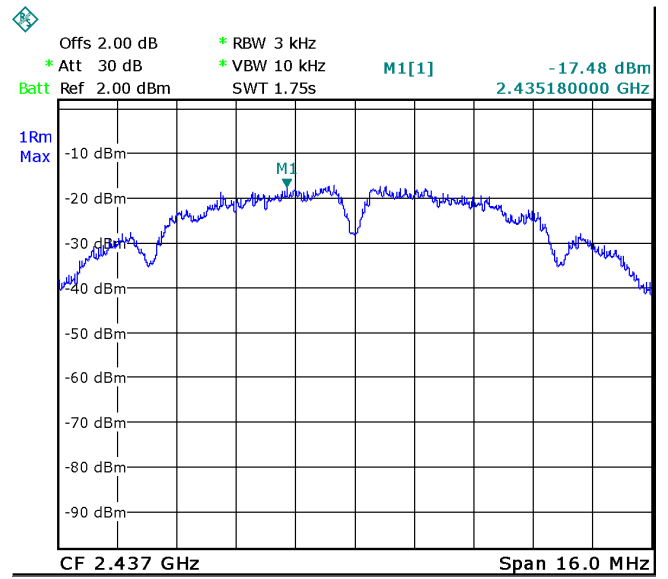


Mode: TX 11b channel 11

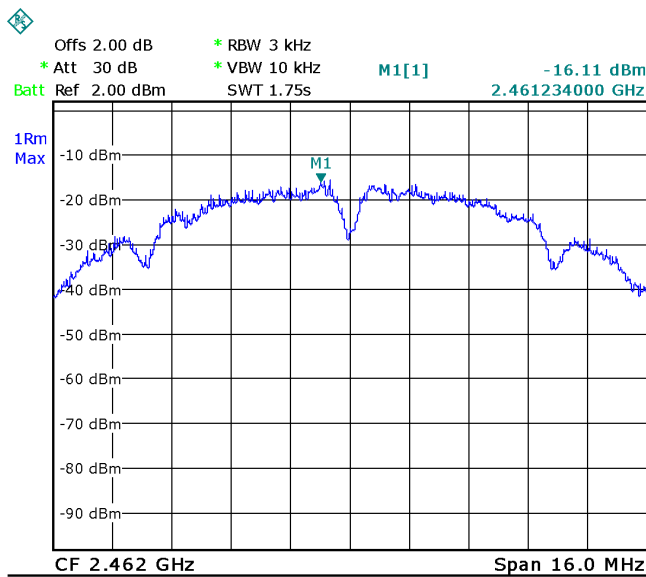


Mode: TX 11g channel 1

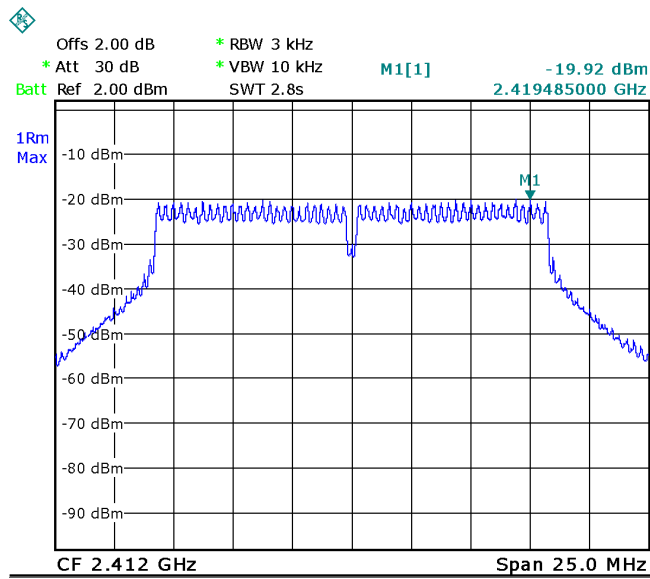


Mode: TX 11g channel 6

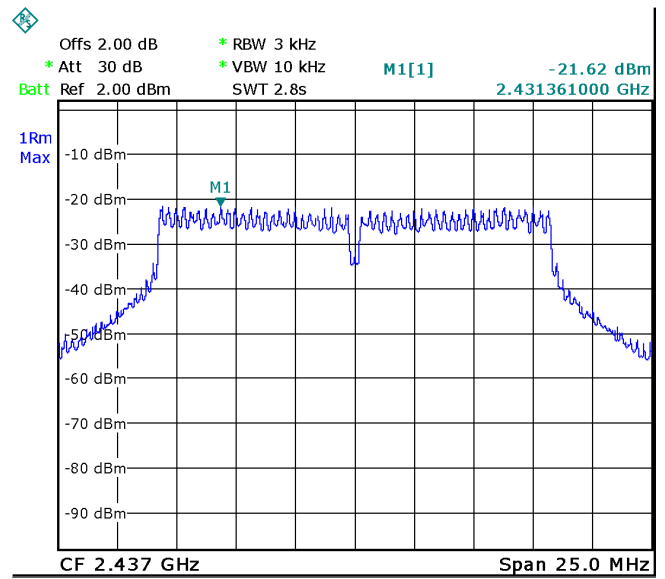


Mode: TX 11g channel 11

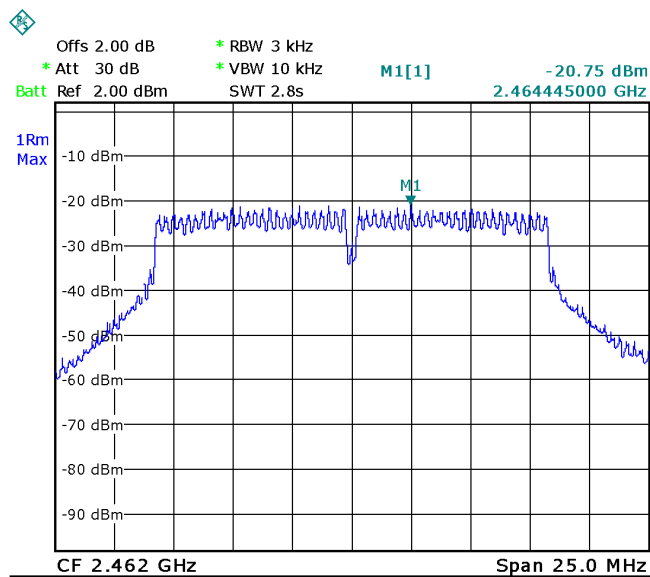


Mode: TX 11n HT20 channel 1

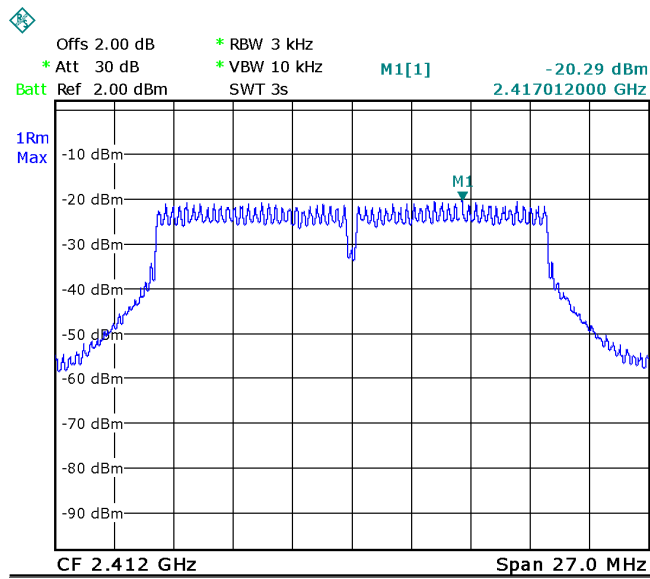


Mode: TX 11n HT20 channel 6

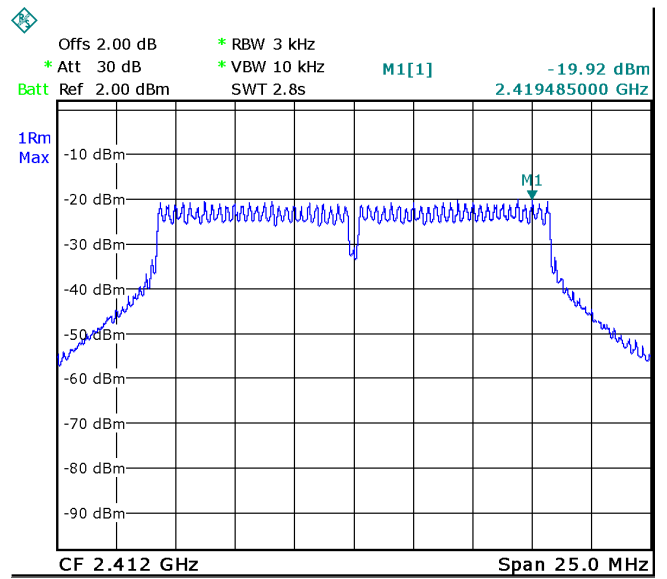


Mode: TX 11n HT20 channel 11

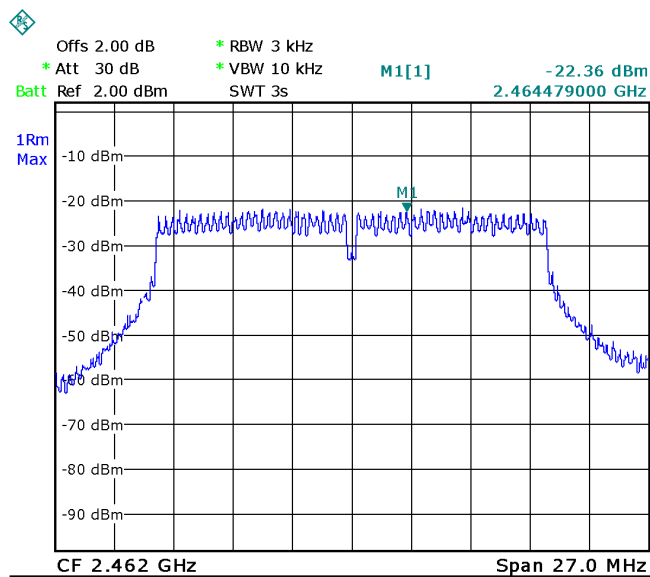


Mode: TX 11n HT40 channel 3

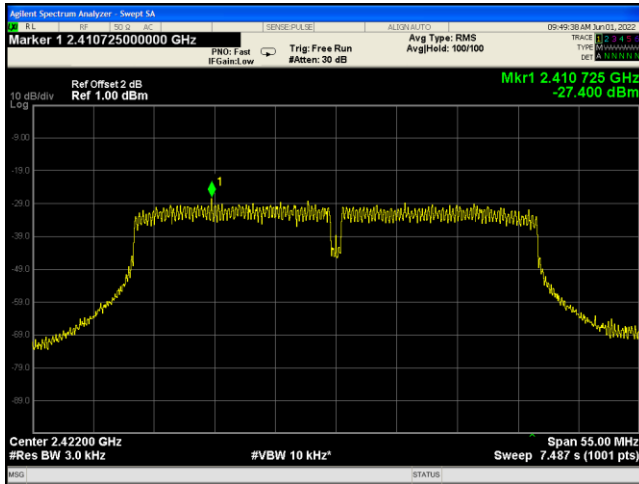

Mode: TX 11n HT40 channel 6

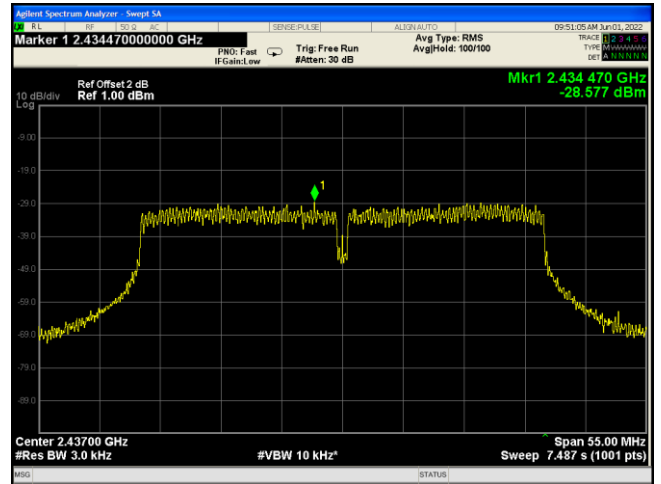

Mode: TX 11n HT40 channel 9

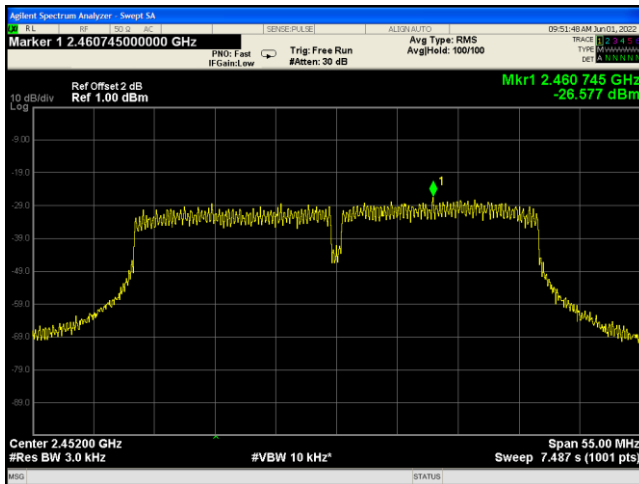

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an external antenna fulfill the requirement of this section.

Note: Please refer to EUT photos for more details.

15 RF Exposure

Note: Please refer to RF Exposure Report: WTF22D04070742W 003

16 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-C300-0200-Photos.

=====**End of Report**=====