

TEST REPORT

Reference No. : WTF22D09183192W003
FCC ID : 2A6J9E120-FCWP
Applicant : Bkav Corporation
Address : 2nd Floor, HH1 Building, Yen Hoa Ward, Cau Giay District, Ha Noi, 100000 Vietnam
Manufacturer : Bkav Corporation
Address : 2nd Floor, HH1 Building, Yen Hoa Ward, Cau Giay District, Ha Noi, 100000 Vietnam
Product : AI Box
Model(s) : E120-FCWP
Standards : 47CFR FCC Part 15.247
Date of Receipt sample : 2022-09-13
Date of Test : 2022-09-13 to 2022-09-23
Date of Issue : 2022-09-24
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:
Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:



Estel Qian / Project Engineer

Approved by:



Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 REVISION HISTORY.....	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.....	5
4.2 DETAILS OF E.U.T.....	5
4.3 CHANNEL LIST	5
4.4 TEST FACILITY	6
4.5 SUBCONTRACTED	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
4.7 TEST MODE	7
5 TEST SUMMARY.....	8
6 EQUIPMENT USED DURING TEST.....	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS	10
6.3 MEASUREMENT UNCERTAINTY.....	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 DUTY CYCLE.....	11
8 CONDUCTED EMISSION.....	13
8.1 E.U.T. OPERATION	13
8.2 EUT SETUP.....	13
8.3 MEASUREMENT DESCRIPTION.....	13
8.4 CONDUCTED EMISSION TEST RESULT	14
9 RADIATED EMISSIONS.....	16
9.1 EUT OPERATION	16
9.2 TEST SETUP	17
9.3 SPECTRUM ANALYZER SETUP.....	18
9.4 TEST PROCEDURE	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
9.6 SUMMARY OF TEST RESULTS	20
10 CONDUCTED SPURIOUS EMISSIONS.....	23
10.1 TEST PROCEDURE	23
10.2 TEST RESULT	24
11 BAND EDGE MEASUREMENT.....	40
11.1 TEST PRODUCE	40
11.2 TEST RESULT	41
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	43
12.1 TEST PROCEDURE:	43
12.2 TEST RESULT:	43
13 MAXIMUM PEAK CONDUCTED OUTPUT POWER	50
13.1 TEST PROCEDURE:	50
13.2 TEST RESULT:	50
14 POWER SPECTRAL DENSITY	60

14.1	TEST PROCEDURE:	60
14.2	TEST RESULT:	60
15	ANTENNA REQUIREMENT	70
16	RF EXPOSURE	70
17	PHOTOGRAPHS OF TEST SETUP AND EUT	70

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF22D09183192W003	2022-09-13	2022-09-13 to 2022-09-23	2022-09-24	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	AI Box
Model(s):	E120-FCWP
Model Description:	N/A
Bluetooth Version:	Bluetooth v5.0 with BLE
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac (HT20/40/80)
Hardware Version:	V2.0.1
Software Version:	1.0.0.5

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n (HT20), 2412-2462MHz 11CH 802.11n (HT40), 2422-2452MHz 7CH
Max. RF output power:	Ant. 1 15.48dBm, Ant.2 15.24dBm, Total: 17.77dBm Max.
Type of Modulation:	802.11b: DBPSK, DQPSK, CCK 802.11g: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna installation:	External antenna with RP-SMA connector
Antenna Gain:	Max. Peak 2.2dBi
Ratings:	DC12V 1A/PoE
Adapter:	Manufacturer: XING YUAN ELECTRONICS CO., LTD Model No.: XY12J-1201000Q-UW Input: 100-240VAC, 0.5A Max. 50/60Hz Output: 12V --- 1.0A

4.3 Channel List

Wi-Fi

Channel No.	Frequency (MHz)						
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2022-08-01	2023-07-31
2.	LISN	R&S	ENV216	100115	2022-08-01	2023-07-31
3.	Cable	Top	TYPE16(3.5M)	-	2022-08-01	2023-07-31
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2022-04-28	2023-04-27
2	Amplifier	Agilent	8447D	2944A10178	2022-08-01	2023-07-31
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2022-08-07	2023-08-06
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2022-04-28	2023-04-27
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2022-04-28	2023-04-27
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2022-07-29	2023-07-28
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2022-04-28	2023-04-27
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2022-08-01	2023-07-31
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2022-04-28	2023-04-27
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-10-31	2022-10-30
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2022-05-02	2023-05-01
4	Amplifier	ANRITSU	MH648A	M43381	2022-04-28	2023-04-27
5	Cable	HUBER+SUHNER	CBL2	525178	2022-04-28	2023-04-27
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSP40	100501	2022-08-01	2023-07-31
2.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2022-04-28	2023-04-27

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64\text{dB}$ (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08\text{dB}$ (Bilog antenna 30M~1000MHz) $\pm 5.47 \text{ dB}$ (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}\text{Hz}$
RF Power	$\pm 0.42 \text{ dB}$
RF Power Density	$\pm 0.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.76 \text{ dB}$ (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Duty Cycle

ANT 1:


Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	12.400	12.520	0.99	99.04	0.04	-0.08
802.11g	2.070	2.110	0.98	98.10	0.08	-0.17
802.11n-HT20	1.920	1.970	0.97	97.46	0.11	-0.22
802.11n-HT40	0.910	1.000	0.91	91.00	0.41	-0.82

Remark:


Duty cycle=On Time/period;

Duty cycle factor= $10 \log (1/\text{Duty cycle})$;


Average factor= $20 \log_{10} \text{Duty cycle}$

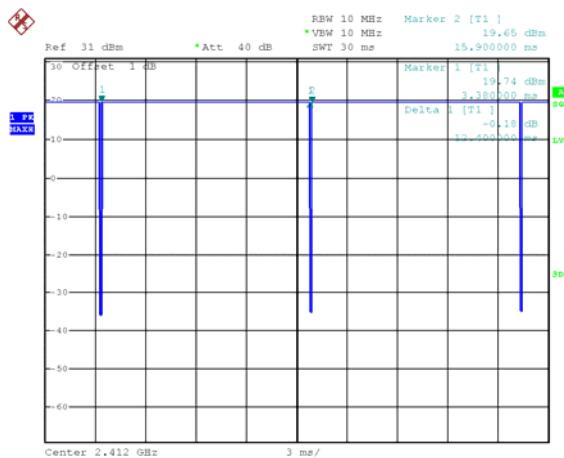ANT 1:**Wi-Fi 802.11b**


Date: 20.SEP.2022 11:43:49

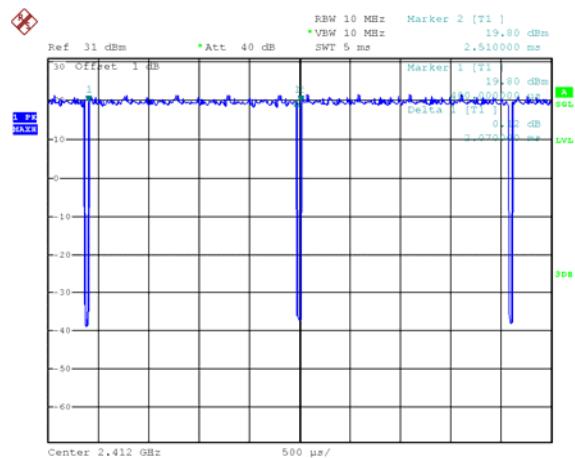Wi-Fi 802.11g

Date: 20.SEP.2022 11:41:47

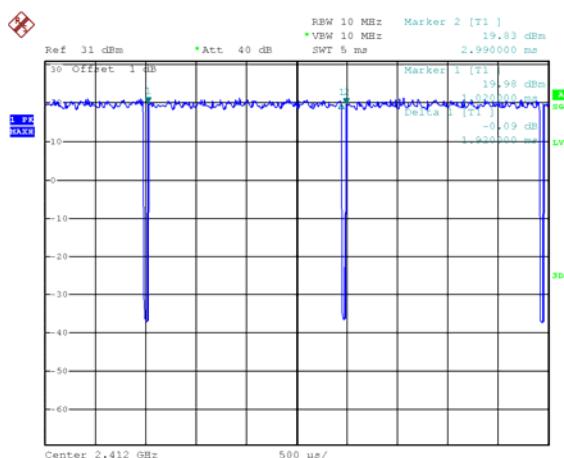Wi-Fi 802.11n-HT20

Date: 20.SEP.2022 11:39:49

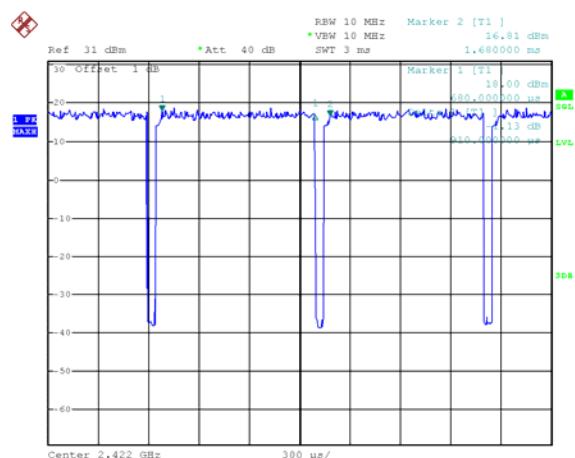Wi-Fi 802.11n-HT40

Date: 20.SEP.2022 11:37:41

8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C

Humidity: 54.7 % RH


Atmospheric Pressure: 101.6kPa

Test Voltage: AC 120V, 60Hz

EUT Operation: Please refer to 4.7.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

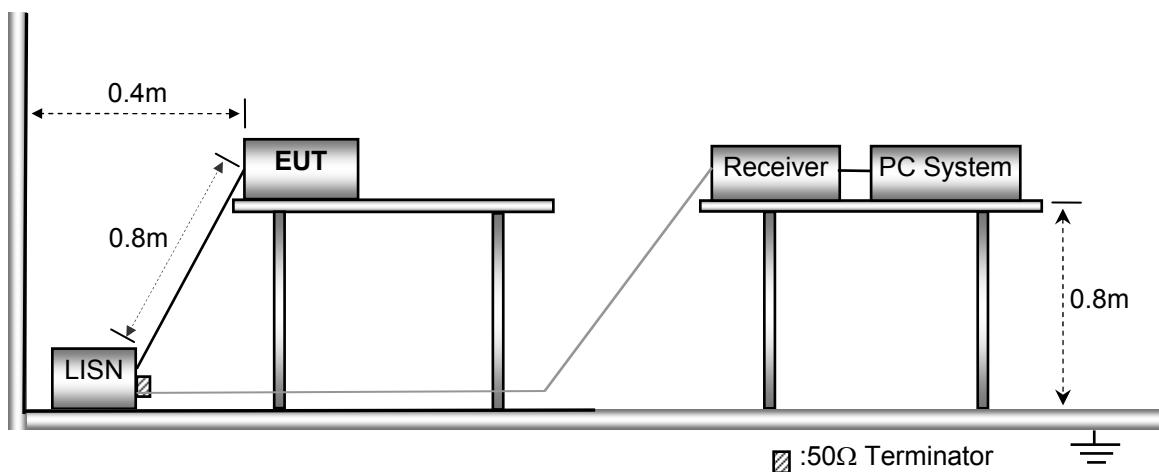


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: only the worst data (Ant. 1+ Ant. 2 TX 11b mode High channel mode) were reported

Live line:

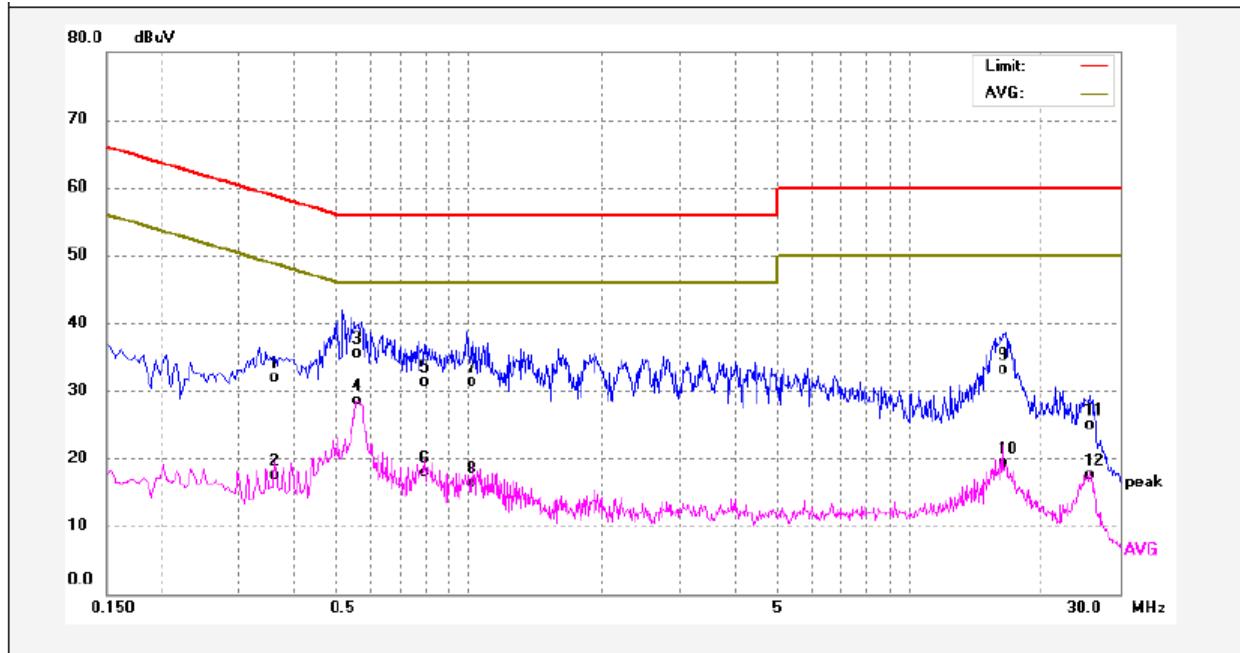

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3620	21.73	10.25	31.98	58.68	-26.70	QP	
2	0.3620	7.28	10.25	17.53	48.68	-31.15	AVG	
3	0.5580	25.21	10.28	35.49	56.00	-20.51	QP	
4	0.5580	18.22	10.28	28.50	46.00	-17.50	AVG	
5	0.7940	21.05	10.35	31.40	56.00	-24.60	QP	
6	0.7940	7.47	10.35	17.82	46.00	-28.18	AVG	
7	1.0140	20.91	10.35	31.26	56.00	-24.74	QP	
8	1.0140	6.02	10.35	16.37	46.00	-29.63	AVG	
9	16.2859	22.62	10.50	33.12	60.00	-26.88	QP	
10	16.2859	8.82	10.50	19.32	50.00	-30.68	AVG	
11	25.6580	14.47	10.47	24.94	60.00	-35.06	QP	
12	25.6580	7.10	10.47	17.57	50.00	-32.43	AVG	

Neutral line:

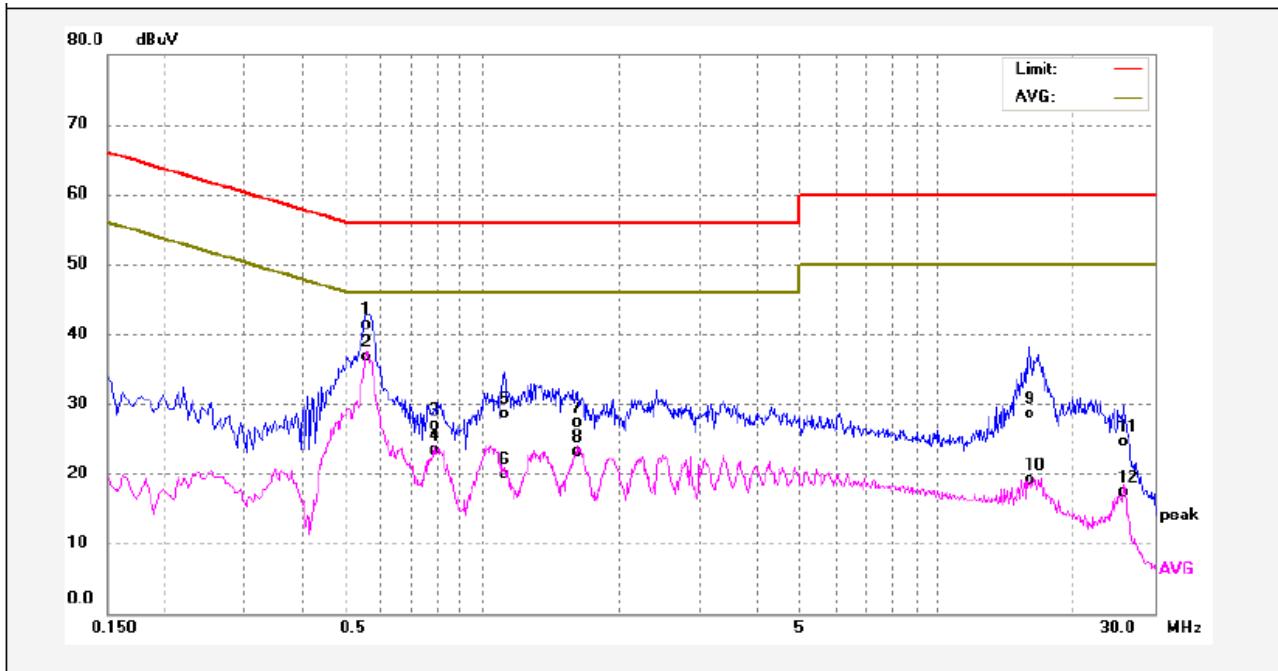

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5580	31.01	10.28	41.29	56.00	-14.71	QP	
2	0.5580	26.36	10.28	36.64	46.00	-9.36	AVG	
3	0.7860	16.64	10.35	26.99	56.00	-29.01	QP	
4	0.7860	13.02	10.35	23.37	46.00	-22.63	AVG	
5	1.1220	18.24	10.35	28.59	56.00	-27.41	QP	
6	1.1220	9.63	10.35	19.98	46.00	-26.02	AVG	
7	1.6260	17.03	10.36	27.39	56.00	-28.61	QP	
8	1.6260	12.78	10.36	23.14	46.00	-22.86	AVG	
9	15.8140	17.94	10.52	28.46	60.00	-31.54	QP	
10	15.8140	8.68	10.52	19.20	50.00	-30.80	AVG	
11	25.6580	14.00	10.47	24.47	60.00	-35.53	QP	
12	25.6580	6.75	10.47	17.22	50.00	-32.78	AVG	

9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247
 Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
 ANSI C63.10:2013
 Test Result: PASS
 Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C
 Humidity: 52.1 % RH
 Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in TX transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

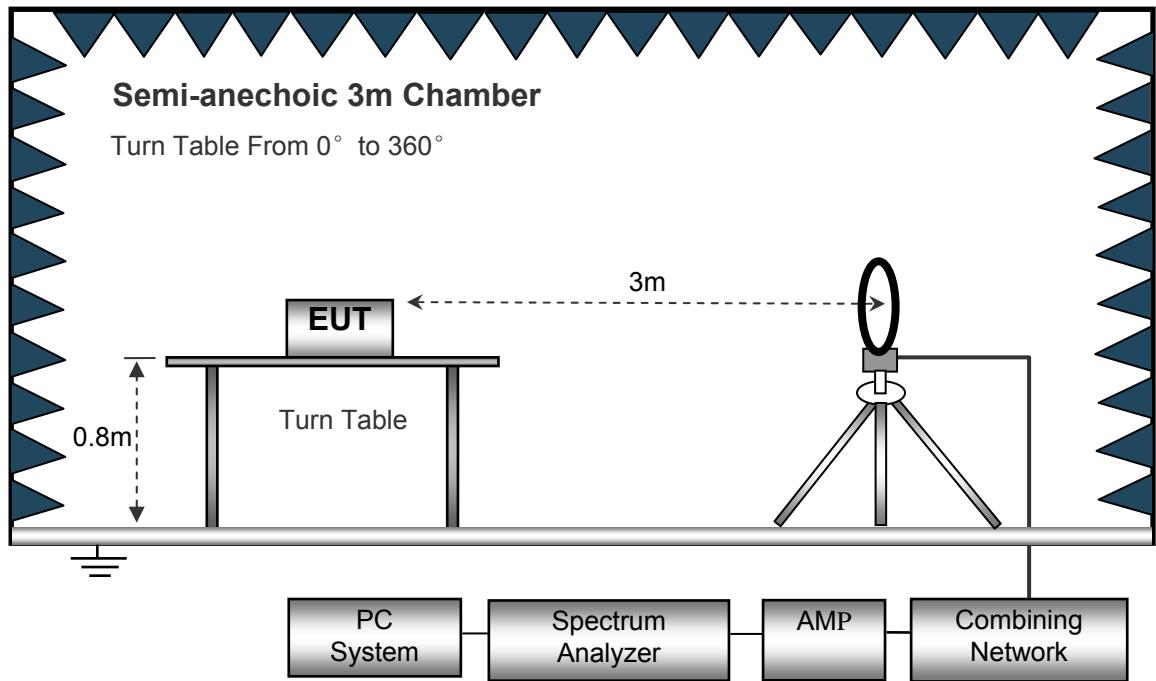

The test setup for emission measurement from 30 MHz to 1 GHz.

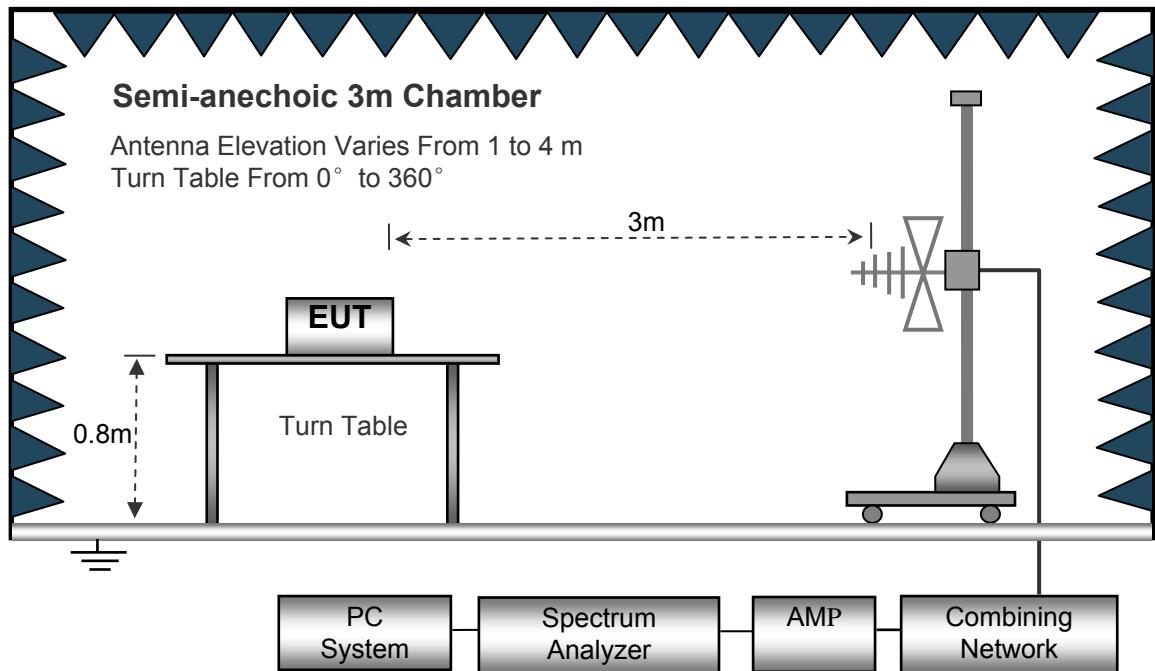

The test setup for emission measurement above 1 GHz.

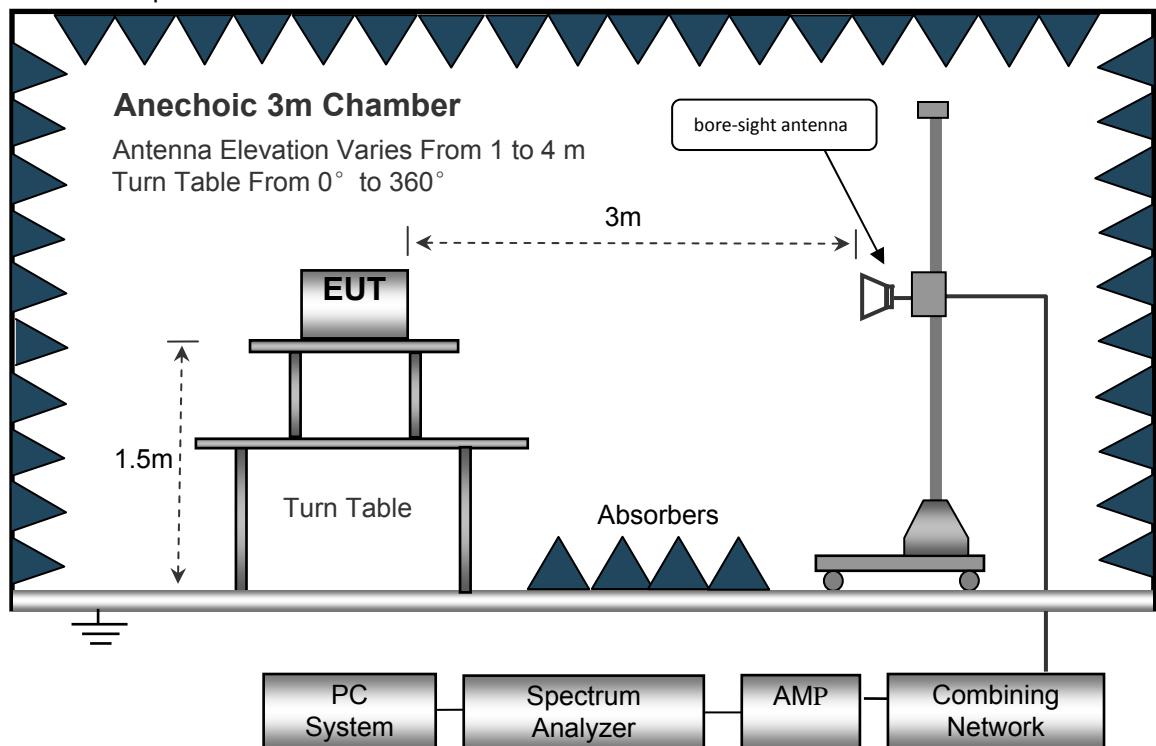

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed	Auto
IF Bandwidth.....	10kHz
Video Bandwidth.....	10kHz
Resolution Bandwidth.....	10kHz

30MHz ~ 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth.....	100kHz
Video Bandwidth.....	300kHz

Above 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth.....	1MHz
Video Bandwidth.....	3MHz
Detector	Ave.
Resolution Bandwidth.....	1MHz
Video Bandwidth.....	10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Mode: TX (Ant. 1+ Ant. 2)

Note:

Only the worst-case 11b mode were record in the report.

Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				Height (m)	Polar				
11b: Low Channel 2412MHz									
275.61	42.19	QP	278	1.6	H	-12.36	29.83	46.00	-16.17
275.61	44.37	QP	3	2.0	V	-12.36	32.01	46.00	-13.99
4824.00	56.05	PK	193	1.3	V	-1.06	54.99	74.00	-19.01
4824.00	41.72	Ave	193	1.3	V	-1.06	40.66	54.00	-13.34
7236.00	49.38	PK	195	1.8	H	1.33	50.71	74.00	-23.29
7236.00	36.93	Ave	195	1.8	H	1.33	38.26	54.00	-15.74
2340.19	46.22	PK	275	1.4	V	-13.19	33.03	74.00	-40.97
2340.19	37.38	Ave	275	1.4	V	-13.19	24.19	54.00	-29.81
2368.14	43.66	PK	217	1.3	H	-13.14	30.52	74.00	-43.48
2368.14	38.61	Ave	217	1.3	H	-13.14	25.47	54.00	-28.53
2490.23	45.74	PK	171	1.0	V	-13.08	32.66	74.00	-41.34
2490.23	37.26	Ave	171	1.0	V	-13.08	24.18	54.00	-29.82

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				Height	Polar				
11b: Middle Channel 2437MHz									
275.61	40.92	QP	153	1.5	H	-12.36	28.56	46.00	-17.44
275.61	43.70	QP	304	1.8	V	-12.36	31.34	46.00	-14.66
4874.00	55.66	PK	68	1.5	V	-0.62	55.04	74.00	-18.96
4874.00	42.54	Ave	68	1.5	V	-0.62	41.92	54.00	-12.08
7311.00	49.65	PK	136	1.5	H	2.21	51.86	74.00	-22.14
7311.00	37.04	Ave	136	1.5	H	2.21	39.25	54.00	-14.75
2338.72	46.24	PK	240	1.2	V	-13.19	33.05	74.00	-40.95
2338.72	39.72	Ave	240	1.2	V	-13.19	26.53	54.00	-27.47
2385.16	43.75	PK	147	1.7	H	-13.14	30.61	74.00	-43.39
2385.16	36.54	Ave	147	1.7	H	-13.14	23.40	54.00	-30.60
2490.98	42.70	PK	212	1.6	V	-13.08	29.62	74.00	-44.38
2490.98	36.74	Ave	212	1.6	V	-13.08	23.66	54.00	-30.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degre e	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
275.61	41.60	QP	346	1.2	H	-12.36	29.24	46.00	-16.76
275.61	42.88	QP	133	1.4	V	-12.36	30.52	46.00	-15.48
4924.00	55.70	PK	138	1.2	V	-0.24	55.46	74.00	-18.54
4924.00	43.16	Ave	138	1.2	V	-0.24	42.92	54.00	-11.08
7386.00	48.30	PK	55	1.2	H	2.84	51.14	74.00	-22.86
7386.00	38.07	Ave	55	1.2	H	2.84	40.91	54.00	-13.09
2347.04	45.82	PK	293	1.5	V	-13.19	32.63	74.00	-41.37
2347.04	39.25	Ave	293	1.5	V	-13.19	26.06	54.00	-27.94
2375.32	42.26	PK	80	1.9	H	-13.14	29.12	74.00	-44.88
2375.32	36.53	Ave	80	1.9	H	-13.14	23.39	54.00	-30.61
2498.50	44.71	PK	205	1.3	V	-13.08	31.63	74.00	-42.37
2498.50	37.06	Ave	205	1.3	V	-13.08	23.98	54.00	-30.02

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to _ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ [3 × RBW].
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result


ANT 1

9KHz – 30MHz

Mode: TX 11b channel 1

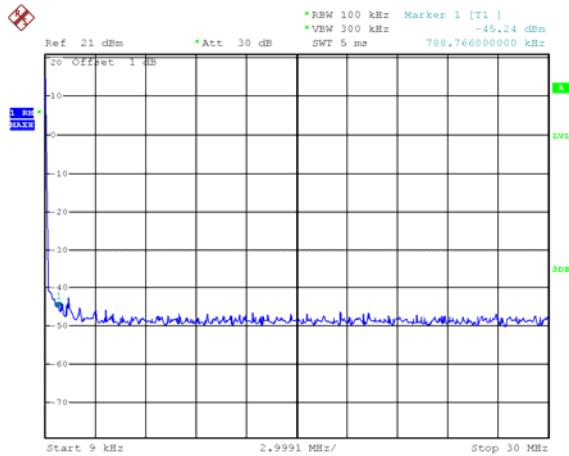


Mode: TX 11b channel 6

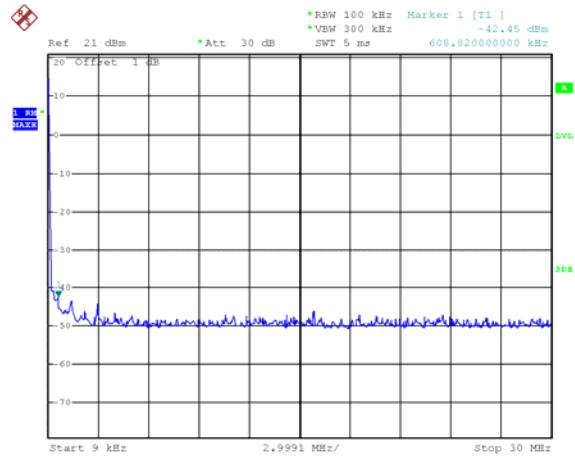

Date: 20.SEP.2022 14:49:25


Date: 20.SEP.2022 14:50:57

Mode: TX 11b channel 11

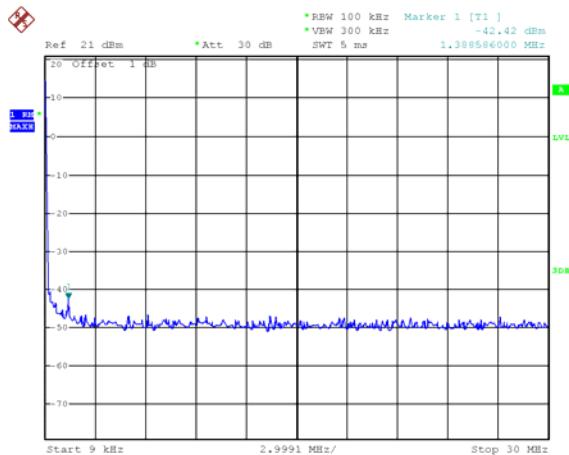


Date: 20.SEP.2022 14:58:19

Mode: TX 11g channel 1

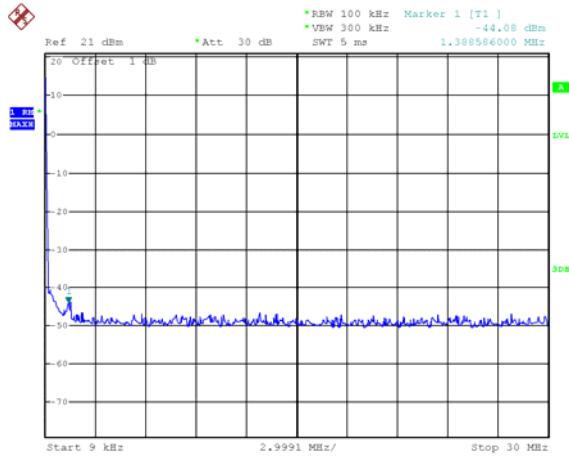


Mode: TX 11g channel 6

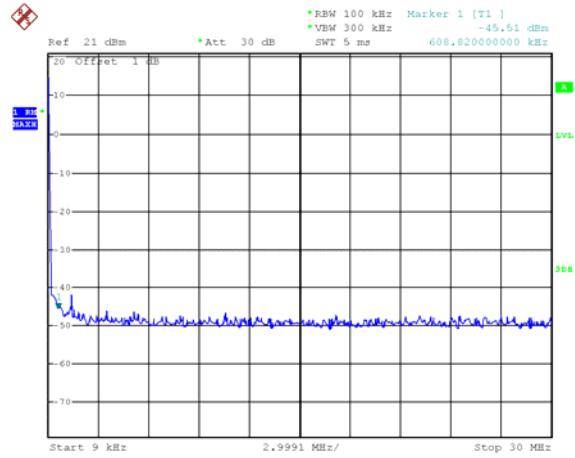

Date: 20.SEP.2022 14:54:08


Date: 20.SEP.2022 14:56:22

Mode: TX 11g channel 11

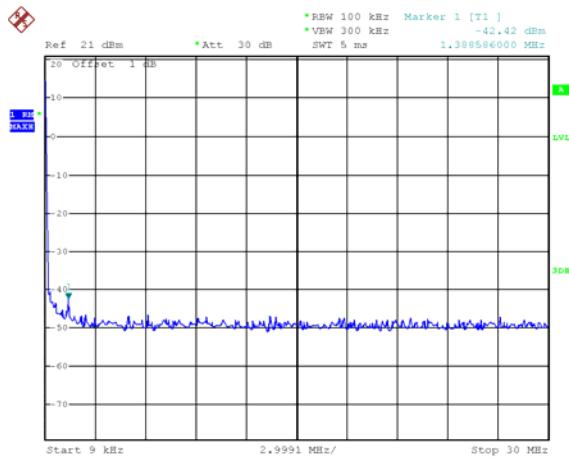


Date: 20.SEP.2022 14:58:19

Mode: TX 11n HT20 channel 1

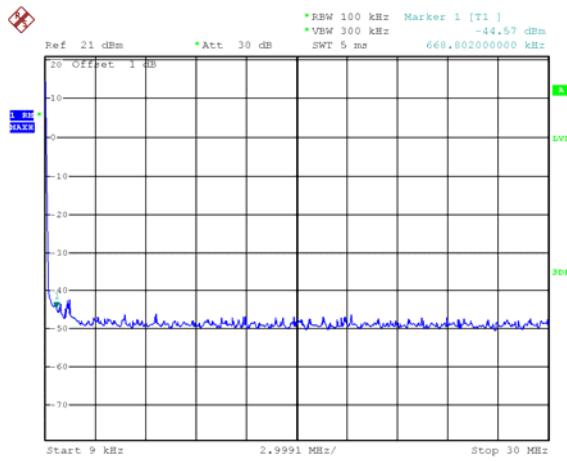


Date: 20.SEP.2022 15:00:19

Mode: TX 11 n HT20 channel 6

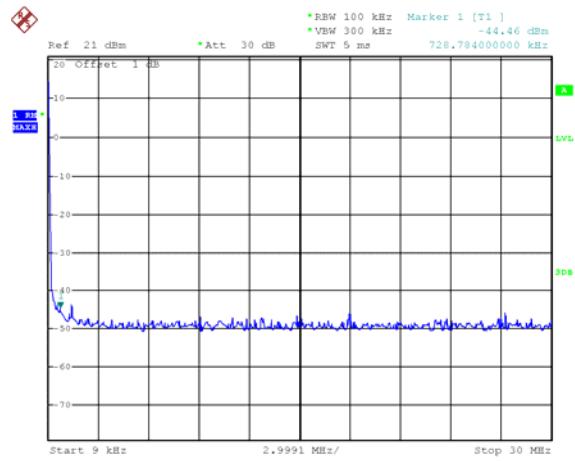


Date: 20.SEP.2022 15:03:20

Mode: TX 11 n HT20 channel 11

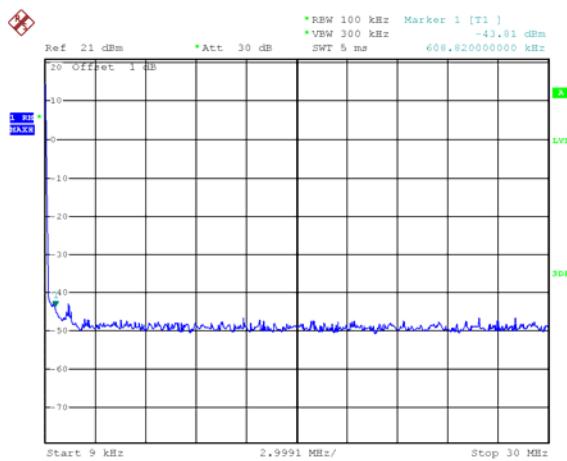


Date: 20.SEP.2022 15:05:08

Mode: TX 11n HT40 channel 3

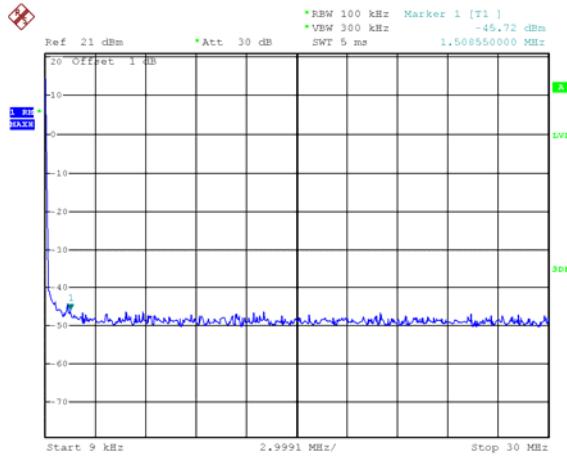


Date: 20.SEP.2022 15:08:11

Mode: TX 11 n HT40 channel 6

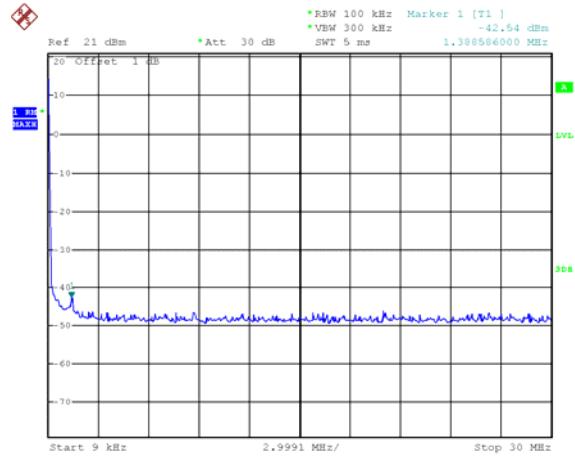

Date: 20.SEP.2022 15:09:45

Mode: TX 11 n HT40 channel 9

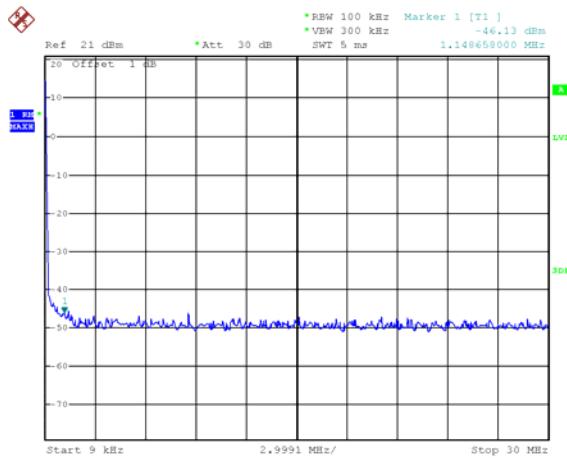


Date: 20.SEP.2022 15:10:28

Above 30MHz


Mode: TX 11b channel 1

Fundamental

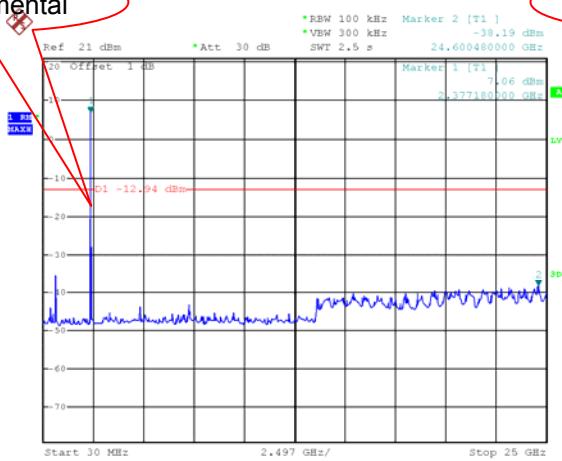

Mode: TX 11b channel 6

Fundamental

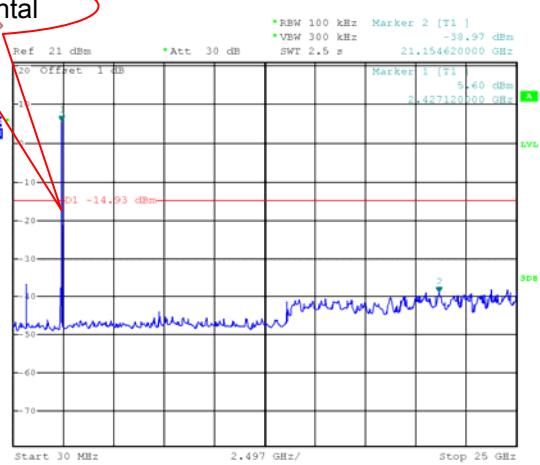


Date: 20.SEP.2022 14:50:09

Date: 20.SEP.2022 14:51:37


Mode: TX 11b channel 11

Fundamental

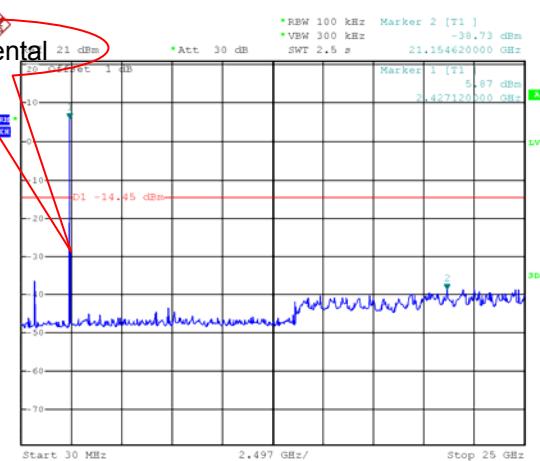


Date: 20.SEP.2022 14:53:16

Mode: TX 11g channel 1

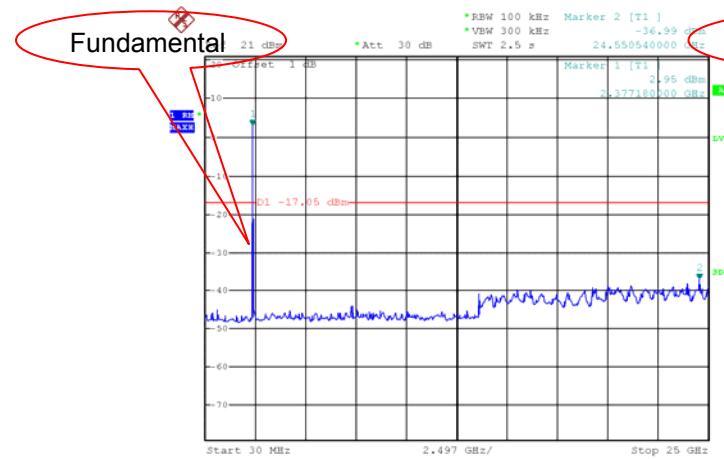


Mode: TX 11g channel 6

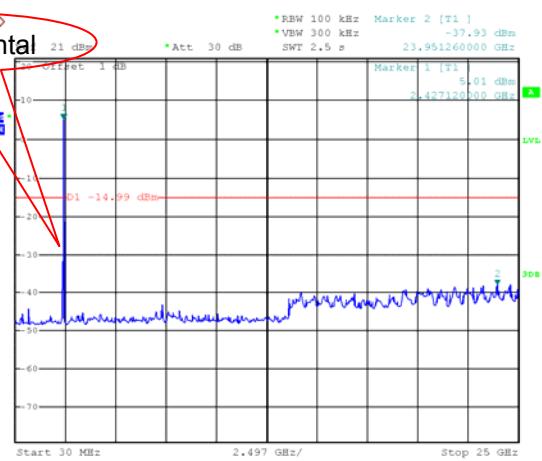

Date: 20.SEP.2022 14:55:32


Date: 20.SEP.2022 14:57:31

Mode: TX 11g channel 11

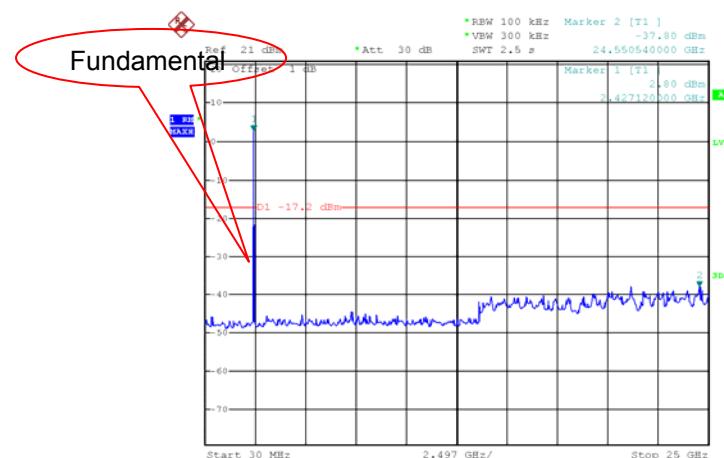


Date: 20.SEP.2022 14:58:59

Mode: TX 11n HT20 channel 1

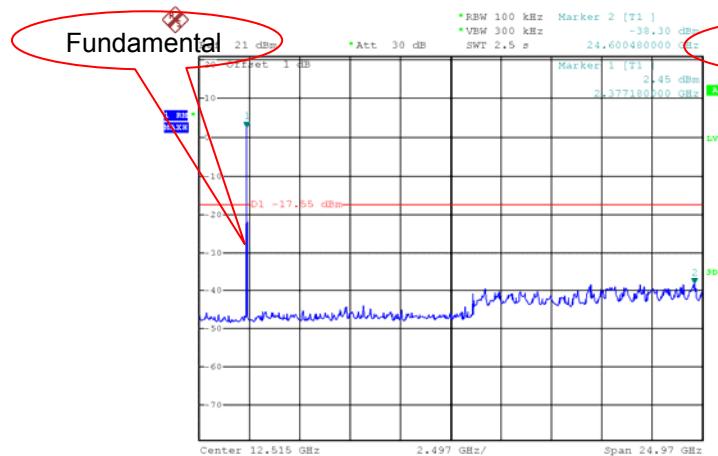


Mode: TX 11 n HT20 channel 6

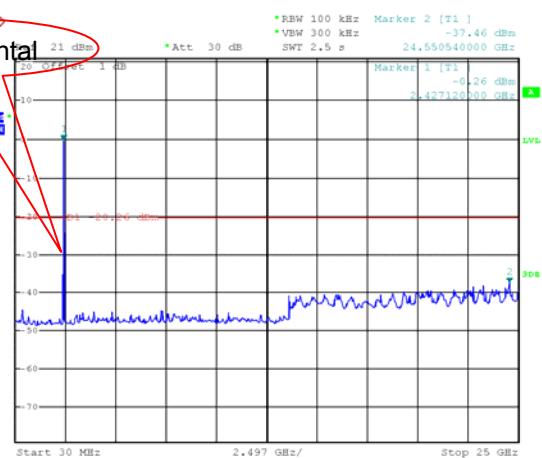

Date: 20.SEP.2022 15:01:38


Date: 20.SEP.2022 15:04:09

Mode: TX 11 n HT20 channel 11

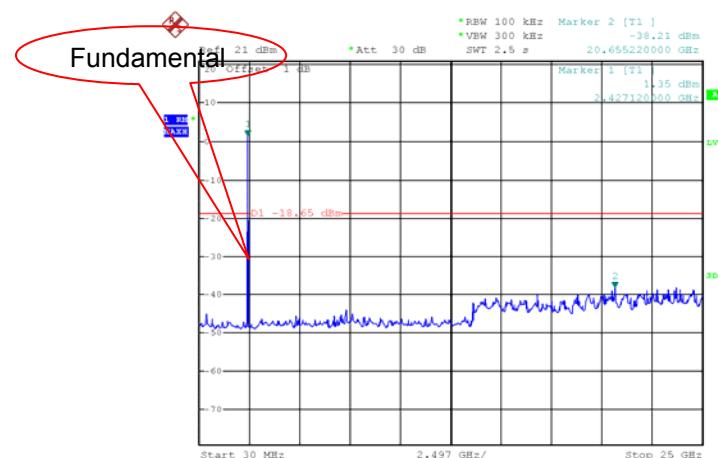


Date: 20.SEP.2022 15:06:44

Mode: TX 11n HT40 channel 3

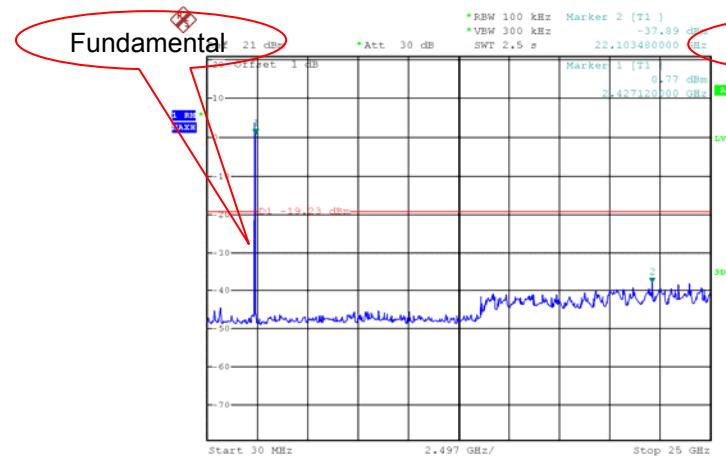

Mode: TX 11 n HT40 channel 6

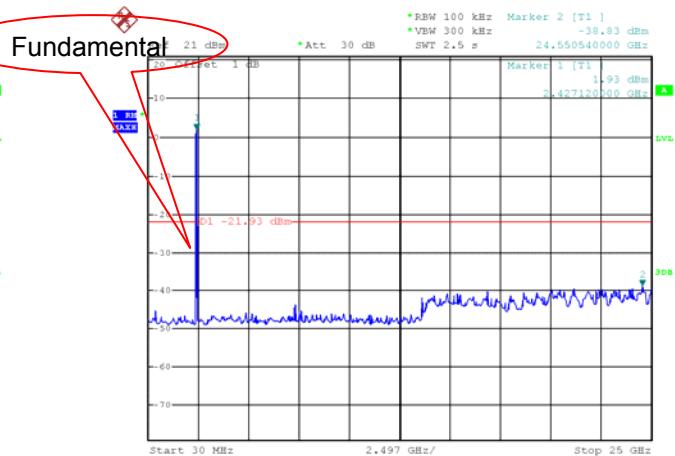

Date: 20.SEP.2022 15:08:38

Date: 20.SEP.2022 15:10:07


Mode: TX 11 n HT40 channel 9



Date: 20.SEP.2022 15:11:39


ANT 2**9KHz – 30MHz**

Mode: TX 11b channel 1

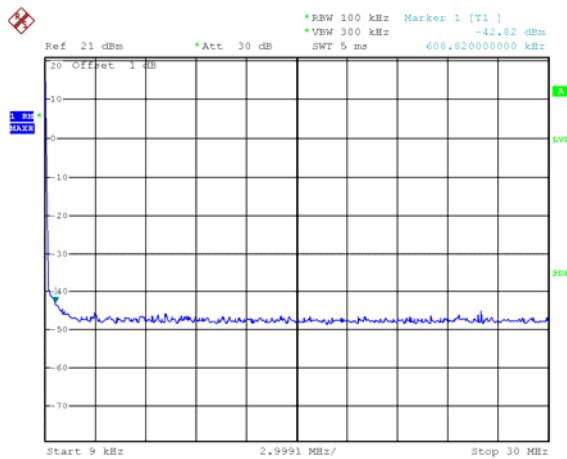


Date: 20.SEP.2022 16:52:16

Mode: TX 11b channel 6

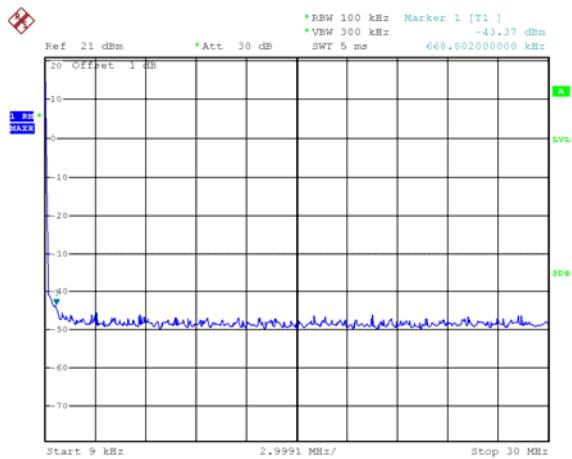


Date: 20.SEP.2022 16:54:35

Mode: TX 11b channel 11

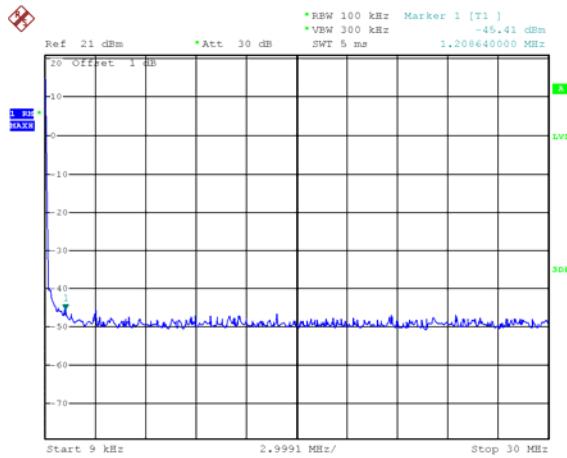


Date: 20.SEP.2022 16:57:43

Mode: TX 11g channel 1

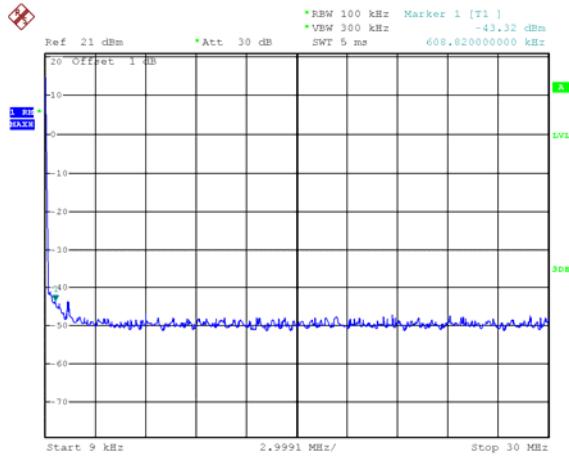


Date: 20.SEP.2022 17:05:27

Mode: TX 11g channel 6

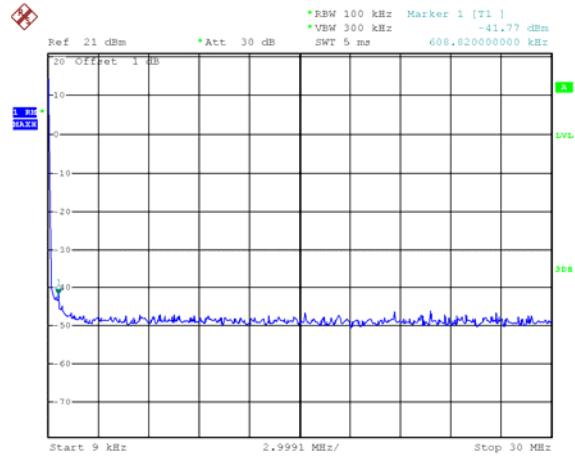


Date: 20.SEP.2022 17:06:30

Mode: TX 11g channel 11

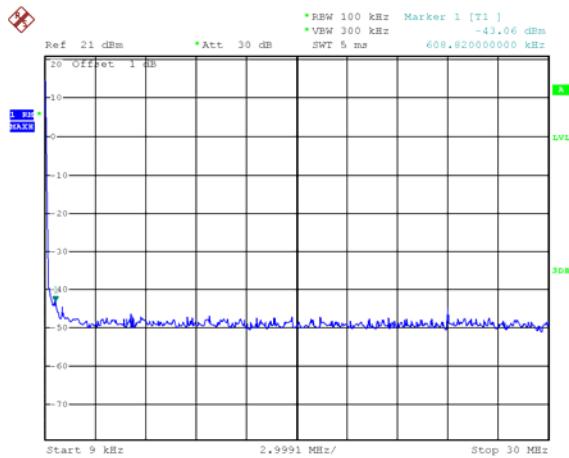


Date: 20.SEP.2022 17:09:12

Mode: TX 11n HT20 channel 1

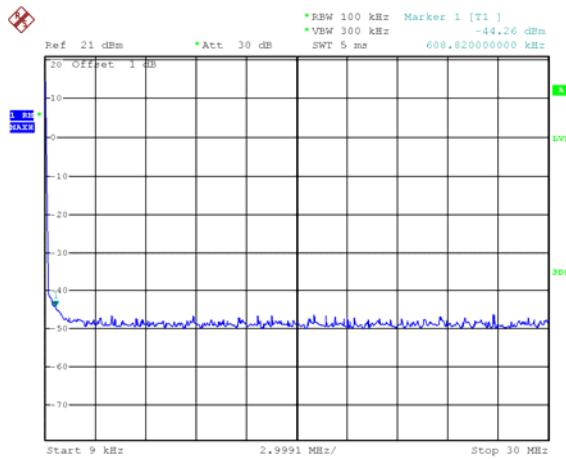


Mode: TX 11 n HT20 channel 6

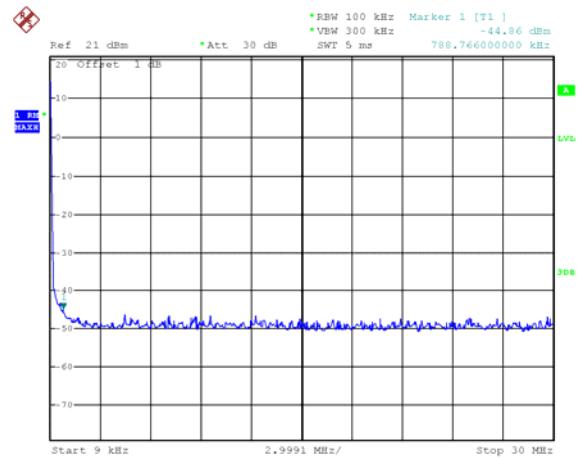

Date: 20.SEP.2022 17:21:58


Date: 20.SEP.2022 17:23:05

Mode: TX 11 n HT20 channel 11

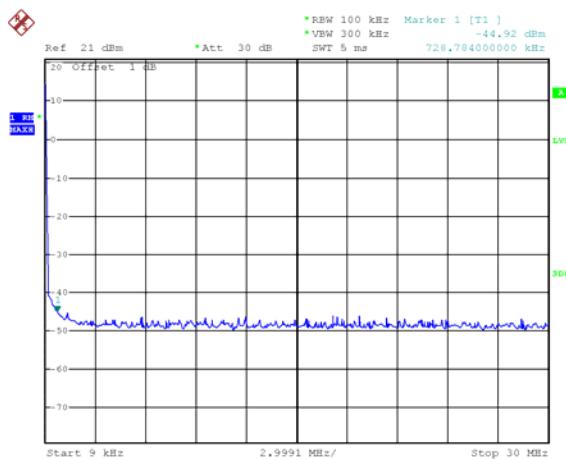


Date: 20.SEP.2022 17:24:30

Mode: TX 11n HT40 channel 3

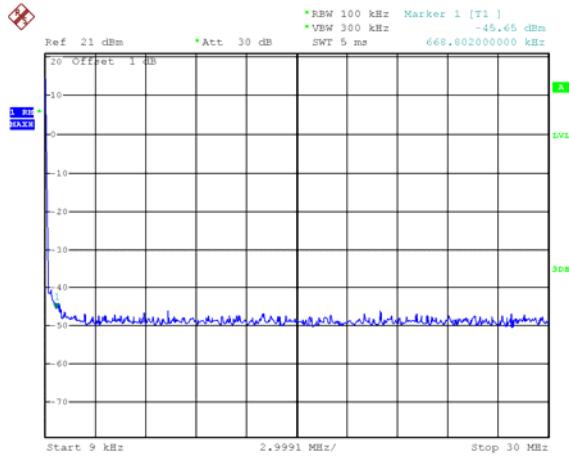


Date: 20.SEP.2022 17:27:01

Mode: TX 11 n HT40 channel 6

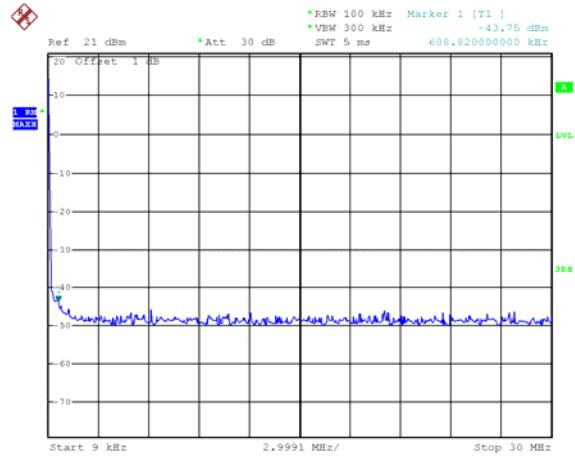

Date: 20.SEP.2022 17:28:35


Mode: TX 11 n HT40 channel 9

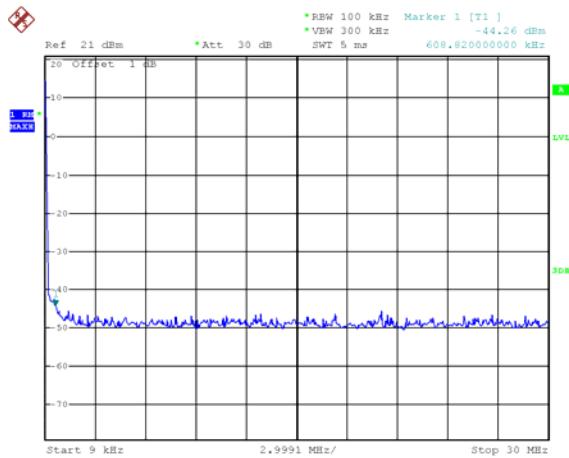


Date: 20.SEP.2022 17:29:57

Above 30MHz

Mode: TX 11b channel 1

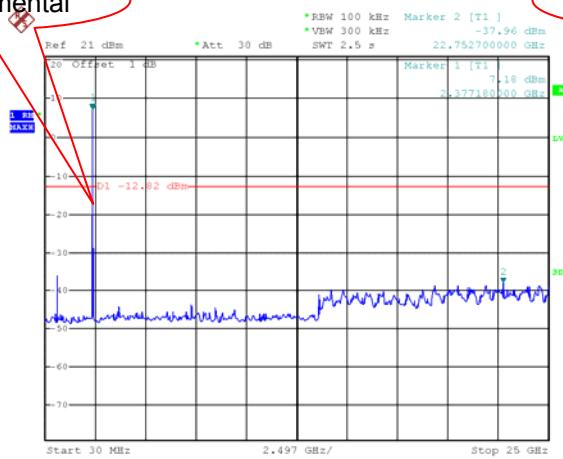Fundamental


Mode: TX 11b channel 6

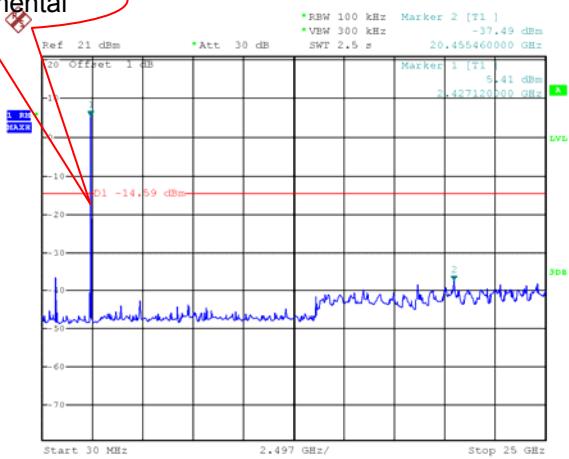Fundamental

Date: 20.SEP.2022 16:53:14


Date: 20.SEP.2022 16:55:23

Mode: TX 11b channel 11

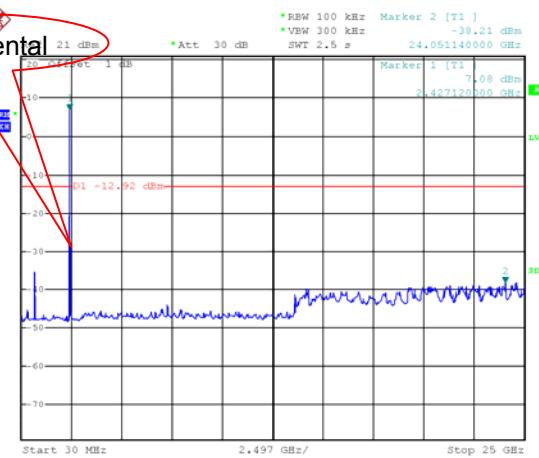
Fundamental

Date: 20.SEP.2022 16:59:06

Mode: TX 11g channel 1

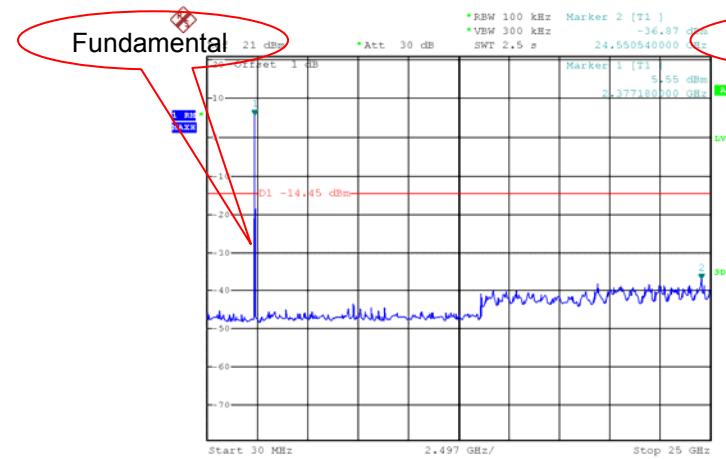


Mode: TX 11g channel 6

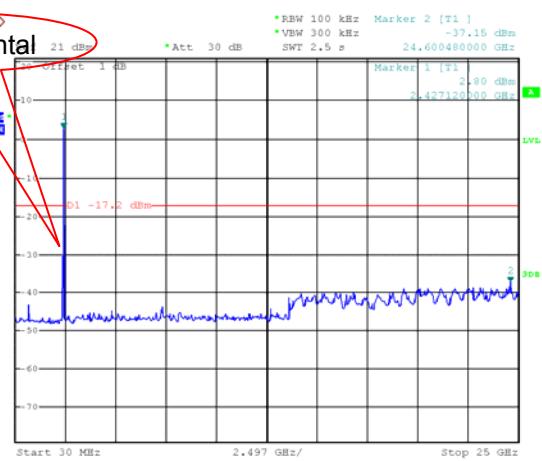

Date: 20.SEP.2022 17:04:10


Date: 20.SEP.2022 17:08:32

Mode: TX 11g channel 11

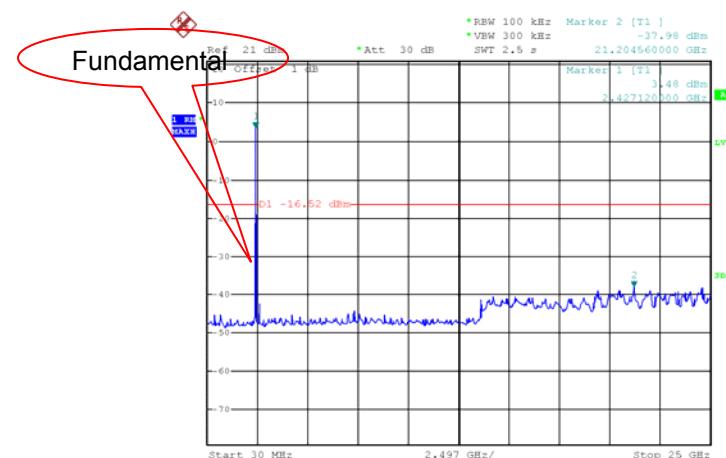


Date: 20.SEP.2022 17:10:07

Mode: TX 11n HT20 channel 1

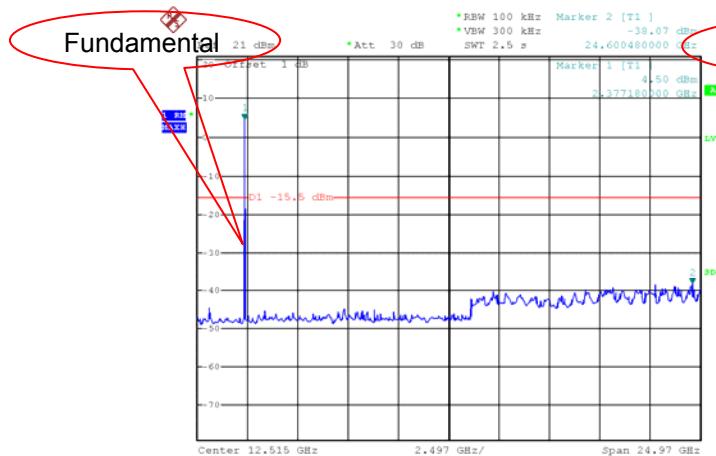


Mode: TX 11 n HT20 channel 6

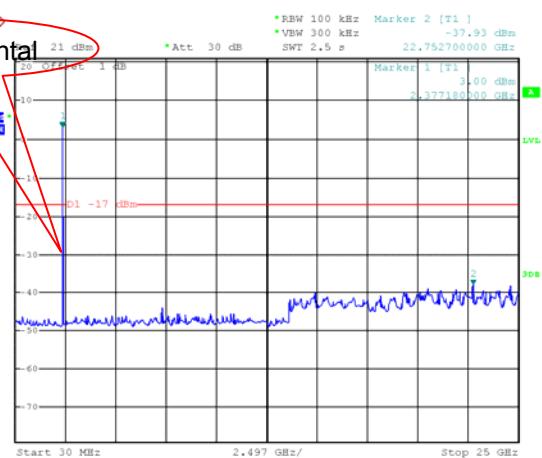

Date: 20.SEP.2022 17:22:40


Date: 20.SEP.2022 17:23:30

Mode: TX 11 n HT20 channel 11

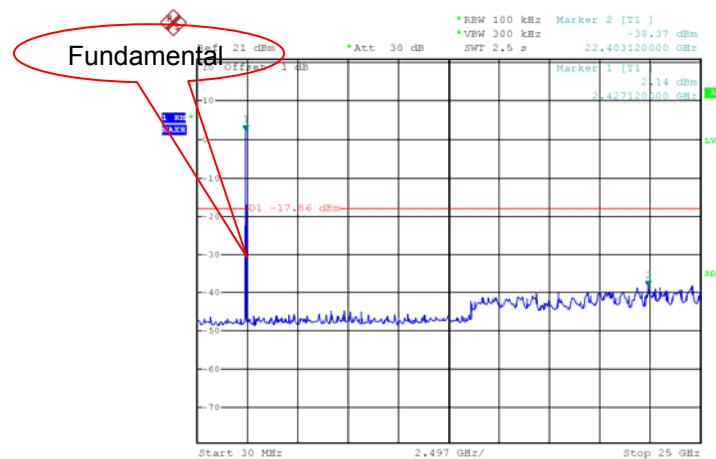


Date: 20.SEP.2022 17:25:21

Mode: TX 11n HT40 channel 3

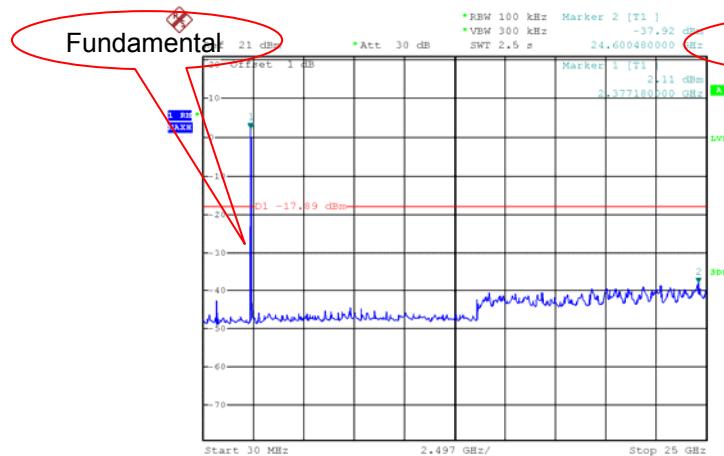


Mode: TX 11 n HT40 channel 6

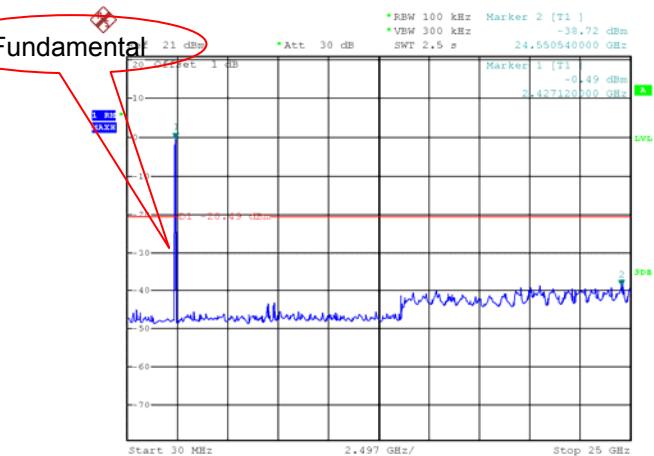

Date: 20.SEP.2022 17:27:46

Date: 20.SEP.2022 17:29:20

Mode: TX 11 n HT40 channel 9

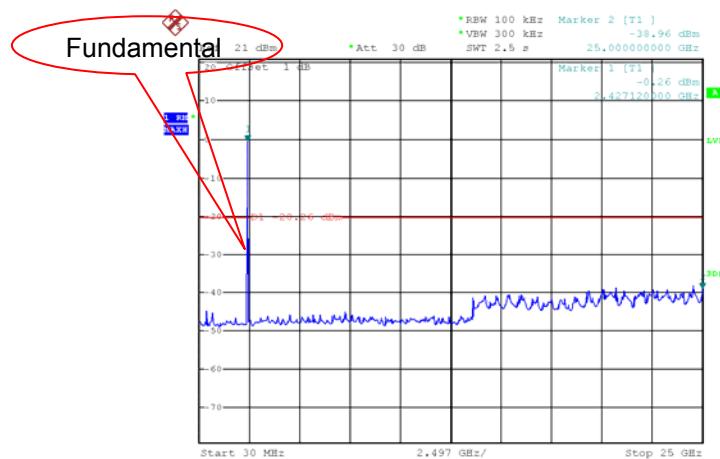

Date: 20.SEP.2022 17:30:33

11 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Limit: Transmitting

11.1 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result


ANT 1:

Test result plots shown as follows:

TX 11b: Band edge-left side

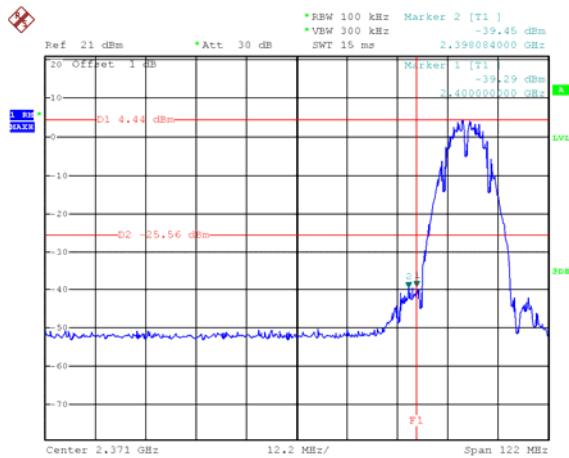


TX 11b: Band edge-right side

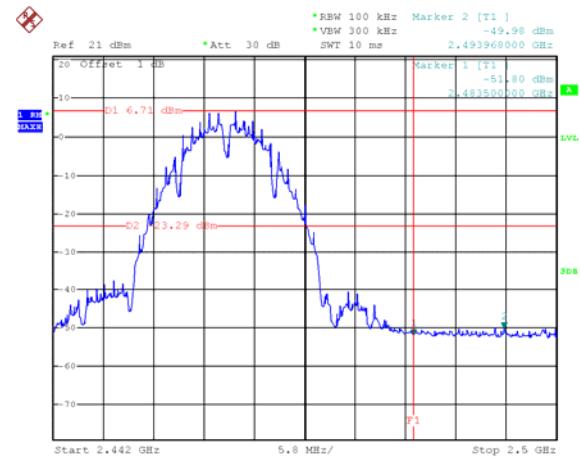


Date: 22.SEP.2022 10:02:57

TX 11g: Band edge-left side

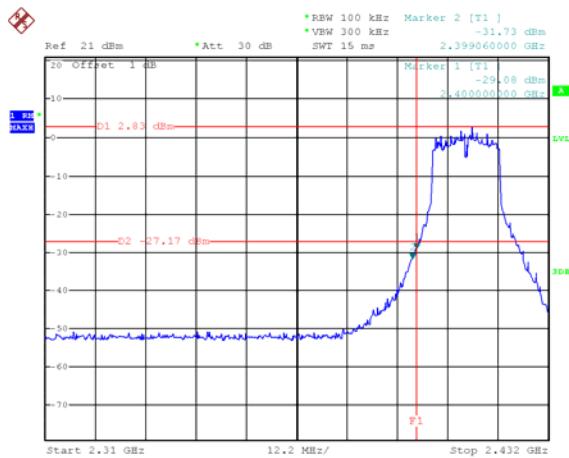


TX 11g: Band edge-right side

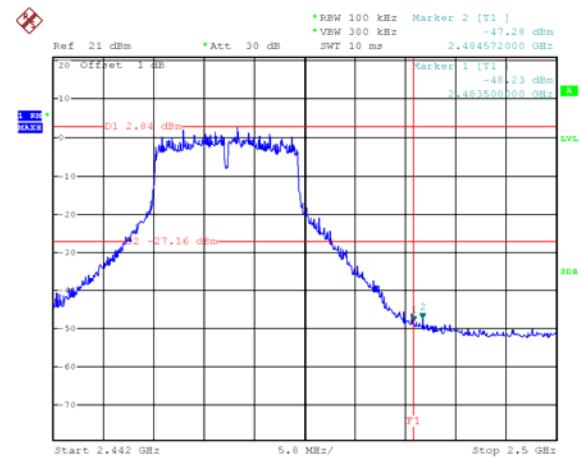

Date: 22.SEP.2022 10:12:29


Date: 22.SEP.2022 10:09:09

TX 11n HT20: Band edge-left side

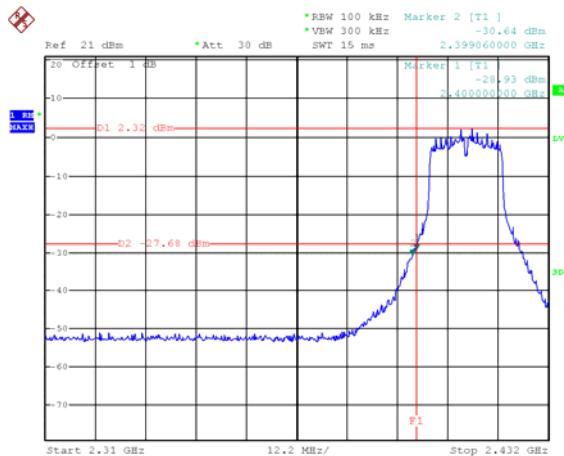


Date: 22.SEP.2022 10:14:15

TX 11n HT20: Band edge-right side

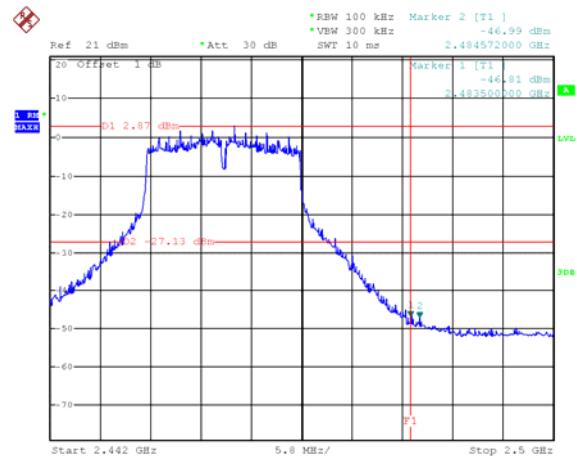


Date: 22.SEP.2022 10:16:14

TX 11n HT40: Band edge-left side

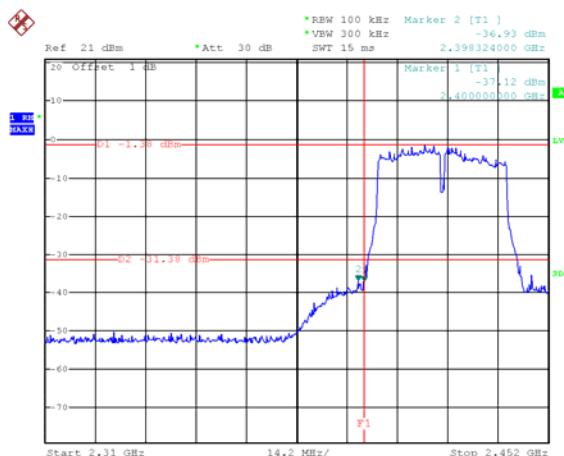

Date: 22.SEP.2022 10:20:45

TX 11n HT40: Band edge-right side

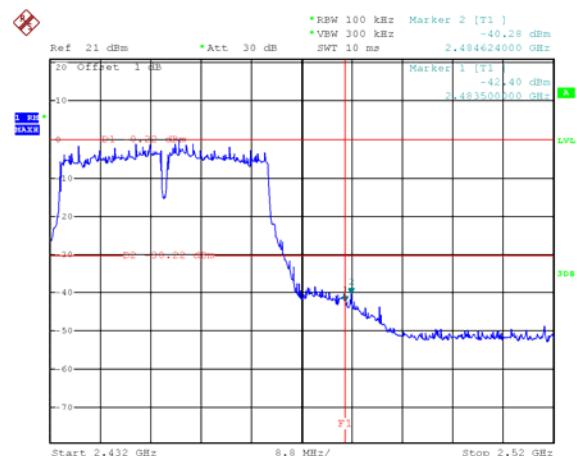

Date: 22.SEP.2022 10:22:31

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247
 Test Method: ANSI C63.10:2013
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
 Test Limit: §15.247(a)(2)
 Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
 Test Mode: Transmitting

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
 99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

12.2 Test Result:

ANT 1:


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	8.128	13.248
	Channel 6	8.128	13.344
	Channel 11	8.096	13.312
TX 11g	Channel 1	15.250	16.750
	Channel 6	16.050	16.800
	Channel 11	15.250	16.800
TX 11n HT20	Channel 1	15.228	17.928
	Channel 6	16.740	17.982
	Channel 11	15.552	17.982
TX 11n HT40	Channel 3	35.310	36.630
	Channel 6	36.190	36.740
	Channel 9	35.530	36.850

Test result plot:

6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

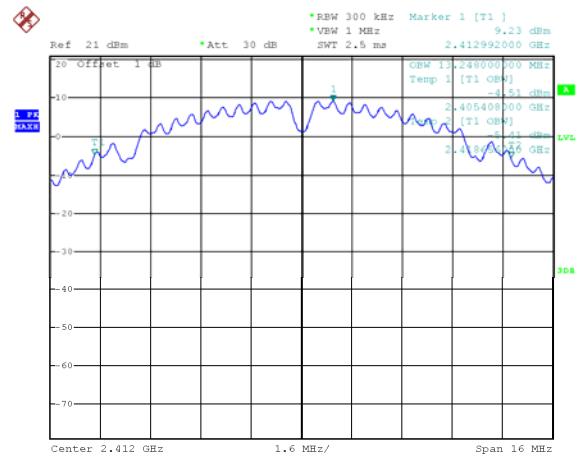

Date: 20.SEP.2022 10:09:51

Date: 20.SEP.2022 11:20:43

Mode: TX 11b channel 6




Date: 20.SEP.2022 10:39:00

Date: 20.SEP.2022 11:21:54


6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 11

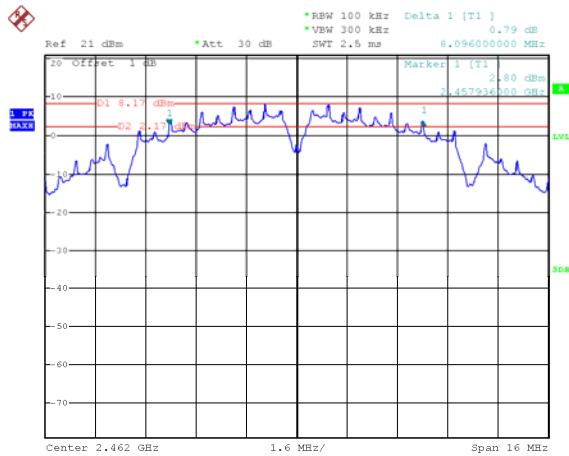


Date: 20.SEP.2022 10:40:41

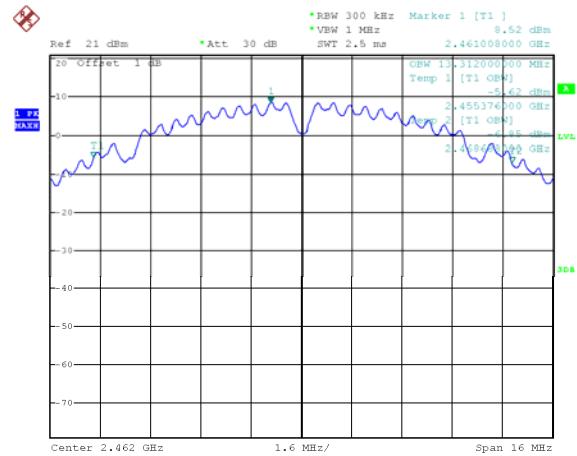


Date: 20.SEP.2022 11:22:57

Mode: TX 11g channel 1

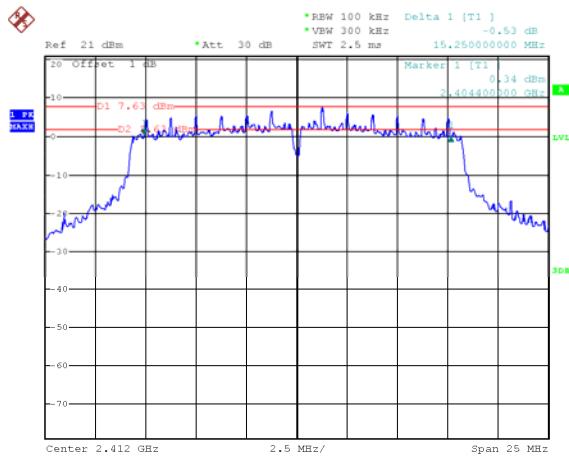

Date: 20.SEP.2022 10:42:31

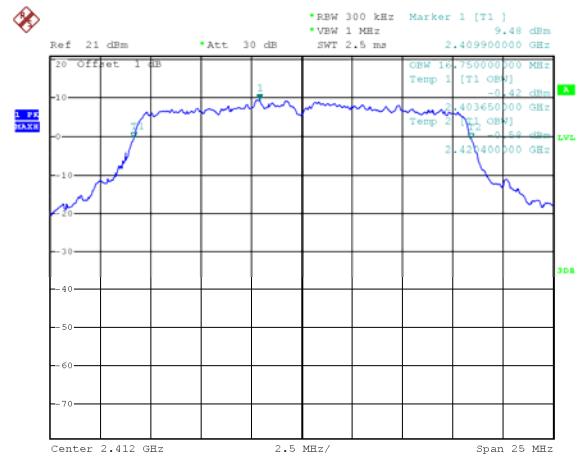


Date: 20.SEP.2022 11:24:07


6 dB Bandwidth

99% Bandwidth

Mode: TX 11g channel 6

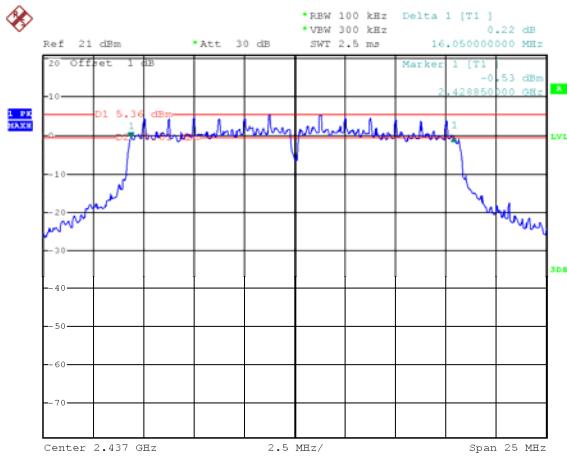


Date: 20.SEP.2022 10:44:07

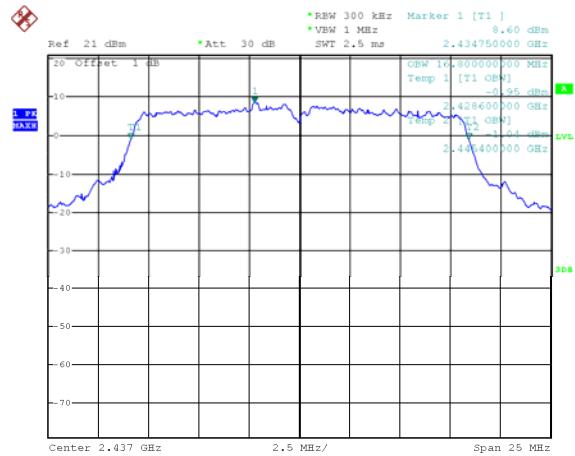


Date: 20.SEP.2022 11:25:04

Mode: TX 11g channel 11

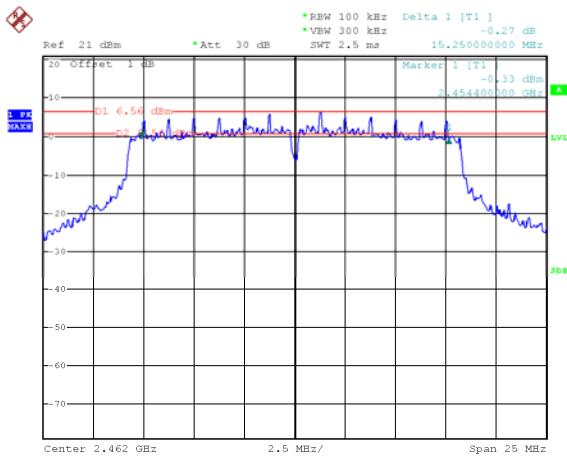

Date: 20.SEP.2022 10:46:14

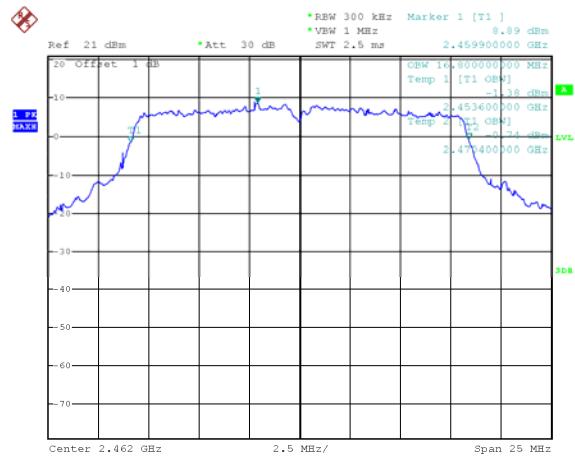


Date: 20.SEP.2022 11:26:14


6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 1

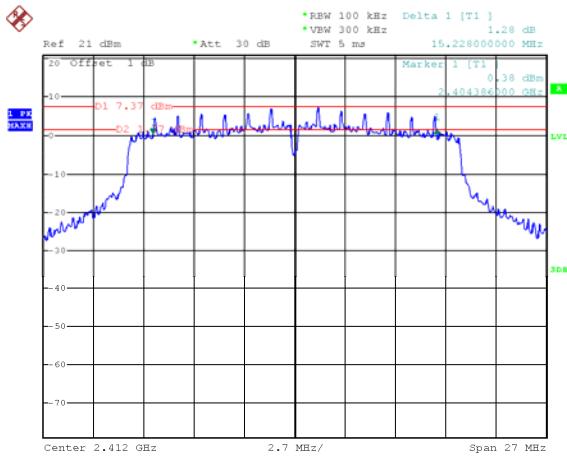


Date: 20.SEP.2022 15:20:40

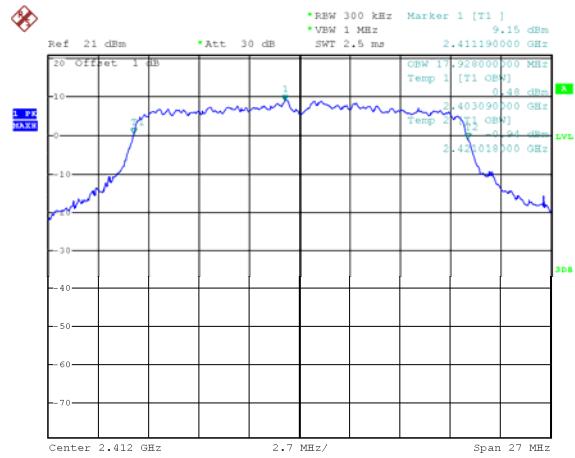


Date: 20.SEP.2022 11:28:02

Mode: TX 11n HT20 channel 6

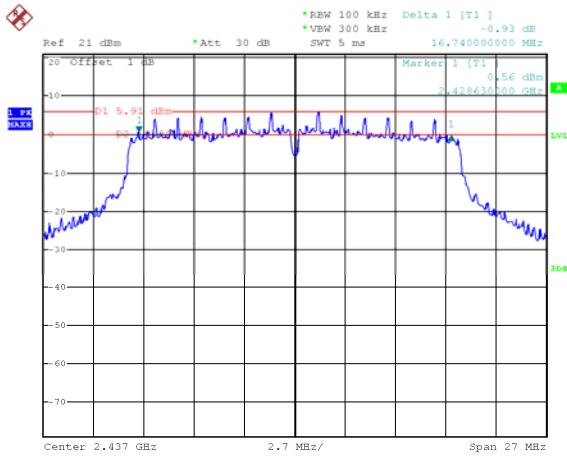

Date: 20.SEP.2022 10:50:34

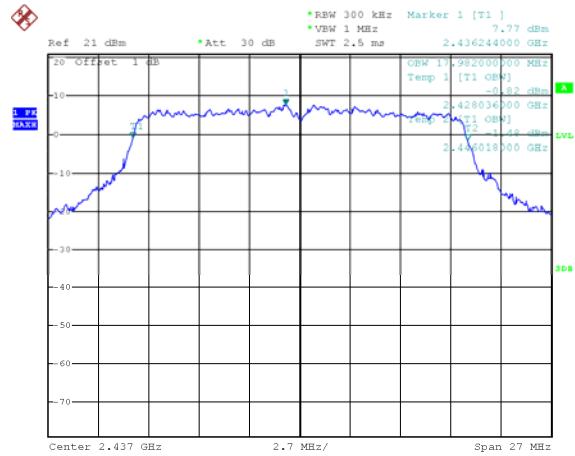


Date: 20.SEP.2022 11:29:18


6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 11

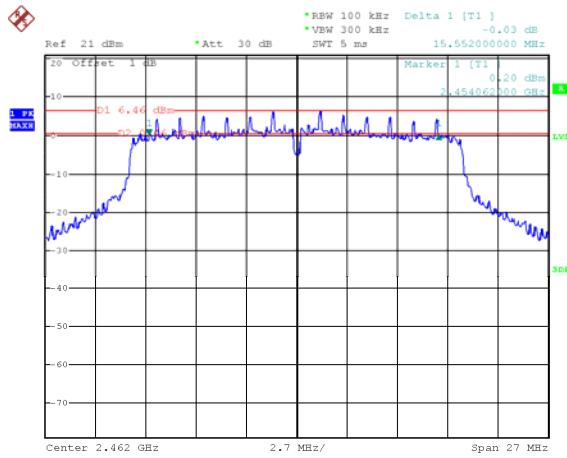


Date: 20.SEP.2022 11:13:16

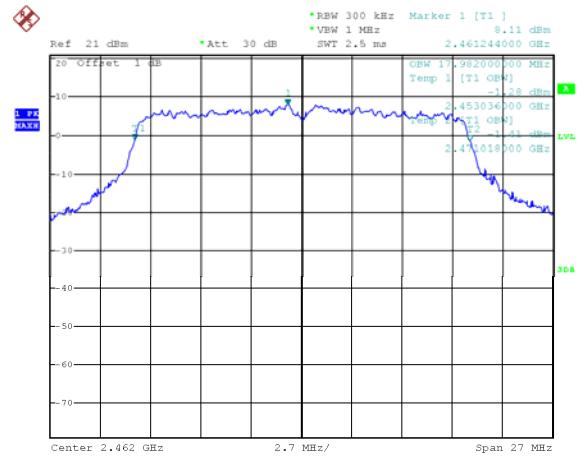


Date: 20.SEP.2022 11:30:06

Mode: TX 11n HT40 channel 3

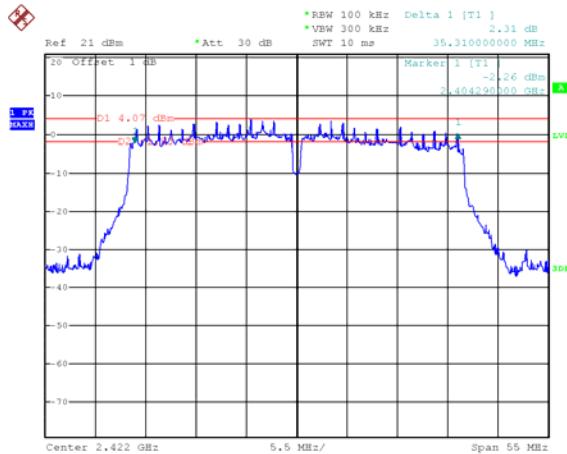

Date: 20.SEP.2022 11:15:49

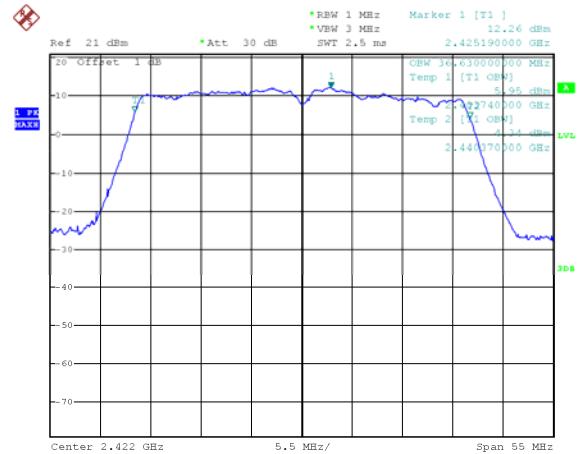


Date: 20.SEP.2022 11:31:41


6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT40 channel 6

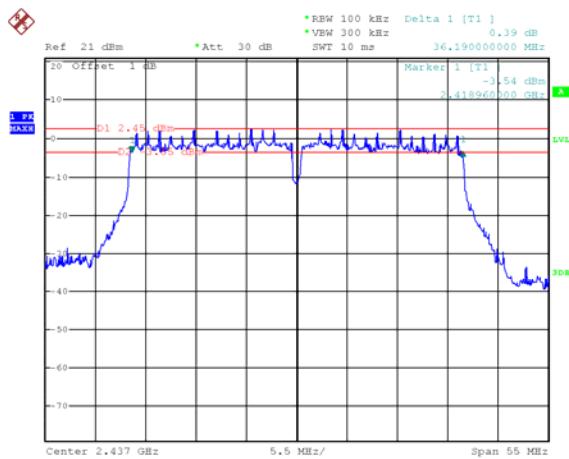


Date: 20.SEP.2022 11:17:15

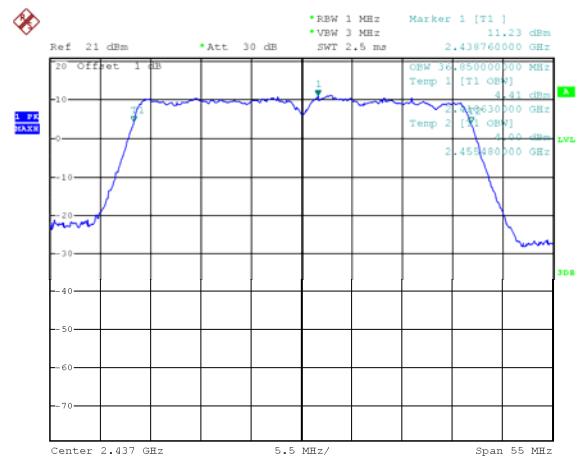


Date: 20.SEP.2022 11:32:37

Mode: TX 11n HT40 channel 9

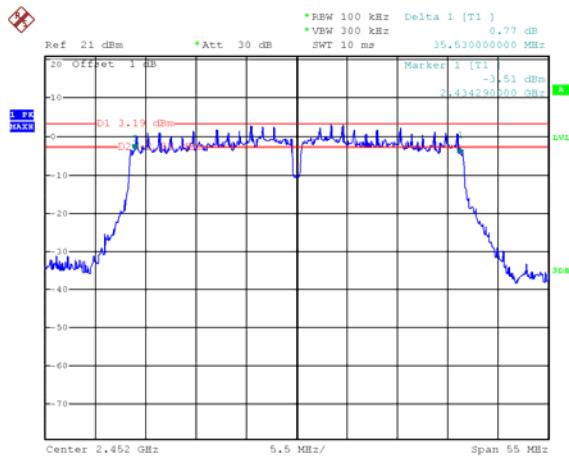

Date: 20.SEP.2022 11:18:55

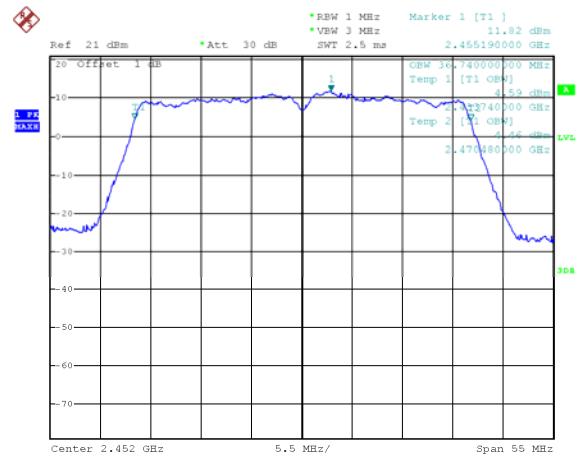

Date: 20.SEP.2022 11:33:34

13 Maximum Peak conducted Output Power

Test Requirement: 47CFR FCC Part15 Subpart C §15.247
 Test Method: ANSI C63.10:2013
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
 Test Limit: §15.247(b)
 The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
 Test Mode: Transmitting

13.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW \geq DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.

Subclause 11.9.2 of ANSI C63.10 is applicable.

13.2 Test Result:

ANT 1:

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)
TX 11b	Low-2412	15.44	0.04	15.48
	Middle-2437	14.38		14.42
	High-2462	14.69		14.73
TX 11g	Low-2412	14.73	0.08	14.81
	Middle-2437	13.85		13.93
	High-2462	14.09		14.17
TX 11n HT20	Low-2412	14.89	0.11	15.00
	Middle-2437	13.83		13.94
	High-2462	13.91		14.02
TX 11n HT40	Low-2422	12.45	0.41	12.86
	Middle-2437	11.73		12.14
	High-2452	11.95		12.36

ANT 2:

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)
TX 11b	Low-2412	15.20	0.04	15.24
	Middle-2437	14.49		14.53
	High-2462	14.87		14.91
TX 11g	Low-2412	14.48	0.08	14.56
	Middle-2437	14.00		14.08
	High-2462	14.37		14.45
TX 11n HT20	Low-2412	14.40	0.11	14.51
	Middle-2437	14.04		14.15
	High-2462	14.11		14.22
TX 11n HT40	Low-2422	12.25	0.41	12.66
	Middle-2437	11.56		11.97
	High-2452	12.22		12.63

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)			Limit¹
		ANT1	ANT2	SUM	
TX 11n HT20	Low-2412	15.00	14.51	17.77	1W/30dBm
	Middle-2437	13.94	14.15	17.06	
	High-2462	14.02	14.22	17.13	
TX 11n HT40	Low-2422	12.86	12.66	15.77	1W/30dBm
	Middle-2437	12.14	11.97	15.07	
	High-2452	12.36	12.63	15.51	

Note:

¹ According to ANSI C63.10 clause 14.4.3.1,

Directional gain=antenna gain + 10log(N)=2.2 + 10log2= 5.21dBi

N is number of array elements or staves

According to ANSI C63.10 clause 11.7,


For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6dBi, the output power effective limit shall be calculated as follows in Equation:

$$P_{\text{out}} = P_{\text{Limit}} - (G_{\text{TX}} - 6)$$


The Directional gain is 5.21dBi that less than 6dBi, the calculation of the above formula is not required.

Test Plot:**ANT 1:**

Mode: TX 11b channel 1

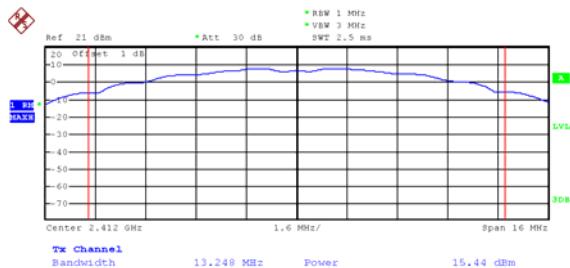


Mode: TX 11b channel 6

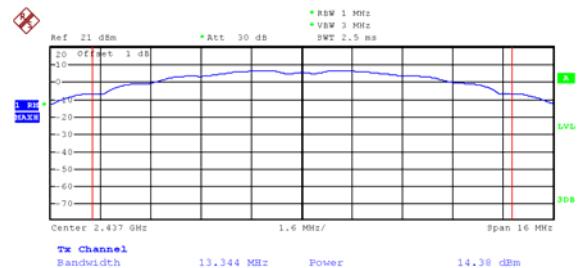

Date: 20.SEP.2022 12:27:16


Date: 20.SEP.2022 12:26:11

Mode: TX 11b channel 11

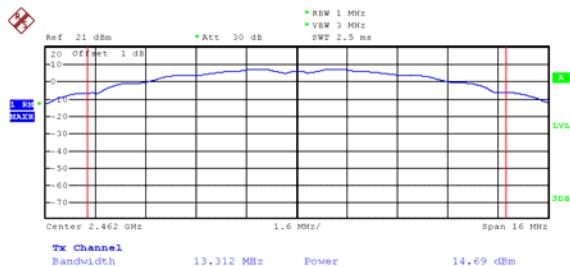


Date: 20.SEP.2022 12:25:16

Mode: TX 11g channel 1

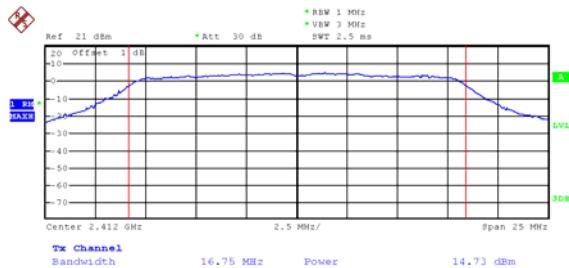


Date: 20.SEP.2022 12:31:10

Mode: TX 11g channel 6

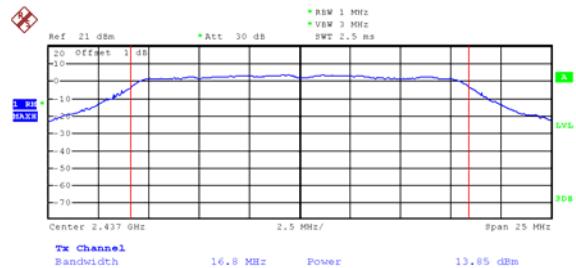


Date: 20.SEP.2022 12:32:33

Mode: TX 11g channel 11

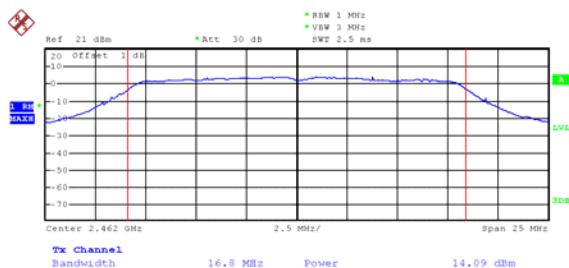


Date: 20.SEP.2022 12:33:27

Mode: TX 11n HT20 channel 1

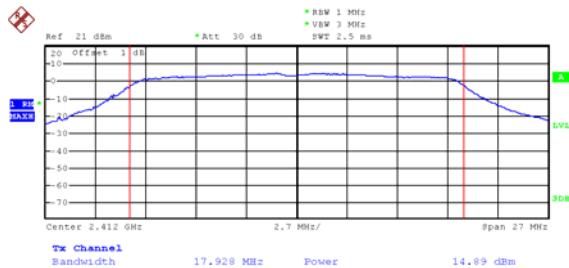


Date: 20.SEP.2022 12:36:28

Mode: TX 11n HT20 channel 6

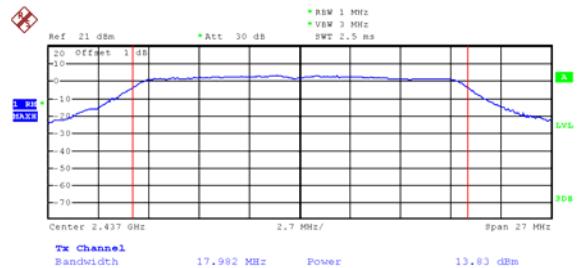


Date: 20.SEP.2022 12:37:45

Mode: TX 11n HT20 channel 11

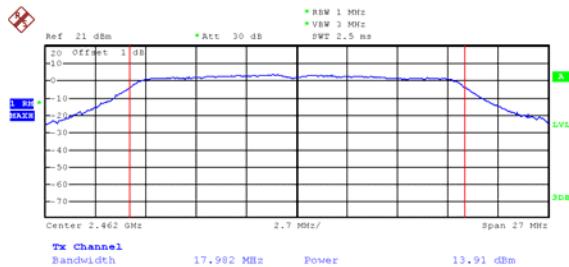


Date: 20.SEP.2022 12:39:11

Mode: TX 11n HT40 channel 3

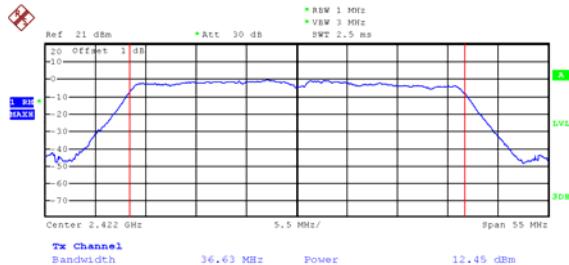


Date: 20.SEP.2022 15:55:46

Mode: TX 11n HT40 channel 6

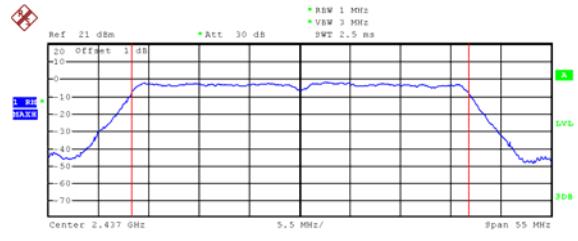

Date: 20.SEP.2022 15:52:41


Mode: TX 11n HT40 channel 9

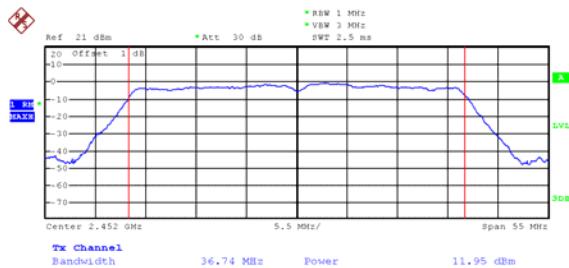


Date: 20.SEP.2022 15:53:36

ANT 2:

Mode: TX 11b channel 1

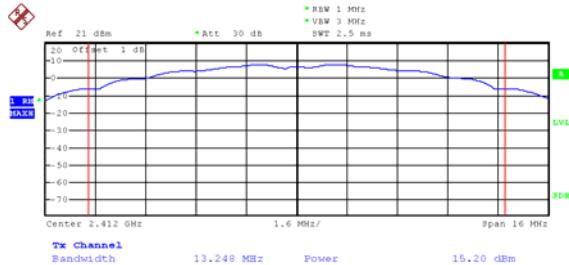


Mode: TX 11b channel 6

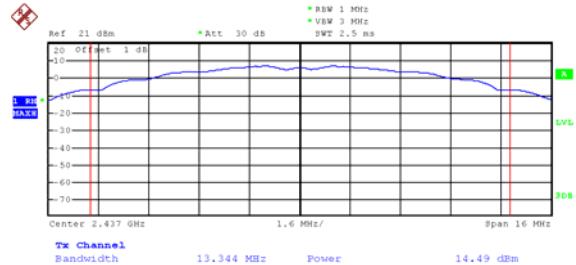

Date: 20.SEP.2022 16:01:00


Date: 20.SEP.2022 16:02:10

Mode: TX 11b channel 11

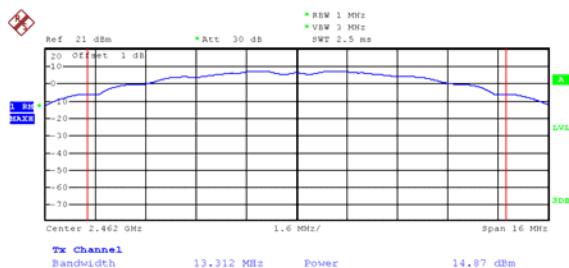


Date: 20.SEP.2022 16:03:28

Mode: TX 11g channel 1

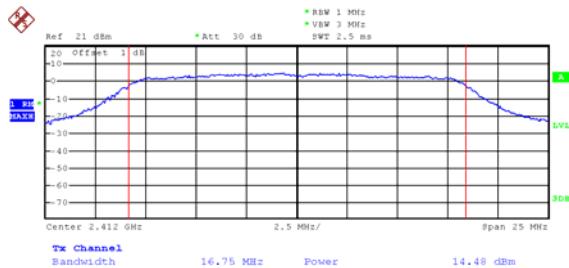


Mode: TX 11g channel 6

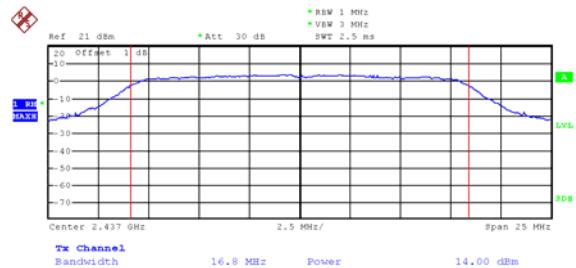

Date: 20.SEP.2022 16:07:11


Date: 20.SEP.2022 16:10:04

Mode: TX 11g channel 11

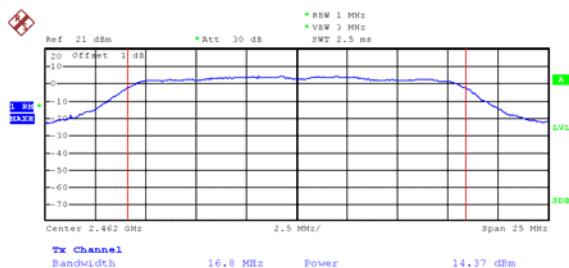


Date: 20.SEP.2022 16:11:37

Mode: TX 11n HT20 channel 1

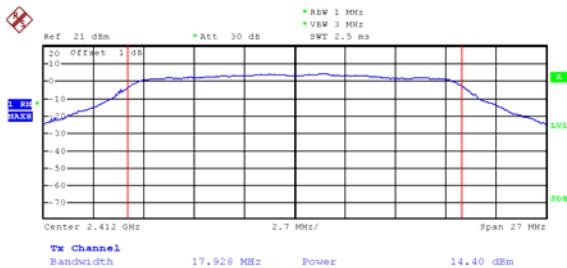


Date: 20.SEP.2022 16:16:32

Mode: TX 11n HT20 channel 6

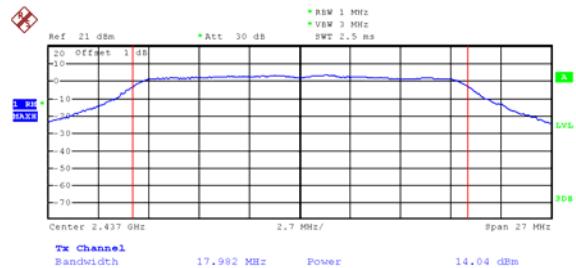


Date: 20.SEP.2022 16:19:16

Mode: TX 11n HT20 channel 11

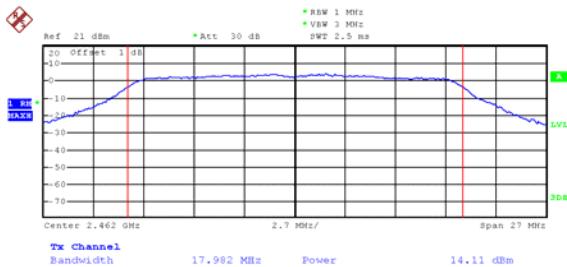


Date: 20.SEP.2022 16:20:16

Mode: TX 11n HT40 channel 3

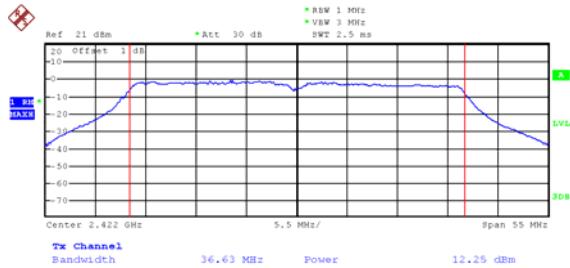


Date: 20.SEP.2022 16:22:06

Mode: TX 11n HT40 channel 6

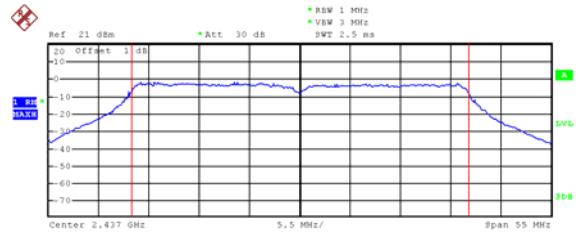

Date: 20.SEP.2022 16:23:21

Mode: TX 11n HT40 channel 9

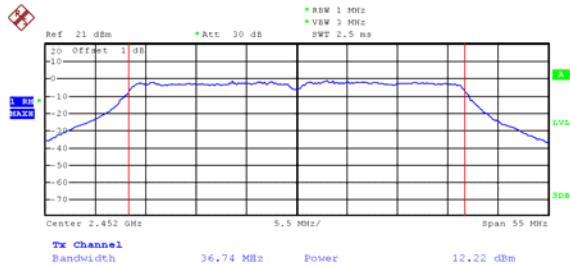

Date: 20.SEP.2022 16:24:19

14 Power Spectral density

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: ANSI C63.10:2013

KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Test Limit: §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Mode: Transmitting

14.1 Test Procedure:

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD

Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

14.2 Test Result:

ANT 1:

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)
TX 11b	Low-2412	-0.91	0.04	-0.87
	Middle-2437	-10.26		-10.22
	High-2462	-8.74		-8.70
TX 11g	Low-2412	-10.88	0.08	-10.80
	Middle-2437	-11.85		-11.77
	High-2462	-12.03		-11.95
TX 11n HT20	Low-2412	-10.99	0.11	-10.88
	Middle-2437	-11.77		-11.66
	High-2462	-11.79		-11.68
TX 11n HT40	Low-2422	-11.46	0.41	-11.05
	Middle-2437	-13.44		-13.03
	High-2452	-13.28		-12.87

ANT 2:

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)
TX 11b	Low-2412	-8.61	0.04	-8.57
	Middle-2437	-10.64		-10.60
	High-2462	-9.57		-9.53
TX 11g	Low-2412	-10.57	0.08	-10.49
	Middle-2437	-11.74		-11.66
	High-2462	-11.33		-11.25
TX 11n HT20	Low-2412	-10.05	0.11	-9.94
	Middle-2437	-10.29		-10.18
	High-2462	-10.34		-10.23
TX 11n HT40	Low-2422	-13.07	0.41	-12.66
	Middle-2437	-14.10		-13.69
	High-2452	-12.71		-12.30

Operation mode	Channel Frequency (MHz)	Power Spectral density (dBm)			Limit ¹
		ANT1	ANT2	SUM	
TX 11n HT20	Low-2412	-10.88	-9.94	-7.37	8dBm per 3kHz
	Middle-2437	-11.66	-10.18	-7.85	
	High-2462	-11.68	-10.23	-7.88	
TX 11n HT40	Low-2422	-11.05	-12.66	-8.77	8dBm per 3kHz
	Middle-2437	-13.03	-13.69	-10.34	
	High-2452	-12.87	-12.30	-9.57	

Note:

¹ According to ANSI C63.10 clause 14.4.3.1,

Directional gain=antenna gain + 10log(N)=2.2 + 10log2= 5.21dBi

N is number of array elements or staves

According to ANSI C63.10 clause 11.7,


For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6dBi, the output power effective limit shall be calculated as follows in Equation:

$$P_{\text{out}} = P_{\text{Limit}} - (G_{\text{TX}} - 6)$$

The Directional gain is 5.21dBi that less than 6dBi, the calculation of the above formula is not required.


Test Plot:**ANT 1:**

Mode: TX 11b channel 1

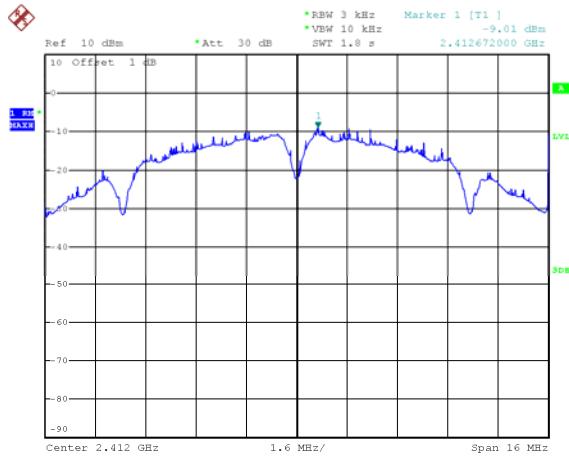


Date: 20.SEP.2022 11:53:00

Mode: TX 11b channel 6

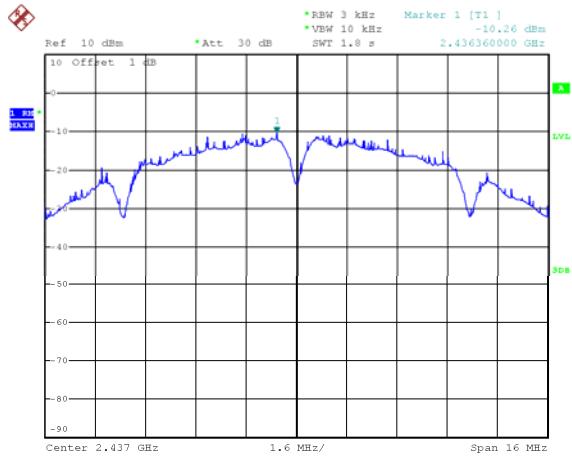


Date: 20.SEP.2022 11:54:21

Mode: TX 11b channel 11

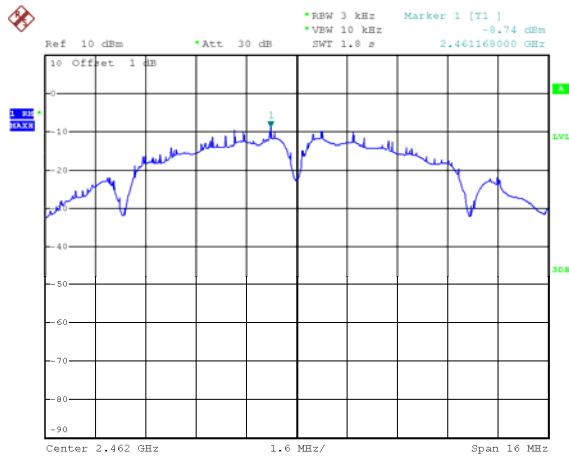


Date: 20.SEP.2022 11:56:09

Mode: TX 11g channel 1

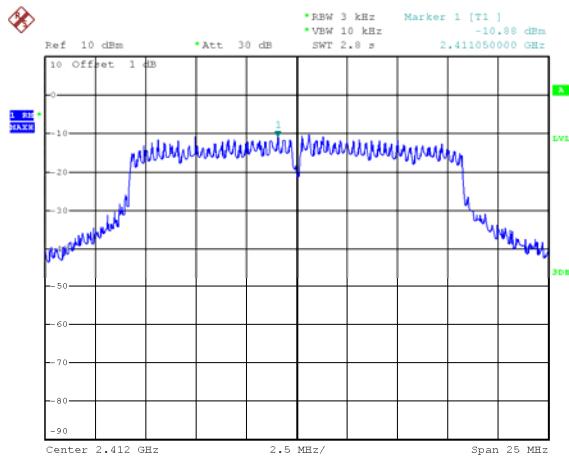


Date: 20.SEP.2022 11:58:35

Mode: TX 11g channel 6

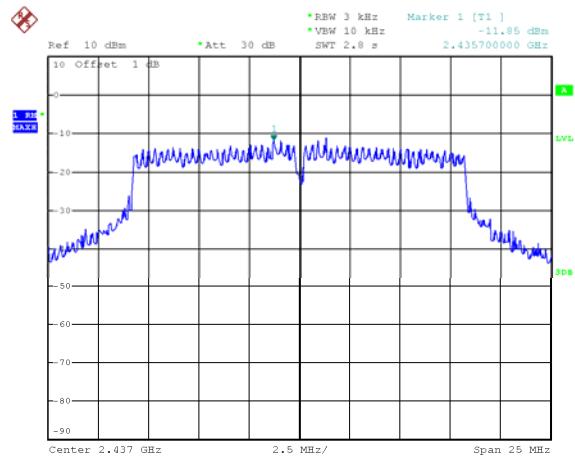


Date: 20.SEP.2022 11:59:43

Mode: TX 11g channel 11

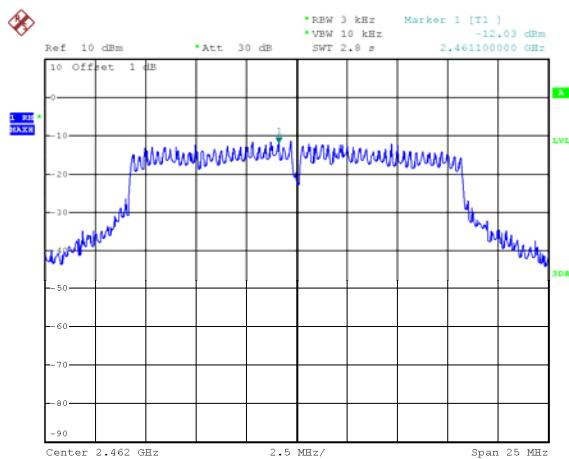


Date: 20.SEP.2022 12:00:47

Mode: TX 11n HT20 channel 1

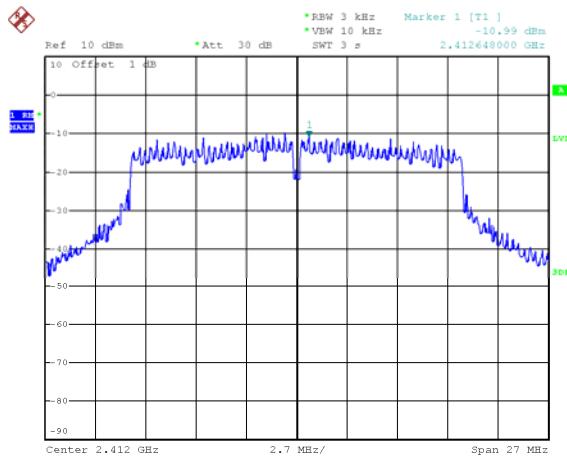


Date: 20.SEP.2022 12:03:31

Mode: TX 11n HT20 channel 6

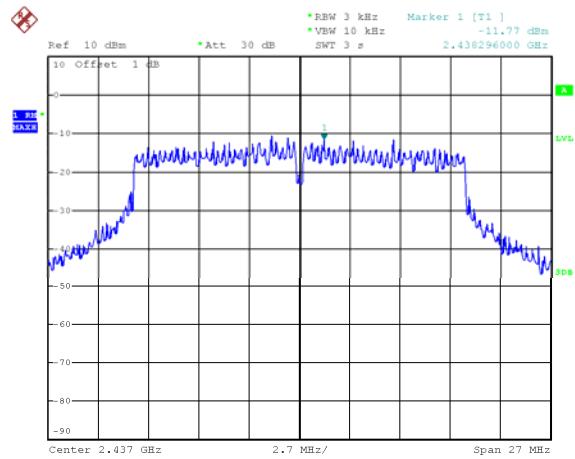


Date: 20.SEP.2022 12:04:52

Mode: TX 11n HT20 channel 11

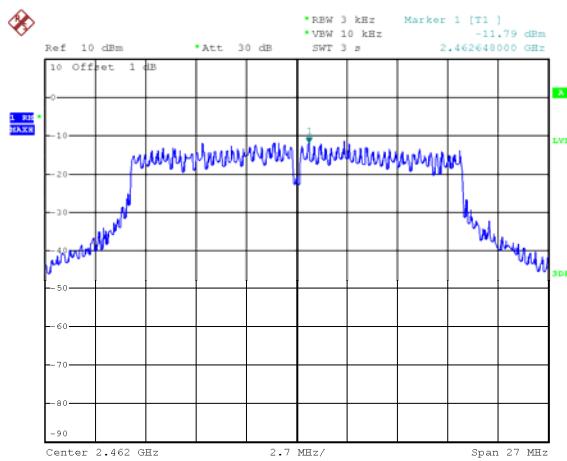


Date: 20.SEP.2022 12:06:19

Mode: TX 11n HT40 channel 3

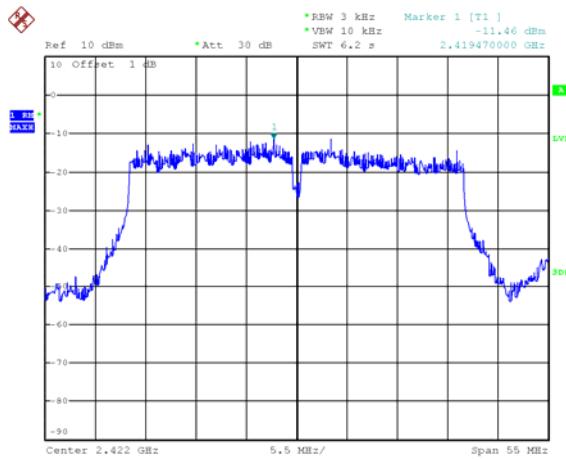


Mode: TX 11n HT40 channel 6

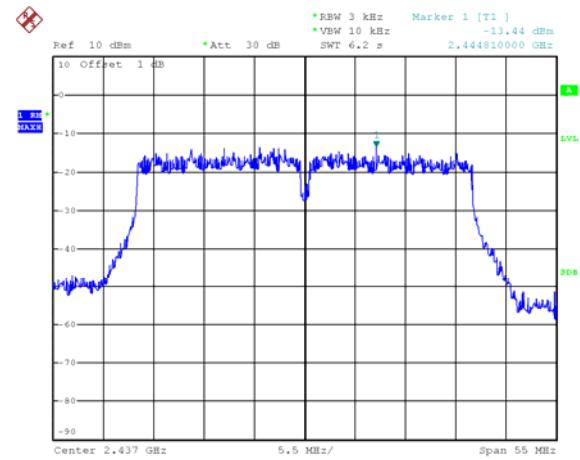

Date: 20.SEP.2022 12:08:49

Date: 20.SEP.2022 12:10:09


Mode: TX 11n HT40 channel 9

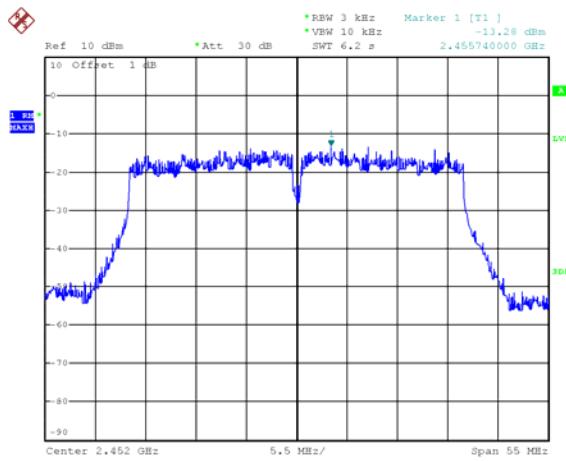

Date: 20.SEP.2022 12:11:46


ANT 2:

Mode: TX 11b channel 1

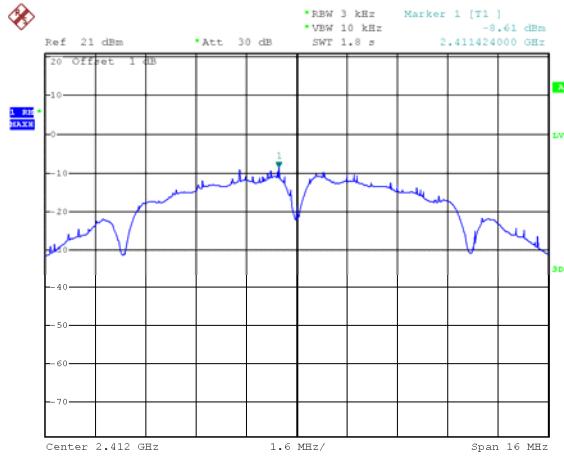


Date: 20.SEP.2022 16:32:20

Mode: TX 11b channel 6

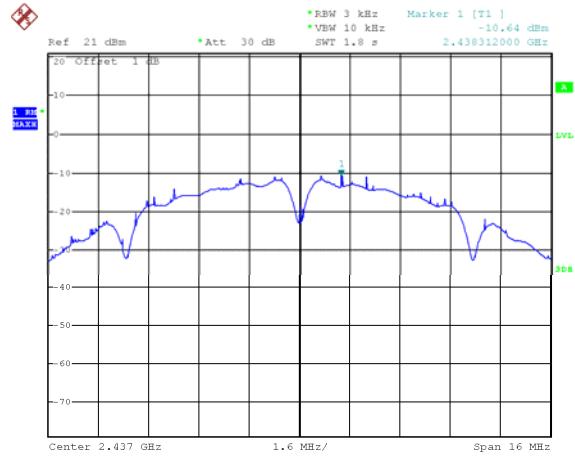


Date: 20.SEP.2022 16:30:04

Mode: TX 11b channel 11

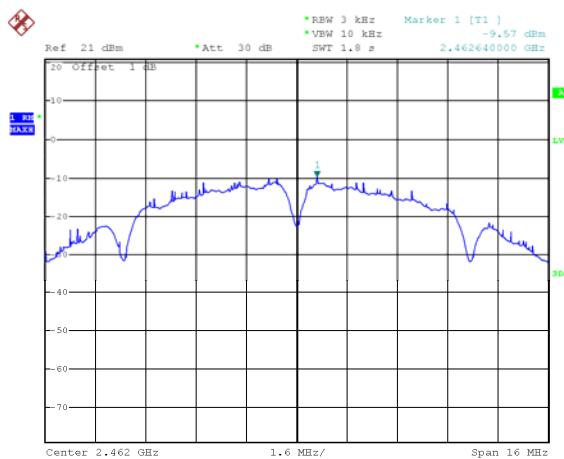


Date: 20.SEP.2022 16:31:01

Mode: TX 11g channel 1

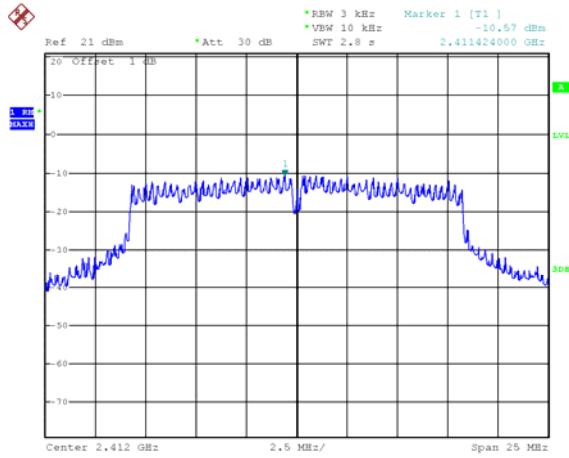


Date: 20.SEP.2022 16:33:51

Mode: TX 11g channel 6

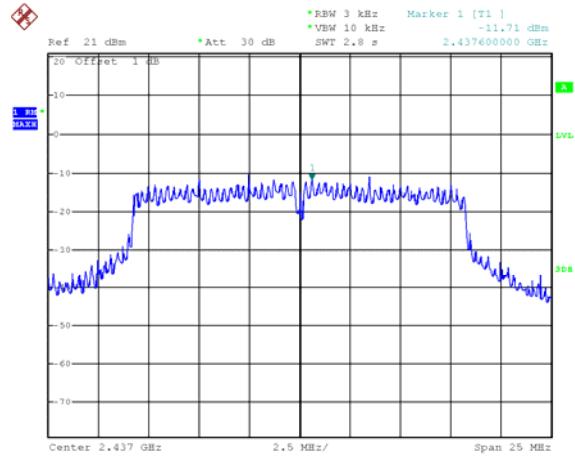


Date: 20.SEP.2022 16:35:17

Mode: TX 11g channel 11

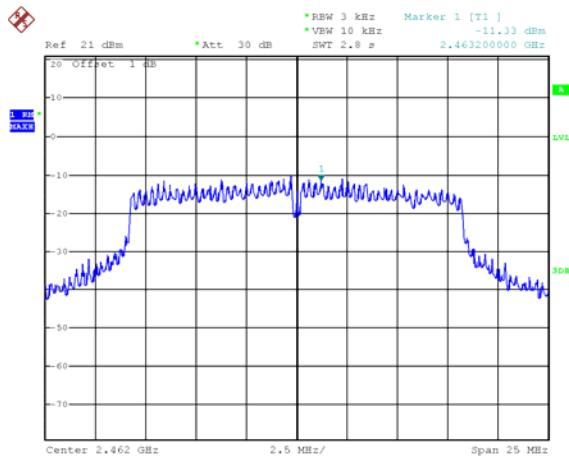


Date: 20.SEP.2022 16:36:23

Mode: TX 11n HT20 channel 1

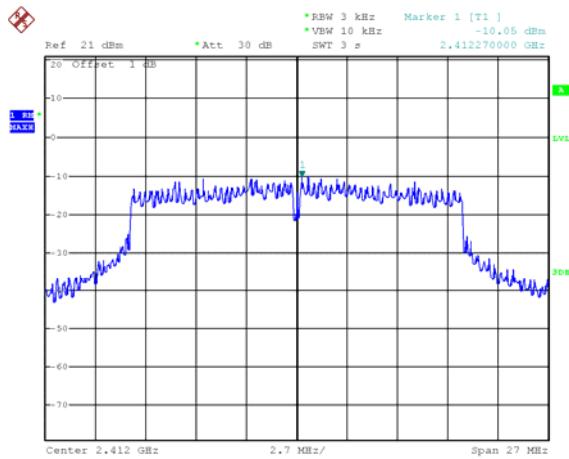


Date: 20.SEP.2022 16:38:55

Mode: TX 11n HT20 channel 6

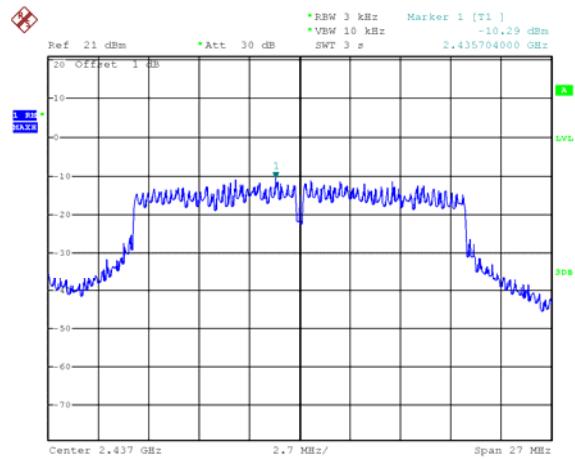


Date: 20.SEP.2022 16:41:00

Mode: TX 11n HT20 channel 11

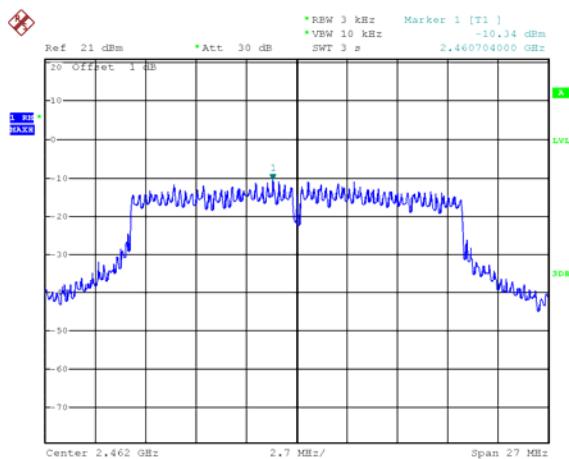


Date: 20.SEP.2022 16:42:03

Mode: TX 11n HT40 channel 3

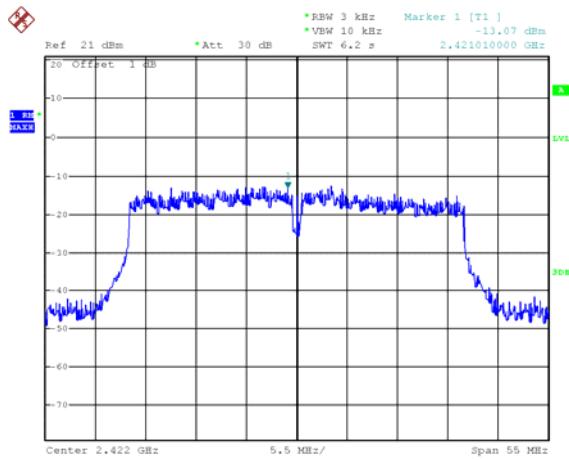


Date: 20.SEP.2022 16:44:19

Mode: TX 11n HT40 channel 6

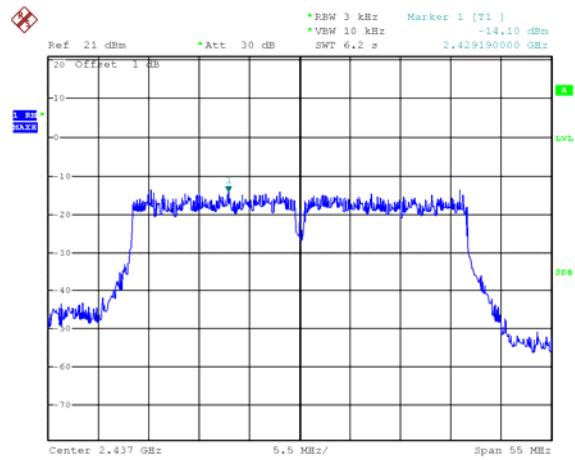

Date: 20.SEP.2022 16:45:33

Mode: TX 11n HT40 channel 9

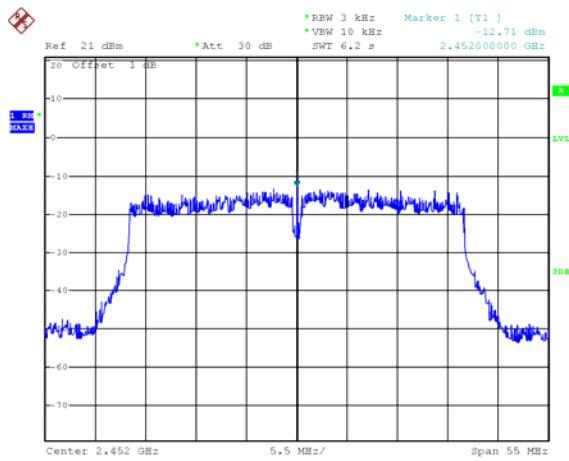

Date: 20.SEP.2022 16:47:31

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an external antenna (with RP-SMA connector) and antenna gain is 2.2dBi fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Note: Please refer to RF Exposure Report: WTF22D09183192W005.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix- E120-FCWP -Photos.

=====End of Report=====