

TEST REPORT

Product Name: MODULE TELEMATICS
FCC ID: 2A6ME-TBOX4
Trademark: N/A
Model Number: TBOX4
Prepared For: Jiangsu Wulian Network Technology Development Co., Ltd.
Address: Room 301, No. 30 Tulip Road, Yuhuatai District, Nanjing City, Jiangsu Province, China
Manufacturer: Jiangsu Wulian Network Technology Development Co., Ltd.
Address: Room 301, No. 30 Tulip Road, Yuhuatai District, Nanjing City, Jiangsu Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Apr. 12, 2022
Sample tested Date: Apr. 12, 2022 to Apr. 18, 2022
Issue Date: Apr. 18, 2022
Report No.: CTB220418014RFX
Test Standards: FCC Part 22H & 24E
Test Results: PASS
Remark: This is 2G3G radio test report.

Compiled by:

Arron Liu

Arron Liu

Reviewed by:

Bin Mei

Bin Mei

Approved by:



Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY.....	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP.....	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment.....	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. RF OUTPUT POWER.....	13
6.1 Standard Applicable	13
6.2 Test Procedure	13
6.3 Environmental Conditions.....	13
6.4 Summary of Test Results/Plots.....	14
7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER.....	21
7.1 Standard Applicable	21
7.2 Test Procedure	21
7.3 Environmental Conditions.....	21
7.4 Summary of Test Results	22
8. EMISSION BANDWIDTH.....	24
8.1 Standard Applicable	24
8.2 Test Procedure	24
8.3 Environmental Conditions.....	24
8.4 Summary of Test Results/Plots.....	25
9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	37
9.1 Standard Applicable	37
9.2 Test Procedure	37
9.3 Environmental Conditions.....	37

9.4	Summary of Test Results/Plots.....	37
10.	SPURIOUS RADIATED EMISSIONS	58
10.1	Standard Applicable	58
10.2	Test Procedure	58
10.3	Environmental Conditions	58
10.4	Summary of Test Results/Plots.....	59
11.	FREQUENCY STABILITY	63
11.1	Standard Applicable	63
11.2	Test Procedure	63
11.3	Environmental Conditions	63
11.4	Summary of Test Results/Plots.....	64
12.	EUT TEST PHOTO	73

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220418014RFX	Apr. 18, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

FCC Rules	Description of Test Item	Result
§1.1307, §2.1091	RF Exposure	Compliant
§22.913 (a), §24.232 (c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio(PAR) of Transmitter	Compliant
§22.917 (b), §24.238 (b)	Emission Bandwidth	Compliant
§22.917 (a), §24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917 (a), §24.238 (a)	Spurious Radiation Emissions	Compliant
§22.917 (a), §24.238 (a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10^{-7}

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	TBOX4
Model Description:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	GPRS/EDGE 850: 824~849MHz GPRS/EDGE 1900: 1850~1910MHz WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Max. RF output power:	GSM850: 31.94dBm, GSM1900: 28.65dBm WCDMA Band 2: 21.75dBm, WCDMA Band 5: 22.31dBm
Type of Modulation:	GMSK, BPSK
Antenna installation:	Internal antenna
Antenna Gain:	GSM850: 0.5dBi, GSM1900: 2.0dBi WCDMA Band 2: 2.0dBi WCDMA Band 5: 0.5dBi
Ratings:	AC 120V/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

4.5 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	GPRS 850	Low, Middle, High Channels
TM2	EDGE 850	Low, Middle, High Channels
TM3	GPRS 1900	Low, Middle, High Channels
TM4	EDGE 1900	Low, Middle, High Channels
TM5	WCDMA Band 5	Low, Middle, High Channels
TM6	HSDPA Band 5	Low, Middle, High Channels
TM7	HSUPA Band 5	Low, Middle, High Channels
TM8	WCDMA Band 2	Low, Middle, High Channels
TM9	HSDPA Band 2	Low, Middle, High Channels
TM10	HSUPA Band 2	Low, Middle, High Channels

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

6. RF OUTPUT POWER

6.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

6.2 Test Procedure

Conducted output power test method:



Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For GPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	29.98	1.5	0	H	1.5	0.5	28.98	38.45
824.2	29.86	1.5	0	V	1.5	0.5	28.86	38.45
Middle Channel								
836.6	30.20	1.5	0	H	1.5	0.5	29.20	38.45
836.6	29.26	1.5	0	V	1.5	0.5	28.26	38.45
High Channel								
848.8	29.97	1.5	0	H	1.5	0.5	28.97	38.45
848.8	29.62	1.5	0	V	1.5	0.5	28.62	38.45

EIRP For GPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	26.81	1.5	0	H	1.9	2	26.91	33.00
1850.2	26.35	1.5	0	V	1.9	2	26.45	33.00
Middle Channel								
1880	27.51	1.5	0	H	1.9	2	27.61	33.00
1880	27.51	1.5	0	V	1.9	2	27.61	33.00
High Channel								
1909.8	27.19	1.5	0	H	1.9	2	27.29	33.00
1909.8	27.55	1.5	0	V	1.9	2	27.65	33.00

ERP For EDGE Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	23.60	1.5	0	H	1.5	0.5	22.60	38.45
824.2	23.20	1.5	0	V	1.5	0.5	22.20	38.45
Middle Channel								
836.6	22.35	1.5	0	H	1.5	0.5	21.35	38.45
836.6	22.82	1.5	0	V	1.5	0.5	21.82	38.45
High Channel								
848.8	23.55	1.5	0	H	1.5	0.5	22.55	38.45
848.8	22.93	1.5	0	V	1.5	0.5	21.93	38.45

EIRP For EDGE Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	22.70	1.5	0	H	1.9	2	22.80	33.00
1850.2	23.30	1.5	0	V	1.9	2	23.40	33.00
Middle Channel								
1880	23.31	1.5	0	H	1.9	2	23.41	33.00
1880	23.30	1.5	0	V	1.9	2	23.40	33.00
High Channel								
1909.8	22.98	1.5	0	H	1.9	2	23.08	33.00
1909.8	22.89	1.5	0	V	1.9	2	22.99	33.00

ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.42	1.5	0	H	1.5	0.5	20.42	38.45
826.4	21.47	1.5	0	V	1.5	0.5	20.47	38.45
Middle Channel								
836.6	20.94	1.5	0	H	1.5	0.5	19.94	38.45
836.6	21.02	1.5	0	V	1.5	0.5	20.02	38.45
High Channel								
846.6	21.12	1.5	0	H	1.5	0.5	20.12	38.45
846.6	21.64	1.5	0	V	1.5	0.5	20.64	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	20.71	1.5	0	H	1.5	0.5	19.71	38.45
826.4	21.15	1.5	0	V	1.5	0.5	20.15	38.45
Middle Channel								
836.6	21.19	1.5	0	H	1.5	0.5	20.19	38.45
836.6	20.64	1.5	0	V	1.5	0.5	19.64	38.45
High Channel								
846.6	21.45	1.5	0	H	1.5	0.5	20.45	38.45
846.6	21.67	1.5	0	V	1.5	0.5	20.67	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	19.58	1.5	0	H	1.5	0.5	18.58	38.45
826.4	20.42	1.5	0	V	1.5	0.5	19.42	38.45
Middle Channel								
836.6	20.34	1.5	0	H	1.5	0.5	19.34	38.45
836.6	19.45	1.5	0	V	1.5	0.5	18.45	38.45
High Channel								
846.6	19.87	1.5	0	H	1.5	0.5	18.87	38.45
846.6	20.28	1.5	0	V	1.5	0.5	19.28	38.45

EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	19.95	1.5	0	H	1.9	2	20.05	33
1852.4	19.80	1.5	0	V	1.9	2	19.90	33
Middle Channel								
1880	20.72	1.5	0	H	1.9	2	20.82	33
1880	20.50	1.5	0	V	1.9	2	20.60	33
High Channel								
1907.6	20.74	1.5	0	H	1.9	2	20.84	33
1907.6	19.36	1.5	0	V	1.9	2	19.46	33

EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	19.25	1.5	0	H	1.9	2	19.35	33
1852.4	19.69	1.5	0	V	1.9	2	19.79	33
Middle Channel								
1880	19.87	1.5	0	H	1.9	2	19.97	33
1880	19.06	1.5	0	V	1.9	2	19.16	33
High Channel								
1907.6	19.27	1.5	0	H	1.9	2	19.37	33
1907.6	20.75	1.5	0	V	1.9	2	20.85	33

EIRP For HSUPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	19.23	1.5	0	H	1.9	2	19.33	33
1852.4	18.59	1.5	0	V	1.9	2	18.69	33
Middle Channel								
1880	18.59	1.5	0	H	1.9	2	18.69	33
1880	18.97	1.5	0	V	1.9	2	19.07	33
High Channel								
1907.6	18.80	1.5	0	H	1.9	2	18.90	33
1907.6	19.53	1.5	0	V	1.9	2	19.63	33

Note: Result = Substitute - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GPRS(1 Slot)	Low Channel	824.2	31.94	38.45
	Middle Channel	836.6	31.76	38.45
	High Channel	848.8	31.81	38.45
EDGE(1 Slot)	Low Channel	824.2	25.47	38.45
	Middle Channel	836.6	25.44	38.45
	High Channel	848.8	25.88	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GPRS(1 Slot)	Low Channel	1850.2	28.65	33.0
	Middle Channel	1880.0	28.65	33.0
	High Channel	1909.8	28.48	33.0
EDGE(1 Slot)	Low Channel	1850.2	24.32	33.0
	Middle Channel	1880.0	24.17	33.0
	High Channel	1909.8	24.20	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.25	38.45
	Middle Channel	836.6	22.31	38.45
	High Channel	846.6	22.30	38.45
HSDPA	Low Channel	826.4	21.30	38.45
	Middle Channel	836.6	21.43	38.45
	High Channel	846.6	21.37	38.45
HSUPA	Low Channel	826.4	20.79	38.45
	Middle Channel	836.6	20.56	38.45
	High Channel	846.6	21.23	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	21.63	33.00
	Middle Channel	1880.0	21.75	33.00
	High Channel	1907.6	21.34	33.00
HSDPA	Low Channel	1852.4	20.54	33.00
	Middle Channel	1880.0	20.84	33.00
	High Channel	1907.6	20.37	33.00
HSUPA	Low Channel	1852.4	20.78	33.00
	Middle Channel	1880.0	20.95	33.00
	High Channel	1907.6	20.51	33.00

7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER


7.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

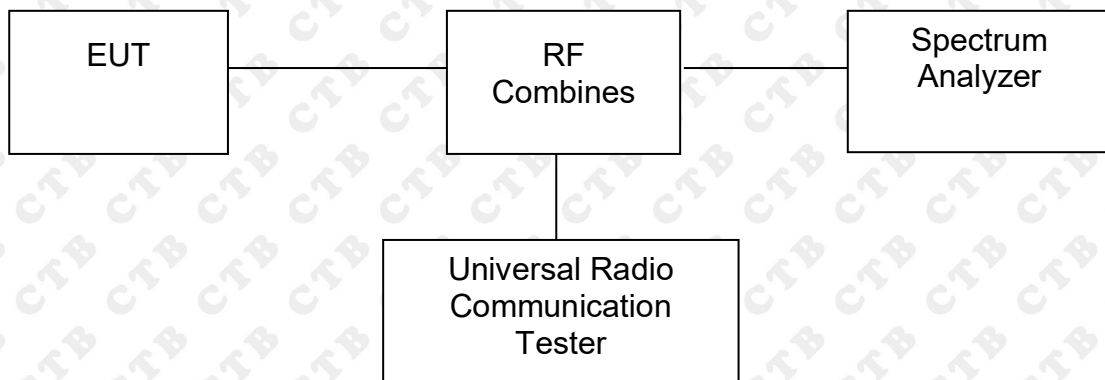

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

7.4 Summary of Test Results

Only the worst case was selected to record
For GSM850

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GPRS(1 Slot)	190	836.6	2.70	13
EDGE(1 Slot)	190	836.6	8.79	13

For PCS 1900

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GPRS(1 Slot)	512	1850.2	2.75	13
EDGE(1 Slot)	512	1850.2	6.96	13


For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	4182	836.4	3.21	13
HSDPA	4182	836.4	3.18	13
HSUPA	4182	836.4	2.89	13


For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	3.25	13
HSDPA	9400	1852.4	3.08	13
HSUPA	9400	1852.4	2.98	13

GSM :

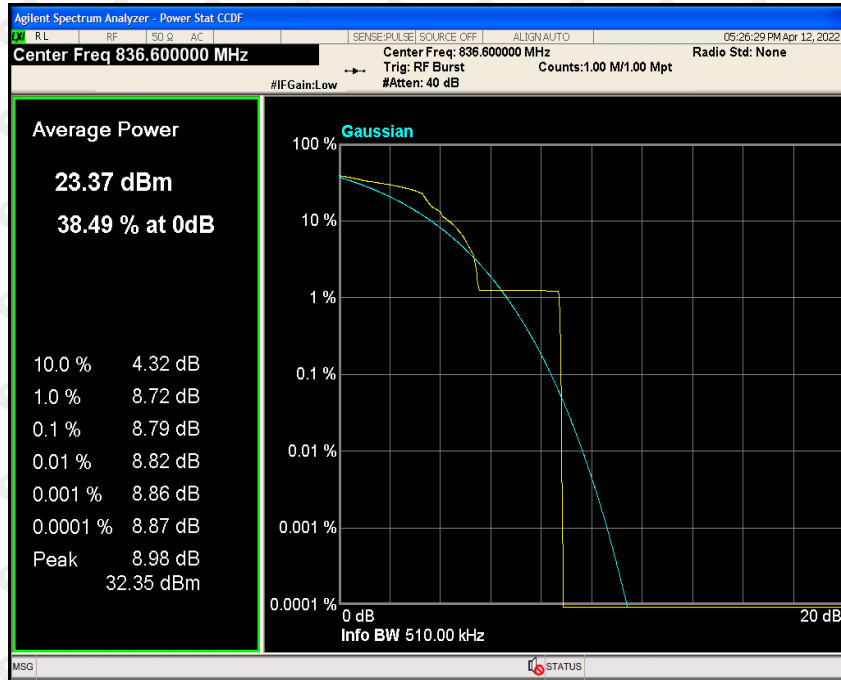

WCDMA:

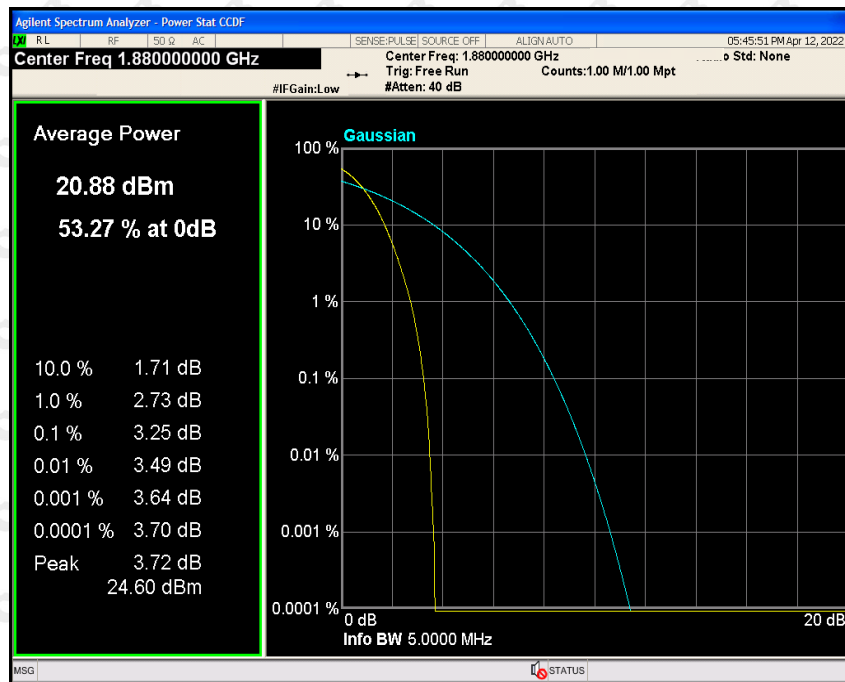

8. EMISSION BANDWIDTH

8.1 Standard Applicable


According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

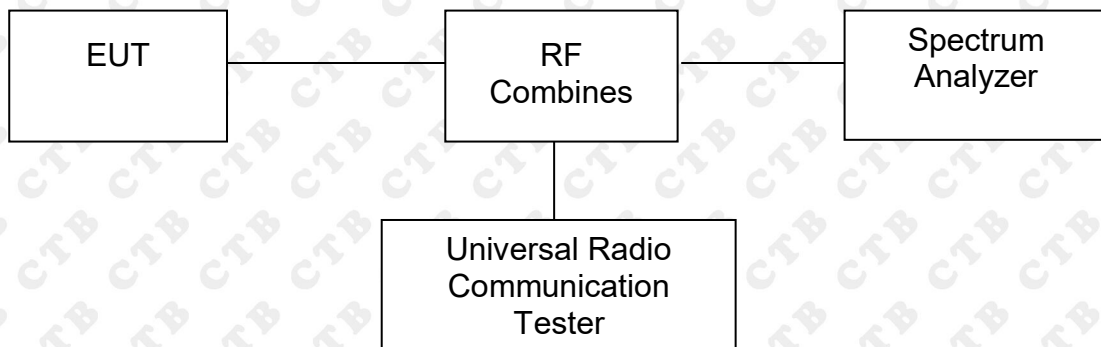

8.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

8.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GPRS	128	824.2	245.123	316.804
	190	836.6	247.612	318.565
	251	848.8	246.032	314.979
EDGE	128	824.2	229.630	305.853
	190	836.6	238.457	313.663
	251	848.8	249.717	318.269

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GPRS	512	1850.2	248.276	313.808
	661	1880.0	249.079	322.991
	810	1909.8	254.711	327.268
EDGE	512	1850.2	244.905	315.461
	661	1880.0	249.615	306.013
	810	1909.8	249.625	307.567


For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	4132	826.4	4119.746	4689.947
	4183	836.6	4129.094	4689.155
	4233	846.6	4106.032	4667.652
HSDPA	4132	826.4	4134.730	4676.178
	4183	836.6	4091.057	4674.309
	4233	846.6	4115.480	4697.119
HSUPA	4132	826.4	4105.361	4694.468
	4183	836.6	4138.751	5738.599
	4233	846.6	4142.527	5786.510


For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	9262	1852.4	4109.079	4671.221
	9400	1880.0	4104.586	4688.468
	9538	1907.6	4109.861	4697.346
HSDPA	9262	1852.4	4114.414	4677.713
	9400	1880.0	4127.021	4644.582
	9538	1907.6	4099.818	4681.782
HSUPA	9262	1852.4	4101.214	4675.081
	9400	1880.0	4129.880	4691.289
	9538	1907.6	4117.852	4694.625


For Cellular Band

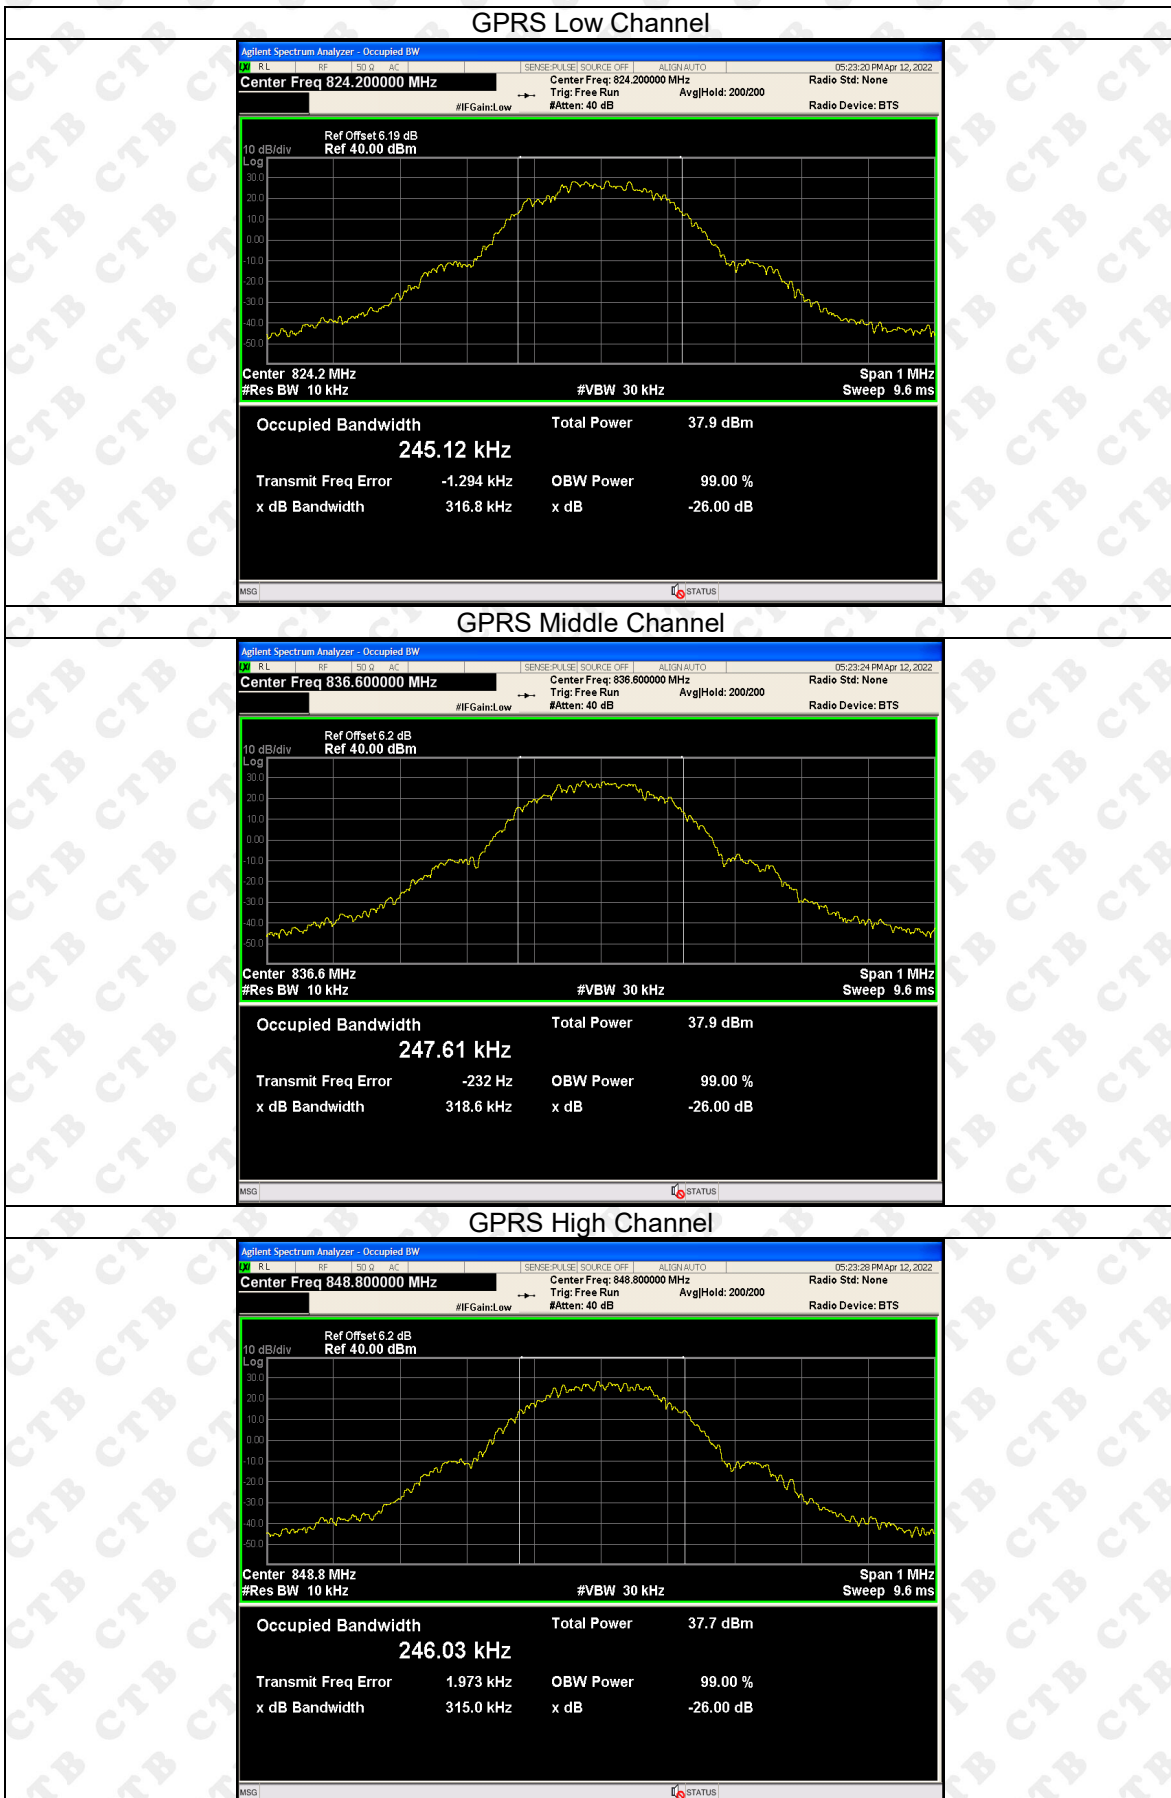


EDGE Low Channel

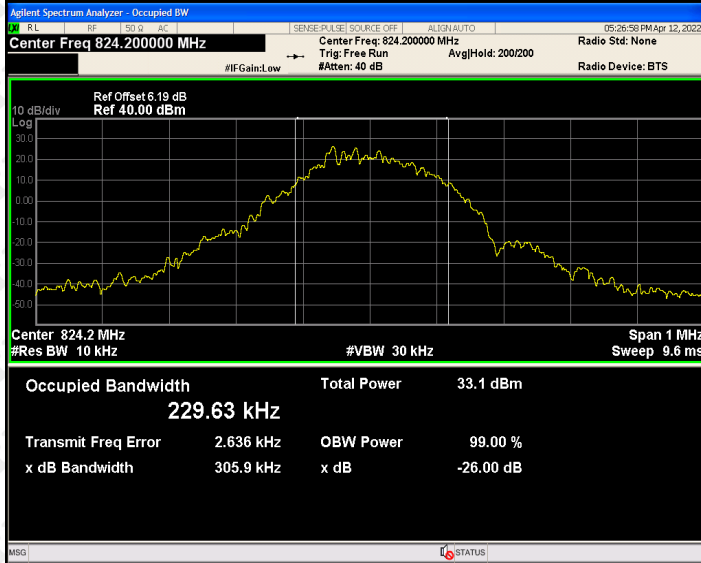

EDGE Middle Channel



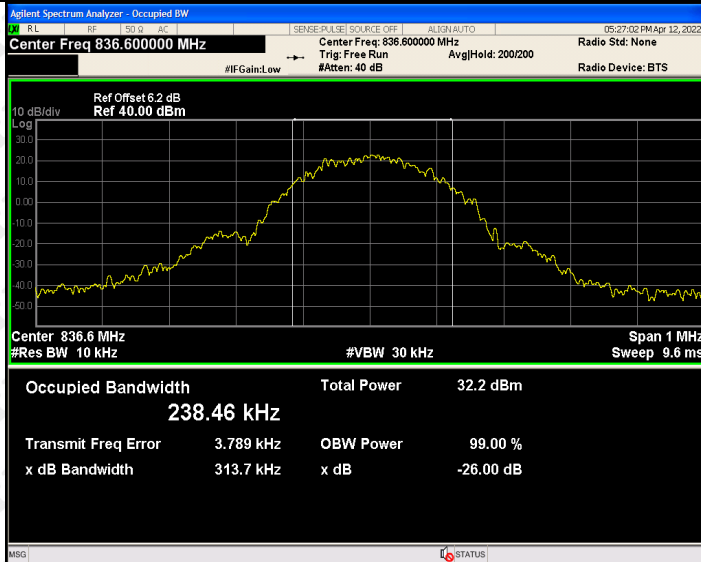


EDGE High Channel

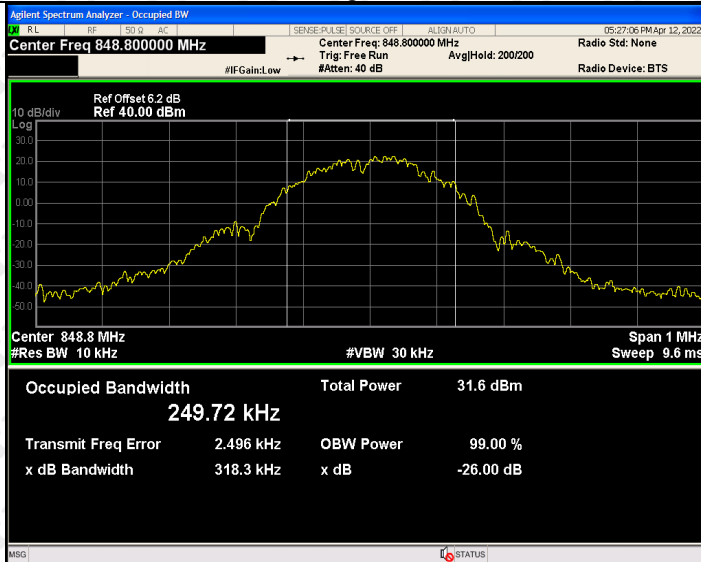





For PCS Band






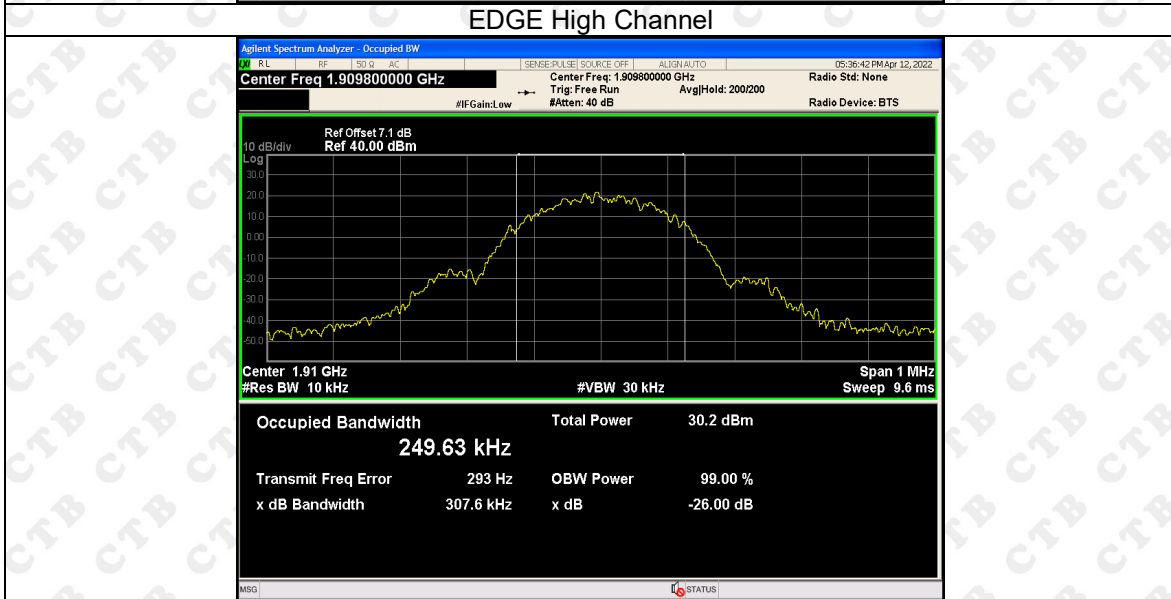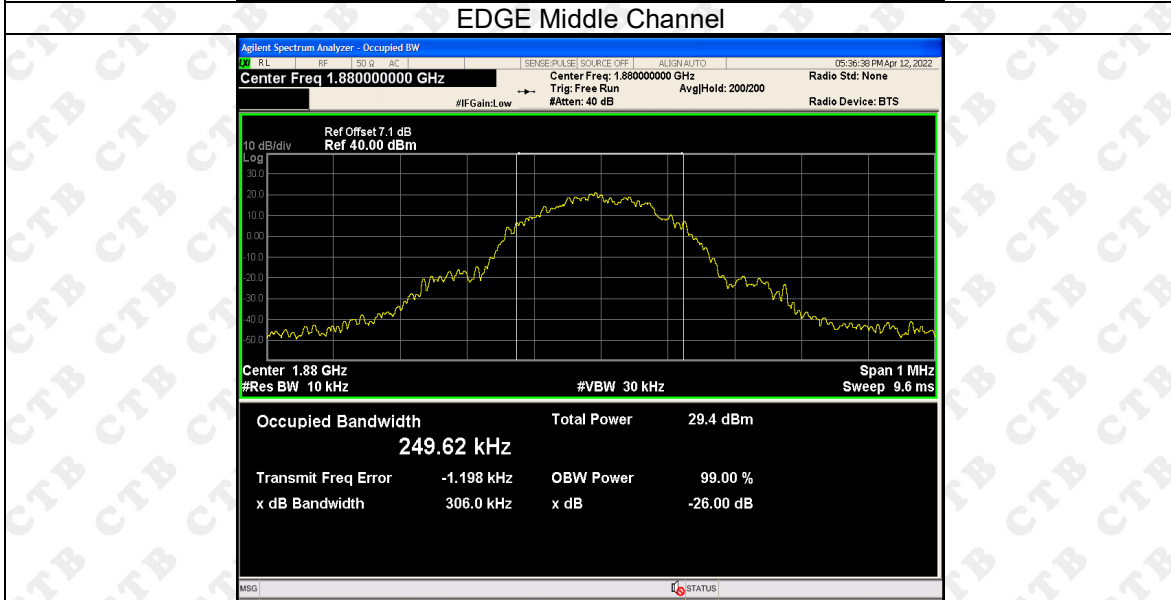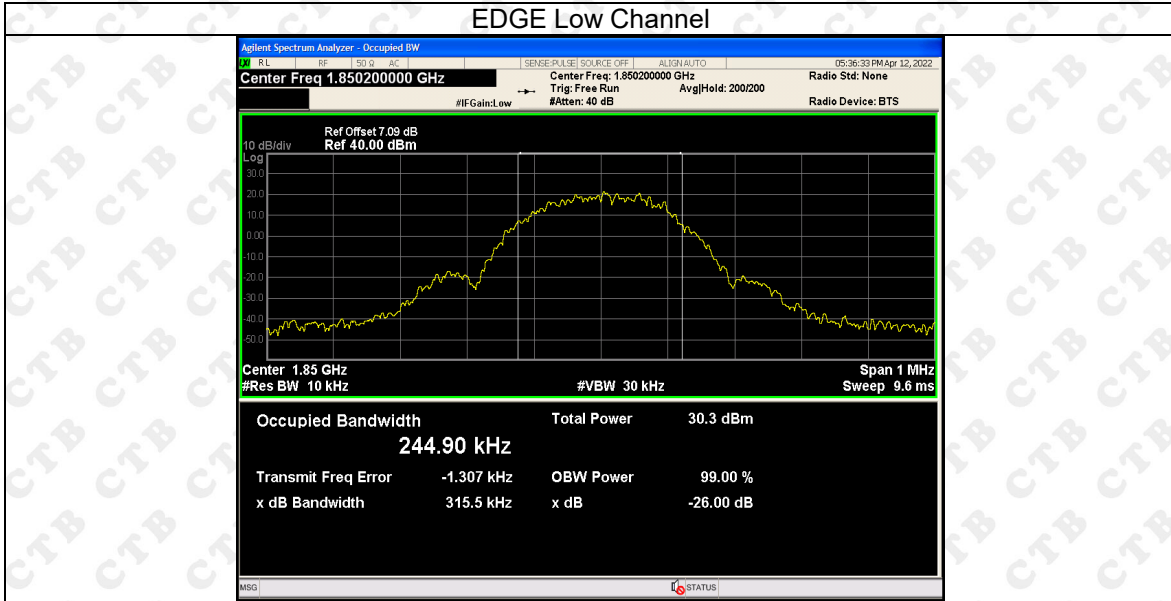


For Band V



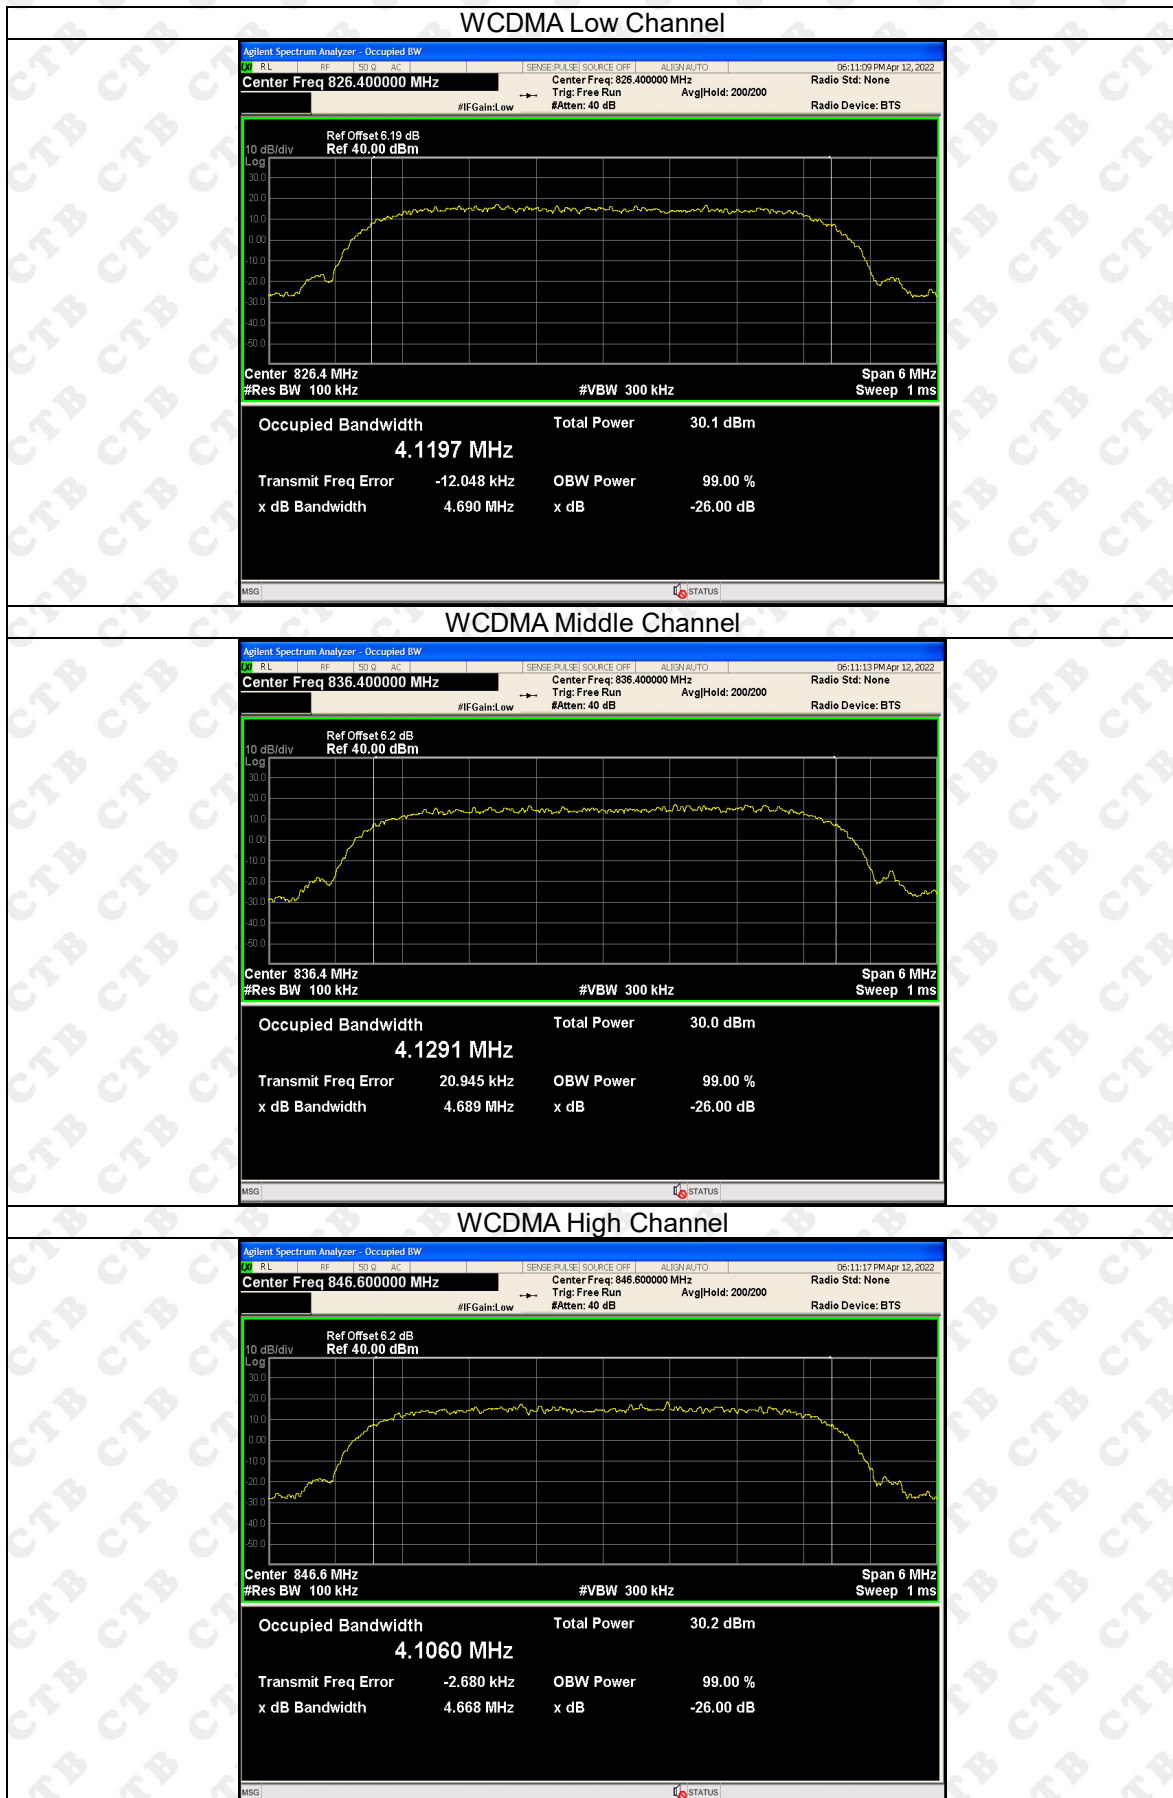


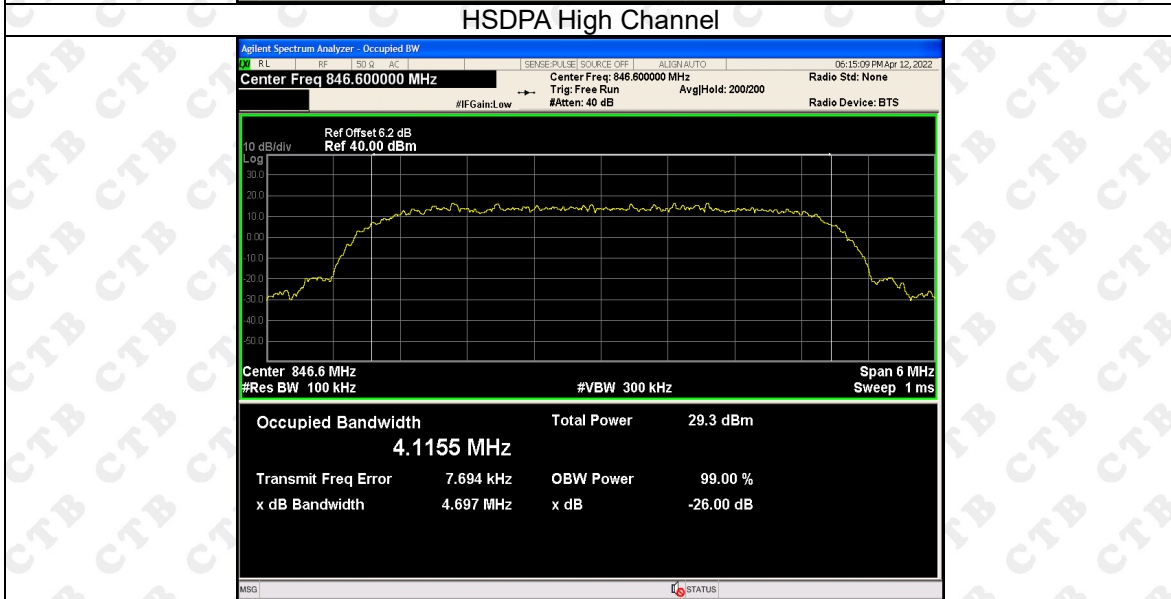
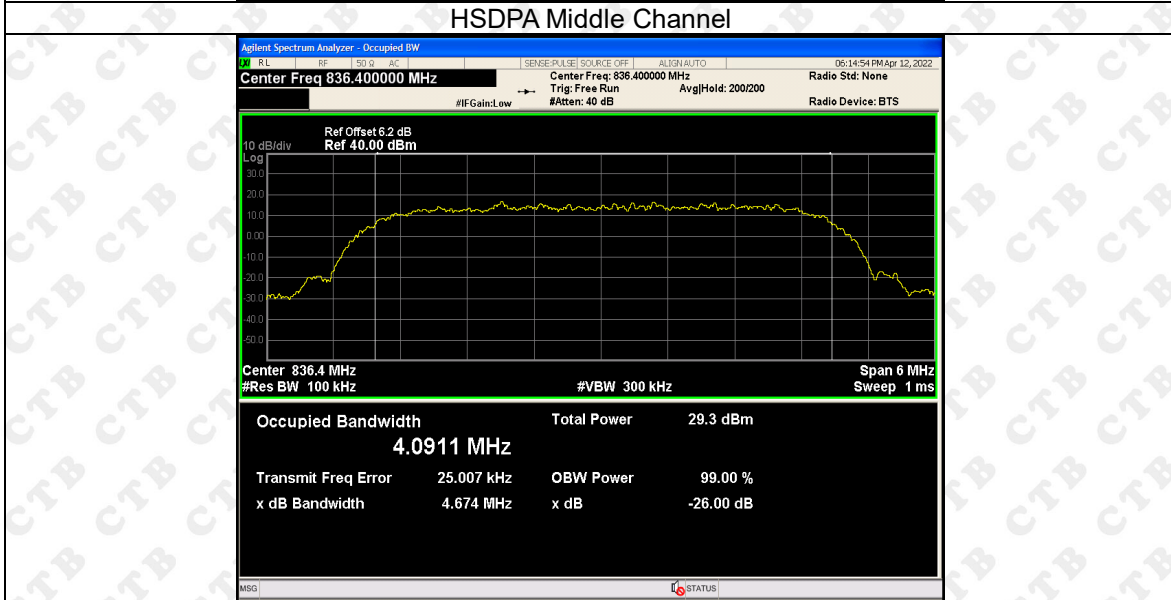
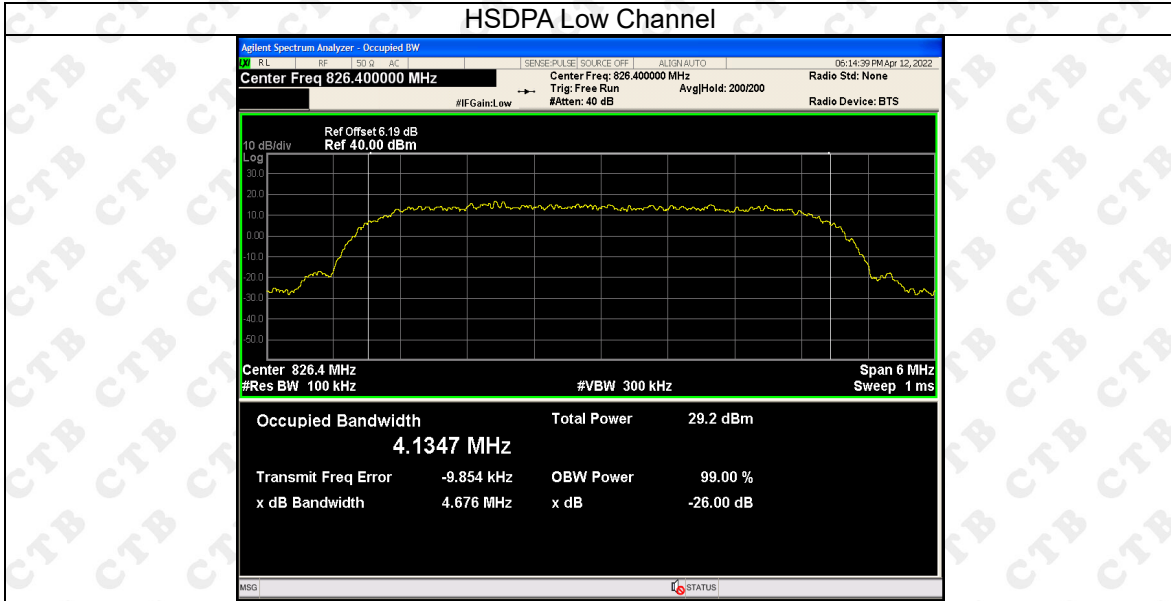


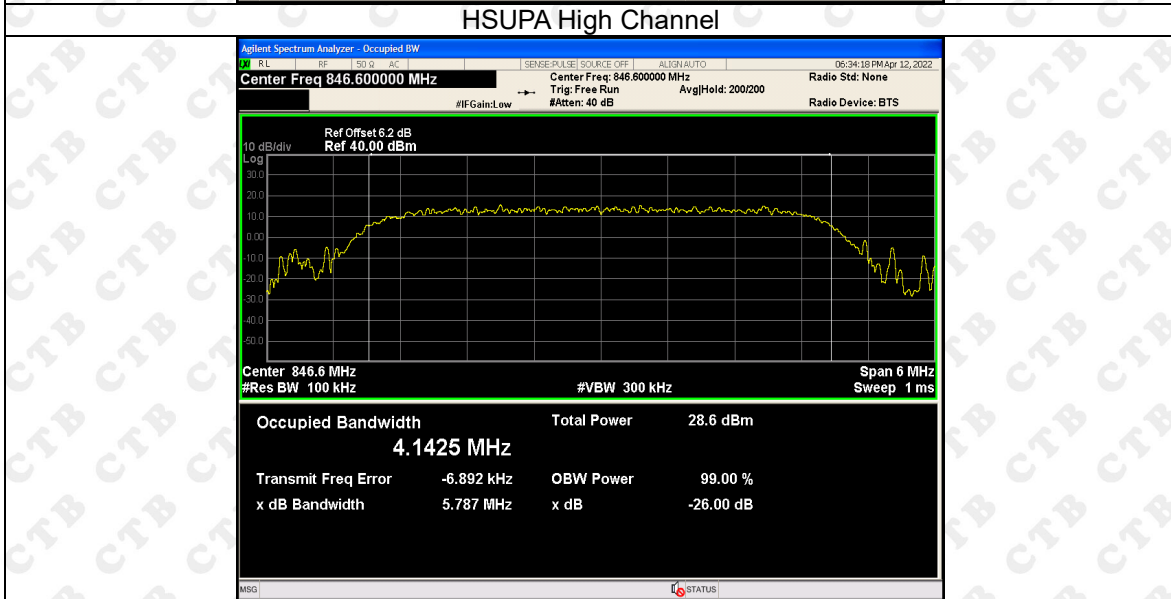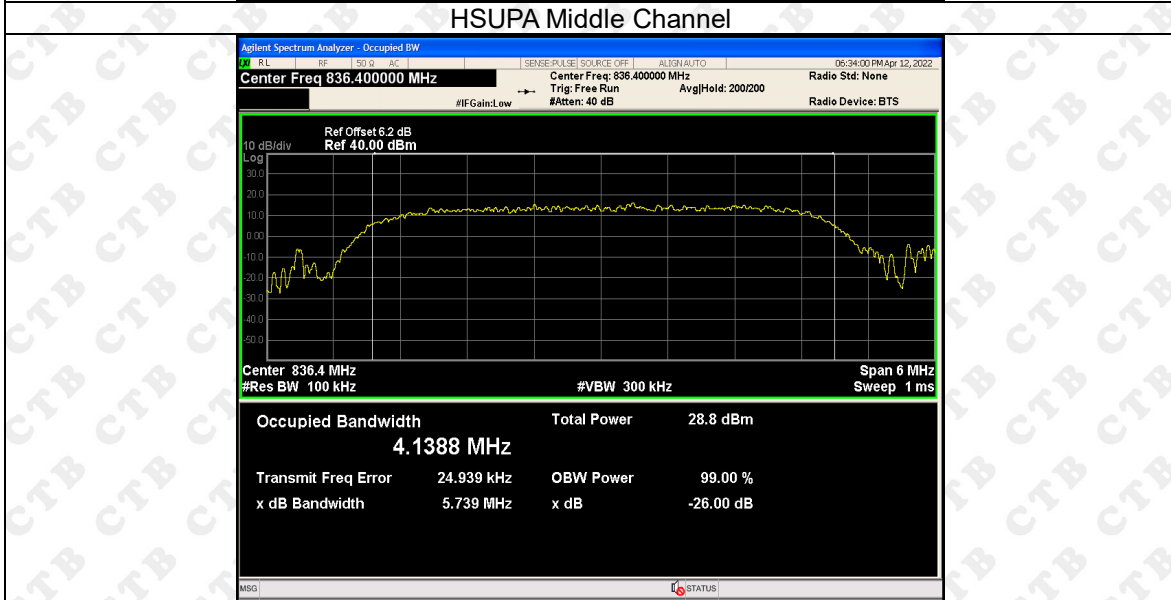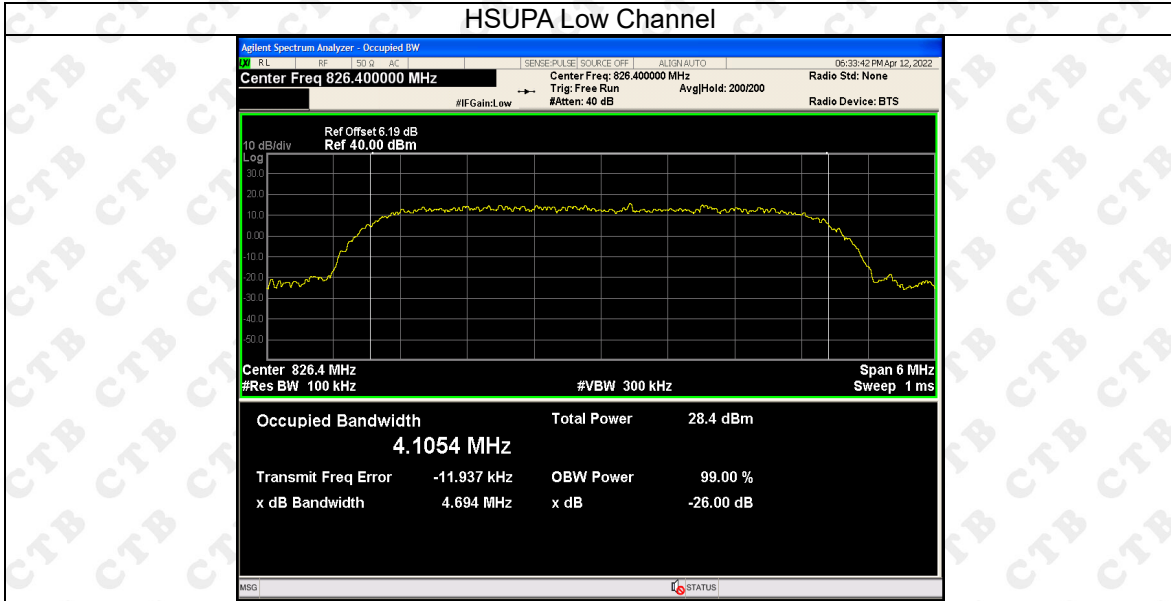

For Band II

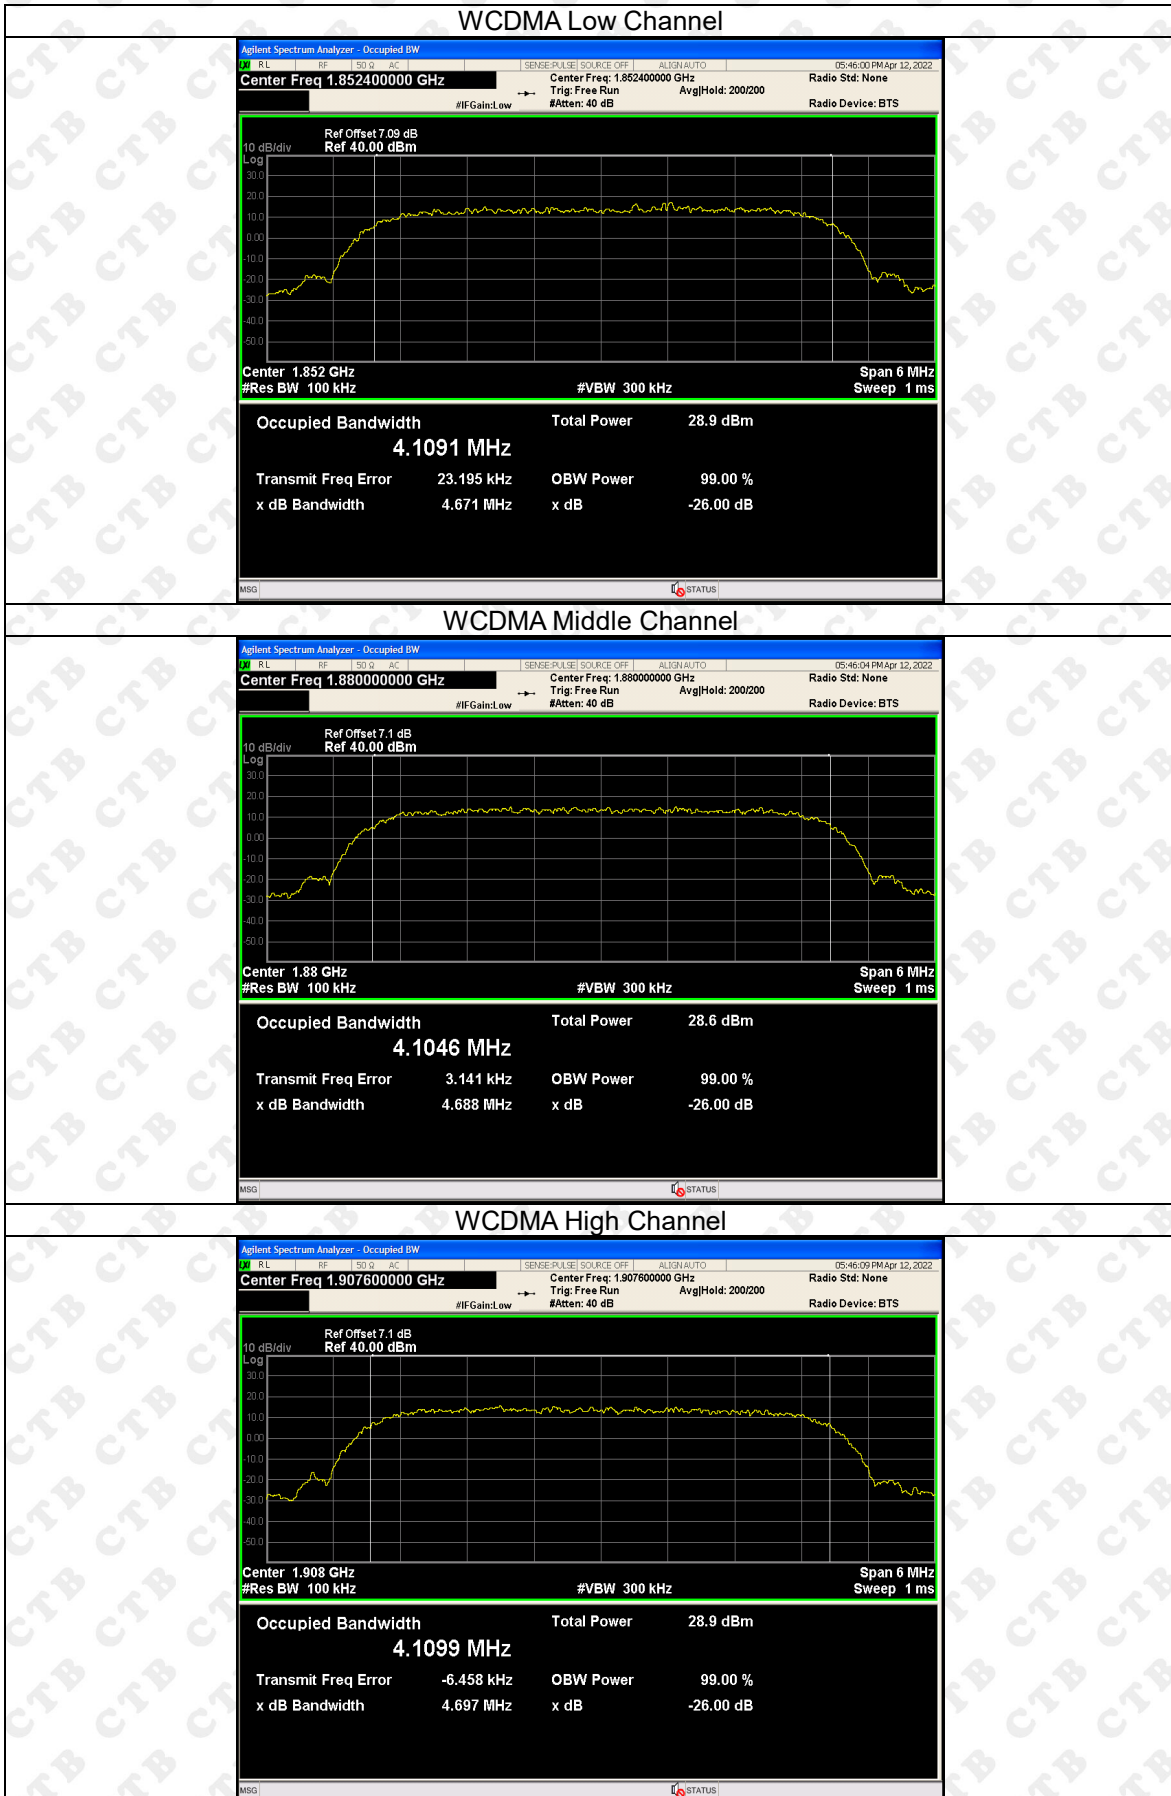

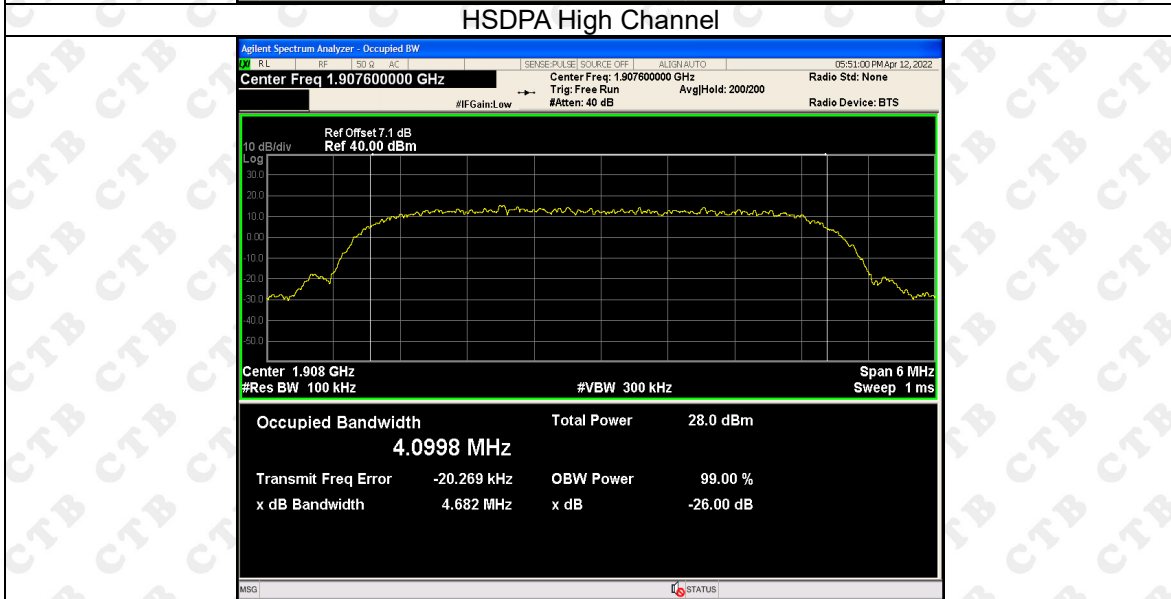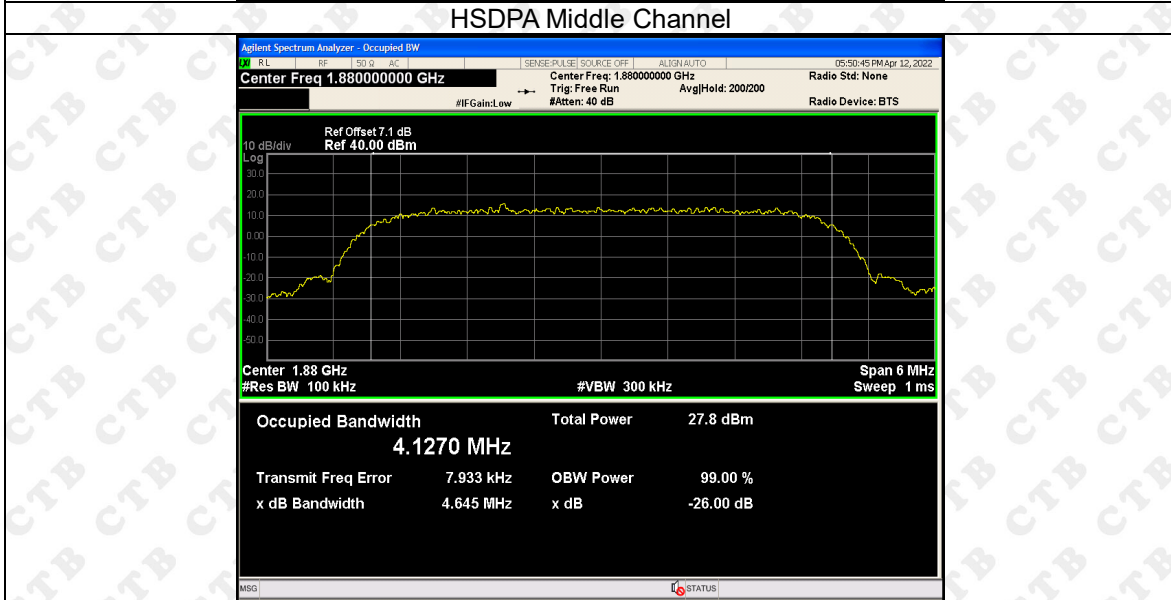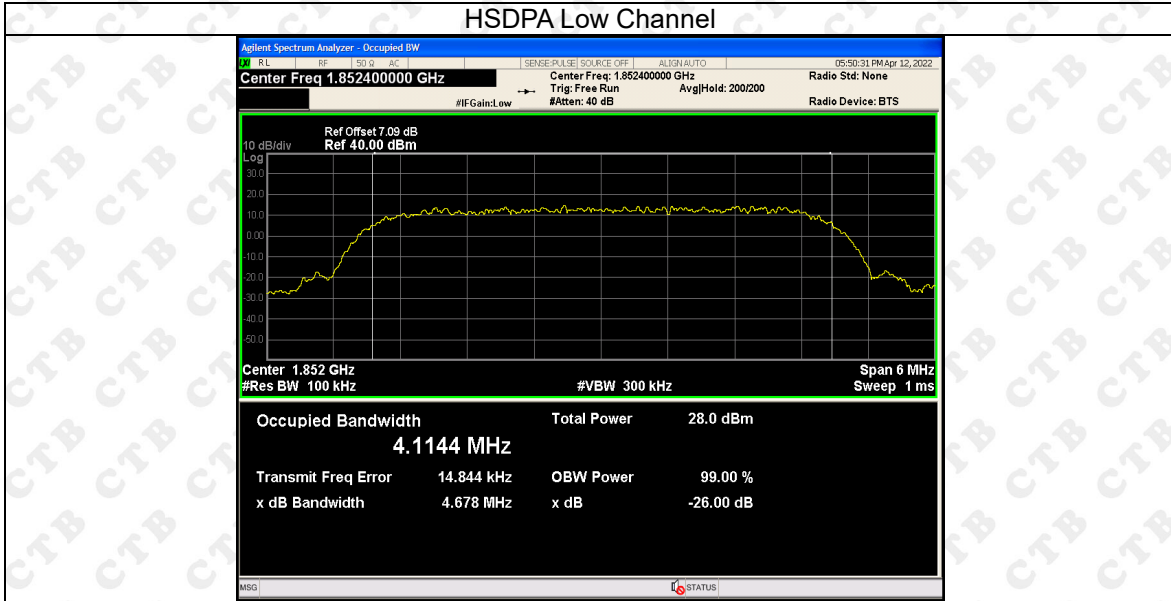

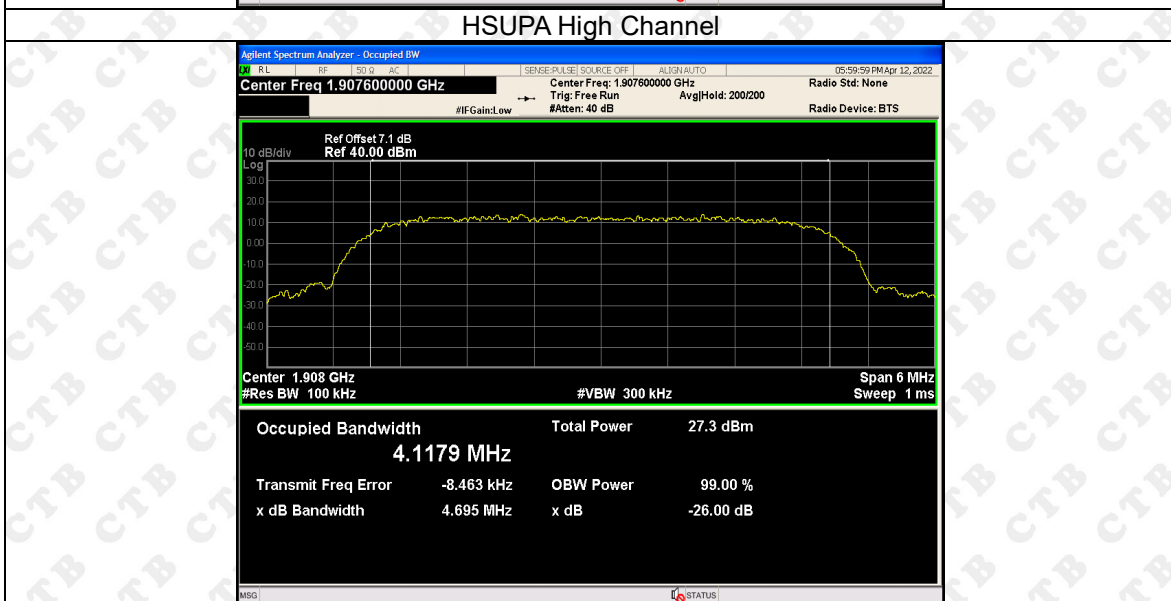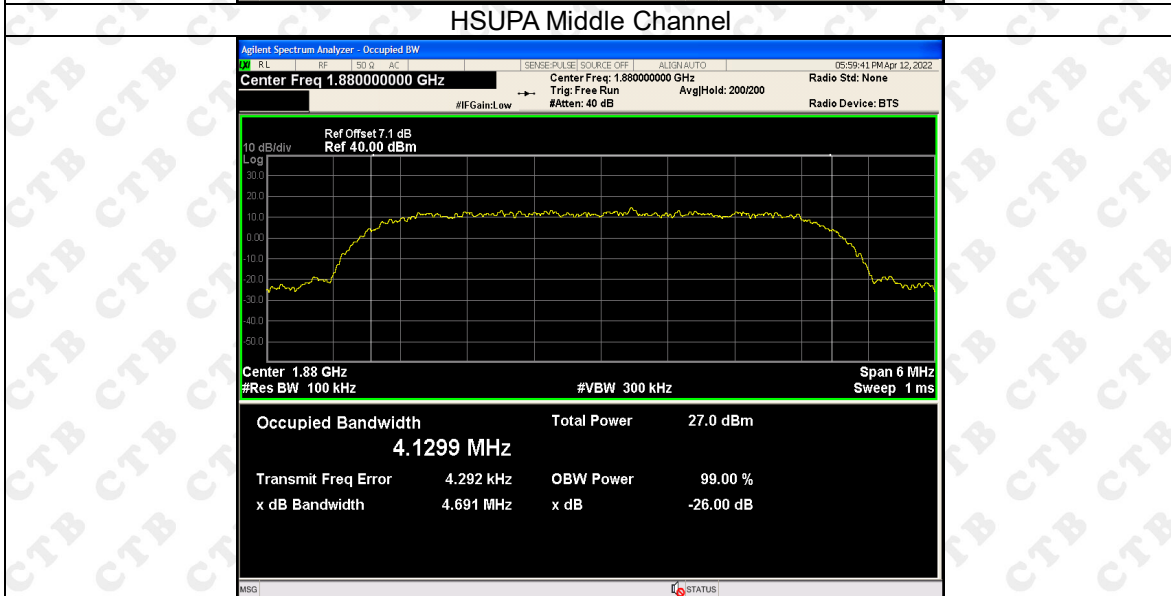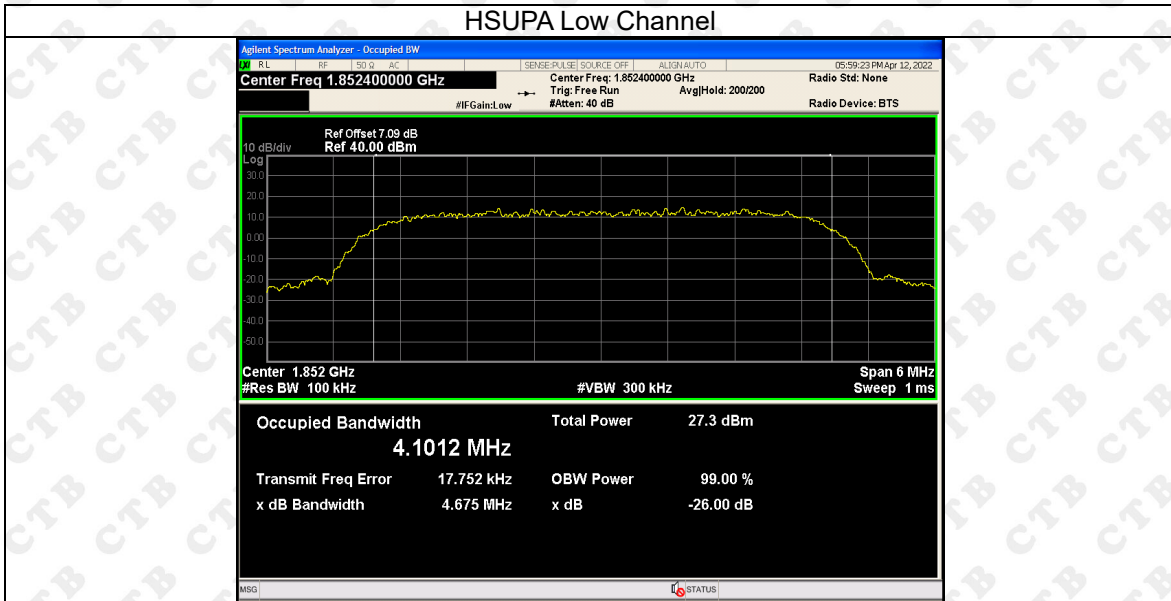

9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

9.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

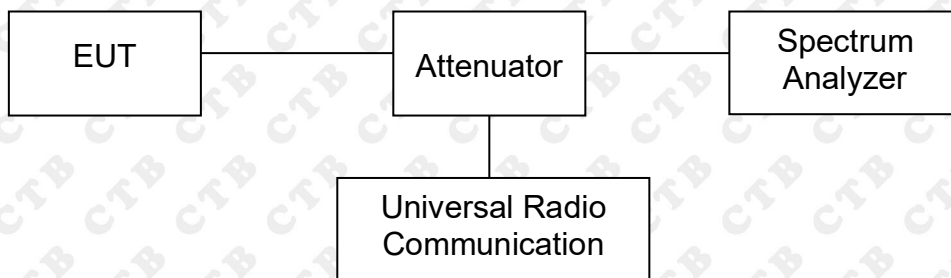


9.3 Environmental Conditions




Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

9.4 Summary of Test Results/Plots


Please refer to the following test plots
For Cellular Band

<p>GPRS Low Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.19 dB Ref 30.00 dBm Mkr1 824.61 MHz 31.830 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 10,000 GHz Sweep 18.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>824.61 MHz</td> <td>31.830 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>8.956 64 GHz</td> <td>-29.759 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	824.61 MHz	31.830 dBm				2	N	1	f	8.956 64 GHz	-29.759 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	824.61 MHz	31.830 dBm																							
2	N	1	f	8.956 64 GHz	-29.759 dBm																							
<p>GPRS Middle Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.2 dB Ref 30.00 dBm Mkr1 837.07 MHz 32.098 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 10,000 GHz Sweep 18.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>837.07 MHz</td> <td>32.098 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.672 05 GHz</td> <td>-30.884 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	837.07 MHz	32.098 dBm				2	N	1	f	2.672 05 GHz	-30.884 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	837.07 MHz	32.098 dBm																							
2	N	1	f	2.672 05 GHz	-30.884 dBm																							
<p>GPRS High Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.2 dB Ref 30.00 dBm Mkr1 849.53 MHz 31.857 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 10,000 GHz Sweep 18.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>849.53 MHz</td> <td>31.857 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>5.909 81 GHz</td> <td>-30.337 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	849.53 MHz	31.857 dBm				2	N	1	f	5.909 81 GHz	-30.337 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	849.53 MHz	31.857 dBm																							
2	N	1	f	5.909 81 GHz	-30.337 dBm																							

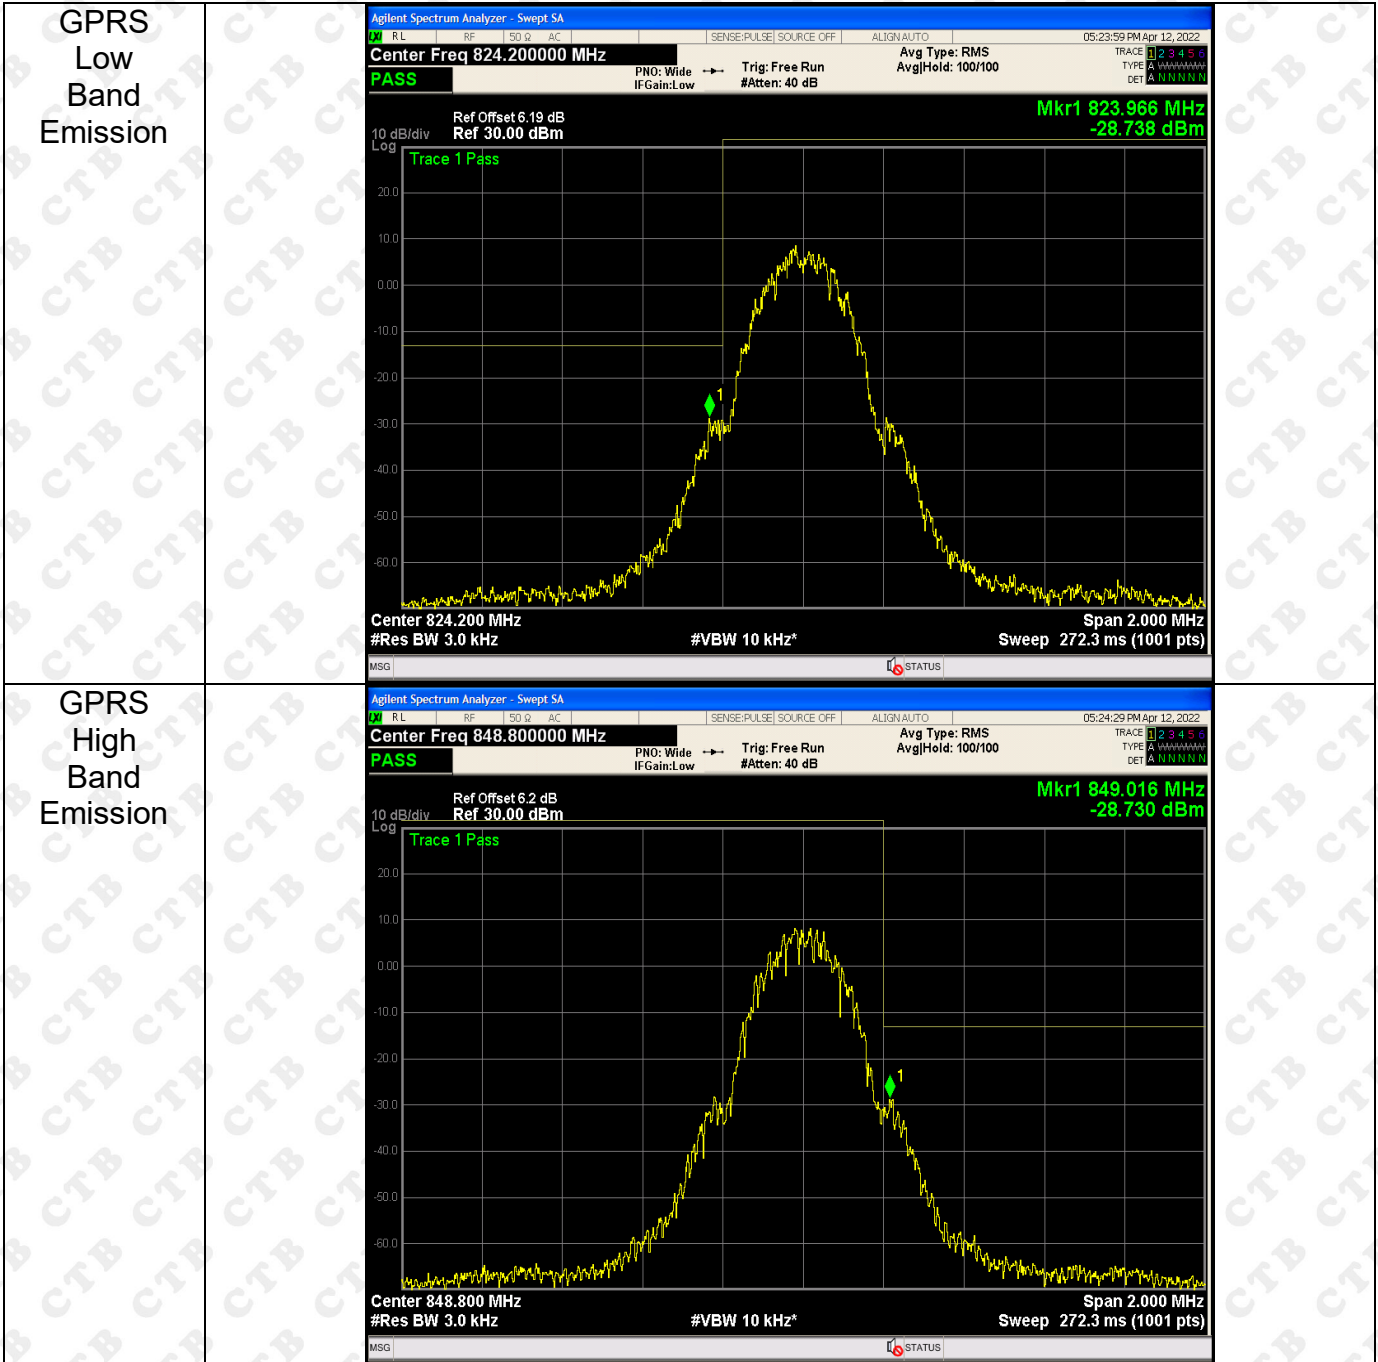

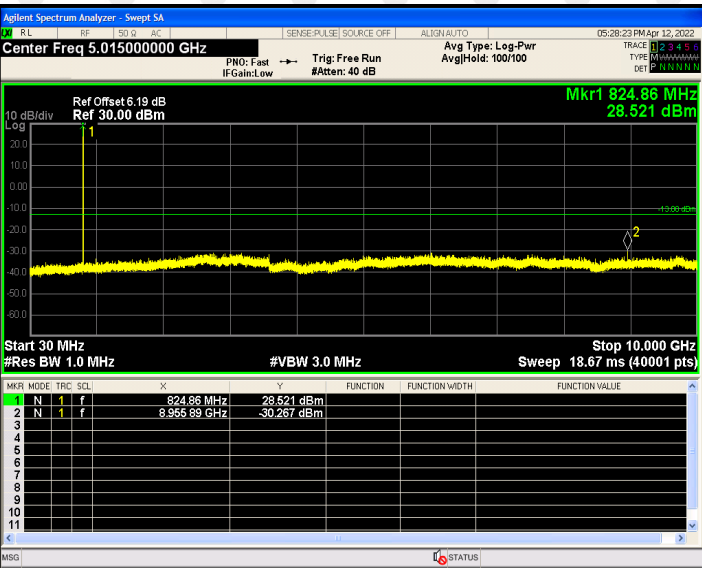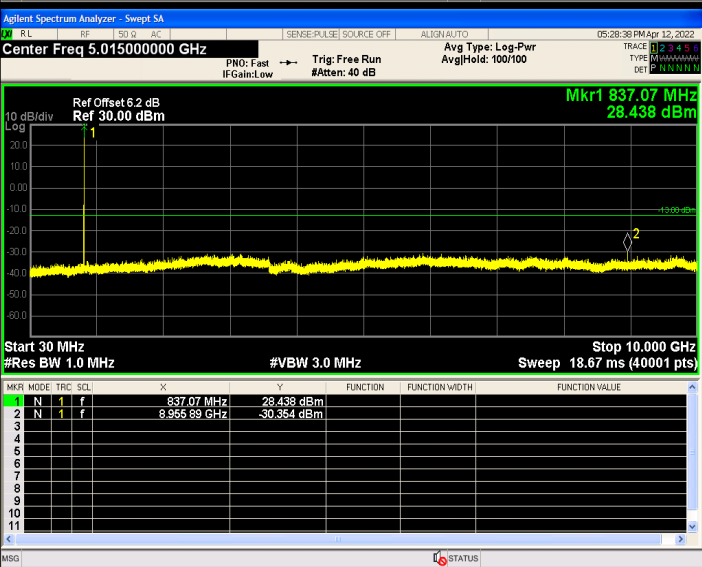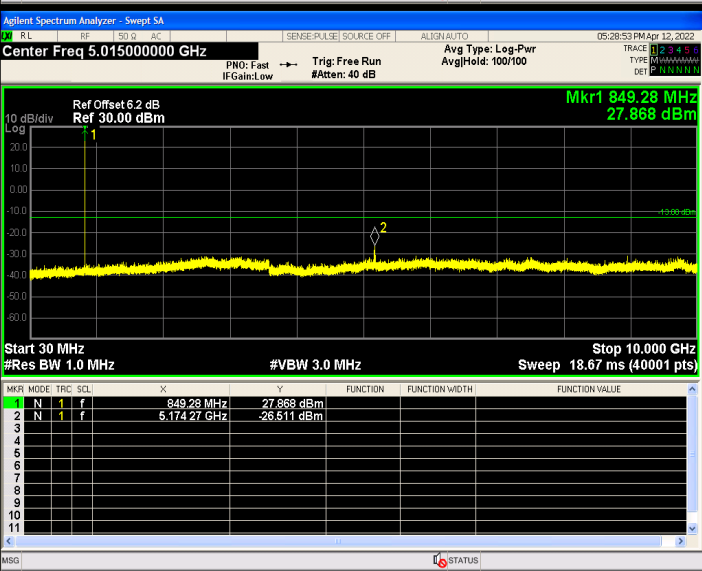
<p>EDGE Low Channel</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.19 dB Ref 30.00 dBm Mkr1 824.86 MHz 28.521 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 10,000 GHz Sweep 18.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>824.86 MHz</td> <td>28.521 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>8.955 59 GHz</td> <td>-30.267 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	824.86 MHz	28.521 dBm				2	N	1	f	8.955 59 GHz	-30.267 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	824.86 MHz	28.521 dBm																								
2	N	1	f	8.955 59 GHz	-30.267 dBm																								
<p>EDGE Middle Channel</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.2 dB Ref 30.00 dBm Mkr1 837.07 MHz 28.438 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 10,000 GHz Sweep 18.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>837.07 MHz</td> <td>28.438 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>8.955 89 GHz</td> <td>-30.364 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	837.07 MHz	28.438 dBm				2	N	1	f	8.955 89 GHz	-30.364 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	837.07 MHz	28.438 dBm																								
2	N	1	f	8.955 89 GHz	-30.364 dBm																								
<p>EDGE High Channel</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.2 dB Ref 30.00 dBm Mkr1 849.28 MHz 27.868 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 10,000 GHz Sweep 18.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>849.28 MHz</td> <td>27.868 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>5.174 27 GHz</td> <td>-26.511 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	849.28 MHz	27.868 dBm				2	N	1	f	5.174 27 GHz	-26.511 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	849.28 MHz	27.868 dBm																								
2	N	1	f	5.174 27 GHz	-26.511 dBm																								

EDGE
Low
Band
Emission

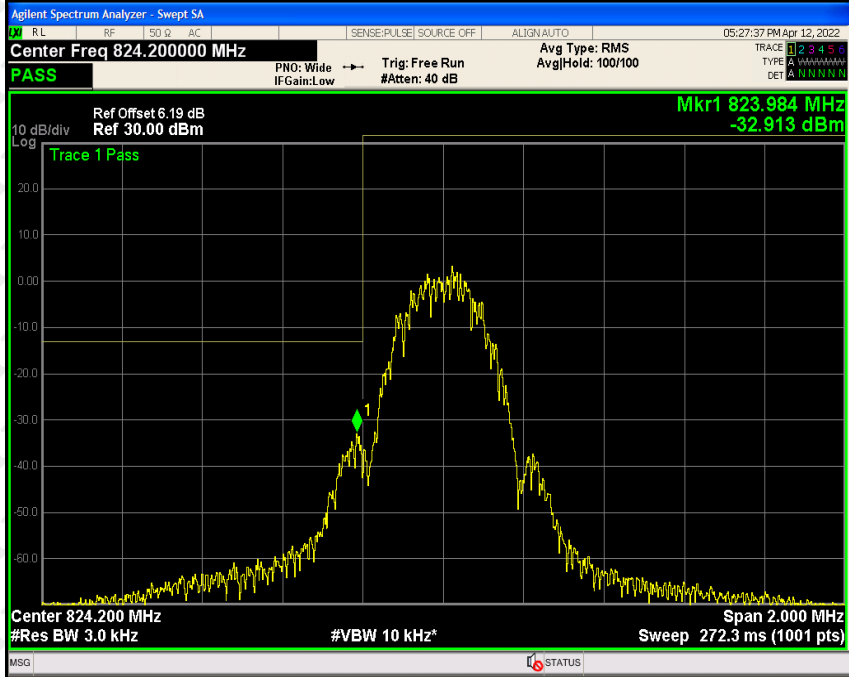


EDGE
High
Band
Emission

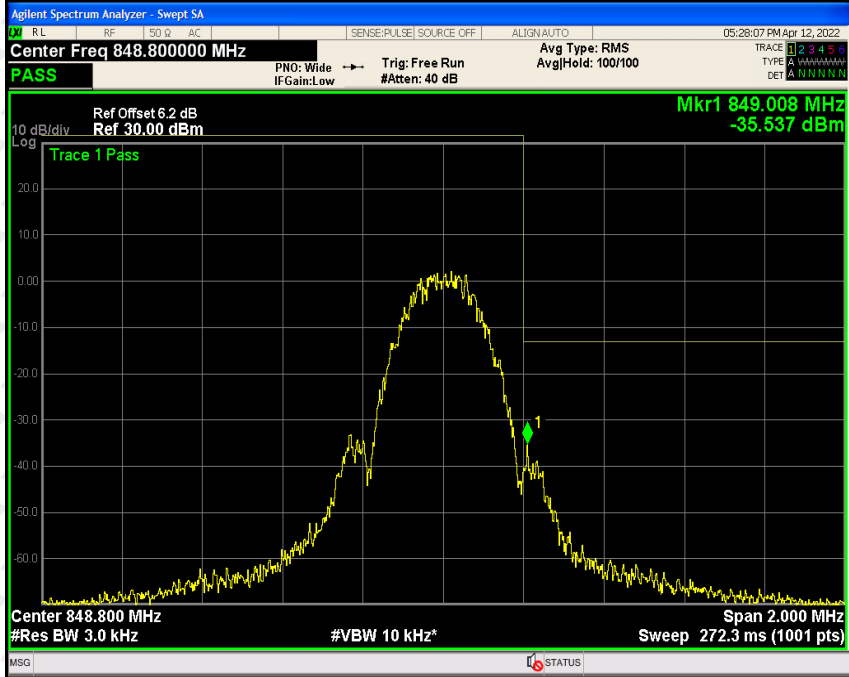


For PCS Band

<p>GPRS Low Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.015000000 GHz Ref Offset 7.09 dB Ref 30.00 dBm Mkr1 1.850 8 GHz 28.320 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20.000 GHz Sweep 50.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.850 8 GHz</td> <td>28.320 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.133 3 GHz</td> <td>-24.015 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.850 8 GHz	28.320 dBm				2	N	1	f	18.133 3 GHz	-24.015 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.850 8 GHz	28.320 dBm																								
2	N	1	f	18.133 3 GHz	-24.015 dBm																								
<p>GPRS Middle Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.015000000 GHz Ref Offset 7.1 dB Ref 30.00 dBm Mkr1 1.880 2 GHz 27.833 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20.000 GHz Sweep 50.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.880 2 GHz</td> <td>27.833 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.885 2 GHz</td> <td>-23.794 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.880 2 GHz	27.833 dBm				2	N	1	f	18.885 2 GHz	-23.794 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.880 2 GHz	27.833 dBm																								
2	N	1	f	18.885 2 GHz	-23.794 dBm																								
<p>GPRS High Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.015000000 GHz Ref Offset 7.1 dB Ref 30.00 dBm Mkr1 1.910 2 GHz 28.317 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20.000 GHz Sweep 50.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.910 2 GHz</td> <td>28.317 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.763 9 GHz</td> <td>-24.063 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.910 2 GHz	28.317 dBm				2	N	1	f	18.763 9 GHz	-24.063 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.910 2 GHz	28.317 dBm																								
2	N	1	f	18.763 9 GHz	-24.063 dBm																								

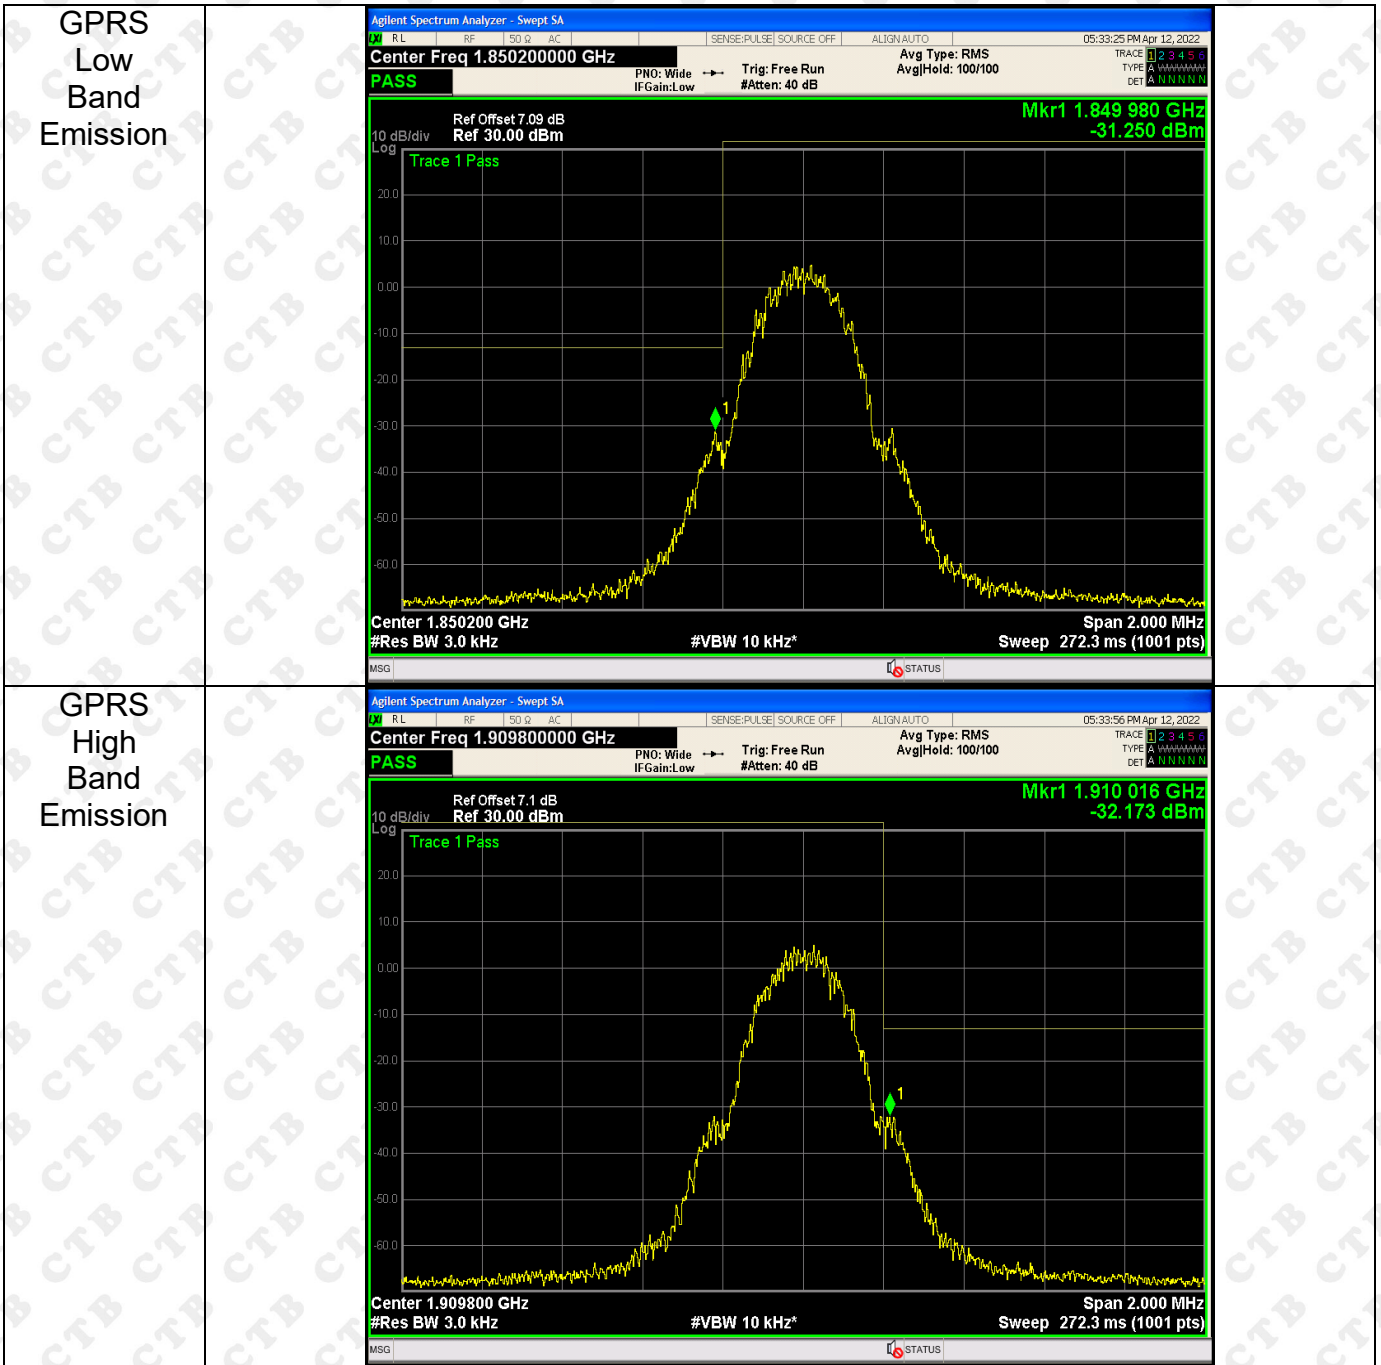


<p>EDGE Low Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.850 8 GHz</td> <td>27.073 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>16.437 9 GHz</td> <td>-24.014 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.850 8 GHz	27.073 dBm				2	N	1	f	16.437 9 GHz	-24.014 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.850 8 GHz	27.073 dBm																								
2	N	1	f	16.437 9 GHz	-24.014 dBm																								
<p>EDGE Middle Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.880 2 GHz</td> <td>26.438 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>16.196 2 GHz</td> <td>-23.695 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.880 2 GHz	26.438 dBm				2	N	1	f	16.196 2 GHz	-23.695 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.880 2 GHz	26.438 dBm																								
2	N	1	f	16.196 2 GHz	-23.695 dBm																								
<p>EDGE High Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.910 2 GHz</td> <td>26.540 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.919 6 GHz</td> <td>-23.959 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.910 2 GHz	26.540 dBm				2	N	1	f	18.919 6 GHz	-23.959 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.910 2 GHz	26.540 dBm																								
2	N	1	f	18.919 6 GHz	-23.959 dBm																								

EDGE
Low
Band
Emission

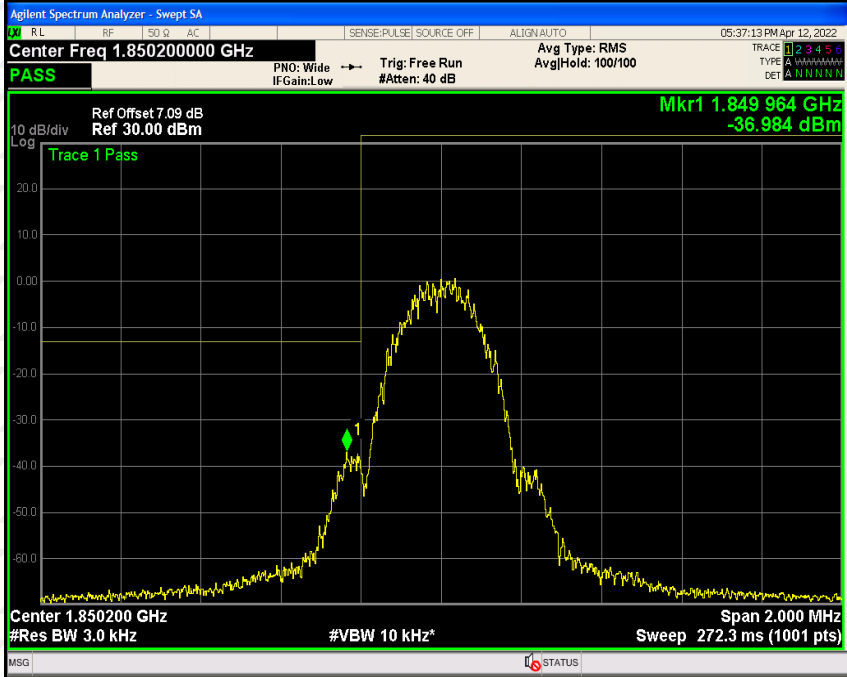




EDGE
High
Band
Emission

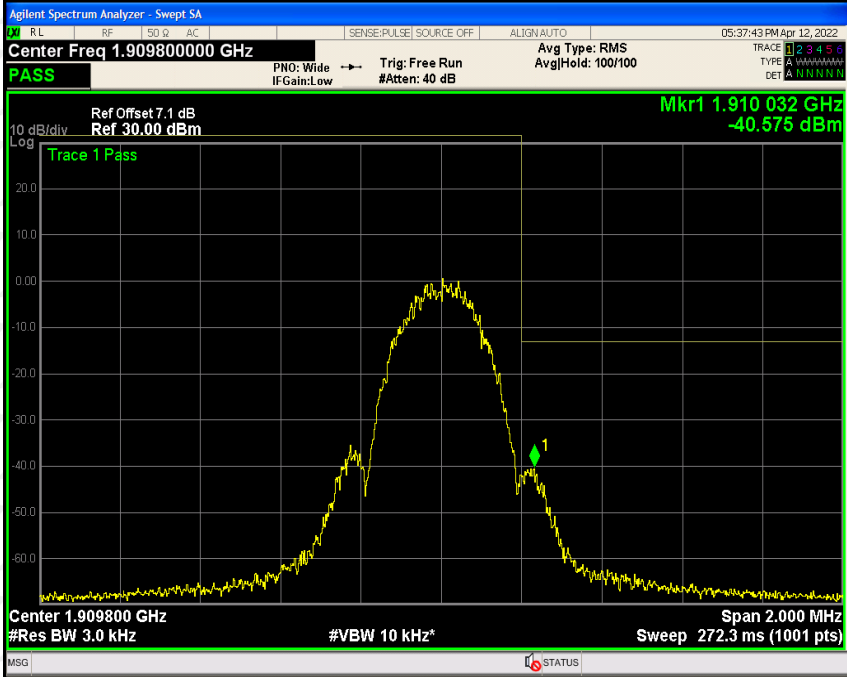


For Band V

<p>WCDMA Low Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>826.10 MHz</td> <td>22.753 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>8.955 64 GHz</td> <td>-30.040 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	826.10 MHz	22.753 dBm				2	N	1	f	8.955 64 GHz	-30.040 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	826.10 MHz	22.753 dBm																								
2	N	1	f	8.955 64 GHz	-30.040 dBm																								
<p>WCDMA Middle Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>837.82 MHz</td> <td>22.944 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>3.596 77 GHz</td> <td>-30.238 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	837.82 MHz	22.944 dBm				2	N	1	f	3.596 77 GHz	-30.238 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	837.82 MHz	22.944 dBm																								
2	N	1	f	3.596 77 GHz	-30.238 dBm																								
<p>WCDMA High Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>848.04 MHz</td> <td>22.732 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>8.955 39 GHz</td> <td>-30.357 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	848.04 MHz	22.732 dBm				2	N	1	f	8.955 39 GHz	-30.357 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	848.04 MHz	22.732 dBm																								
2	N	1	f	8.955 39 GHz	-30.357 dBm																								

<p>WCDMA Low Band Spurious Emission</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 824.000000 MHz PNO: Wide IFGain:Low Trig: Free Run #Atten: 40 dB Avg Type: RMS AvgHold: 100/100 Mkr1 823.840 MHz -24.420 dBm Ref Offset 6.19 dB Ref 30.00 dBm Trace 1 Pass Center 824.000 MHz Span 2.000 MHz #Res BW 100 kHz #VBW 300 kHz* Sweep 1.000 ms (1001 pts)</p>
<p>WCDMA High Band Spurious Emission</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 849.000000 MHz PNO: Wide IFGain:Low Trig: Free Run #Atten: 40 dB Avg Type: RMS AvgHold: 100/100 Mkr1 849.002 MHz -23.631 dBm Ref Offset 6.2 dB Ref 30.00 dBm Trace 1 Pass Center 849.000 MHz Span 2.000 MHz #Res BW 100 kHz #VBW 300 kHz* Sweep 1.000 ms (1001 pts)</p>
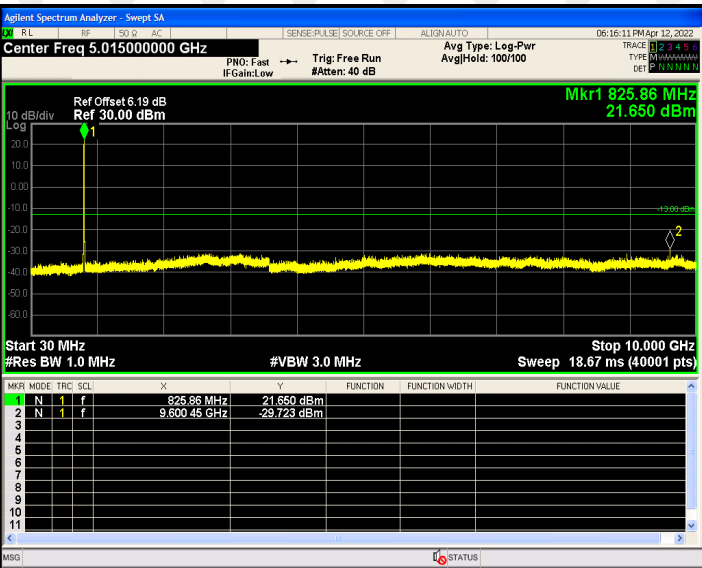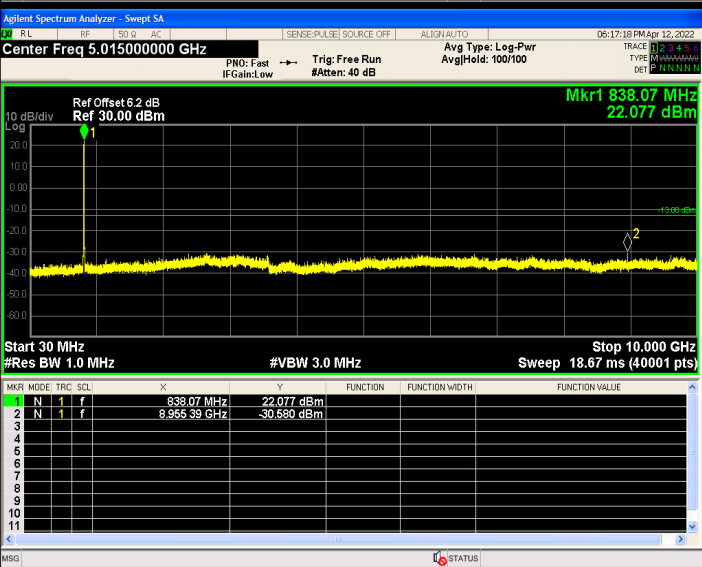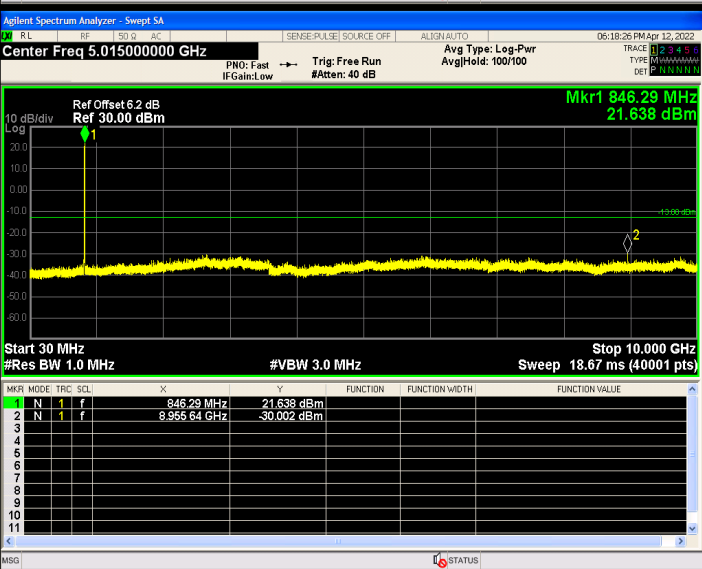
<p>HSDPA Low Channel</p>		
<p>HSDPA Middle Channel</p>		
<p>HSDPA High Channel</p>		

HSDPA
Low
Band
Spurious
Emission

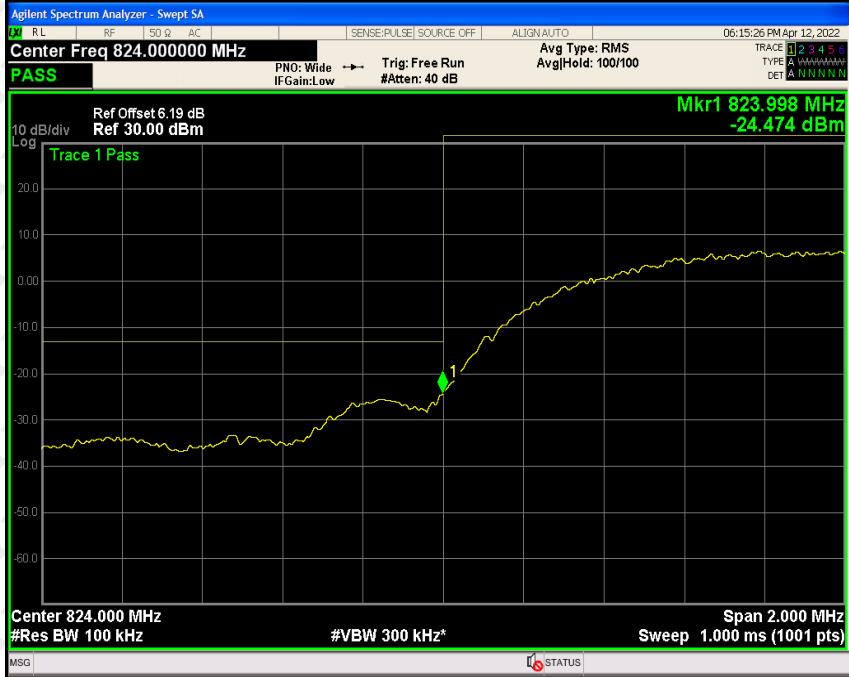


HSDPA
High
Band
Spurious
Emission




<p>HSUPA Low Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.19 dB Ref 30.00 dBm Mkr1 825.86 MHz 21.310 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>825.86 MHz</td> <td>21.310 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.53148 GHz</td> <td>-19.321 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	825.86 MHz	21.310 dBm				2	N	1	f	4.53148 GHz	-19.321 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	825.86 MHz	21.310 dBm																								
2	N	1	f	4.53148 GHz	-19.321 dBm																								
<p>HSUPA Middle Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.2 dB Ref 30.00 dBm Mkr1 838.07 MHz 21.643 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>838.07 MHz</td> <td>21.643 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>5.20393 GHz</td> <td>-17.827 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	838.07 MHz	21.643 dBm				2	N	1	f	5.20393 GHz	-17.827 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	838.07 MHz	21.643 dBm																								
2	N	1	f	5.20393 GHz	-17.827 dBm																								
<p>HSUPA High Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref Offset 6.2 dB Ref 30.00 dBm Mkr1 848.29 MHz 21.754 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>848.29 MHz</td> <td>21.754 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.64890 GHz</td> <td>-19.409 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	848.29 MHz	21.754 dBm				2	N	1	f	4.64890 GHz	-19.409 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	848.29 MHz	21.754 dBm																								
2	N	1	f	4.64890 GHz	-19.409 dBm																								

HSUPA
Low
Band
Spurious
Emission

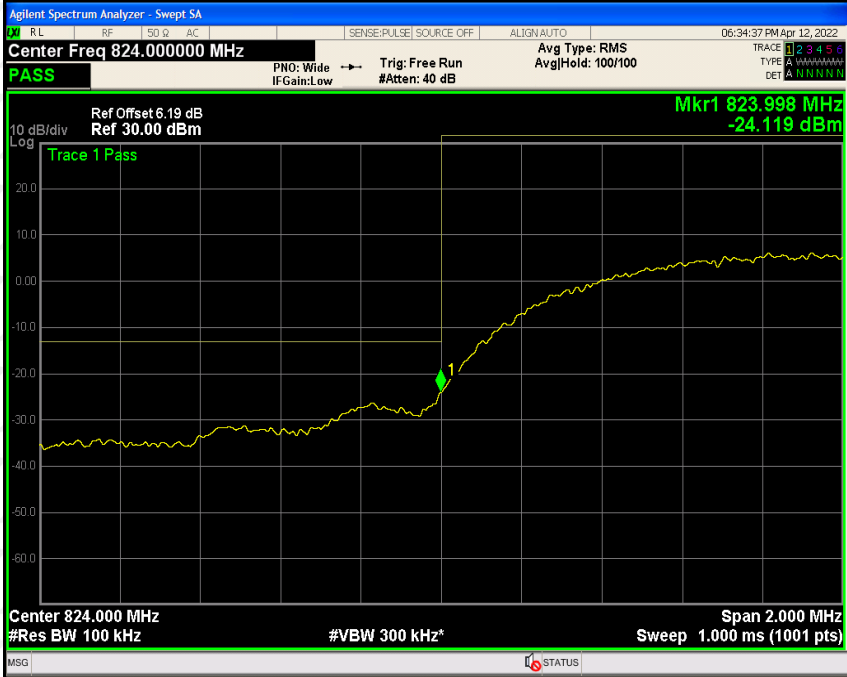

HSUPA
High
Band
Spurious
Emission

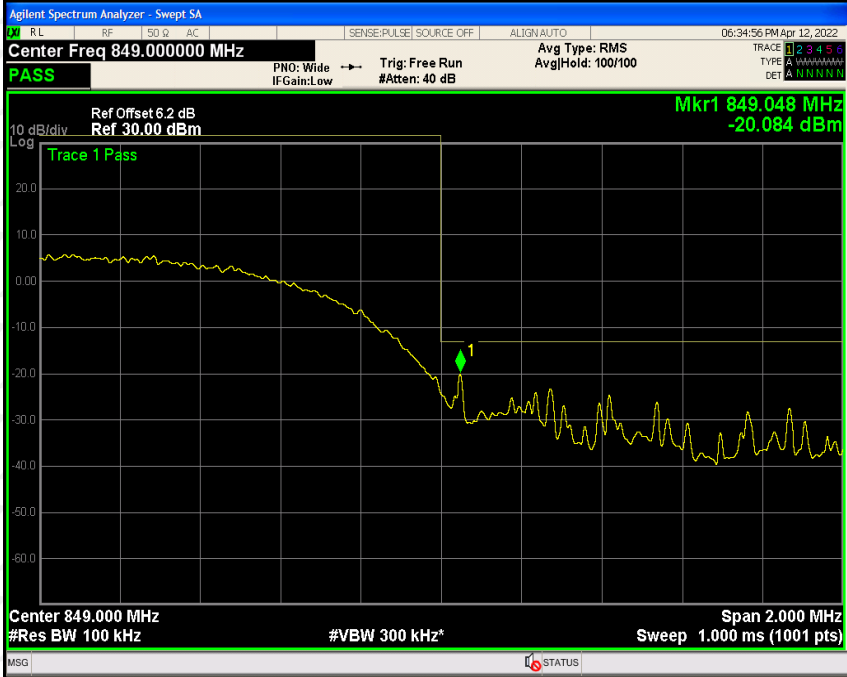




For Band II

<p>WCDMA Low Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.854 3 GHz</td> <td>21.393 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.837 2 GHz</td> <td>-24.273 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.854 3 GHz	21.393 dBm				2	N	1	f	18.837 2 GHz	-24.273 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.854 3 GHz	21.393 dBm																								
2	N	1	f	18.837 2 GHz	-24.273 dBm																								
<p>WCDMA Middle Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.879 7 GHz</td> <td>21.039 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.967 1 GHz</td> <td>-24.420 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.879 7 GHz	21.039 dBm				2	N	1	f	18.967 1 GHz	-24.420 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.879 7 GHz	21.039 dBm																								
2	N	1	f	18.967 1 GHz	-24.420 dBm																								
<p>WCDMA High Channel</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.906 7 GHz</td> <td>21.735 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>16.599 6 GHz</td> <td>-23.527 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.906 7 GHz	21.735 dBm				2	N	1	f	16.599 6 GHz	-23.527 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.906 7 GHz	21.735 dBm																								
2	N	1	f	16.599 6 GHz	-23.527 dBm																								


<p>WCDMA Low Band Spurious Emission</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 1.850000000 GHz Mkr1 1.849 832 GHz -25.368 dBm Ref Offset 7.09 dB Ref 30.00 dBm Trace 1 Pass Center 1.850000 GHz #Res BW 100 kHz #VBW 300 kHz* Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p>	
<p>WCDMA High Band Spurious Emission</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 1.910000000 GHz Mkr1 1.910 002 GHz -24.752 dBm Ref Offset 7.1 dB Ref 30.00 dBm Trace 1 Pass Center 1.910000 GHz #Res BW 100 kHz #VBW 300 kHz* Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p>	

<p>HSDPA Low Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.01500000 GHz Mkr1 1.853 8 GHz 20.531 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.853 8 GHz</td> <td>20.531 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.882 7 GHz</td> <td>-23.577 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.853 8 GHz	20.531 dBm				2	N	1	f	18.882 7 GHz	-23.577 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.853 8 GHz	20.531 dBm																							
2	N	1	f	18.882 7 GHz	-23.577 dBm																							
<p>HSDPA Middle Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.01500000 GHz Mkr1 1.879 2 GHz 20.114 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.879 2 GHz</td> <td>20.114 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.824 1 GHz</td> <td>-24.226 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.879 2 GHz	20.114 dBm				2	N	1	f	18.824 1 GHz	-24.226 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.879 2 GHz	20.114 dBm																							
2	N	1	f	18.824 1 GHz	-24.226 dBm																							
<p>HSDPA High Channel</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.01500000 GHz Mkr1 1.907 2 GHz 20.825 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.907 2 GHz</td> <td>20.825 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.843 7 GHz</td> <td>-24.377 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.907 2 GHz	20.825 dBm				2	N	1	f	18.843 7 GHz	-24.377 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.907 2 GHz	20.825 dBm																							
2	N	1	f	18.843 7 GHz	-24.377 dBm																							

<p>HSDPA Low Band Spurious Emission</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 1.85000000 GHz Ref Offset 7.09 dB Ref 30.00 dBm Mkr1 1.849 860 GHz -25.592 dBm Center 1.850000 GHz #Res BW 100 kHz #VBW 300 kHz* Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p>	
<p>HSDPA High Band Spurious Emission</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 1.91000000 GHz Ref Offset 7.1 dB Ref 30.00 dBm Mkr1 1.910 002 GHz -27.037 dBm Center 1.910000 GHz #Res BW 100 kHz #VBW 300 kHz* Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p>	
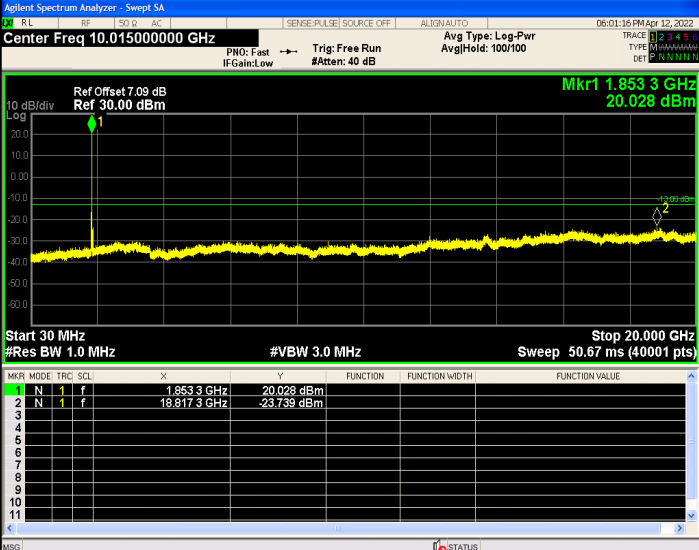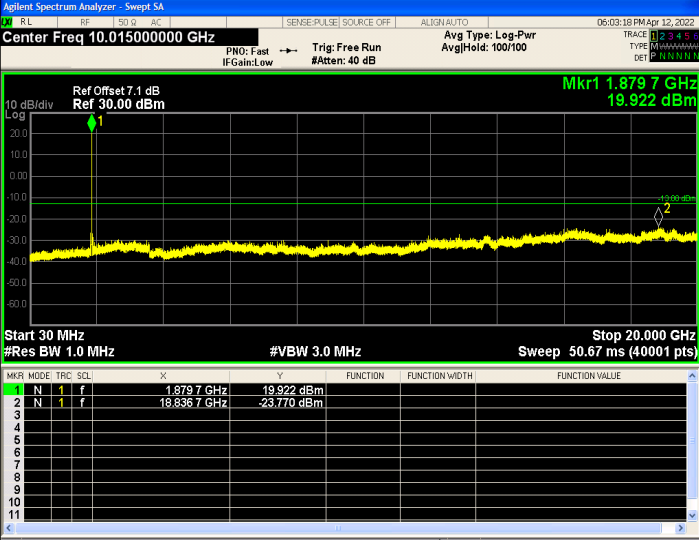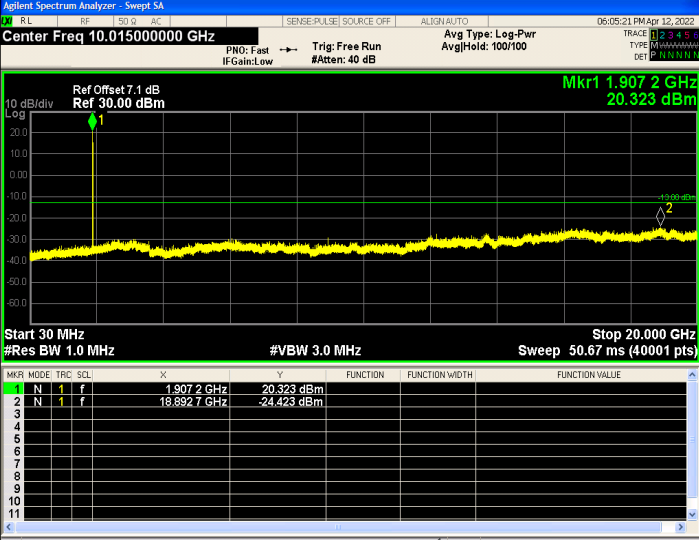
<p>HSUPA Low Channel</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.015000000 GHz Mkr1 1.853 3 GHz 20.028 dBm Ref Offset 7.09 dB Ref 30.00 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20,000 GHz Sweep 50.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.853 3 GHz</td> <td>20.028 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.817 3 GHz</td> <td>-23.739 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.853 3 GHz	20.028 dBm				2	N	1	f	18.817 3 GHz	-23.739 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.853 3 GHz	20.028 dBm																							
2	N	1	f	18.817 3 GHz	-23.739 dBm																							
<p>HSUPA Middle Channel</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.015000000 GHz Mkr1 1.879 7 GHz 19.922 dBm Ref Offset 7.1 dB Ref 30.00 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20,000 GHz Sweep 50.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.879 7 GHz</td> <td>19.922 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.836 7 GHz</td> <td>-23.770 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.879 7 GHz	19.922 dBm				2	N	1	f	18.836 7 GHz	-23.770 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.879 7 GHz	19.922 dBm																							
2	N	1	f	18.836 7 GHz	-23.770 dBm																							
<p>HSUPA High Channel</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 10.015000000 GHz Mkr1 1.907 2 GHz 20.323 dBm Ref Offset 7.1 dB Ref 30.00 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20,000 GHz Sweep 50.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.907 2 GHz</td> <td>20.323 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>18.892 7 GHz</td> <td>-24.423 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.907 2 GHz	20.323 dBm				2	N	1	f	18.892 7 GHz	-24.423 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.907 2 GHz	20.323 dBm																							
2	N	1	f	18.892 7 GHz	-24.423 dBm																							

HSUPA
Low
Band
Spurious
Emission

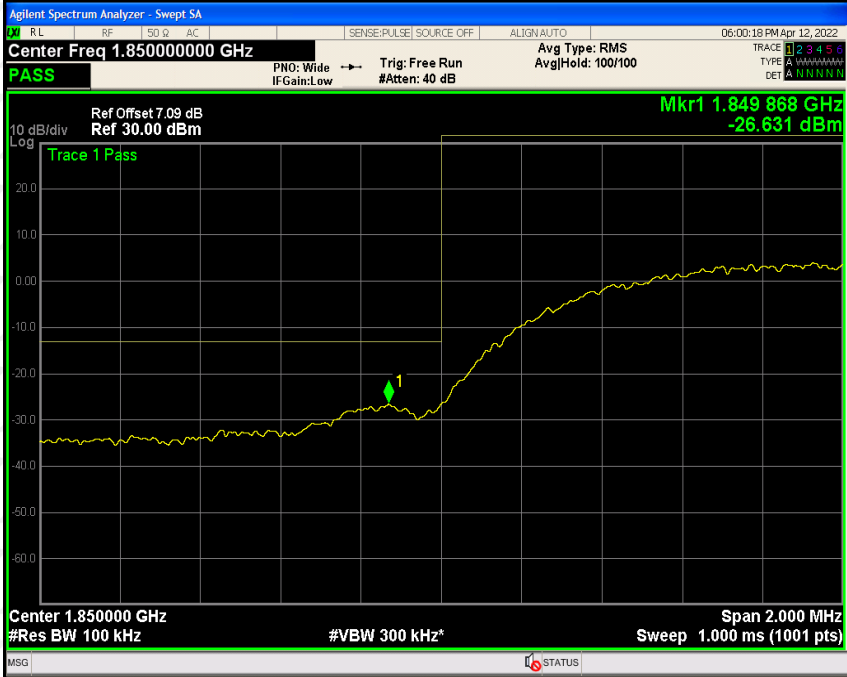

HSUPA
High
Band
Spurious
Emission



10. SPURIOUS RADIATED EMISSIONS

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

10.2 Test Procedure

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
- 2.The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 3.The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 4.Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}$ (power out in Watts)

10.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	54%
ATM Pressure:	101 kPa
Test Voltage	DC6.4V

10.4 Summary of Test Results/Plots

According to the data below, the FCC Part22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes are performed, but only the worst case is recorded in this report.

For Cellular Band GSM850 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.2MHz)						
46.34	-69.73	3.90	-65.83	-13	-52.83	H
1648.4	-54.20	4.83	-49.37	-13	-36.37	H
2472.6	-53.29	8.08	-45.20	-13	-32.20	H
46.34	-69.32	4.02	-65.30	-13	-52.30	V
1648.4	-50.60	4.48	-46.11	-13	-33.11	V
2472.6	-51.30	8.20	-43.10	-13	-30.10	V
Middle Channel (836.6MHz)						
46.34	-69.76	3.84	-65.92	-13	-52.92	H
1673.2	-54.49	4.62	-49.87	-13	-36.87	H
2509.8	-53.04	8.25	-44.78	-13	-31.78	H
46.34	-69.27	4.25	-65.02	-13	-52.02	V
1673.2	-50.45	4.54	-45.91	-13	-32.91	V
2509.8	-51.11	8.35	-42.75	-13	-29.75	V
High Channel (848.8MHz)						
46.34	-69.79	4.22	-65.57	-13	-52.57	H
1697.6	-54.65	4.87	-49.77	-13	-36.77	H
2546.4	-53.06	8.38	-44.68	-13	-31.68	H
46.34	-69.41	4.02	-65.40	-13	-52.40	V
1697.6	-50.45	4.56	-45.89	-13	-32.89	V
2546.4	-51.24	8.41	-42.83	-13	-29.83	V

For PCS Band GSM1900 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1850.2MHz)						
46.34	-69.22	4.34	-64.88	-13.00	-51.88	H
3700.4	-53.35	10.54	-42.81	-13.00	-29.81	H
5550.6	-56.25	13.37	-42.88	-13.00	-29.88	H
46.34	-68.54	4.34	-64.20	-13.00	-51.20	V
3700.4	-52.76	10.54	-42.22	-13.00	-29.22	V
5550.6	-56.32	13.37	-42.95	-13.00	-29.95	V
Middle Channel (1880MHz)						
46.34	-69.51	4.02	-65.48	-13.00	-52.48	H
3760.0	-53.49	10.71	-42.78	-13.00	-29.78	H
5640.0	-56.69	13.73	-42.96	-13.00	-29.96	H
46.34	-68.55	4.14	-64.41	-13.00	-51.41	V
3760.0	-53.20	10.22	-42.98	-13.00	-29.98	V
5640.0	-56.41	13.16	-43.25	-13.00	-30.25	V
High Channel (1909.8MHz)						
46.34	-69.67	4.02	-65.65	-13.00	-52.65	H
3819.6	-57.62	4.90	-52.72	-13.00	-39.72	H
5729.4	-44.90	8.09	-36.81	-13.00	-23.81	H
46.34	-58.00	4.25	-53.75	-13.00	-40.75	V
3819.6	-58.74	4.93	-53.81	-13.00	-40.81	V
5729.4	-59.89	8.43	-51.47	-13.00	-38.47	V

For Band 5 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
46.34	-69.55	3.91	-65.64	-13.00	-52.64	H
1652.8	-53.45	10.56	-42.89	-13.00	-29.89	H
2479.2	-56.73	13.50	-43.23	-13.00	-30.23	H
46.34	-68.74	3.93	-64.81	-13.00	-51.81	V
1652.8	-53.13	10.41	-42.72	-13.00	-29.72	V
2479.2	-56.73	13.16	-43.57	-13.00	-30.57	V
Middle Channel (836.6MHz)						
46.34	-69.62	4.02	-65.60	-13.00	-52.60	H
1672.8	-57.86	4.66	-53.20	-13.00	-40.20	H
2509.2	-44.64	8.34	-36.30	-13.00	-23.30	H
46.34	-57.64	4.17	-53.47	-13.00	-40.47	V
1672.8	-58.44	4.94	-53.49	-13.00	-40.49	V
2509.2	-59.80	8.19	-51.61	-13.00	-38.61	V
High Channel (846.6MHz)						
46.34	-69.61	3.87	-65.74	-13.00	-52.74	H
1693.2	-57.81	4.89	-52.92	-13.00	-39.92	H
2539.8	-44.76	8.42	-36.34	-13.00	-23.34	H
46.34	-57.87	3.95	-53.92	-13.00	-40.92	V
1693.2	-58.76	4.99	-53.77	-13.00	-40.77	V
2539.8	-59.55	8.12	-51.44	-13.00	-38.44	V

For Band 2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
46.34	-69.40	4.22	-65.18	-13.00	-52.18	H
3704.8	-53.77	10.70	-43.07	-13.00	-30.07	H
5557.2	-56.61	13.73	-42.87	-13.00	-29.87	H
46.34	-68.65	3.93	-64.72	-13.00	-51.72	V
3704.8	-53.22	10.09	-43.14	-13.00	-30.14	V
5557.2	-56.42	13.11	-43.31	-13.00	-30.31	V
Middle Channel (1880MHz)						
46.34	-69.48	4.26	-65.22	-13.00	-52.22	H
3760.8	-57.79	4.76	-53.03	-13.00	-40.03	H
5640.0	-44.66	8.37	-36.29	-13.00	-23.29	H
46.34	-57.67	3.96	-53.72	-13.00	-40.72	V
3760.8	-58.34	4.63	-53.71	-13.00	-40.71	V
5640.0	-59.79	8.10	-51.69	-13.00	-38.69	V
High Channel (1907.6MHz)						
46.34	-69.48	4.26	-65.22	-13.00	-52.22	H
3815.2	-57.79	4.76	-53.03	-13.00	-40.03	H
5722.8	-44.66	8.37	-36.29	-13.00	-23.29	H
46.34	-57.67	3.96	-53.72	-13.00	-40.72	V
3815.2	-58.34	4.63	-53.71	-13.00	-40.71	V
5722.8	-59.79	8.10	-51.69	-13.00	-38.69	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

11. FREQUENCY STABILITY

11.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

11.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

11.3 Environmental Conditions

Temperature:	26°C
Relative Humidity:	54%
ATM Pressure:	101kPa

11.4 Summary of Test Results/Plots

For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	9.27	0.0111
40	NV	9.7	0.0116
30	NV	9.9	0.0119
20	NV	10.0	0.0120
10	NV	10.5	0.0125
0	NV	10.8	0.0129
-10	NV	10.8	0.0129
-20	NV	11.2	0.0134
-30	NV	11.4	0.0136

For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	12.95	0.0069
40	NV	13.2	0.0070
30	NV	13.2	0.0070
20	NV	13.3	0.0071
10	NV	13.7	0.0073
0	NV	14.1	0.0075
-10	NV	14.5	0.0077
-20	NV	14.6	0.0078
-30	NV	14.9	0.0079

For Cellular Band EDGE Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	11.56	0.0138
40	NV	12.0	0.0143
30	NV	12.1	0.0144
20	NV	12.2	0.0146
10	NV	12.3	0.0147
0	NV	12.3	0.0148
-10	NV	12.6	0.0150
-20	NV	13.0	0.0155
-30	NV	13.4	0.0160

For PCS Band EDGE Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	-9.81	-0.0052
40	NV	-9.3	-0.0050
30	NV	-9.2	-0.0049
20	NV	-8.8	-0.0047
10	NV	-8.4	-0.0045
0	NV	-8.3	-0.0044
-10	NV	-8.1	-0.0043
-20	NV	-7.7	-0.0041
-30	NV	-7.5	-0.0040

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.44	0.0005
40	NV	0.6	0.0007
30	NV	0.9	0.0011
20	NV	1.2	0.0015
10	NV	1.3	0.0016
0	NV	1.4	0.0017
-10	NV	1.4	0.0017
-20	NV	1.5	0.0018
-30	NV	1.6	0.0020

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.39	0.0002
40	NV	0.4	0.0002
30	NV	0.7	0.0004
20	NV	0.9	0.0005
10	NV	1.3	0.0007
0	NV	1.4	0.0007
-10	NV	1.9	0.0010
-20	NV	2.2	0.0012
-30	NV	2.7	0.0014

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.34	0.0004
40	NV	0.4	0.0005
30	NV	0.8	0.0009
20	NV	0.9	0.0011
10	NV	1.3	0.0015
0	NV	1.4	0.0017
-10	NV	1.5	0.0018
-20	NV	2.0	0.0023
-30	NV	2.2	0.0027

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	5.33	0.0028
40	NV	5.3	0.0028
30	NV	5.8	0.0031
20	NV	6.3	0.0033
10	NV	6.5	0.0035
0	NV	6.9	0.0037
-10	NV	7.1	0.0038
-20	NV	7.3	0.0039
-30	NV	7.4	0.0039

For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	1.02	0.0012
40	NV	1.2	0.0014
30	NV	1.3	0.0015
20	NV	1.4	0.0017
10	NV	1.8	0.0021
0	NV	2.1	0.0025
-10	NV	2.2	0.0027
-20	NV	2.6	0.0031
-30	NV	2.9	0.0035

For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	6.88	0.0037
40	NV	7.2	0.0038
30	NV	7.5	0.0040
20	NV	7.8	0.0042
10	NV	8.1	0.0043
0	NV	8.5	0.0045
-10	NV	8.7	0.0046
-20	NV	9.0	0.0048
-30	NV	9.4	0.0050

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	11.4	0.0136
	NV	11.8	0.0141
	HV	12.1	0.0144
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	15.2	0.0079
	NV	15.2	0.0081
	HV	15.2	0.0081


Reference Frequency(Middle Channel): EDGE 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	13.4	0.0160
	NV	13.4	0.0160
	HV	13.9	0.0166
Reference Frequency(Middle Channel): EDGE 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	-7.5	-0.0040
	NV	-7.1	-0.0038
	HV	-6.8	-0.0036
Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.6	0.0019
	NV	2.0	0.0024
	HV	2.1	0.0025
Reference Frequency(Middle Channel): WCDMA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.69	0.0009
	NV	1.27	0.0007
	HV	1.83	0.0001
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	2.7	0.0014
	NV	3.0	0.0016
	HV	3.4	0.0018

Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	2.2	0.0026
	NV	2.4	0.0029
	HV	2.6	0.0031
Reference Frequency(Middle Channel): HSDPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	6.61	0.004441
	NV	6.8	0.004716
	HV	7.2	0.004822
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	7.4	0.0039
	NV	7.5	0.0040
	HV	7.7	0.0041
Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	2.9	0.0035
	NV	3.4	0.0040
	HV	3.6	0.0043
Reference Frequency(Middle Channel): HSUPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	6.0	0.00421
	NV	6.4	0.004477
	HV	6.8	0.004537

Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	9.4	0.0050
	NV	9.6	0.0051
	HV	9.9	0.0053

12. EUT TEST PHOTO

Radiated Emission

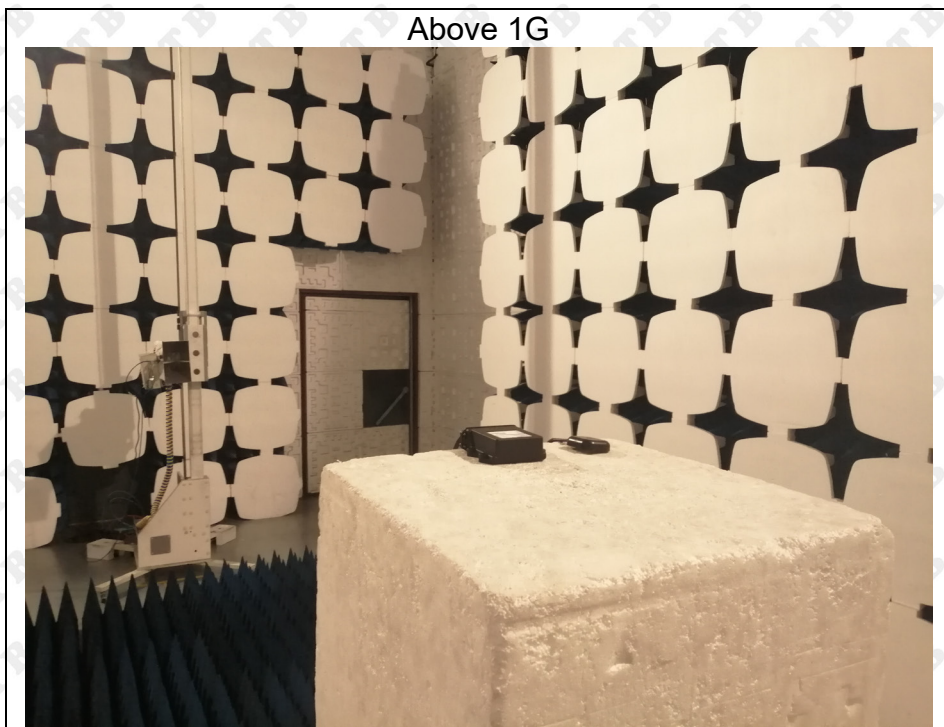

***** END OF REPORT *****