

# TEST REPORT

**Reference No.**..... : WTF24D02037891W001  
**FCC ID** ..... : 2A6UA-BM03-B  
**Applicant**..... : Hong Kong Lute Technology Co., Limited  
**Address**..... : Room 02, 21/F, Hip Kwan Commercial Building, 38 Pitt Street, Yau Ma Tei, Kowloon, Hong Kong  
**Manufacturer** ..... : Hong Kong Lute Technology Co., Limited  
**Address**..... : Room 02, 21/F, Hip Kwan Commercial Building, 38 Pitt Street, Yau Ma Tei, Kowloon, Hong Kong  
**Product**..... : Video Baby Monitor (Monitor)  
**Model(s)** ..... : BM03  
**Brand Name** ..... : momcozy  
**Standards**..... : FCC 47CFR Part 15.247  
**Date of Receipt sample** .... : 2024-03-07  
**Date of Test** ..... : 2024-03-07 to 2024-03-29  
**Date of Issue**..... : 2024-03-29  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

*Estel Qian*

Estel Qian / Project Engineer

Approved by:

  
Deval Qin / Designated Reviewer

## 2 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST.....	5
4.4 TEST FACILITY .....	6
4.5 SUBCONTRACTED.....	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
4.7 TEST MODE .....	7
<b>5 TEST SUMMARY</b> .....	<b>8</b>
<b>6 EQUIPMENT USED DURING TEST</b> .....	<b>9</b>
6.1 EQUIPMENTS LIST .....	9
6.2 DESCRIPTION OF SUPPORT UNITS.....	10
6.3 MEASUREMENT UNCERTAINTY .....	10
6.4 TEST EQUIPMENT CALIBRATION .....	10
<b>7 DUTY CYCLE</b> .....	<b>11</b>
<b>8 CONDUCTED EMISSION</b> .....	<b>13</b>
8.1 E.U.T. OPERATION.....	13
8.2 EUT SETUP .....	13
8.3 MEASUREMENT DESCRIPTION.....	13
8.4 CONDUCTED EMISSION TEST RESULT .....	14
<b>9 RADIATED EMISSIONS</b> .....	<b>16</b>
9.1 EUT OPERATION.....	16
9.2 TEST SETUP .....	17
9.3 SPECTRUM ANALYZER SETUP .....	18
9.4 TEST PROCEDURE.....	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
9.6 SUMMARY OF TEST RESULTS.....	20
<b>10 CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>32</b>
10.1 TEST PROCEDURE .....	32
10.2 TEST RESULT .....	33
<b>11 BAND EDGE MEASUREMENT</b> .....	<b>43</b>
11.1 TEST PROCEDURE .....	43
11.2 TEST RESULT .....	44
<b>12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT</b> .....	<b>46</b>
12.1 TEST PROCEDURE .....	46
12.2 TEST RESULT .....	46
<b>13 MAXIMUM PEAK CONDUCTED OUTPUT POWER</b> .....	<b>53</b>
13.1 TEST PROCEDURE .....	53
13.2 TEST RESULT .....	53
<b>14 POWER SPECTRAL DENSITY</b> .....	<b>58</b>

14.1	TEST PROCEDURE .....	58
14.2	TEST RESULT .....	58
<b>15</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>63</b>
<b>16</b>	<b>RF EXPOSURE .....</b>	<b>63</b>
<b>17</b>	<b>PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>	<b>63</b>

### 3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF24D02037891W001	2024-03-07	2024-03-07 to 2024-03-29	2024-03-29	Original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	Video Baby Monitor (Monitor)
Model(s):	BM03
Test Sample No.:	1-1/2
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n/HT40
Hardware Version:	BM03-RX-MAIN-01A-2-1, BM03-RX-KEY-01A-3
Software Version:	v1.0.0-240321101101

### 4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz
Max. RF output power:	15.41dBm
Type of Modulation:	DSSS, OFDM
Antenna installation:	Copper pipe
Antenna Gain:	2.62dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings:	Input: 5V $\Rightarrow$ 2A or build in battery
Adapter:	Manufacturer: Shenzhen Sunshine Technological Co., Ltd. Model: XSC-0502000SU Input: 100-240V~ 50/60Hz 0.4A Output: 5V $\Rightarrow$ 2000mA

USB cable: Type A plug to type C plug, length 200cm  $\pm$  5cm, no shield, no ferrite core.

### 4.3 Channel List

Channel No.	Frequency (MHz)						
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

#### 4.4 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

#### 4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab:      N/A

Lab address: N/A

Test items:    N/A

#### 4.6 Abnormalities from Standard Conditions

None.

## 4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

**Note:** Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

## 5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 6 Equipment Used during Test

### 6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
<b>Conducted Emissions 1#</b>						
1	EMI Test Receiver	R&S	ESCI	100947	2023-07-27	2024-07-26
2	LISN	R&S	ENV216	100115	2023-07-27	2024-07-26
3	Cable	Top	TYPE16(3.5M)	-	2023-07-27	2024-07-26
<b>3m Semi-anechoic Chamber for Radiation Emissions 1#</b>						
1	Spectrum Analyzer	R&S	FSP30	100091	2023-04-24	2024-04-23
2	Amplifier	Agilent	8447D	2944A10178	2023-07-27	2024-07-26
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2023-08-07	2024-08-06
4	Coaxial Cable	Top	TYPE16(13M)	-	2023-04-24	2024-04-23
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2024-01-23	2025-01-22
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2023-08-02	2024-08-01
7	Broadband Pre-amplifier	COMPLIANCE	PAP-1G18	2004	2023-08-08	2024-08-07
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2023-04-24	2024-04-23
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2023-07-27	2024-07-26
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2023-04-24	2024-04-23
<b>3m Semi-anechoic Chamber for Radiation Emissions 2#</b>						
1	Test Receiver	R&S	ESCI	101296	2023-04-24	2024-04-23
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2023-05-07	2024-05-06
4	Amplifier	ANRITSU	MH648A	M43381	2023-04-24	2024-04-23
5	Cable	HUBER+SUHNER	CBL2	525178	2023-04-24	2024-04-23
<b>RF Conducted Testing</b>						
1	Spectrum Analyzer	R&S	FSP40	100501	2023-07-27	2024-07-26
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-07-27	2024-07-26

#### Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 <sup>-7</sup> Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

## 7 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	100	100	1.00	100.00	0.00	0.00
802.11g	100	100	1.00	100.00	0.00	0.00
802.11n-HT20	100	100	1.00	100.00	0.00	0.00
802.11n-HT40	100	100	1.00	100.00	0.00	0.00


**Remark:**

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$ ;


Average factor= $20 \log_{10} \text{Duty cycle}$

### Wi-Fi 802.11b

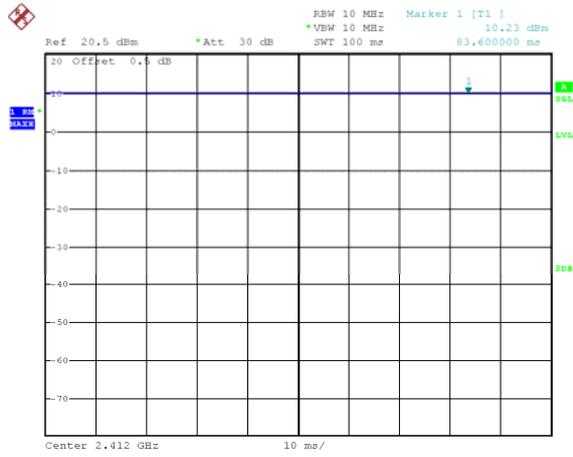


Date: 28.MAR.2024 11:00:09

### Wi-Fi 802.11g

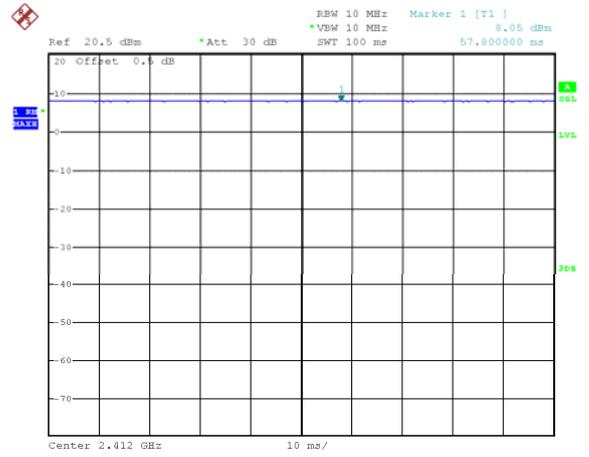


Date: 28.MAR.2024 11:31:33

### Wi-Fi 802.11n-HT20

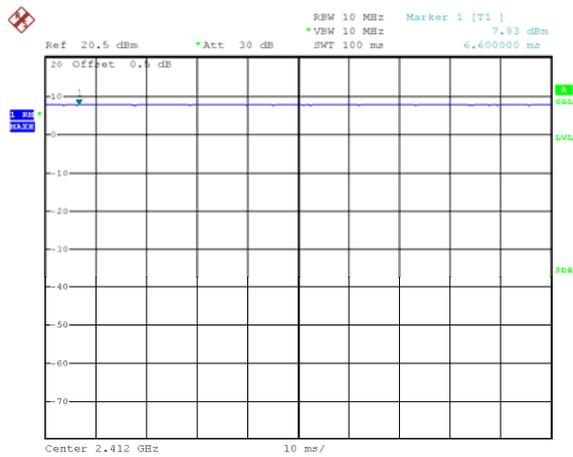

Date: 28.MAR.2024 13:44:35

### Wi-Fi 802.11n-HT40

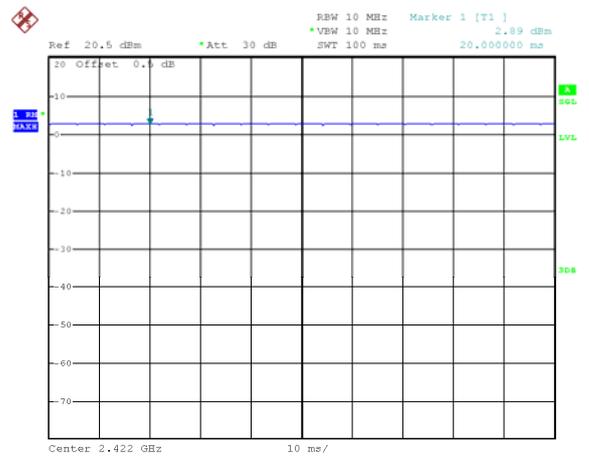

Date: 28.MAR.2024 14:14:13

## 8 Conducted Emission

Test Requirement:	47CFR FCC Part15 Subpart C §15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Limit:	

Frequency (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0. to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

\*Decreases with the logarithm of the frequency.


### 8.1 E.U.T. Operation

Operating Environment:	
Temperature:	25.4 °C
Humidity:	54.7 % RH
Atmospheric Pressure:	101.6kPa
EUT Operation:	

The test was performed in Transmitting mode, the worst test data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

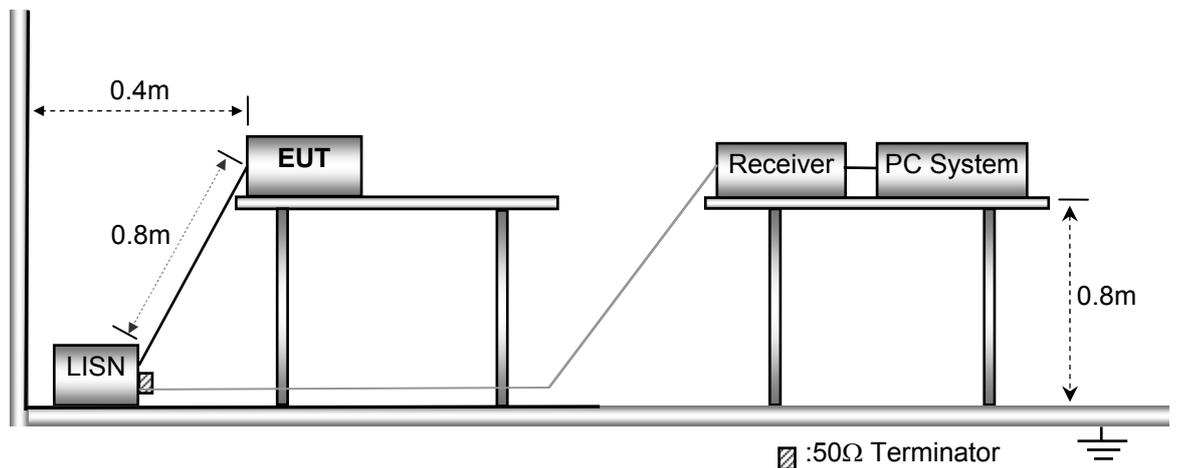


### 8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 8.4 Conducted Emission Test Result


Remark: only the worst data (TX 11b mode High channel mode) were reported

Live line:

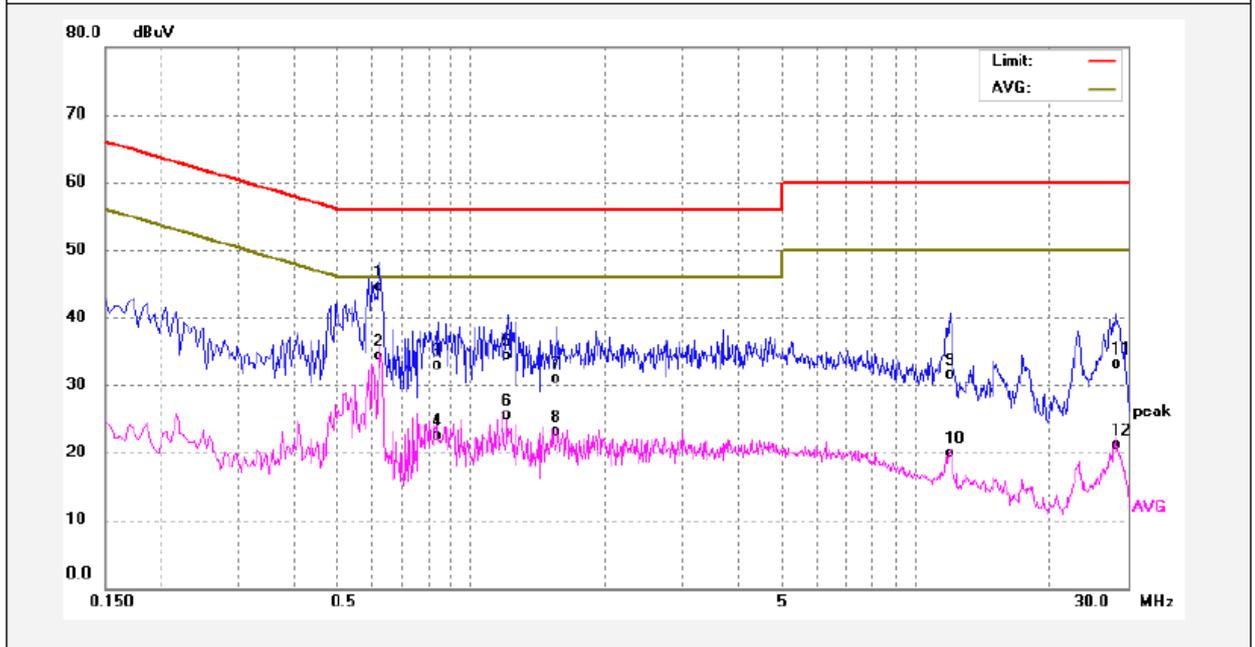

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.6180	33.50	11.00	44.50	56.00	-11.50	QP	
2	0.6180	23.40	11.00	34.40	46.00	-11.60	AVG	
3	0.8460	21.69	11.13	32.82	56.00	-23.18	QP	
4	0.8460	11.46	11.13	22.59	46.00	-23.41	AVG	
5	1.2100	23.29	11.04	34.33	56.00	-21.67	QP	
6	1.2100	14.37	11.04	25.41	46.00	-20.59	AVG	
7	1.5580	19.89	11.06	30.95	56.00	-25.05	QP	
8	1.5580	11.96	11.06	23.02	46.00	-22.98	AVG	
9	11.9620	19.94	11.53	31.47	60.00	-28.53	QP	
10	11.9620	8.46	11.53	19.99	50.00	-30.01	AVG	
11	28.2340	21.12	12.06	33.18	60.00	-26.82	QP	
12	28.2340	9.11	12.06	21.17	50.00	-28.83	AVG	

Neutral line:

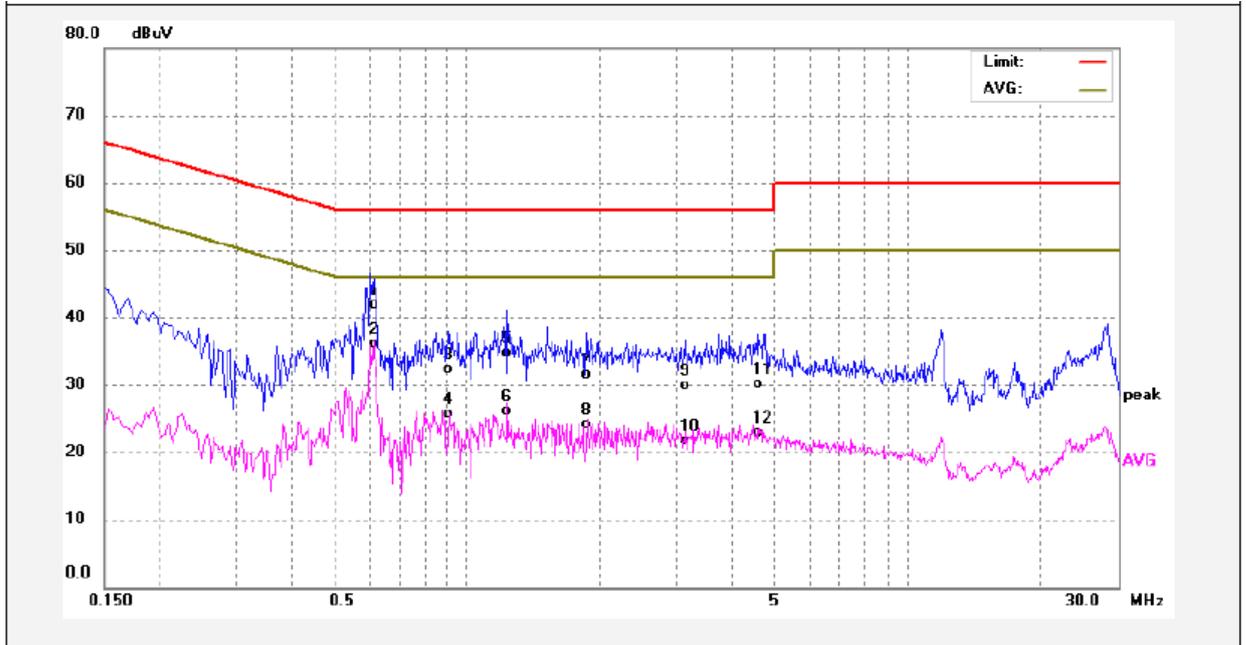

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.6140	30.80	11.12	41.92	56.00	-14.08	QP	
2	0.6140	24.90	11.12	36.02	46.00	-9.98	AVG	
3	0.9060	21.00	11.37	32.37	56.00	-23.63	QP	
4	0.9060	14.42	11.37	25.79	46.00	-20.21	AVG	
5	1.2300	23.48	11.26	34.74	56.00	-21.26	QP	
6	1.2300	14.84	11.26	26.10	46.00	-19.90	AVG	
7	1.8620	20.23	11.34	31.57	56.00	-24.43	QP	
8	1.8620	12.85	11.34	24.19	46.00	-21.81	AVG	
9	3.1140	18.65	11.33	29.98	56.00	-26.02	QP	
10	3.1140	10.38	11.33	21.71	46.00	-24.29	AVG	
11	4.5899	18.81	11.35	30.16	56.00	-25.84	QP	
12	4.5899	11.63	11.35	22.98	46.00	-23.02	AVG	

## 9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

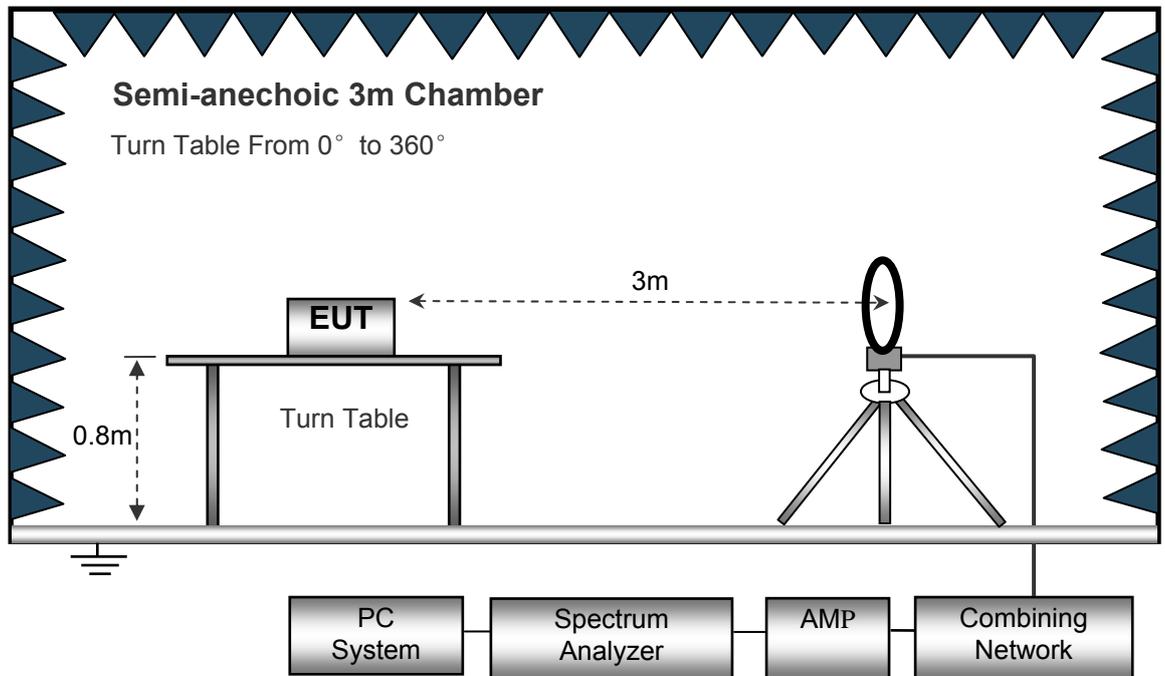

The test setup for emission measurement from 30 MHz to 1 GHz.

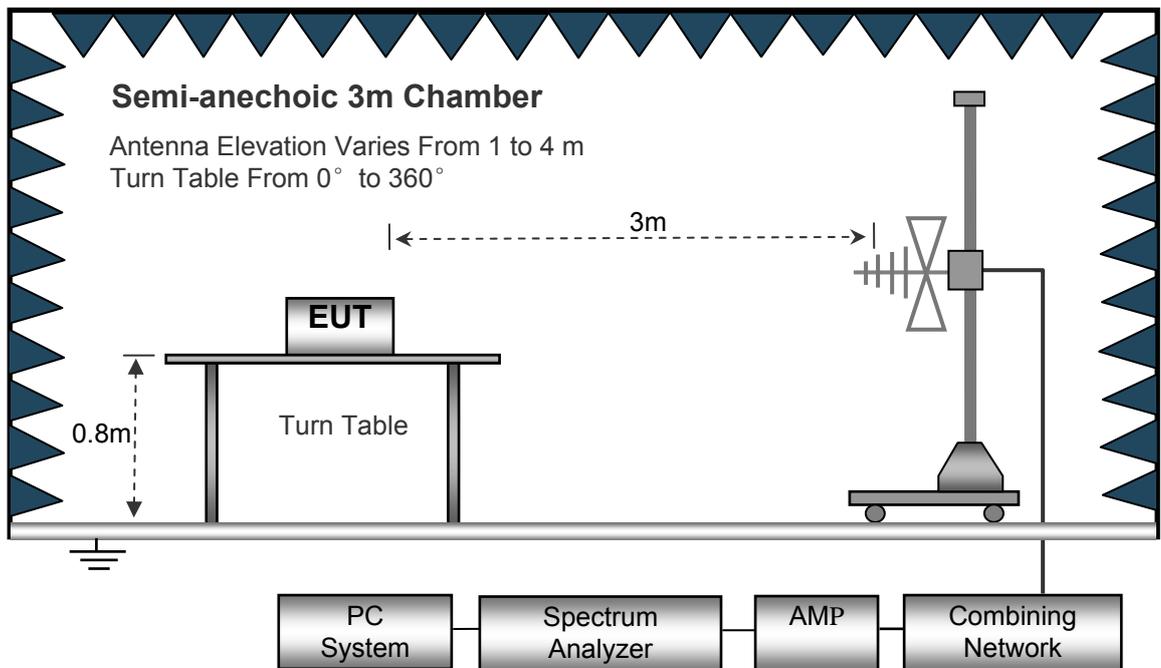

The test setup for emission measurement above 1 GHz.

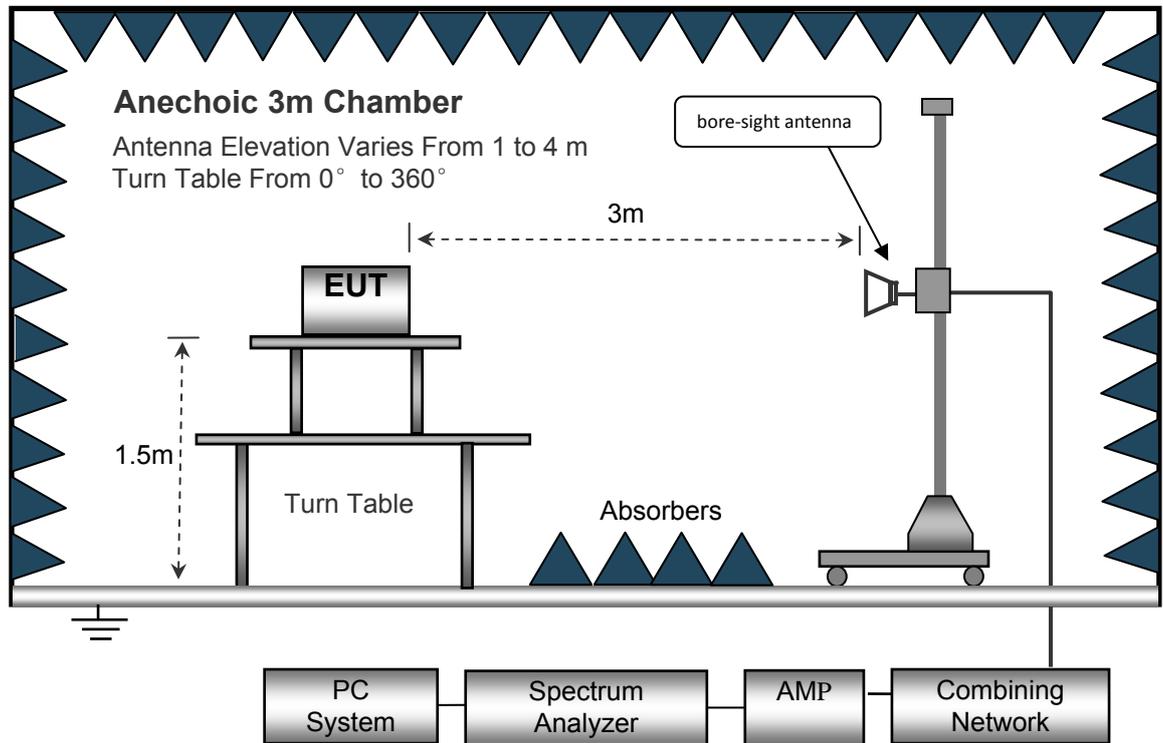

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

### Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11b: Low Channel 2412MHz									
424.33	40.17	QP	3	1.9	H	-13.21	26.96	46.00	-19.04
424.33	46.64	QP	74	1.3	V	-13.21	33.43	46.00	-12.57
4824.00	53.97	PK	357	2.0	V	-1.06	52.91	74.00	-21.09
4824.00	40.13	Ave	357	2.0	V	-1.06	39.07	54.00	-14.93
7236.00	50.11	PK	119	1.6	H	1.33	51.44	74.00	-22.56
7236.00	39.26	Ave	119	1.6	H	1.33	40.59	54.00	-13.41
2324.81	47.09	PK	173	1.8	V	-13.19	33.90	74.00	-40.10
2324.81	39.54	Ave	173	1.8	V	-13.19	26.35	54.00	-27.65
2378.21	42.79	PK	350	1.9	H	-13.14	29.65	74.00	-44.35
2378.21	38.66	Ave	350	1.9	H	-13.14	25.52	54.00	-28.48
2489.96	42.18	PK	305	1.4	V	-13.08	29.10	74.00	-44.90
2489.96	37.58	Ave	305	1.4	V	-13.08	24.50	54.00	-29.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11b: Middle Channel 2437MHz									
424.33	39.88	QP	235	2.0	H	-13.21	26.67	46.00	-19.33
424.33	46.98	QP	231	1.8	V	-13.21	33.77	46.00	-12.23
4874.00	52.19	PK	219	1.3	V	-0.62	51.57	74.00	-22.43
4874.00	40.27	Ave	219	1.3	V	-0.62	39.65	54.00	-14.35
7311.00	48.64	PK	264	1.9	H	2.21	50.85	74.00	-23.15
7311.00	37.10	Ave	264	1.9	H	2.21	39.31	54.00	-14.69
2321.31	46.72	PK	111	1.4	V	-13.19	33.53	74.00	-40.47
2321.31	37.68	Ave	111	1.4	V	-13.19	24.49	54.00	-29.51
2376.32	42.64	PK	175	1.1	H	-13.14	29.50	74.00	-44.50
2376.32	37.13	Ave	175	1.1	H	-13.14	23.99	54.00	-30.01
2499.76	43.52	PK	50	1.9	V	-13.08	30.44	74.00	-43.56
2499.76	36.69	Ave	50	1.9	V	-13.08	23.61	54.00	-30.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11b: High Channel 2462MHz									
424.33	38.39	QP	183	1.6	H	-13.21	25.18	46.00	-20.82
424.33	47.25	QP	106	1.9	V	-13.21	34.04	46.00	-11.96
4924.00	53.34	PK	269	1.9	V	-0.24	53.10	74.00	-20.90
4924.00	39.90	Ave	269	1.9	V	-0.24	39.66	54.00	-14.34
7386.00	47.73	PK	156	1.6	H	2.84	50.57	74.00	-23.43
7386.00	38.42	Ave	156	1.6	H	2.84	41.26	54.00	-12.74
2317.20	45.40	PK	282	1.8	V	-13.19	32.21	74.00	-41.79
2317.20	38.25	Ave	282	1.8	V	-13.19	25.06	54.00	-28.94
2367.49	44.64	PK	318	1.8	H	-13.14	31.50	74.00	-42.50
2367.49	37.61	Ave	318	1.8	H	-13.14	24.47	54.00	-29.53
2490.60	44.11	PK	174	2.0	V	-13.08	31.03	74.00	-42.97
2490.60	38.86	Ave	174	2.0	V	-13.08	25.78	54.00	-28.22

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Correct ed Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11g Low Channel 2412MHz									
424.33	42.90	QP	242	1.6	H	-13.21	29.69	46.00	-16.31
424.33	46.19	QP	299	1.6	V	-13.21	32.98	46.00	-13.02
4924.00	50.66	PK	24	2.0	V	-0.24	50.42	74.00	-23.58
4924.00	41.49	Ave	24	2.0	V	-0.24	41.25	54.00	-12.75
7386.00	47.72	PK	296	1.4	H	2.84	50.56	74.00	-23.44
7386.00	39.34	Ave	296	1.4	H	2.84	42.18	54.00	-11.82
2310.74	45.93	PK	343	1.4	V	-13.19	32.74	74.00	-41.26
2310.74	39.31	Ave	343	1.4	V	-13.19	26.12	54.00	-27.88
2371.82	43.97	PK	86	1.9	H	-13.14	30.83	74.00	-43.17
2371.82	36.23	Ave	86	1.9	H	-13.14	23.09	54.00	-30.91
2486.68	44.27	PK	344	1.9	V	-13.08	31.19	74.00	-42.81
2486.68	37.31	Ave	344	1.9	V	-13.08	24.23	54.00	-29.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Correct ed Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11g Middle Channel 2437MHz									
424.33	42.05	QP	128	1.6	H	-13.21	28.84	46.00	-17.16
424.33	45.10	QP	168	1.5	V	-13.21	31.89	46.00	-14.11
4824.00	50.17	PK	258	1.6	V	-1.06	49.11	74.00	-24.89
4824.00	42.27	Ave	258	1.6	V	-1.06	41.21	54.00	-12.79
7236.00	47.47	PK	74	1.4	H	1.33	48.80	74.00	-25.20
7236.00	39.45	Ave	74	1.4	H	1.33	40.78	54.00	-13.22
2345.31	46.29	PK	352	1.1	V	-13.19	33.10	74.00	-40.90
2345.31	37.70	Ave	352	1.1	V	-13.19	24.51	54.00	-29.49
2360.25	44.50	PK	192	1.5	H	-13.14	31.36	74.00	-42.64
2360.25	36.30	Ave	192	1.5	H	-13.14	23.16	54.00	-30.84
2485.60	44.19	PK	321	1.6	V	-13.08	31.11	74.00	-42.89
2485.60	38.80	Ave	321	1.6	V	-13.08	25.72	54.00	-28.28

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11g High Channel 2462MHz									
424.33	42.55	QP	120	1.6	H	-13.21	29.34	46.00	-16.66
424.33	45.47	QP	96	1.7	V	-13.21	32.26	46.00	-13.74
4924.00	52.91	PK	87	1.4	V	-0.24	52.67	74.00	-21.33
4924.00	41.27	Ave	87	1.4	V	-0.24	41.03	54.00	-12.97
7386.00	48.64	PK	53	1.1	H	2.84	51.48	74.00	-22.52
7386.00	37.03	Ave	53	1.1	H	2.84	39.87	54.00	-14.13
2317.74	45.80	PK	118	1.7	V	-13.19	32.61	74.00	-41.39
2317.74	39.28	Ave	118	1.7	V	-13.19	26.09	54.00	-27.91
2351.49	43.30	PK	19	1.2	H	-13.14	30.16	74.00	-43.84
2351.49	37.60	Ave	19	1.2	H	-13.14	24.46	54.00	-29.54
2483.65	43.07	PK	163	1.0	V	-13.08	29.99	74.00	-44.01
2483.65	36.87	Ave	163	1.0	V	-13.08	23.79	54.00	-30.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) Low Channel 2412MHz									
424.33	41.46	QP	30	1.8	H	-13.21	28.25	46.00	-17.75
424.33	45.76	QP	286	1.4	V	-13.21	32.55	46.00	-13.45
4824.00	53.26	PK	202	1.7	V	-1.06	52.20	74.00	-21.80
4824.00	42.26	Ave	202	1.7	V	-1.06	41.20	54.00	-12.80
7236.00	47.22	PK	271	1.5	H	1.33	48.55	74.00	-25.45
7236.00	36.78	Ave	271	1.5	H	1.33	38.11	54.00	-15.89
2341.16	45.24	PK	6	1.6	V	-13.19	32.05	74.00	-41.95
2341.16	38.59	Ave	6	1.6	V	-13.19	25.40	54.00	-28.60
2386.81	44.98	PK	222	1.1	H	-13.14	31.84	74.00	-42.16
2386.81	36.19	Ave	222	1.1	H	-13.14	23.05	54.00	-30.95
2495.16	44.94	PK	8	1.6	V	-13.08	31.86	74.00	-42.14
2495.16	38.83	Ave	8	1.6	V	-13.08	25.75	54.00	-28.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) Middle Channel 2437MHz									
424.33	42.47	QP	313	1.4	H	-13.21	29.26	46.00	-16.74
424.33	46.33	QP	4	1.3	V	-13.21	33.12	46.00	-12.88
4874.00	52.33	PK	87	1.1	V	-0.62	51.71	74.00	-22.29
4874.00	41.66	Ave	87	1.1	V	-0.62	41.04	54.00	-12.96
7311.00	47.90	PK	249	1.3	H	2.21	50.11	74.00	-23.89
7311.00	37.61	Ave	249	1.3	H	2.21	39.82	54.00	-14.18
2327.53	46.30	PK	306	1.7	V	-13.19	33.11	74.00	-40.89
2327.53	37.21	Ave	306	1.7	V	-13.19	24.02	54.00	-29.98
2389.39	43.66	PK	185	1.3	H	-13.14	30.52	74.00	-43.48
2389.39	37.52	Ave	185	1.3	H	-13.14	24.38	54.00	-29.62
2486.70	42.72	PK	128	2.0	V	-13.08	29.64	74.00	-44.36
2486.70	36.59	Ave	128	2.0	V	-13.08	23.51	54.00	-30.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) High Channel 2462MHz									
424.33	42.39	QP	264	1.1	H	-13.21	29.18	46.00	-16.82
424.33	46.65	QP	355	1.6	V	-13.21	33.44	46.00	-12.56
4924.00	51.48	PK	264	1.3	V	-0.24	51.24	74.00	-22.76
4924.00	42.63	Ave	264	1.3	V	-0.24	42.39	54.00	-11.61
7386.00	47.59	PK	58	1.3	H	2.84	50.43	74.00	-23.57
7386.00	38.66	Ave	58	1.3	H	2.84	41.50	54.00	-12.50
2345.72	45.50	PK	163	1.5	V	-13.19	32.31	74.00	-41.69
2345.72	37.74	Ave	163	1.5	V	-13.19	24.55	54.00	-29.45
2375.90	43.12	PK	256	1.2	H	-13.14	29.98	74.00	-44.02
2375.90	37.43	Ave	256	1.2	H	-13.14	24.29	54.00	-29.71
2495.15	44.46	PK	256	1.8	V	-13.08	31.38	74.00	-42.62
2495.15	38.68	Ave	256	1.8	V	-13.08	25.60	54.00	-28.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) Low Channel 2422MHz									
424.33	42.33	QP	243	1.1	H	-13.21	29.12	46.00	-16.88
424.33	47.54	QP	176	1.2	V	-13.21	34.33	46.00	-11.67
4844.00	49.03	PK	334	1.4	V	-1.06	47.97	74.00	-26.03
4844.00	39.85	Ave	334	1.4	V	-1.06	38.79	54.00	-15.21
7266.00	45.61	PK	128	1.8	H	1.33	46.94	74.00	-27.06
7266.00	36.49	Ave	128	1.8	H	1.33	37.82	54.00	-16.18
2321.21	46.23	PK	139	1.6	V	-13.19	33.04	74.00	-40.96
2321.21	39.76	Ave	139	1.6	V	-13.19	26.57	54.00	-27.43
2363.53	43.61	PK	309	1.4	H	-13.14	30.47	74.00	-43.53
2363.53	38.14	Ave	309	1.4	H	-13.14	25.00	54.00	-29.00
2499.04	42.27	PK	199	1.7	V	-13.08	29.19	74.00	-44.81
2499.04	38.19	Ave	199	1.7	V	-13.08	25.11	54.00	-28.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) Middle Channel 2437MHz									
424.33	41.39	QP	140	1.1	H	-13.21	28.18	46.00	-17.82
424.33	47.59	QP	101	1.9	V	-13.21	34.38	46.00	-11.62
4874.00	48.88	PK	142	1.9	V	-0.62	48.26	74.00	-25.74
4874.00	38.98	Ave	142	1.9	V	-0.62	38.36	54.00	-15.64
7311.00	46.60	PK	32	1.3	H	2.21	48.81	74.00	-25.19
7311.00	37.03	Ave	32	1.3	H	2.21	39.24	54.00	-14.76
2317.40	46.67	PK	336	1.0	V	-13.19	33.48	74.00	-40.52
2317.40	37.13	Ave	336	1.0	V	-13.19	23.94	54.00	-30.06
2367.31	44.50	PK	87	1.8	H	-13.14	31.36	74.00	-42.64
2367.31	36.04	Ave	87	1.8	H	-13.14	22.90	54.00	-31.10
2499.85	43.37	PK	305	1.9	V	-13.08	30.29	74.00	-43.71
2499.85	36.39	Ave	305	1.9	V	-13.08	23.31	54.00	-30.69

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) High Channel 2452MHz									
424.33	41.46	QP	20	1.4	H	-13.21	28.25	46.00	-17.75
424.33	47.59	QP	96	1.9	V	-13.21	34.38	46.00	-11.62
4904.00	49.19	PK	50	1.9	V	-0.24	48.95	74.00	-25.05
4904.00	39.51	Ave	50	1.9	V	-0.24	39.27	54.00	-14.73
7356.00	47.21	PK	6	1.3	H	2.84	50.05	74.00	-23.95
7356.00	37.47	Ave	6	1.3	H	2.84	40.31	54.00	-13.69
2341.19	46.97	PK	323	1.4	V	-13.19	33.78	74.00	-40.22
2341.19	38.50	Ave	323	1.4	V	-13.19	25.31	54.00	-28.69
2378.03	42.95	PK	63	1.0	H	-13.14	29.81	74.00	-44.19
2378.03	38.10	Ave	63	1.0	H	-13.14	24.96	54.00	-29.04
2494.03	43.80	PK	101	1.9	V	-13.08	30.72	74.00	-43.28
2494.03	37.86	Ave	101	1.9	V	-13.08	24.78	54.00	-29.22

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to \_ 1.5 times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW \_ [3 × RBW].
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

### 10.2 Test Result


#### 9KHz – 30MHz

Mode: TX 11b channel 1

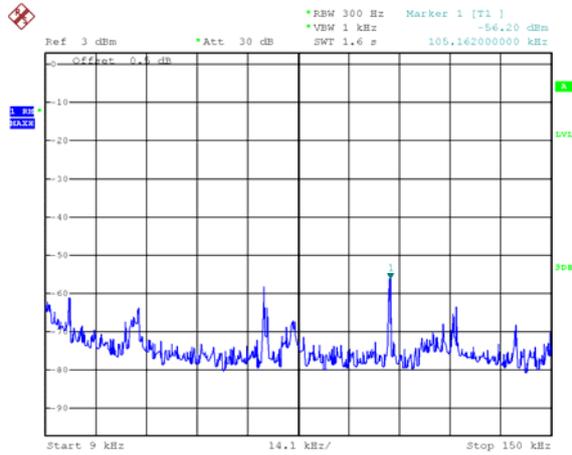


Date: 28.MAR.2024 11:06:45

Mode: TX 11b channel 1

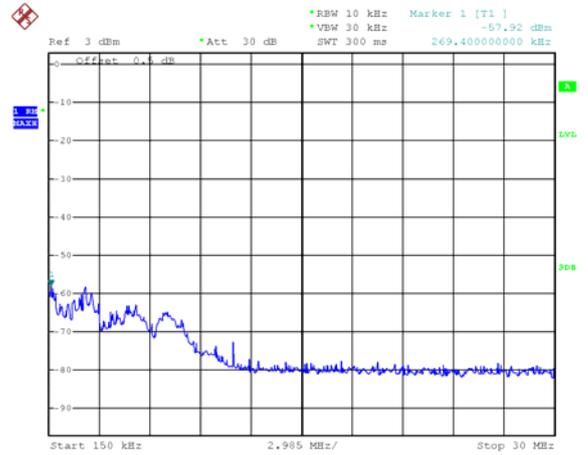


Date: 28.MAR.2024 11:07:22

Mode: TX 11b channel 6

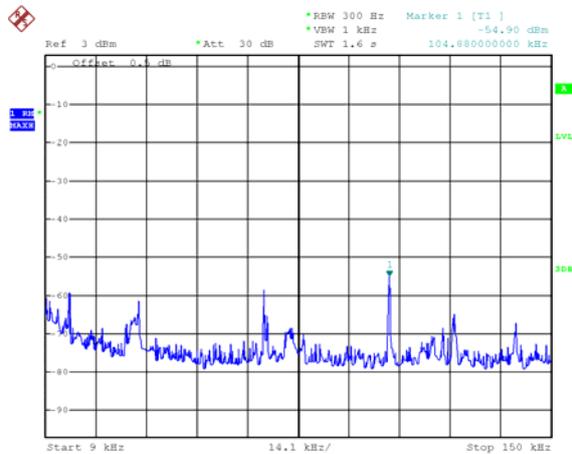


Date: 28.MAR.2024 11:14:18

Mode: TX 11b channel 6

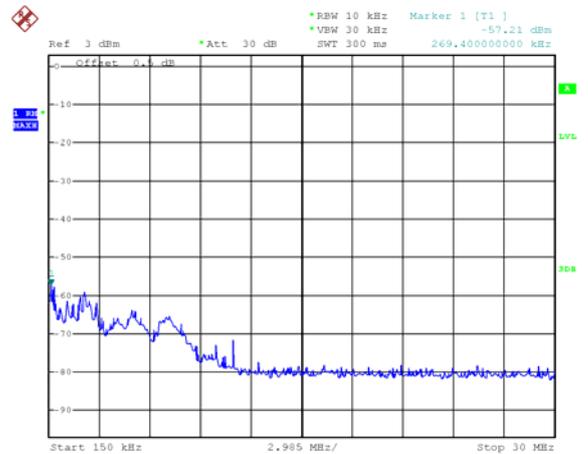


Date: 28.MAR.2024 11:14:44

Mode: TX 11b channel 11

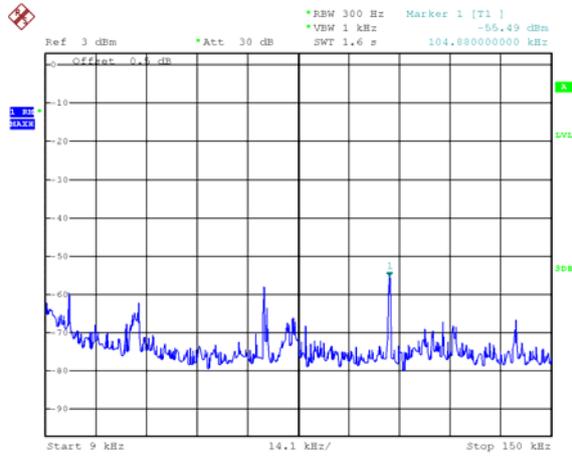


Date: 28.MAR.2024 11:20:15

Mode: TX 11b channel 11

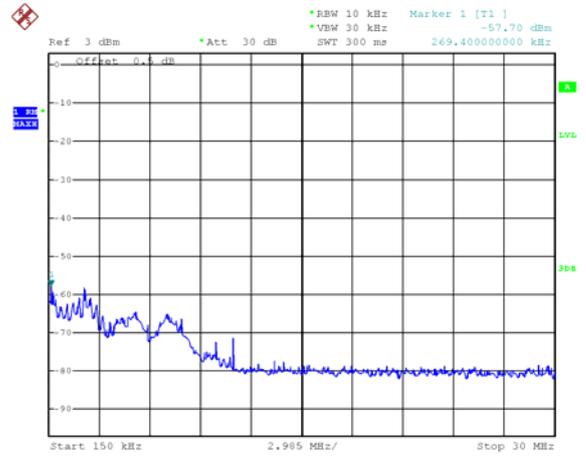


Date: 28.MAR.2024 11:20:42

Mode: TX 11g channel 1

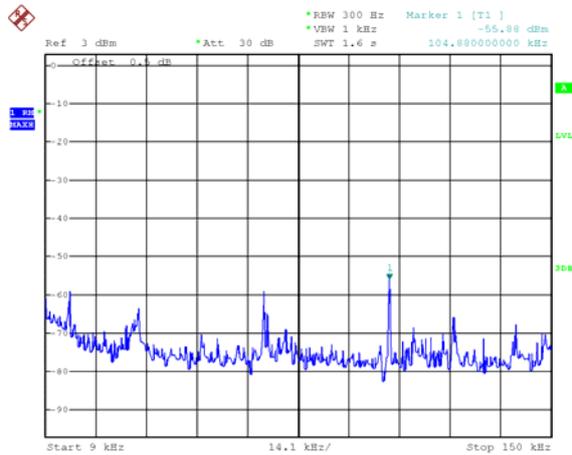


Date: 28.MAR.2024 11:34:26

Mode: TX 11g channel 1

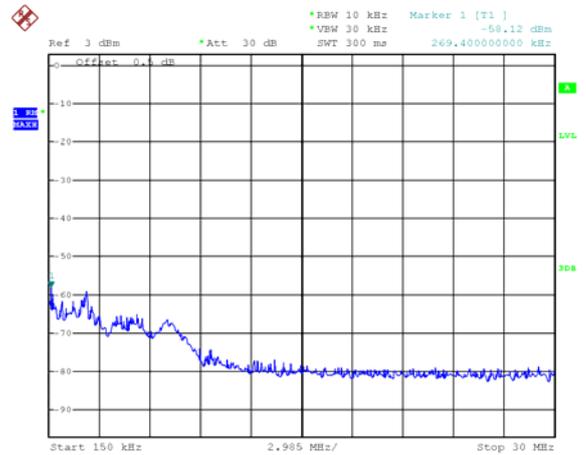


Date: 28.MAR.2024 11:34:59

Mode: TX 11g channel 6

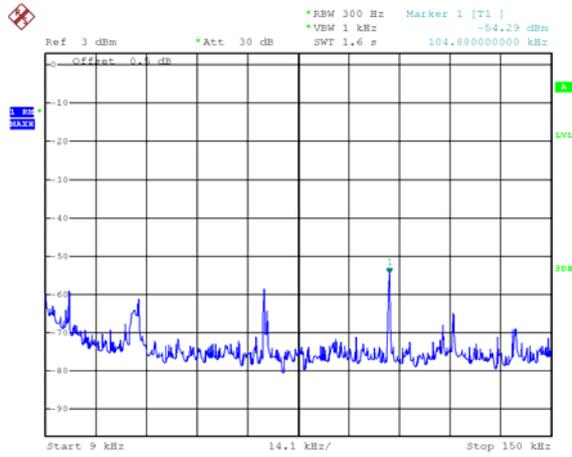


Date: 28.MAR.2024 13:17:46

Mode: TX 11g channel 6

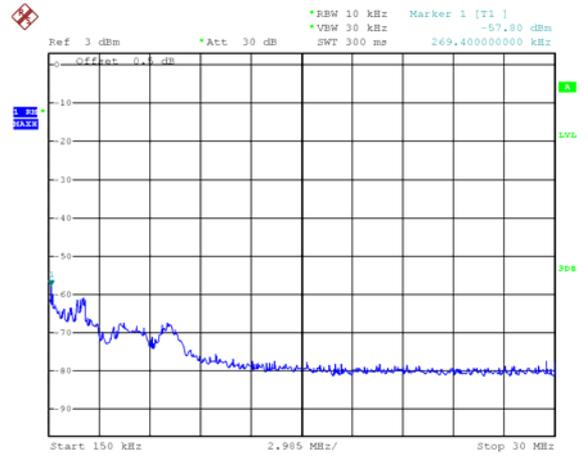


Date: 28.MAR.2024 13:18:15

Mode: TX 11g channel 11

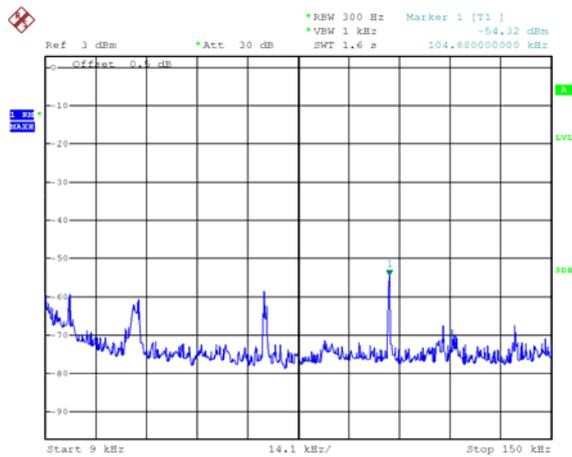


Date: 28.MAR.2024 13:26:45

Mode: TX 11g channel 11

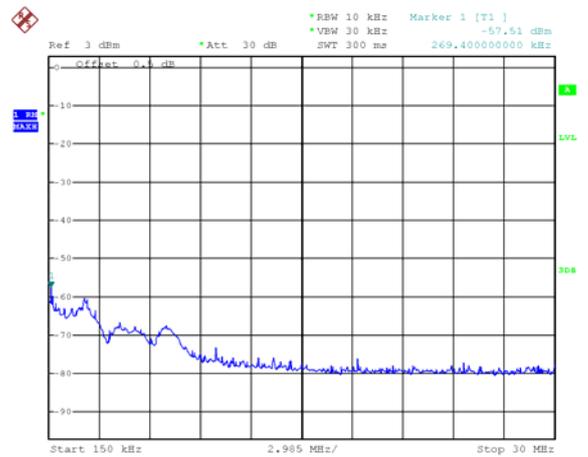


Date: 28.MAR.2024 13:28:08

Mode: TX 11n HT20 channel 1

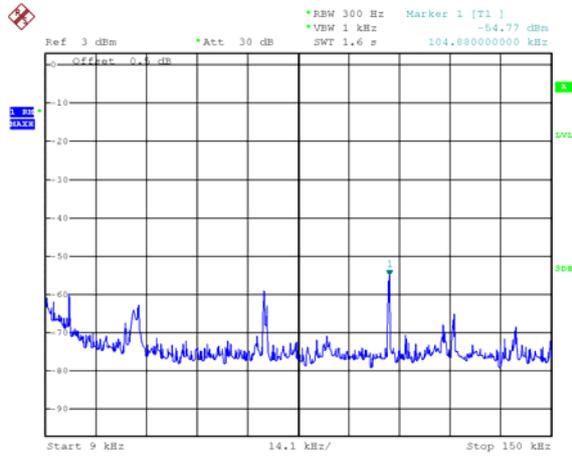


Date: 28.MAR.2024 13:48:40

Mode: TX 11n HT20 channel 1

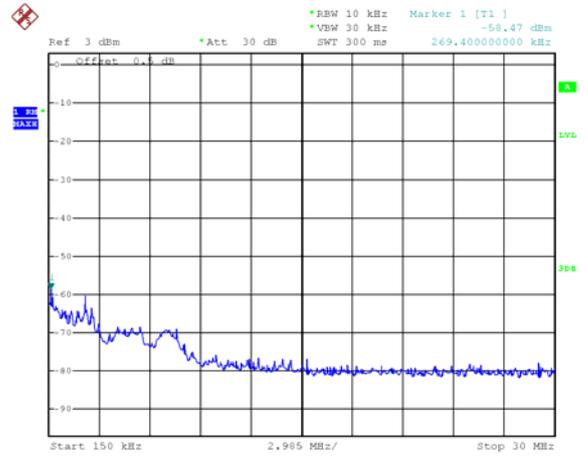


Date: 28.MAR.2024 13:49:11

Mode: TX 11 n HT20 channel 6

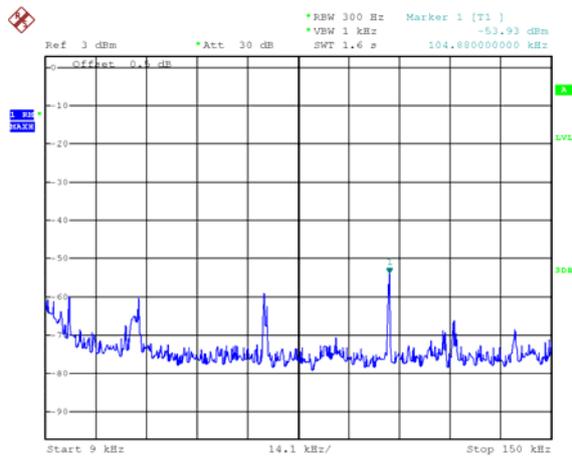


Date: 28.MAR.2024 13:56:04

Mode: TX 11 n HT20 channel 6

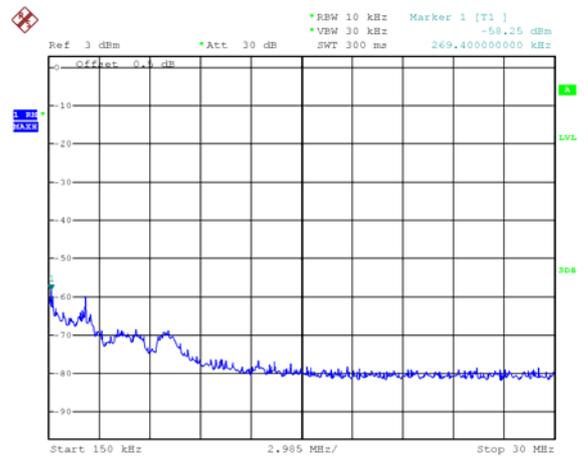


Date: 28.MAR.2024 13:56:33

Mode: TX 11 n HT20 channel 11

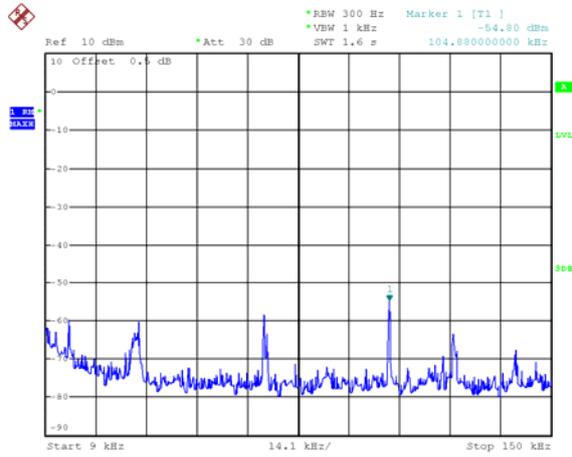


Date: 28.MAR.2024 14:09:48

Mode: TX 11 n HT20 channel 11

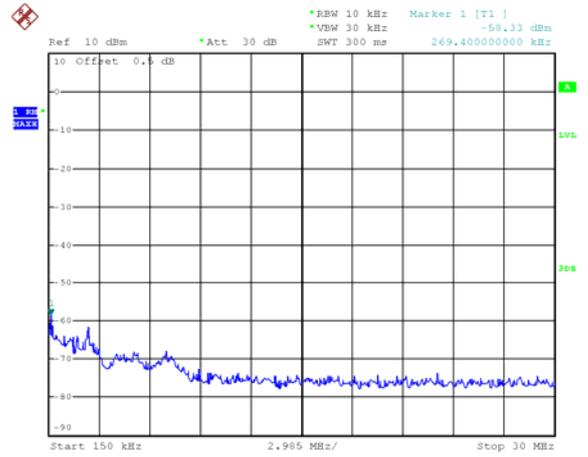


Date: 28.MAR.2024 14:10:06

Mode: TX 11n HT40 channel 3

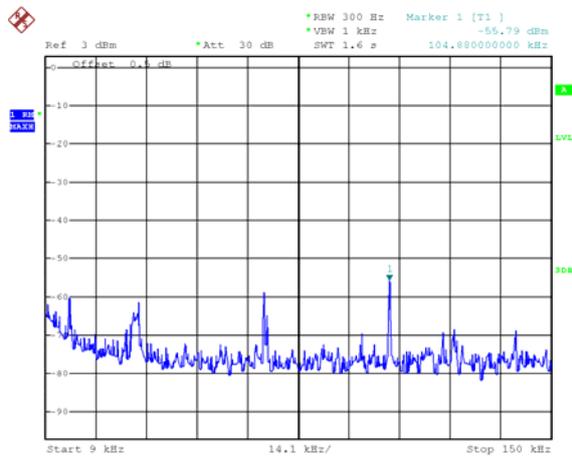


Date: 28.MAR.2024 14:16:42

Mode: TX 11n HT40 channel 3

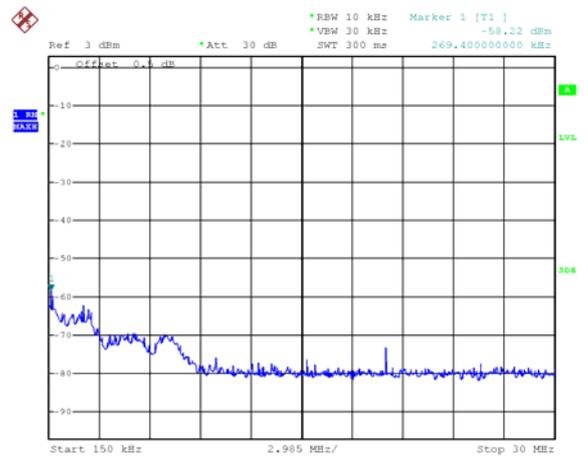


Date: 28.MAR.2024 14:17:05

Mode: TX 11 n HT40 channel 6

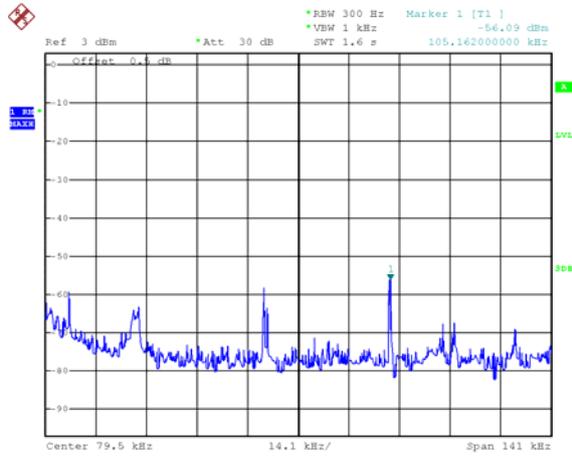


Date: 28.MAR.2024 14:25:06

Mode: TX 11 n HT40 channel 6

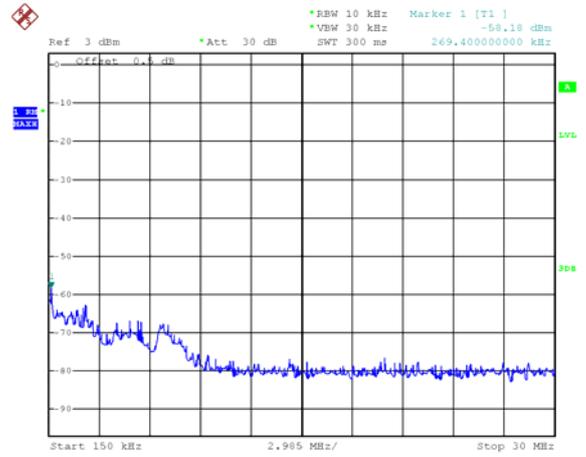


Date: 28.MAR.2024 14:25:23

Mode: TX 11 n HT40 channel 9

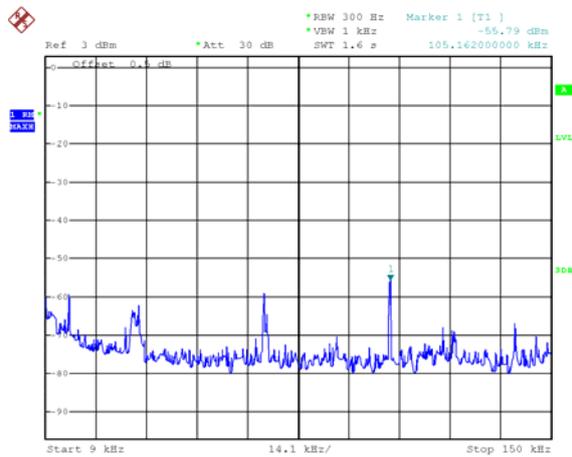

Date: 28.MAR.2024 14:32:03

Mode: TX 11 n HT40 channel 9

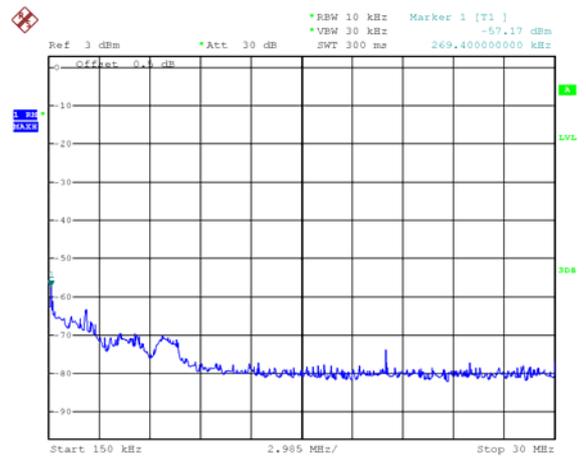

Date: 28.MAR.2024 14:36:13



Above 30MHz

Mode: TX 11b channel 1

Mode: TX 11b channel 6

Fundamental

Fundamental

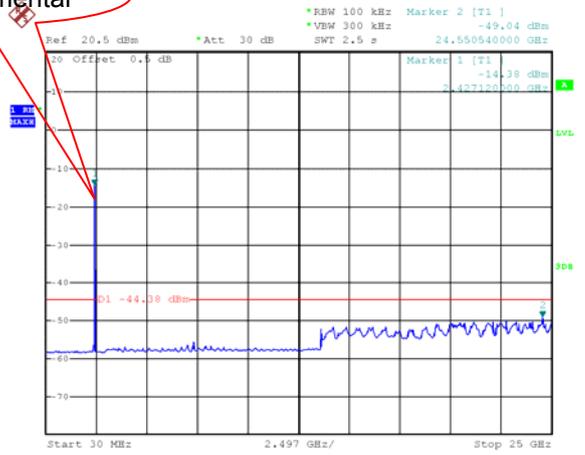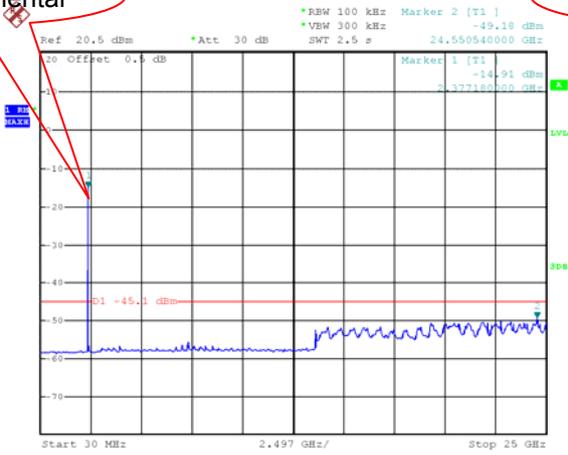


Date: 28.MAR.2024 11:07:59

Date: 28.MAR.2024 11:15:40

Mode: TX 11b channel 11

Fundamental

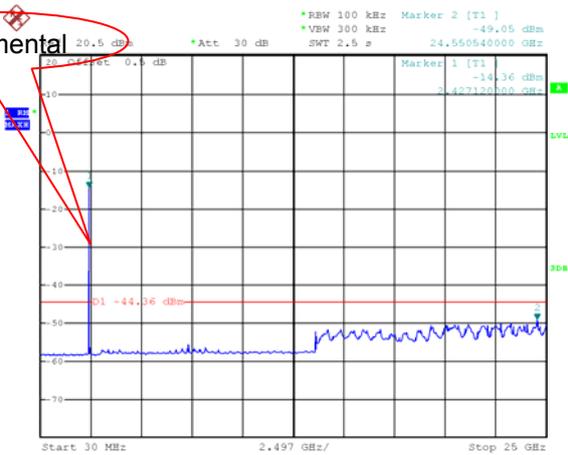


Date: 28.MAR.2024 11:21:36

Mode: TX 11g channel 1



Date: 28.MAR.2024 11:35:29

Mode: TX 11g channel 6

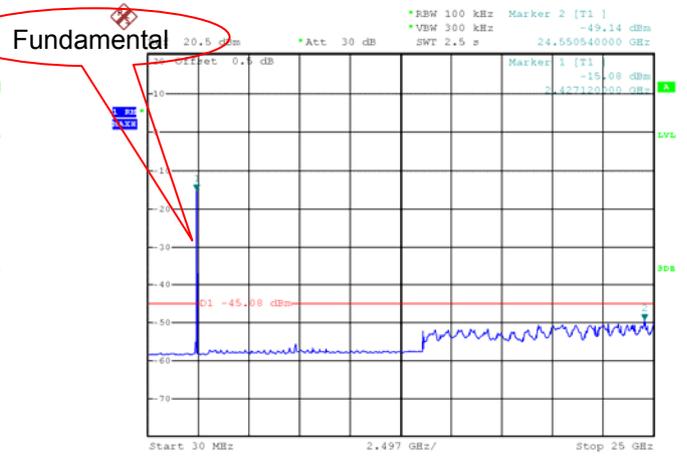

Date: 28.MAR.2024 13:18:57

Mode: TX 11g channel 11




Date: 28.MAR.2024 16:38:18

Mode: TX 11n HT20 channel 1



Date: 28.MAR.2024 13:50:04

Mode: TX 11 n HT20 channel 6

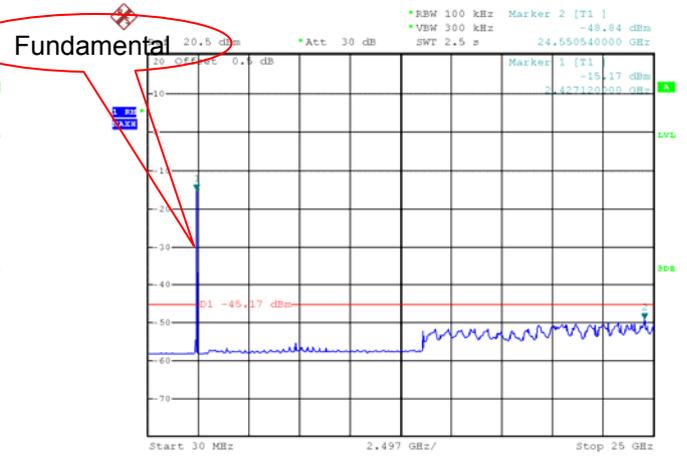

Date: 28.MAR.2024 13:59:35

Mode: TX 11 n HT20 channel 11




Date: 28.MAR.2024 14:10:37

Mode: TX 11n HT40 channel 3



Date: 28.MAR.2024 14:19:50

Mode: TX 11 n HT40 channel 6

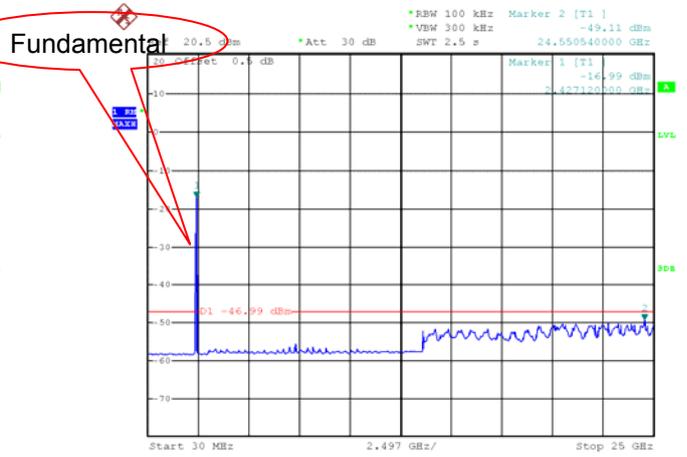

Date: 28.MAR.2024 14:26:04

Mode: TX 11 n HT40 channel 9



Date: 28.MAR.2024 14:36:44

## 11 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.2 Test Result


Test result plots shown as follows:

TX 11b: Band edge-left side

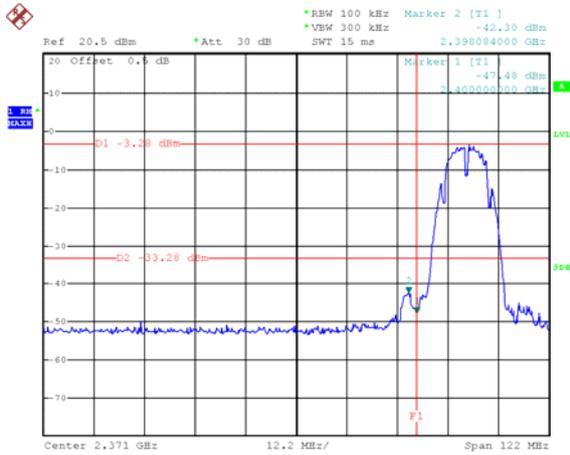


Date: 28.MAR.2024 11:05:58

TX 11b: Band edge-right side

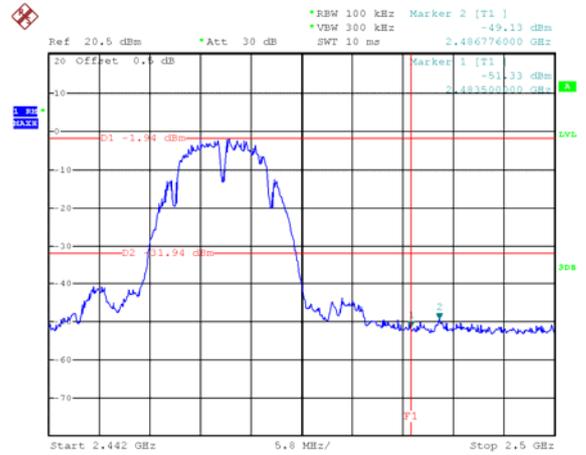


Date: 28.MAR.2024 11:19:16

TX 11g: Band edge-left side

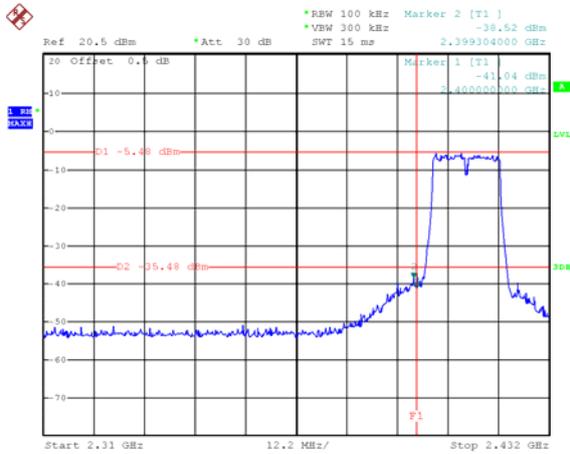


Date: 28.MAR.2024 11:33:22

TX 11g: Band edge-right side

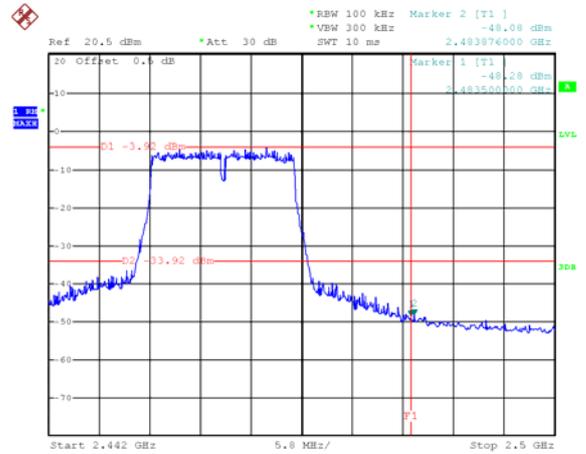


Date: 28.MAR.2024 13:25:32

TX 11n HT20: Band edge-left side

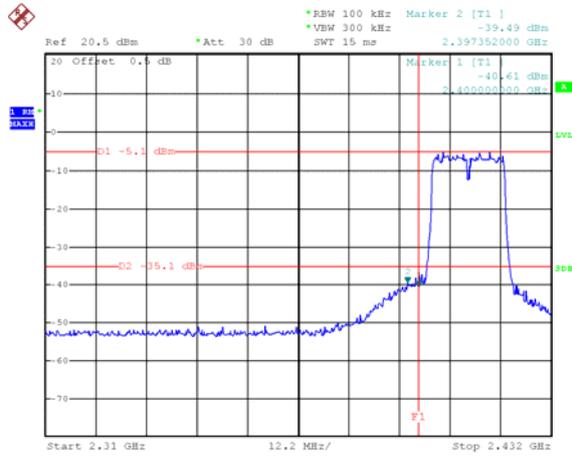


Date: 28.MAR.2024 13:47:31

TX 11n HT20: Band edge-right side

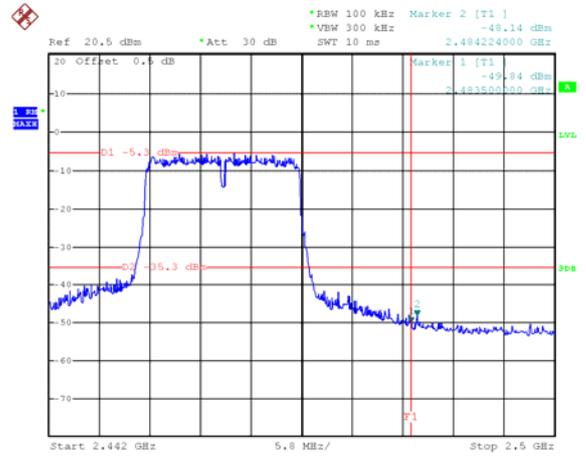


Date: 28.MAR.2024 14:08:24

TX 11n HT40: Band edge-left side

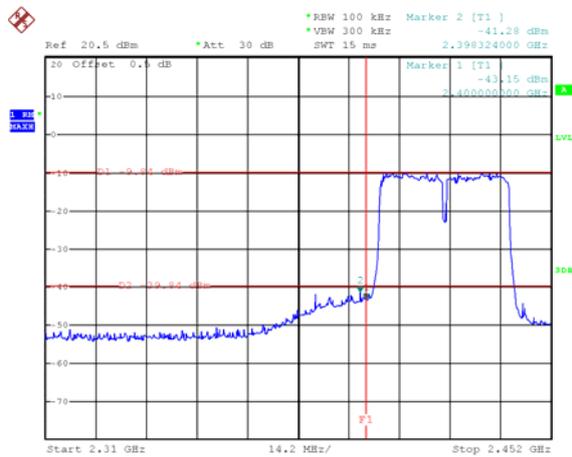

Date: 28.MAR.2024 14:16:02

TX 11n HT40: Band edge-right side

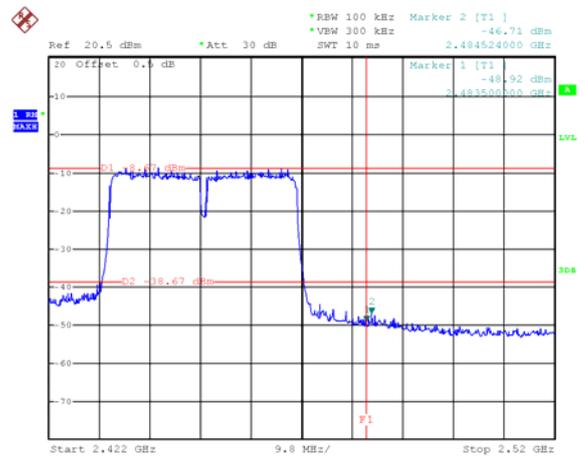

Date: 28.MAR.2024 14:30:00

## 12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode:	Transmitting

### 12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz  
99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

### 12.2 Test Result



Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.840	13.080
	Channel 6	9.780	13.080
	Channel 11	9.780	13.020
TX 11g	Channel 1	16.500	16.860
	Channel 6	16.500	16.860
	Channel 11	16.500	16.860
TX 11n HT20	Channel 1	17.400	17.700
	Channel 6	17.220	17.700
	Channel 11	17.220	17.700
TX 11n HT40	Channel 3	35.640	36.480
	Channel 6	35.880	36.480
	Channel 9	35.520	36.480

Test result plot:

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 1

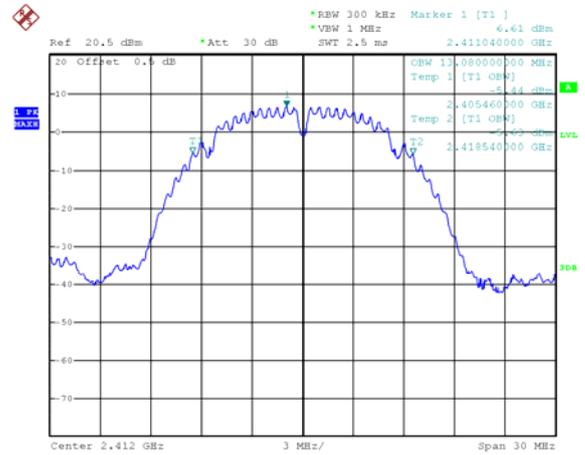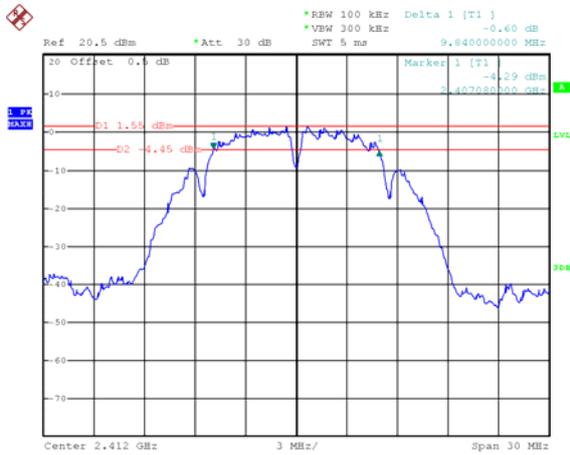

Date: 28.MAR.2024 10:55:00

Date: 22.MAR.2024 13:20:06

Mode: TX 11b channel 6

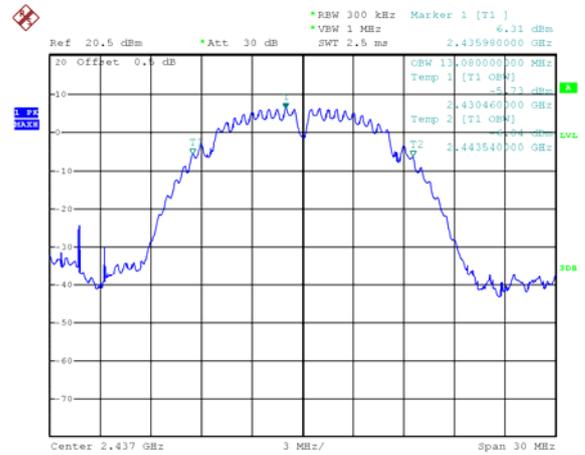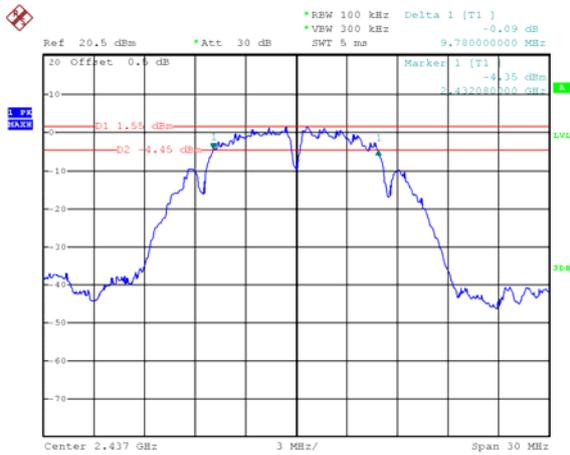



Date: 28.MAR.2024 11:13:26

Date: 22.MAR.2024 13:25:16

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 11

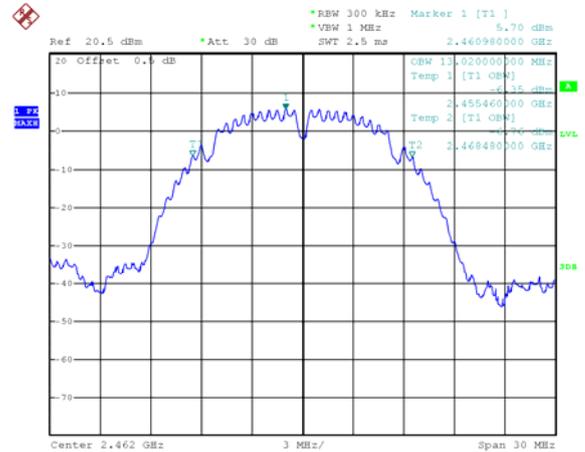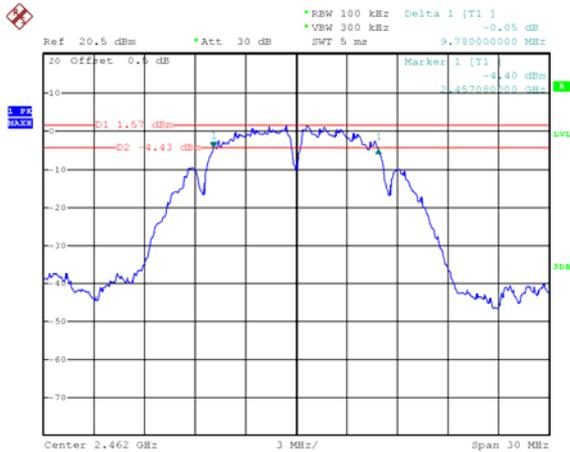

Date: 28.MAR.2024 11:17:33

Date: 22.MAR.2024 13:28:12

Mode: TX 11g channel 1

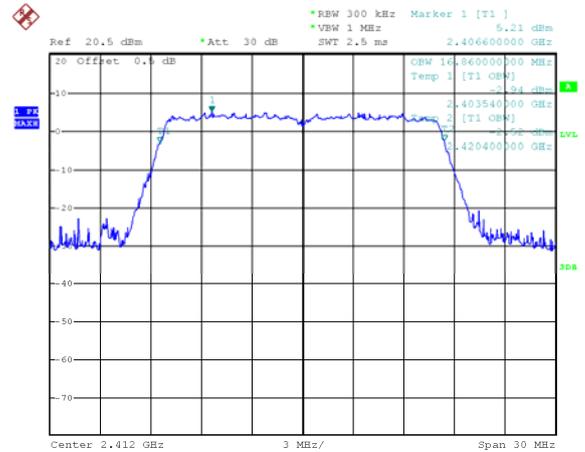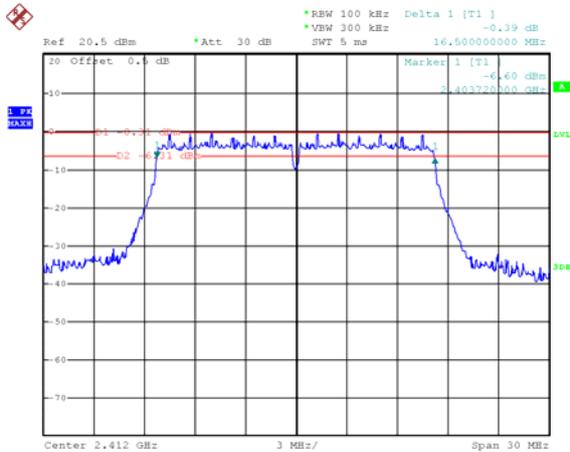



Date: 28.MAR.2024 11:26:57

Date: 22.MAR.2024 13:40:28

6 dB Bandwidth

99% Bandwidth



Mode: TX 11g channel 6

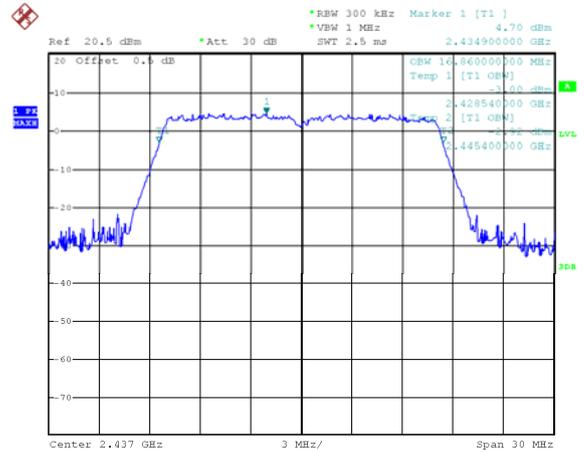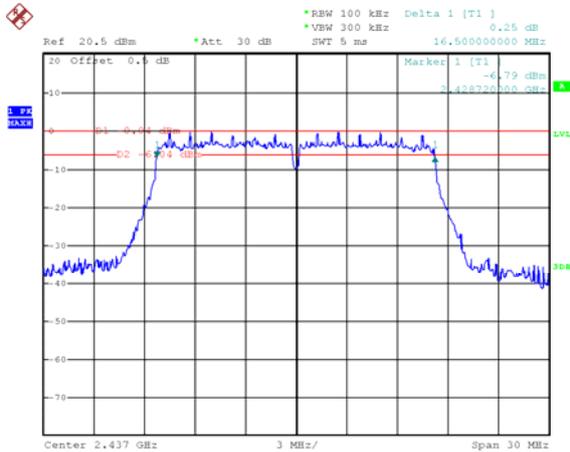

Date: 28.MAR.2024 13:15:53

Date: 22.MAR.2024 13:39:30

Mode: TX 11g channel 11

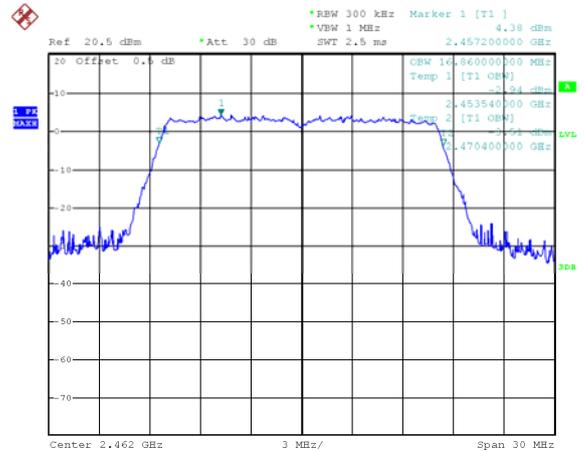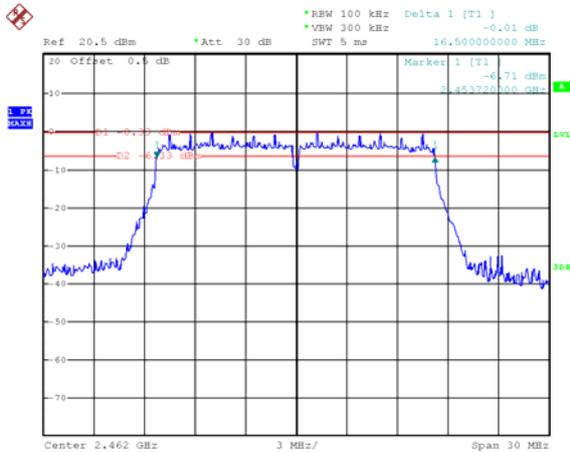



Date: 28.MAR.2024 13:21:35

Date: 22.MAR.2024 13:30:34

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 1

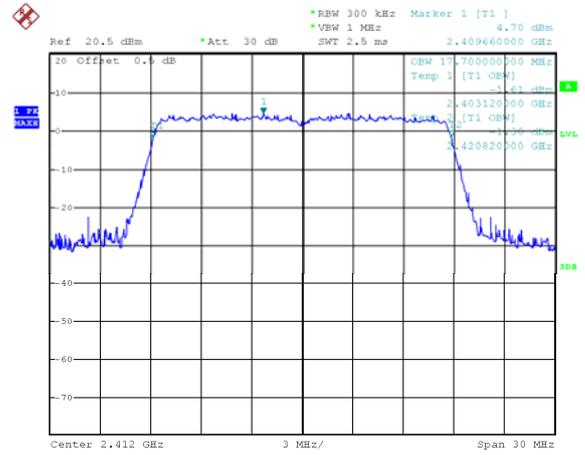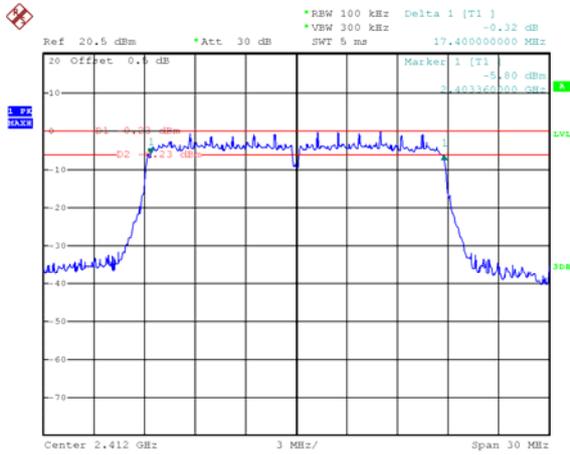

Date: 28.MAR.2024 13:35:33

Date: 22.MAR.2024 13:41:23

Mode: TX 11n HT20 channel 6

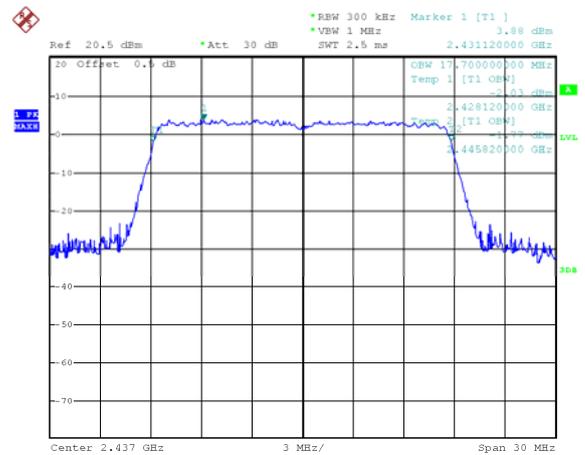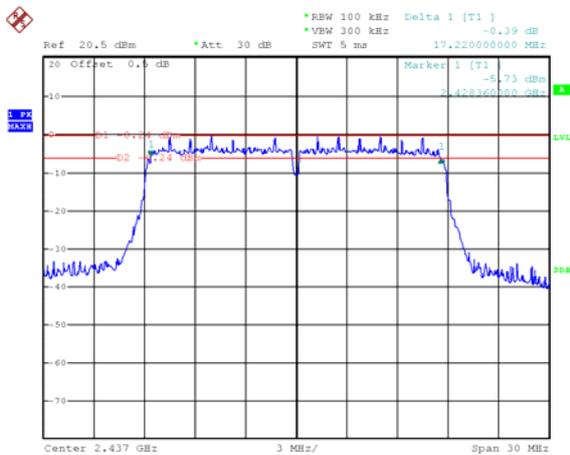



Date: 28.MAR.2024 13:52:20

Date: 22.MAR.2024 13:42:18

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 11

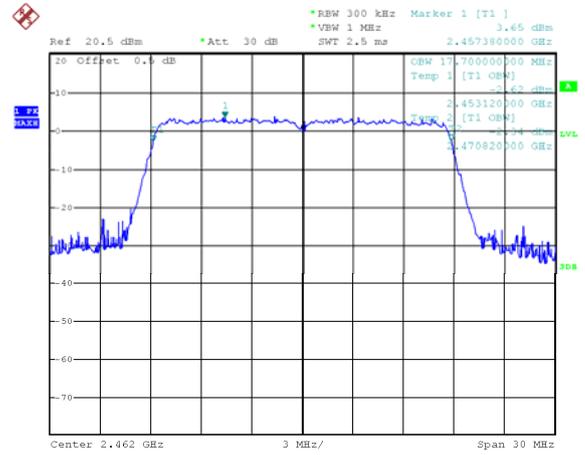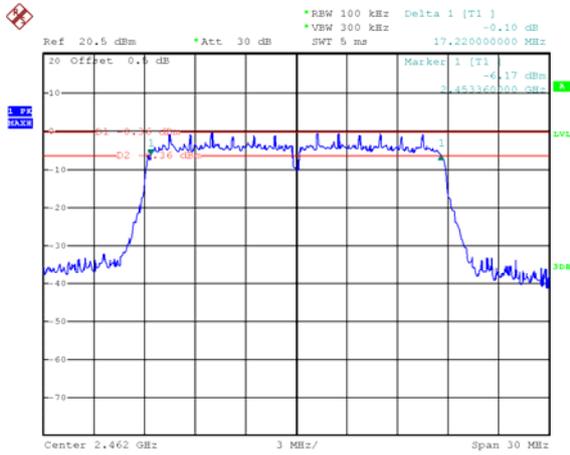

Date: 28.MAR.2024 14:04:50

Date: 22.MAR.2024 13:43:19

Mode: TX 11n HT40 channel 3

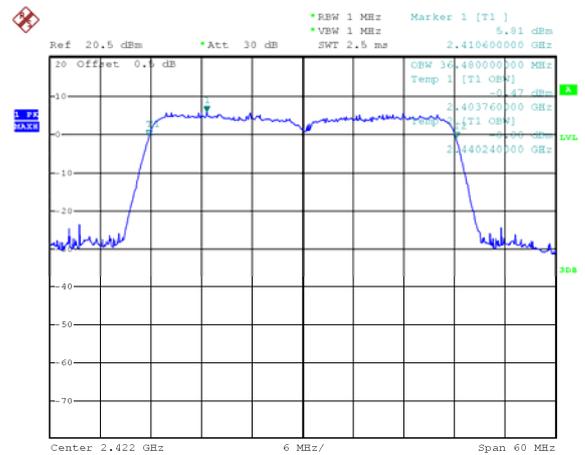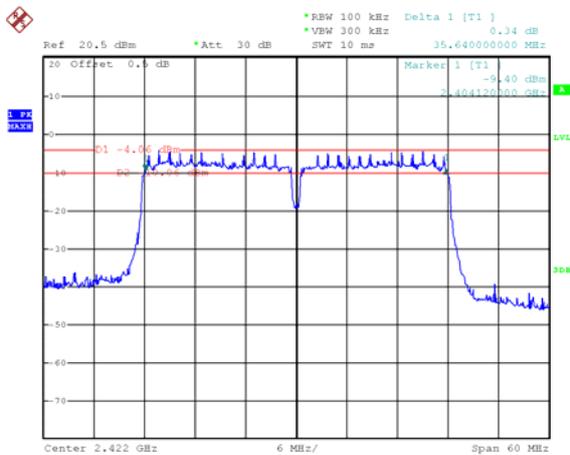



Date: 28.MAR.2024 14:12:46

Date: 22.MAR.2024 13:47:55

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT40 channel 6

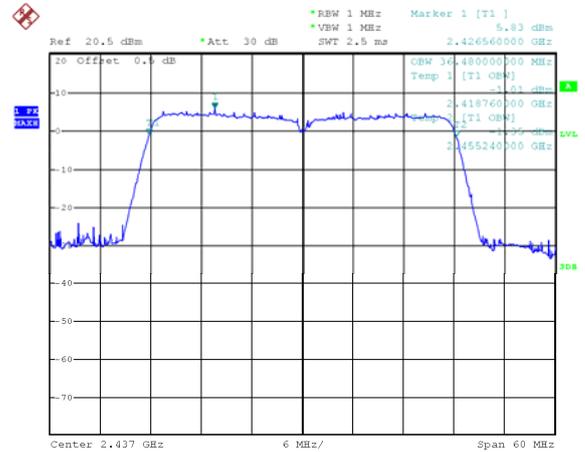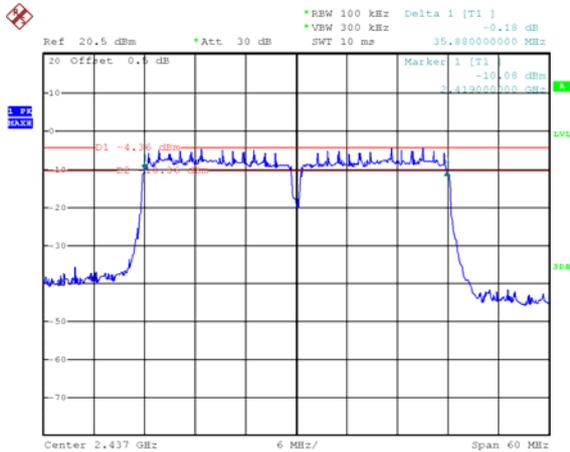

Date: 28.MAR.2024 14:22:31

Date: 22.MAR.2024 13:46:10

Mode: TX 11n HT40 channel 9

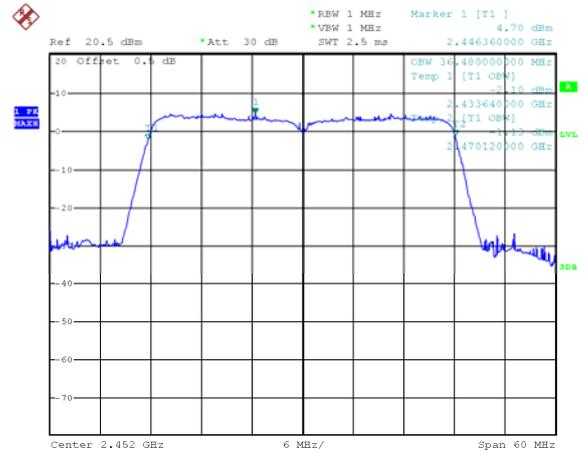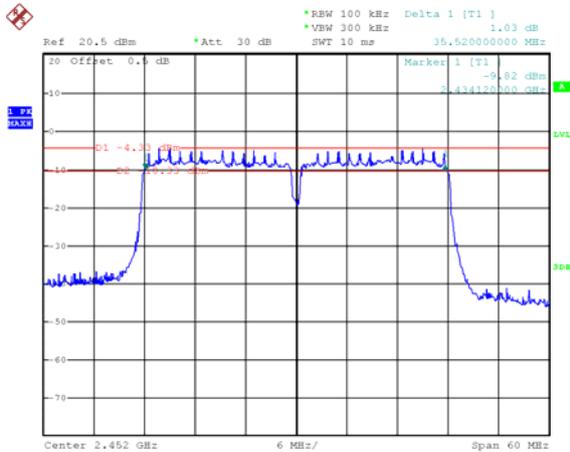

Date: 28.MAR.2024 14:27:56

Date: 22.MAR.2024 13:45:15

## 13 Maximum Peak conducted Output Power

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019 §15.247(b)
Test Limit:	The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

### 13.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

#### Section 8.3.1.1 RBW $\geq$ DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

#### Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.


Subclause 11.9.2 of ANSI C63.10 is applicable.

### 13.2 Test Result

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	15.41	0.00	<b>15.41</b>	1W/30dBm
	Middle-2437	15.01		15.01	1W/30dBm
	High-2462	14.35		14.35	1W/30dBm
TX 11g	Low-2412	14.46	0.00	14.46	1W/30dBm
	Middle-2437	14.17		14.17	1W/30dBm
	High-2462	13.59		13.59	1W/30dBm
TX 11n HT20	Low-2412	14.43	0.00	14.43	1W/30dBm
	Middle-2437	13.97		13.97	1W/30dBm
	High-2462	13.62		13.62	1W/30dBm
TX 11n HT40	Low-2422	13.23	0.00	13.23	1W/30dBm
	Middle-2437	12.93		12.93	1W/30dBm
	High-2452	12.84		12.84	1W/30dBm


Test Plot:

Mode: TX 11b channel 1

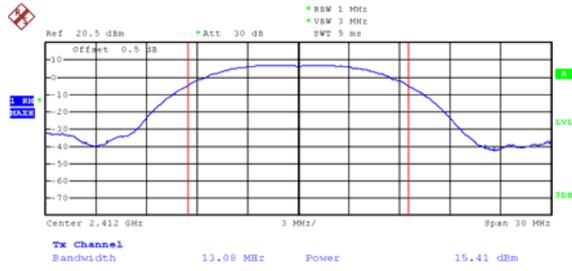


Date: 22.MAR.2024 14:04:39

Mode: TX 11b channel 6

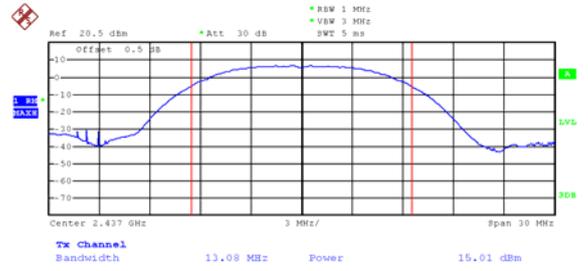


Date: 22.MAR.2024 14:02:32

Mode: TX 11b channel 11

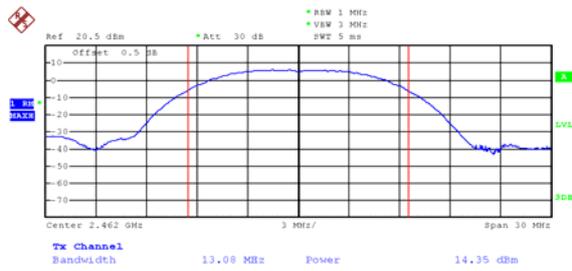


Date: 22.MAR.2024 13:58:25

Mode: TX 11g channel 1

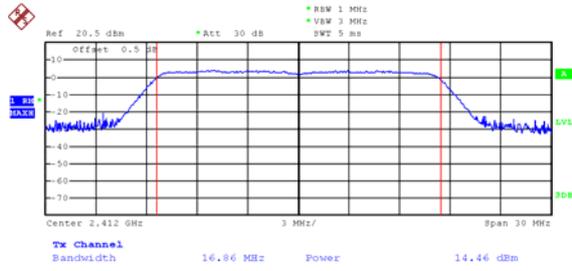


Date: 22.MAR.2024 13:54:42

Mode: TX 11g channel 6

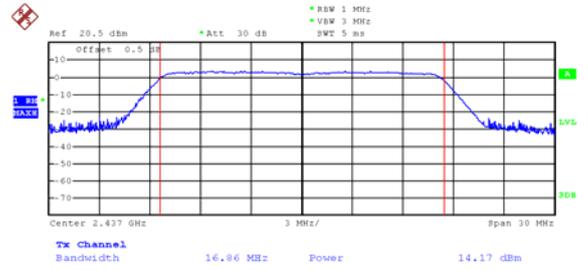


Date: 22.MAR.2024 13:55:31

Mode: TX 11g channel 11

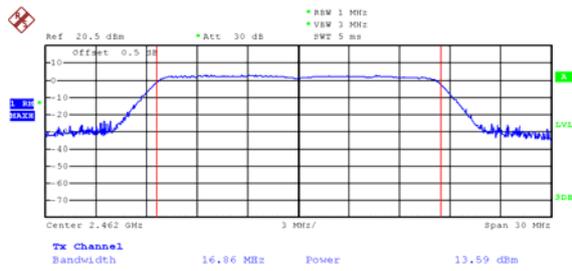


Date: 22.MAR.2024 13:57:33

Mode: TX 11n HT20 channel 1

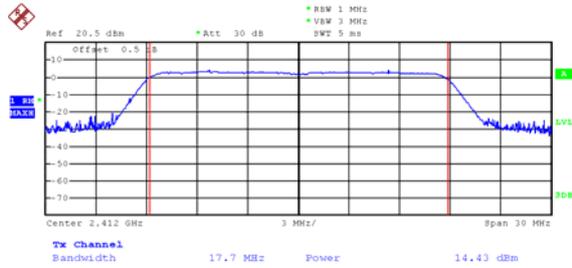


Date: 22.MAR.2024 13:53:41

Mode: TX 11n HT20 channel 6

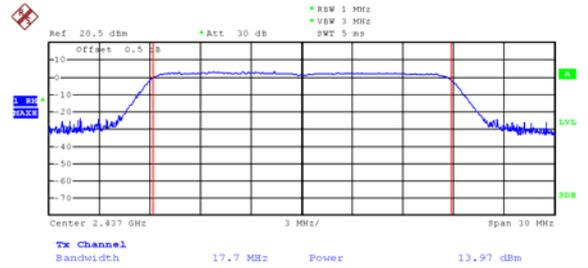


Date: 22.MAR.2024 13:52:53

Mode: TX 11n HT20 channel 11

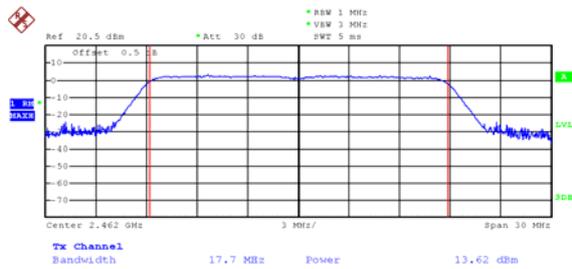


Date: 22.MAR.2024 13:52:06

Mode: TX 11n HT40 channel 3

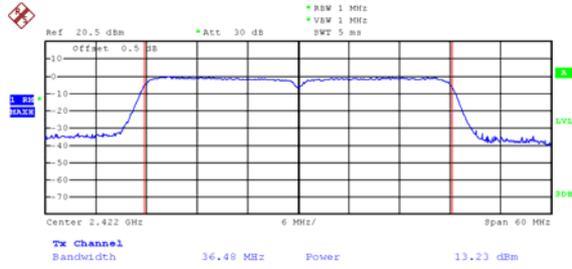


Date: 22.MAR.2024 13:48:49

Mode: TX 11n HT40 channel 6

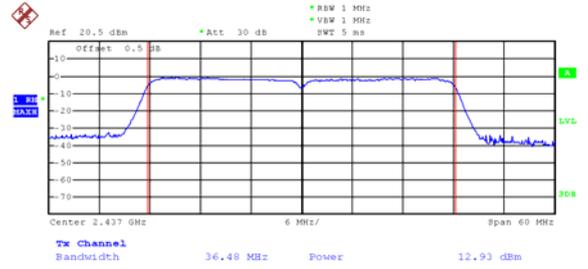

Date: 22.MAR.2024 13:49:35

Mode: TX 11n HT40 channel 9

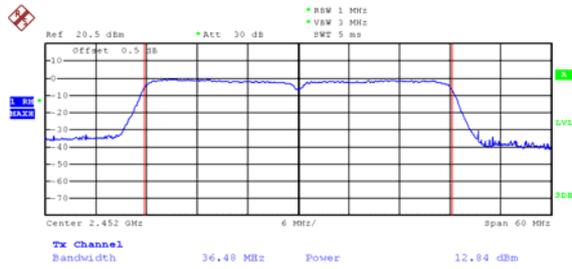

Date: 22.MAR.2024 13:50:34

## 14 Power Spectral density

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

### 14.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

**Subclause 11.10 of ANSI C63.10 is applicable.**

Choose the test procedure according to the product type

#### Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

#### AVG PSD


Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

### 14.2 Test Result

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	-19.76	0.00	-19.76	8dBm per 3kHz
	Middle-2437	-19.20		-19.20	8dBm per 3kHz
	High-2462	-18.74		-18.74	8dBm per 3kHz
TX 11g	Low-2412	-22.50	0.00	-22.50	8dBm per 3kHz
	Middle-2437	-22.14		-22.14	8dBm per 3kHz
	High-2462	-22.64		-22.64	8dBm per 3kHz
TX 11n HT20	Low-2412	-22.45	0.00	-22.45	8dBm per 3kHz
	Middle-2437	-22.30		-22.30	8dBm per 3kHz
	High-2462	-22.67		-22.67	8dBm per 3kHz
TX 11n HT40	Low-2422	-27.84	0.00	-27.84	8dBm per 3kHz
	Middle-2437	-27.46		-27.46	8dBm per 3kHz
	High-2452	-28.08		-28.08	8dBm per 3kHz


Test Plot:

Mode: TX 11b channel 1

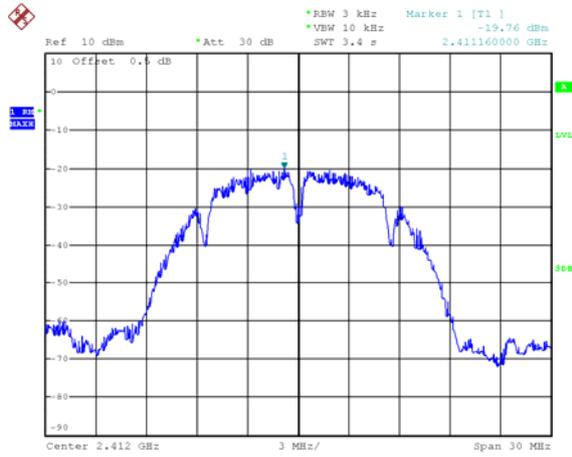

Date: 28.MAR.2024 10:56:25

Mode: TX 11b channel 6

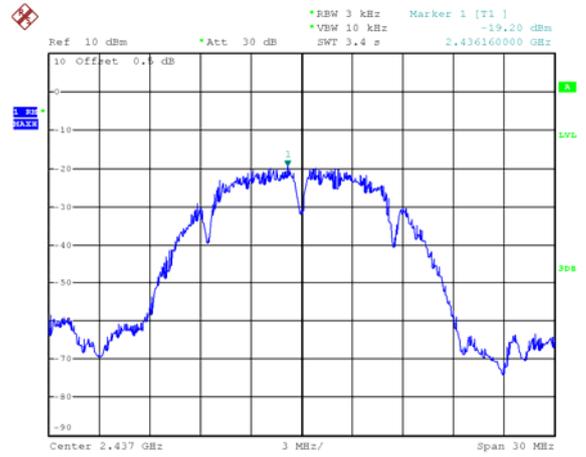


Date: 28.MAR.2024 11:12:16

Mode: TX 11b channel 11




Date: 28.MAR.2024 11:18:13

Mode: TX 11g channel 1

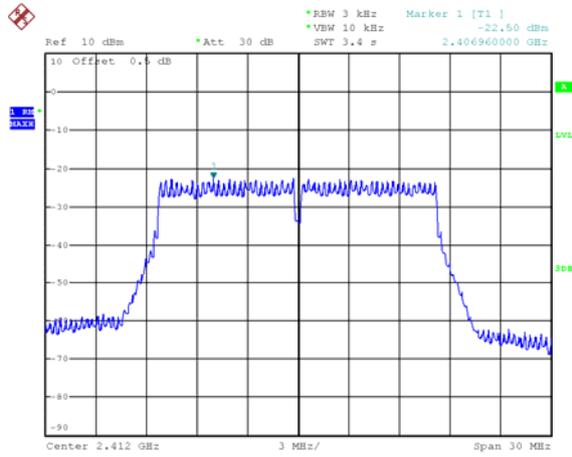


Date: 28.MAR.2024 11:28:55

Mode: TX 11g channel 6

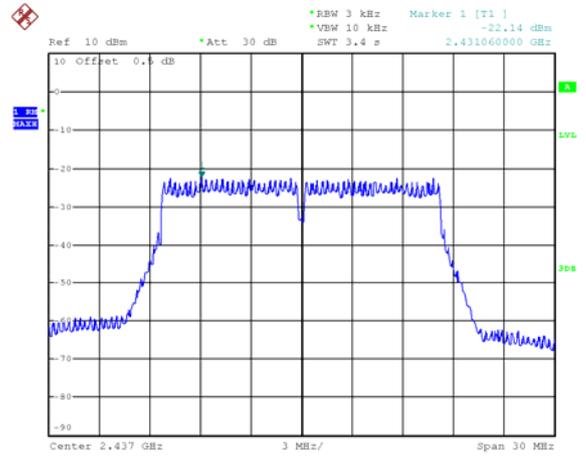


Date: 28.MAR.2024 13:16:32

Mode: TX 11g channel 11

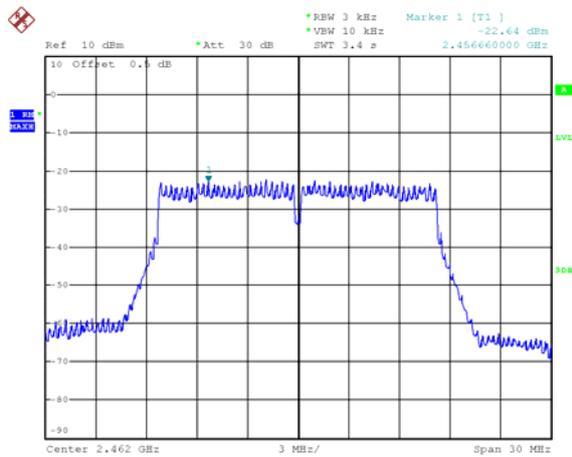


Date: 28.MAR.2024 13:22:21

Mode: TX 11n HT20 channel 1

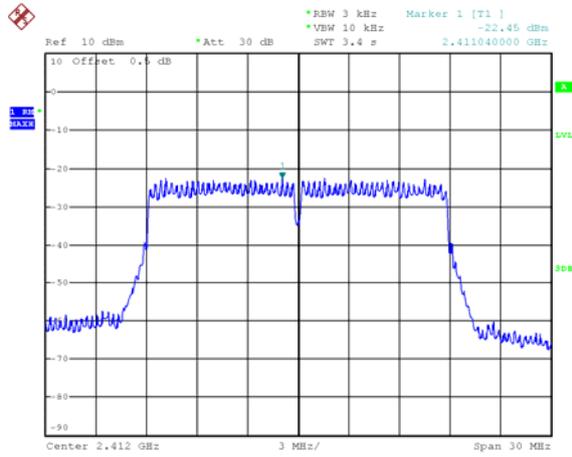


Date: 28.MAR.2024 13:43:41

Mode: TX 11n HT20 channel 6

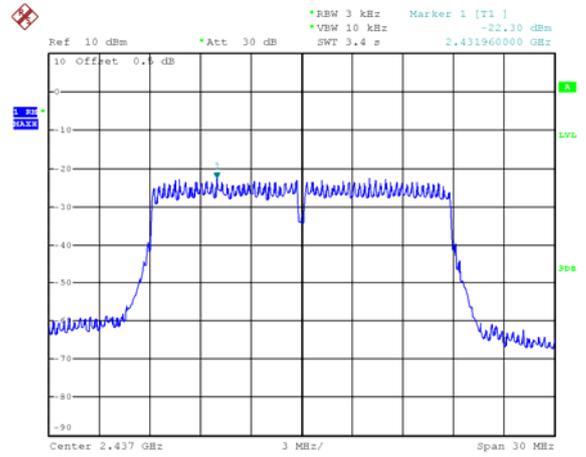


Date: 28.MAR.2024 13:54:47

Mode: TX 11n HT20 channel 11

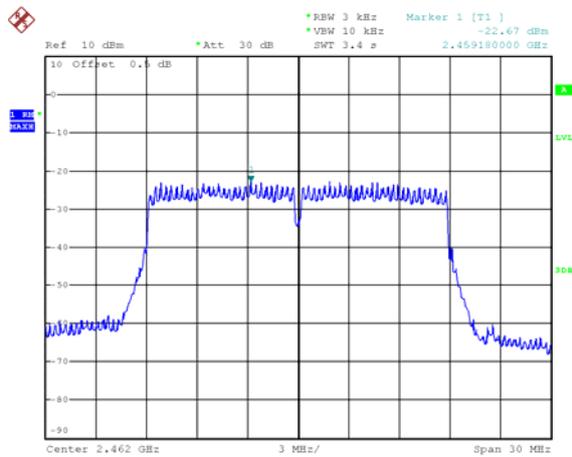


Date: 28.MAR.2024 14:06:05

Mode: TX 11n HT40 channel 3

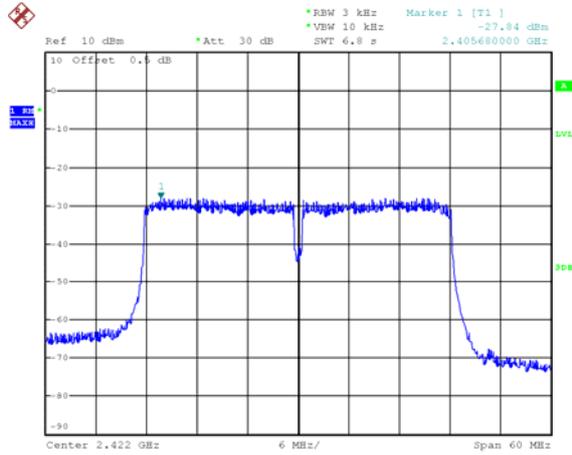


Date: 28.MAR.2024 14:13:28

Mode: TX 11n HT40 channel 6

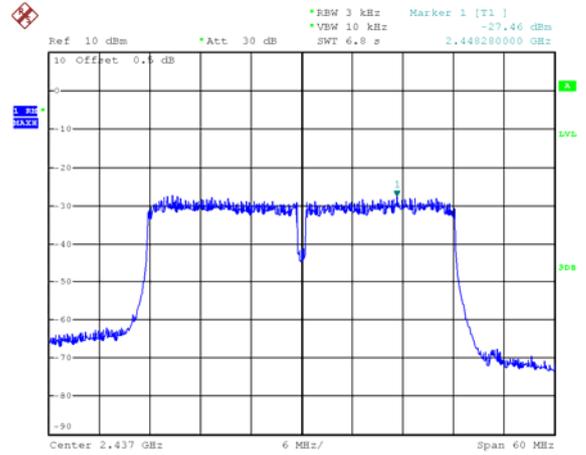

Date: 28.MAR.2024 14:23:12

Mode: TX 11n HT40 channel 9

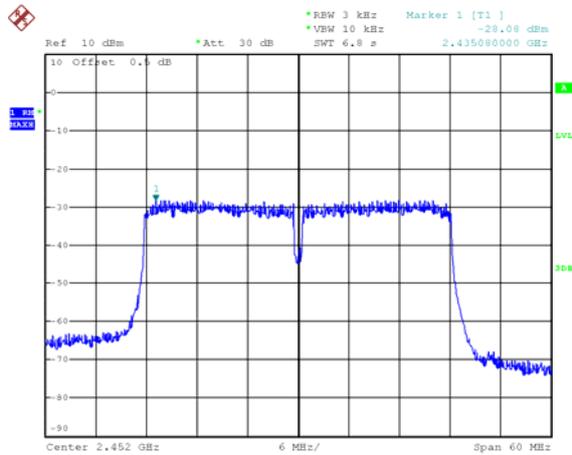

Date: 28.MAR.2024 14:28:40

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a non-detachable antenna and fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

## **16 RF Exposure**

Note: Please refer to SAR Report: WTX24X03064241W001.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: Appendix- BM03-Photos.

=====**End of Report**=====