

Test Report

Product: Anti-Lost Wireless Powerbank

Trade Mark: Wisdene

Model Number: PB002M

FCC ID: 2A6W7-PB002M

Prepared for

Shenzhen XinNengDa Technology Co., Ltd
301, Building A4, No. 11, Tianyang 4th Road, Dongfang Community,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1 GENERAL DESCRIPTION	6
1.1 DESCRIPTION OF EUT	6
1.2 TEST MODE.....	6
1.3 OPERATION CHANNEL LIST.....	6
1.4 TEST SETUP	7
1.5 ANCILLARY EQUIPMENT	7
2 SUMMARY OF TEST RESULT	8
3 TEST FACILITIES AND ACCREDITATIONS	9
3.1 TEST LABORATORY	9
3.2 ENVIRONMENTAL CONDITIONS.....	9
3.3 MEASUREMENT UNCERTAINTY	9
3.4 TEST SOFTWARE.....	9
4 LIST OF TEST EQUIPMENT	10
5 TEST ITEM AND RESULTS.....	12
5.1 ANTENNA REQUIREMENT	12
5.1.1 Standard Requirement	12
5.1.2 Test Result.....	12
5.2 CONDUCTED EMISSION.....	13
5.2.1 Limits	13
5.2.2 Test Procedures.....	13
5.2.3 Test Setup.....	14
5.2.4 Test Result.....	14
5.3 RADIATED EMISSION	17
5.3.1 Limits	17
5.3.2 Test Procedures	17
5.3.3 Test Setup.....	17
5.3.4 Test Result.....	18
5.3.5 Band Edge - Radiated	22
5.3.6 Spurious emission in restricted band 1GHz-25GHz.....	23
5.4 PEAK OUTPUT POWER	24
5.4.1 Limit	24
5.4.2 Test Procedure	24
5.4.3 Test Setup.....	24
5.4.4 Test Results	24
5.5 POWER SPECTRAL DENSITY.....	27
5.5.1 Limit	27
5.5.2 Test Procedure	27
5.5.3 Test Setup.....	27
5.5.4 Test Results	27
5.6 6dB BANDWIDTH.....	30
5.6.1 Limit	30
5.6.2 Test Procedure	30
5.6.3 Test Setup.....	30
5.6.4 Test Results	30
5.7 DUTY CYCLE	33
5.7.1 Limit	33
5.7.2 Test Procedure	33
5.7.3 Test Setup.....	33
5.7.4 Test Results	33
5.8 CONDUCTED BAND EDGE	37
5.8.1 Limit	37

5.8.2	Test Procedure	37
5.8.3	Test Setup.....	37
5.8.4	Test Results	37
5.9	SPURIOUS RF CONDUCTED EMISSIONS	40
5.9.1	<i>Limit</i>	40
5.9.2	<i>Measuring Instruments</i>	40
5.9.3	<i>Test Procedure</i>	40
5.9.4	<i>Test Setup.....</i>	40
5.9.5	<i>Test Results</i>	40
6	PHOTOGRAPHS OF THE TEST SETUP.....	43
7	PHOTOGRAPHS OF THE EUT.....	45

TEST RESULT CERTIFICATION

Applicant's Name : Shenzhen XinNengDa Technology Co.,Ltd
301, Building A4, No. 11, Tianyang 4th Road, Dongfang
Address : Community, Songgang Street, Bao'an District, Shenzhen,
Guangdong, China

Manufacturer's Name : Shenzhen XinNengDa Technology Co.,Ltd
301, Building A4, No. 11, Tianyang 4th Road, Dongfang
Address : Community, Songgang Street, Bao'an District, Shenzhen,
Guangdong, China

Product description

Product name : Anti-Lost Wireless Powerbank
Model Number : PB002M
Standards : FCC Part 15.247
Test procedure : IEEE/ANSI C63.10-2020
KDB558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test

Date (s) of performance of tests : Apr. 17, 2024~Apr. 30, 2024
Test Result : **Pass**

Testing Engineer :

(Z o e S u)

Technical Manager :

(G a r y L u)

Authorized Signatory :

(L e o S u)

Revision History

1 General Description

1.1 Description of EUT

Product name:	Anti-Lost Wireless Powerbank
Model name:	PB002M
Series Model:	AVNU-AT08
Different of series model:	All the models are the same circuit and module, except the model No..
Operation frequency:	2402-2480MHz
Modulation type:	GFSK
Bit Rate of transmitter:	1 Mbps, 2 Mbps
Antenna type:	FPCB Antenna
Antenna gain:	1.08dBi
Max. output power:	0.3dBm
Hardware version:	V1.0
Software version:	V1.0
Battery:	DC 3.87V, 4400mAh, 17.415Wh
Power supply:	USB-C Input/Output: DC 5V/3A, 9V/2.4A, 12V/1.75A Wireless Output: 5W/7.5W/10W/15W
Adapter information:	N/A

1.2 Test Mode

Test Mode	Channel	Frequency (MHz)
BLE 1M	00	2402
BLE 1M	19	2440
BLE 1M	39	2480
BLE 2M	00	2402
BLE 2M	19	2440
BLE 2M	39	2480

1.3 Operation Channel list

Channel No.	Frequency (MHz)						
0	2402	10	2422	20	2442	30	2462

1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.5 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Adapter	HN-200325CP0	JG06LEN2T0 4802	Huawei Honor Co., LTD
Laptop	/	/	Lenovo

2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna Requirement	Pass	
2	15.247 (b)	Peak Output Power	Pass	
3	15.207	Conducted Emission	Pass	
4	15.247 (d) & 15.209	Radiated Spurious Emission	Pass	
5	15.247 (e)	Power Spectral Density	Pass	
6	15.247 (a)(2)	6dB Bandwidth	Pass	
7	558074 D01 15.247 Meas Guidance v05r02 Chapter 6	Duty Cycle	Pass	
8	15.205	Band Edge Emission	Pass	
9	15.247(d)	Spurious RF Conducted Emissions	Pass	

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	
Humidity	± 5 %	

3.4 Test Software

Software name	Manufacturer	Model	Version
EMI Measurement	Farad	EZ-EMC	V1.1.4.2
Conducted test system	MWRF-test	MTS 8310	V2.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-04-02	2026-04-01
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-04-06	2026-04-05
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 91270	01193	2022-04-02	2024-04-01
4	HB-E004	Preamplifier	Noyetec	LAN-09 10	NYCM1420 101	2023-05-11	2024-05-10
5	HB-E005	Preamplifier	Noyetec	LAN-011 8	NYCM1420 102	2023-05-12	2024-05-11
6	HB-E006	Preamplifier	Noyetec	LAN-18 40	NYCM1420 103	2023-06-11	2024-06-10
7	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2023-05-12	2024-05-11
8	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
9	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM142 0204	/	/
10	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2023-05-11	2024-05-10
11	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2022-07-24	2024-07-23

Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2023-05-12	2024-05-11
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2023-05-12	2024-05-11
3	HB-E016	ZN23201	Noyetec	ZN23201	N/A	2023-05-11	2024-05-10
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2023-05-12	2024-05-11
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2023-05-12	2024-05-11

RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Analog Signal Generator	Agilent	N5181A	MY47070421	2023-05-11	2024-05-10
2	HB-E042	WIDEBAND RADIO COMMUNICA	R&S	CMW500	132108	2023-05-11	2024-05-10

		TION TESTER					
3	HB-E043	MXG Analog Signal Generator	Agilent	N5182A	US46240335	2023-05-11	2024-05-10
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2023-05-11	2024-05-10
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	/	/
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1	N/A	/	/

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is FPCB Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission

5.2.1 Limits

Limits – Class B		
Frequency (MHz)	Limit (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Note:

- the tighter limit applies at the band edges.
- the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test Procedures

a) EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test Setup

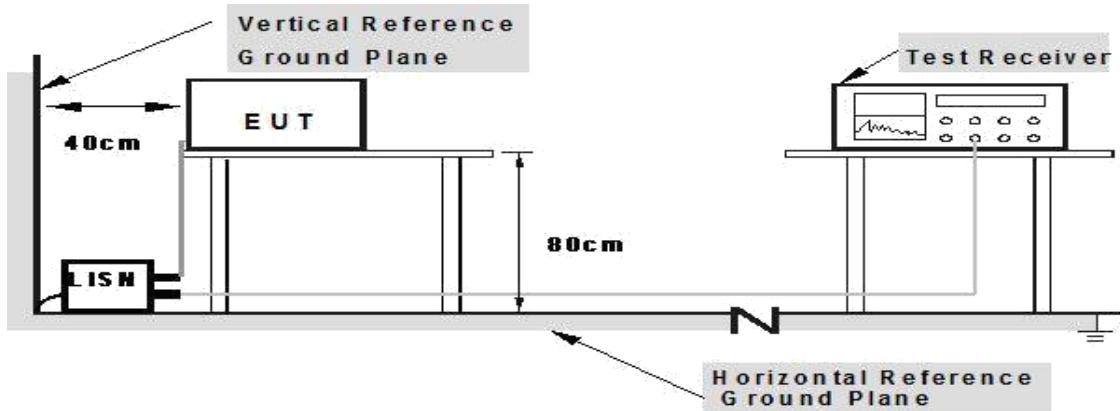


5.2.4 Test Result

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Test Mode:	Charging+TX	Phase:	L
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

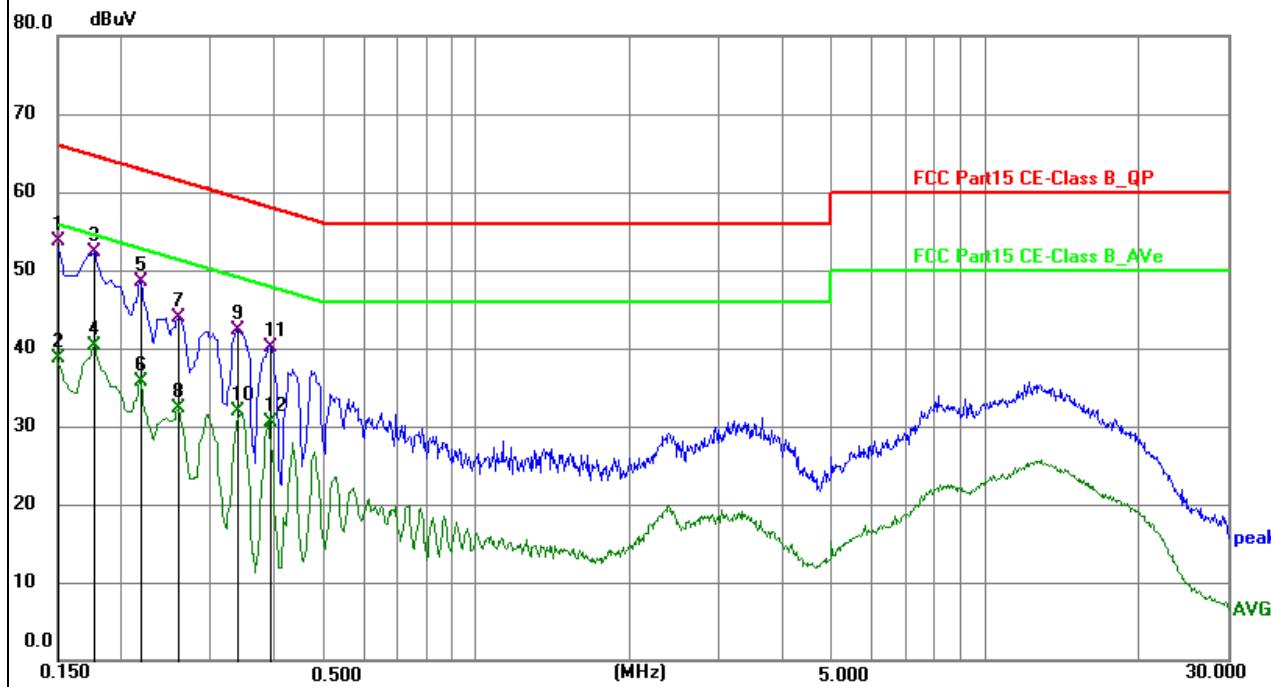

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.150000	43.62	10.15	53.77	66.00	-12.23	QP
2	0.150000	28.55	10.15	38.70	56.00	-17.30	AVG
3	0.176800	42.13	10.10	52.23	64.63	-12.40	QP
4	0.176800	30.21	10.10	40.31	54.63	-14.32	AVG
5	0.217400	38.47	10.07	48.54	62.92	-14.38	QP
6	0.217400	25.64	10.07	35.71	52.92	-17.21	AVG
7	0.258000	33.78	10.06	43.84	61.50	-17.66	QP
8	0.258000	22.16	10.06	32.22	51.50	-19.28	AVG
9	0.339000	32.23	10.09	42.32	59.23	-16.91	QP
10	0.339000	21.86	10.09	31.95	49.23	-17.28	AVG
11	0.393000	30.10	10.10	40.20	58.00	-17.80	QP
12	0.393000	20.40	10.10	30.50	48.00	-17.50	AVG

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Test Mode:	Charging+TX	Phase:	N
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

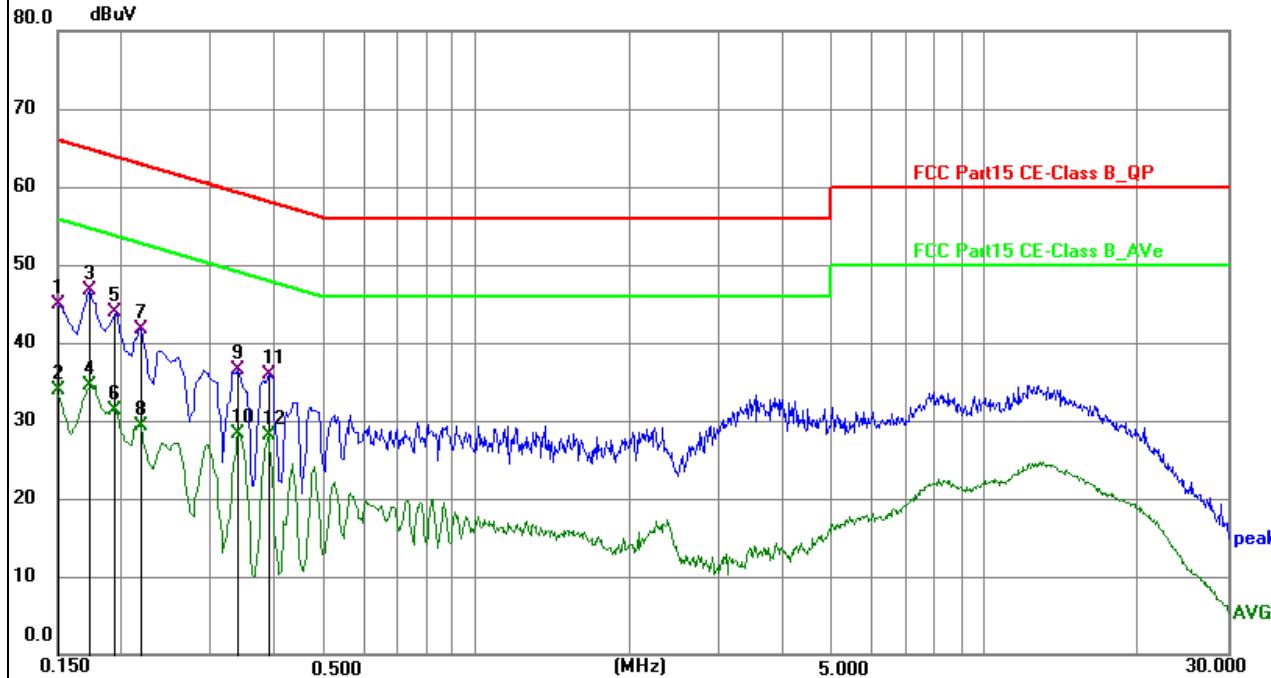

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150000	34.85	10.15	45.00	66.00	-21.00	QP
2	0.150000	23.69	10.15	33.84	56.00	-22.16	AVG
3 *	0.172400	36.50	10.11	46.61	64.84	-18.23	QP
4	0.172400	24.38	10.11	34.49	54.84	-20.35	AVG
5	0.194900	33.77	10.08	43.85	63.83	-19.98	QP
6	0.194900	21.22	10.08	31.30	53.83	-22.53	AVG
7	0.217400	31.66	10.07	41.73	62.92	-21.19	QP
8	0.217400	19.31	10.07	29.38	52.92	-23.54	AVG
9	0.339000	26.39	10.09	36.48	59.23	-22.75	QP
10	0.339000	18.24	10.09	28.33	49.23	-20.90	AVG
11	0.388500	25.75	10.10	35.85	58.10	-22.25	QP
12	0.388500	18.08	10.10	28.18	48.10	-19.92	AVG

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- a) The radiated emission tests were performed in the 3 meters.
- b) The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- e) If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- f) For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup


Radiated Emission Test-Up Frequency Below 30MHz

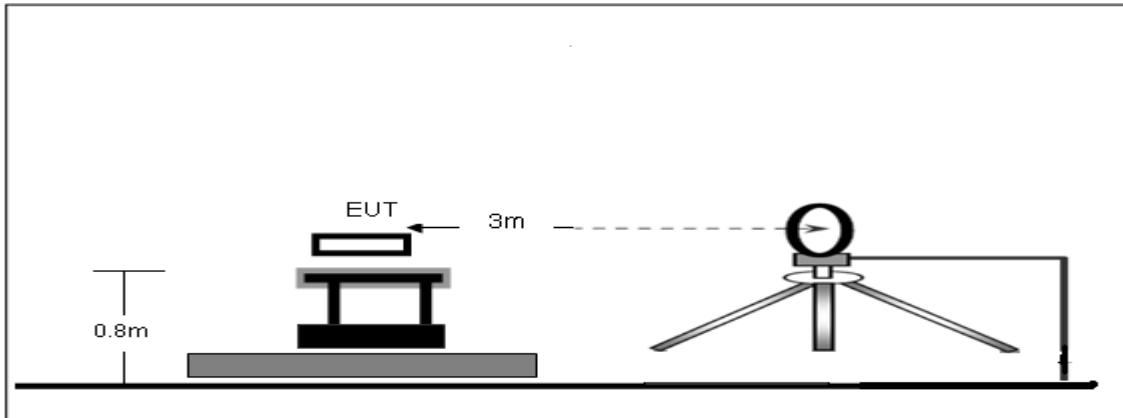

Radiated Emission Test-Up Frequency 30MHz~1GHz

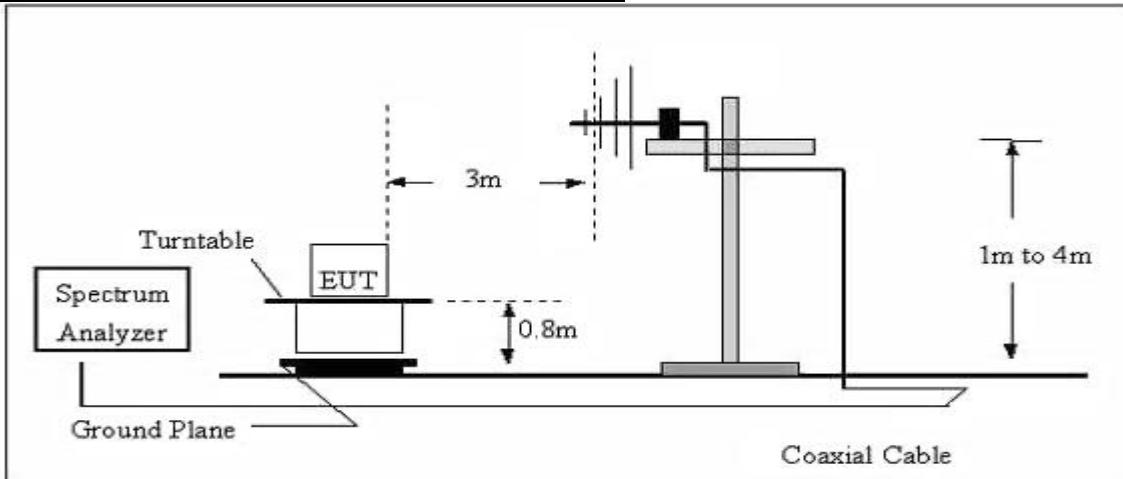

Radiated emission test-up frequency above 1GHz

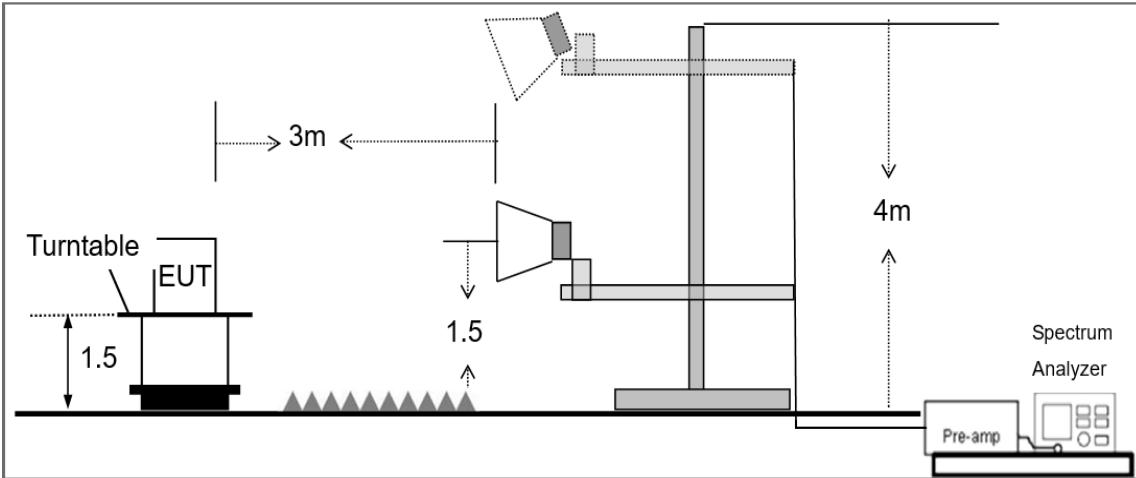

5.3.4 Test Result

Below 30MHz

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Pressure:	1010 hPa	Test Voltage:	DC 5V from adapter AC 120V/60Hz
Test Mode:	Charging+TX	Polarization::	--


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	Pass
--	--	--	--	Pass

Note:

1. For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dBuV) + distance extrapolation factor.


Frequency range (30MHz – 1GHz)

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Test Mode:	Charging+TX	Phase:	Vertical
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

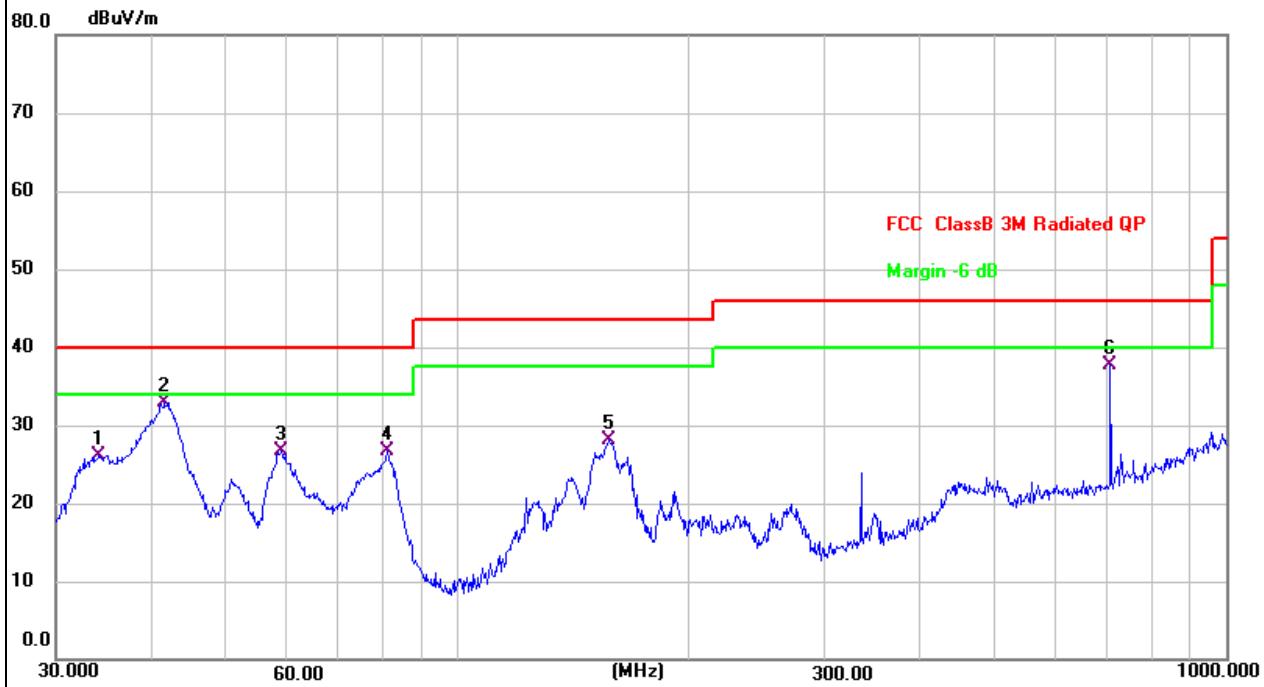

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.1560	41.20	-15.12	26.08	40.00	-13.92	QP
2 *	41.5670	47.05	-14.08	32.97	40.00	-7.03	QP
3	59.0251	41.81	-15.14	26.67	40.00	-13.33	QP
4	80.9274	45.61	-18.89	26.72	40.00	-13.28	QP
5	157.5588	41.83	-13.70	28.13	43.50	-15.37	QP
6	706.6998	40.69	-3.02	37.67	46.00	-8.33	QP

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Test Mode:	Charging+TX	Phase:	Horizontal
Test Voltage:	DC 5V from adapter AC 120V/60Hz		

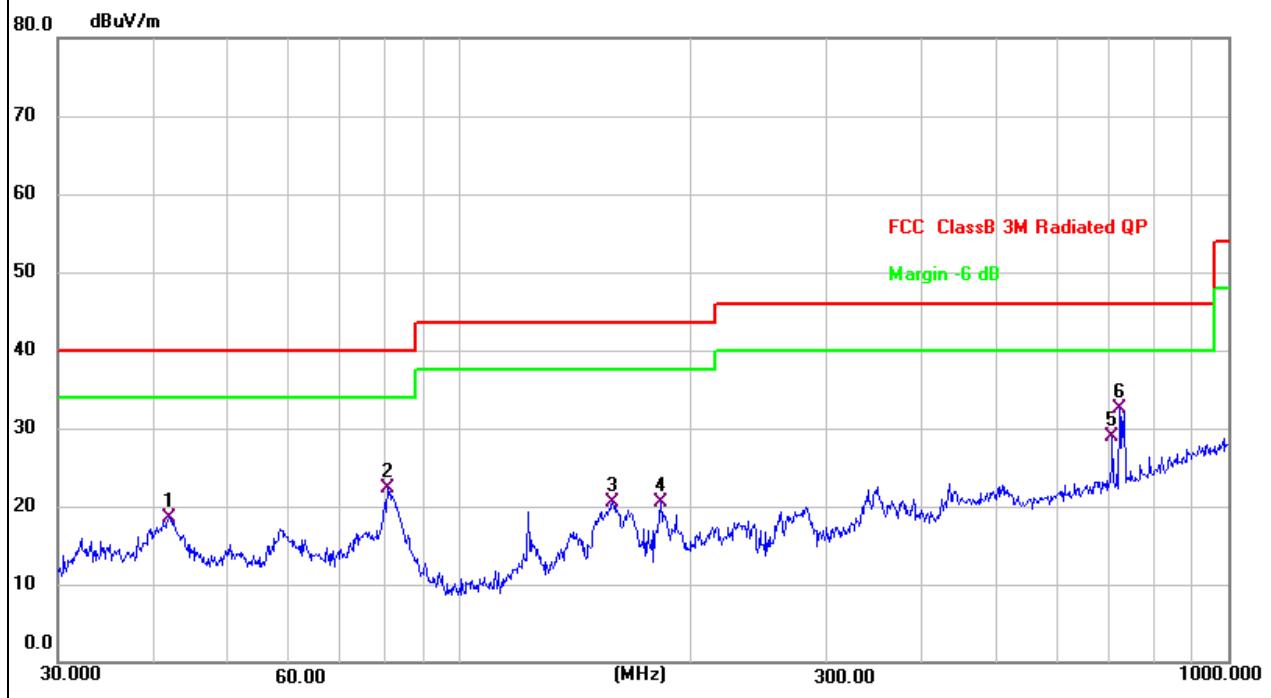

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.8595	32.64	-14.10	18.54	40.00	-21.46	QP
2	80.6441	41.13	-18.88	22.25	40.00	-17.75	QP
3	158.1123	34.26	-13.69	20.57	43.50	-22.93	QP
4	182.5592	35.91	-15.40	20.51	43.50	-22.99	QP
5	706.6998	31.97	-3.02	28.95	46.00	-17.05	QP
6 *	721.7258	35.16	-2.72	32.44	46.00	-13.56	QP

5.3.5 Band Edge - Radiated

Frequency (MHz)	Meter Reading (dB μ V)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dB μ V/ m)	Limits (dB μ V/ m)	Margin (dB)	Detector Type	Comment
GFSK									
2310.00	63.67	2.40	27.70	40.40	53.37	74	-20.63	Pk	Horizontal
2310.00	42.50	2.40	27.70	40.40	32.20	54	-21.80	AV	Horizontal
2310.00	61.19	2.40	27.70	40.40	50.89	74	-23.11	Pk	Vertical
2310.00	42.46	2.40	27.70	40.40	32.16	54	-21.84	AV	Vertical
2390.00	64.26	2.44	28.30	40.10	54.90	74	-19.10	Pk	Vertical
2390.00	43.22	2.44	28.30	40.10	33.86	54	-20.14	AV	Vertical
2390.00	63.76	2.44	28.30	40.10	54.40	74	-19.60	Pk	Horizontal
2390.00	41.83	2.44	28.30	40.10	32.47	54	-21.53	AV	Horizontal
2483.50	62.32	2.48	28.70	39.80	53.70	74	-20.30	Pk	Vertical
2483.50	42.72	2.48	28.70	39.80	34.10	54	-19.90	AV	Vertical
2483.50	65.71	2.48	28.70	39.80	57.09	74	-16.91	Pk	Horizontal
2483.50	43.78	2.48	28.70	39.80	35.16	54	-18.84	AV	Horizontal
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									

5.3.6 Spurious emission in restricted band 1GHz-25GHz

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Reading Level (dB μ V)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	62.27	4.36	32.92	45.53	54.02	74.00	-19.98	Pk	Vertical
4804.338	42.72	4.36	32.92	45.53	34.47	54.00	-19.53	AV	Vertical
7206.107	60.98	5.02	37.63	45.56	58.07	74.00	-15.93	Pk	Horizontal
7206.107	42.39	5.02	37.63	45.56	39.48	54.00	-14.52	AV	Horizontal
4804.169	62.87	4.36	32.92	45.53	54.62	74.00	-19.38	Pk	Vertical
4804.169	42.70	4.36	32.92	45.53	34.45	54.00	-19.55	AV	Vertical
7206.214	62.18	5.02	37.63	45.56	59.27	74.00	-14.73	Pk	Horizontal
7206.214	42.39	5.02	37.63	45.56	39.48	54.00	-14.52	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	63.52	4.41	33.01	45.76	55.18	74.00	-18.82	Pk	Vertical
4880.473	44.07	4.41	33.01	45.76	35.73	54.00	-18.27	AV	Vertical
7320.265	64.38	5.02	37.68	45.59	61.49	74.00	-12.51	Pk	Horizontal
7320.265	41.41	5.02	37.68	45.59	38.52	54.00	-15.48	AV	Horizontal
4880.366	62.21	4.41	33.01	45.76	53.87	74.00	-20.13	Pk	Vertical
4880.366	41.94	4.41	33.01	45.76	33.60	54.00	-20.40	AV	Vertical
7320.234	60.16	5.02	37.68	45.59	57.27	74.00	-16.73	Pk	Horizontal
7320.234	44.63	5.02	37.68	45.59	41.74	54.00	-12.26	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	62.99	4.50	33.26	46.07	54.68	74.00	-19.32	Pk	Vertical
4960.482	42.95	4.50	33.26	46.07	34.64	54.00	-19.36	AV	Vertical
7440.131	63.98	5.02	37.78	45.77	61.01	74.00	-12.99	Pk	Horizontal
7440.131	48.28	5.02	37.78	45.77	45.31	54.00	-8.69	AV	Horizontal
4960.326	62.79	4.50	33.26	46.07	54.48	74.00	-19.52	Pk	Vertical
4960.326	45.33	4.50	33.26	46.07	37.02	54.00	-16.98	AV	Vertical
7440.199	64.54	5.02	37.78	45.77	61.57	74.00	-12.43	Pk	Horizontal
7440.199	45.98	5.02	37.78	45.77	43.01	54.00	-10.99	AV	Horizontal
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. 4. All the modulation modes have been tested, and the worst result was report as below.									

5.4 Peak Output Power


5.4.1 Limit

FCC Part15 Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(b)(3)	Peak output power	1 watt or 30dBm	2400-2483.5

5.4.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=2MHz, VBW=10MHz, Detector=Peak
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4.3 Test Setup





5.4.4 Test Results

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Test Mode:	TX	Test Voltage:	DC 3.87V from battery

BLE 1M			
Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	0.26	30
CH19	2440	0.11	30
CH39	2480	-0.34	30

BLE 2M			
Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	0.3	30
CH19	2440	0.12	30
CH39	2480	-0.31	30

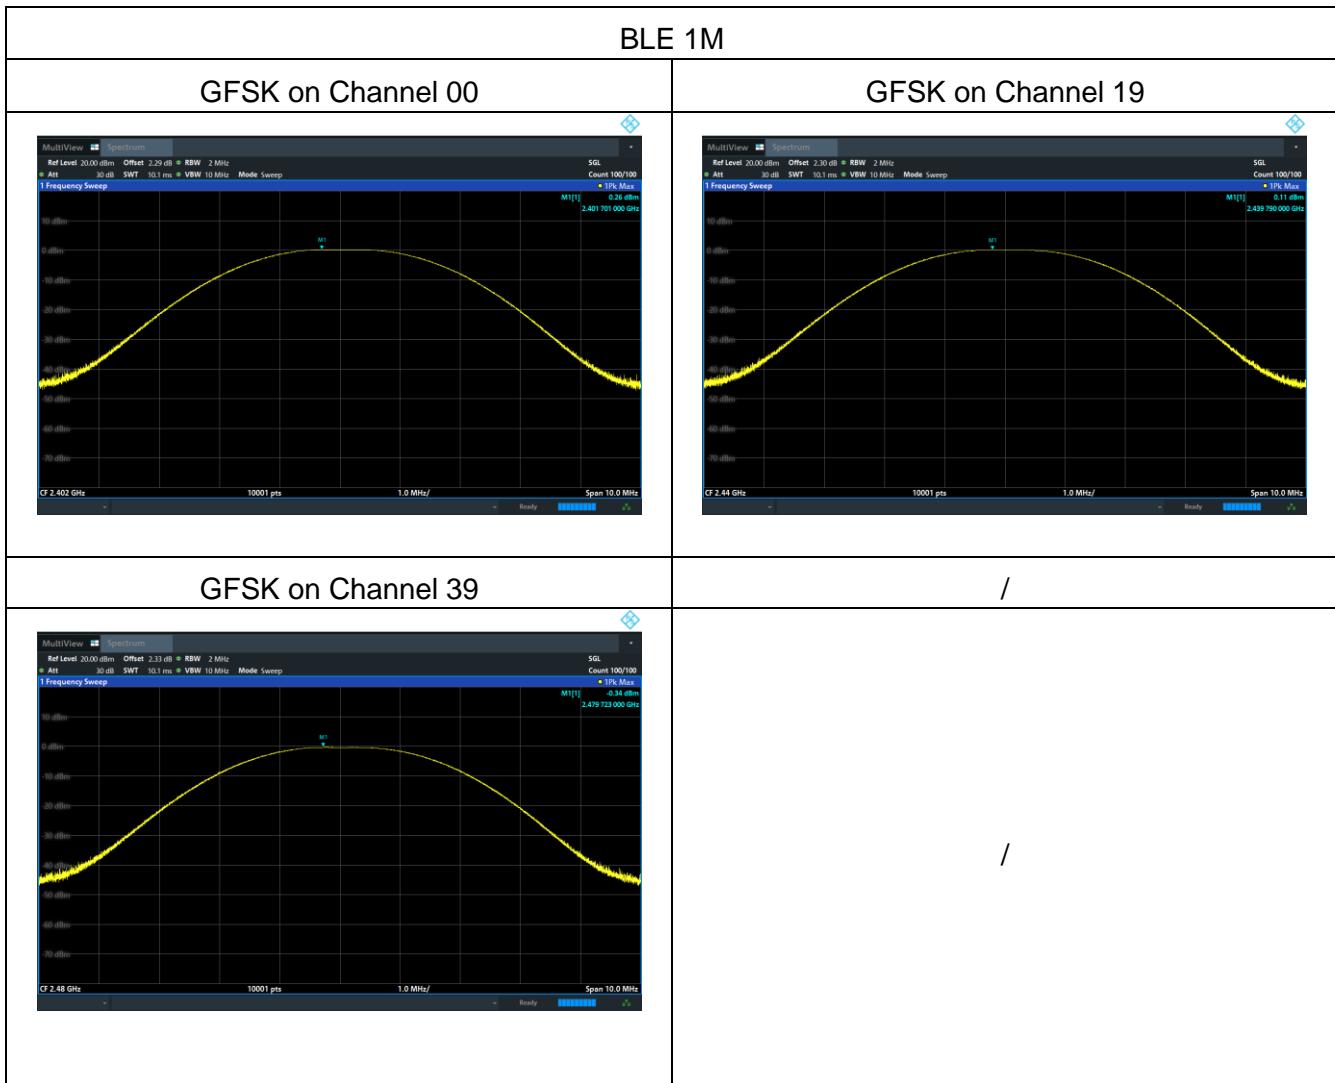

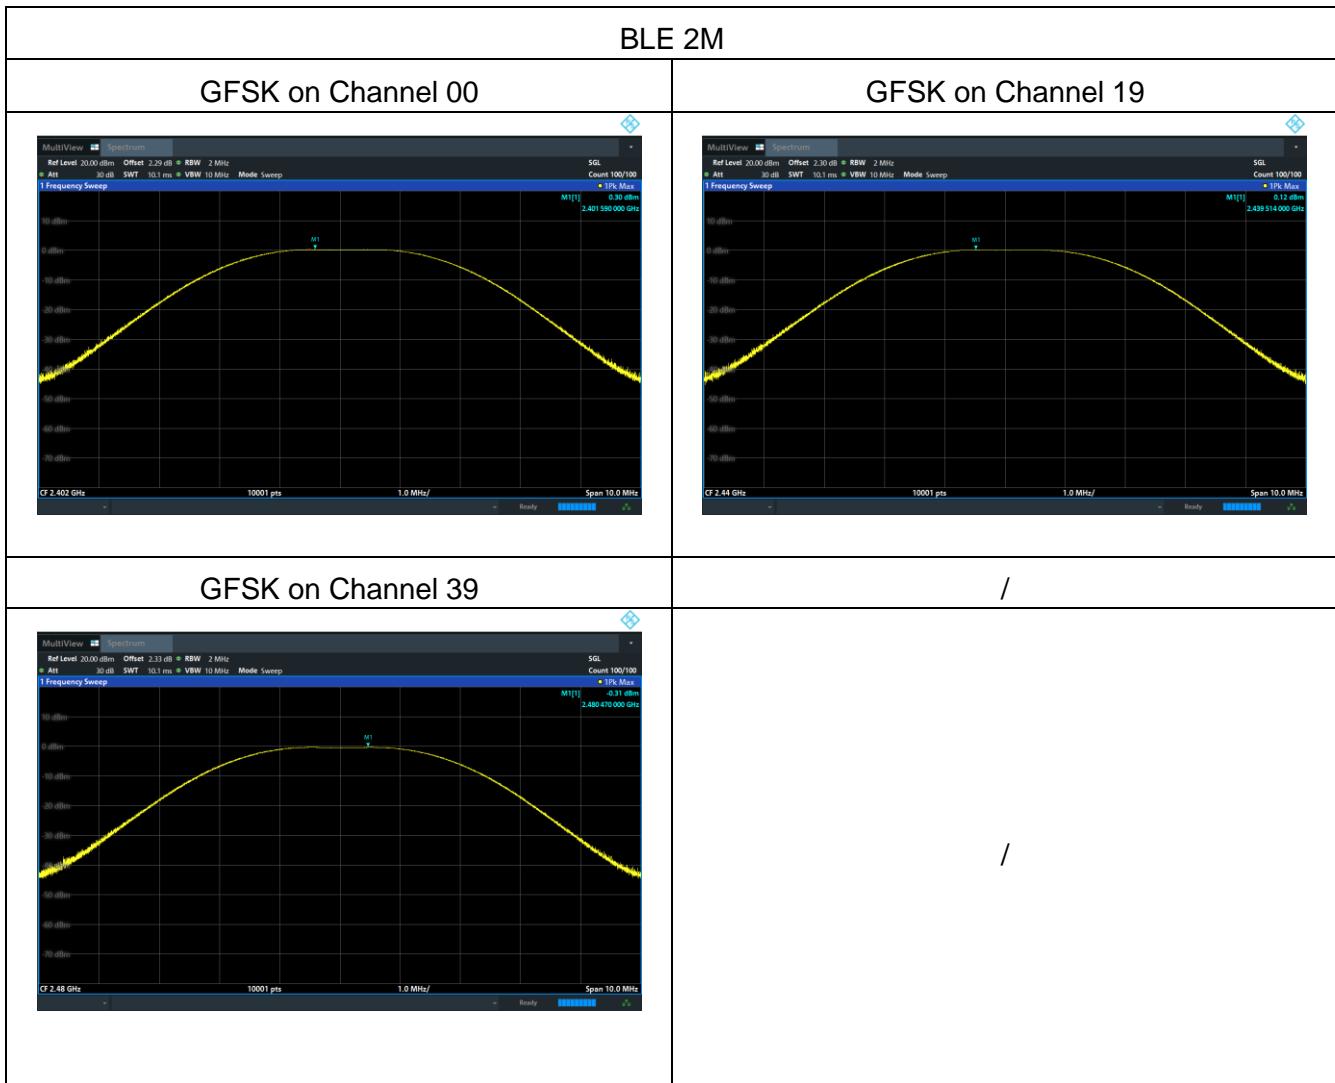

5.5 Power Spectral Density


5.5.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5

5.5.2 Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


5.5.3 Test Setup




5.5.4 Test Results

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Pressure:	1015 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	TX Mode /CH00, CH19, CH39		

BLE 1M			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-14.82	8	Pass
2440 MHz	-17.14	8	Pass
2480 MHz	-15.22	8	Pass

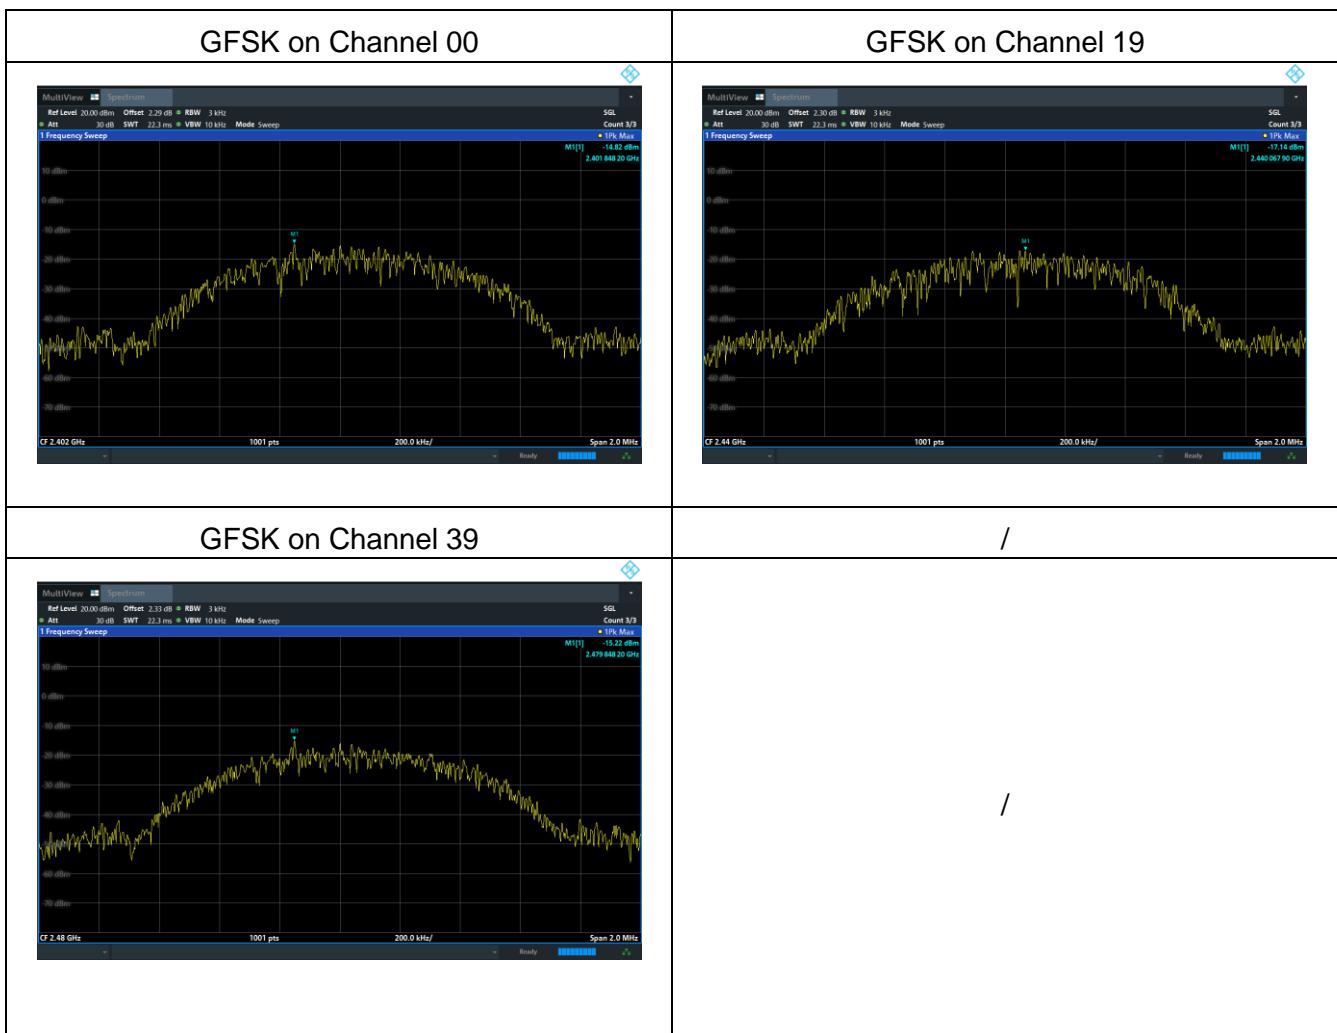

BLE 2M			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-18.14	8	Pass
2440 MHz	-17.88	8	Pass
2480 MHz	-18.95	8	Pass

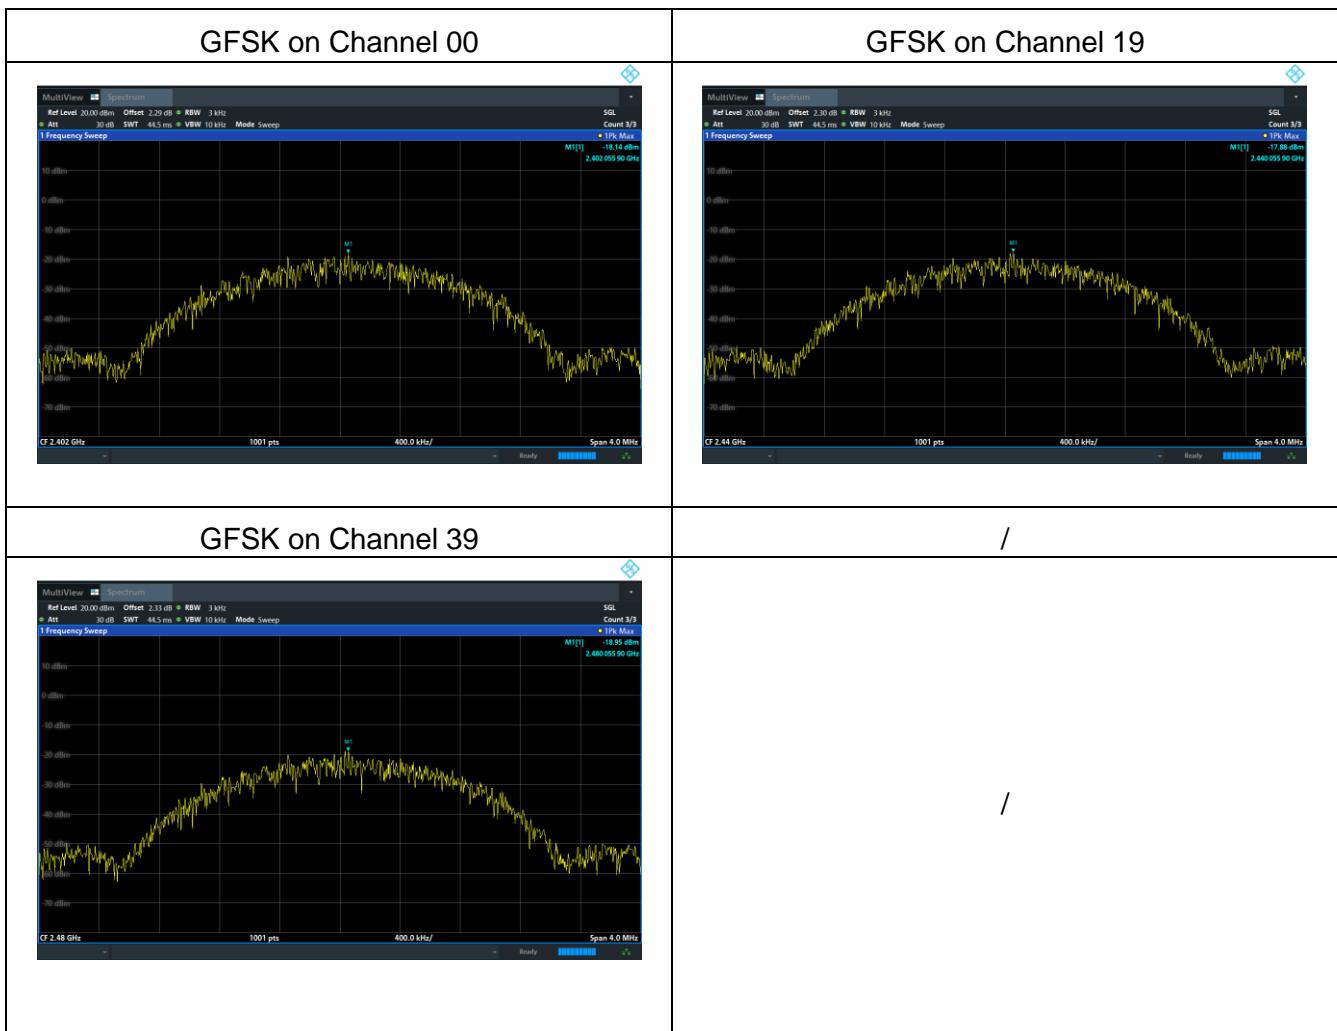

5.6 6dB Bandwidth

5.6.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	>= 500kHz (6dB bandwidth)	2400-2483.5

5.6.2 Test Procedure

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6.3 Test Setup




5.6.4 Test Results

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Pressure:	1012 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	GFSK/CH00, CH19, CH39		

BLE 1M				
Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2402	0.757	500	Pass
Middle	2440	0.763	500	Pass
High	2480	0.774	500	Pass


Test plots

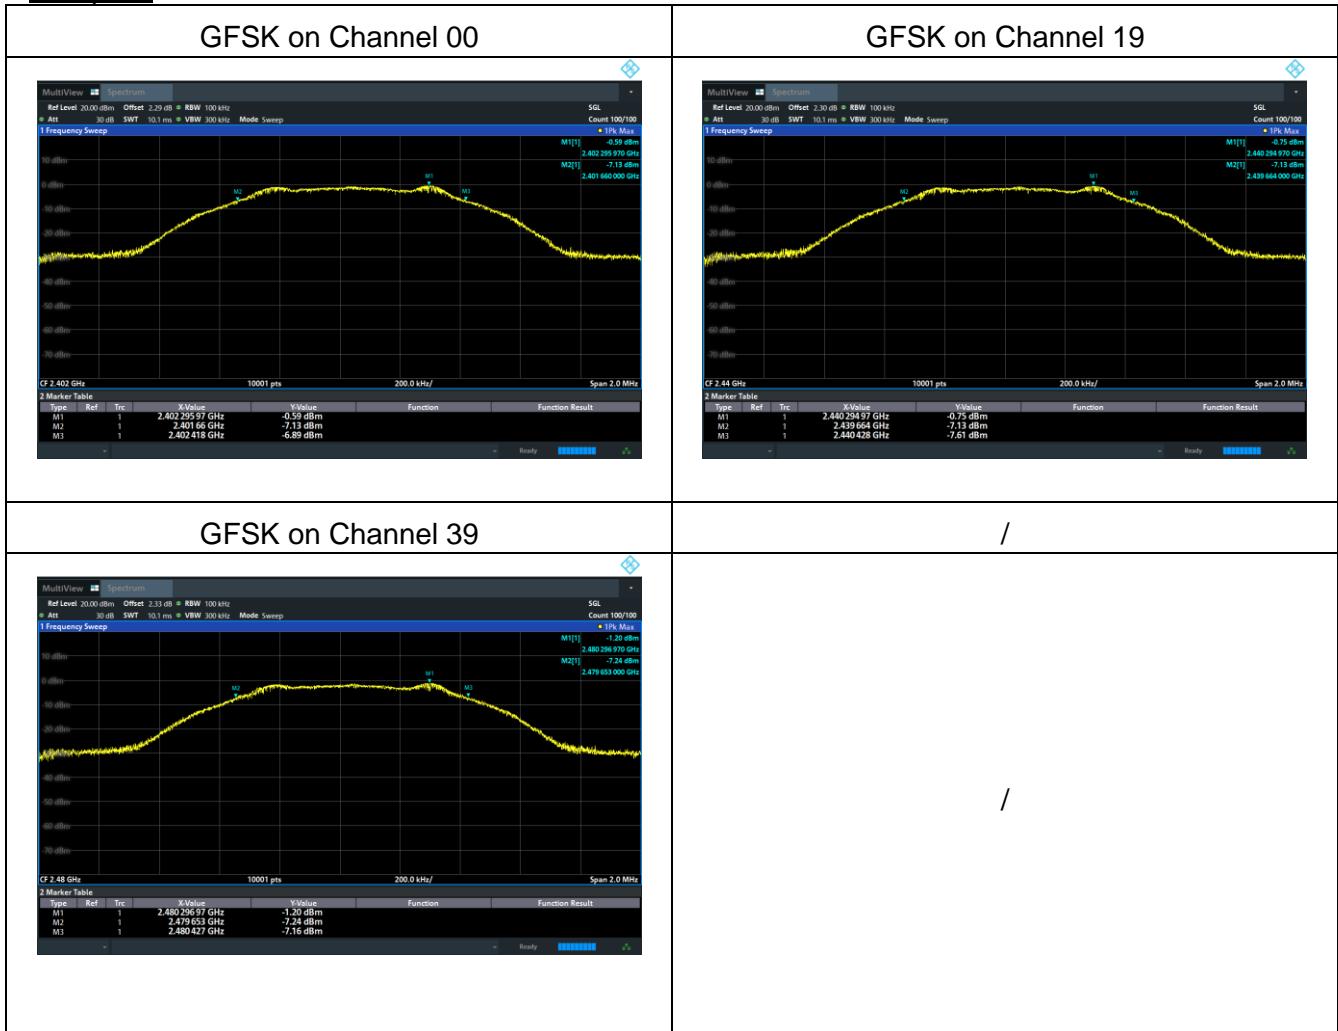

Note: 6dB Bandwidth=M3-M2

BLE 2M				
Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2402	1.407	500	Pass
Middle	2440	1.402	500	Pass
High	2480	1.408	500	Pass

Test plots:

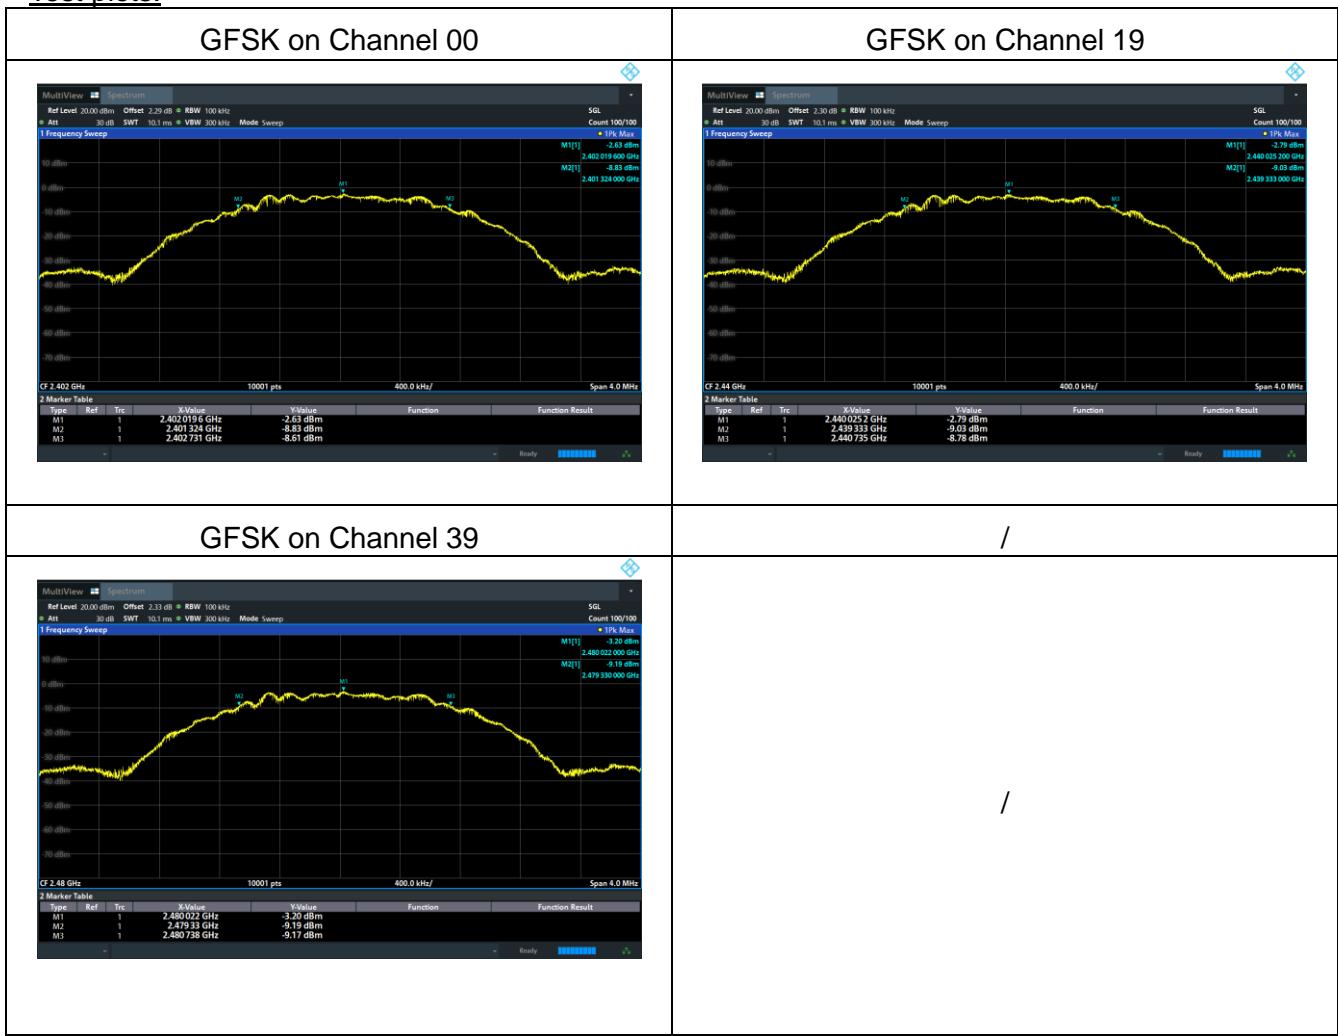

Note: 6dB Bandwidth=M3-M2

5.7 Duty Cycle

5.7.1 Limit

No limit requirement.

5.7.2 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0(b) in KDB 558074 D01 DTS Meas Guidance v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

$RBW = 1\text{MHz}$ (the largest available value)

$VBW = 3\text{MHz} (\geq RBW)$

Number of points in Sweep > 100


Detector function = peak

Trace = Clear write

Measure Total and T_{on}

Calculate Duty Cycle = $T_{on} / Total$

5.7.3 Test Setup




5.7.4 Test Results

BLE 1M			
EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Pressure:	1015 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	TX Mode /CH00, CH19, CH39		


Test plots:



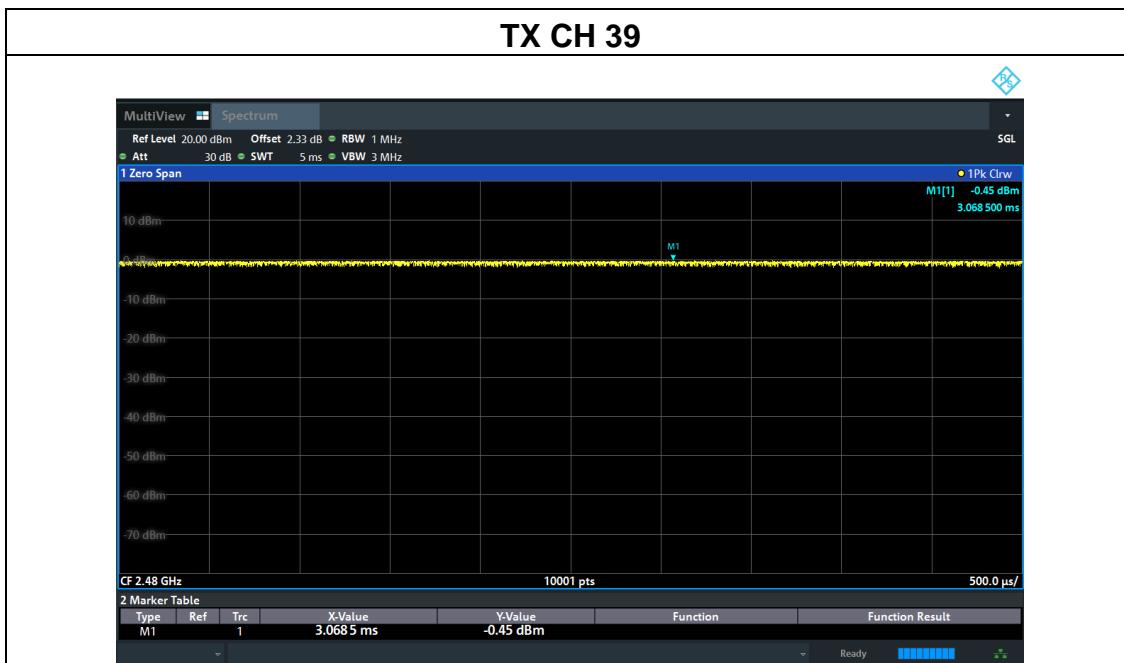

BLE 2M			
EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Pressure:	1015 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	TX Mode /CH00, CH19, CH39		

Test plots

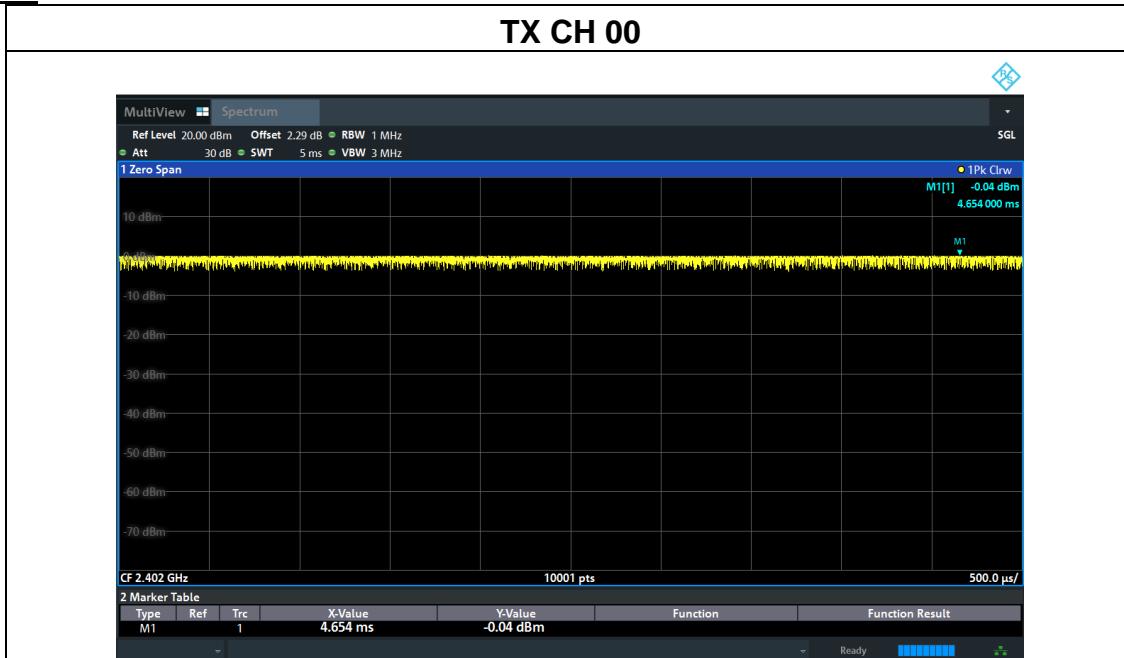



5.8 Conducted Band Edge


5.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2 Test Procedure


- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

5.8.3 Test Setup



5.8.4 Test Results

EUT:	Anti-Lost Wireless Powerbank	Model Name:	PB002M
Pressure:	1015 hPa	Test Voltage:	DC 3.87V from battery
Test Mode:	TX Mode /CH00, CH39		

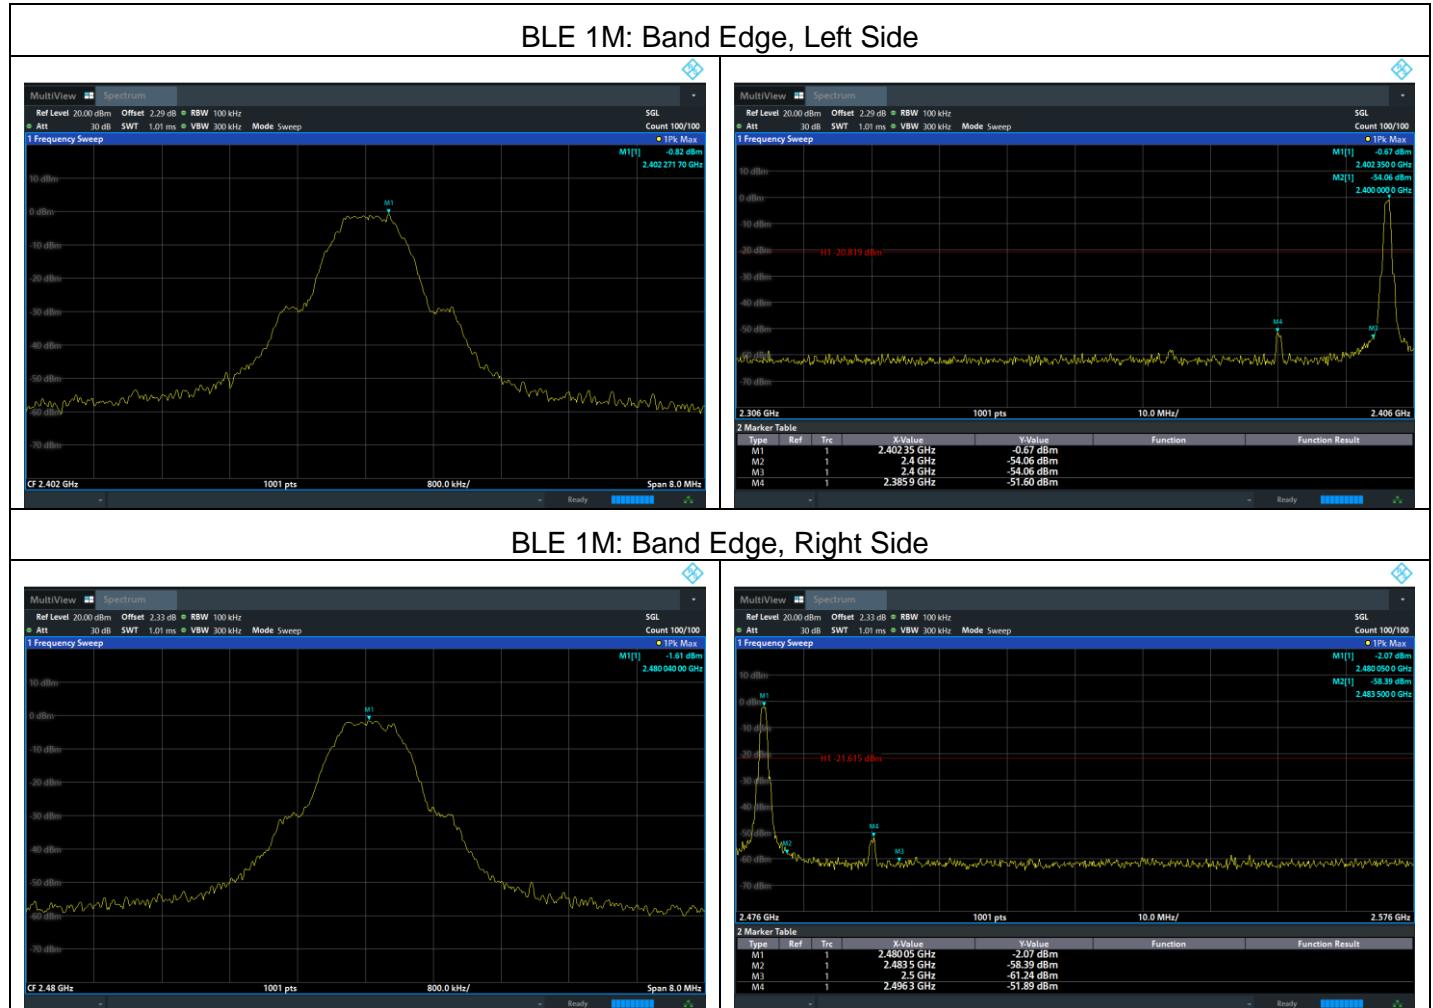

BLE 2M: Band Edge, Left Side



BLE 2M: Band Edge, Right Side



5.9 Spurious RF Conducted Emissions

5.9.1 Limit

Below -20dB of the highest emission level in operating band.

5.9.2 Measuring Instruments

The Measuring equipment is listed in the section 4 of this test report.

5.9.3 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300kHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.


5.9.4 Test Setup




5.9.5 Test Results

Note:


- 1: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.
- 2: The worst mode is GFSK mode, and the report only show the worst mode data.

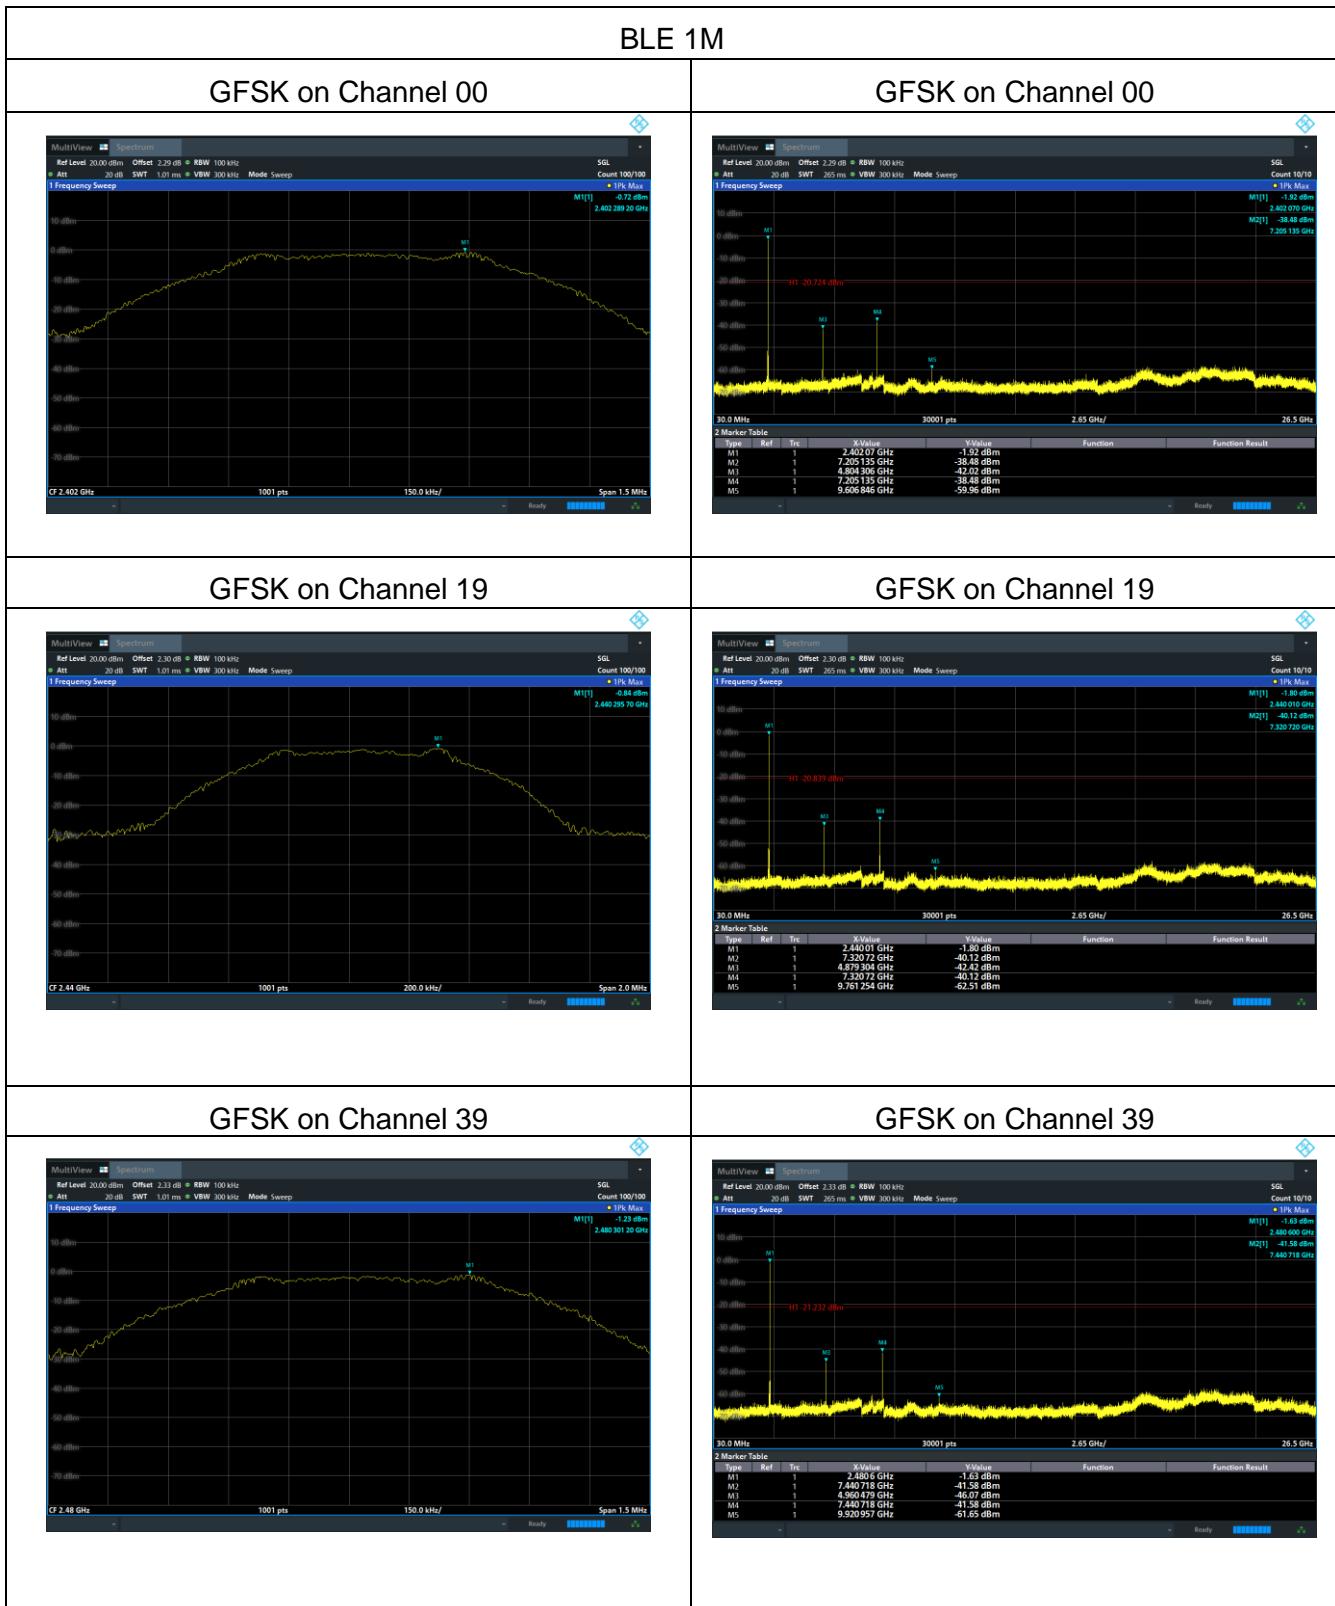

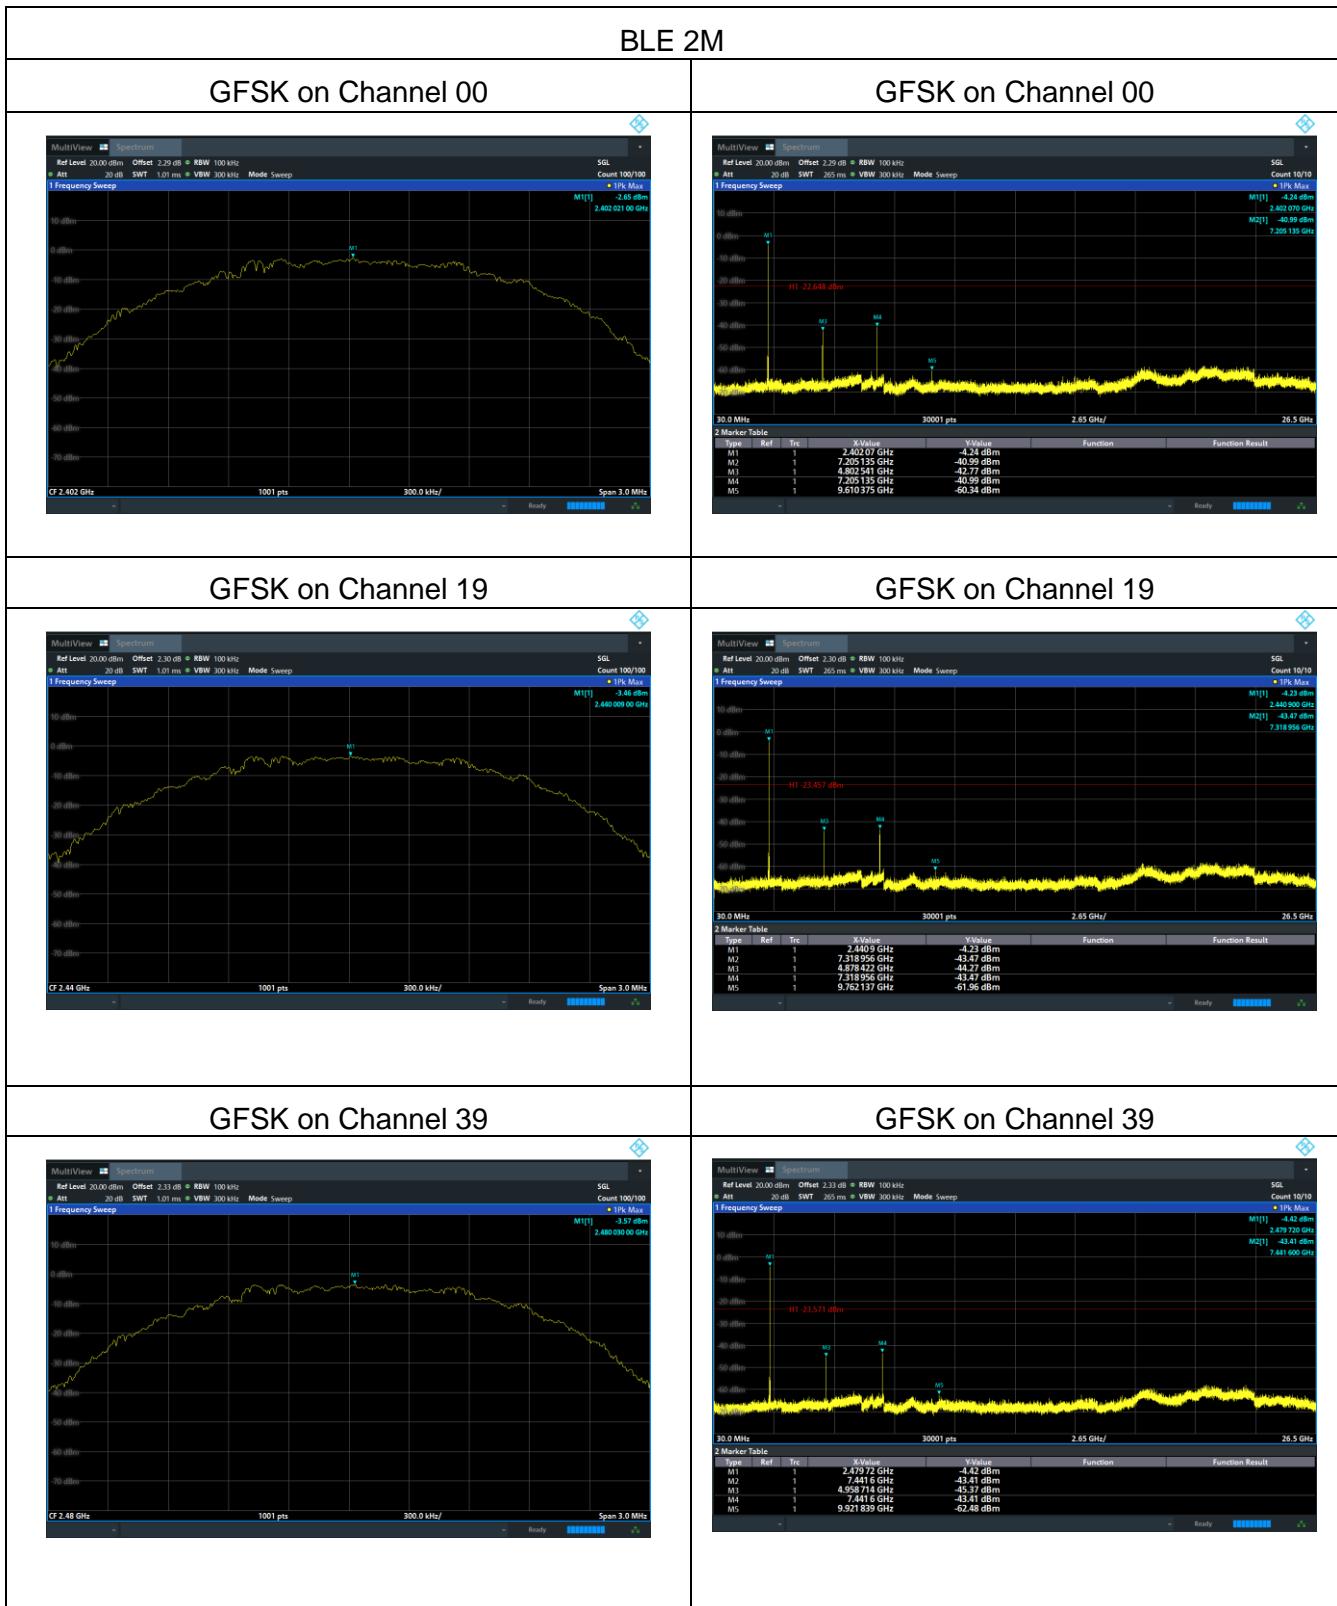

6 Photographs of the Test Setup

Radiated Emission Below 1GHz

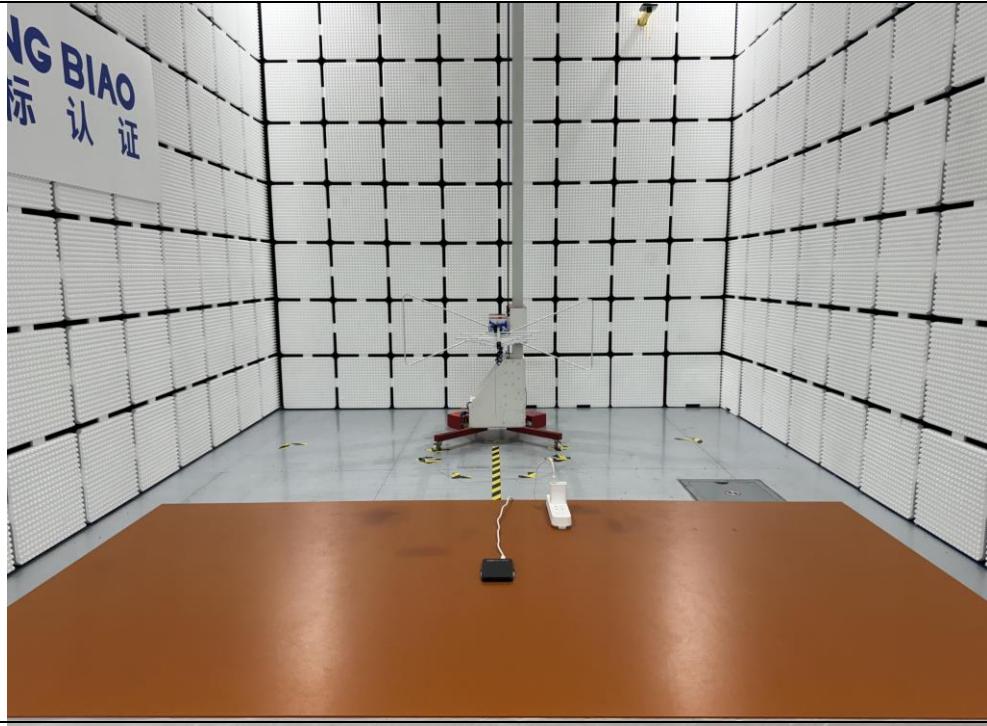

Radiated Emission Above 1GHz



Conducted Emission



7 Photographs of the EUT

Photo 1



Photo 2

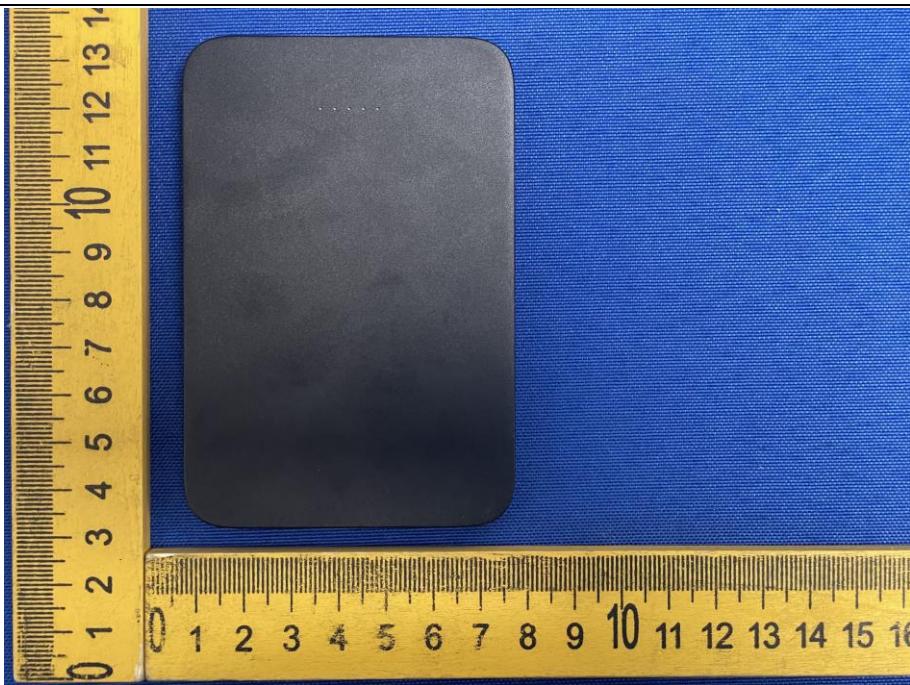


Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8

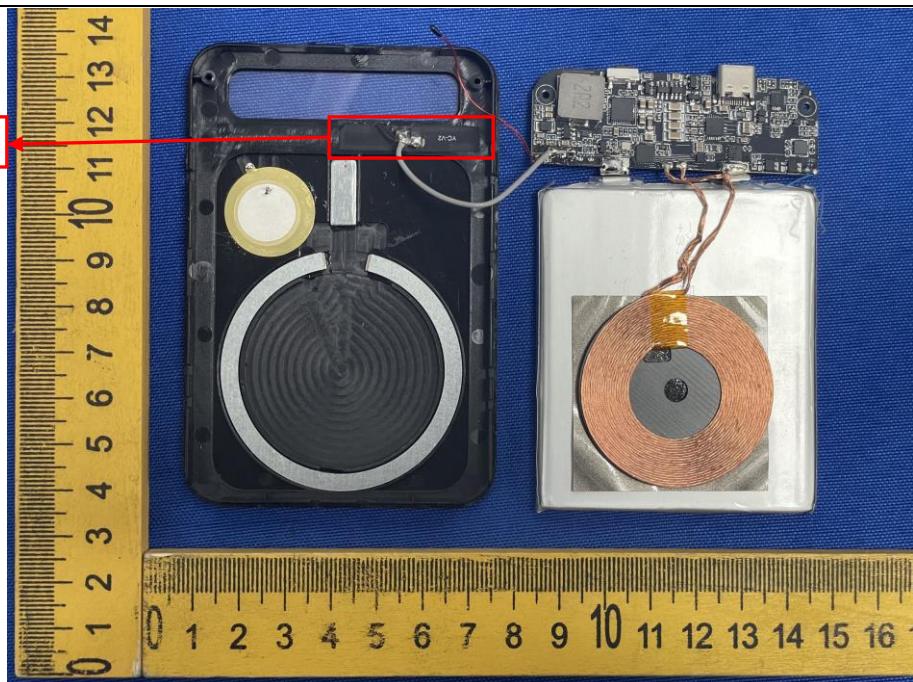


Photo 9

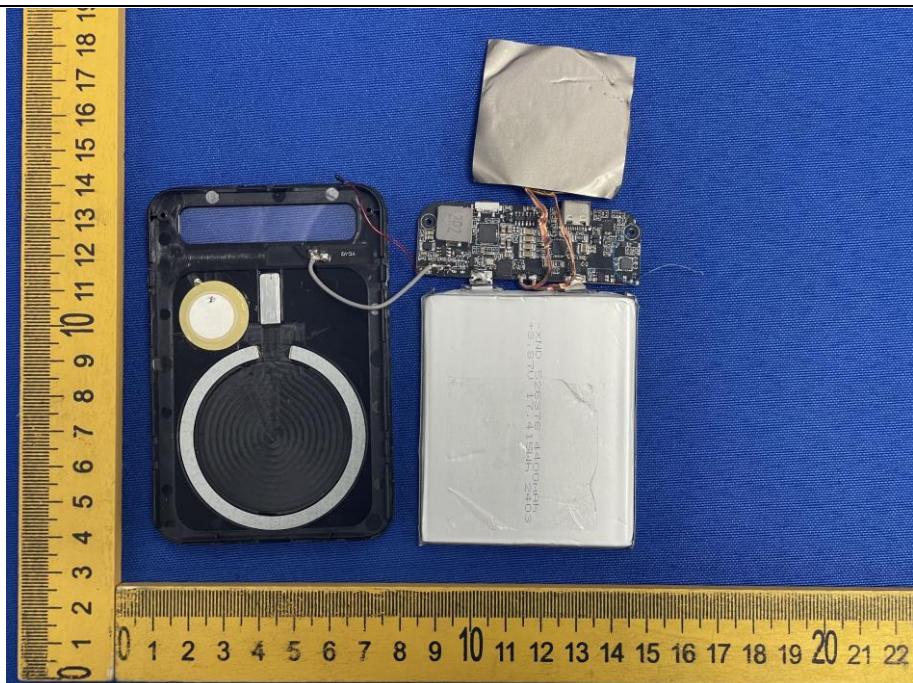


Photo 10

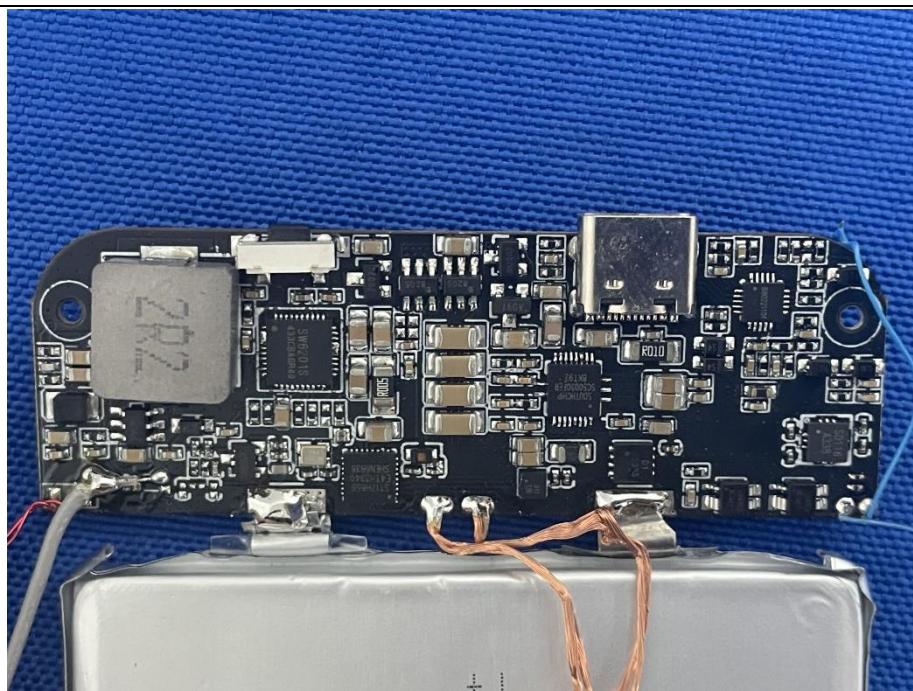


Photo 11


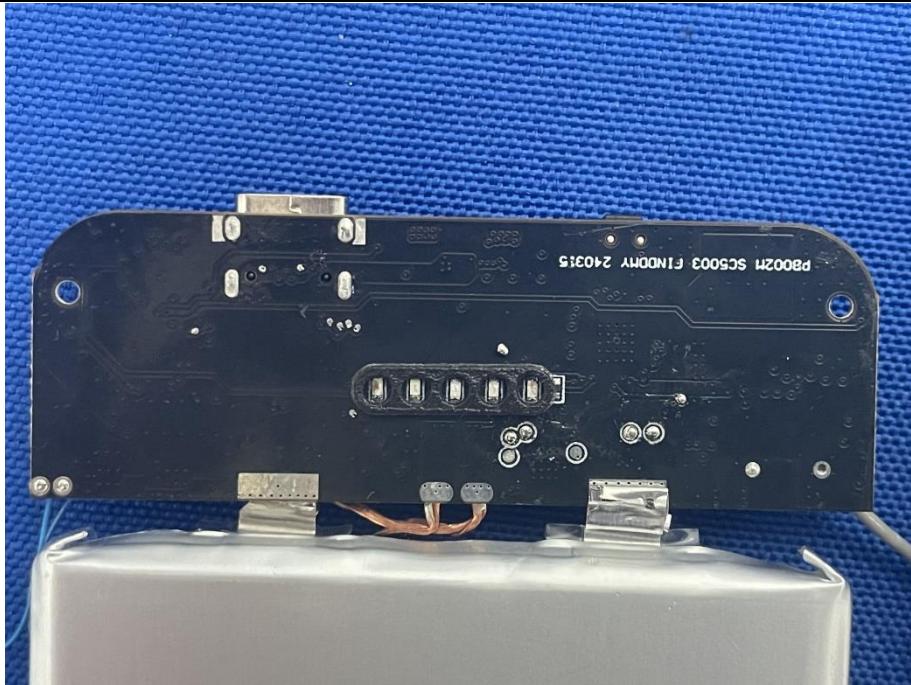


Photo 12



Photo 13

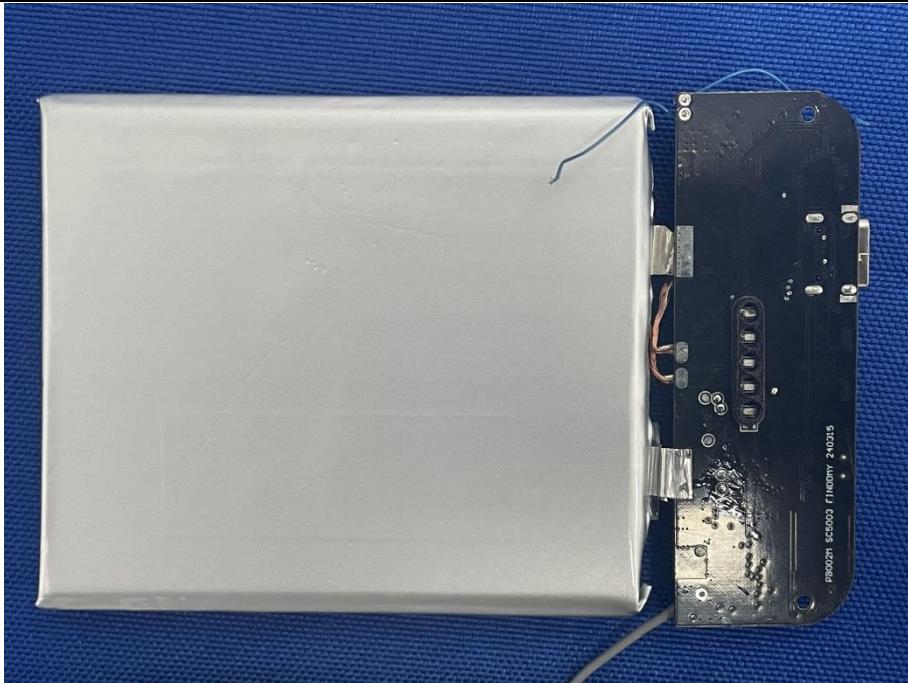

***** END OF REPORT *****