



Test report

REP0027850-1TRFWL

Date of issue: March 3, 2023

Applicant:

TrellisWare Technologies, Inc

Product:

TW-860 Spirit Radio

Model:

TW-860

Variant(s):

N/A

FCC ID:

2A6X2-860


IC ID:

28565-860

Specifications:

- ◆ **FCC 47 CFR Part 15, Subpart C – §15.247**
Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, 5725 – 5850 MHz
- ◆ **Industry Canada RSS-247, Issue 2, February 2017**
Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Lab and test locations

Company name	Nemko USA Inc.
Address	2210 Faraday Ave, Suite 150
City	Carlsbad
State	California
Postal code	92008
Country	USA
Telephone	+1 760 444 3500
Website	www.nemko.com
FCC Site Number	Test Firm Registration Number: 392943; Designation Number: US5058
ISED Test Site	2040B-3
Tested by	Chenhao Ma, Wireless Test Technician
Reviewed by	James Cunningham, EMC/MIL/WL Supervisor
Review date	March 3, 2023
Reviewer signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko USA's ISO/IEC 17025 accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Copyright notification

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko USA Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Test specifications	4
1.2 Test methods	4
1.3 Exclusions	4
1.4 Statement of compliance	4
1.5 Test report revision history	4
Section 2 Summary of test results	5
2.1 FCC Part 15, Subpart C, general requirements	5
2.2 FCC Part 15.247	5
2.3 IC RSS-247, Issue 2	6
2.4 IC RSS-GEN, Issue 5	6
Section 3 Equipment under test (EUT) details	7
3.1 Disclaimer	7
3.2 Sample information	7
3.3 Testing period	7
3.4 Applicant	7
3.5 Manufacturer	7
3.6 EUT information	7
3.7 EUT exercise and monitoring details	8
3.8 EUT setup details	8
Section 4 Engineering considerations	10
4.1 Modifications incorporated in the EUT	10
4.2 Technical judgement	10
4.3 Deviations from laboratory test procedures	10
Section 5 Test conditions	11
5.1 Atmospheric conditions	11
5.2 Power supply range	11
Section 6 Measurement uncertainty	12
6.1 Uncertainty of measurement	12
Section 7 Test equipment	13
7.1 Test equipment list	13
Section 8 Testing data	14
8.1 AC power line conducted emissions	14
8.2 Minimum 6 dB bandwidth for systems using digital modulation techniques	16
8.3 Transmitter output power and EIRP requirements	21
8.4 Spurious emissions	26
8.5 Power spectral density	50
8.6 99 % occupied bandwidth	55

Section 1 Report summary

1.1 Test specifications

FCC 47 CFR Part 15, Subpart C – §15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
IC RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.2 Test methods

ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
558074 D01 DTS Measurement Guidance v05r02 (April 2, 2019)	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.3 Exclusions

This test report covers radiated spurious emissions, restricted band edge emissions and AC conducted emissions only.

1.4 Statement of compliance

Testing was performed against all relevant requirements of the test standard(s).

Results obtained indicate that the product under test complies in full with the tested requirements.

The test results relate only to the item(s) tested.

See “Section 2 Summary of test results” for full details.

1.5 Test report revision history

Table 1.5-1: Test report revision history

Revision #	Issue Date	Details of changes made to test report
REP0027850-1TRFEMC	March 3, 2023	Original report issued

Section 2 Summary of test results

2.1 FCC Part 15, Subpart C, general requirements

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass ¹
§15.31(e)	Variation of power source	Pass
§15.203	Antenna requirement	Pass ²
§15.215(c)	20 dB bandwidth	Pass

Note 1: The EUT is battery powered, tested while connected to AC powered battery charging cradle.

Note 2: The antenna is connected to the EUT using a non-standard connector

2.2 FCC Part 15.247

Part	Test description	Verdict
§15.247(a)(1)(i)	Frequency hopping systems operating in the 902 – 928 MHz band	Not applicable
§15.247(a)(1)(ii)	Frequency hopping systems operating in the 5725 – 5850 MHz band	Not applicable
§15.247(a)(1)(iii)	Frequency hopping systems operating in the 2400 – 2483.5 MHz band	Not applicable
§15.247(a)(2)	Minimum 6 dB bandwidth for systems using digital modulation techniques	Pass
§15.247(b)(1)	Maximum peak output power of frequency hopping systems operating in the 2400 – 2483.5 MHz band and 5725 – 5850 MHz band	Not applicable
§15.247(b)(2)	Maximum peak output power of frequency hopping systems operating in the 902 – 928 MHz band	Not applicable
§15.247(b)(3)	Maximum peak output power of systems using digital modulation in the 902 – 928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz bands	Pass
§15.247(b)(4)	Transmitting antennas of directional gain greater than 6 dBi	Not applicable
§15.247(c)(1)	Fixed point-to-point operation with directional antenna gains greater than 6 dBi	Not applicable
§15.247(c)(2)	Transmitters operating in the 2400 – 2483.5 MHz band that emit multiple directional beams	Not applicable
§15.247(d)	Spurious emissions	Pass
§15.247(e)	Power spectral density for digitally modulated devices	Pass
§15.247(f)	Time of occupancy for hybrid systems	Not applicable

2.3 IC RSS-247, Issue 2

Part	Test description	Verdict
5.1 (a)	Bandwidth of a frequency hopping channel	Not applicable
5.1 (b)	Minimum channel spacing for frequency hopping systems	Not applicable
5.1 (c)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
5.1 (d)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not applicable
5.1 (e)	Frequency hopping systems operating in the 5725–5850 MHz band	Not applicable
5.2 (a)	Minimum 6 dB bandwidth	Pass
5.2 (b)	Maximum power spectral density	Pass
5.3 (a)	Digital modulation turned off	Not applicable
5.3 (b)	Frequency hopping turned off	Not applicable
5.4 (a)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
5.4 (b)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not applicable
5.4 (c)	Frequency hopping systems operating in the 5725–5850 MHz	Not applicable
5.4 (d)	Systems employing digital modulation techniques	Pass
5.4 (e)	Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band	Not applicable
5.4 (f)	Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams	Not applicable
5.5	Out-of-band emissions	Pass

2.4 IC RSS-GEN, Issue 5

Part	Test description	Verdict
6.7	99% Occupied bandwidth	Pass
7.3	Receiver radiated emission limits	Not applicable ¹
7.4	Receiver conducted emission limits	Not applicable ²
8.8	Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus	Pass ³

Note 1: EUT is neither a stand-alone receiver nor a scanning receiver.

Note 2: The EUT is battery powered, tested while connected to AC powered battery charging cradle.

Section 3 Equipment under test (EUT) details

3.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

3.2 Sample information

Receipt date	24-Jan-23
Nemko sample ID number	REP0027850

3.3 Testing period

Test start date	24-Jan-23
Test end date	08-Feb-23

3.4 Applicant

Company name	TrellisWare Technologies, Inc
Address	10641 Scripps Summit Court, Ste 100
City	San Diego
State	California
Postal/Zip code	92131
Country	United States

3.5 Manufacturer

Company name	TrellisWare Technologies, Inc
Address	10641 Scripps Summit Court, Ste 100
City	San Diego
State	California
Postal/Zip code	92131
Country	United States

3.6 EUT information

Product name	TW-860 Spirit Radio
Model	TW-860
Variant(s)	N/A
Serial number	SN-115560
Part number	ASY0750311
Power requirements	5 – 20 VDC, external battery
Description/theory of operation	Handheld MANET radio carries voice, location, and user data. User selectable channel bandwidth of 1.2, 3.6, 10, and 20MHz.
Operational frequencies	2403 – 2478 MHz, depending on bandwidth selected
Software details	Version 6.2.1-b38
Operating band	2400 – 2483.5 MHz
Test frequencies	2403 MHz (1.2 MHz), 2404 MHz (3.6 MHz), 2412 MHz (10 MHz), 2422 MHz (20 MHz), 2442 MHz (20 MHz), 2465 MHz (10 MHz), 2478 MHz(3.6 MHz and 1.2 MHz)
Modulation type(s)	TSM
Operating bandwidth(s)	2403 – 2478 MHz, depending on bandwidth selected
Antenna type	Omnidirectional antenna
Antenna gain (declared)	5 dBi
Nominal channel spacing	1 MHz

3.7 EUT exercise and monitoring details

EUT description of the methods used to exercise the EUT and all relevant ports:

- Radio is fitted with a 5dBi omni-directional antenna. Channel presets are loaded into the radio to cover low, mid, and high frequencies in the range defined above for all four bandwidth settings. Near-constant transmit mode is enabled using the MAC_BERT API function of the radio with burst mode settings based on the selected bandwidth.

EUT setup/configuration rationale:

- The EUT setup in a configuration that was expected to produce the highest amplitude emissions relative to the limit and that satisfy normal operation/installation practice by the end user.
- The type and construction of cables used in the measurement set-up were consistent with normal or typical use. Cables with mitigation features (for example, screening, tighter/more twists per length, ferrite beads) have been noted below:
 - None
- The EUT was setup in a manner that was consistent with its typical arrangement and use. The measurement arrangement of the EUT, local ancillary equipment and associated cabling was representative of normal practice. Any deviations from typical arrangements have been noted below:
 - None

Monitoring details:

- Radio test modes were monitored and controlled through USB data interface connected to a test laptop computer. Computer was removed during the test scans.

3.8 EUT setup details

Table 3.8-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number	Rev.
TW-860	TSM Spirit Radio	P/N ASY0750340	SN-115581	X3
TW-1147	Antenna, 1250-2700MHz, 5dBi	TW1147	None	A

Table 3.8-2: EUT interface ports

Description	Qty.
RF Interface = TNC	1
GPS Interface = SMA	1
Power/Data = 12 pin ODU circular connector	1
Voice = 9 pin circular connector	1
Data = USB Type A connector	1

Table 3.8-3: Support equipment

Description	Brand name	Model/Part number	Serial number	Rev.
Test Laptop	Dell	Latitude 7430	None	None
Thales 12.6V IMBITR battery	Thales	1600642-1	NA	B

Table 3.8-4: Inter-connection cables

Cable description	From	To	Length (m)
TW-1822 Battery to 12 pin Power Cable	Battery	DUT	0.5

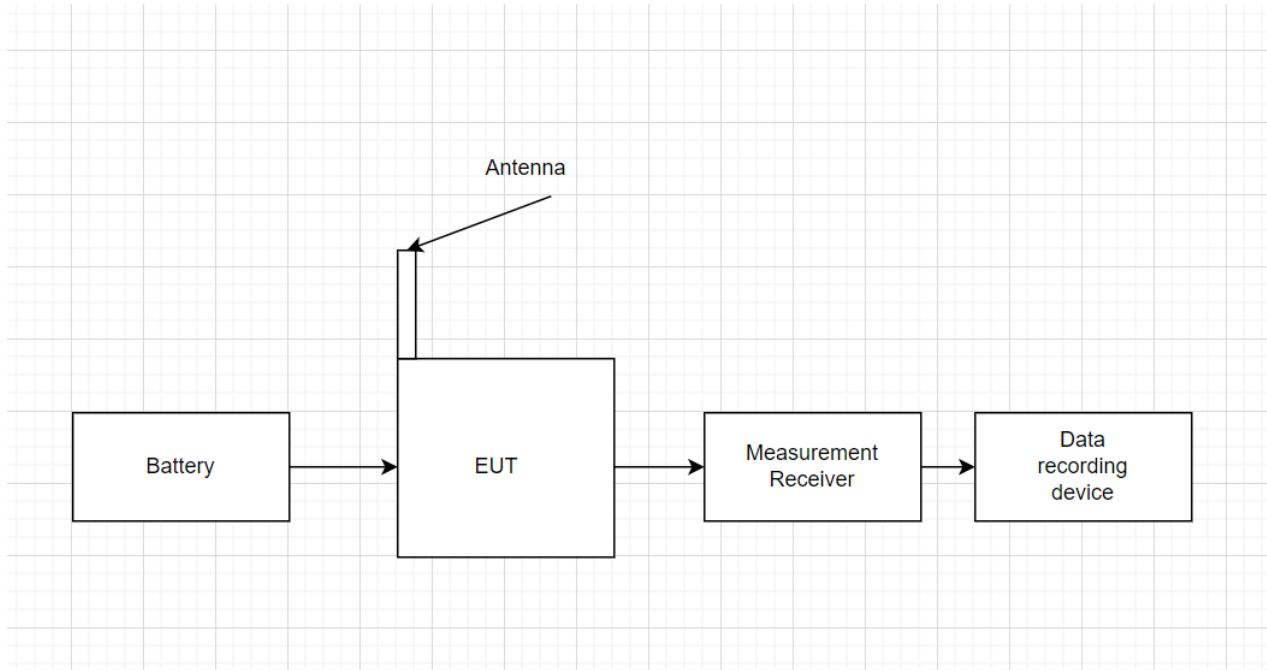


Figure 3.8-1: Test setup diagram

Section 4 Engineering considerations

4.1 Modifications incorporated in the EUT

None.

4.2 Technical judgement

None.

4.3 Deviations from laboratory test procedures

None.

Section 5 Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	86–106 kPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6 Measurement uncertainty

6.1 Uncertainty of measurement

Nemko USA Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 “Uncertainty in EMC measurements.” Measurement uncertainty was calculated using the methods described in CISPR 16-4-2 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics, and limit modelling – Measurement instrumentation uncertainty. The expression of Uncertainty in EMC testing. Measurement uncertainty calculations assume a coverage factor of K=2 with 95% certainty.

Table 6.1-1: Measurement uncertainty calculations

Measurement		U_{cispr} dB	U_{lab} dB
Conducted disturbance at AC mains and other port power using a V-AMN	9 kHz to 150 kHz	3.8	2.9
	150 kHz to 30 MHz	3.4	2.3
Conducted disturbance at telecommunication port using AAN	150 kHz to 30 MHz	5.0	4.3
Conducted disturbance at telecommunication port using CVP	150 kHz to 30 MHz	3.9	2.9
Conducted disturbance at telecommunication port using CP	150 kHz to 30 MHz	2.9	1.4
Conducted disturbance at telecommunication port using CP and CVP	150 kHz to 30 MHz	4.0	3.1
Radiated disturbance (electric field strength in a SAC)	30 MHz to 1 GHz	6.3	5.5
Radiated disturbance (electric field strength in a FAR)	1 GHz to 6 GHz	5.2	4.7
Radiated disturbance (electric field strength in a FAR)	6 GHz to 18 GHz	5.5	5.0

- Notes: Compliance assessment:
- If U_{lab} is less than or equal to U_{cispr} then:
- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 - non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit
- If U_{lab} is greater than U_{cispr} then:
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
 - non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit

V-AMN: V type artificial mains network
 AAN: Asymmetric artificial network
 CP: Current probe
 CVP: Capacitive voltage probe
 SAC: Semi-anechoic chamber
 FAR: Fully anechoic room

Section 7 Test equipment

7.1 Test equipment list

Table 7.1-1: Test equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI Test Receiver	Rohde & Schwarz	ESCI 7	E1026	03/22/2022	03/22/2023
Standard Gain Horn Antenna	Eravant	SAZ-2410-42-S1	EW107	11/22/2022	11/22/2023
Signal & Spectrum Analyzer	Rohde & Schwarz	FSW43	E1302	10/22/2022	10/20/2023
20 dB attenuator	Centric RF	C407-20	E1201	NCR	NCR
10 dB attenuator	Centric RF	C407-10	E1198	NCR	NCR
Transient Limiter	Hewlett-Packard	11947A	E1159	02/18/2022	02/18/2023
Two Line V-Network	Rohde & Schwarz	ENV216	E1019	09/30/2022	09/30/2023
EMI Test Receiver	Rohde & Schwarz	ESU40	E1121	05/31/2022	05/31/2023
System Controller	Sunol Sciences	SC104V	E1129	NCR	NCR
Bilog Antenna	Schaffner	CBL 6111D	1763	04/01/2022	04/01/2024
DRG Horn	ETS-Lindgren	3117-PA	E1139	04/19/2021	04/19/2023
Pre-Amp as part of DRG Horn	ETS-Lindgren	3117-PA	Part of E1139	04/19/2021	04/19/2023

Notes: N/A – not applicable
NCR – no calibration required
VOU – verify on use

Table 7.1-2: Test software details

Manufacturer of Software	Details
Rohde & Schwarz	EMC 32 V10.60.15 (Radiated emissions)
Rohde & Schwarz	EMC 32 V10.20.01 (AC conducted emissions)

Notes: None

Section 8 Testing data

8.1 AC power line conducted emissions

8.1.1 References and limits

- FCC 47 CFR Part 15, Subpart C: §15.207
- RSS-Gen: 8.8
- Test method: ANSI C63.10-2014 §6.2

Table 8.1-1: AC power line conducted emissions limit

Frequency of emission, MHz	Conducted limit, dBµV	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Note: * - Decreases with the logarithm of the frequency.

8.1.2 Test summary

Verdict	Pass		
Test date	February 8, 2023	Temperature	19.74 °C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002.4 mbar
Test location	<input checked="" type="checkbox"/> Ground plane <input type="checkbox"/> Other:	Relative humidity	39.98 %

8.1.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power. TSM mode with Mid channel 2442MHz and bandwidth 3.6MHz was tested.

8.1.4 Setup details

Port under test	AC power input
EUT power input during test	120-VAC/60HZ
EUT setup configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor standing <input type="checkbox"/> Other:
Measurement details	A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver settings:

Resolution bandwidth	9 kHz
Detector mode	- Peak (Preview measurement) - Quasi-peak and average (Final measurement)
Trace mode	Max Hold
Measurement time	- 100 ms (Peak preview measurement) - 5000 ms (Quasi-peak and average final measurement)

8.1.5 Test data

Full Spectrum

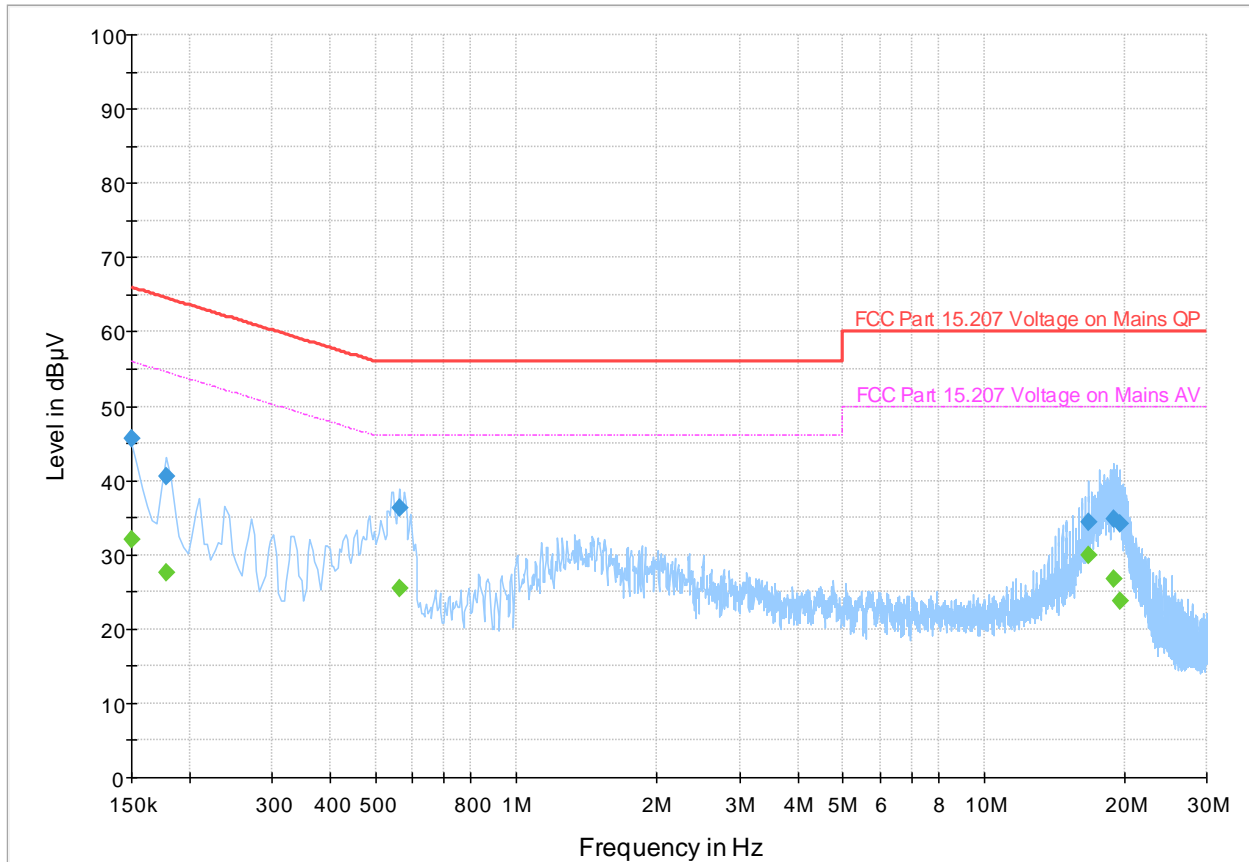


Figure 8.1-1: Conducted emissions at mains port spectral plot (150 kHz - 30 MHz)

Table 8.1-2: Conducted emissions at mains port results

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	45.70	---	66.00	20.30	5000.0	9.000	L1	ON	19.6
0.150000	---	32.03	56.00	23.97	5000.0	9.000	L1	ON	19.6
0.178000	40.50	---	64.58	24.08	5000.0	9.000	N	ON	19.5
0.178000	---	27.56	54.58	27.02	5000.0	9.000	N	ON	19.5
0.562000	36.28	---	56.00	19.72	5000.0	9.000	N	ON	19.4
0.562000	---	25.44	46.00	20.56	5000.0	9.000	N	ON	19.4
16.738000	34.35	---	60.00	25.65	5000.0	9.000	N	ON	20.3
16.738000	---	29.85	50.00	20.15	5000.0	9.000	N	ON	20.3
18.990000	34.74	---	60.00	25.26	5000.0	9.000	N	ON	20.3
18.990000	---	26.69	50.00	23.31	5000.0	9.000	N	ON	20.3
19.498000	34.23	---	60.00	25.77	5000.0	9.000	N	ON	20.3
19.498000	---	23.73	50.00	26.27	5000.0	9.000	N	ON	20.3

Notes: ¹ Result (dBµV) = receiver analyzer value (dBµV) + correction factor (dB).
² Correction factors = LISN factor IL (dB) + cable loss (dB) + transient limiter (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

8.2 Minimum 6 dB bandwidth for systems using digital modulation techniques

8.2.1 References and limits

- FCC 47 CFR Part 15, Subpart B: §15.247(a)(2)
- RSS-247: §5.2(a)
- Test method: 558074 D01 DTS Measurement Guidance §8.2 and ANSI C63.10 §11.8.2 (using built-in marker function of the spectrum analyzer)

§15.247:

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247:

- 5.2 DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:
- (a) The minimum 6 dB bandwidth shall be 500 kHz.

8.2.2 Test summary

Verdict	Pass		
Test date	February 9, 2023	Temperature	19.79 °C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	998.2 mbar
Test location	<input checked="" type="checkbox"/> Wireless bench <input type="checkbox"/> Other:	Relative humidity	40.32 %

8.2.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power. Low, middle and high channels were tested.

8.2.4 Setup details

EUT power input during test	12 VDC
EUT setup configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor standing <input type="checkbox"/> Other:

Receiver settings:

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.2.5 Test data

Table 8.2-1: TSM Bandwidth 1.2MHz 6dB DTS bandwidth test data

Test frequency (MHz)	Bandwidth (kHz)	Limit
2403	1100	≥ 500 kHz
2442	1040	≥ 500 kHz
2478	1050	≥ 500 kHz

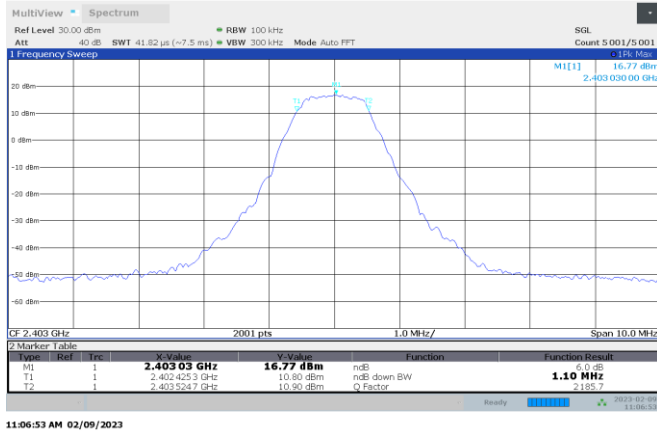


Figure 8.2-1: TSM Bandwidth 1.2MHz 6dB DTS bandwidth, 2403 MHz

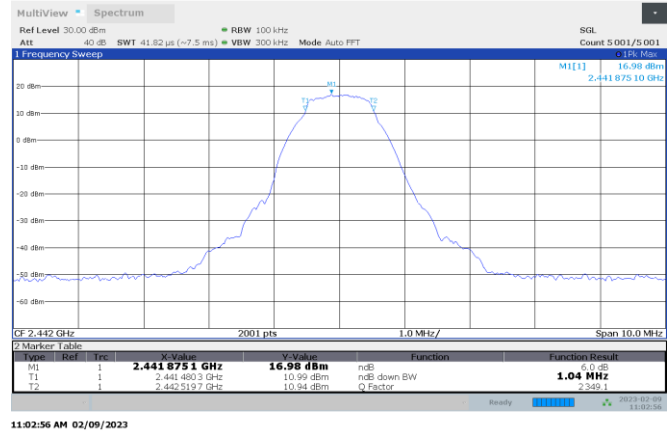


Figure 8.2-2: TSM Bandwidth 1.2MHz 6dB DTS bandwidth, 2442 MHz


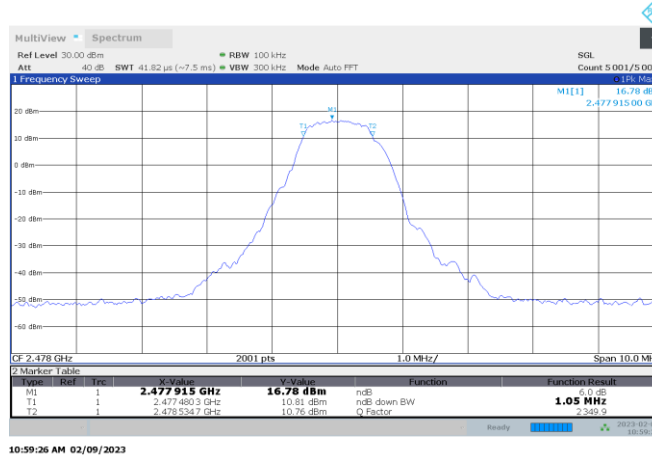


Figure 8.2-3: TSM Bandwidth 1.2MHz 6dB DTS bandwidth, 2478 MHz


Table 8.2-2: TSM Bandwidth 3.6MHz 6dB DTS bandwidth test data

Test frequency (MHz)	Bandwidth (kHz)	Limit
2404	2400	≥ 500 kHz
2442	2460	≥ 500 kHz
2478	2420	≥ 500 kHz

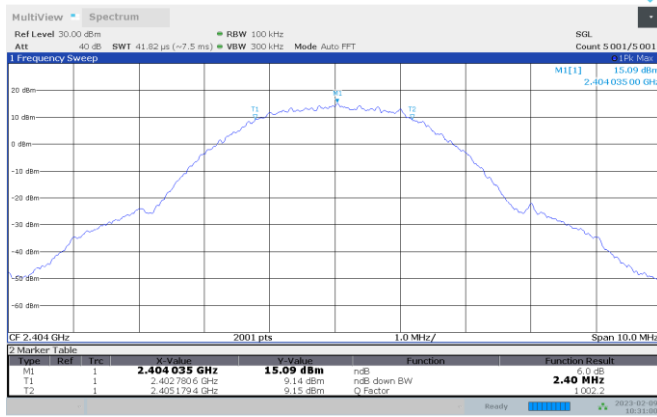


10:31:01 AM 02/09/2023

Figure 8.2-4: TSM Bandwidth 3.6MHz 6dB DTS bandwidth, 2404 MHz

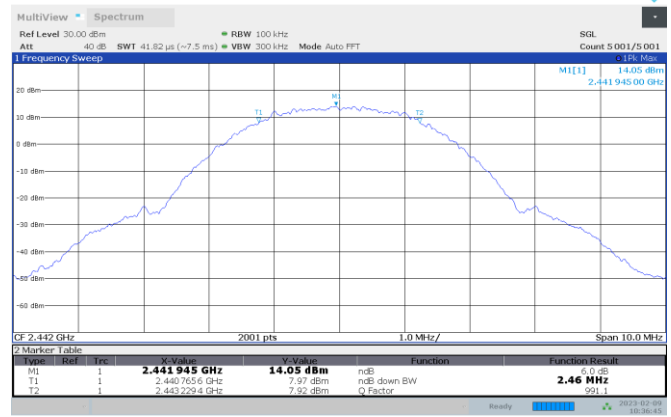

10:36:46 AM 02/09/2023

Figure 8.2-5: TSM Bandwidth 3.6MHz 6dB DTS bandwidth, 2442 MHz

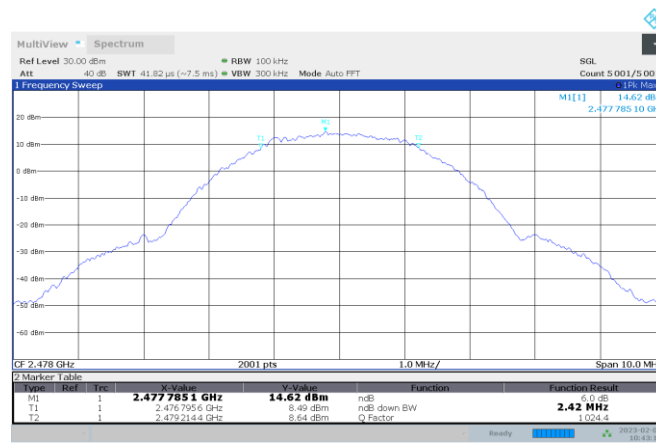


10:43:17 AM 02/09/2023

Figure 8.2-6: TSM Bandwidth 3.6MHz 6dB DTS bandwidth, 2478 MHz


Table 8.2-3: TSM Bandwidth 10MHz 6dB DTS bandwidth test data

Test frequency (MHz)	Bandwidth (kHz)	Limit
2412	6720	≥ 500 kHz
2442	5650	≥ 500 kHz
2465	5780	≥ 500 kHz

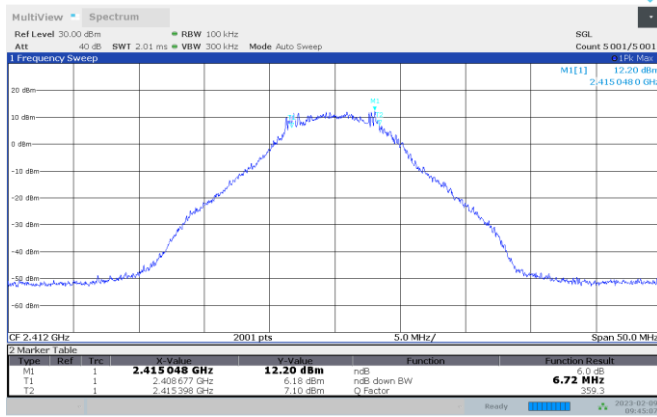


09:45:07 AM 02/09/2023

Figure 8.2-7: TSM Bandwidth 10MHz 6dB DTS bandwidth, 2412 MHz

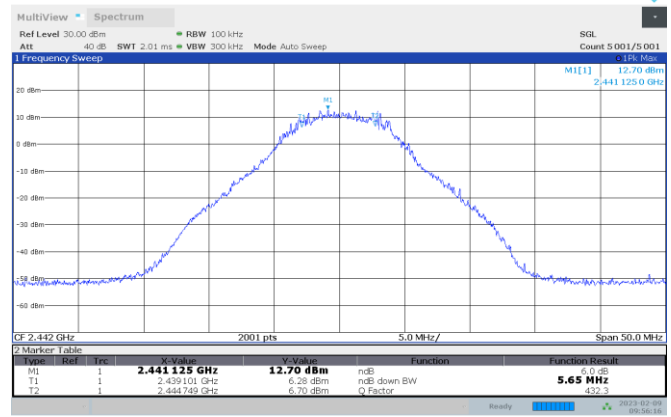

09:56:17 AM 02/09/2023

Figure 8.2-8: TSM Bandwidth 10MHz 6dB DTS bandwidth, 2442 MHz

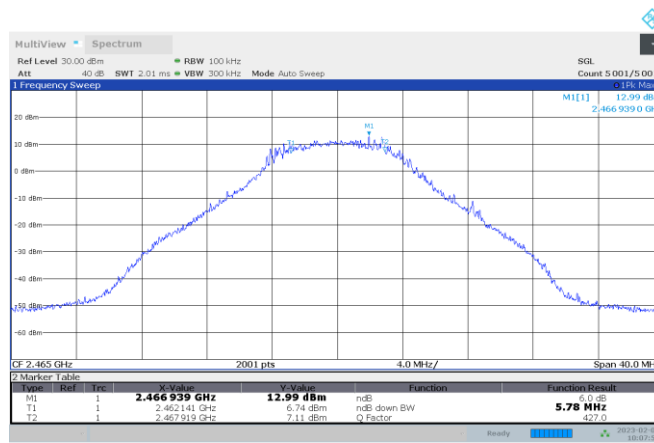


10:07:53 AM 02/09/2023

Figure 8.2-9: TSM Bandwidth 10MHz 6dB DTS bandwidth, 2465 MHz


Table 8.2-4: TSM Bandwidth 20MHz 6dB DTS bandwidth test data

Test frequency (MHz)	Bandwidth (kHz)	Limit
2422	17042	≥ 500 kHz
2442	17191	≥ 500 kHz

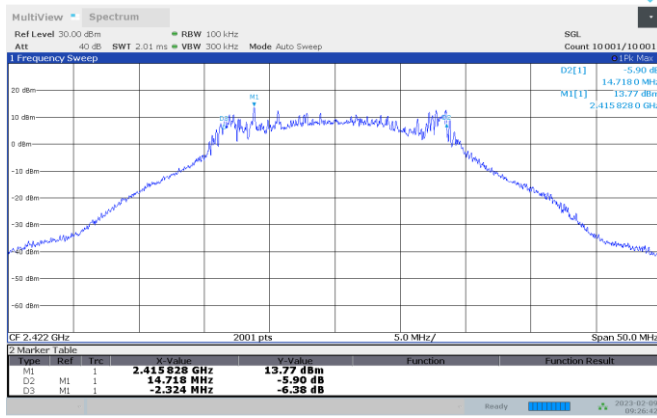

09:26:42 AM 02/09/2023

Figure 8.2-10: TSM Bandwidth 20MHz 6dB DTS bandwidth, 2422 MHz

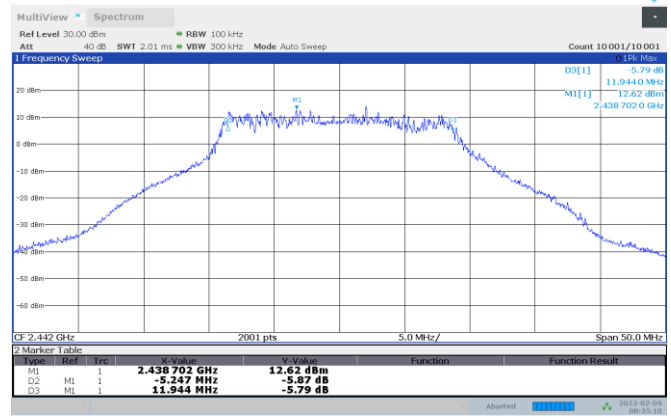

08:35:11 AM 02/09/2023

Figure 8.2-11: TSM Bandwidth 20MHz 6dB DTS bandwidth, 2442 MHz

8.3 Transmitter output power and EIRP requirements

8.3.1 References and limits

- FCC 47 CFR Part 15, Subpart B: §15.247(b)(3)
- RSS-247: §5.4(d)
- Test method: ANSI C63.10 §11.9.2.2.2 (Method AVGSA-1)
- Test method: ANSI C63.10 §11.9.2.2.6 (Method AVGSA-3)

§15.247:

- (b) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

RSS-247:

- 5.4 Devices shall comply with the following requirements, where applicable:
- (d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The EIRP shall not exceed 4 W, except as provided in RSS 247 section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

8.3.2 Test summary

Verdict	Pass		
Test date	February 8, 2023	Temperature	19.74 °C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002.4 mbar
Test location	<input checked="" type="checkbox"/> Wireless bench <input type="checkbox"/> Other:	Relative humidity	39.98 %

8.3.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power. Low, middle and high channels were tested. EIRP = conducted power + declared antenna gain.
 Use method AVGSA-3 for testing.

8.3.4 Setup details

EUT power input during test	12 VDC
EUT setup configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor standing <input type="checkbox"/> Other:

Receiver settings:

Resolution bandwidth	see plot
Video bandwidth	See plot
Detector mode	RMS
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.3.5 Test data

Table 8.3-1: TSM-Bandwidth 1.2MHz Transmitter output power and EIRP test data

Test frequency (MHz)	Peak conducted output power (dBm)	Conducted limit (dBm)	Antenna Gain (declared) (dBi)	EIRP (dBm)	EIRP limit (dBm)
2403	26.95	30.0	5	31.95	35.0
2442	26.86	30.0	5	31.86	35.0
2478	26.84	30.0	5	31.84	35.0

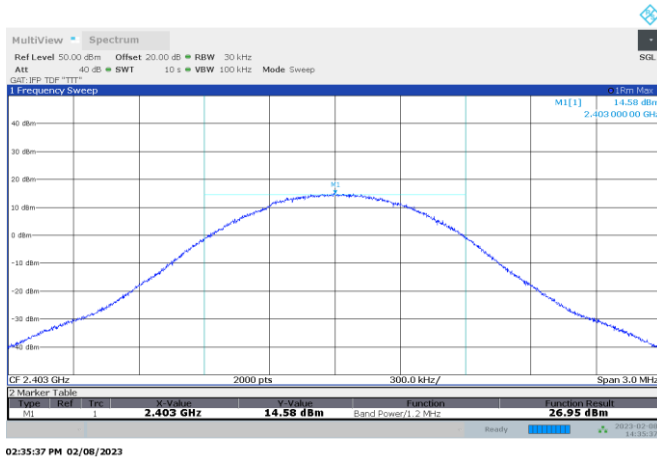


Figure 8.3-1: TSM-Bandwidth 1.2MHz Conducted output power, 2403 MHz

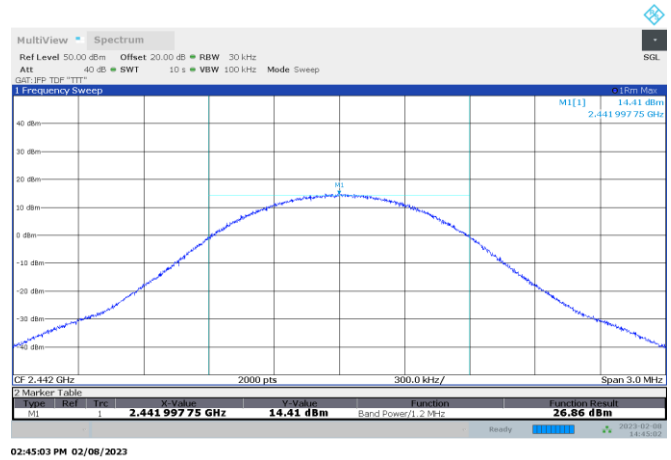


Figure 8.3-2: TSM-Bandwidth 1.2MHz Conducted output power, 2442 MHz

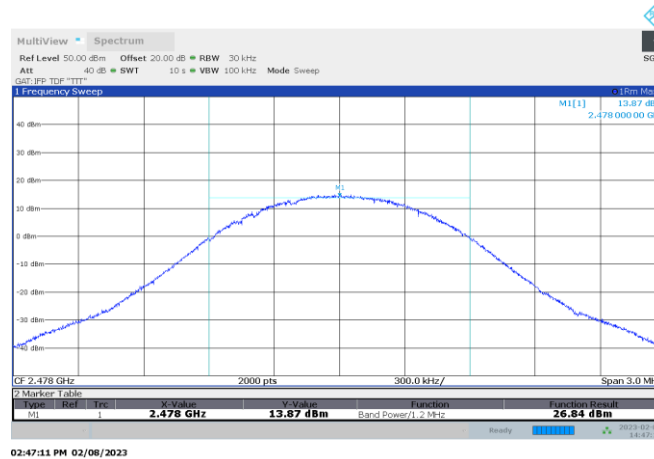


Figure 8.3-3: TSM-Bandwidth 1.2MHz Conducted output power, 2478 MHz

Table 8.3-2: TSM-Bandwidth 3.6MHz Transmitter output power and EIRP test data

Test frequency (MHz)	Peak conducted output power (dBm)	Conducted limit (dBm)	Antenna Gain (declared) (dBi)	EIRP (dBm)	EIRP limit (dBm)
2404	26.73	30.0	5	31.73	35.0
2442	26.70	30.0	5	31.70	35.0
2478	27.07	30.0	5	32.07	35.0

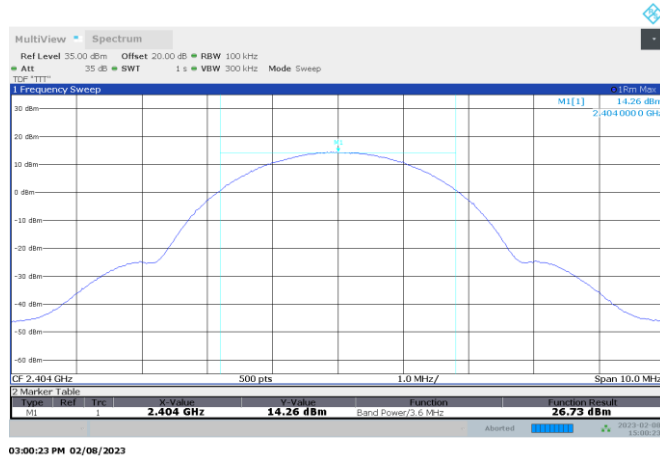


Figure 8.3-4: TSM-Bandwidth 3.6MHz Conducted output power, 2404 MHz

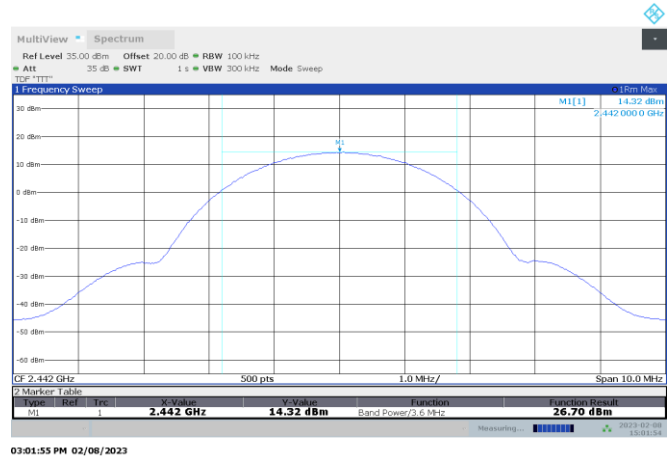


Figure 8.3-5: TSM-Bandwidth 3.6MHz Conducted output power, 2442 MHz

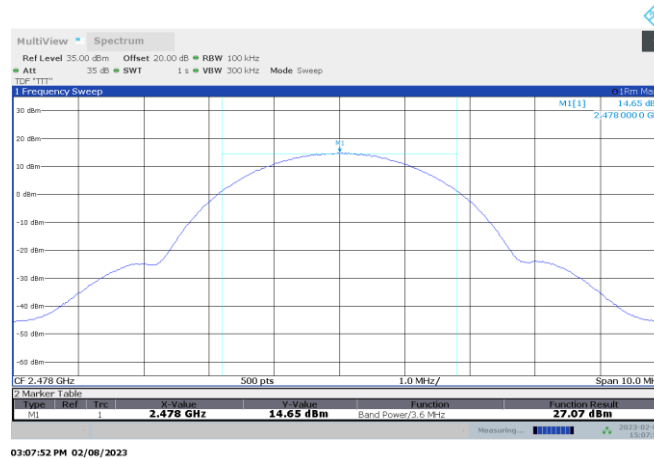


Figure 8.3-6: TSM-Bandwidth 3.6MHz Conducted output power, 2478 MHz

Table 8.3-3: TSM-Bandwidth 10MHz Transmitter output power and EIRP test data

Test frequency (MHz)	Peak conducted output power (dBm)	Conducted limit (dBm)	Antenna Gain (declared) (dBi)	EIRP (dBm)	EIRP limit (dBm)
2412	26.74	30.0	5	31.74	35.0
2442	27.28	30.0	5	32.28	35.0
2465	27.17	30.0	5	32.17	35.0

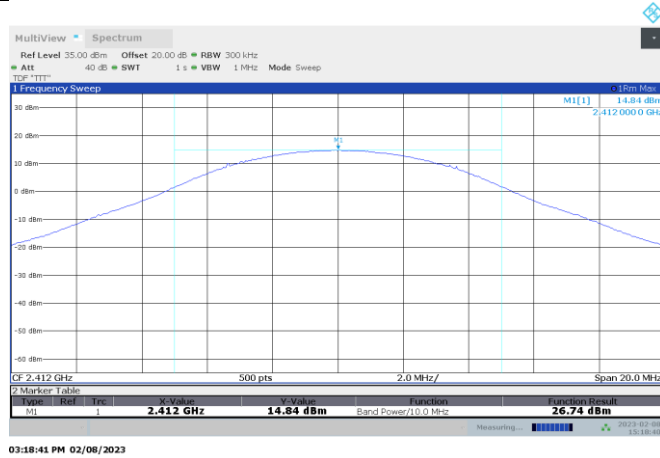


Figure 8.3-7: TSM-Bandwidth 10MHz Conducted output power, 2412 MHz

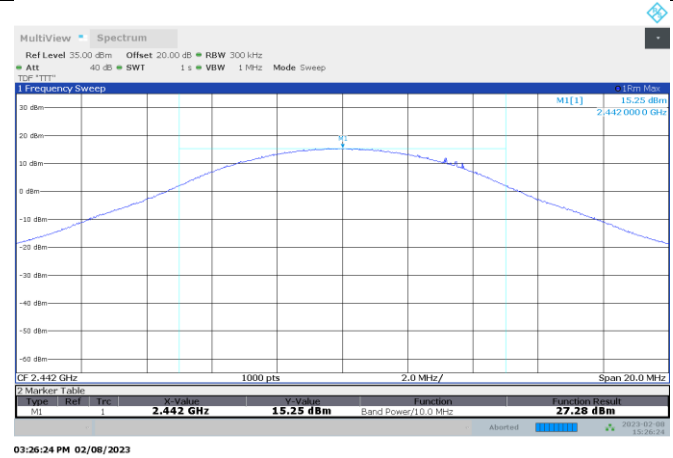


Figure 8.3-8: TSM-Bandwidth 10MHz Conducted output power, 2442 MHz

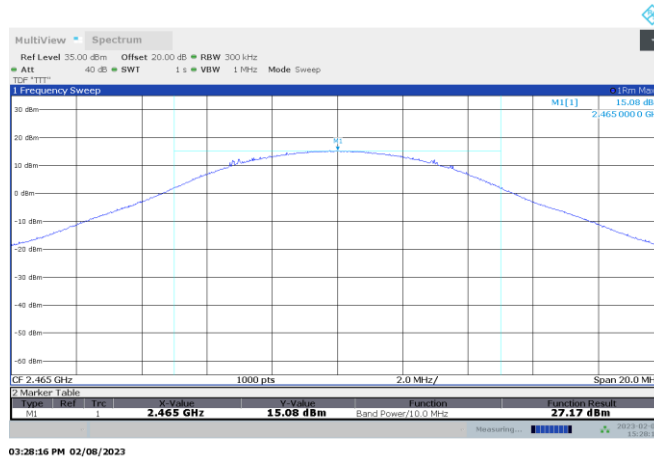


Figure 8.3-9: TSM-Bandwidth 10MHz Conducted output power, 2465 MHz

Section 8

Testing data

Test name

Transmitter output power and EIRP requirements

Specification(s)

FCC Part 15 Subpart B and ICES-003 Issue 7



Table 8.3-4: TSM-Bandwidth 20MHz Transmitter output power and EIRP test data

Test frequency (MHz)	Peak conducted output power (dBm)	Conducted limit (dBm)	Antenna Gain (declared) (dBi)	EIRP (dBm)	EIRP limit (dBm)
2422	28.55	30.0	5	33.55	35.0
2442	27.89	30.0	5	32.89	35.0

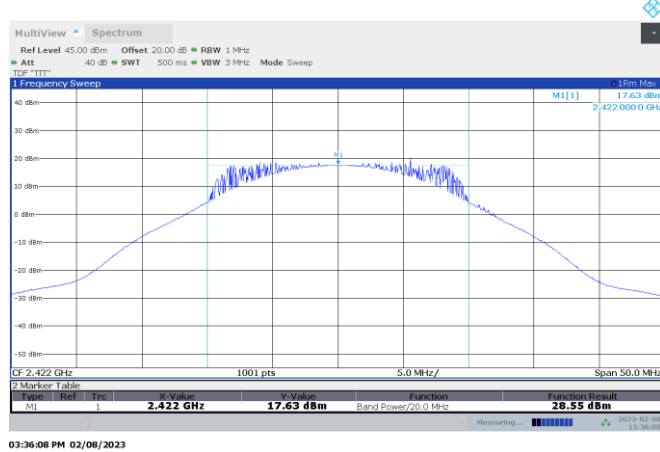


Figure 8.3-10: TSM-Bandwidth 20MHz Conducted output power, 2422 MHz

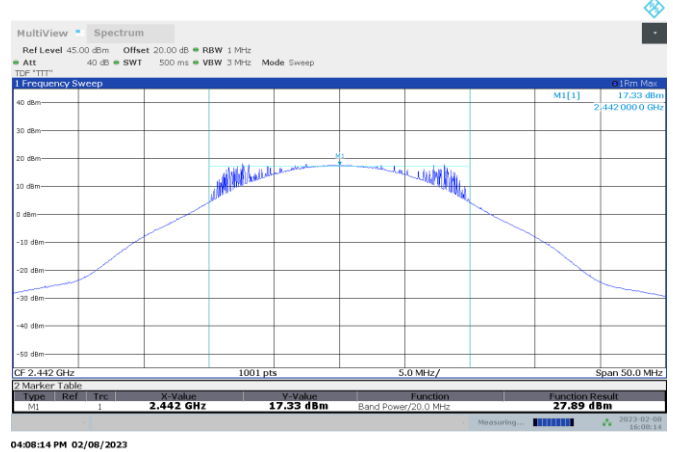


Figure 8.3-11: TSM-Bandwidth 20MHz Conducted output power, 2442 MHz

8.4 Spurious emissions

8.4.1 References and limits

- FCC 47 CFR Part 15, Subpart B: §15.247(d)
- RSS-247: §5.5
- Test method: ANSI C63.10-2014 §6.10.4 (authorized band edge)
- Test method: ANSI C63.10-2014 §6.7 (antenna port conducted spurious emissions)
- Test method: ANSI C63.10-2014 §11.13 (radiated restricted band edge)
- Test method: ANSI C63.10-2014 §6.5, 6.6 (radiated emissions in restricted bands)

§15.247:

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

RSS-247:

- 5.4 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.4-1: FCC §15.209– Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	67.6 – 20 × log ₁₀ (F)	300
0.490–1.705	24000/F	87.6 – 20 × log ₁₀ (F)	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.
 For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Table 8.4-2: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.4.2 Test summary

Verdict	Pass		
Test date	February 3, 2023	Temperature	19.79 °C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	998.2 mbar
Test location	<input checked="" type="checkbox"/> Wireless bench <input type="checkbox"/> 10 m semi-anechoic chamber <input checked="" type="checkbox"/> 3 m semi-anechoic chamber <input type="checkbox"/> Other:	Relative humidity	40.32 %

8.4.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power. Low, middle and high channels were tested. The spectrum was searched from 30 MHz to 26 GHz (above the 10th harmonic of the highest transmit frequency).

For radiated measurements, the EUT was investigated to identify the worst case orientation with respect to the fundamental transmitter power. All measurements were performed with the EUT in that worst-case orientation. All operating modes were assessed with only data for only the worst case bandwidth (3.6 MHz) presented below.

NOTE: Since transmitter output power and power spectral density were measured using average detector methods, the required attenuation of spurious emissions below the highest in-band power in 100 kHz bandwidth is 30 dB. The spectral plots below illustrate a line at 20 dB however there is sufficient margin to see that no emissions exceed the 30 dB attenuation requirement.

8.4.4 Setup details

EUT power input during test	12 VDC
EUT setup configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor standing <input type="checkbox"/> Other:

Spectrum analyzer settings (conducted emissions):

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

Receiver settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth	120 kHz
Video bandwidth	300 kHz
Detector mode	Peak (preview measurements) Quasi-Peak (final measurements)

Receiver settings for radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak (preview measurements) Peak and average (final measurements)

8.4.5 Test data

Authorized band edge conducted emissions

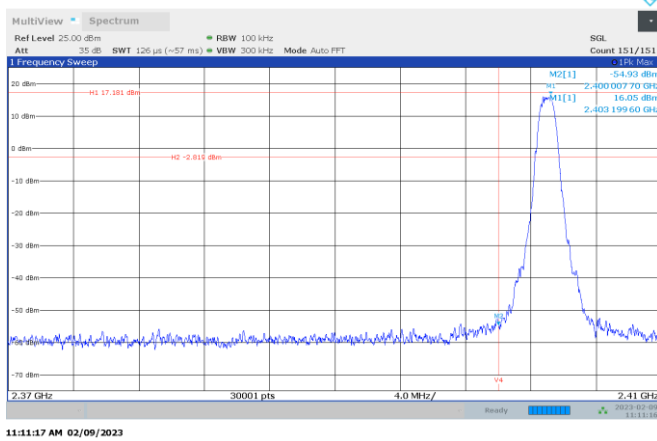


Figure 8.4-1: TSM Bandwidth 1.2MHz Authorized band edge emissions, 2403 MHz

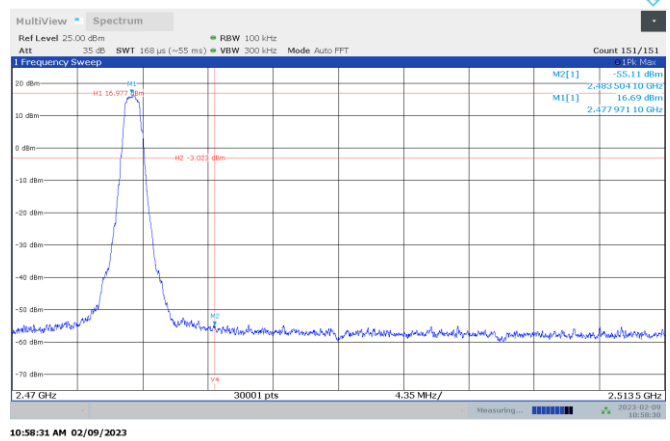


Figure 8.4-2: TSM Bandwidth 1.2MHz Authorized band edge emissions, 2478 MHz

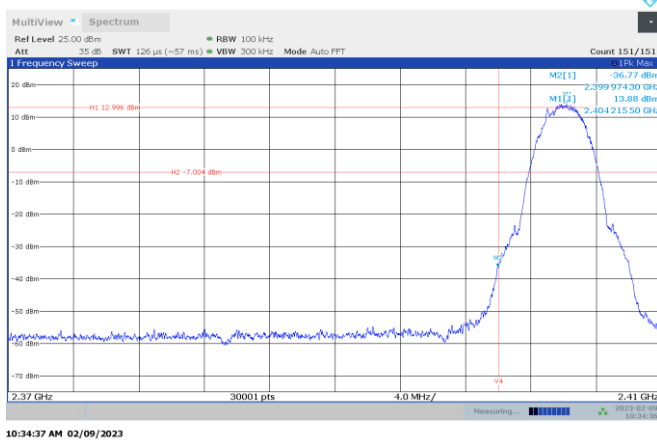


Figure 8.4-3: TSM Bandwidth 3.6MHz Authorized band edge emissions, 2404 MHz

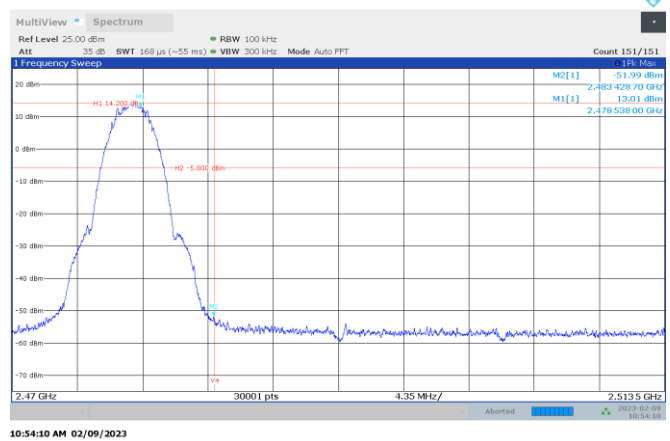


Figure 8.4-4: TSM Bandwidth 3.6MHz Authorized band edge emissions, 2478 MHz

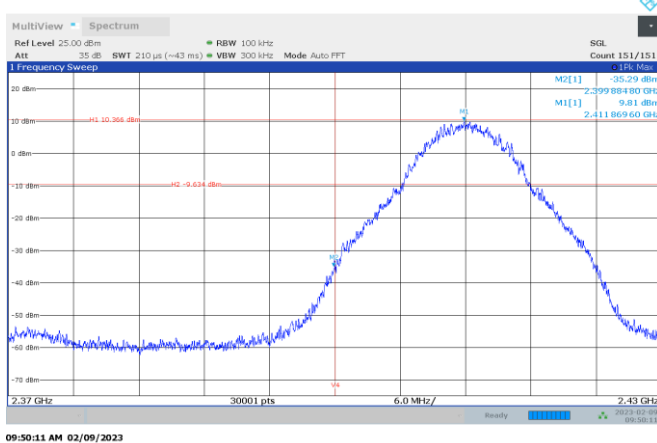


Figure 8.4-5: TSM Bandwidth 10MHz Authorized band edge emissions, 2412MHz



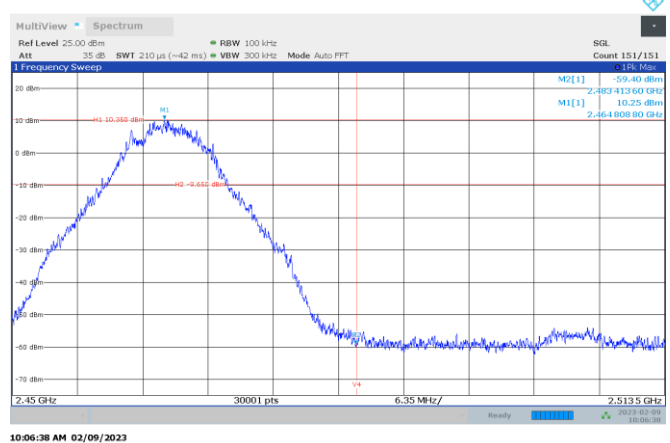


Figure 8.4-6: TSM Bandwidth 10MHz Authorized band edge emissions, 2465MHz

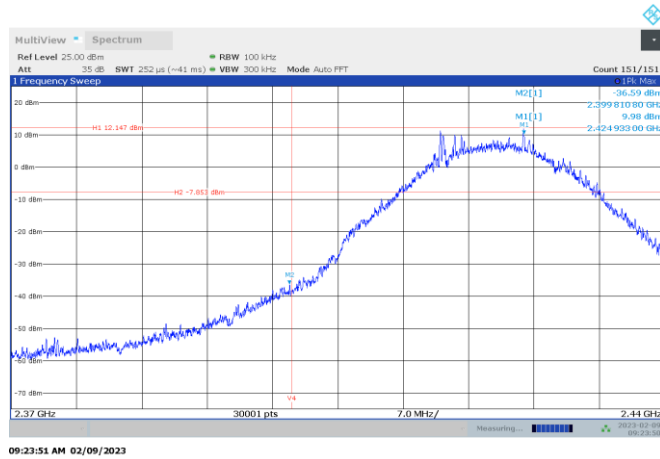

09:23:51 AM 02/09/2023

Figure 8.4-7: TSM Bandwidth 20MHz Authorized band edge emissions, 2422MHz

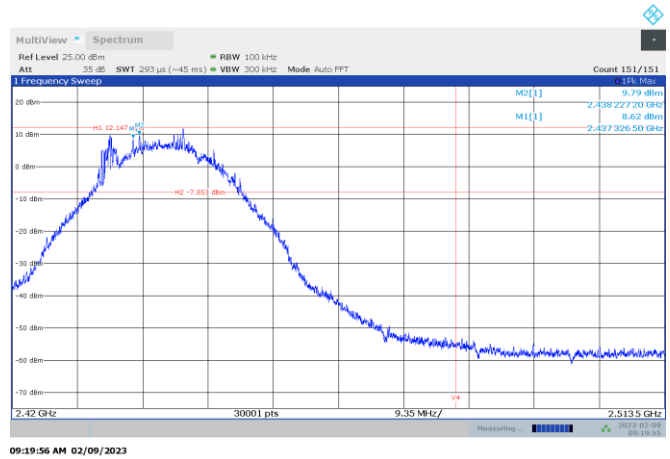

09:19:56 AM 02/09/2023

Figure 8.4-8: TSM Bandwidth 20MHz Authorized band edge emissions, 2442MHz

Antenna port conducted spurious emissions

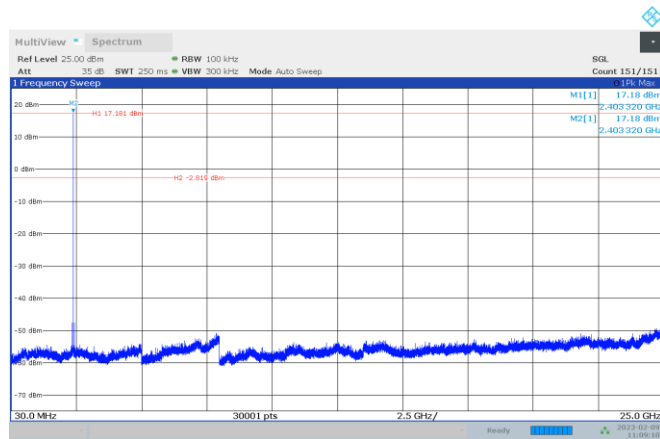


Figure 8.4-9: TSM-Bandwidth 1.2MHz conducted spurious emission, 2403 MHz

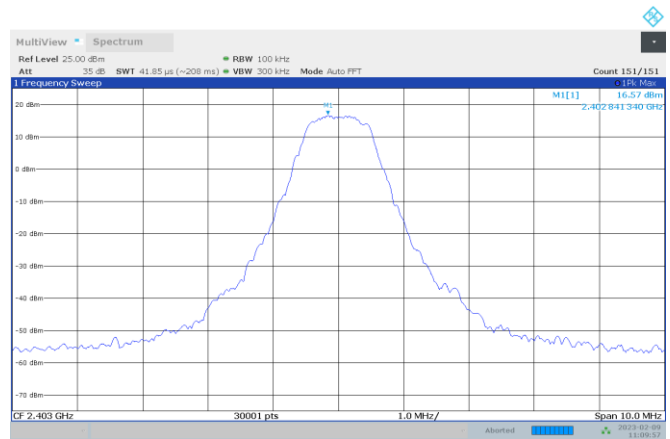


Figure 8.4-10: TSM-Bandwidth 1.2MHz conducted spurious emission reference level, 2403 MHz

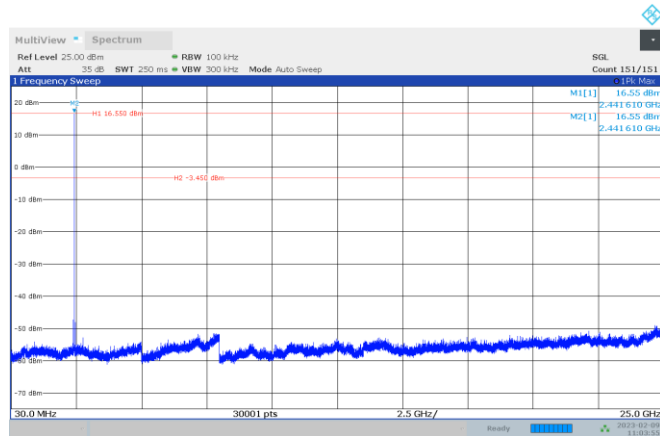


Figure 8.4-11: TSM-Bandwidth 1.2MHz conducted spurious emission, 2442 MHz

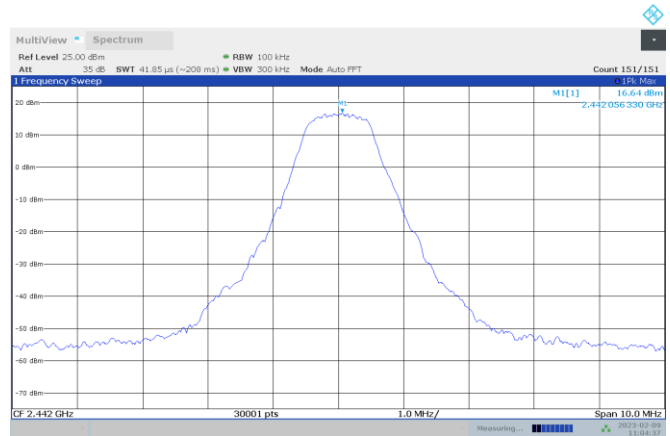


Figure 8.4-12: TSM-Bandwidth 1.2MHz conducted spurious emission reference level, 2442 MHz

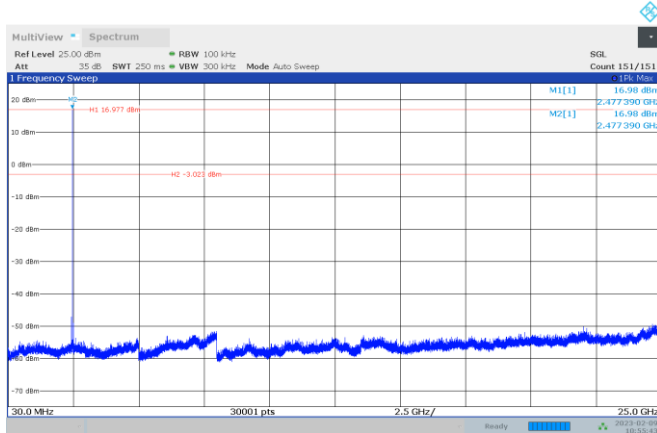


Figure 8.4-13: TSM-Bandwidth 1.2MHz conducted spurious emission, 2478 MHz

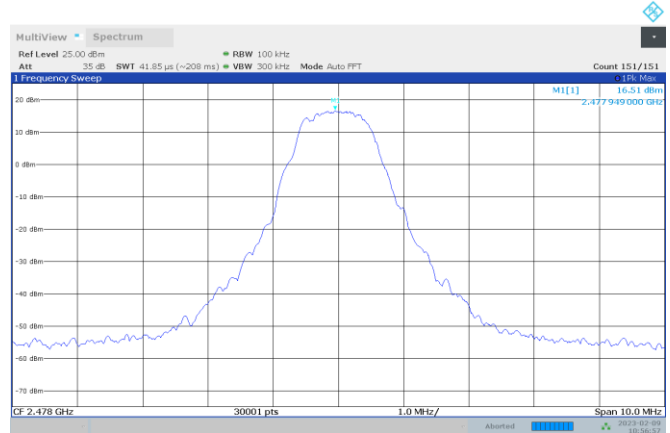


Figure 8.4-14: TSM-Bandwidth 1.2MHz conducted spurious emission reference level, 2478 MHz

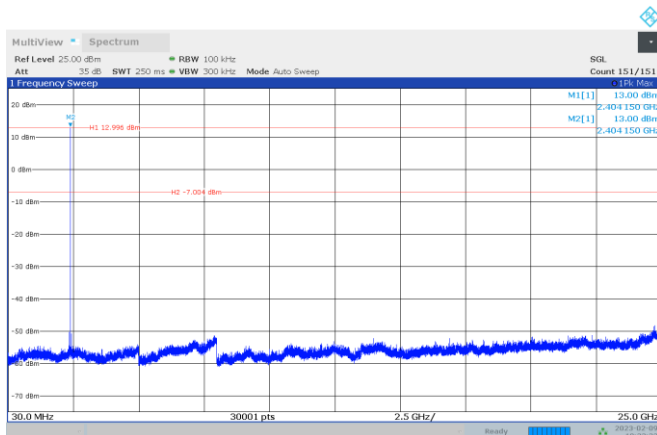


Figure 8.4-15: TSM-Bandwidth 3.6MHz conducted spurious emission, 2404 MHz

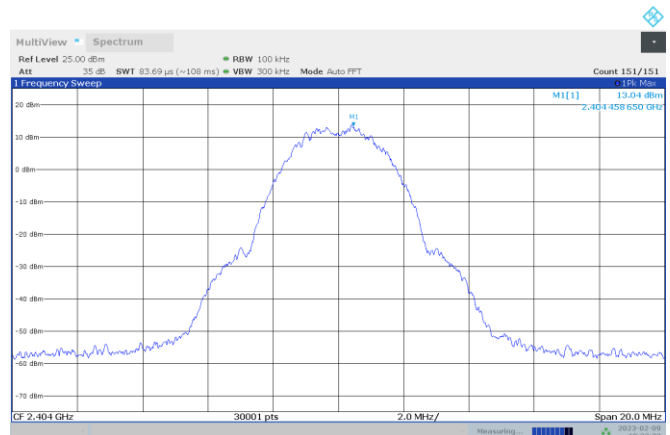


Figure 8.4-16: TSM-Bandwidth 3.6MHz conducted spurious emission reference level, 2404 MHz

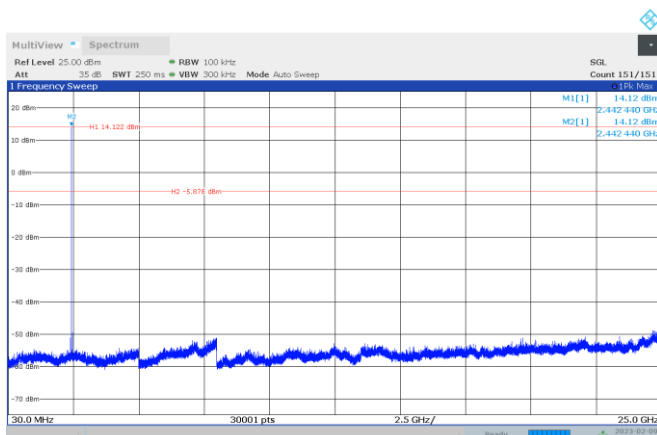


Figure 8.4-17: TSM-Bandwidth 3.6MHz conducted spurious emission, 2442 MHz

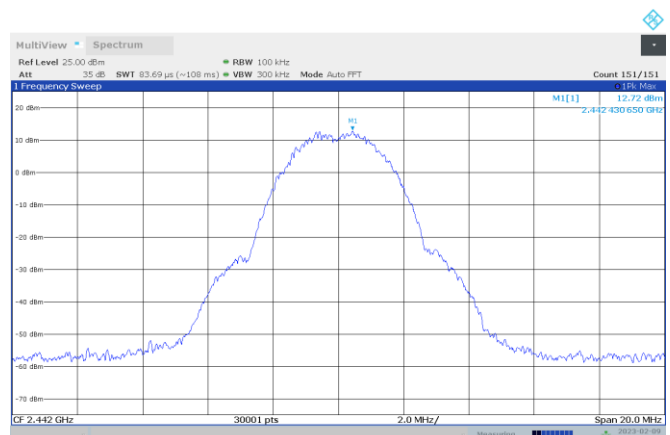


Figure 8.4-18: TSM-Bandwidth 3.6MHz conducted spurious emission reference level, 2442 MHz

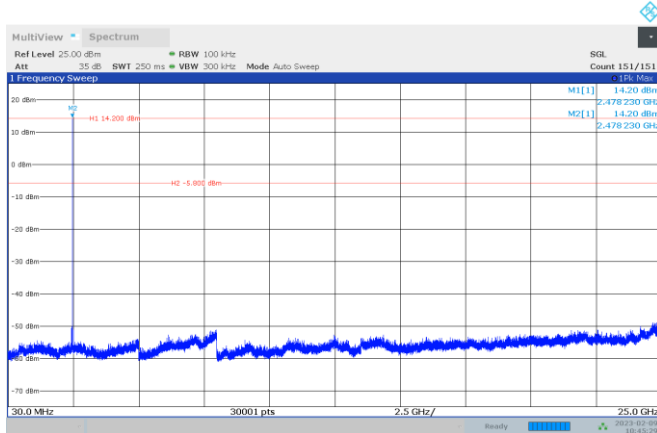


Figure 8.4-19: TSM-Bandwidth 3.6MHz conducted spurious emission 2478 MHz

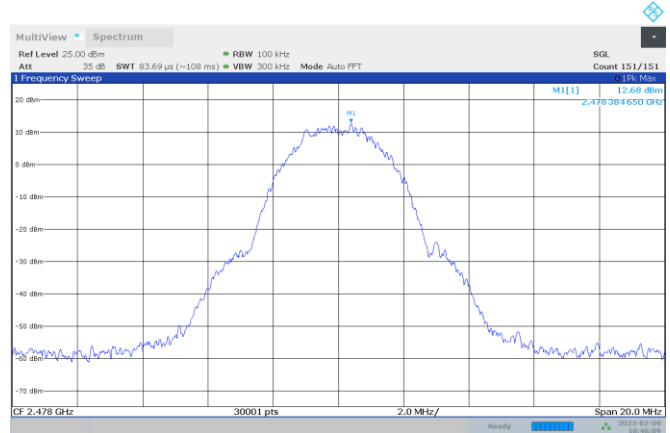


Figure 8.4-20: TSM-Bandwidth 3.6MHz conducted spurious emission reference level, 2478 MHz

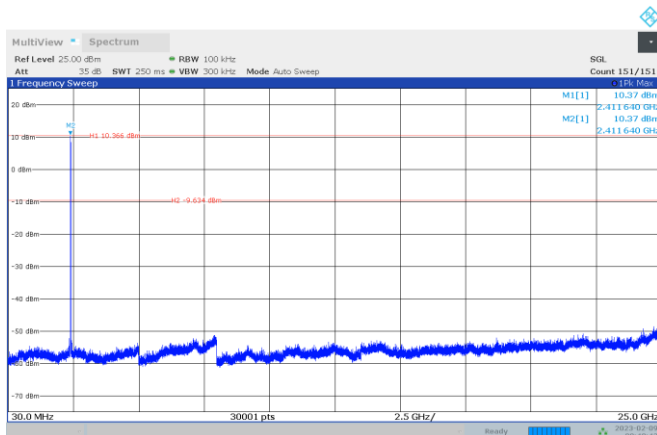


Figure 8.4-21: TSM-Bandwidth 10MHz conducted spurious emission, 2412 MHz

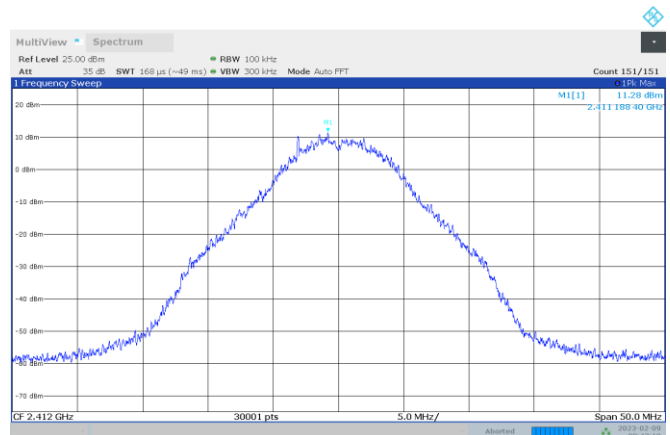


Figure 8.4-22: TSM-Bandwidth 10MHz conducted spurious emission reference level, 2412 MHz

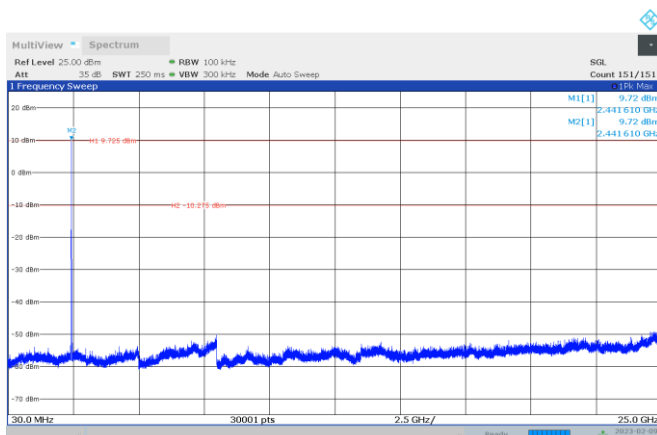


Figure 8.4-23: TSM-Bandwidth 10MHz conducted spurious emission, 2442 MHz

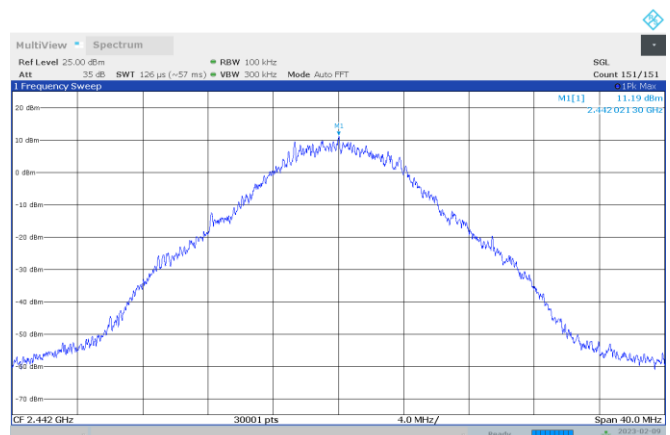


Figure 8.4-24: TSM-Bandwidth 10MHz conducted spurious emission reference level, 2442 MHz

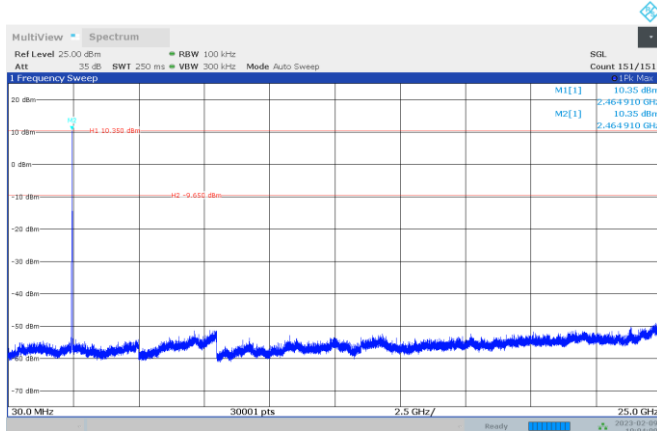


Figure 8.4-25: TSM-Bandwidth 10MHz conducted spurious emission, 2465 MHz

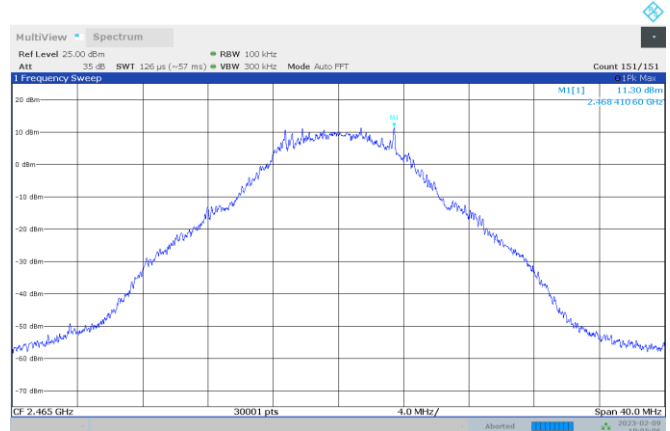


Figure 8.4-26: TSM-Bandwidth 10MHz conducted spurious emission reference level, 2465 MHz

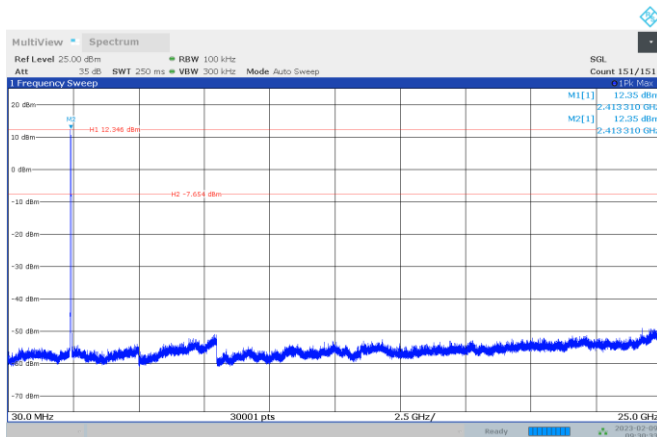


Figure 8.4-27: TSM-Bandwidth 20MHz conducted spurious emission, 2422 MHz

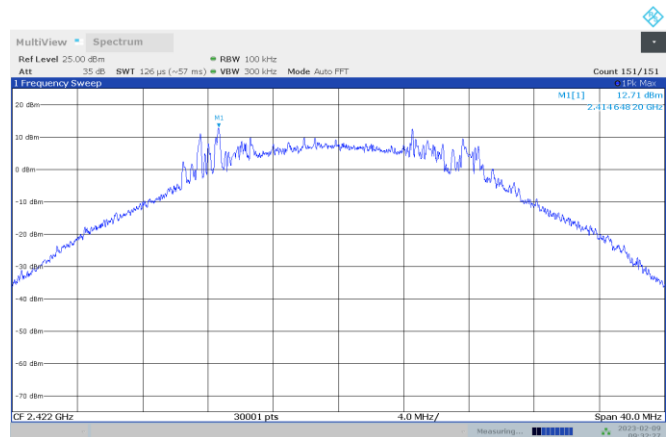


Figure 8.4-28: TSM-Bandwidth 20MHz conducted spurious emission reference level, 2422 MHz

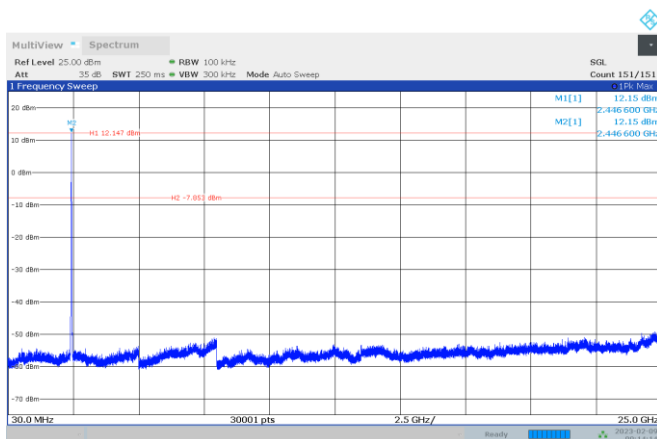


Figure 8.4-29: TSM-Bandwidth 20MHz conducted spurious emission, 2442 MHz

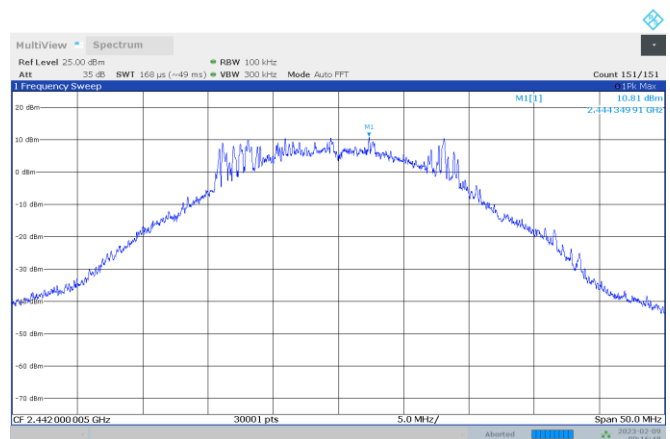


Figure 8.4-30: TSM-Bandwidth 20MHz conducted spurious emission reference level, 2442 MHz

Radiated restricted band edge emissions

TSM-BE-low-TW860-BW1.2-2403MHz

Full Spectrum

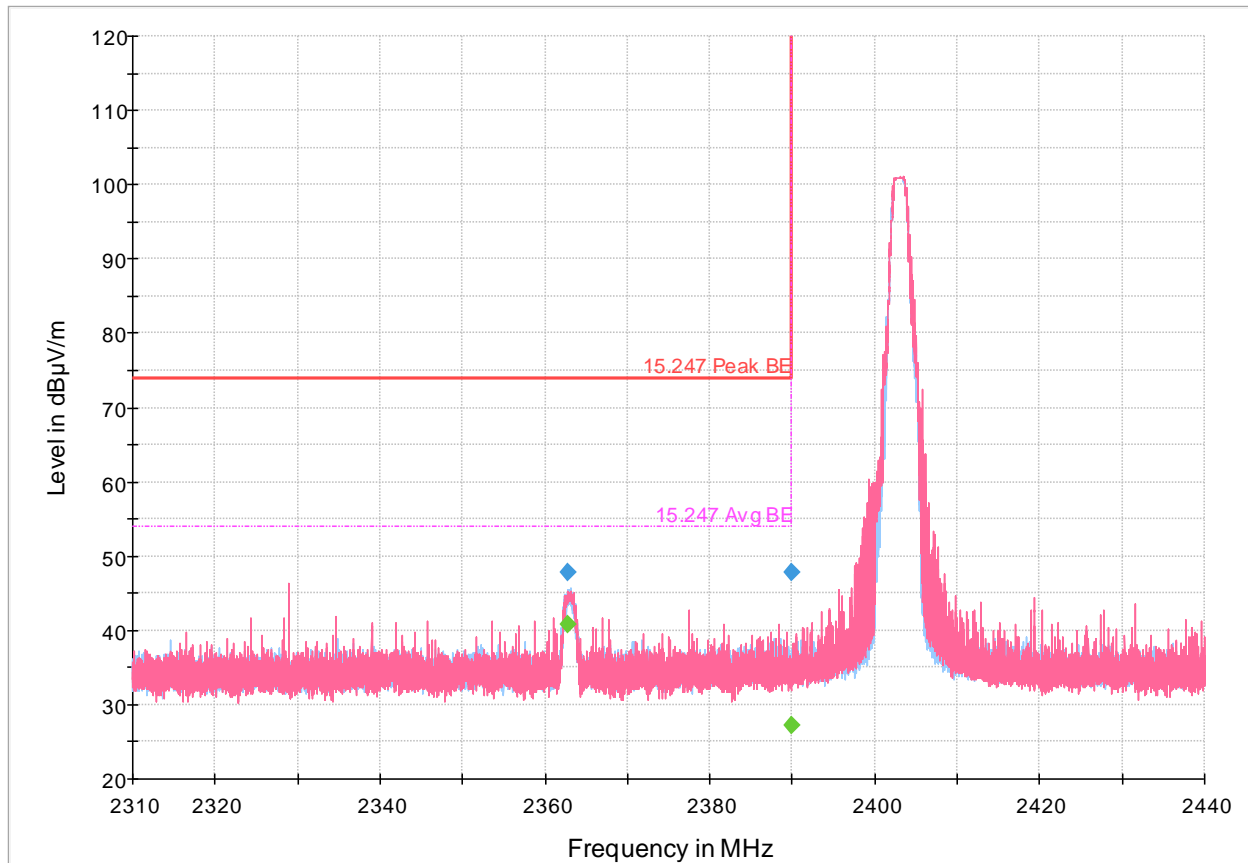


Figure 8.4-31: Radiated emissions spectral plot (2.31 GHz - 2.44 GHz)

Table 8.4-3: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2362.858000	---	40.91	53.90	12.99	5000.0	1000.000	319.0	H	0.0	-10.1
2362.858000	47.74	---	73.90	26.16	5000.0	1000.000	319.0	H	0.0	-10.1
2390.000000	---	27.13	53.90	26.77	5000.0	1000.000	128.0	V	302.0	-10.0
2390.000000	47.76	---	73.90	26.14	5000.0	1000.000	128.0	V	302.0	-10.0

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)

² Correction factors = antenna factor ACF (dB) + cable loss (dB)

³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-high-TW860-BW1.2-2478MHz
 Full Spectrum

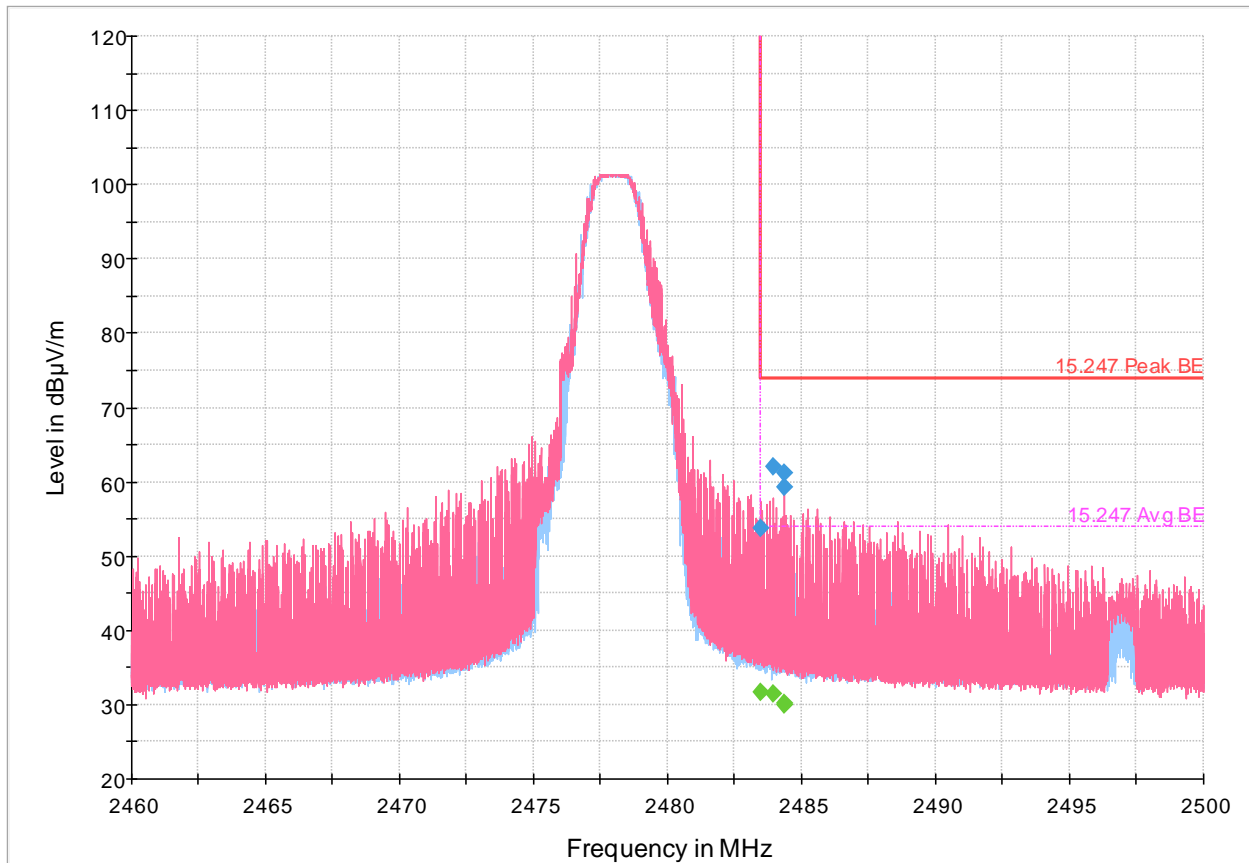


Figure 8.4-32: Radiated emissions spectral plot (2.46 GHz - 2.5 GHz)

Table 8.4-4: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	31.63	53.90	22.27	5000.0	1000.000	202.0	H	0.0	-9.7
2483.500000	53.68	---	73.90	20.22	5000.0	1000.000	202.0	H	0.0	-9.7
2483.968000	61.97	---	73.90	11.93	5000.0	1000.000	139.0	V	150.0	-9.7
2483.968000	---	31.42	53.90	22.48	5000.0	1000.000	139.0	V	150.0	-9.7
2484.337333	59.34	---	73.90	14.56	5000.0	1000.000	175.0	V	136.0	-9.7
2484.337333	---	30.01	53.90	23.89	5000.0	1000.000	186.0	H	341.0	-9.7
2484.337333	---	30.27	53.90	23.63	5000.0	1000.000	222.0	V	64.0	-9.7
2484.337333	61.26	---	73.90	12.64	5000.0	1000.000	222.0	V	64.0	-9.7

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-low-TW860-BW3.6-2404MHz
 Full Spectrum

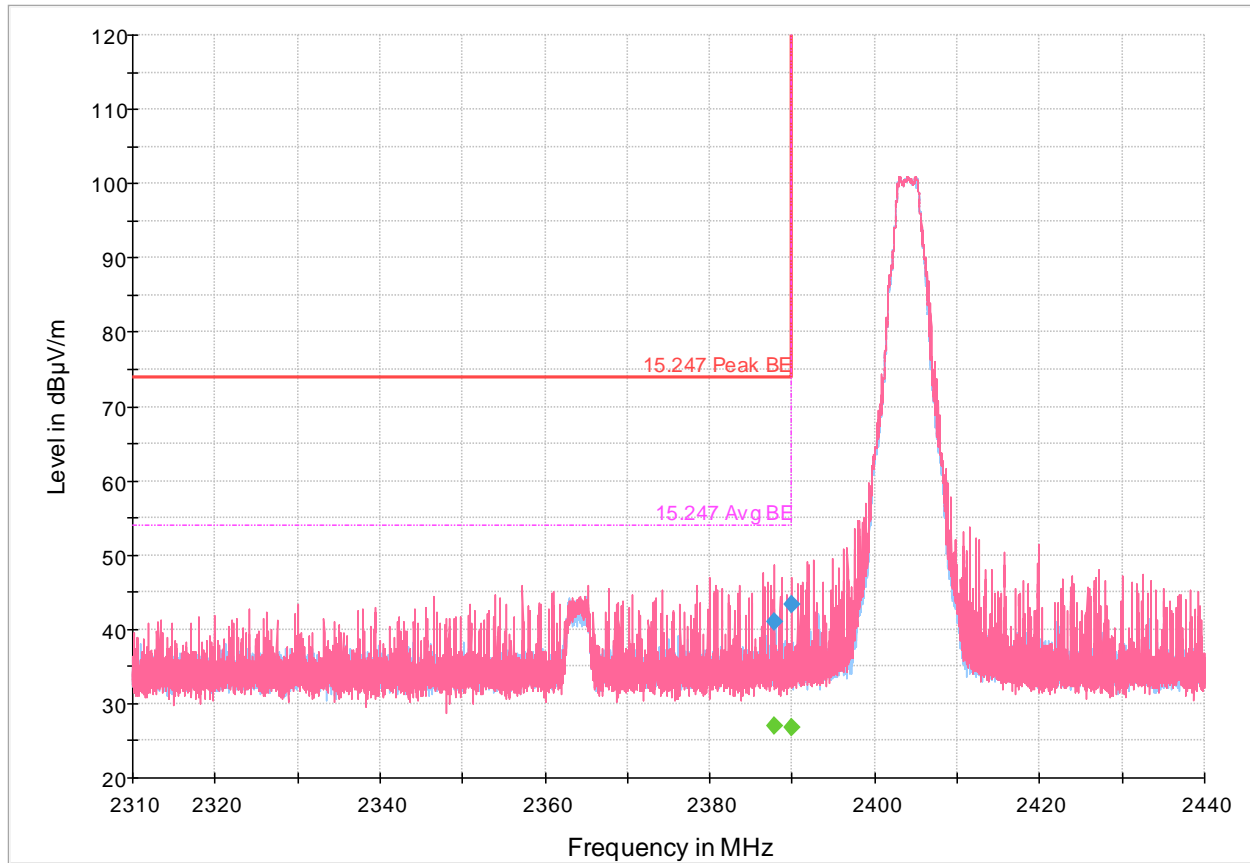


Figure 8.4-33: Radiated emissions spectral plot (2.31 GHz - 2.44 GHz)

Table 8.4-5: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2387.800667	---	26.99	53.90	26.91	5000.0	1000.000	200.0	H	310.0	-10.0
2387.800667	40.99	---	73.90	32.91	5000.0	1000.000	200.0	H	310.0	-10.0
2390.000000	---	26.72	53.90	27.18	5000.0	1000.000	186.0	H	0.0	-10.0
2390.000000	43.40	---	73.90	30.50	5000.0	1000.000	186.0	H	0.0	-10.0

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-high-TW860-BW3.6-2478MHz
 Full Spectrum

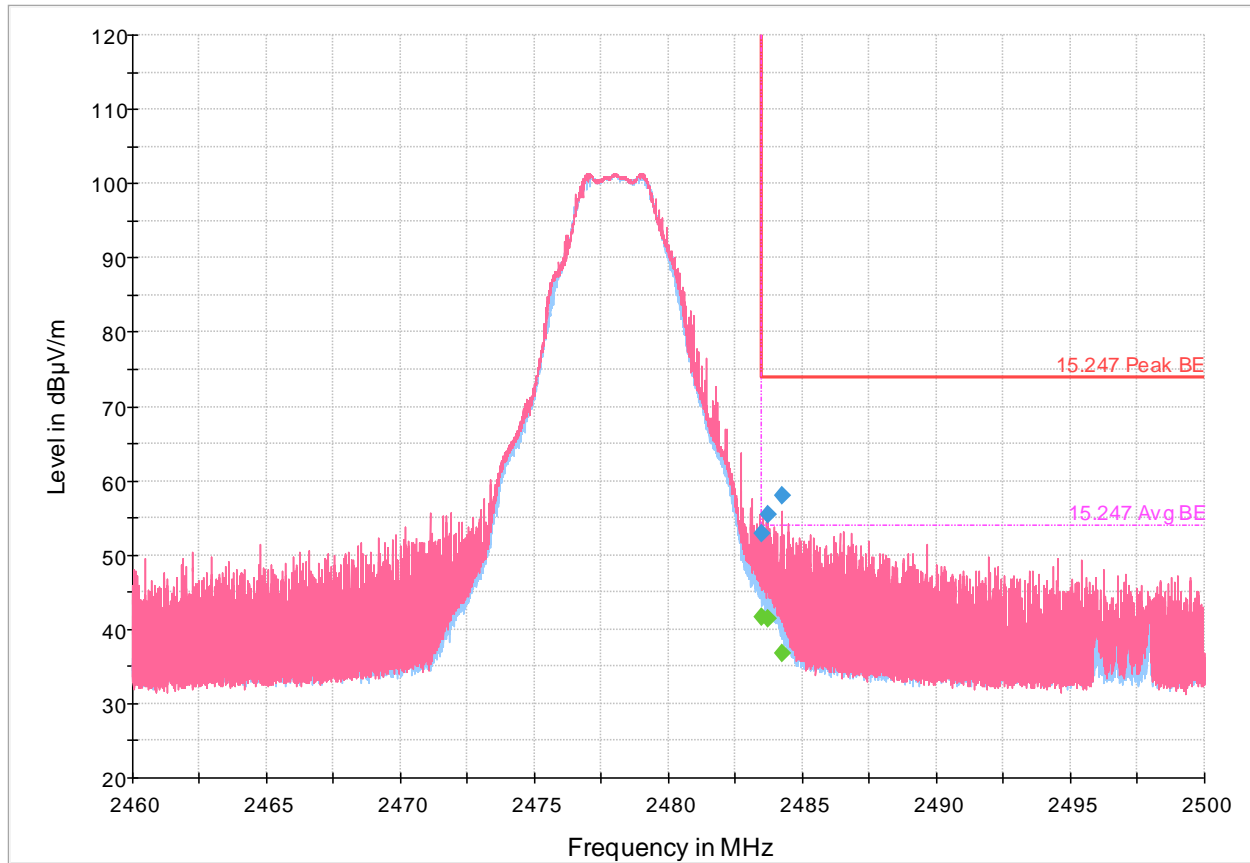


Figure 8.4-34: Radiated emissions spectral plot (2.46 GHz - 2.5 GHz)

Table 8.4-6: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	41.59	53.90	12.31	5000.0	1000.000	214.0	H	0.0	-9.7
2483.500000	52.94	---	73.90	20.96	5000.0	1000.000	214.0	H	0.0	-9.7
2483.716000	---	41.35	53.90	12.55	5000.0	1000.000	180.0	V	330.0	-9.7
2483.716000	55.49	---	73.90	18.41	5000.0	1000.000	180.0	V	330.0	-9.7
2484.230667	---	36.87	53.90	17.03	5000.0	1000.000	132.0	V	199.0	-9.7
2484.230667	57.94	---	73.90	15.96	5000.0	1000.000	132.0	V	199.0	-9.7

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-low-TW860-BW10-2412MHz
 Full Spectrum

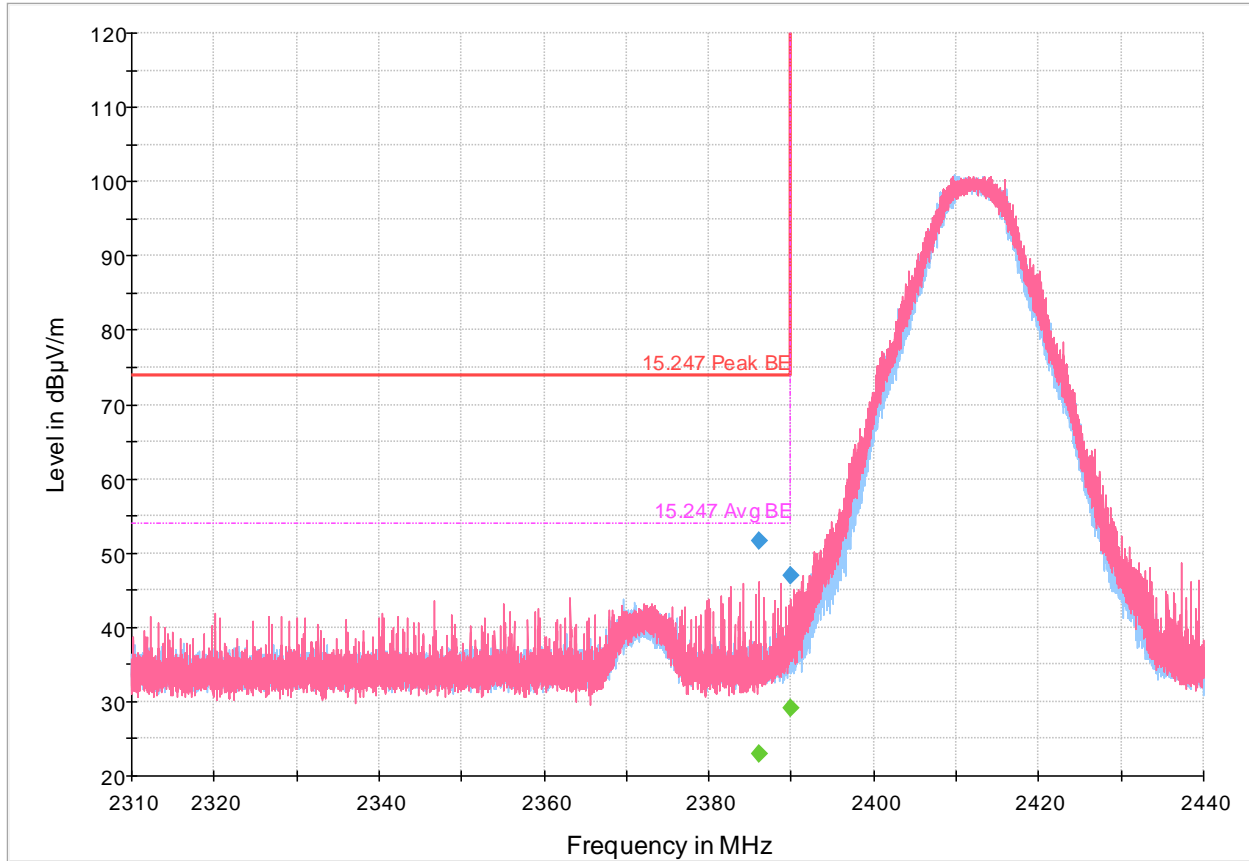


Figure 8.4-35: Radiated emissions spectral plot (2.31 GHz - 2.44 GHz)

Table 8.4-7: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.145333	51.73	---	73.90	22.17	5000.0	1000.000	136.0	V	201.0	-10.0
2386.145333	---	22.98	53.90	30.92	5000.0	1000.000	136.0	V	201.0	-10.0
2390.000000	46.92	---	73.90	26.98	5000.0	1000.000	135.0	H	0.0	-10.0
2390.000000	---	29.13	53.90	24.77	5000.0	1000.000	135.0	H	0.0	-10.0

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-high-TW860-BW10-2465MHz

Full Spectrum

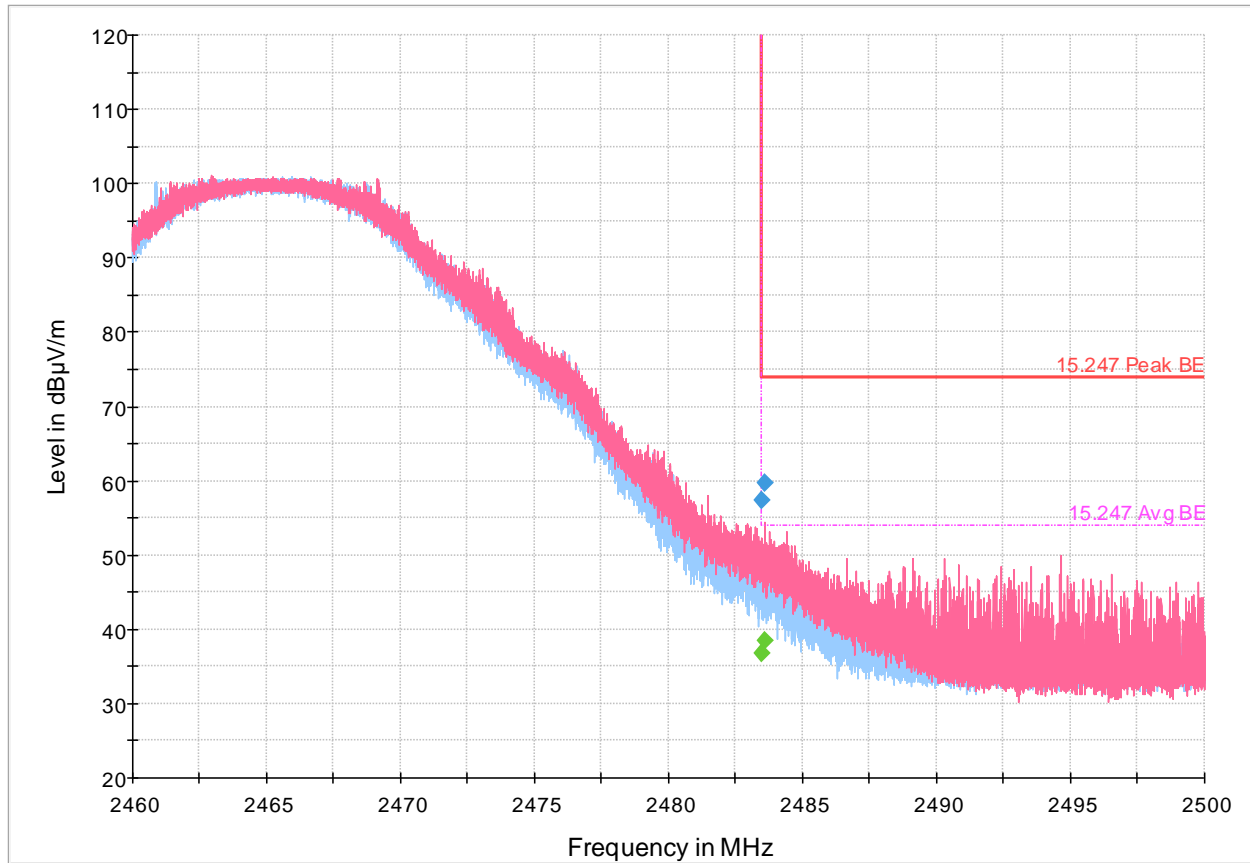


Figure 8.4-36: Radiated emissions spectral plot (2.46 GHz - 2.5 GHz)

Table 8.4-8: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	36.81	53.90	17.09	5000.0	1000.000	389.0	V	177.0	-9.7
2483.500000	57.39	---	73.90	16.51	5000.0	1000.000	389.0	V	177.0	-9.7
2483.612000	---	38.52	53.90	15.38	5000.0	1000.000	151.0	V	37.0	-9.7
2483.612000	59.68	---	73.90	14.22	5000.0	1000.000	151.0	V	37.0	-9.7

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-low-TW860-BW20-2422MHz
 Full Spectrum

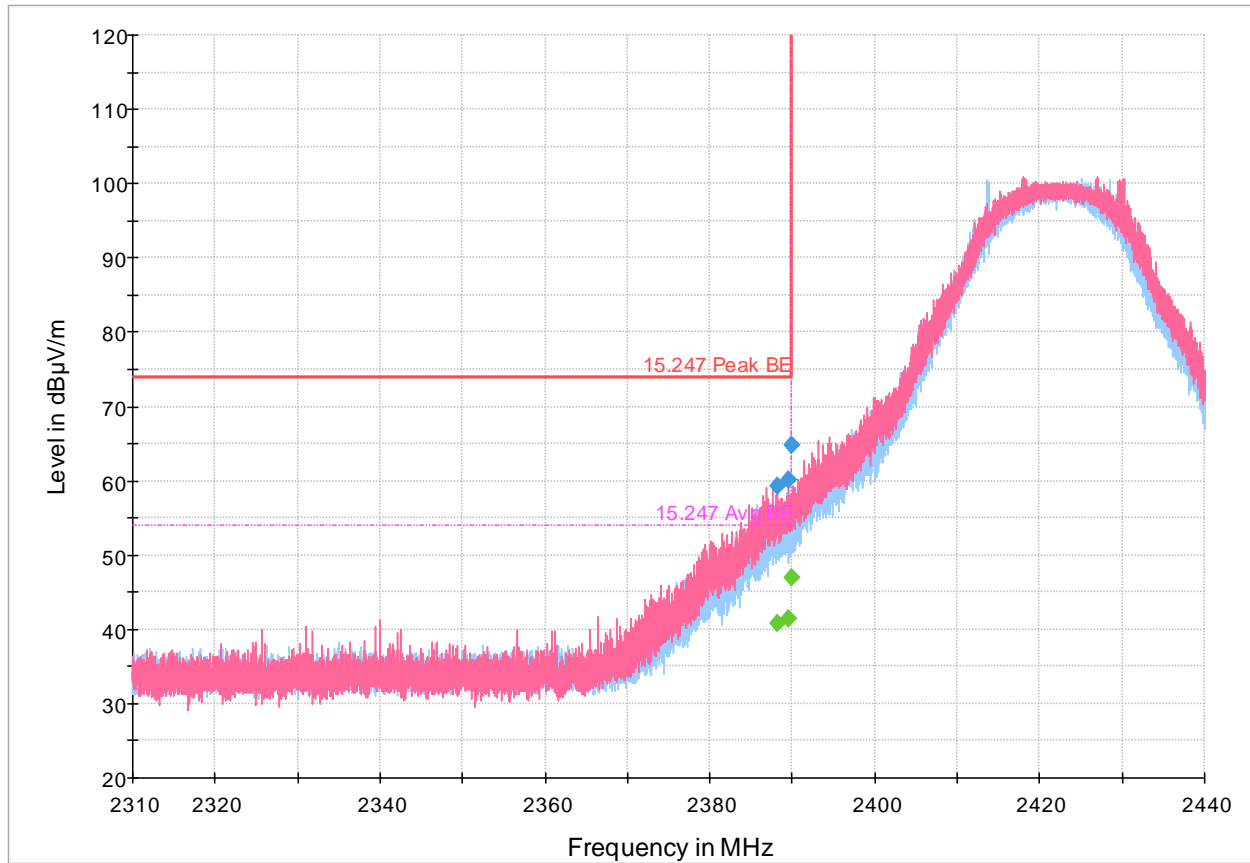


Figure 8.4-37: Radiated emissions spectral plot (2.31 GHz - 2.44 GHz)

Table 8.4-9: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.182000	59.28	---	73.90	14.62	5000.0	1000.000	383.0	V	149.0	-10.0
2388.182000	---	40.84	53.90	13.06	5000.0	1000.000	383.0	V	149.0	-10.0
2389.447333	60.04	---	73.90	13.86	5000.0	1000.000	288.0	H	0.0	-10.0
2389.447333	---	41.54	53.90	12.36	5000.0	1000.000	288.0	H	0.0	-10.0
2390.000000	---	47.00	53.90	6.90	5000.0	1000.000	302.0	V	119.0	-10.0
2390.000000	64.84	---	73.90	9.06	5000.0	1000.000	302.0	V	119.0	-10.0

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-BE-high-TW860-BW20-2442MHz
 Full Spectrum

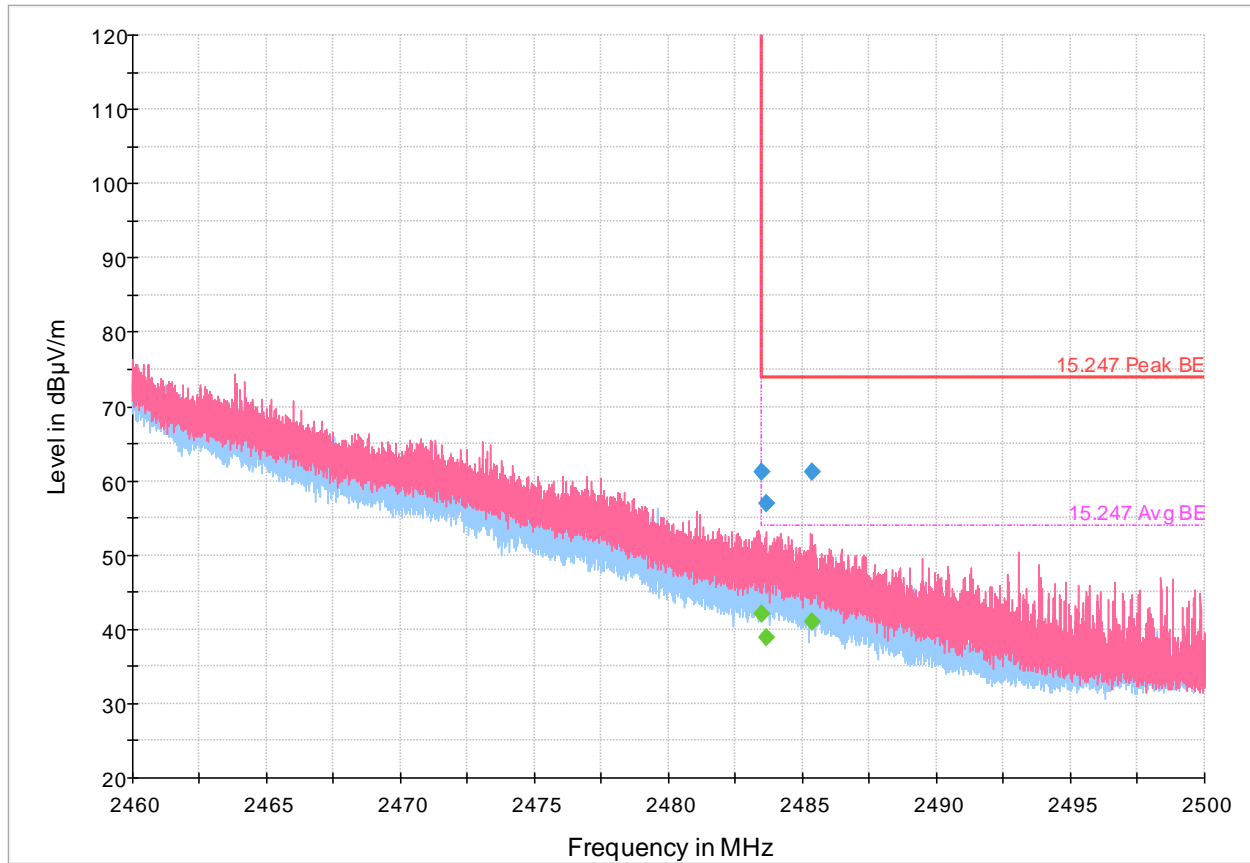


Figure 8.4-38: Radiated emissions spectral plot (2.46 GHz - 2.5 GHz)

Table 8.4-10: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	61.23	---	73.90	12.67	5000.0	1000.000	296.0	V	51.0	-9.7
2483.500000	---	42.14	53.90	11.76	5000.0	1000.000	296.0	V	51.0	-9.7
2483.630667	56.97	---	73.90	16.93	5000.0	1000.000	234.0	H	0.0	-9.7
2483.630667	---	38.98	53.90	14.92	5000.0	1000.000	234.0	H	0.0	-9.7
2485.326667	---	40.94	53.90	12.96	5000.0	1000.000	298.0	V	50.0	-9.7
2485.326667	61.16	---	73.90	12.74	5000.0	1000.000	298.0	V	50.0	-9.7

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

Radiated emissions in restricted bands

TSM-RE-30-1000MHz-TW860-BW3.6-2403MHz

Full Spectrum

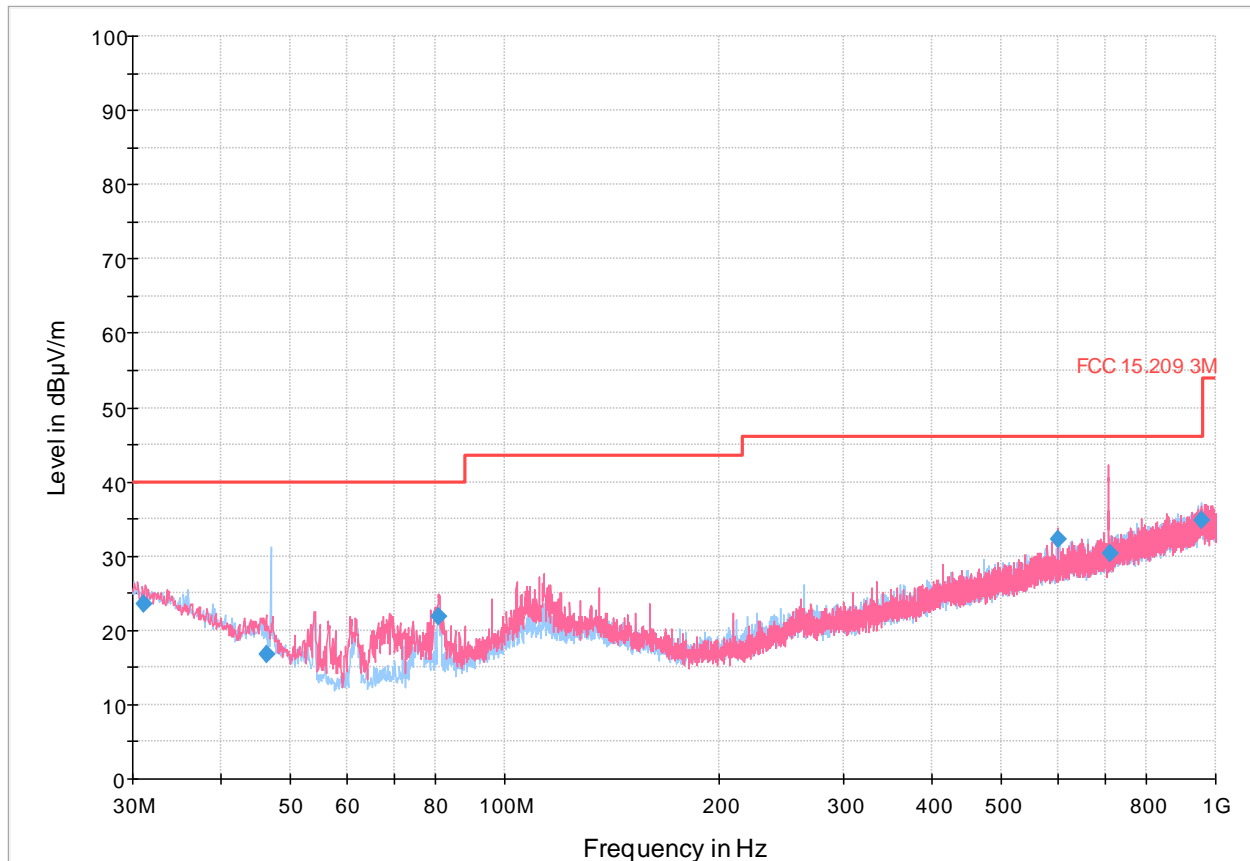


Figure 8.4-39: Radiated emissions spectral plot (30 MHz - 1 GHz)

Table 8.4-11: Radiated emissions results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.080000	23.62	40.00	16.38	5000.0	120.000	212.0	V	21.0	26.0
46.295000	16.80	40.00	23.20	5000.0	120.000	155.0	H	317.0	17.9
80.931000	21.94	40.00	18.06	5000.0	120.000	361.0	V	308.0	15.2
600.029000	32.23	46.00	13.77	5000.0	120.000	200.0	V	353.0	29.1
708.807000	30.33	46.00	15.67	5000.0	120.000	357.0	V	317.0	30.6
956.058000	34.74	46.00	11.26	5000.0	120.000	356.0	H	302.0	34.9

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-30-1000MHz-TW860-BW3.6-2442MHz
 Full Spectrum

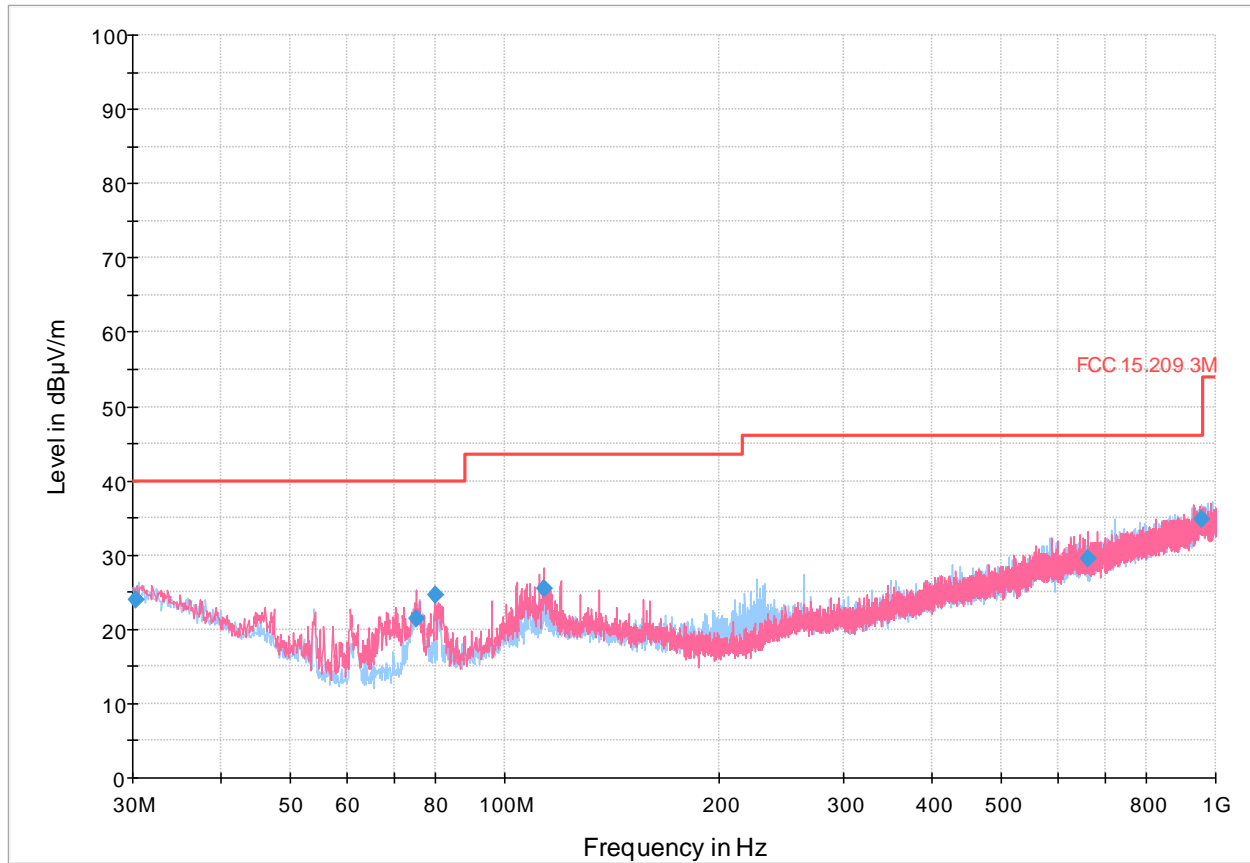


Figure 8.4-40: Radiated emissions spectral plot (30 MHz - 1 GHz)

Table 8.4-12: Radiated emissions results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.240000	24.01	40.00	15.99	5000.0	120.000	137.0	H	75.0	26.5
75.042000	21.37	40.00	18.63	5000.0	120.000	133.0	V	122.0	14.5
79.995000	24.62	40.00	15.38	5000.0	120.000	247.0	H	355.0	15.1
113.654000	25.51	43.50	17.99	5000.0	120.000	377.0	V	34.0	19.2
661.632000	29.46	46.00	16.54	5000.0	120.000	400.0	V	343.0	29.9
955.569000	34.76	46.00	11.24	5000.0	120.000	132.0	H	357.0	34.9

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-30-1000MHz-TW860-BW3.6-2478MHz
 Full Spectrum

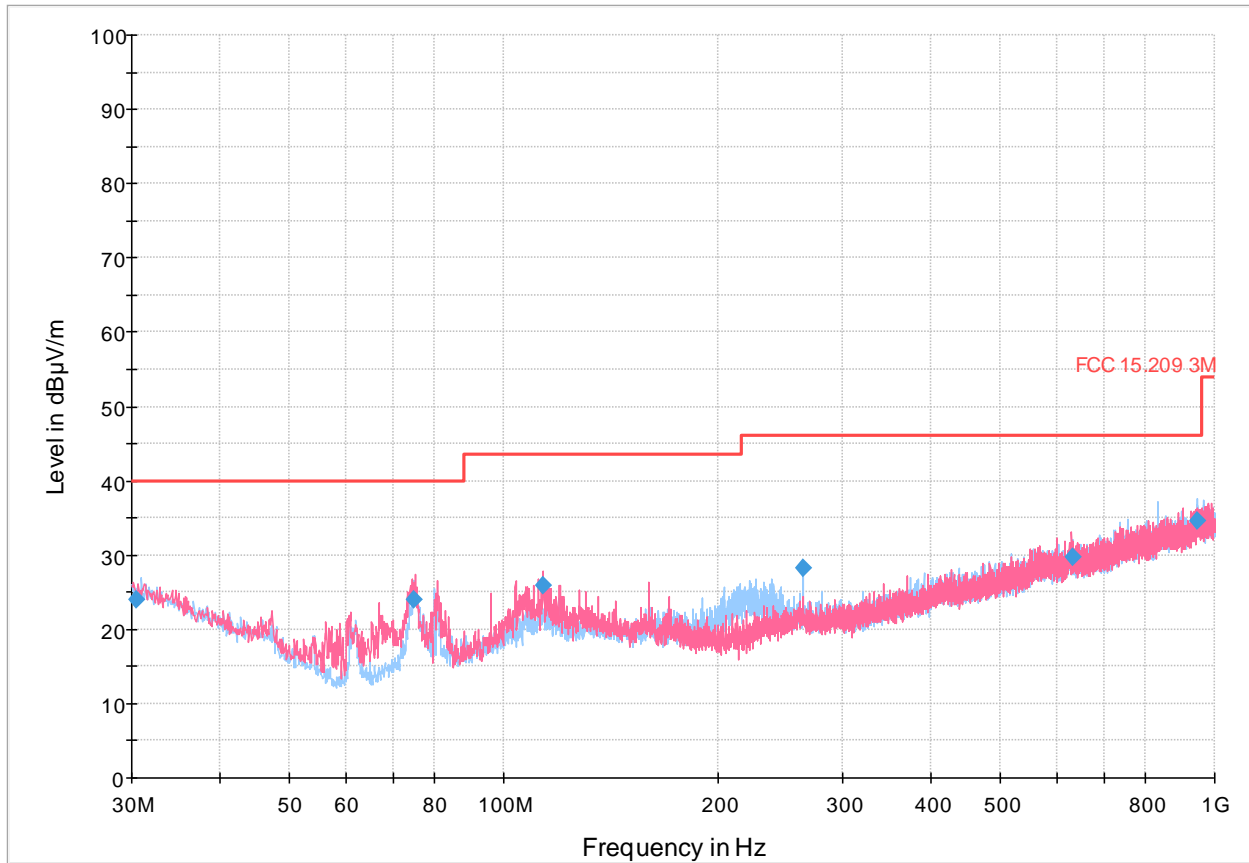


Figure 8.4-41: Radiated emissions spectral plot (30 MHz - 1 GHz)

Table 8.4-13: Radiated emissions results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.480000	23.90	40.00	16.10	5000.0	120.000	389.0	H	47.0	26.3
74.825000	24.01	40.00	15.99	5000.0	120.000	104.0	V	84.0	14.5
113.654000	25.86	43.50	17.64	5000.0	120.000	384.0	V	141.0	19.2
264.004000	28.27	46.00	17.73	5000.0	120.000	122.0	H	60.0	21.8
630.242000	29.77	46.00	16.23	5000.0	120.000	256.0	V	50.0	30.0
945.817000	34.57	46.00	11.43	5000.0	120.000	276.0	H	254.0	34.8

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-1-18GHz-TW860-BW3.6-2404MHz

Full Spectrum

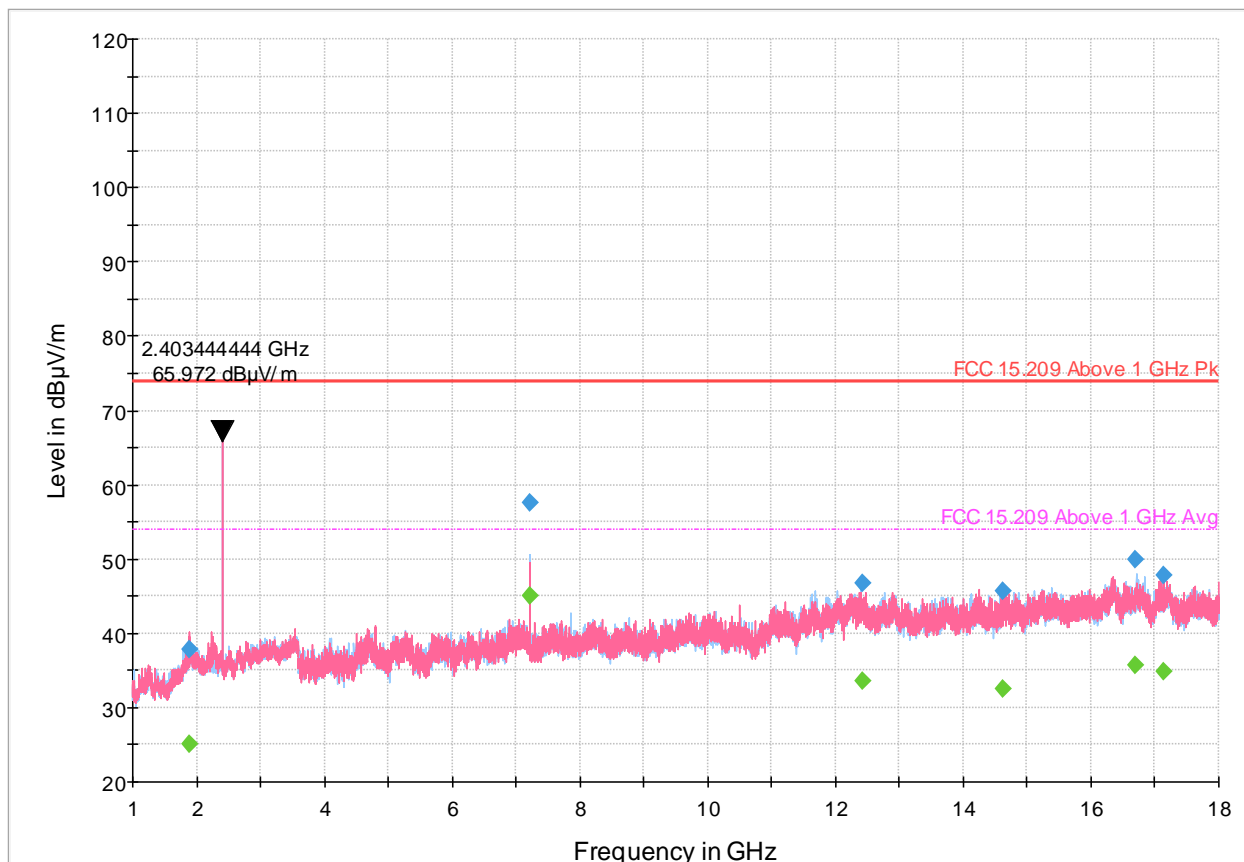


Figure 8.4-42: Radiated emissions spectral plot (1 GHz - 18 GHz)

Table 8.4-14: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1881.488889	37.82	---	73.90	36.08	5000.0	1000.000	161.0	V	324.0	-10.7
1881.488889	---	25.14	53.90	28.76	5000.0	1000.000	161.0	V	324.0	-10.7
7209.211111	57.67	---	73.90	16.23	5000.0	1000.000	164.0	H	88.0	0.4
7209.211111	---	45.03	53.90	8.87	5000.0	1000.000	164.0	H	88.0	0.4
12413.400000	46.78	---	73.90	27.12	5000.0	1000.000	292.0	H	0.0	7.3
12413.400000	---	33.56	53.90	20.34	5000.0	1000.000	292.0	H	0.0	7.3
14629.922222	---	32.52	53.90	21.38	5000.0	1000.000	114.0	V	238.0	9.3
14629.922222	45.66	---	73.90	28.24	5000.0	1000.000	114.0	V	238.0	9.3
16701.966667	49.86	---	73.90	24.04	5000.0	1000.000	255.0	H	344.0	14.7
16701.966667	---	35.70	53.90	18.20	5000.0	1000.000	255.0	H	344.0	14.7
17130.500000	---	34.89	53.90	19.01	5000.0	1000.000	120.0	V	224.0	14.0
17130.500000	47.88	---	73.90	26.02	5000.0	1000.000	120.0	V	224.0	14.0

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-1-18GHz-TW860-BW3.6-2442MHz
 Full Spectrum

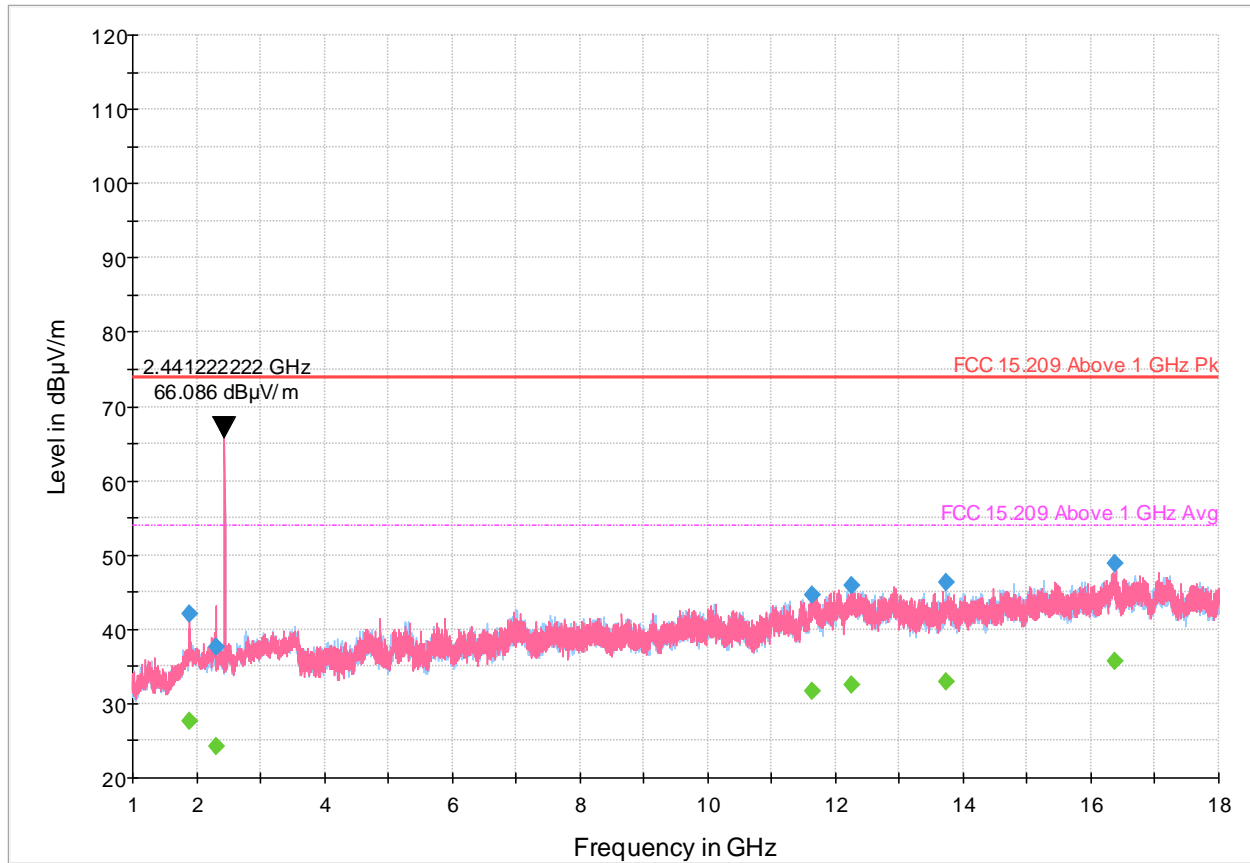


Figure 8.4-43: Radiated emissions spectral plot (1 GHz - 18 GHz)

Table 8.4-15: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1894.611111	---	27.65	53.90	26.25	5000.0	1000.000	328.0	V	288.0	-10.8
1894.611111	42.00	---	73.90	31.90	5000.0	1000.000	328.0	V	288.0	-10.8
2305.944444	---	24.20	53.90	29.70	5000.0	1000.000	378.0	V	242.0	-10.6
2305.944444	37.69	---	73.90	36.21	5000.0	1000.000	378.0	V	242.0	-10.6
11630.922222	44.55	---	73.90	29.35	5000.0	1000.000	194.0	H	264.0	4.9
11630.922222	---	31.58	53.90	22.32	5000.0	1000.000	194.0	H	264.0	4.9
12261.511111	---	32.60	53.90	21.30	5000.0	1000.000	190.0	V	286.0	7.0
12261.511111	45.82	---	73.90	28.08	5000.0	1000.000	190.0	V	286.0	7.0
13731.733333	46.41	---	73.90	27.49	5000.0	1000.000	226.0	H	0.0	9.7
13731.733333	---	32.86	53.90	21.04	5000.0	1000.000	226.0	H	0.0	9.7
16366.188889	48.81	---	73.90	25.09	5000.0	1000.000	107.0	H	300.0	12.9
16366.188889	---	35.78	53.90	18.12	5000.0	1000.000	107.0	H	300.0	12.9

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-1-18GHz-TW860-BW3.6-2478MHz
 Full Spectrum

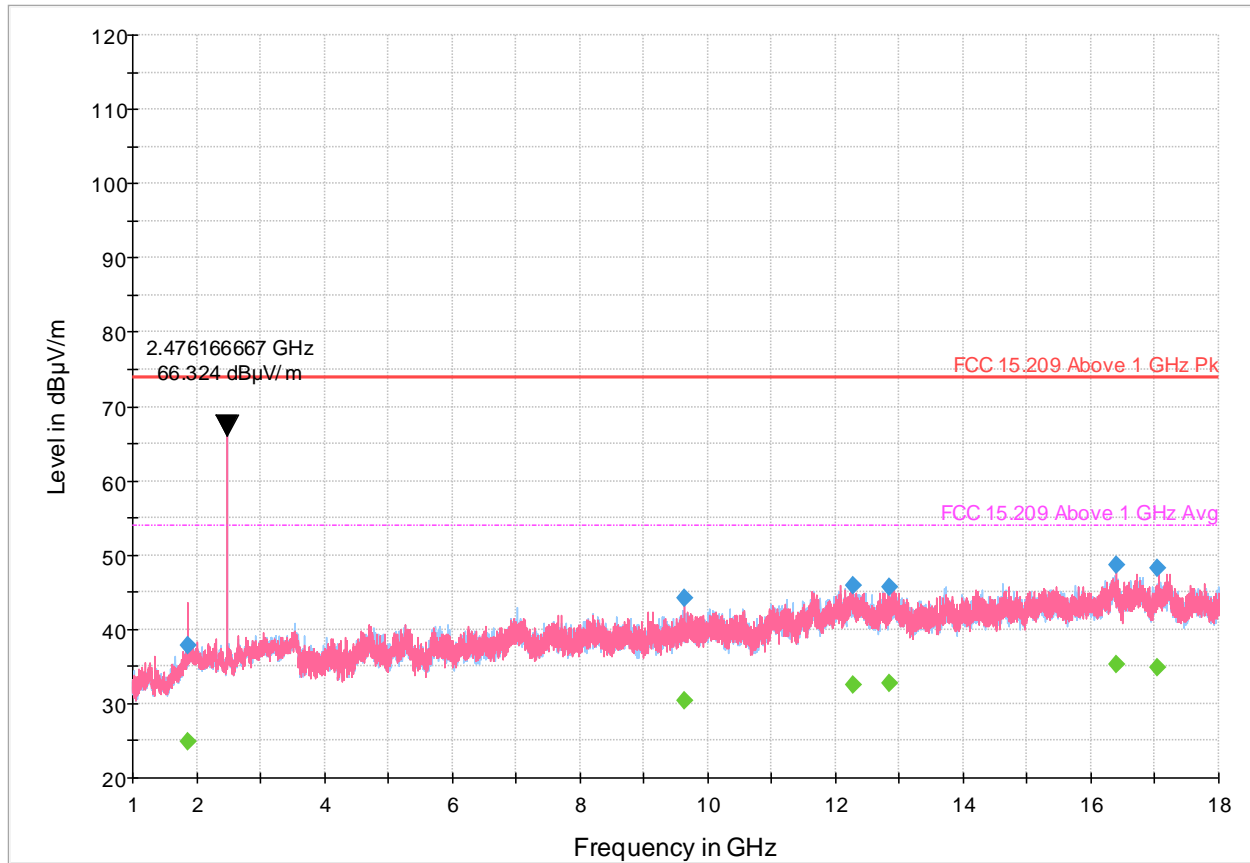


Figure 8.4-44: Radiated emissions spectral plot (1 GHz - 18 GHz)

Table 8.4-16: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1873.177778	37.87	---	73.90	36.03	5000.0	1000.000	104.0	V	260.0	-10.8
1873.177778	---	24.80	53.90	29.10	5000.0	1000.000	104.0	V	260.0	-10.8
9638.644444	44.24	---	73.90	29.66	5000.0	1000.000	256.0	V	277.0	3.6
9638.644444	---	30.35	53.90	23.55	5000.0	1000.000	256.0	V	277.0	3.6
12284.444444	---	32.43	53.90	21.47	5000.0	1000.000	256.0	V	136.0	7.1
12284.444444	45.96	---	73.90	27.94	5000.0	1000.000	256.0	V	136.0	7.1
12844.066667	---	32.64	53.90	21.26	5000.0	1000.000	384.0	H	146.0	8.7
12844.066667	45.76	---	73.90	28.14	5000.0	1000.000	384.0	H	146.0	8.7
16389.000000	---	35.38	53.90	18.52	5000.0	1000.000	380.0	V	136.0	12.6
16389.000000	48.57	---	73.90	25.33	5000.0	1000.000	380.0	V	136.0	12.6
17045.811111	---	34.87	53.90	19.03	5000.0	1000.000	291.0	V	167.0	12.4
17045.811111	48.14	---	73.90	25.76	5000.0	1000.000	291.0	V	167.0	12.4

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-18-26.5GHz-TW860-BW3.6-2404MHz
 Full Spectrum

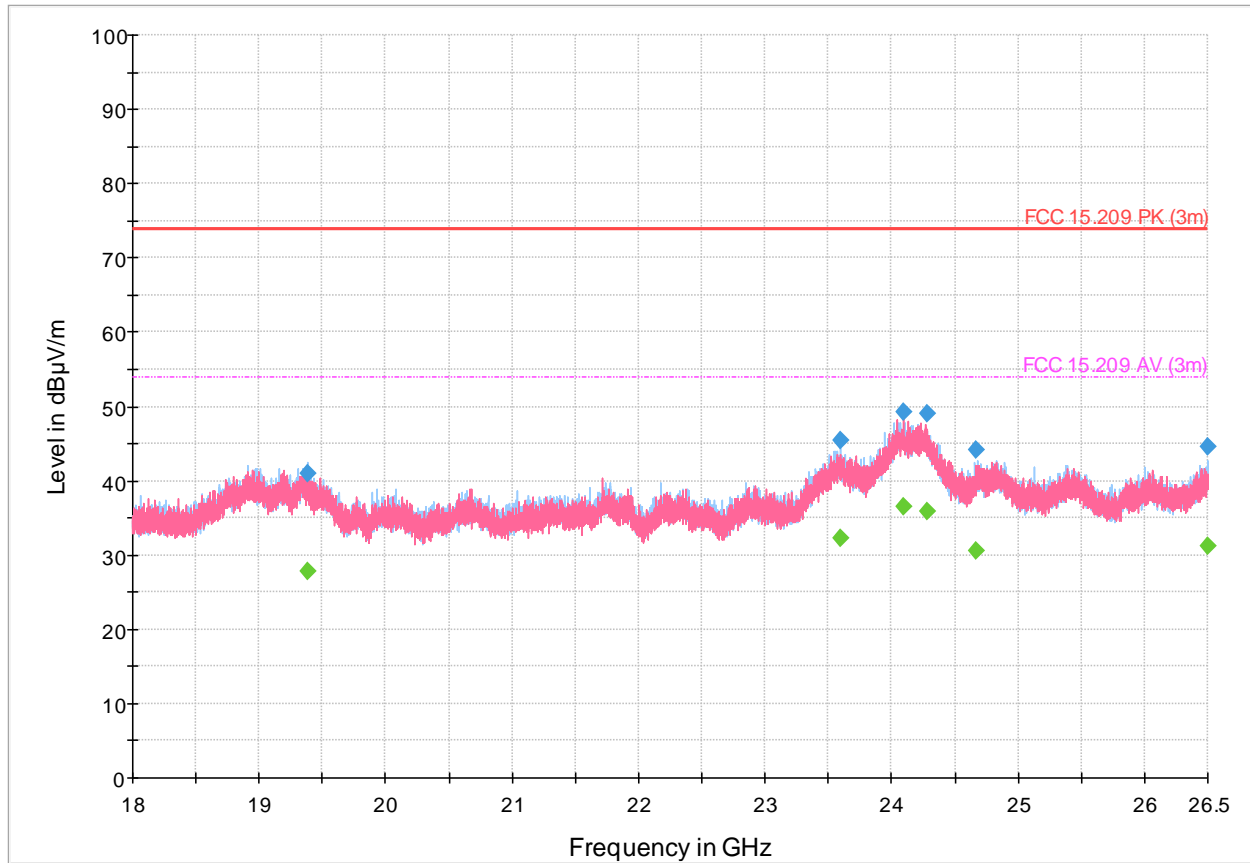


Figure 8.4-45: Radiated emissions spectral plot (18 GHz - 26.5 GHz)

Table 8.4-17: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19379.450000	---	27.86	53.90	26.04	5000.0	1000.000	339.0	H	275.0	16.6
19379.450000	40.91	---	73.90	32.99	5000.0	1000.000	339.0	H	275.0	16.6
23600.250000	45.53	---	73.90	28.37	5000.0	1000.000	276.0	H	0.0	23.8
23600.250000	---	32.26	53.90	21.64	5000.0	1000.000	276.0	H	0.0	23.8
24090.443750	49.27	---	73.90	24.63	5000.0	1000.000	384.0	V	223.0	27.4
24090.443750	---	36.48	53.90	17.42	5000.0	1000.000	384.0	V	223.0	27.4
24277.500000	---	35.86	53.90	18.04	5000.0	1000.000	326.0	V	48.0	26.6
24277.500000	49.04	---	73.90	24.86	5000.0	1000.000	326.0	V	48.0	26.6
24670.950000	44.06	---	73.90	29.84	5000.0	1000.000	220.0	H	309.0	22.5
24670.950000	---	30.60	53.90	23.30	5000.0	1000.000	220.0	H	309.0	22.5
26496.212500	44.51	---	73.90	29.39	5000.0	1000.000	100.0	H	122.0	23.4
26496.212500	---	31.28	53.90	22.62	5000.0	1000.000	100.0	H	122.0	23.4

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-18-26.5GHz-TW860-BW3.6-2442MHz
 Full Spectrum

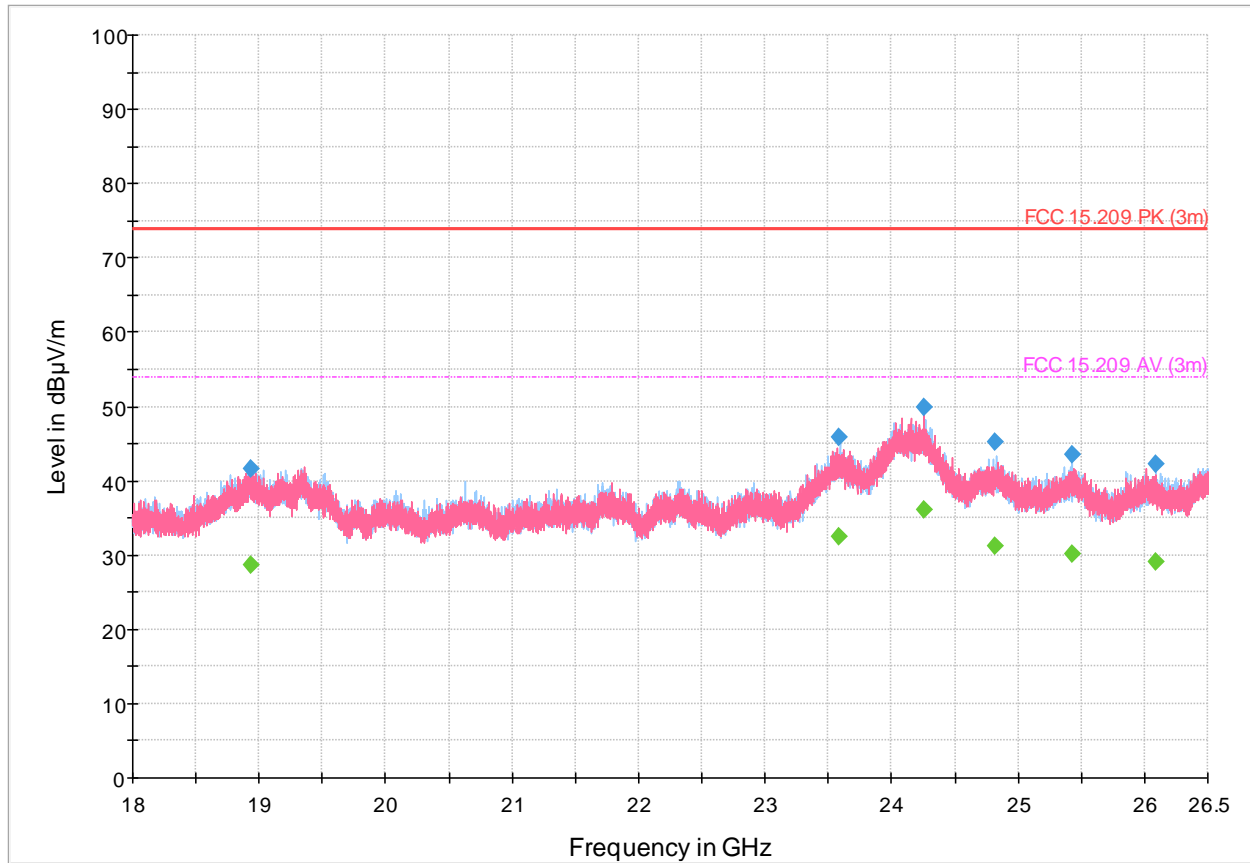


Figure 8.4-46: Radiated emissions spectral plot (18 GHz - 26.5 GHz)

Table 8.4-18: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18933.987500	41.70	---	73.90	32.20	5000.0	1000.000	167.0	V	273.0	15.9
18933.987500	---	28.74	53.90	25.16	5000.0	1000.000	167.0	V	273.0	15.9
23588.812500	45.82	---	73.90	28.08	5000.0	1000.000	168.0	H	177.0	23.9
23588.812500	---	32.44	53.90	21.46	5000.0	1000.000	168.0	H	177.0	23.9
24254.593750	---	36.10	53.90	17.80	5000.0	1000.000	313.0	V	72.0	26.9
24254.593750	49.81	---	73.90	24.09	5000.0	1000.000	313.0	V	72.0	26.9
24822.637500	---	31.21	53.90	22.69	5000.0	1000.000	224.0	H	160.0	22.3
24822.637500	45.29	---	73.90	28.61	5000.0	1000.000	224.0	H	160.0	22.3
25428.918750	---	30.19	53.90	23.71	5000.0	1000.000	327.0	H	112.0	21.7
25428.918750	43.47	---	73.90	30.43	5000.0	1000.000	327.0	H	112.0	21.7
26091.550000	---	28.99	53.90	24.91	5000.0	1000.000	175.0	H	314.0	21.9
26091.550000	42.22	---	73.90	31.68	5000.0	1000.000	175.0	H	314.0	21.9

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

TSM-RE-18-26.5GHz-TW860-BW3.6-2478MHz
 Full Spectrum

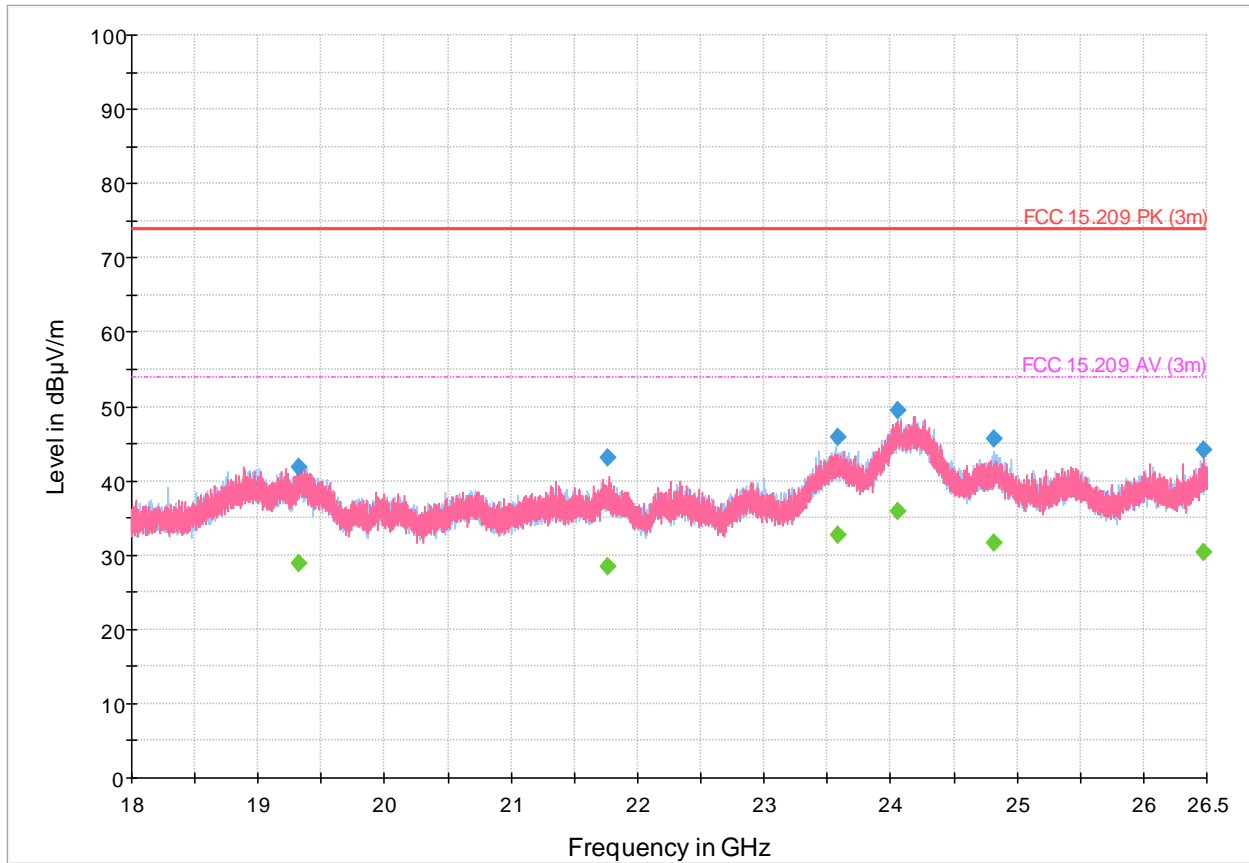


Figure 8.4-47: Radiated emissions spectral plot (18 GHz - 26.5 GHz)

Table 8.4-19: Radiated emissions results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19316.231250	41.81	---	73.90	32.09	5000.0	1000.000	100.0	H	138.0	16.7
19316.231250	---	28.89	53.90	25.01	5000.0	1000.000	100.0	H	138.0	16.7
21769.406250	---	28.55	53.90	25.35	5000.0	1000.000	366.0	V	344.0	17.6
21769.406250	43.02	---	73.90	30.88	5000.0	1000.000	366.0	V	344.0	17.6
23580.206250	45.95	---	73.90	27.95	5000.0	1000.000	303.0	H	250.0	23.9
23580.206250	---	32.79	53.90	21.11	5000.0	1000.000	303.0	H	250.0	23.9
24055.381250	49.40	---	73.90	24.50	5000.0	1000.000	190.0	H	282.0	27.6
24055.381250	---	35.93	53.90	17.97	5000.0	1000.000	190.0	H	282.0	27.6
24822.937500	---	31.69	53.90	22.21	5000.0	1000.000	304.0	H	47.0	22.3
24822.937500	45.72	---	73.90	28.18	5000.0	1000.000	304.0	H	47.0	22.3
26471.375000	44.17	---	73.90	29.73	5000.0	1000.000	335.0	V	280.0	23.3
26471.375000	---	30.44	53.90	23.46	5000.0	1000.000	335.0	V	280.0	23.3

Notes: ¹ Field strength (dB V/m) = receiver/spectrum analyzer value (dB V) + correction factor (dB)
² Correction factors = antenna factor ACF (dB) + cable loss (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.

8.5 Power spectral density

8.5.1 References and limits

- FCC 47 CFR Part 15, Subpart B: §15.247(e)
- RSS-247: §5.2(b)
- Test method: ANSI C63.10 §11.10.7 (Method AVGPSD-3)

§15.247:

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247:

5.4 DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:

(b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e., the power spectral density shall be determined using the same method as is used to determine the conducted output power).

8.5.2 Test summary

Verdict	Pass		
Test date	February 8, 2023	Temperature	19.74 °C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002.4 mbar
Test location	<input checked="" type="checkbox"/> Wireless bench <input type="checkbox"/> Other:	Relative humidity	39.98 %

8.5.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power. Low, middle and high channels were tested. Use method AVGSA-3 for testing.

8.5.4 Setup details

EUT power input during test	Battery supply
EUT setup configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor standing <input type="checkbox"/> Other:

Spectrum analyzer settings:

Resolution bandwidth	See plot
Video bandwidth	See plot
Detector mode	RMS
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.5.5 Test data

Table 8.5-1: TSM-Bandwidth 1.2MHz power spectral density test data

Test frequency (MHz)	Measured power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
2403	5.71	8.0
2442	5.97	8.0
2478	6.07	8.0

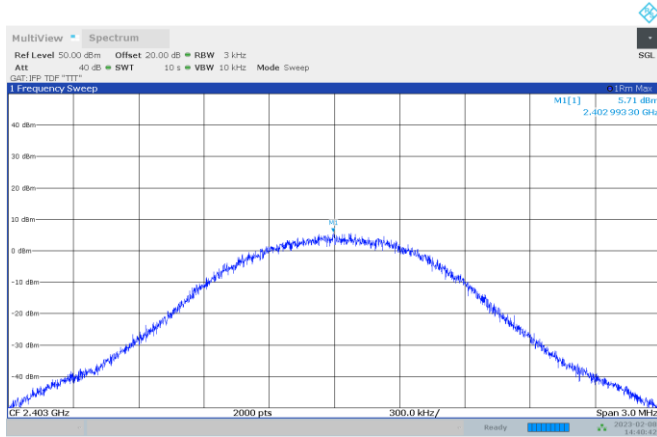


Figure 8.5-1: TSM-Power spectral density, 2403 MHz

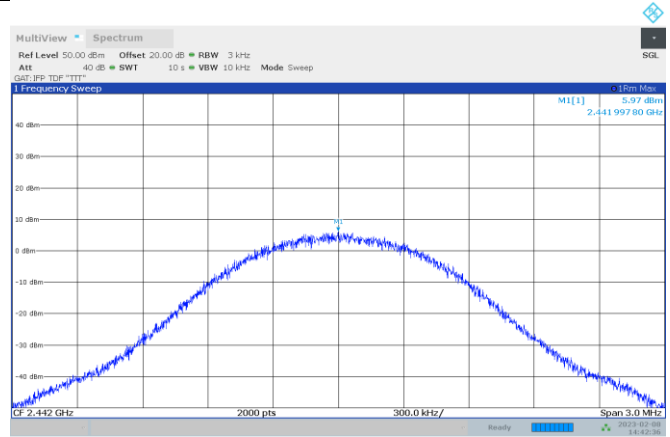


Figure 8.5-2: TSM-Power spectral density, 2442 MHz

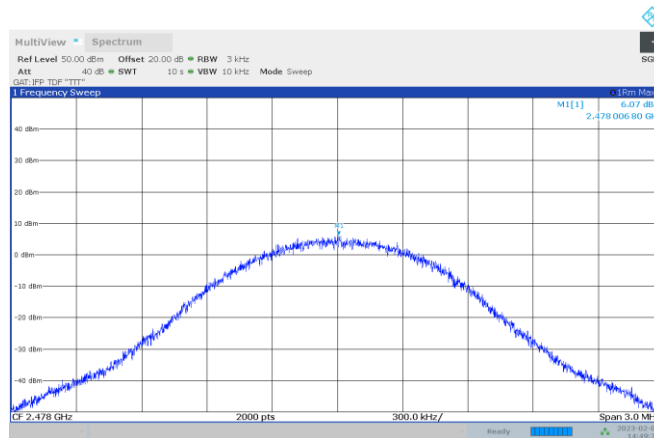


Figure 8.5-3: TSM-Power spectral density, 2478 MHz

Table 8.5-2: TSM-Bandwidth 3.6MHz power spectral density test data

Test frequency (MHz)	Measured power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
2404	2.71	8.0
2442	2.04	8.0
2478	2.50	8.0

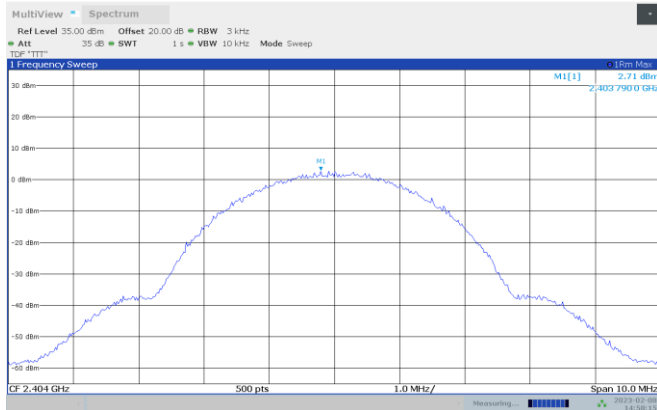


Figure 8.5-4: TSM- Bandwidth 3.6MHz Power spectral density, 2404 MHz

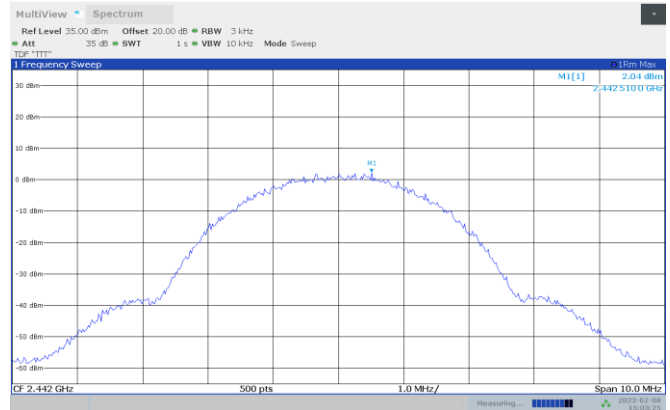


Figure 8.5-5: TSM- Bandwidth 3.6MHz Power spectral density, 2442 MHz

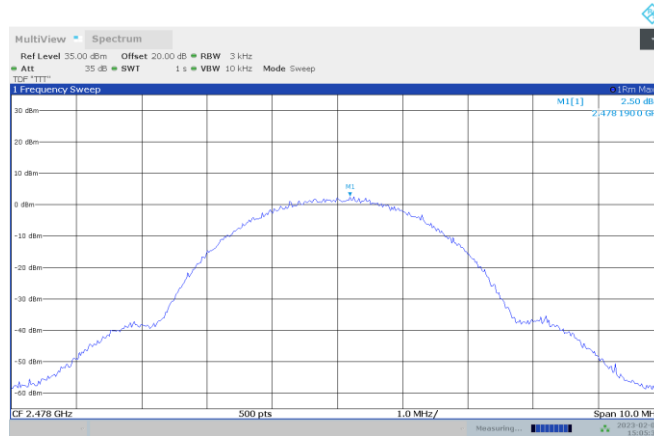


Figure 8.5-6: TSM- Bandwidth 3.6MHz Power spectral density, 2478 MHz

Table 8.5-3: TSM-Bandwidth 10MHz power spectral density test data

Test frequency (MHz)	Measured power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
2412	2.19	8.0
2442	1.78	8.0
2465	1.94	8.0

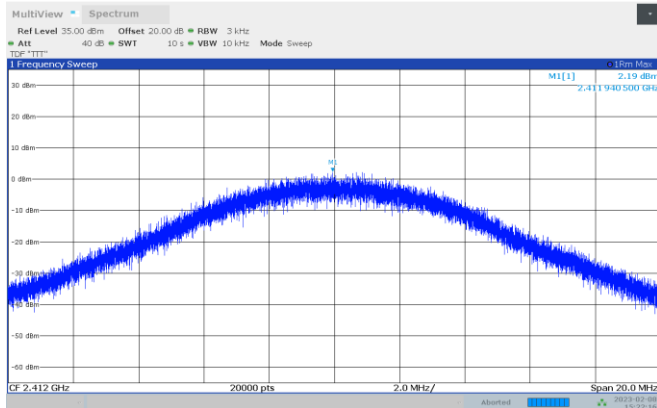


Figure 8.5-7: TSM- Bandwidth 10MHz Power spectral density, 2412 MHz

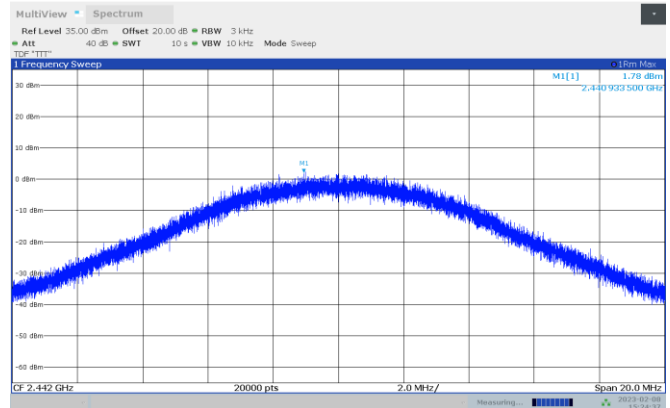


Figure 8.5-8: TSM- Bandwidth 10MHz Power spectral density, 2442 MHz

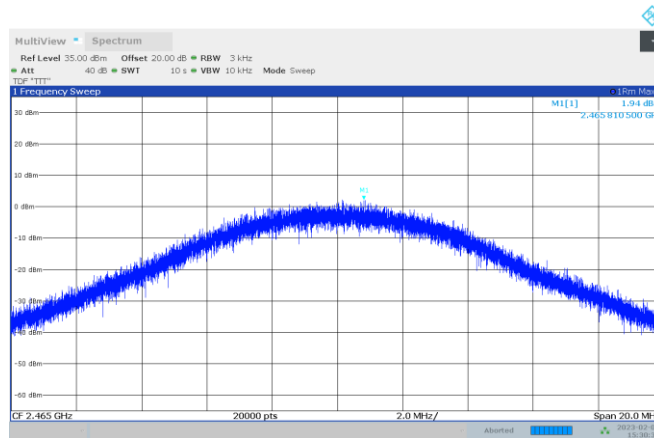


Figure 8.5-9: TSM- Bandwidth 10MHz Power spectral density, 2465 MHz

Table 8.5-4: TSM-Bandwidth 20MHz power spectral density test data

Test frequency (MHz)	Measured power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
2422	1.97	30.0
2442	2.05	30.0

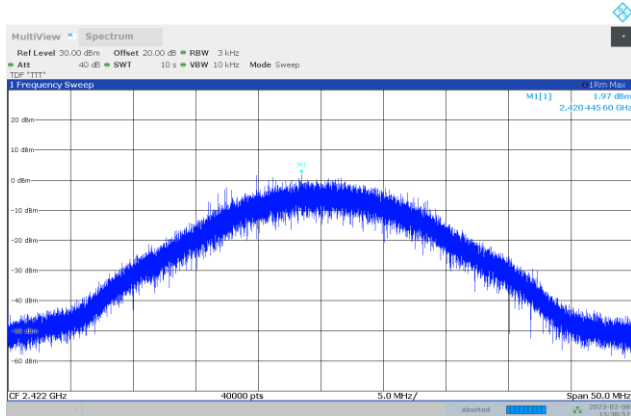


Figure 8.5-10: TSM- Bandwidth 20MHz Power spectral density, 2422 MHz

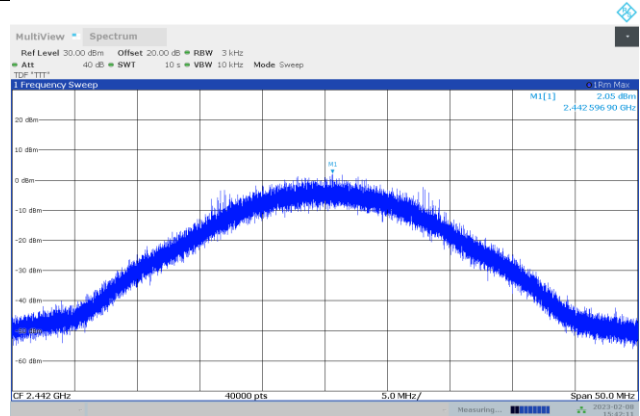


Figure 8.5-11: TSM- Bandwidth 20MHz Power spectral density, 2442 MHz

8.6 99 % occupied bandwidth

8.6.1 References and limits

- RSS-Gen: §6.7
- Test method: ANSI C63.4-2014: §6.9.2

RSS-GEN:

6.7 The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

8.6.2 Test summary

Verdict	Pass		
Test date	February 9, 2023	Temperature	18.22 °C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	996.7 mbar
Test location	<input checked="" type="checkbox"/> Wireless bench <input type="checkbox"/> Other:	Relative humidity	41.26 %

8.6.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power. Low, middle and high channels were tested.

8.6.4 Setup details

EUT power input during test	12 VDC
EUT setup configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor standing <input type="checkbox"/> Other:

Receiver settings:

Resolution bandwidth	See plot
Video bandwidth	See plot
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.6.5 Test data

Table 8.6-1: TSM-bandwidth 1.2MHz 99 % occupied bandwidth test data

Test frequency (MHz)	Bandwidth (MHz)	Measured f_c (MHz)	Measured f_l (MHz)	Measured f_H (MHz)	Limit
2403	1.288	2402.979	2402.326	2403.615	f_H and f_L within 2400 – 2483.5 MHz
2442	1.247	2442.021	2441.362	2442.609	f_H and f_L within 2400 – 2483.5 MHz
2478	1.245	2477.979	2477.362	2478.608	f_H and f_L within 2400 – 2483.5 MHz

Table 8.6-2: TSM-bandwidth 3.6MHz 99 % occupied bandwidth test data

Test frequency (MHz)	Bandwidth (MHz)	Measured f_c (MHz)	Measured f_l (MHz)	Measured f_H (MHz)	Limit
2404	3.557	2404.229	2402.222	2405.779	f_H and f_L within 2400 – 2483.5 MHz
2442	3.567	2441.979	2440.215	2443.783	f_H and f_L within 2400 – 2483.5 MHz
2478	3.561	2477.979	2476.228	2479.790	f_H and f_L within 2400 – 2483.5 MHz

Table 8.6-3: TSM-bandwidth 10MHz 99 % occupied bandwidth test data

Test frequency (MHz)	Bandwidth (MHz)	Measured f_c (MHz)	Measured f_L (MHz)	Measured f_H (MHz)	Limit
2412	11.137	2413.059	2406.459	2417.597	f_H and f_L within 2400 – 2483.5 MHz
2442	11.135	2438.682	2436.468	2447.603	f_H and f_L within 2400 – 2483.5 MHz
2465	11.113	2465.021	2459.474	2470.587	f_H and f_L within 2400 – 2483.5 MHz

Table 8.6-4: TSM-bandwidth 20MHz 99 % occupied bandwidth test data

Test frequency (MHz)	Bandwidth (MHz)	Measured f_c (MHz)	Measured f_L (MHz)	Measured f_H (MHz)	Limit
2422	20.220	2421.979	2411.983	2432.213	f_H and f_L within 2400 – 2483.5 MHz
2442	20.182	2441.979	2432.018	2452.200	f_H and f_L within 2400 – 2483.5 MHz

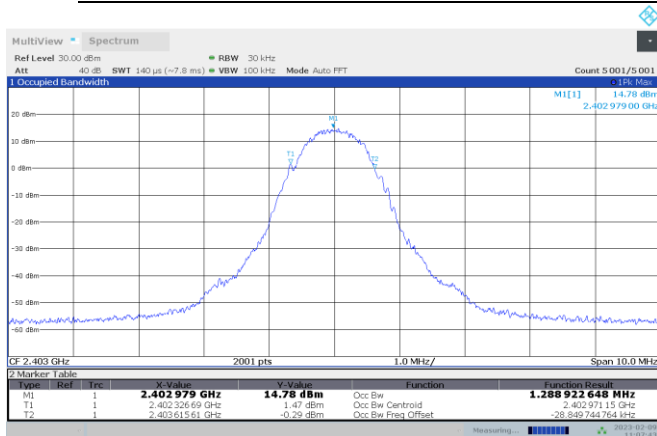


Figure 8.6-1: TSM-Bandwidth 1.2MHz 99 % occupied bandwidth, 2403 MHz

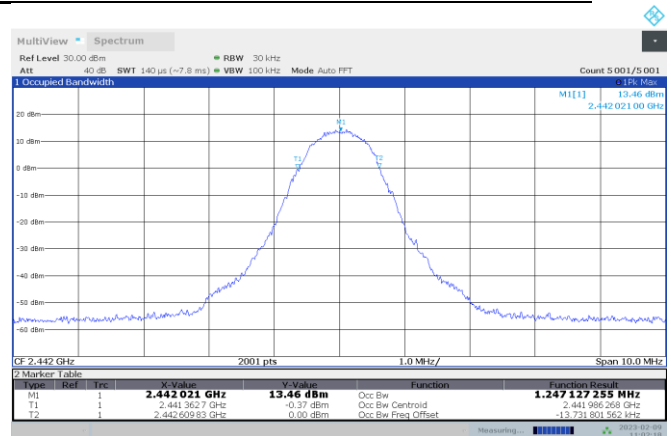


Figure 8.6-2: TSM-Bandwidth 1.2MHz 99 % occupied bandwidth, 2442 MHz

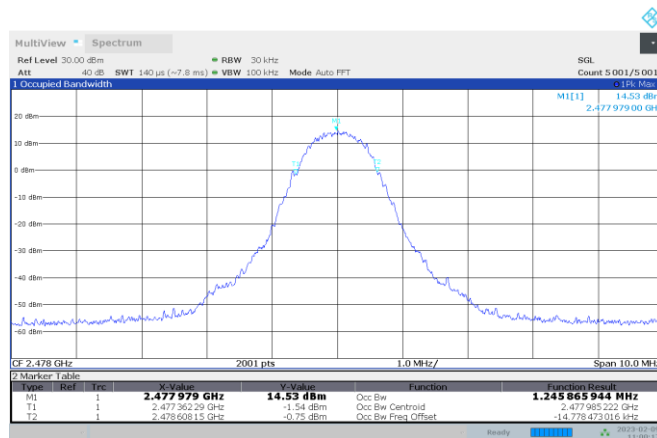


Figure 8.6-3: TSM-Bandwidth 1.2MHz 99 % occupied bandwidth, 2478 MHz

Section 8
Test name
Specification(s)

Testing data
 99 % occupied bandwidth
 FCC Part 15 Subpart B and ICES-003 Issue 7

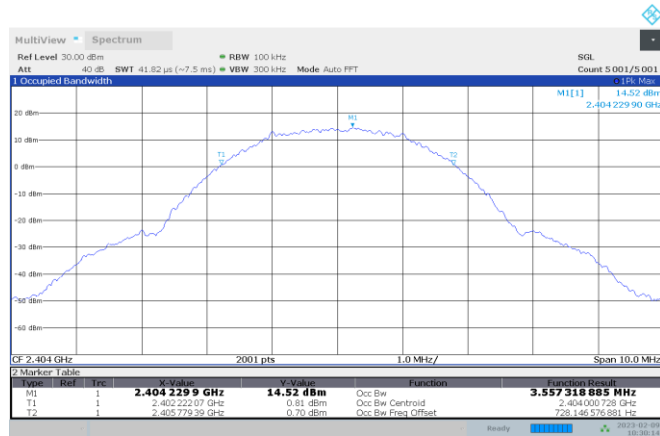


Figure 8.6-4: TSM-Bandwidth 3.6MHz 99 % occupied bandwidth, 2404 MHz

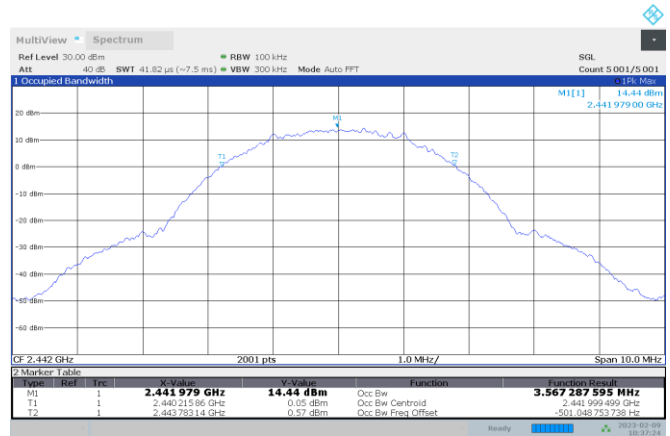


Figure 8.6-5: TSM-Bandwidth 3.6MHz 99 % occupied bandwidth, 2442 MHz

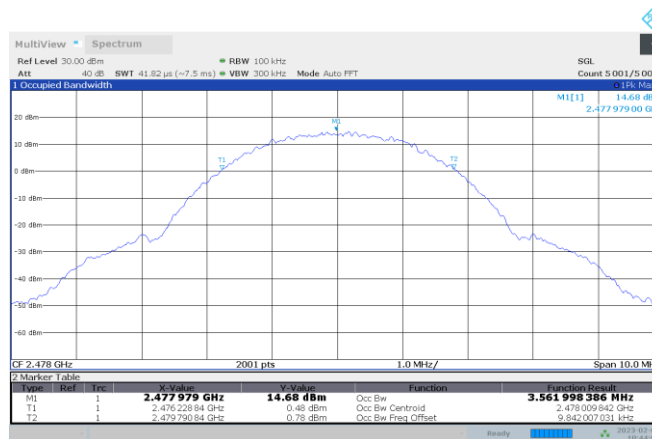


Figure 8.6-6: TSM-Bandwidth 3.6MHz 99 % occupied bandwidth, 2478 MHz

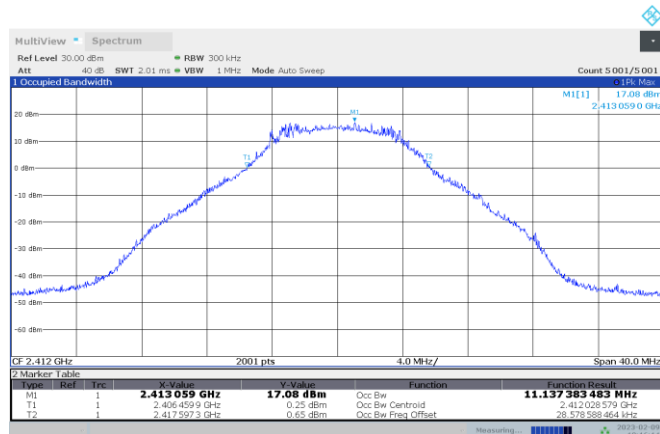


Figure 8.6-7: TSM-Bandwidth 10MHz 99 % occupied bandwidth, 2412 MHz

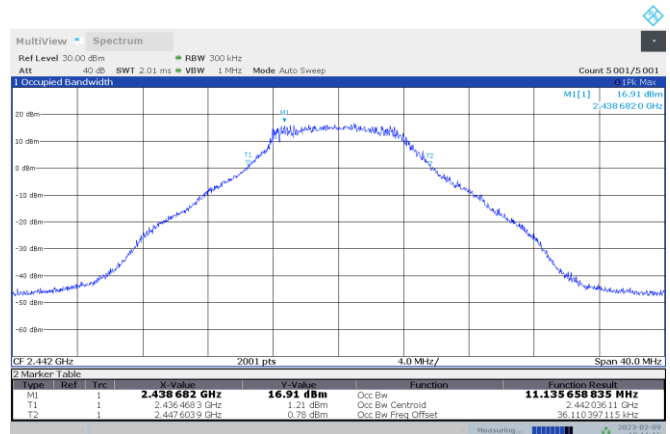


Figure 8.6-8: TSM-Bandwidth 10MHz 99 % occupied bandwidth, 2442 MHz

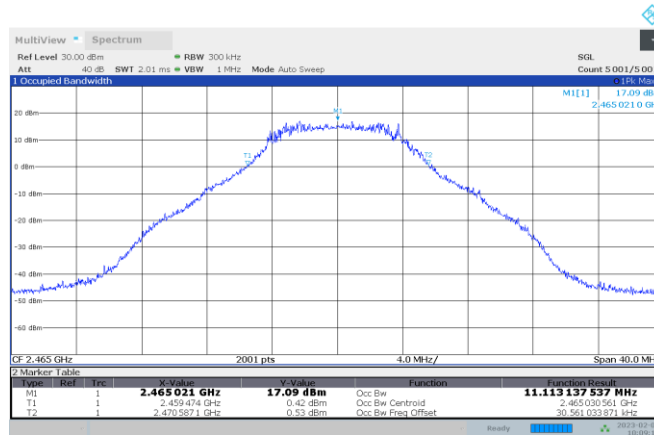


Figure 8.6-9: TSM-Bandwidth 10MHz 99 % occupied bandwidth, 2465 MHz

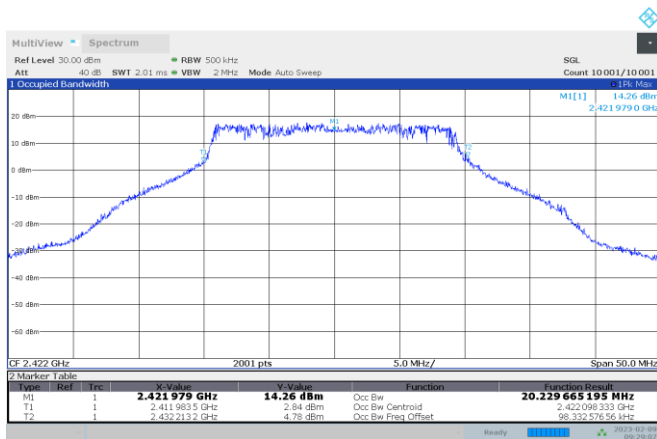


Figure 8.6-10: TSM-Bandwidth 20MHz 99 % occupied bandwidth, 2422 MHz

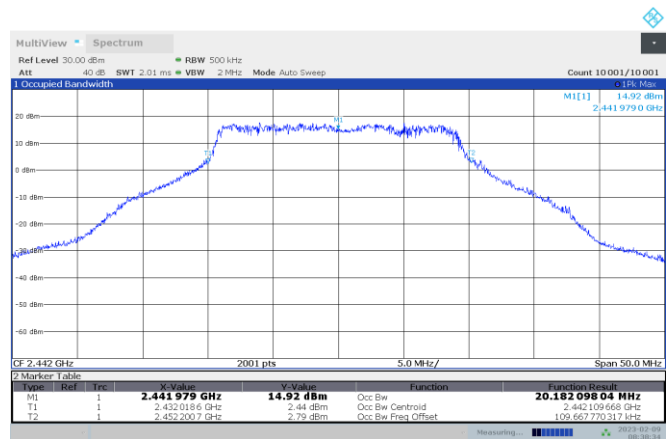


Figure 8.6-11: TSM-Bandwidth 20MHz 99 % occupied bandwidth, 2442 MHz

End of test report