



FCC ID: 2A7AR-CD-08

Product Name:	Magnetic Wireless Power Bank
Product Model No.:	CD-08
Test Auxiliary:	Mobile Phone
Model No.:	CD-08
Transmitting mode	Keep the EUT in continuously wireless charging mode
Power supply:	Type-C Input: DC 5V/3A, 9V/2A, 12V/1.5A Type-C Output: 5V/3A, 9V/2A, 12V/1.5A USB Output: 5V/3A, 9V/2A, 12V/1.5A Wireless Charger Output: 5W, 7.5W, 10W, 15W Max

Test Modes:		
Mode 1	EUT + Mobile Phone (15W)	Record
Note: N/A		



RF Exposure Evaluation

1 Measuring Standard

KDB 680106 RF Exposure Wireless Charging Apps v03r01

2 Requirements

According to the item 5 of KDB 680106 v03r01:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Power transfer frequency is less than 1MHz.

Yes, the device operate in the frequency range from 110KHz to 205KHz.

- (2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 15W.

- (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

No, the transfer system includes only one coils.

- (4) Client device is placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

The EUT is a portable wireless charger.

- (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

Yes, the EUT field strength levels are less 50% x MPE limit.

Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)




Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).



3 Test Setup

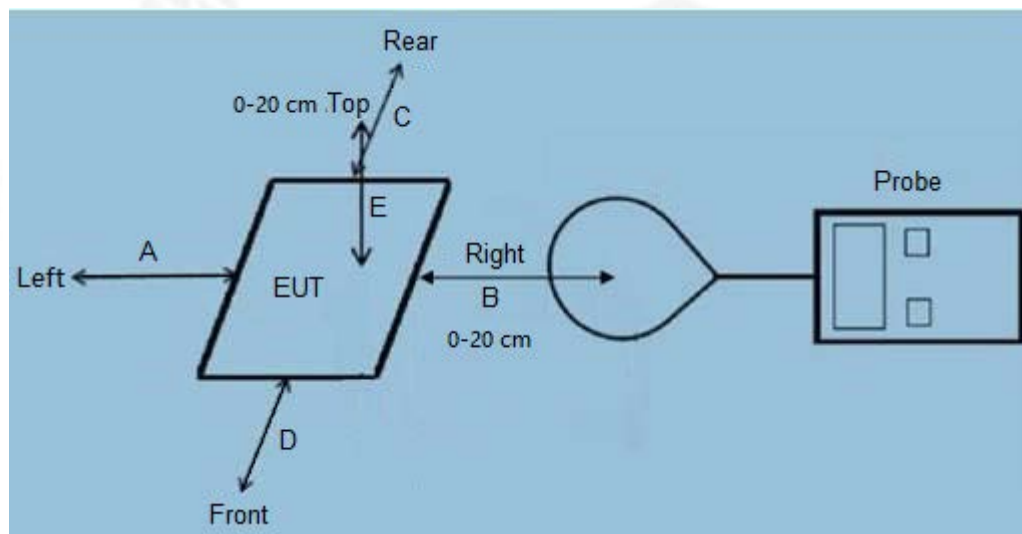

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) H-field data are taken along all three axes, from 0cm to 20cm, in 2cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 v03r01.

Remark: The EUT's test position A, B, C, D and E is valid for the H field measurements.

5 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	June. 25 2022	June. 24 2023
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	June. 25 2022	June. 24 2023
Isotropic Electric field probe	Narda	EP-601	611WX70332	June. 26 2022	June. 24 2023



6 Test Result

Electric Quantity: 1%

Frequency Range (MHz)	Test distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limits (A/m)
0.110-0.205	0	0.21	0.28	0.23	0.25	0.26	1.63
0.110-0.205	2	0.20	0.28	0.22	0.24	0.25	1.63
0.110-0.205	4	0.19	0.27	0.22	0.23	0.24	1.63
0.110-0.205	6	0.19	0.25	0.21	0.23	0.24	1.63
0.110-0.205	8	0.17	0.24	0.20	0.22	0.23	1.63
0.110-0.205	10	0.16	0.24	0.19	0.21	0.22	1.63
0.110-0.205	12	0.16	0.22	0.17	0.20	0.21	1.63
0.110-0.205	14	0.15	0.22	0.16	0.19	0.20	1.63
0.110-0.205	16	0.14	0.22	0.16	0.18	0.19	1.63
0.110-0.205	18	0.13	0.21	0.15	0.17	0.18	1.63
0.110-0.205	20	0.11	0.20	0.14	0.16	0.17	1.63

Electric Quantity: 50%

Frequency Range (MHz)	Test distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limits (A/m)
0.110-0.205	0	0.23	0.27	0.24	0.25	0.27	1.63
0.110-0.205	2	0.22	0.26	0.23	0.24	0.26	1.63
0.110-0.205	4	0.20	0.25	0.22	0.23	0.25	1.63
0.110-0.205	6	0.20	0.25	0.21	0.22	0.24	1.63
0.110-0.205	8	0.18	0.24	0.20	0.21	0.23	1.63
0.110-0.205	10	0.17	0.23	0.19	0.20	0.22	1.63
0.110-0.205	12	0.16	0.22	0.17	0.19	0.21	1.63
0.110-0.205	14	0.15	0.21	0.16	0.18	0.20	1.63
0.110-0.205	16	0.14	0.20	0.16	0.17	0.19	1.63
0.110-0.205	18	0.13	0.18	0.15	0.16	0.18	1.63
0.110-0.205	20	0.11	0.18	0.14	0.16	0.17	1.63



Electric Quantity: 99%

Frequency Range (MHz)	Test distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limits (A/m)
0.110-0.205	0	0.23	0.27	0.25	0.26	0.28	1.63
0.110-0.205	2	0.23	0.26	0.25	0.25	0.27	1.63
0.110-0.205	4	0.22	0.26	0.24	0.25	0.26	1.63
0.110-0.205	6	0.21	0.24	0.23	0.24	0.25	1.63
0.110-0.205	8	0.19	0.24	0.21	0.23	0.24	1.63
0.110-0.205	10	0.18	0.23	0.20	0.22	0.23	1.63
0.110-0.205	12	0.17	0.22	0.19	0.20	0.22	1.63
0.110-0.205	14	0.16	0.21	0.18	0.20	0.22	1.63
0.110-0.205	16	0.15	0.20	0.16	0.19	0.20	1.63
0.110-0.205	18	0.13	0.19	0.14	0.16	0.19	1.63
0.110-0.205	20	0.12	0.17	0.14	0.15	0.17	1.63




7 Test Set-up Photo

A




B

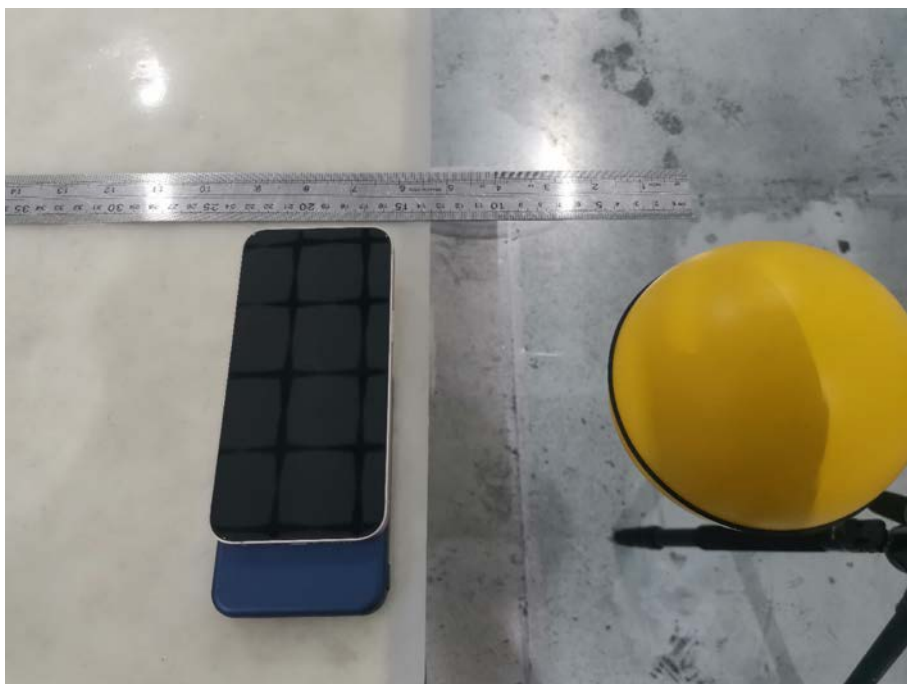




C

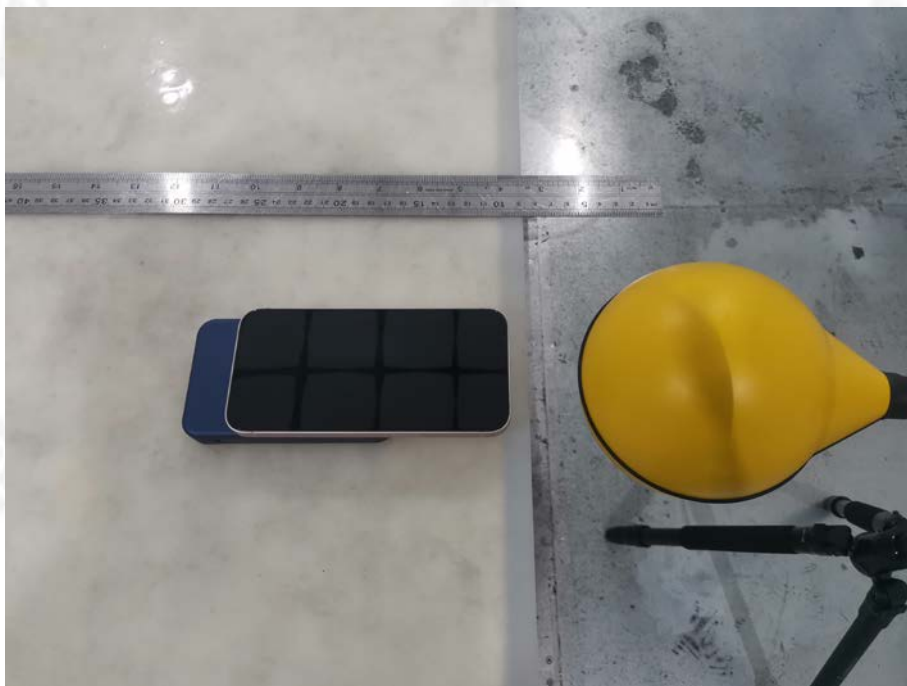

D

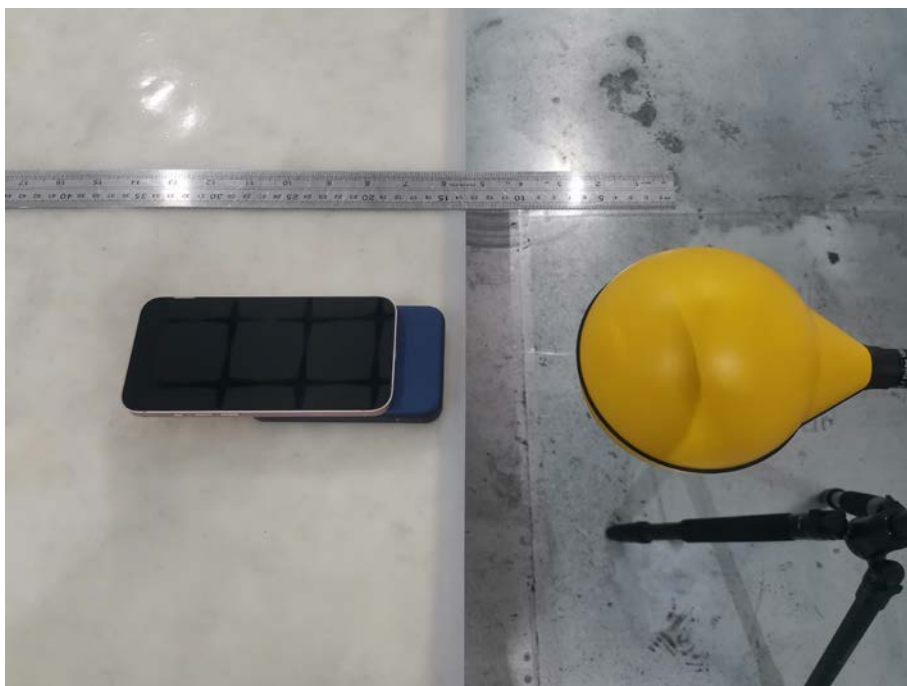



E

