

# RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	Allegro X8
Test Model:	Allegro X8
Sample ID:	202206-0362-06#
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202206-0362-121	

## Contents

1. Duty Cycle.....	3
2. Maximum Conducted Output Power.....	6
3. -6dB Bandwidth.....	9
4. Occupied Channel Bandwidth.....	12
5. Maximum Power Spectral Density Level.....	15
6. Band Edge.....	18
7. Conducted RF Spurious Emission.....	21
8. Restrict Band.....	25




## 1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	86.8	0.61	0.46
NVNT	BLE 1Mbps	2440	Ant1	86.89	0.61	0.46
NVNT	BLE 1Mbps	2480	Ant1	87.2	0.59	0.46

Test Graphs


Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

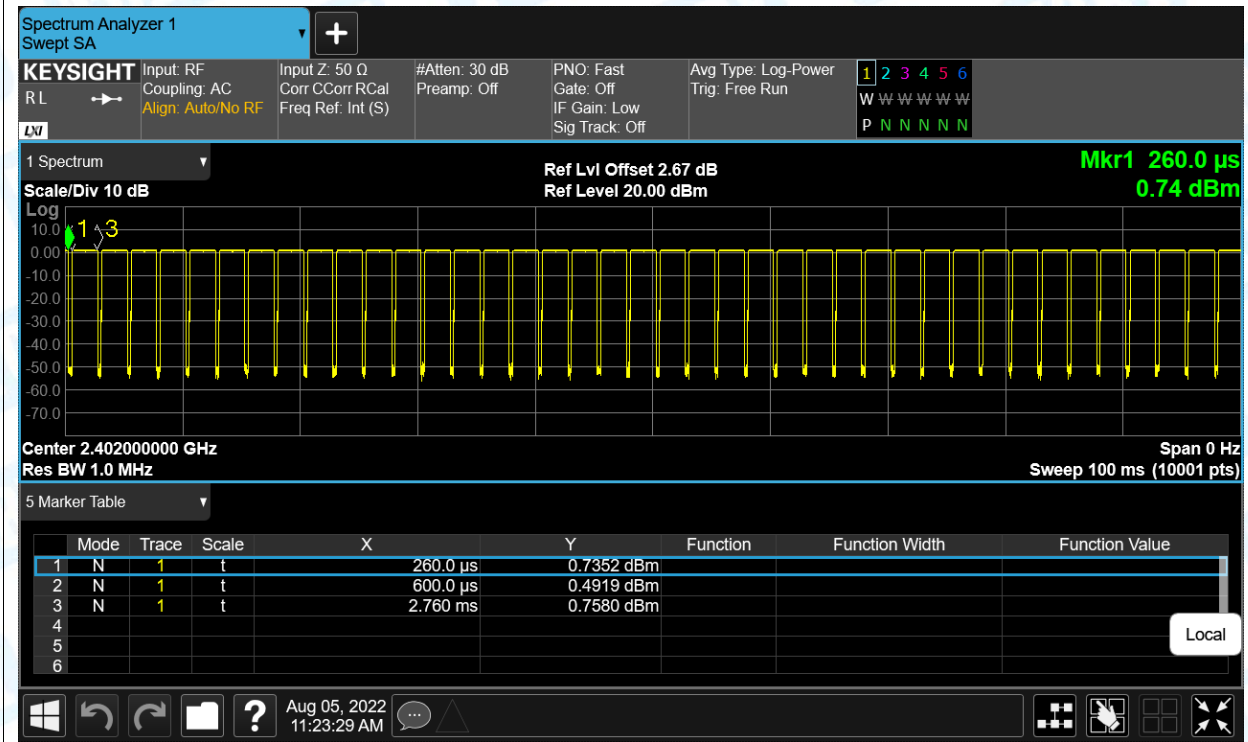

Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

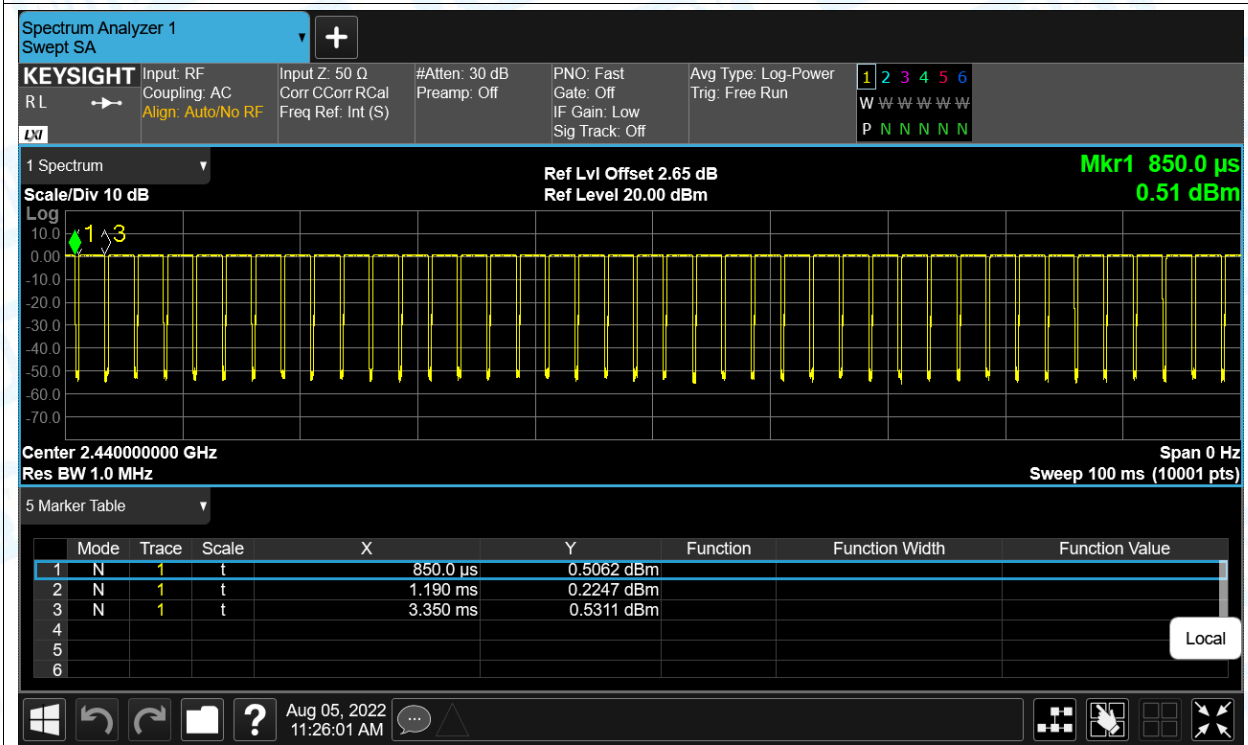



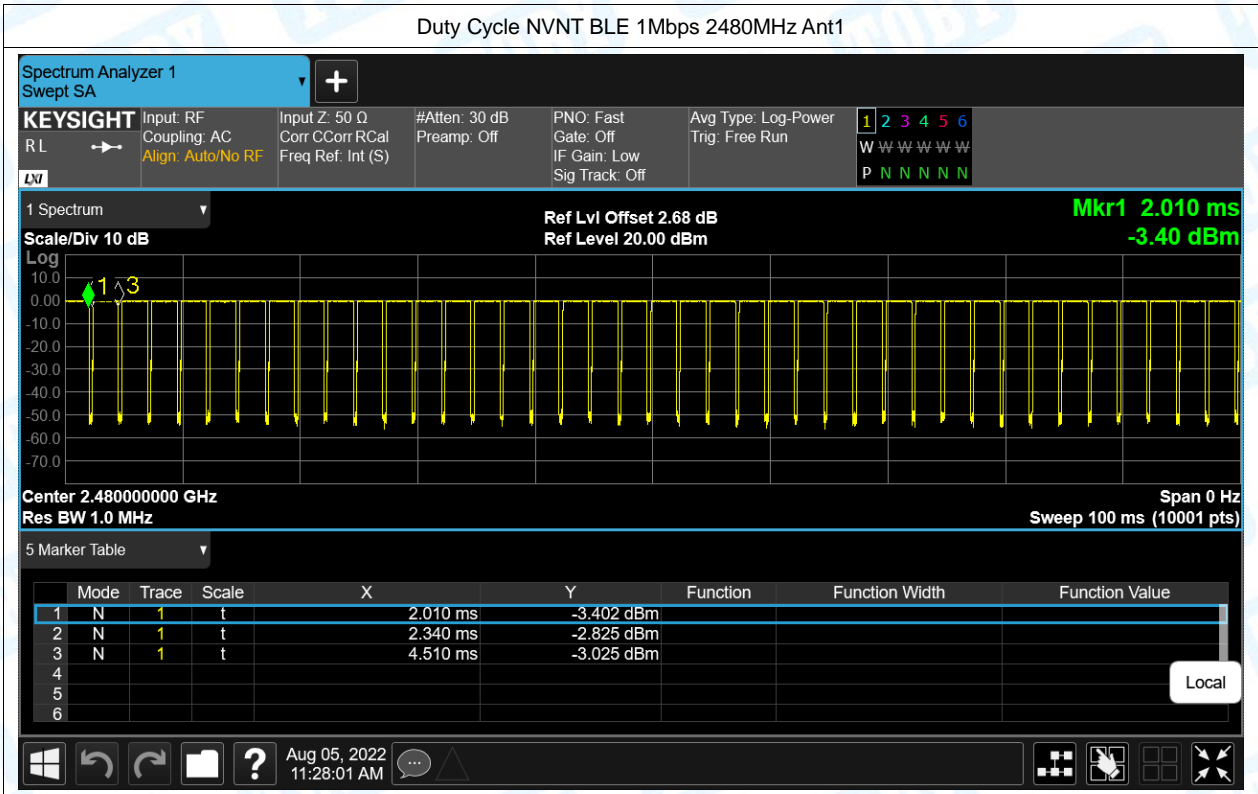


## 2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	1.351	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	1.022	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.172	30	Pass





Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

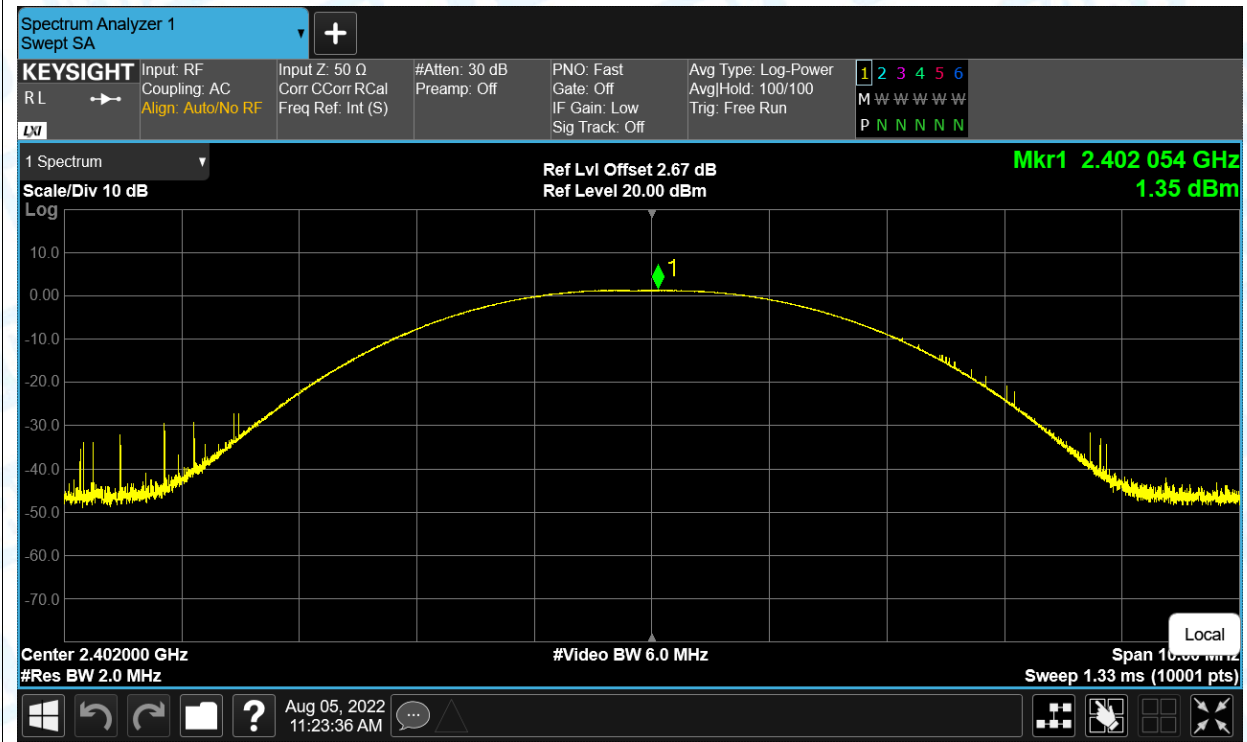

Power NVNT BLE 1Mbps 2440MHz Ant1

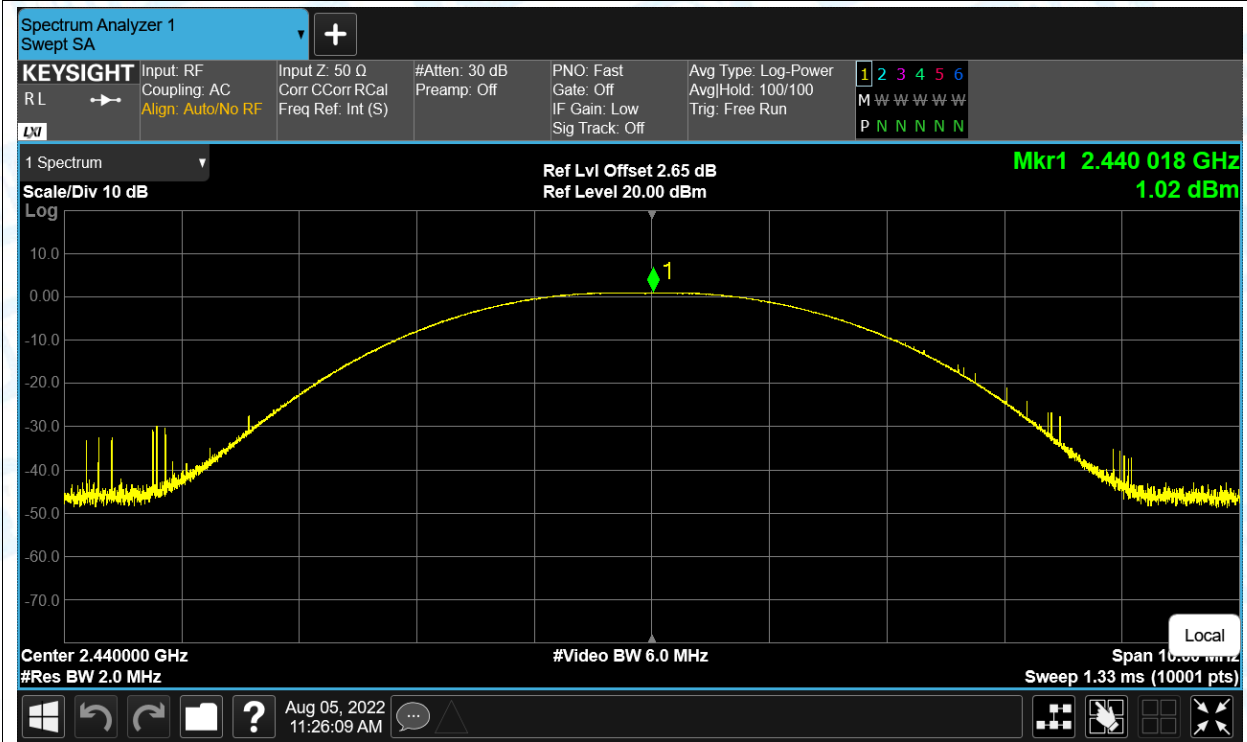

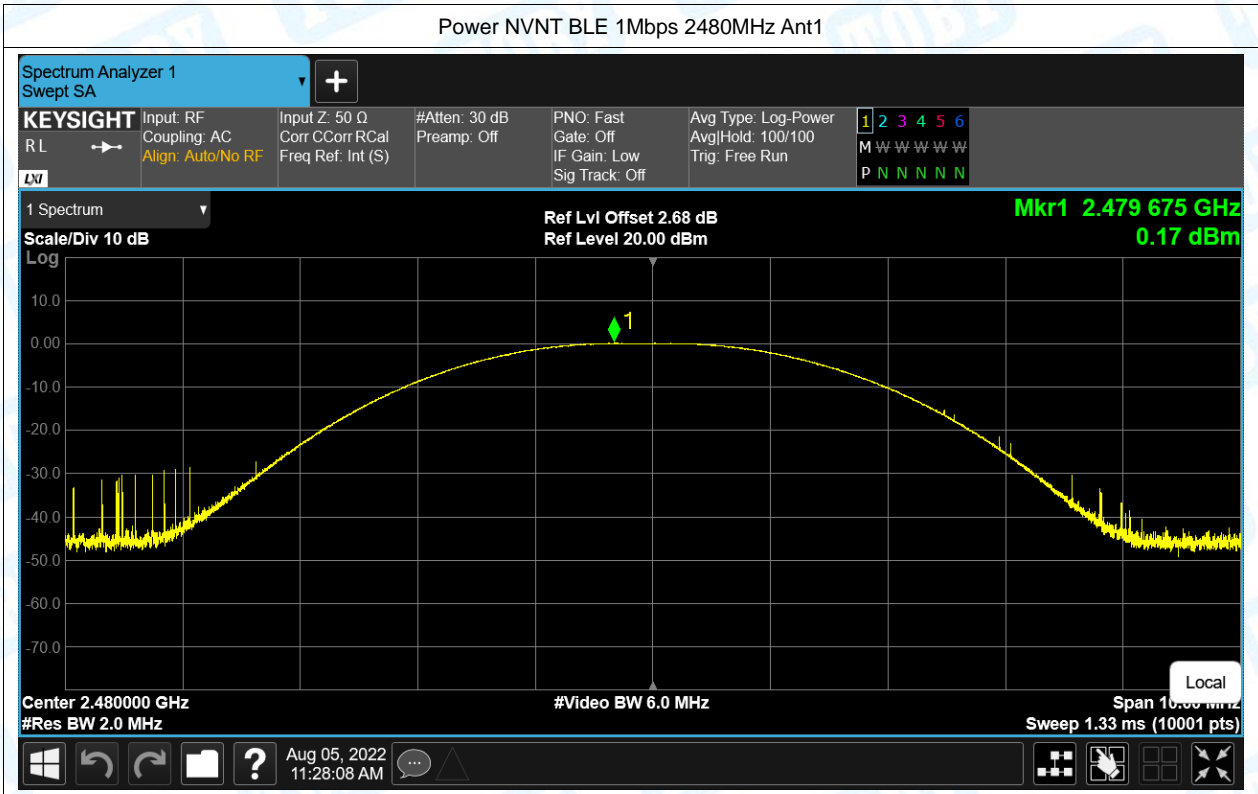




### 3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.65	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.65	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

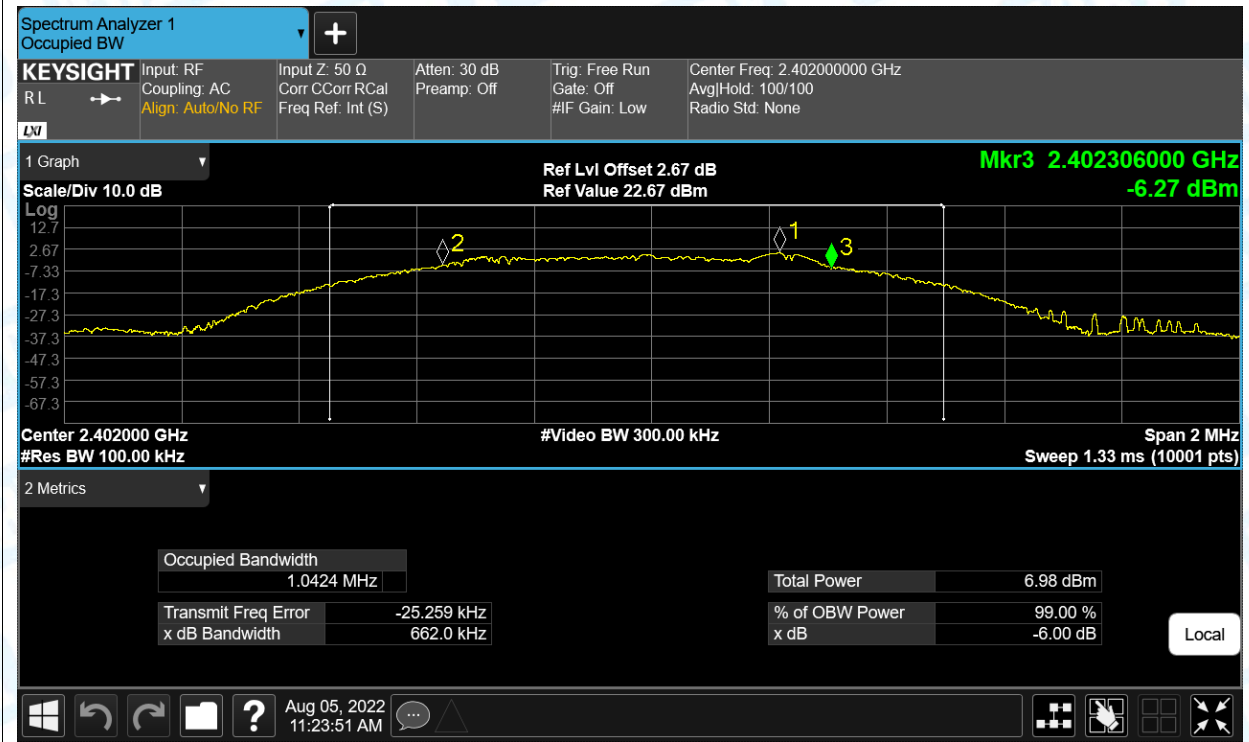

-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

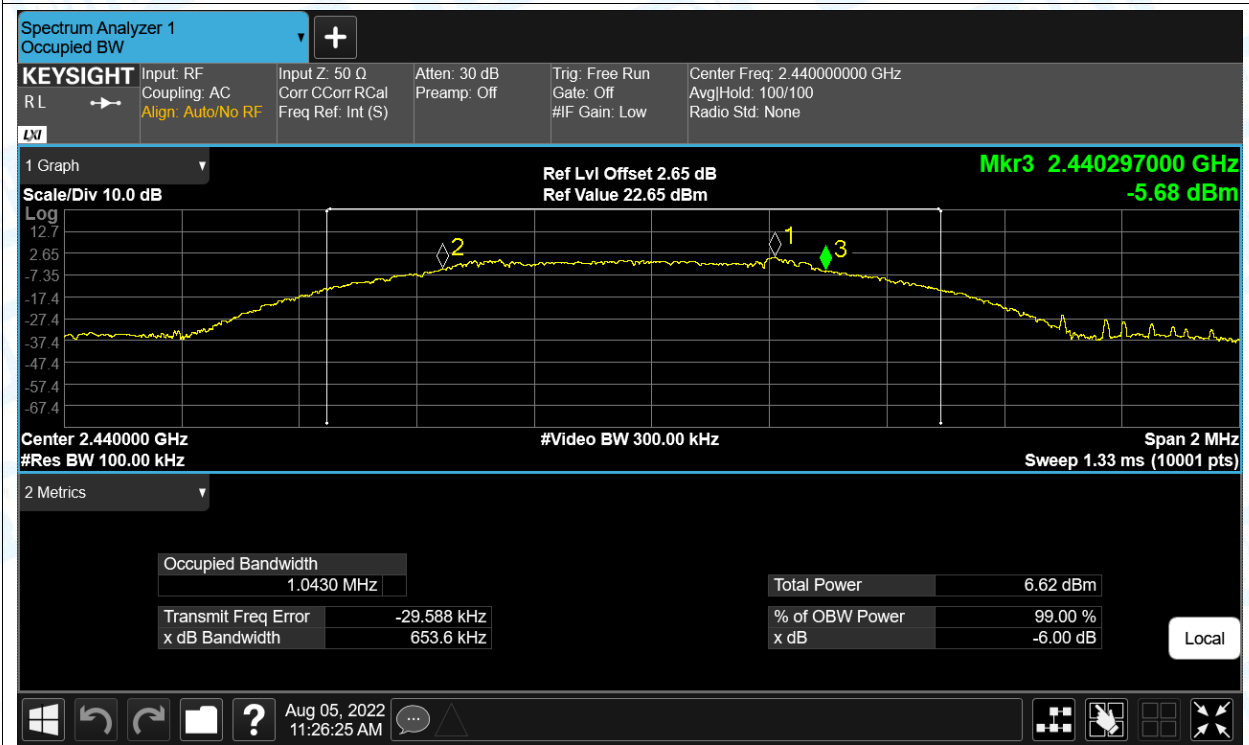



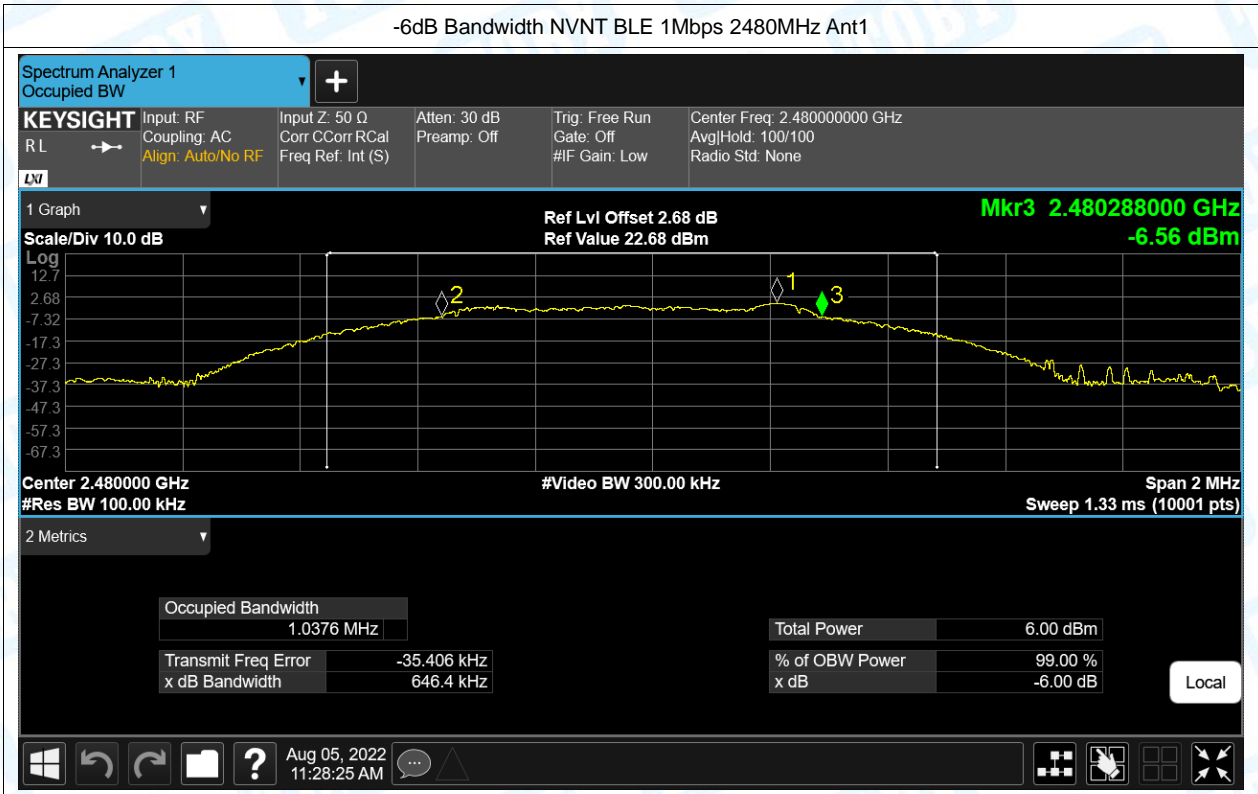

#### 4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.03
NVNT	BLE 1Mbps	2440	Ant1	1.029
NVNT	BLE 1Mbps	2480	Ant1	1.028





Test Graphs

OBW NVNT BLE 1Mbps 2402MHz Ant1



OBW NVNT BLE 1Mbps 2440MHz Ant1

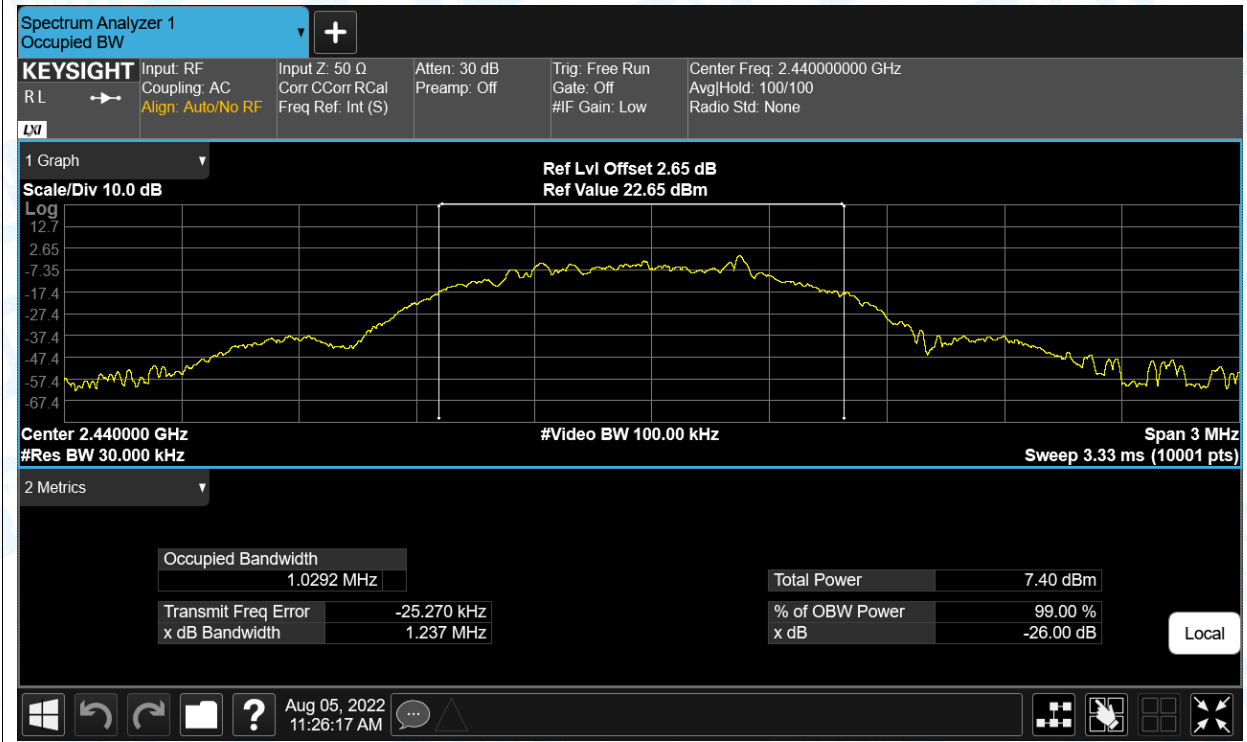

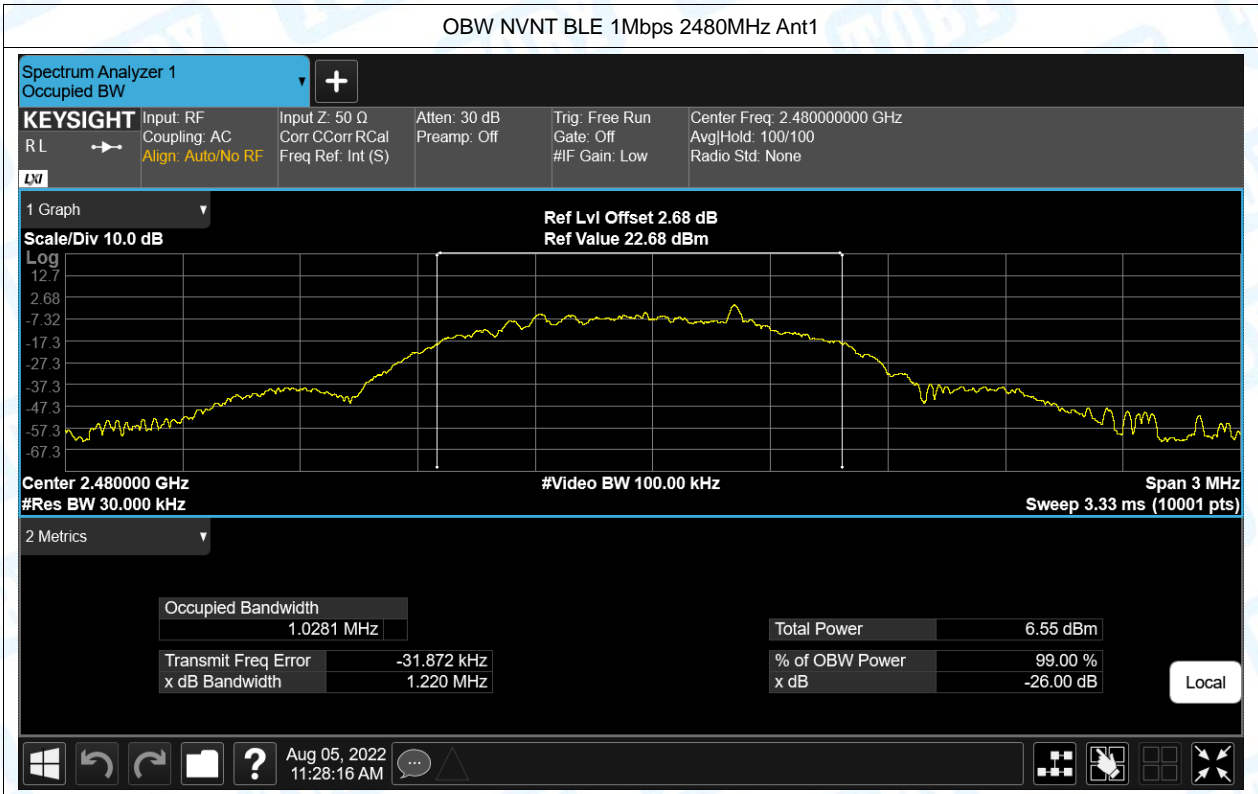




## 5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-14.709	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-15.009	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-15.924	8	Pass

Test Graphs


PSD NVNT BLE 1Mbps 2402MHz Ant1

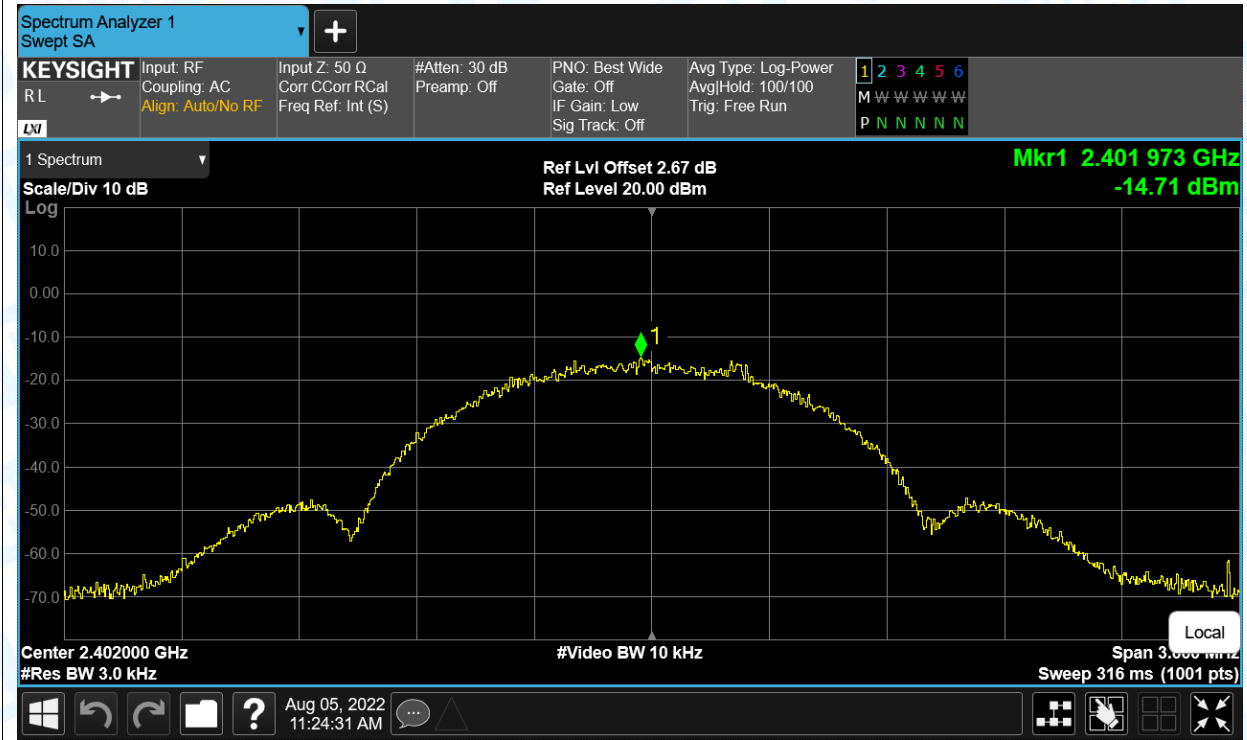

PSD NVNT BLE 1Mbps 2440MHz Ant1

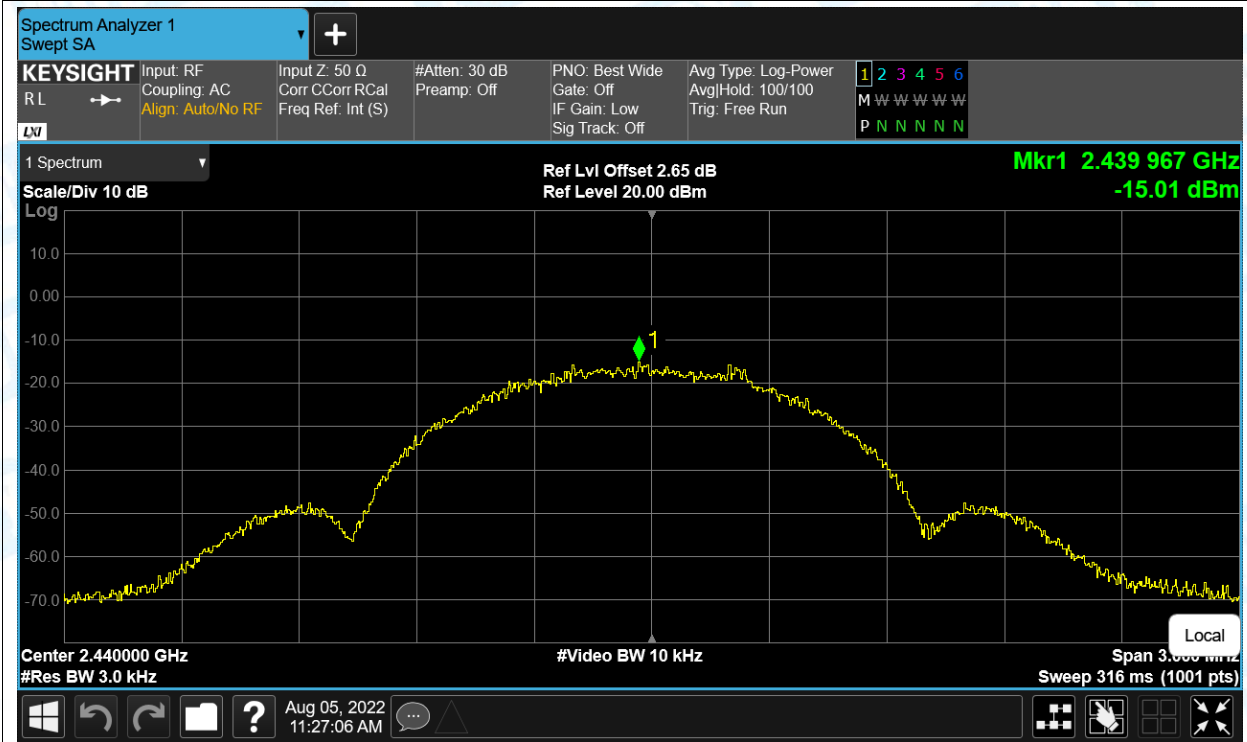



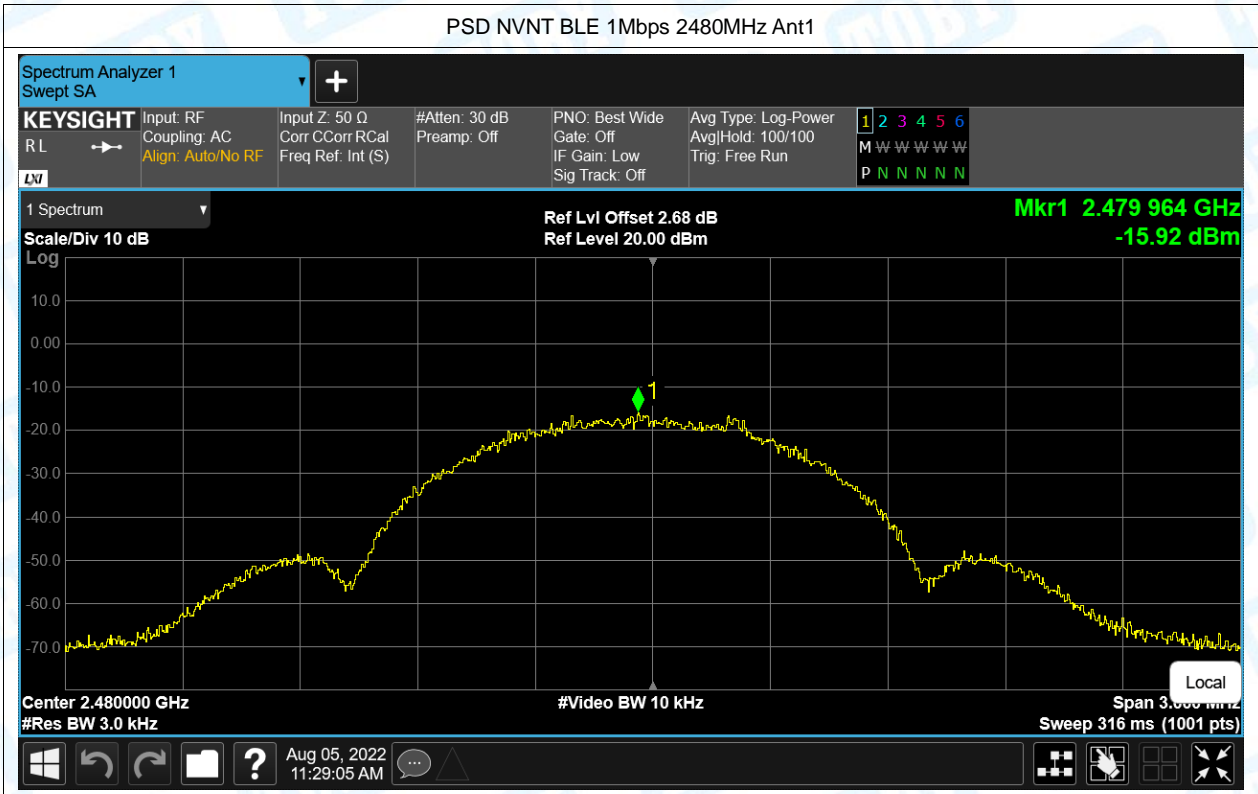


## 6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-54.13	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-52.43	-20	Pass






### Test Graphs

#### Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

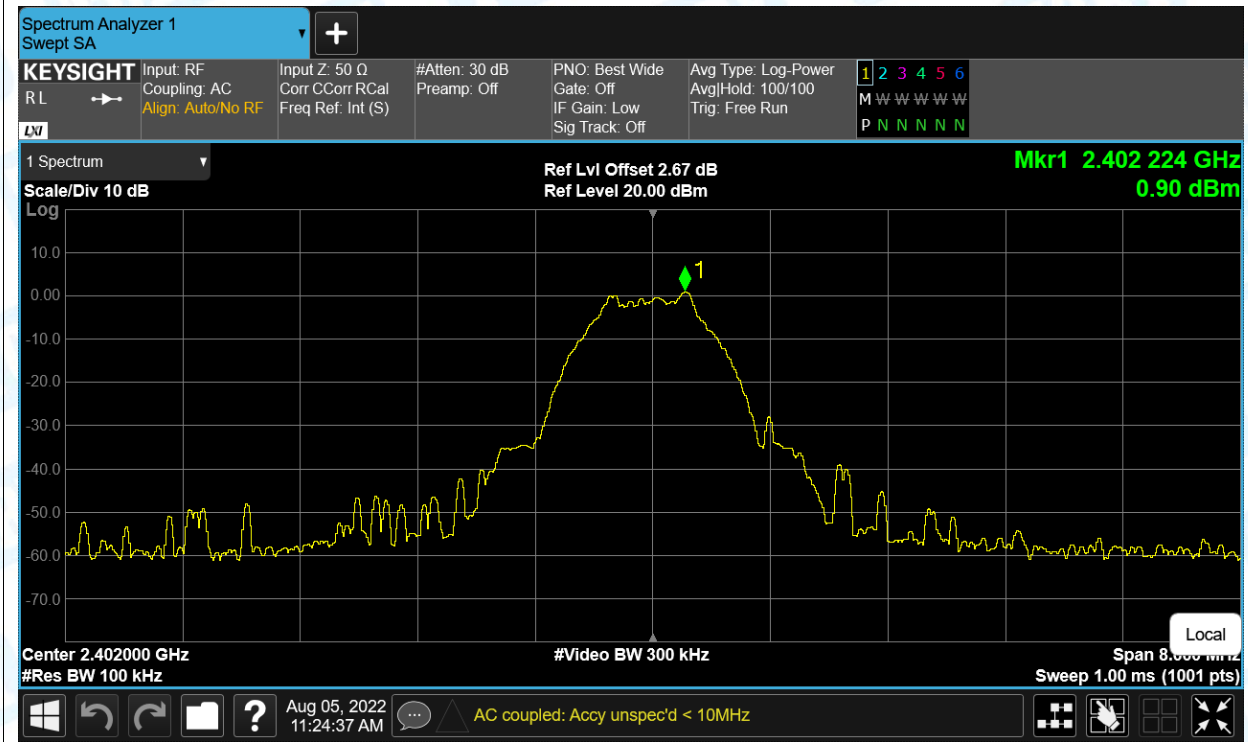

#### Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

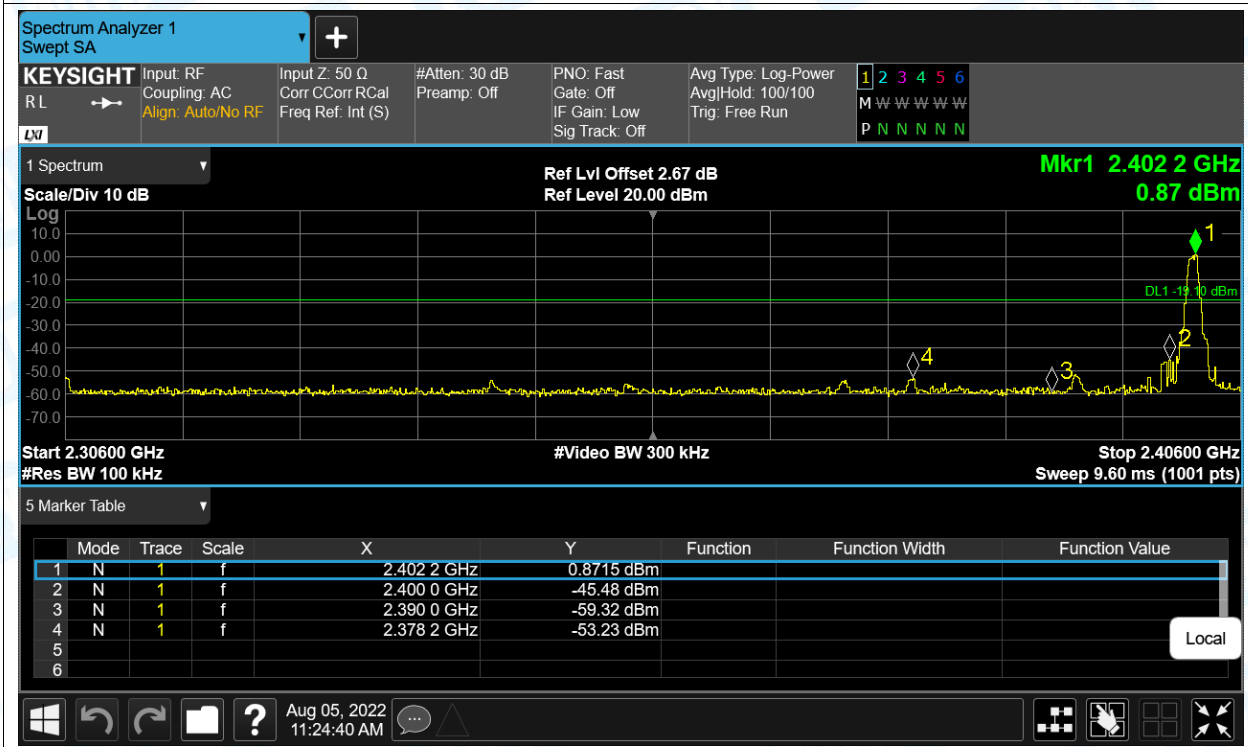

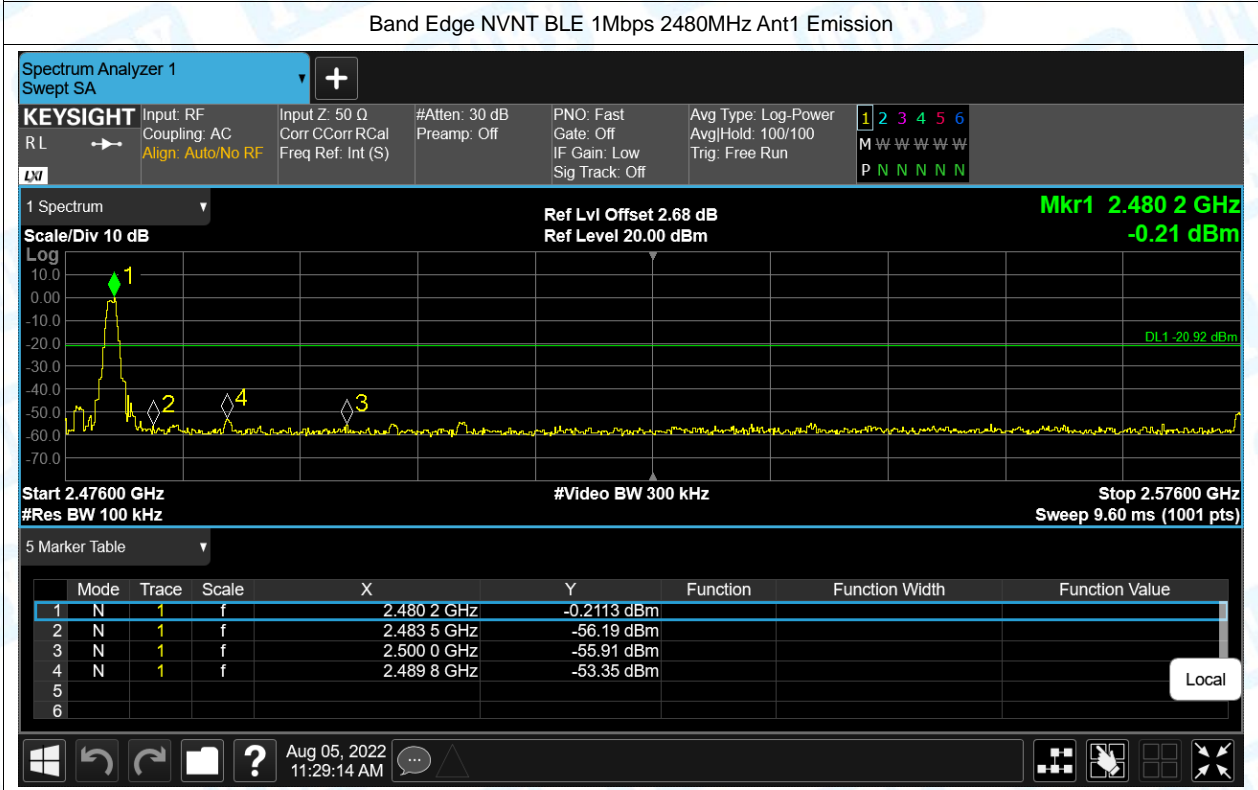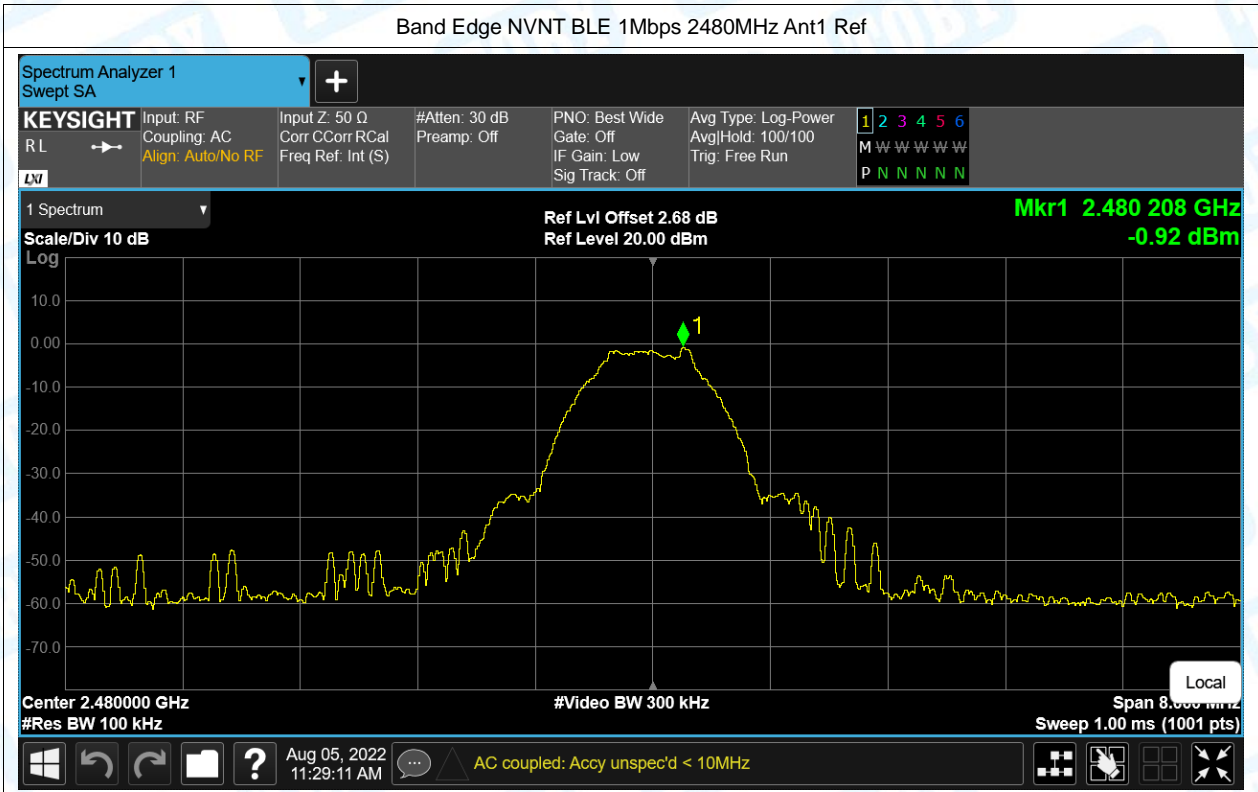




## 7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-39.75	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-39.63	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-40.5	-20	Pass

Test Graphs



Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

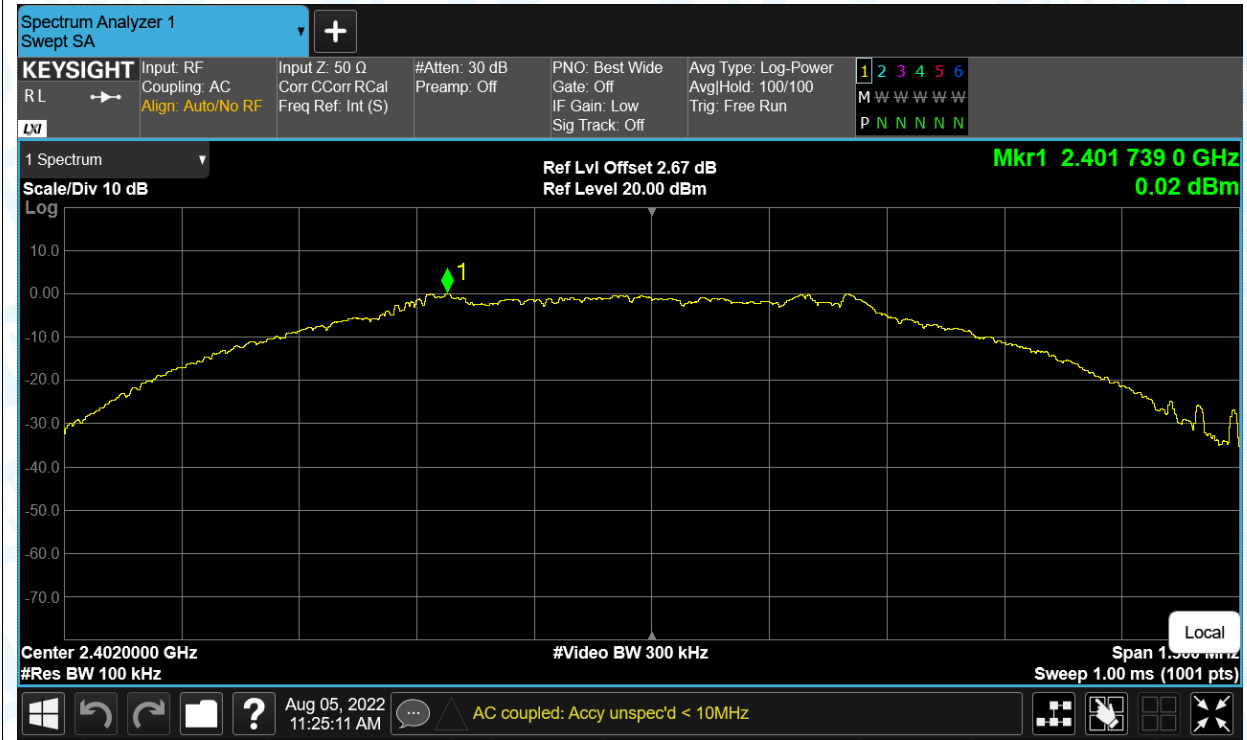


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

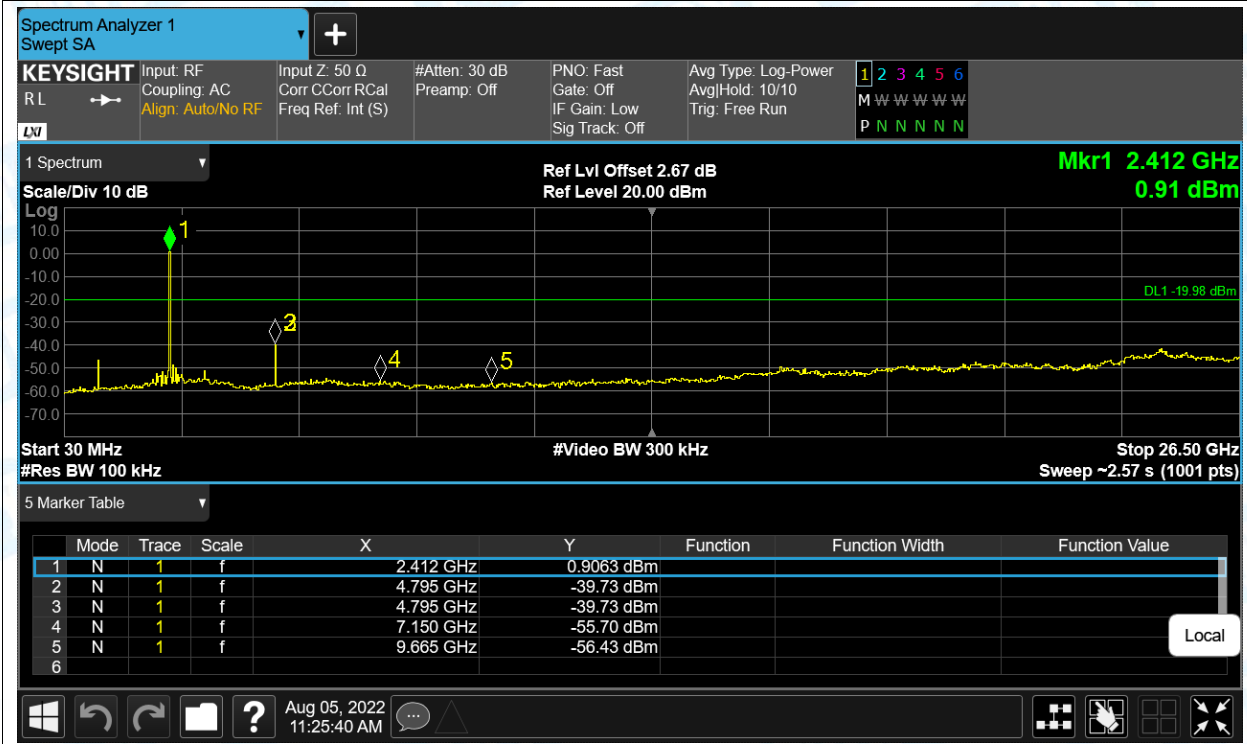




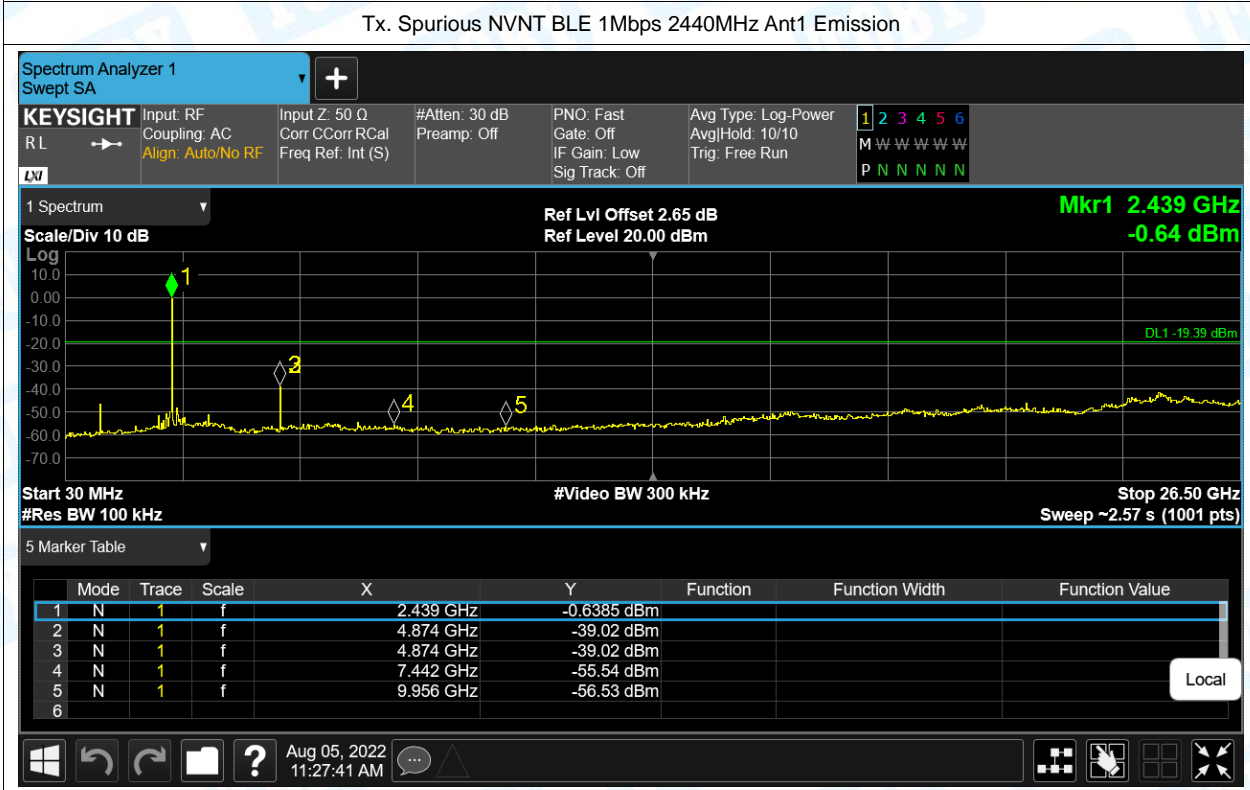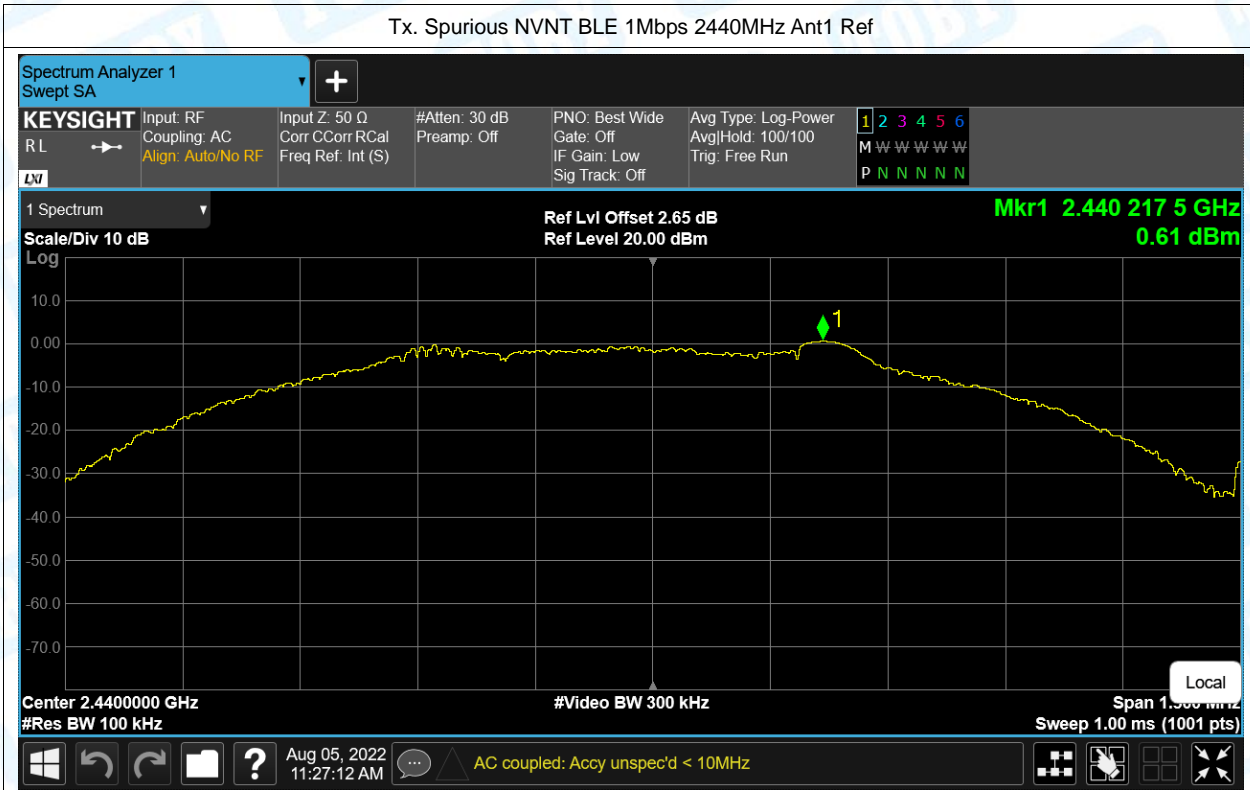

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

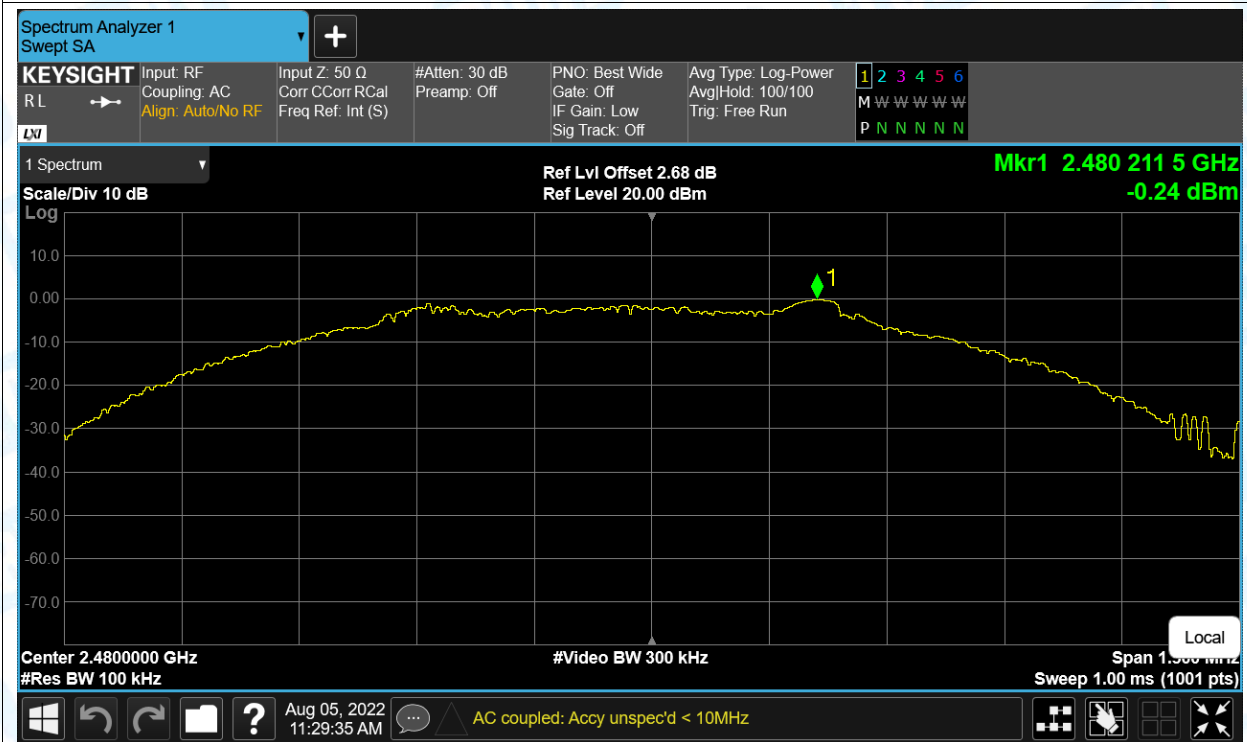

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

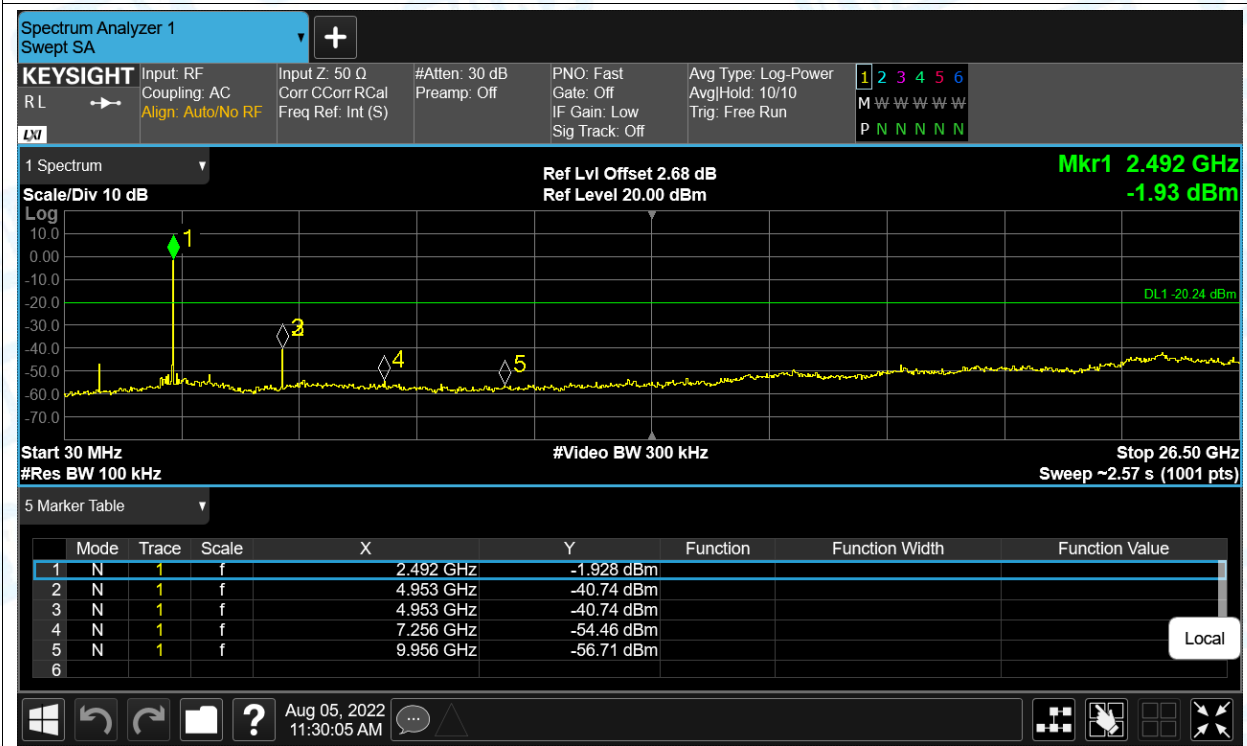




## 8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-46.78	2.3	50.78	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-56.77	2.3	40.79	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2378.256	-43.26	2.3	54.3	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2377.968	-52.13	2.3	45.43	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-46.45	2.3	51.11	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-56.35	2.3	41.21	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-46.3	2.3	51.26	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-55.92	2.3	41.64	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2485.48	-42.52	2.3	55.04	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2489.896	-52.63	2.3	44.93	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-46.1	2.3	51.46	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-56.17	2.3	41.39	Average	54	Pass

### Test Graphs

#### Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

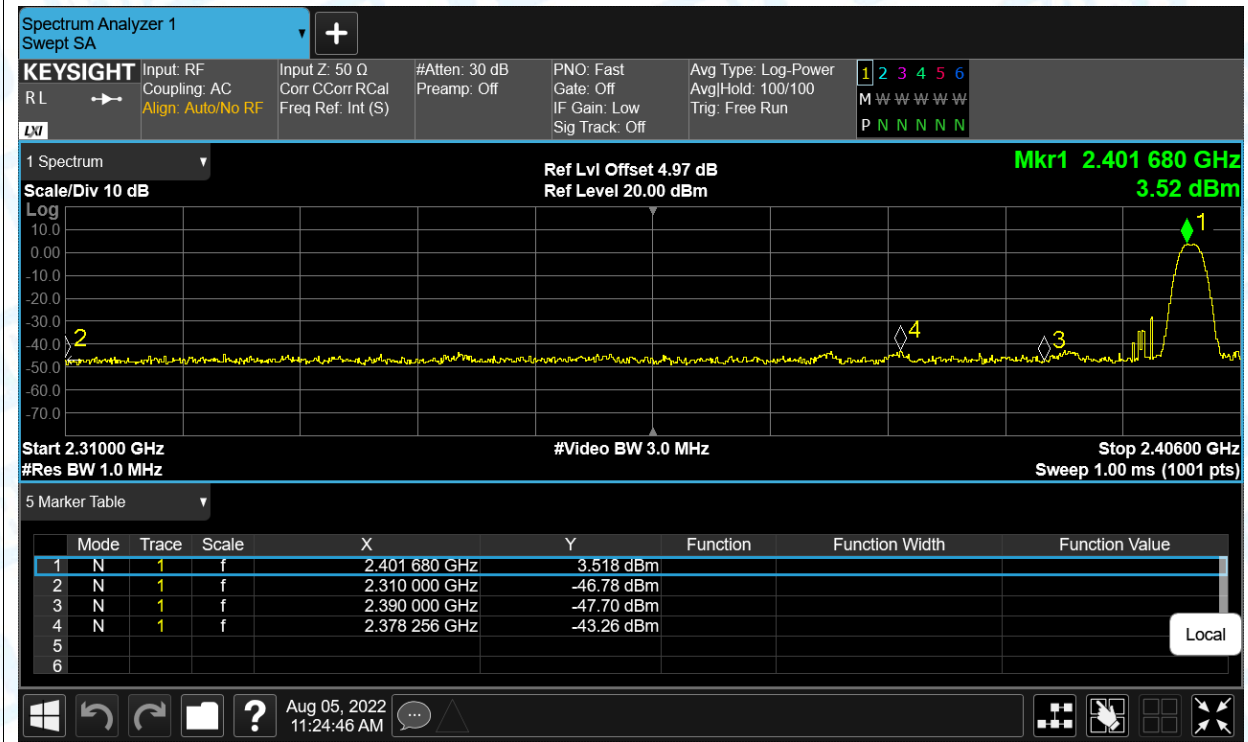


#### Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

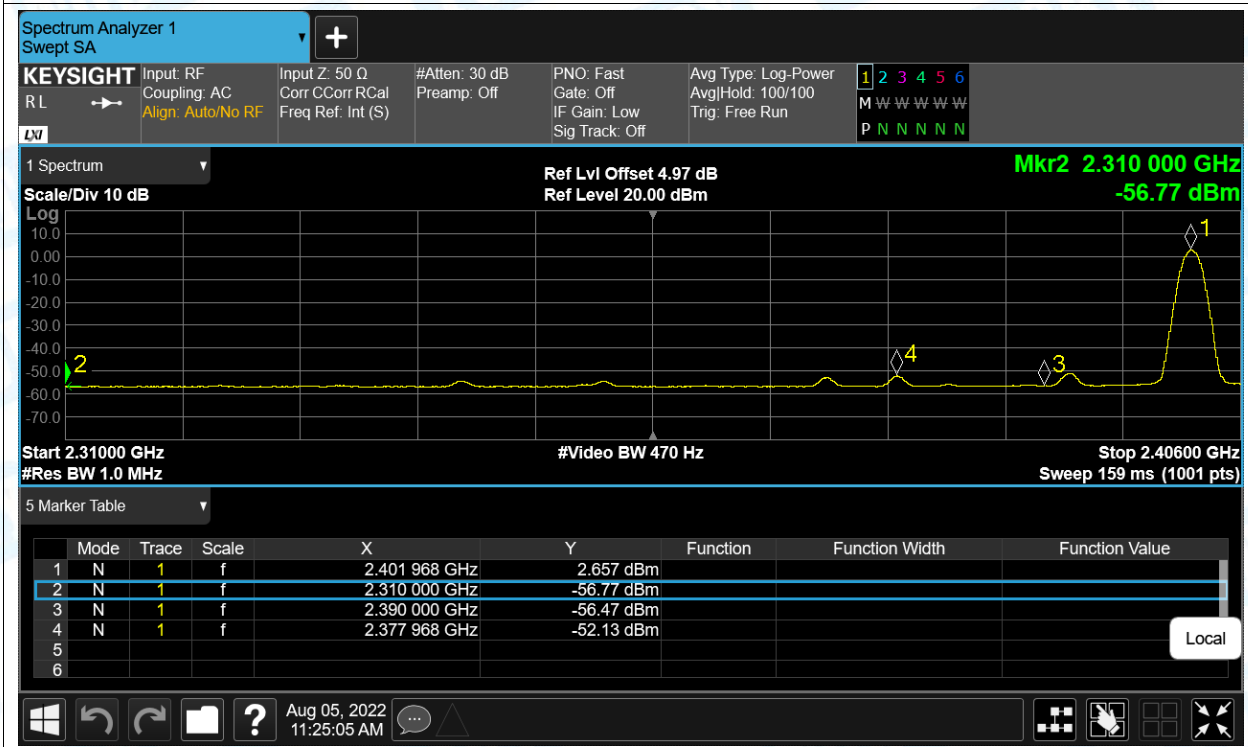



### Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

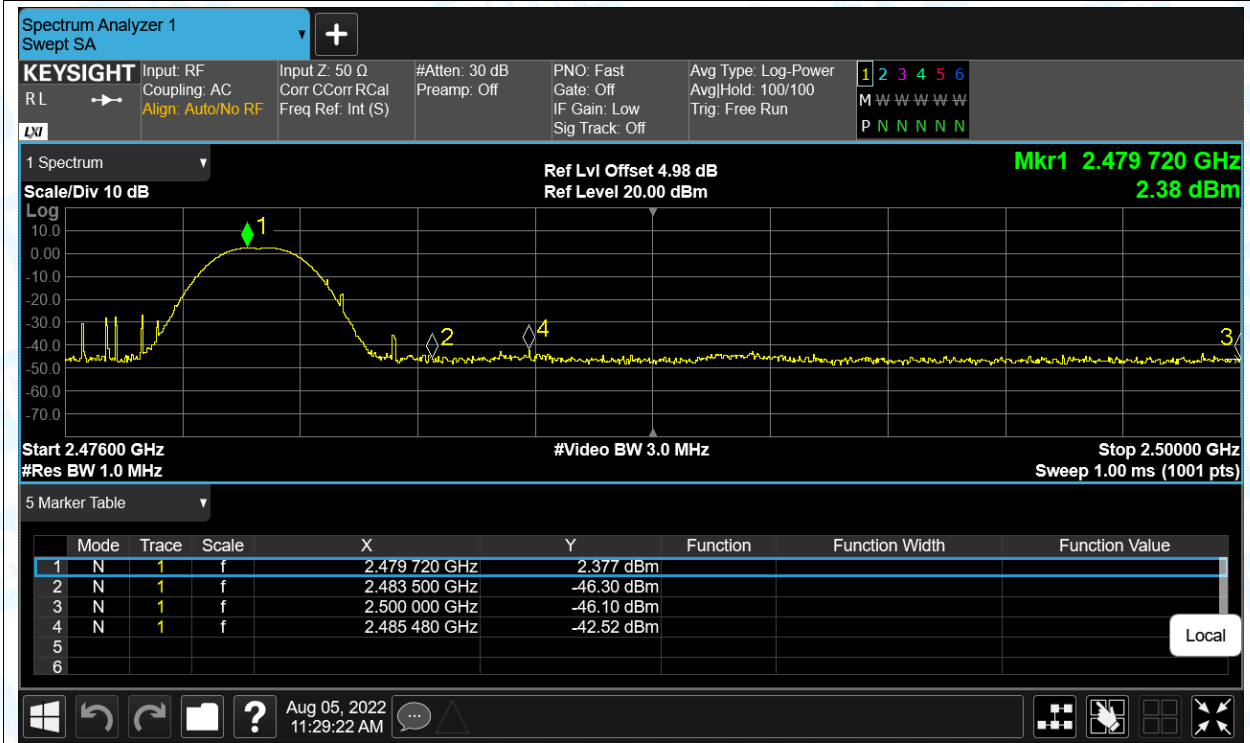

### Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

