


2.4G-2.48Frequency band onboard PIFA antenna test report

-
-
-



SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	>-4
VSWR	<3.2
Impedance (Ω)	50 Ω
Antenna Type	Plannar Inverted F Antenna on board
Polarization	Linear
Manufacture	Dolphin Electronics (DongGuan) Co.,Ltd.
adress	Room 301,Building 3,No.2 Baolong Road, Houjie Town, Dongguan City, Guangdong Province,China

-
-

Test environment: China Science and technology darkroom test system

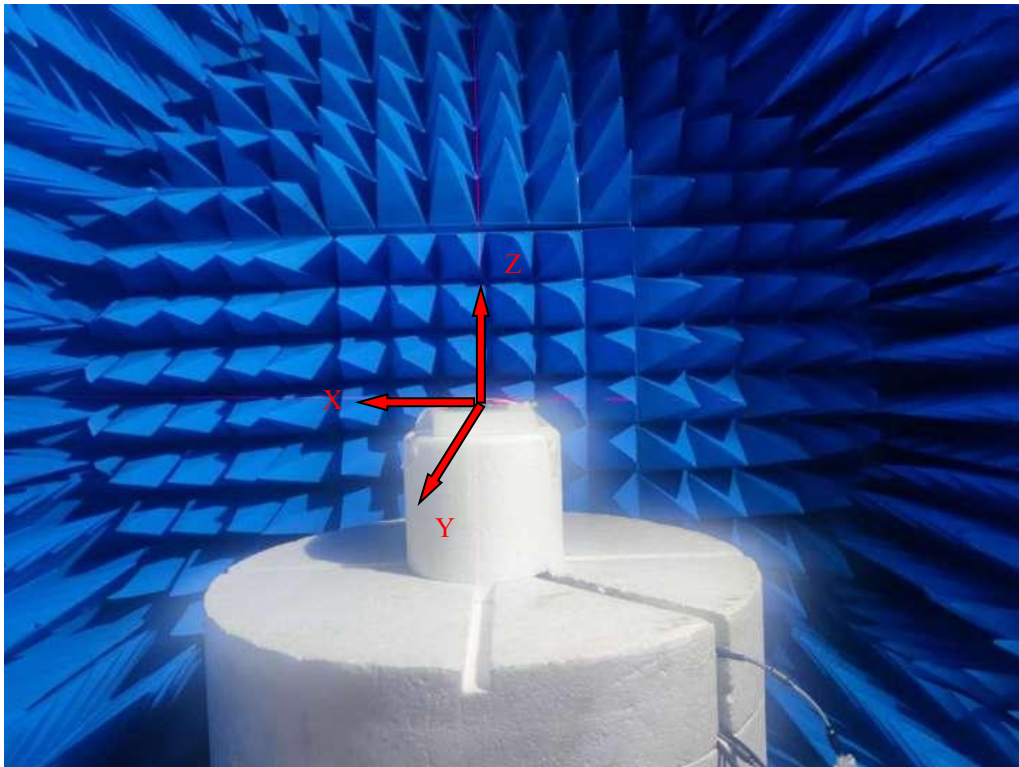

- Antenna physical and physical dimensions
-

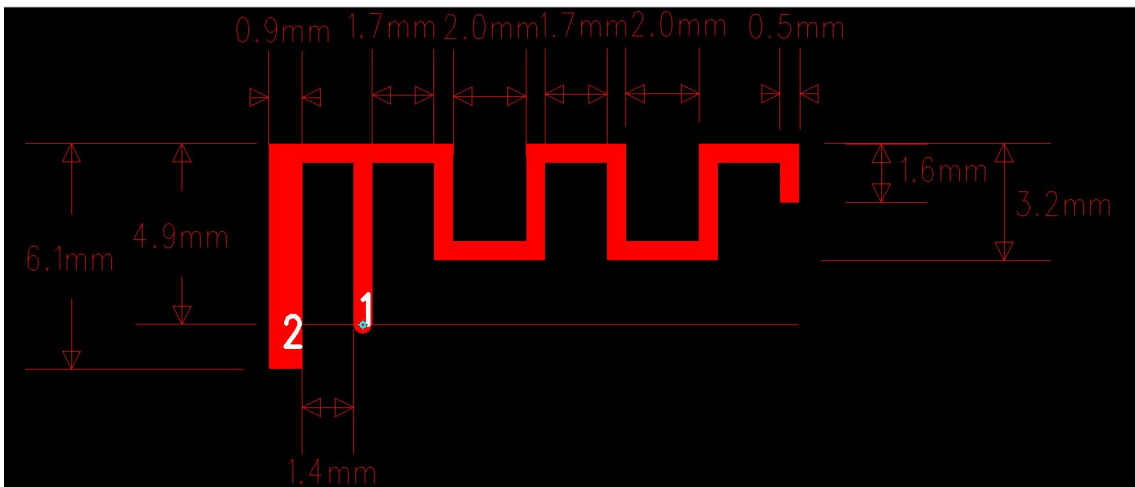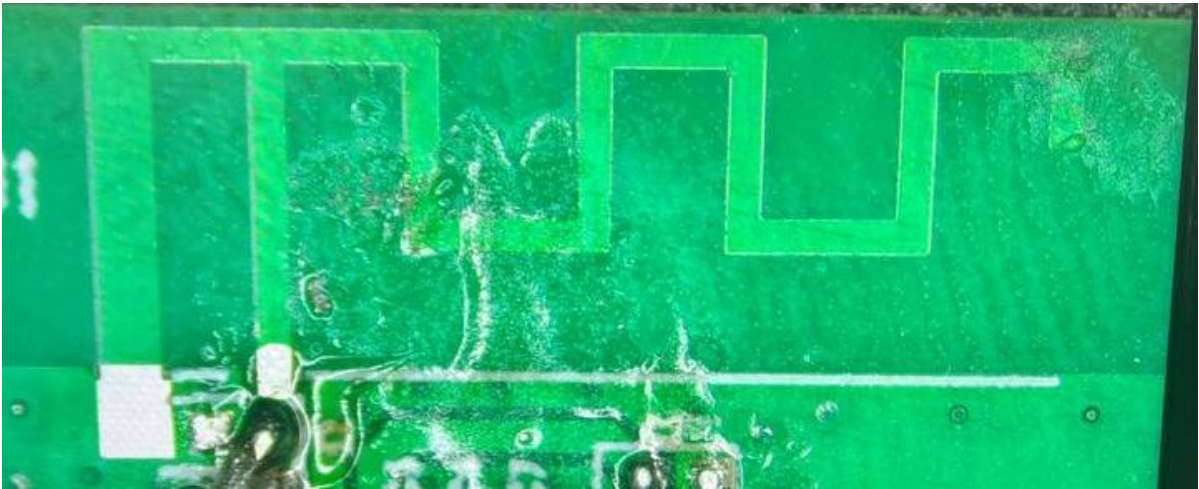

Antenna passive S-parameter:
 VSWR、Return Loss and **smith chart**




Antenna efficiency and gain


Frequency (MHz)	Gain (dBi)	Efficiency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831

2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


2440MHz 2D-Theta Pattern

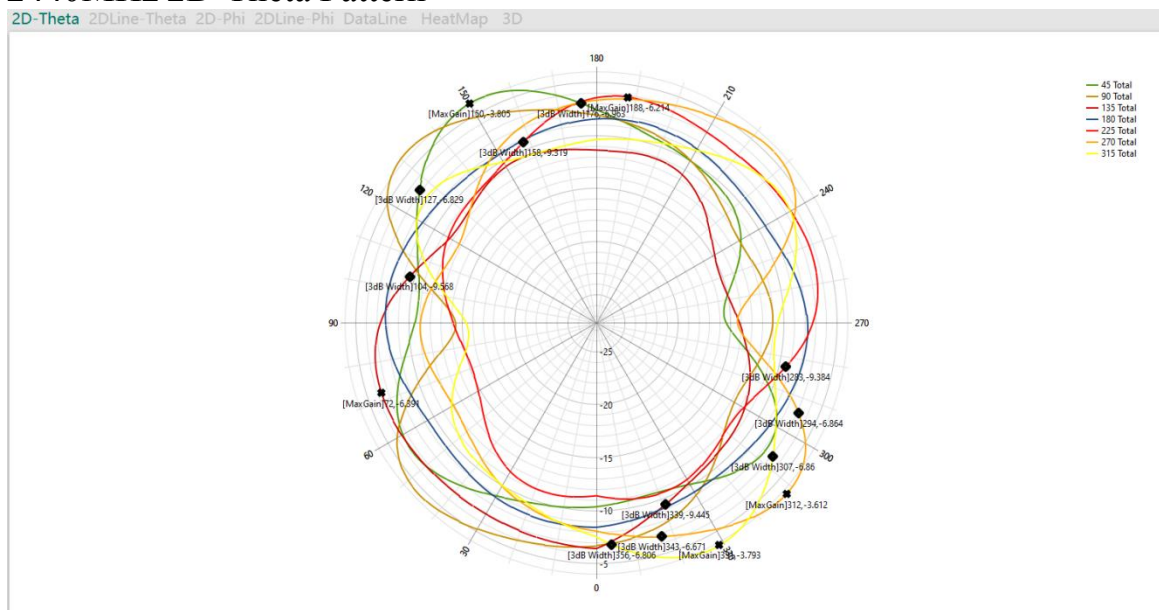

2440MHz 2D-Phi Pattern

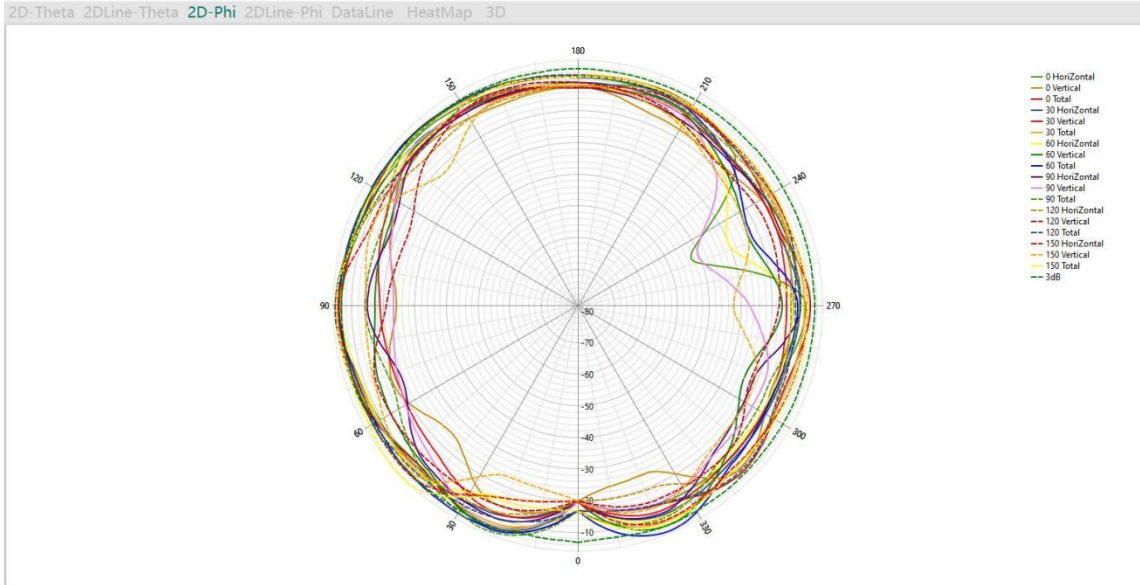


2440MHz 3D-Horizontal Pattern

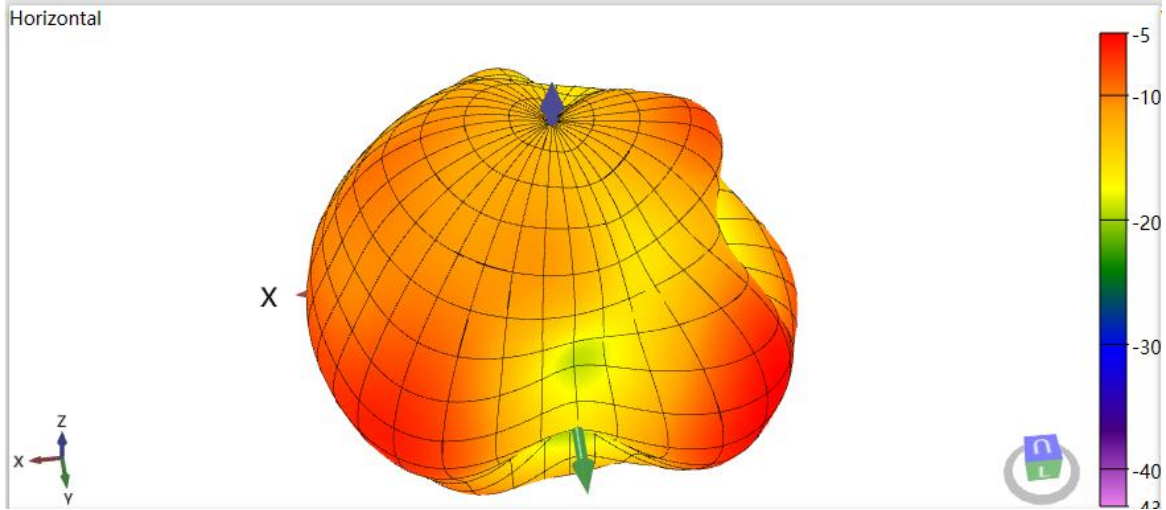

2440MHz 3D-Vertical Pattern

Vertical

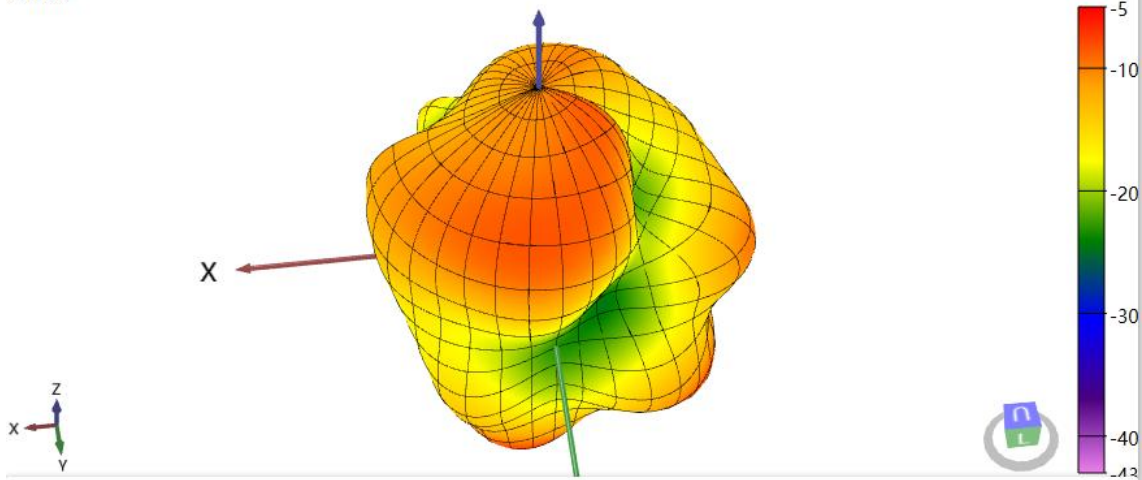

2440MHz 3D-Total Pattern

