

Forcite Helmet Systems PTY LTD

TEST REPORT

Model:
MK1

REPORT NUMBER
220600065THC-001

ISSUE DATE
Oct. 17, 2022

PAGES
48

DOCUMENT CONTROL NUMBER
GFT-OP-10h (28-Nov-2018)
© 2020 Intertek



Radio Spectrum TEST REPORT

Applicant:	Forcite Helmet Systems PTY LTD Unit A1, 35-39 Bourke Rd, Alexandria NSW 2015, Australia
Product:	FORCITE HELMET
Model No.:	MK1
Brand Name:	MK1S, MK1R, MK1X, MK1SE, MK1D
FCC ID:	2A8MD-MK1
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Zero chen

Zero Chen
Engineer

Rico Deng

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Revision History

Report No.	Issue Date	Revision Summary
220600065THC-001	Oct. 17, 2022	Original report

Table of Contents

Summary of Test Data	5
1. General Information	6
1.1 Identification of the EUT	6
1.2 Additional information about the EUT	6
1.3 Antenna description	6
1.4 Operation mode	7
1.5 Peripherals equipment	7
2. Minimum 6 dB Bandwidth	8
2.1 Instrument Setting.....	8
2.2 Test Procedure	8
2.3 Test Diagram	8
2.4 Limit	8
2.5 Test Results	9
3. Maximum Peak Conducted Output Power	13
3.1 Instrument Setting.....	13
3.2 Test Procedure	13
3.3 Test Diagram	13
3.4 Limit	13
3.5 Test Results	14
4. Power Spectral Density.....	15
4.1 Instrument Setting.....	15
4.2 Test Procedure	15
4.3 Test Diagram	15
4.4 Limit	15
4.5 Test Results	16
5. Emissions in Non-Restricted Frequency Bands	20
5.1 Instruments Setting	20
5.2 Test Procedure	20
5.3 Test Diagram	20
5.4 Limit	20
5.5 Test Results	20
6. Emissions in Restricted Frequency Bands (Radiated emission measurements)	30
6.1 Instrument Setting.....	30
6.2 Test setup & procedure	30
6.3 Limit	32
6.4 Test Result.....	33
7. Emission on Band Edge.....	36
7.1 Instrument Setting.....	36

TEST REPORT

7.2 Test Procedure	36
7.3 Test Results	37
8. AC Power Line Conducted Emission	42
8.1 Measuring instrument setting	42
8.2 Test Procedure	42
8.3 Test Diagram	42
8.4 Limit	43
8.5 Test Results	44
Appendix A: Test equipment list	46
Appendix B: Measurement Uncertainty	48

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	FORCITE HELMET
Model No.:	MK1
Operating Frequency:	2412 MHz ~ 2462 MHz
Channel Number:	11 channels
Frequency of Each Channel:	2412+5 k, k=0 ~ 10
Rated Power:	DC 5V
Power Cord:	N/A
Sample receiving date:	2022/07/21
Sample condition:	Workable
Test Date(s):	2022/08/19 ~ 2022/09/07

1.2 Additional information about the EUT

The customer confirmed there are several trade names, the different brands served as marketing strategy.

Brand Name	Model Number	Different
MK1S	MK1	painting different; helmet padding different
MK1R	MK1	painting different; helmet padding different
MK1X	MK1	painting different; helmet padding different
MK1SE	MK1	painting different; helmet padding different
MK1D	MK1	painting different; helmet padding different

1.3 Antenna description

Antenna Gain : 4.2 dBi
Antenna Type : PCB antenna
Connector Type : I-Pex

1.4 Operation mode

EUT connected to Notebook USB port, executing “tera term” and enter command to select different frequency and modulation.

With individual verifying, the maximum output power were found out 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n(HT20) mode, the final tests were executed under these conditions recorded in this report individually.

Mode	Channel	Frequency (MHz)	Data rate	Signal on time(ms)	Signal on & off time(ms)	Duty cycle	Duty Cycle factor
802.11b	6	2437	1	8.43	8.52	0.989	0.046
802.11g	6	2437	6	1.39	1.50	0.926	0.334
802.11n(HT20)	6	2437	6.5	1.30	1.41	0.923	0.347

1.5 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Notebook PC	ASUS	N81V	N/A	Micro USB shielded cable 0.2m
Fixture	N/A	N/A	N/A	Micro USB shielded cable 0.2m
Adapter	Samsung	EP-TA10JWS	N/A	N/A

2. Minimum 6 dB Bandwidth


2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

2.3 Test Diagram

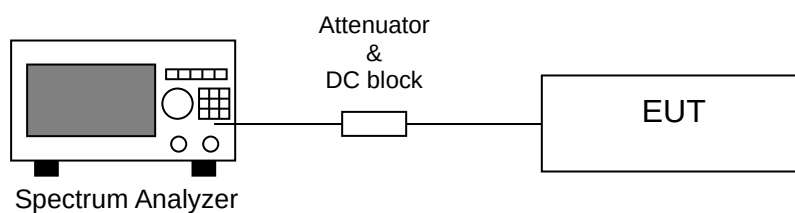

2.4 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.5 Test Results

Temperature (°C) :	26
Relative Humidity (%) :	55
Test date :	2022/09/07

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1	2412	8.57	>0.5	Pass
	6	2437	8.54	>0.5	Pass
	11	2462	8.04	>0.5	Pass
802.11g	1	2412	16.06	>0.5	Pass
	6	2437	16.27	>0.5	Pass
	11	2462	16.03	>0.5	Pass
802.11n(HT20)	1	2412	16.30	>0.5	Pass
	6	2437	17.59	>0.5	Pass
	11	2462	16.63	>0.5	Pass

6dB Occupied Bandwidth@802.11b_Chain0_Ch 1_2412




6dB Occupied Bandwidth@802.11b_Chain0_Ch 6_2437




6dB Occupied Bandwidth@802.11b_Chain0_Ch11_2462




6dB Occupied Bandwidth@802.11g_Chain0_Ch 1_2412

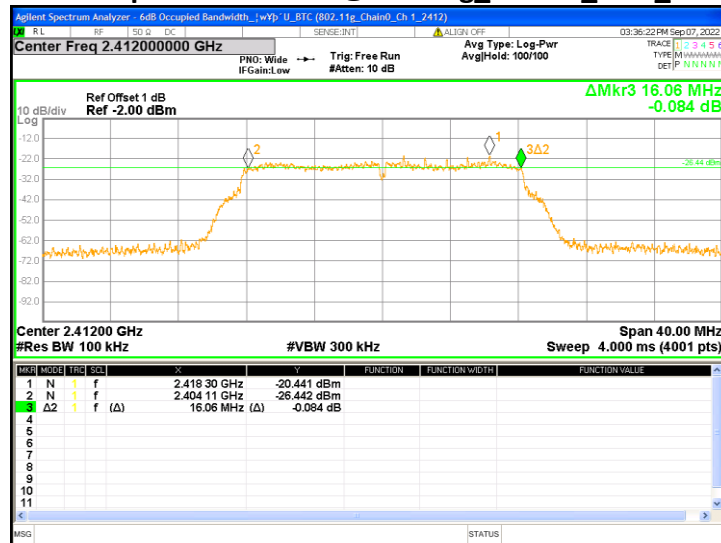


6dB Occupied Bandwidth@802.11g_Chain0_Ch 6_2437

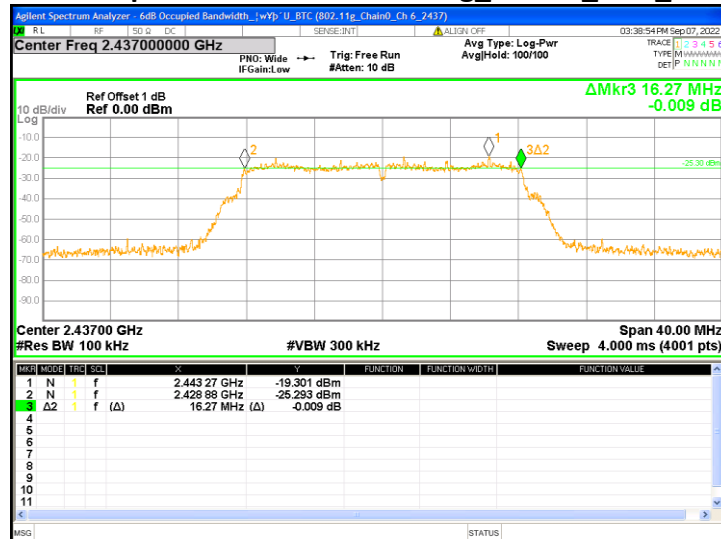


6dB Occupied Bandwidth@802.11g_Chain0_Ch11_2462

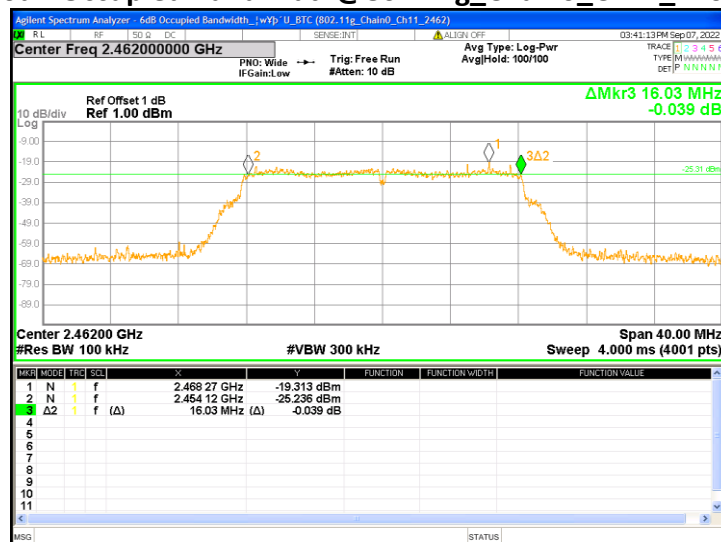


6dB Occupied Bandwidth@802.11n(HT20)_Chain0_Ch 1_2412

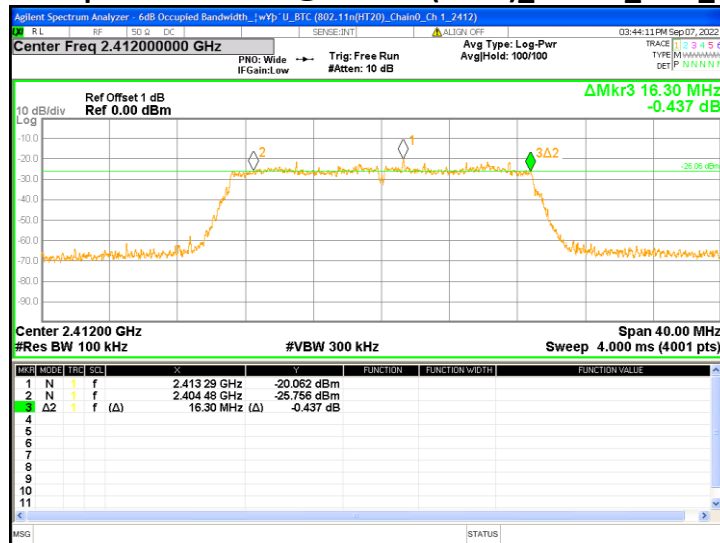

6dB Occupied Bandwidth@802.11n(HT20)_Chain0_Ch 6_2437

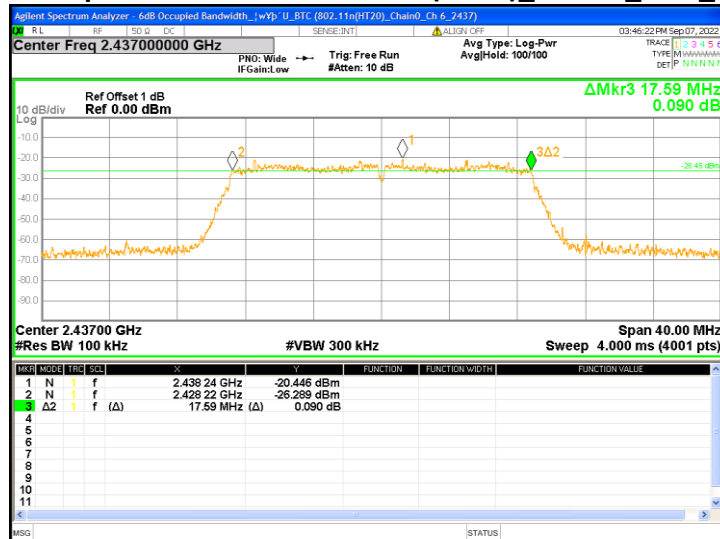

6dB Occupied Bandwidth@802.11n(HT20)_Chain0_Ch11_2462

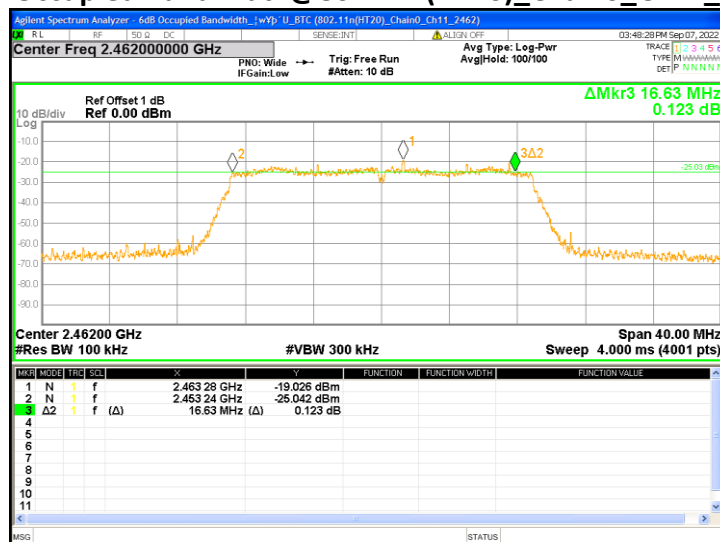

3. Maximum Peak Conducted Output Power

3.1 Instrument Setting


Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

Note: Using the gate function of power meter.

3.3 Test Diagram

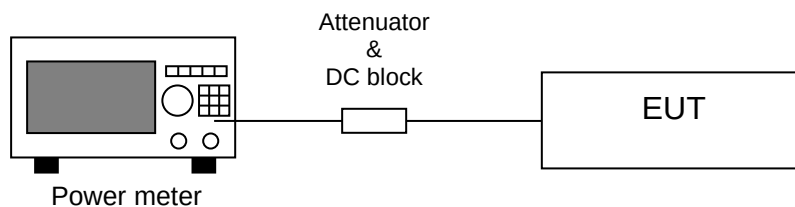

3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

3.5 Test Results

Temperature (°C) :	27
Relative Humidity (%) :	61
Test date :	2022/08/31

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Output Power [AV] (dBm)	Total Power [AV] (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	1	-3.98	0.40	30	-33.98
	6	2437		-4.07	0.39	30	-34.07
	11	2462		-4.12	0.39	30	-34.12
802.11g	1	2412	6	-9.25	0.12	30	-39.25
	6	2437		-9.11	0.12	30	-39.11
	11	2462		-9.17	0.12	30	-39.17
802.11n (HT20)	1	2412	6.5	-9.88	0.10	30	-39.88
	6	2437		-9.46	0.11	30	-39.46
	11	2462		-9.01	0.13	30	-39.01

4. Power Spectral Density


4.1 Instrument Setting

Spectrum Function	Setting
Detector	RMS
RBW	≥ 3 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Averaging
Span	1.5 times x 6dB bandwidth
Attenuation	Auto

4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3 Test Diagram

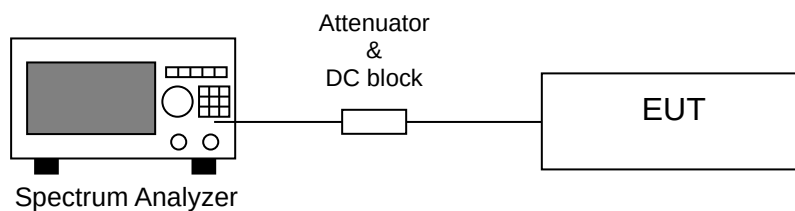

4.4 Limit


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 10 kHz band during any time interval of continuous transmission

4.5 Test Results


Temperature (°C) :	26
Relative Humidity (%) :	63
Test date :	2022/09/07

Mode	Channel	Frequency (MHz)	PSD (dBm)	Duty Factor	Result	Limit (dBm)	Margin (dB)
802.11b	1	2412	-32.052	0.046	-32.006	8	-40.006
	6	2437	-31.309	0.046	-31.263	8	-39.263
	11	2462	-30.828	0.046	-30.782	8	-38.782
802.11g	1	2412	-37.931	0.334	-37.597	8	-45.597
	6	2437	-37.399	0.334	-37.065	8	-45.065
	11	2462	-37.086	0.334	-36.752	8	-44.752
802.11n(HT20)	1	2412	-38.569	0.347	-38.222	8	-46.222
	6	2437	-37.661	0.347	-37.314	8	-45.314
	11	2462	-37.369	0.347	-37.022	8	-45.022

Power Spectral Density@802.11b_Chain0_Ch 1_2412

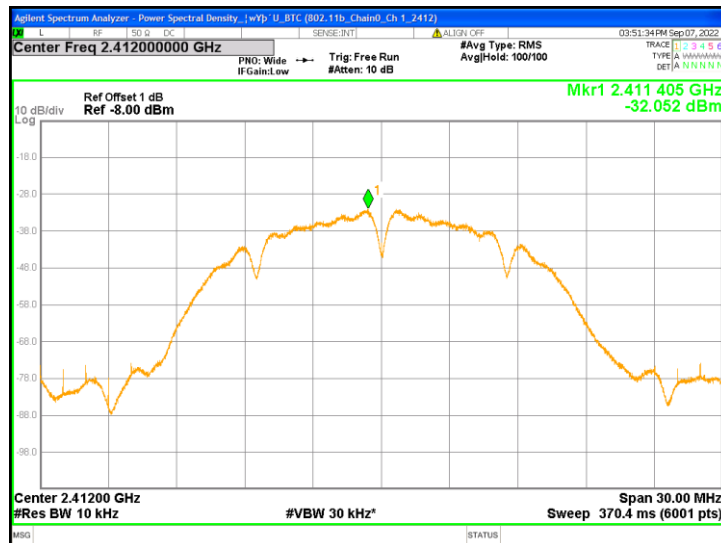


Power Spectral Density@802.11b_Chain0_Ch 6_2437

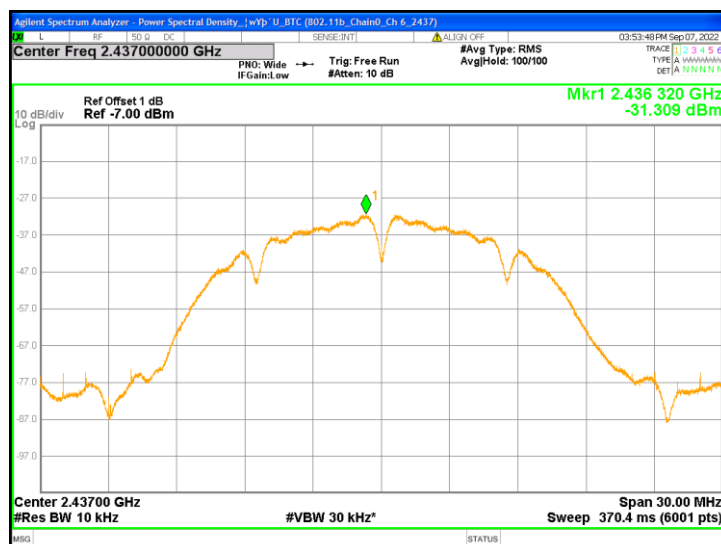


Power Spectral Density@802.11b_Chain0_Ch11_2462




Power Spectral Density@802.11g_Chain0_Ch 1_2412

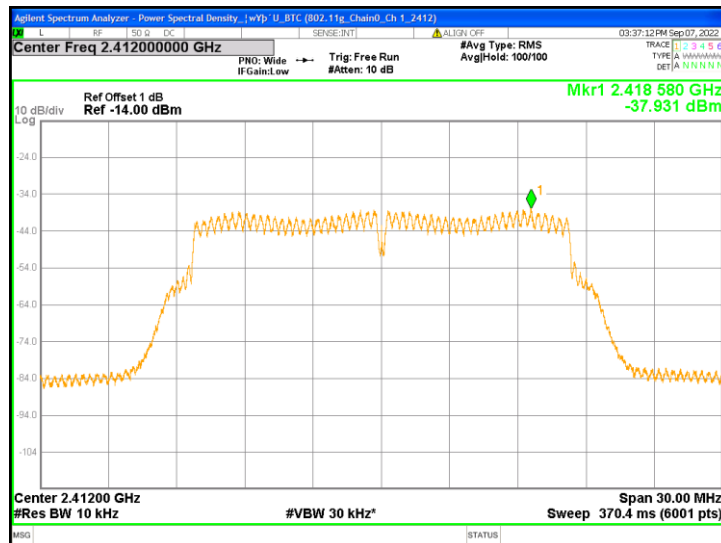


Power Spectral Density@802.11g_Chain0_Ch 6_2437

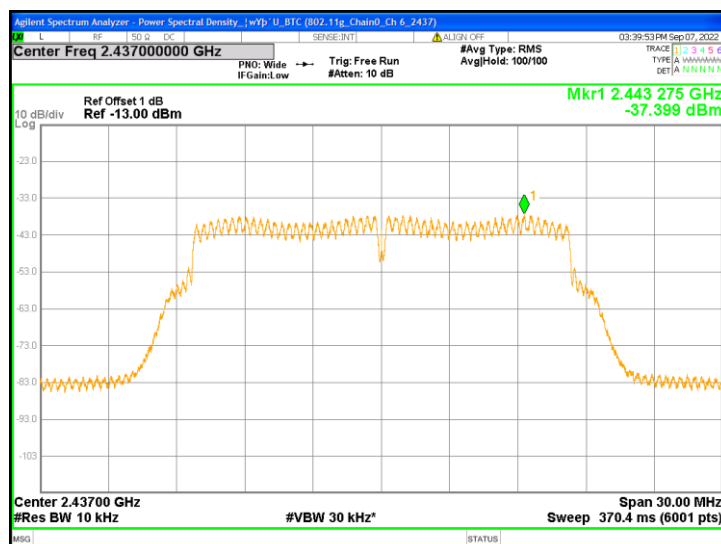


Power Spectral Density@802.11g_Chain0_Ch11_2462

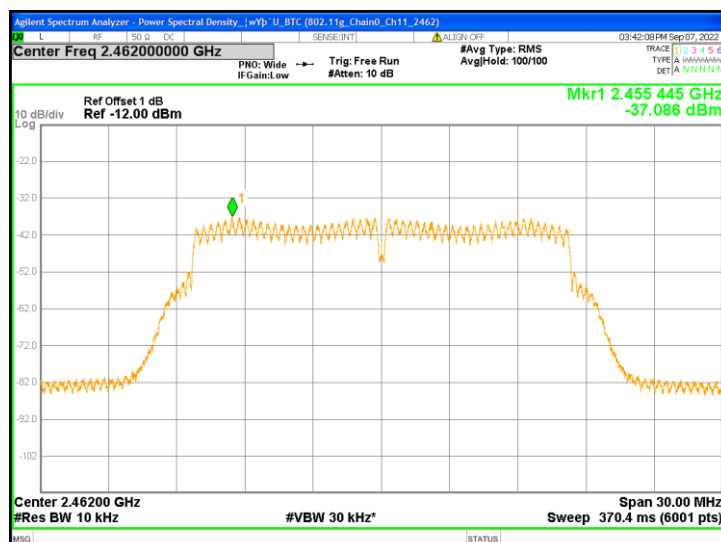


Power Spectral Density@802.11n(HT20)_Chain0_Ch 1_2412

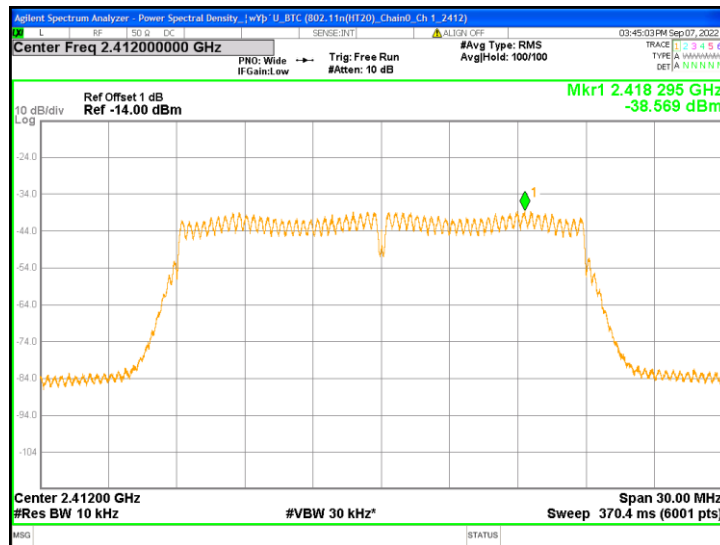

Power Spectral Density@802.11n(HT20)_Chain0_Ch 6_2437

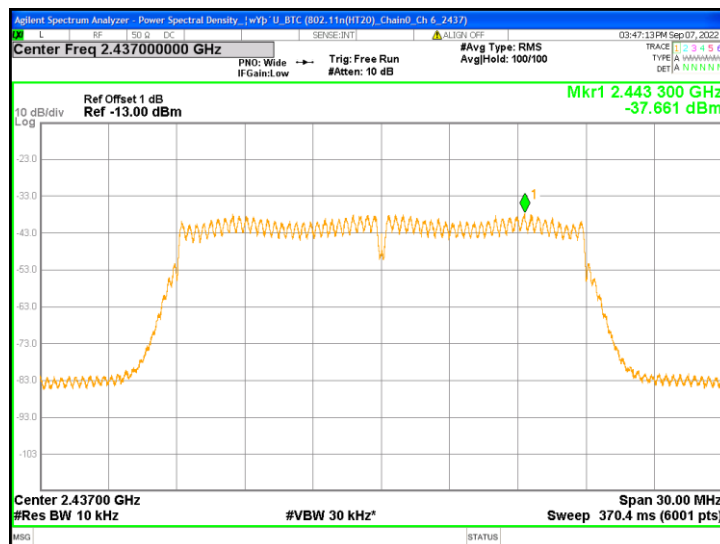

Power Spectral Density@802.11n(HT20)_Chain0_Ch11_2462

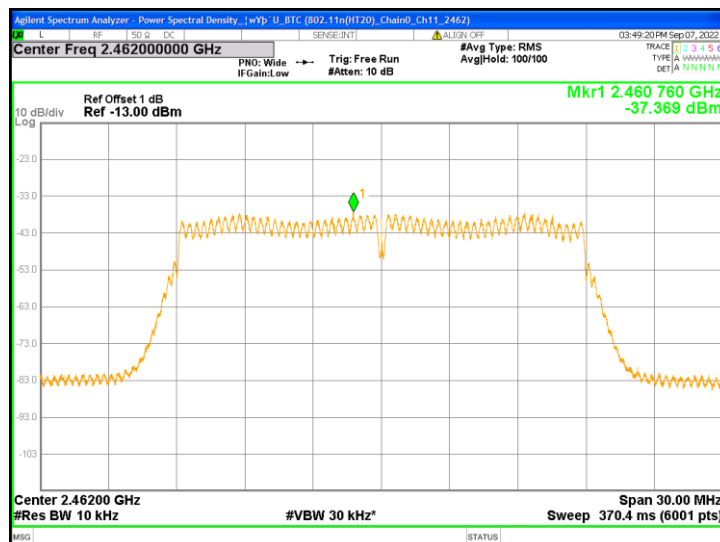

5. Emissions in Non-Restricted Frequency Bands


5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	≥ 100 kHz	≥ 100 kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	≥ 1.5 time 6dB bandwidth	
Attenuation	Auto	Auto

5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

5.3 Test Diagram

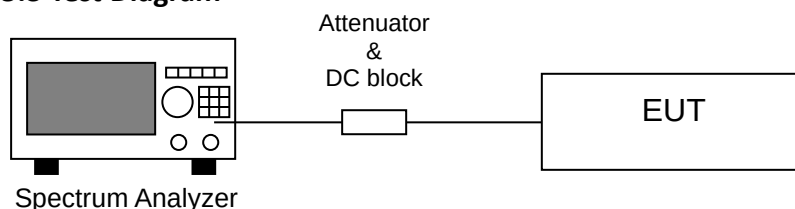


5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz


5.5 Test Results

Temperature (°C) :	26
Relative Humidity (%) :	63
Test date :	2022/09/07


Conducted Spurious@802.11b_Chain0_Ch 1_2412_1

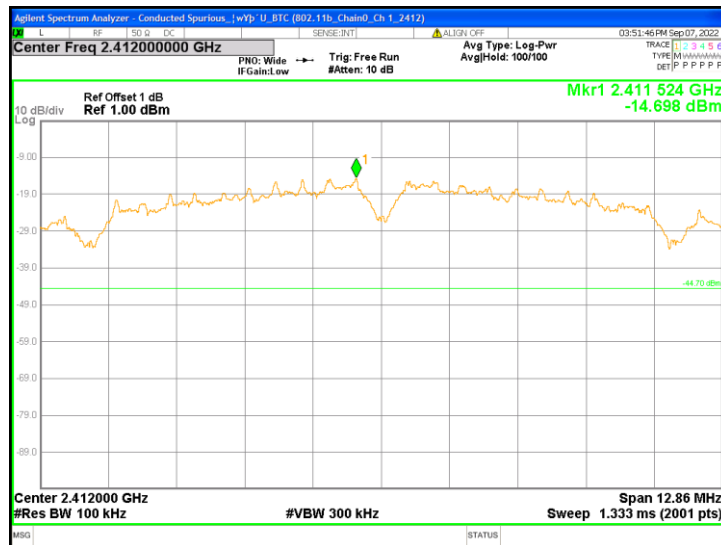


Conducted Spurious@802.11b_Chain0_Ch 1_2412_2

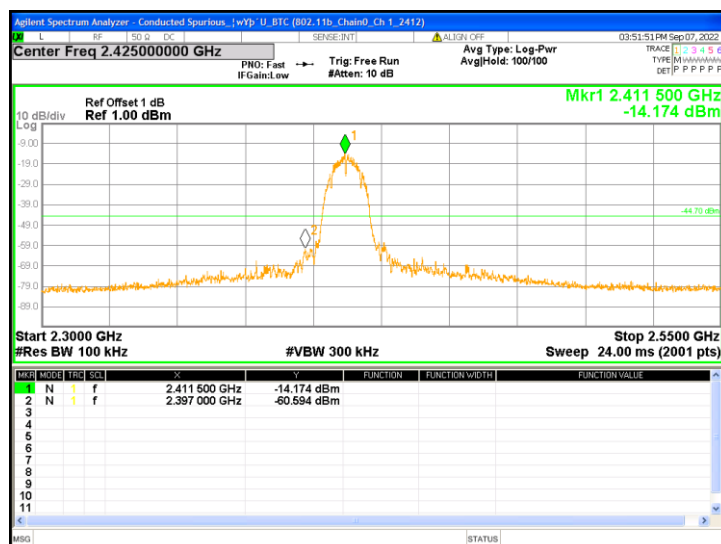


Conducted Spurious@802.11b_Chain0_Ch 1_2412_3

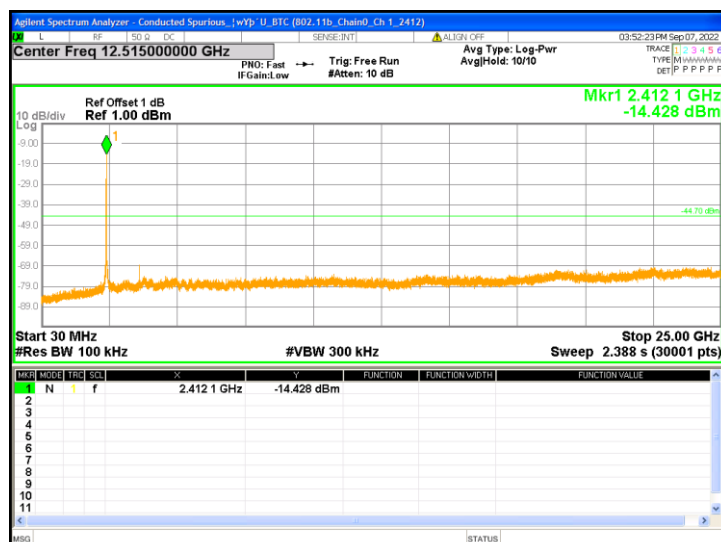


Conducted Spurious@802.11b_Chain0_Ch 6_2437_1

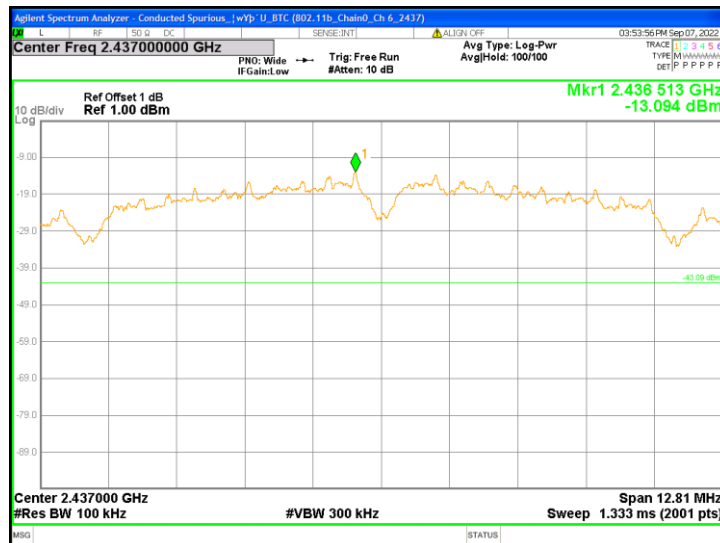


Conducted Spurious@802.11b_Chain0_Ch 6_2437_2

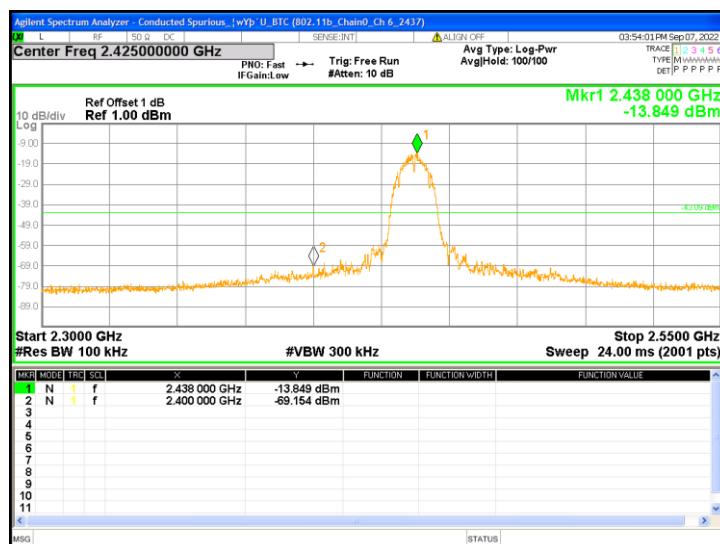


Conducted Spurious@802.11b_Chain0_Ch 6_2437_3

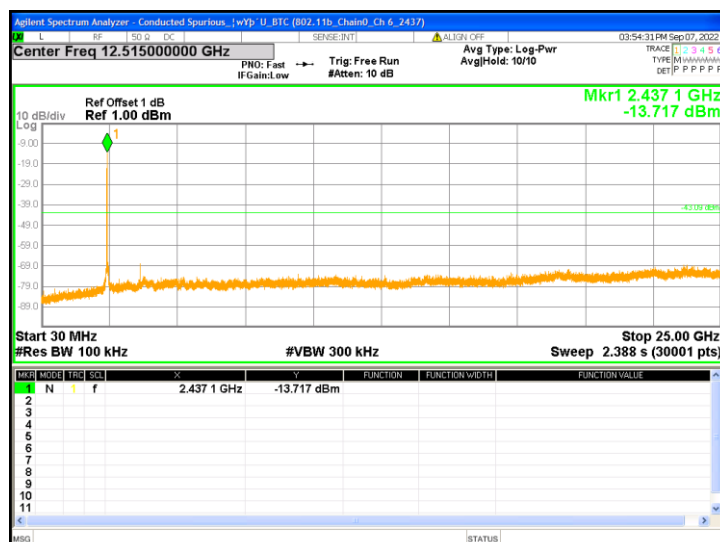


Conducted Spurious@802.11b_Chain0_Ch11_2462_1

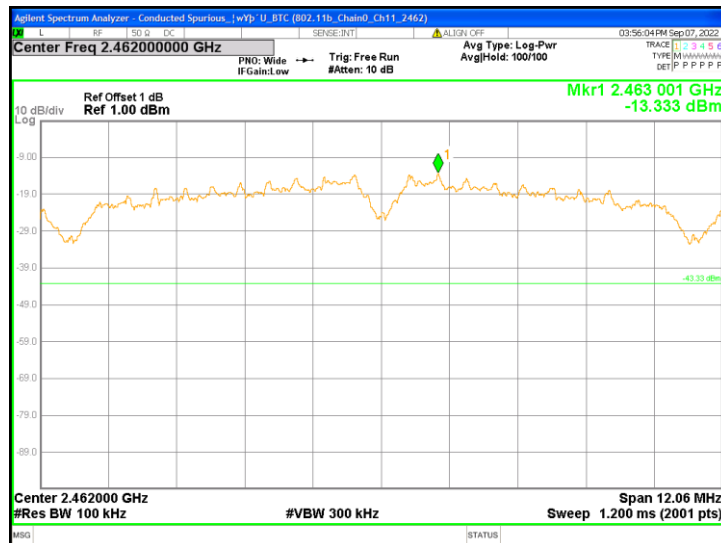


Conducted Spurious@802.11b_Chain0_Ch11_2462_2

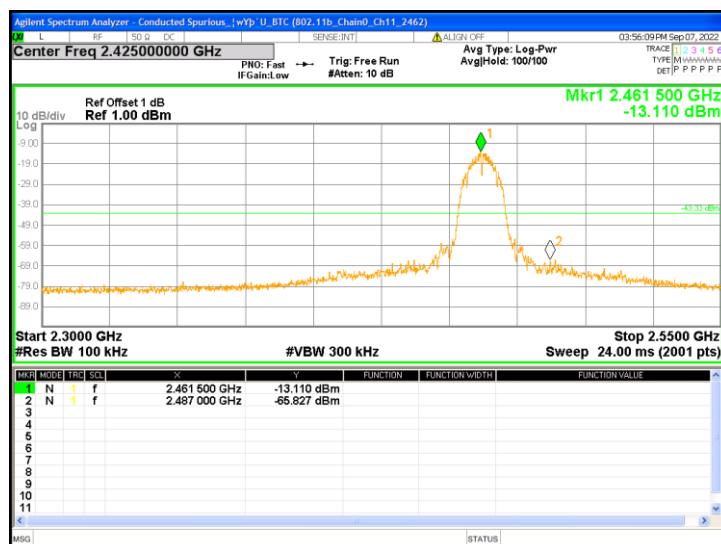


Conducted Spurious@802.11b_Chain0_Ch11_2462_3

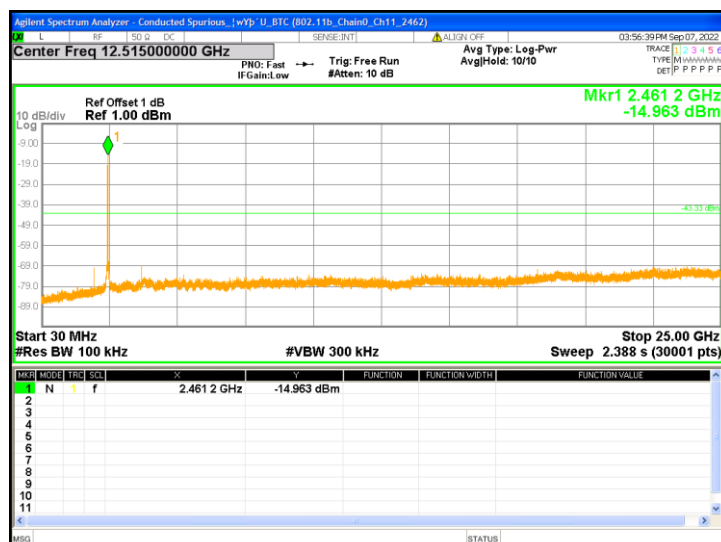


Conducted Spurious@802.11g_Chain0_Ch 1_2412_1

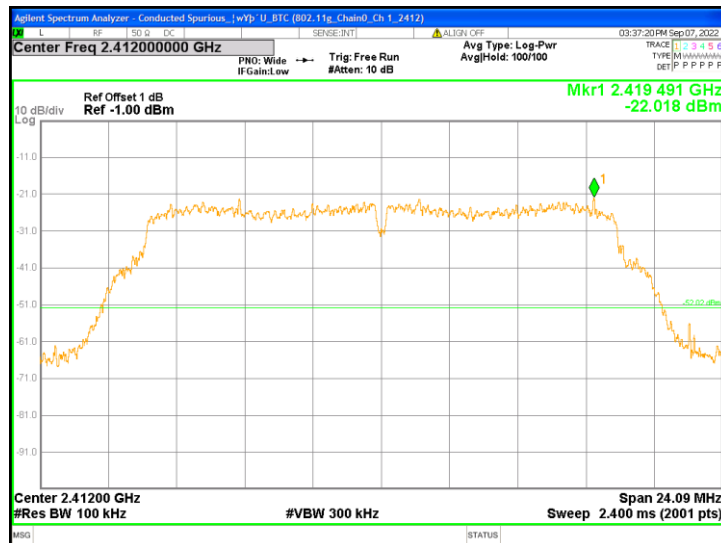


Conducted Spurious@802.11g_Chain0_Ch 1_2412_2

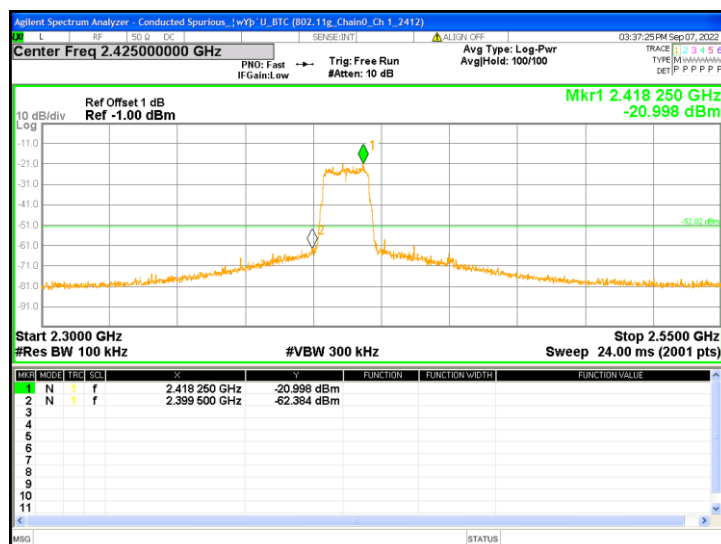


Conducted Spurious@802.11g_Chain0_Ch 1_2412_3

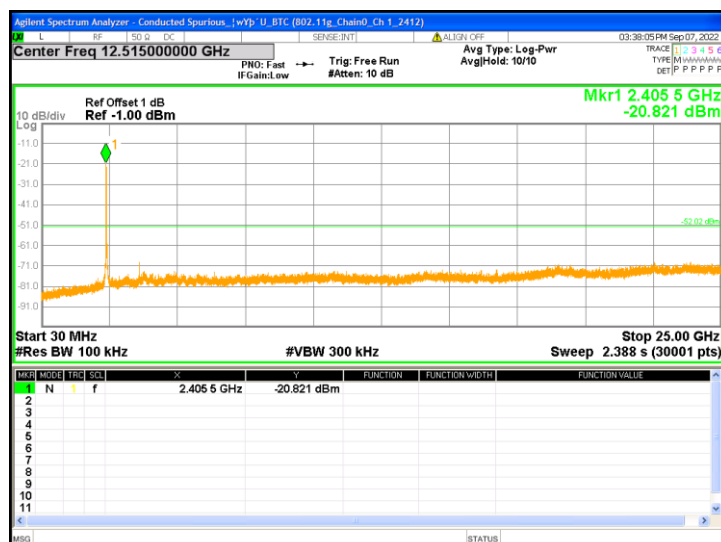


Conducted Spurious@802.11g_Chain0_Ch 6_2437_1

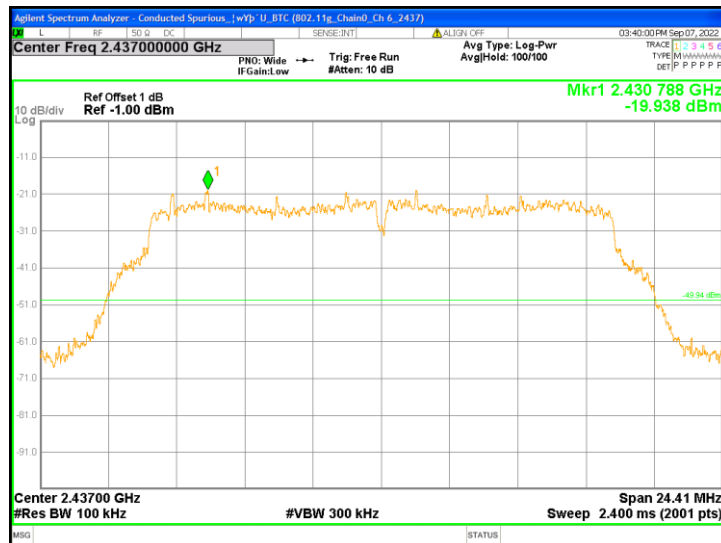


Conducted Spurious@802.11g_Chain0_Ch 6_2437_2

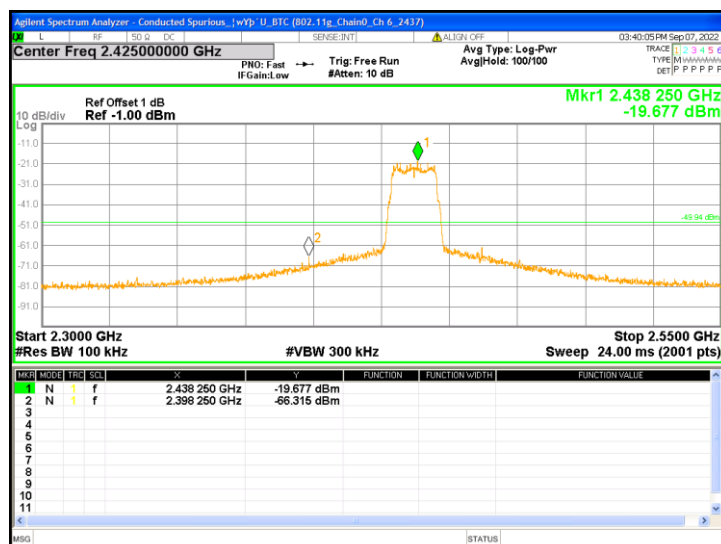


Conducted Spurious@802.11g_Chain0_Ch 6_2437_3

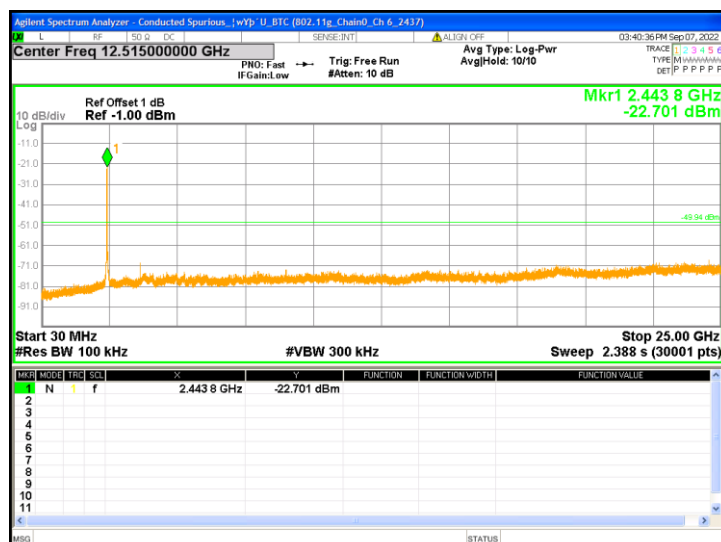


Conducted Spurious@802.11g_Chain0_Ch11_2462_1

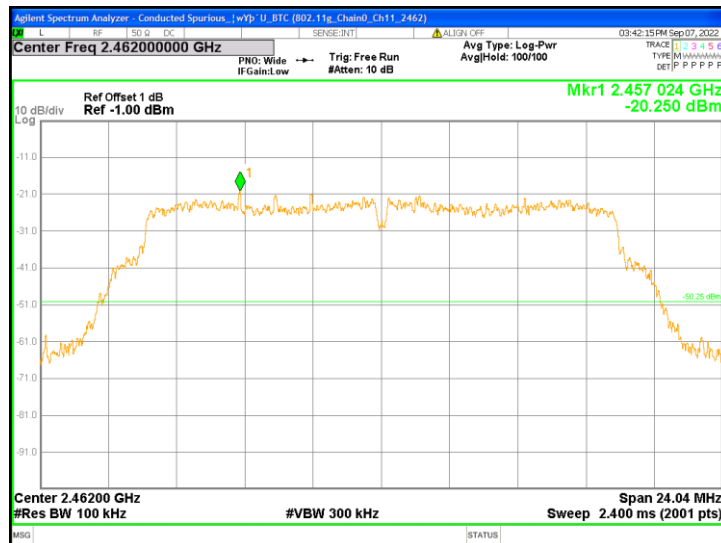


Conducted Spurious@802.11g_Chain0_Ch11_2462_2

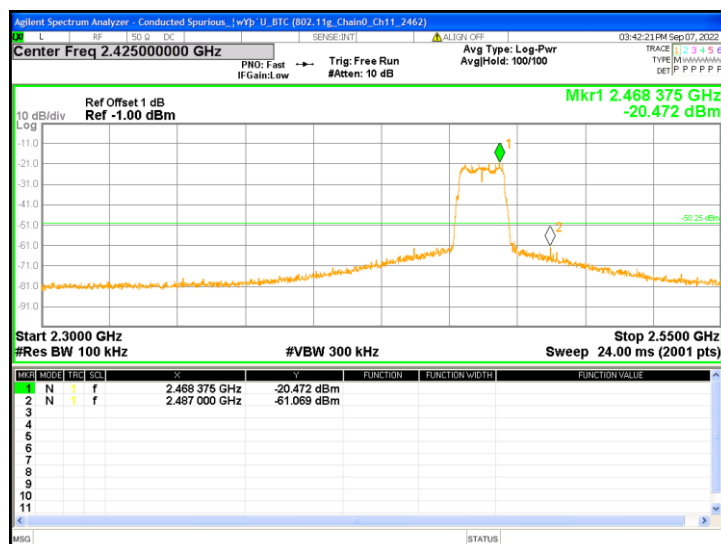


Conducted Spurious@802.11g_Chain0_Ch11_2462_3

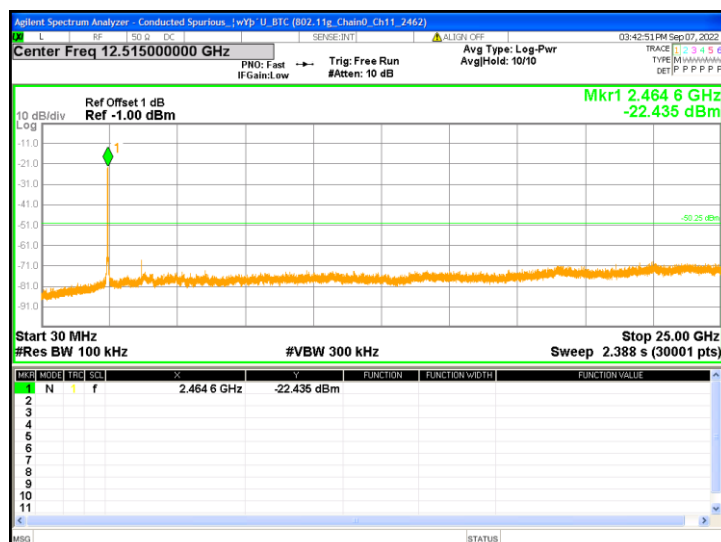


Conducted Spurious@802.11n(HT20)_Chain0_Ch 1_2412_1

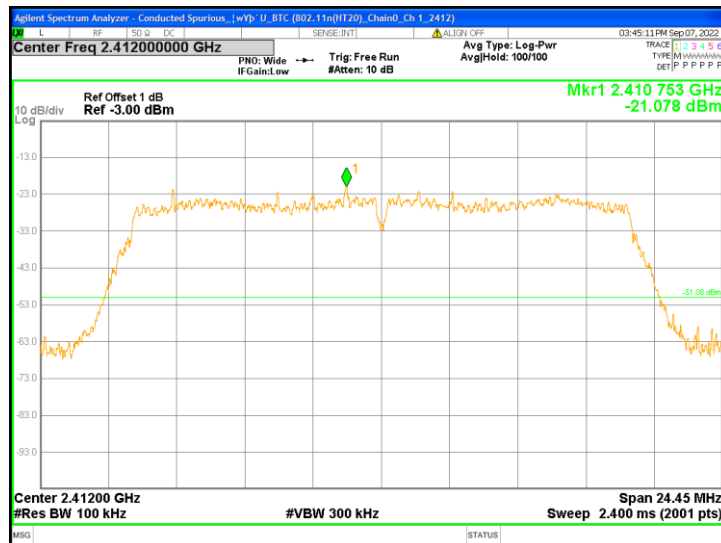


Conducted Spurious@802.11n(HT20)_Chain0_Ch 1_2412_2

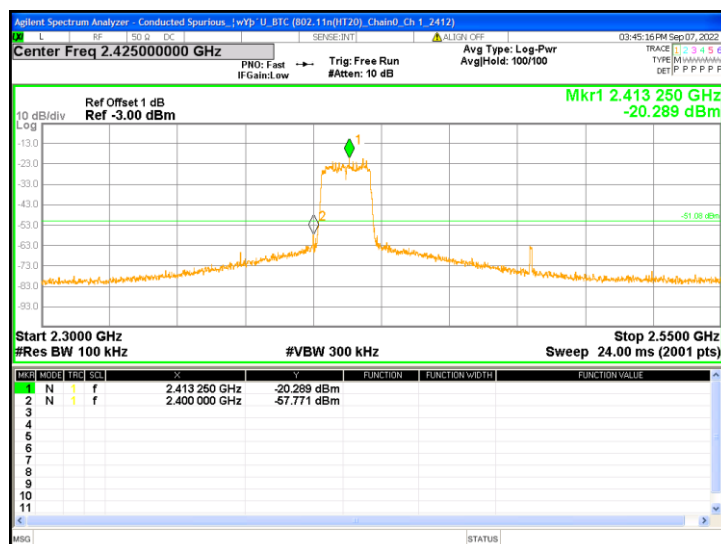


Conducted Spurious@802.11n(HT20)_Chain0_Ch 1_2412_3

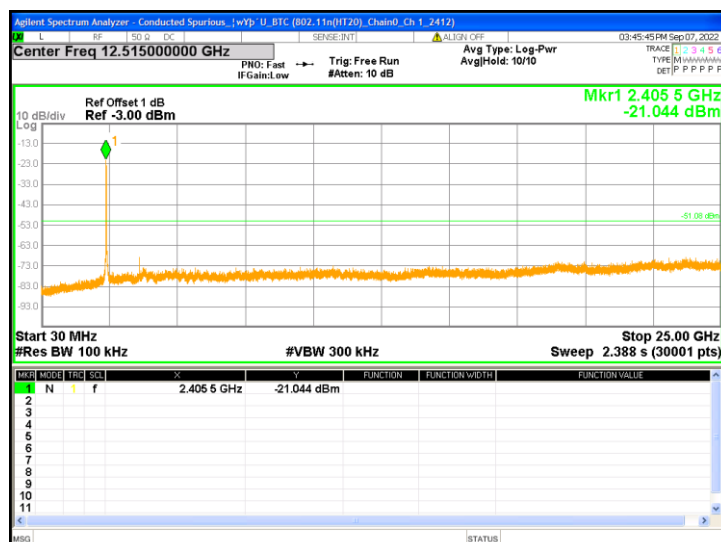


Conducted Spurious@802.11n(HT20)_Chain0_Ch 6_2437_1

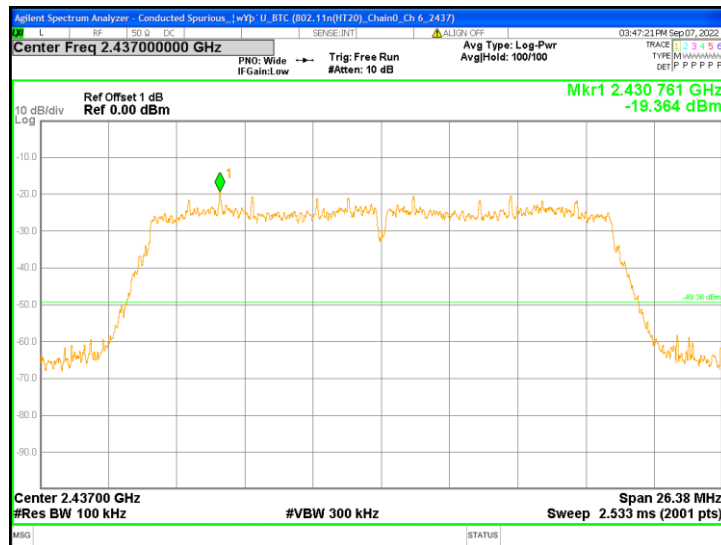


Conducted Spurious@802.11n(HT20)_Chain0_Ch 6_2437_2

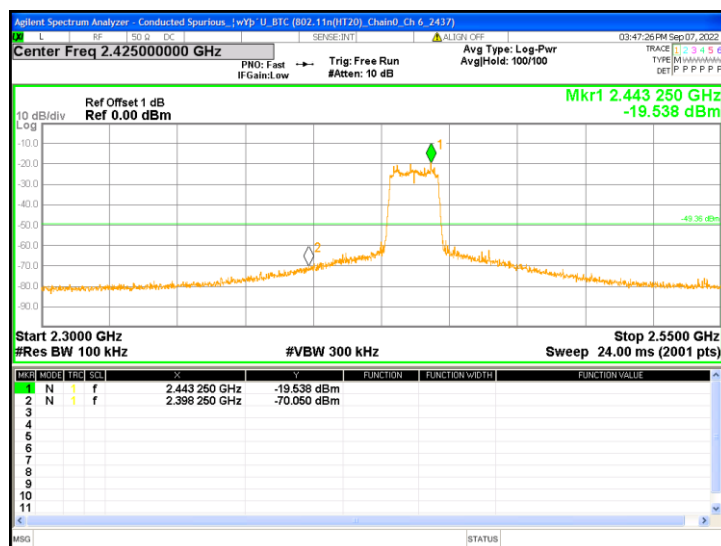


Conducted Spurious@802.11n(HT20)_Chain0_Ch 6_2437_3

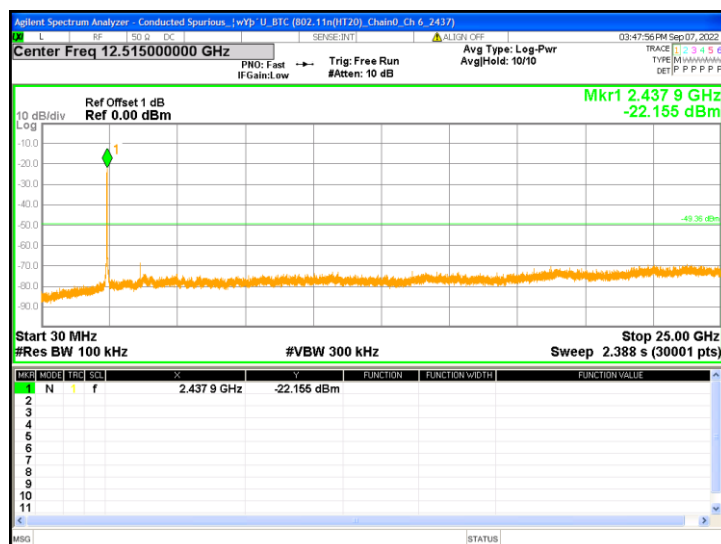


Conducted Spurious@802.11n(HT20)_Chain0_Ch11_2462_1

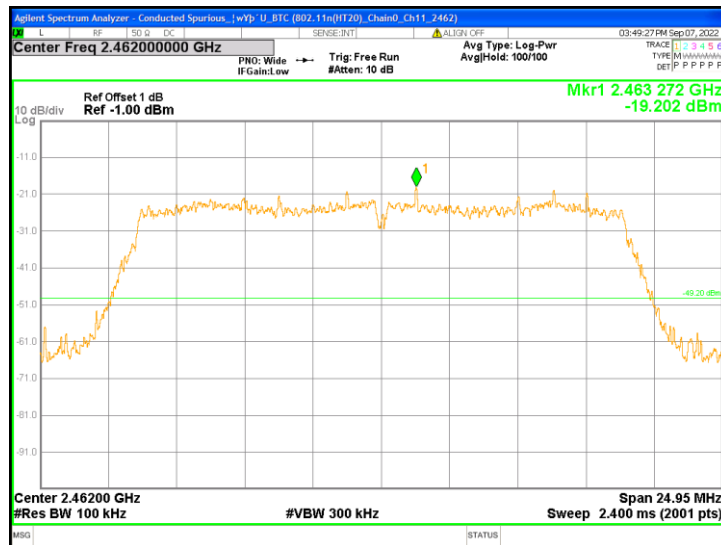

Conducted Spurious@802.11n(HT20)_Chain0_Ch11_2462_2

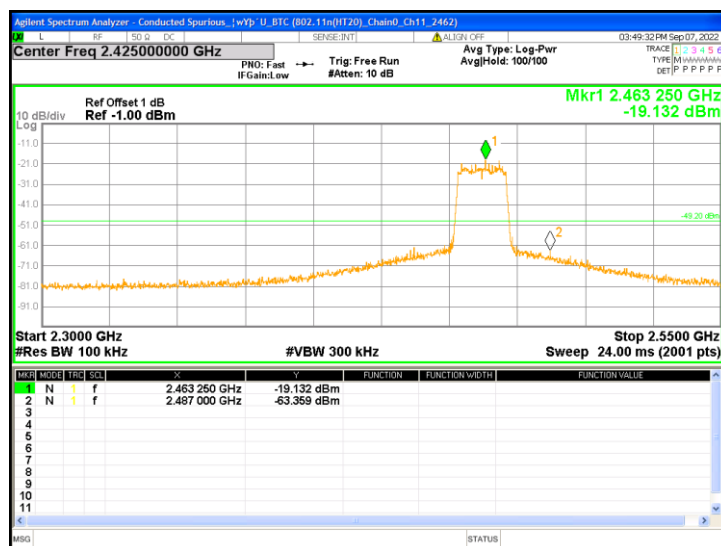

Conducted Spurious@802.11n(HT20)_Chain0_Ch11_2462_3

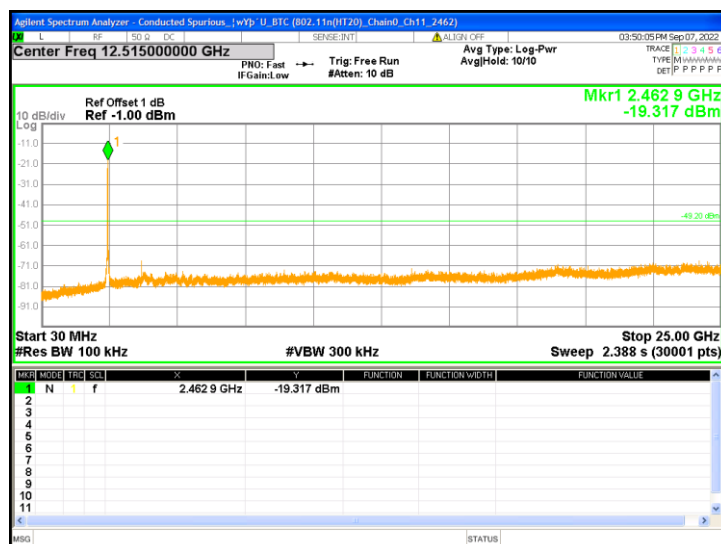


6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

6.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T minimum kHz
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

6.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

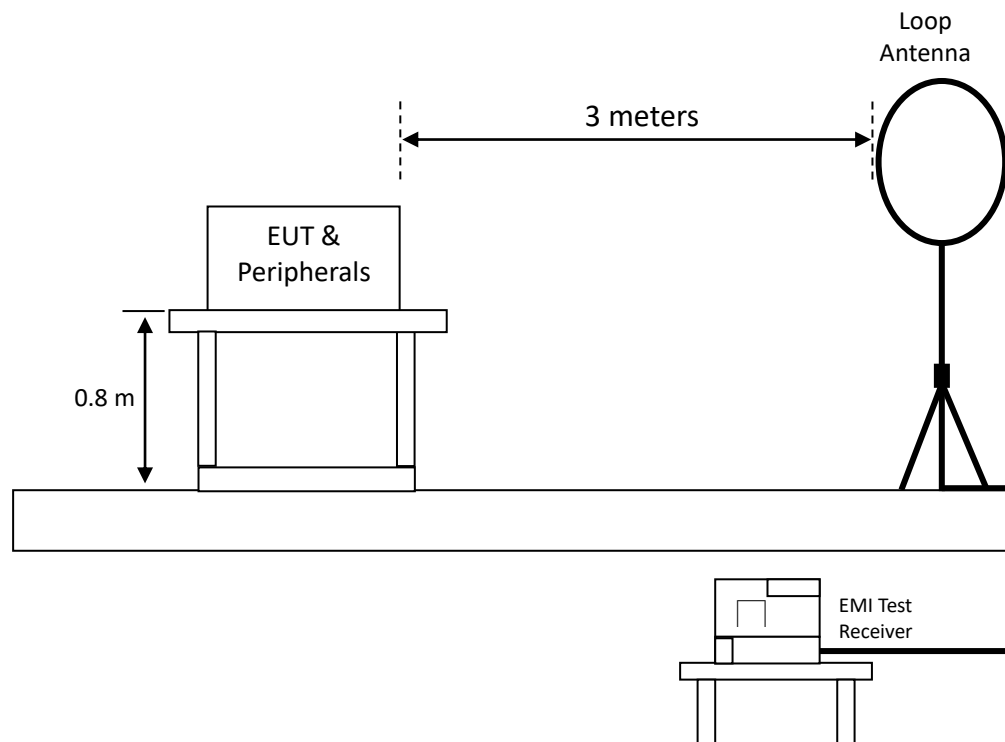

Radiated emission below 1GHz using Bilog Antenna

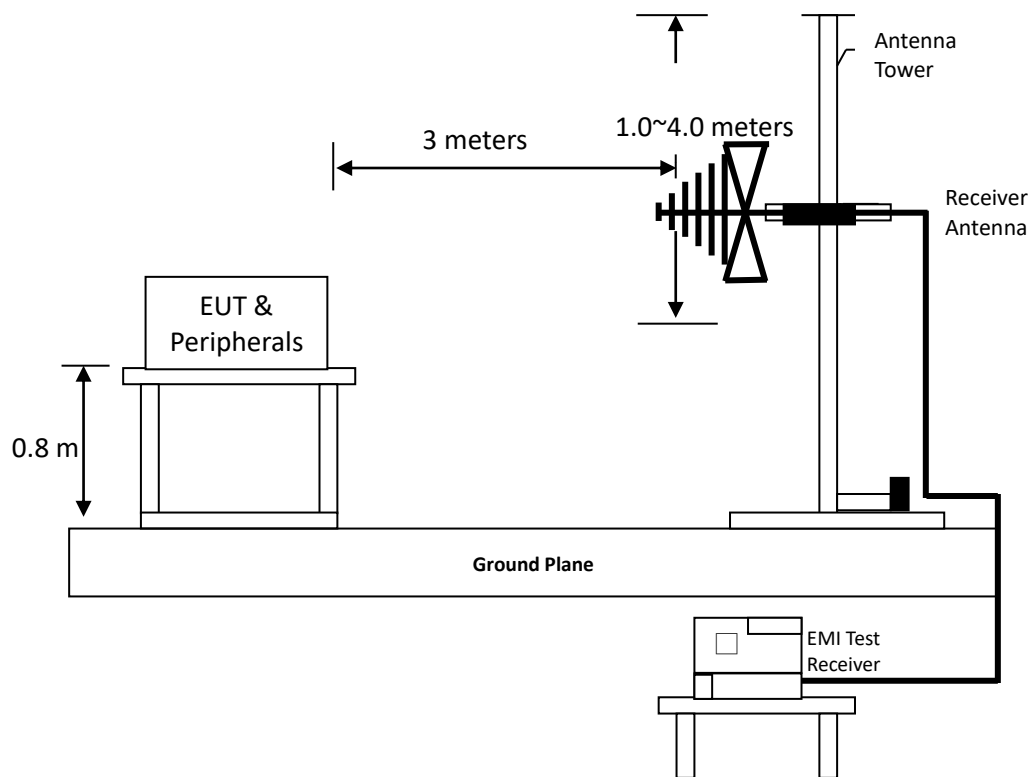

Radiated emission above 1GHz using Horn Antenna

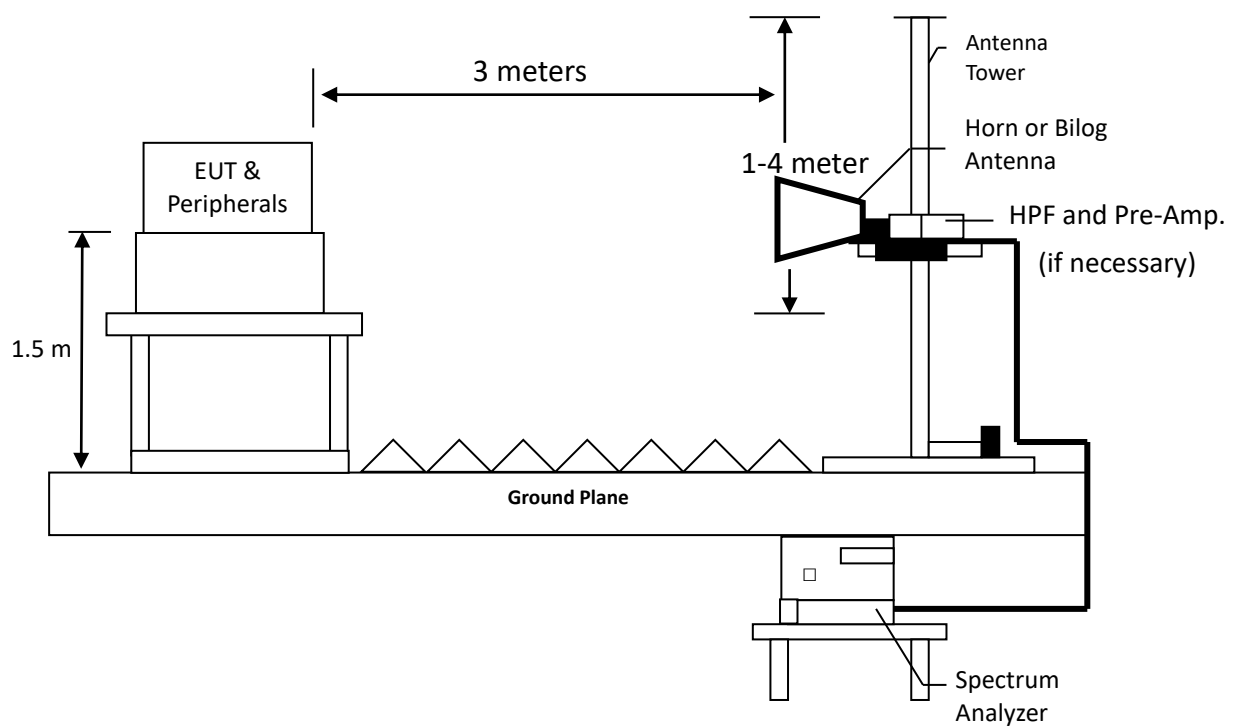

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 1/T minimum kHz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

6.3 Limit

Frequency (MHz)	Field Strength (uV/m)	Measurement distance (m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

6.4 Test Result

6.4.1 Measurement results: frequencies 9kHz to 30MHz

Temperature (°C) :	26
Relative Humidity (%) :	61
Test date :	2022/08/23

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11n(HT20) Channel 11.

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.249	AV	18.45	36.36	54.81	99.69	-44.88
Perpendicular	0.579	QP	18.85	30.31	49.16	72.38	-23.22
Perpendicular	1.119	QP	19.10	27.13	46.23	66.66	-20.43
Perpendicular	1.209	QP	19.10	27.50	46.60	65.96	-19.36
Perpendicular	1.778	QP	19.10	25.72	44.82	69.54	-24.72
Perpendicular	2.348	QP	19.09	22.53	41.62	69.54	-27.92

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.039	AV	19.35	38.90	58.25	121.63	-63.38
Parallel	0.189	AV	18.24	38.29	56.53	102.13	-45.60
Parallel	0.489	AV	18.79	34.19	52.98	93.82	-40.84
Parallel	0.699	QP	18.92	30.98	49.90	70.81	-20.91
Parallel	1.209	QP	19.10	30.08	49.18	65.96	-16.78
Parallel	1.599	QP	19.10	22.41	41.51	63.53	-22.02

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.069	AV	18.76	36.92	55.68	114.73	-59.05
Ground-parallel	0.579	QP	18.85	31.37	50.22	72.38	-22.16
Ground-parallel	1.179	QP	19.10	29.00	48.10	66.19	-18.09
Ground-parallel	1.359	QP	19.10	25.50	44.60	64.96	-20.36
Ground-parallel	1.748	QP	19.10	25.21	44.31	69.54	-25.23
Ground-parallel	2.348	QP	19.09	23.51	42.60	69.54	-26.94

Remark: Corr. Factor = Antenna Factor + Cable Loss

6.5.2 Measurement results: frequencies below 1 GHz

Temperature (°C) :	27
Relative Humidity (%) :	58
Test date :	2022/08/19

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11n(HT20) Channel 11.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	42.61	QP	20.25	15.35	35.60	40.00	-4.40
Vertical	168.71	QP	20.18	11.43	31.61	43.50	-11.89
Vertical	177.44	QP	19.36	9.93	29.29	43.50	-14.21
Vertical	353.98	QP	22.82	6.85	29.67	46.00	-16.33
Vertical	496.57	QP	26.57	10.10	36.67	46.00	-9.33
Vertical	729.37	QP	31.06	7.66	38.72	46.00	-7.28

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	296.75	QP	21.52	19.97	41.49	46.00	-4.51
Horizontal	333.61	QP	22.63	12.05	34.68	46.00	-11.32
Horizontal	370.47	QP	23.52	11.66	35.18	46.00	-10.82
Horizontal	445.16	QP	25.77	13.39	39.16	46.00	-6.84
Horizontal	482.02	QP	26.13	12.14	38.27	46.00	-7.73
Horizontal	729.37	QP	31.06	9.01	40.07	46.00	-5.93

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

6.5.3 Measurement results: frequency above 1GHz to 25GHz

Temperature (°C) :	27
Relative Humidity (%) :	58
Test date :	2022/08/19

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11b_Ch1	4824	PK	H	-6.47	47.21	40.74	74	-33.26
	4824	PK	V	-6.47	46.36	39.89	74	-34.11
802.11b_Ch6	4874	PK	H	-6.15	46.48	40.33	74	-33.67
	4874	PK	V	-6.15	46.26	40.11	74	-33.89
802.11b_Ch11	4924	PK	H	-6.02	44.46	38.44	74	-35.56
	4924	PK	V	-6.02	44.05	38.03	74	-35.97
802.11g_Ch1	4824	PK	H	-6.47	46.41	39.94	74	-34.06
	4824	PK	V	-6.47	46.01	39.54	74	-34.46
802.11g_Ch6	4874	PK	H	-6.15	46.36	40.21	74	-33.79
	4874	PK	V	-6.15	45.77	39.62	74	-34.38
802.11g_Ch11	4924	PK	H	-6.02	44.97	38.95	74	-35.05
	4924	PK	V	-6.02	45.41	39.39	74	-34.61
802.11n(HT20)_Ch1	4824	PK	H	-6.47	46.93	40.46	74	-33.54
	4824	PK	V	-6.47	46.76	40.29	74	-33.71
802.11n(HT20)_Ch6	4874	PK	H	-6.15	46.17	40.02	74	-33.98
	4874	PK	V	-6.15	46.69	40.54	74	-33.46
802.11n(HT20)_Ch11	4924	PK	H	-6.02	44.23	38.21	74	-35.79
	4924	PK	V	-6.02	44.19	38.17	74	-35.83

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

7. Emission on Band Edge

7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T minimum kHz
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).


7.3 Test Results

Temperature (°C) :	27
Relative Humidity (%) :	58
Test date :	2022/08/19


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b	2325.77	PK	H	34.51	8.39	42.90	74	-31.10	2310~2390
	2356.17	AV	H	34.41	-2.57	31.84	54	-22.16	
	2496.20	PK	H	34.70	7.26	41.96	74	-32.04	2483.5~2500
	2489.55	AV	H	34.64	-2.69	31.95	54	-22.05	
802.11g	2316.65	PK	H	34.53	8.53	43.06	74	-30.94	2310~2390
	2384.29	AV	H	34.28	-1.74	32.54	54	-21.46	
	2494.30	PK	H	34.68	8.33	43.01	74	-30.99	2483.5~2500
	2484.61	AV	H	34.59	-2.27	32.32	54	-21.68	
802.11n (HT20)	2351.99	PK	H	34.43	8.61	43.04	74	-30.96	2310~2390
	2383.72	AV	H	34.28	-2.54	31.74	54	-22.26	
	2500.00	PK	H	34.73	8.43	43.16	74	-30.84	2483.5~2500
	2494.68	AV	H	34.68	-2.44	32.24	54	-21.76	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch1 PK

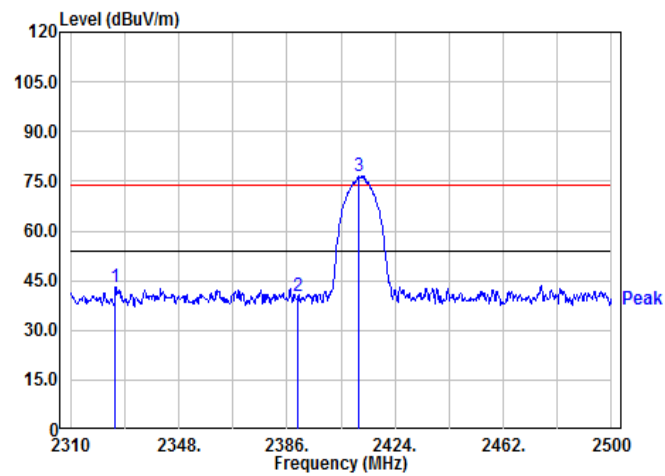


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch1 AV

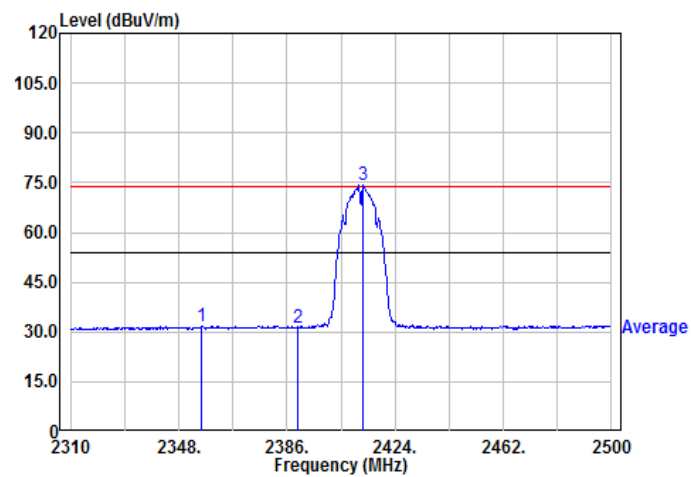


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch11 PK

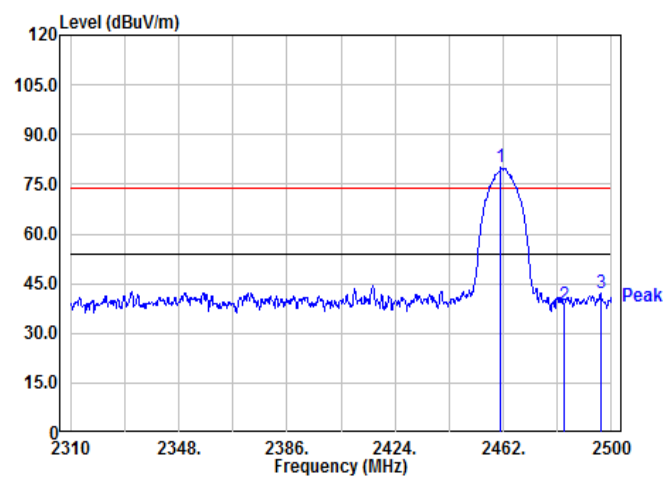


Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch11 AV

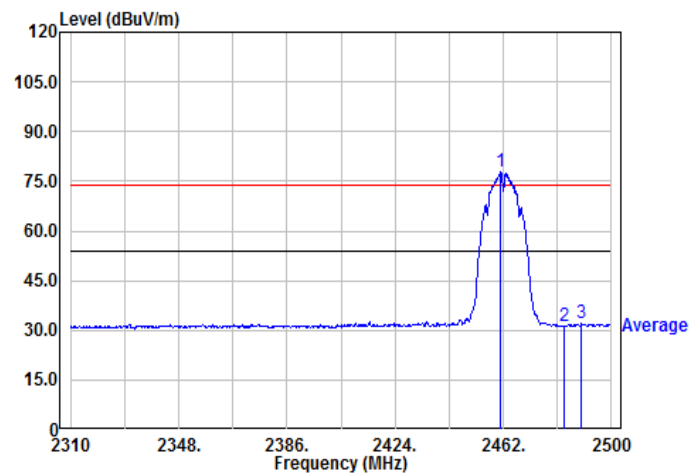


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch1 PK

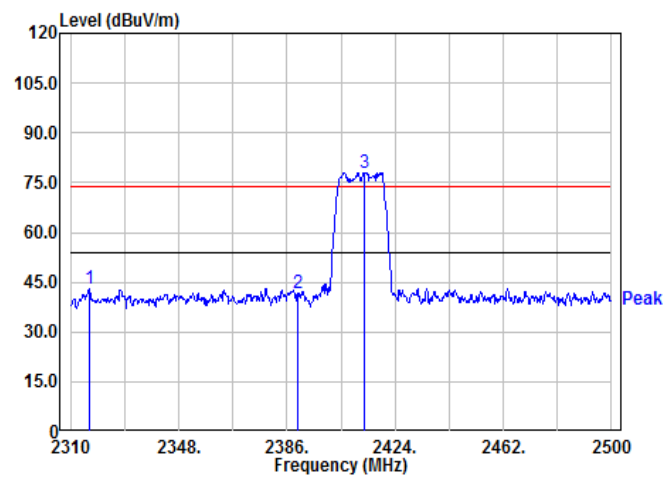


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch1 AV

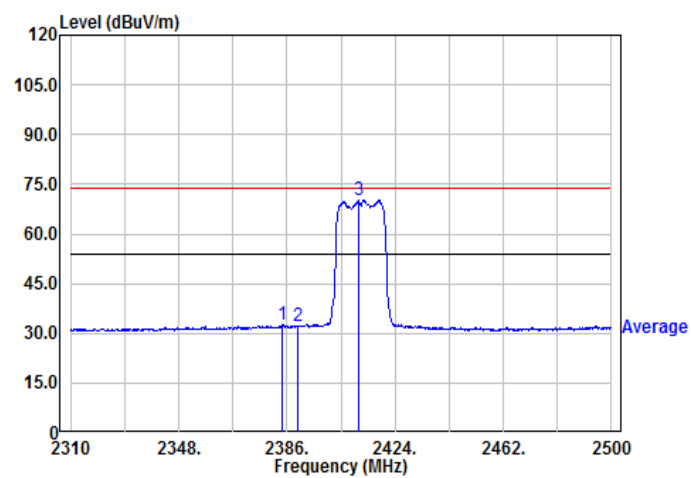


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch11 PK

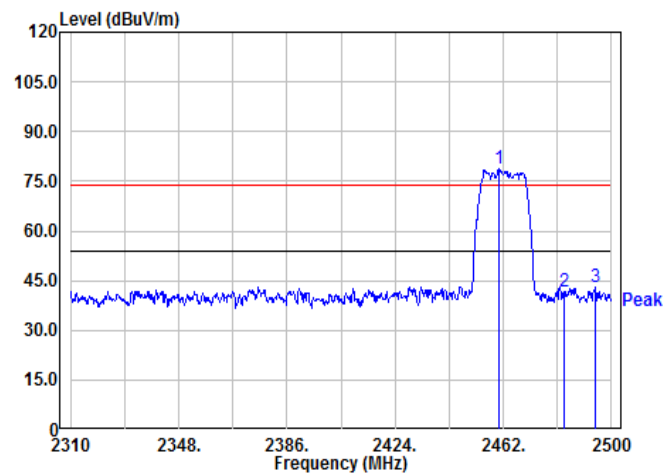


Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch11 AV

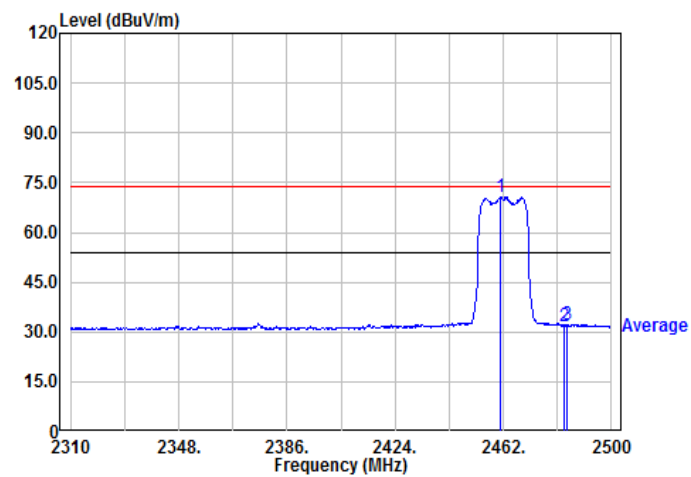


Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 PK

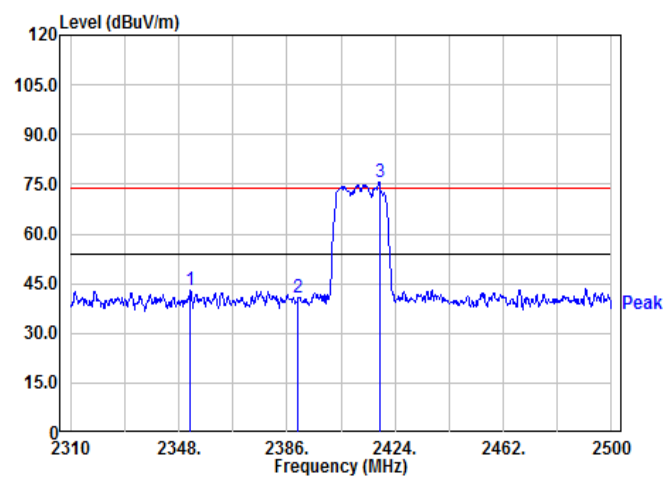


Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 AV

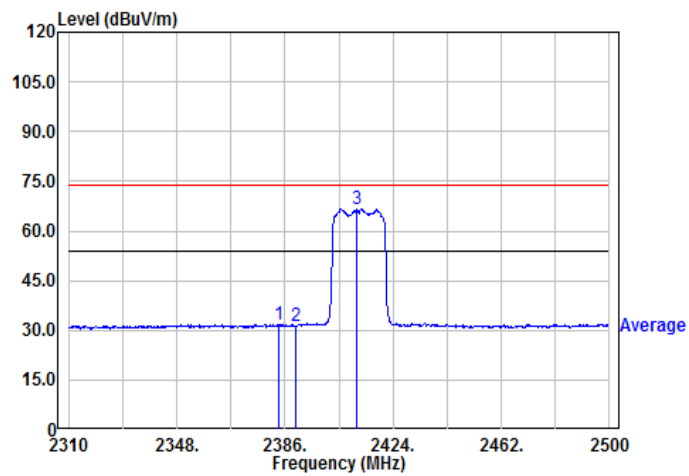

Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 PK

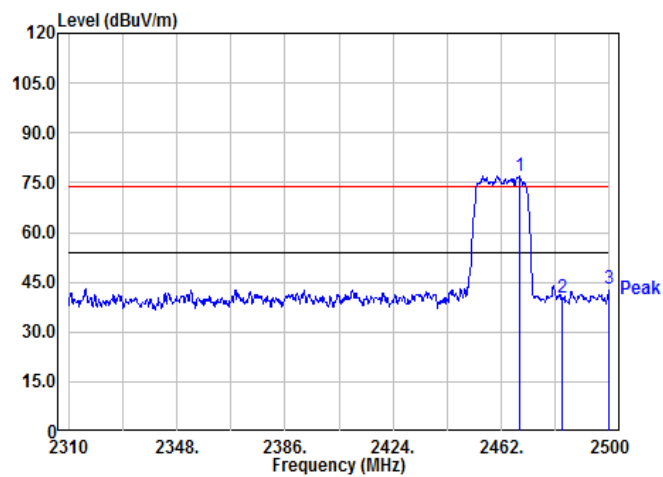

Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 AV

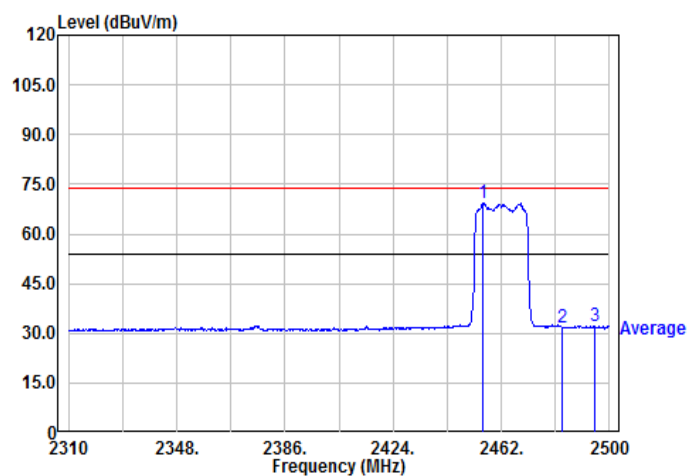

8. AC Power Line Conducted Emission


8.1 Measuring instrument setting

Receiver Function	Setting
Detector	QP
Start frequency	0.15MHz
Stop frequency	30MHz
IF bandwidth	9 kHz
Attenuation	10dB

8.2 Test Procedure

Step 1	Configure the EUT according to ANSI C63.10:2013. The EUT or host of EHT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
Step 2	Connect EUT or host of EUT to the power mains through a line impedance stabilization network.
Step 3	All the companion devices are connected to the other LISN. The LISN should provide 50Uh/50ohms coupling impedance.
Step 4	The frequency range from 150 kHz to 30MHz was searched.
Step 5	Set the test-receiver system to peak detector and specified bandwidth with maximum hold mode.
Step 6	The measurement has to be done between each power line and ground at the power terminal.

8.3 Test Diagram

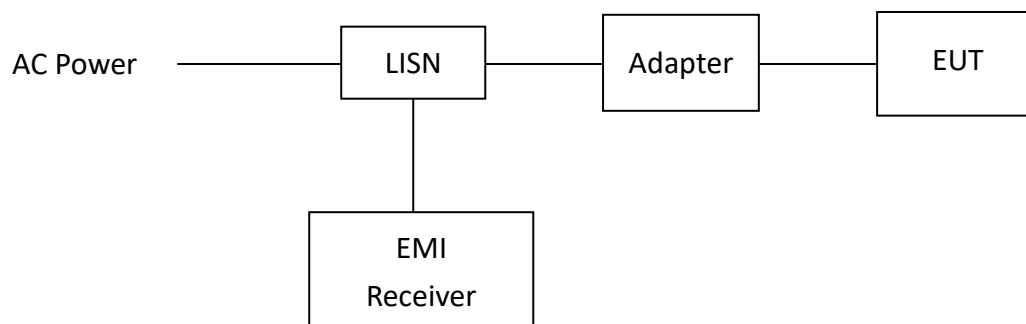


8.4 Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56	56 – 46
0.50~5.00	56	46
5.00~30.0	60	50

8.5 Test Results

Test Condition: Tx mode

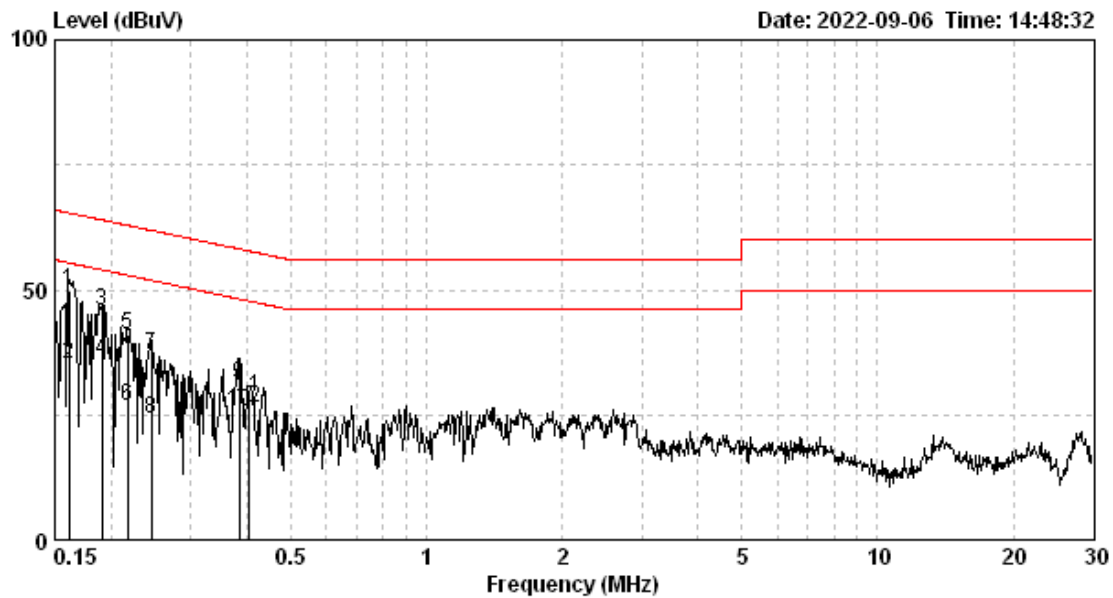


Test voltage :AC 120V / 60Hz
Temp. / R.H. :28 °C / 60 %
Atmospheric pressure :1008 hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
LINE	0.162	9.65	40.19	49.84	65.38	25.52	35.17	55.38	-15.54	-20.21
LINE	0.190	9.65	36.04	45.69	64.02	26.42	36.07	54.02	-18.33	-17.95
LINE	0.217	9.65	31.31	40.96	62.92	17.27	26.92	52.92	-21.96	-26.00
LINE	0.246	9.65	27.42	37.07	61.91	14.49	24.14	51.91	-24.83	-27.77
LINE	0.385	9.66	21.48	31.14	58.17	16.12	25.78	48.17	-27.02	-22.39
LINE	0.404	9.66	18.86	28.52	57.77	16.85	26.51	47.77	-29.25	-21.26

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

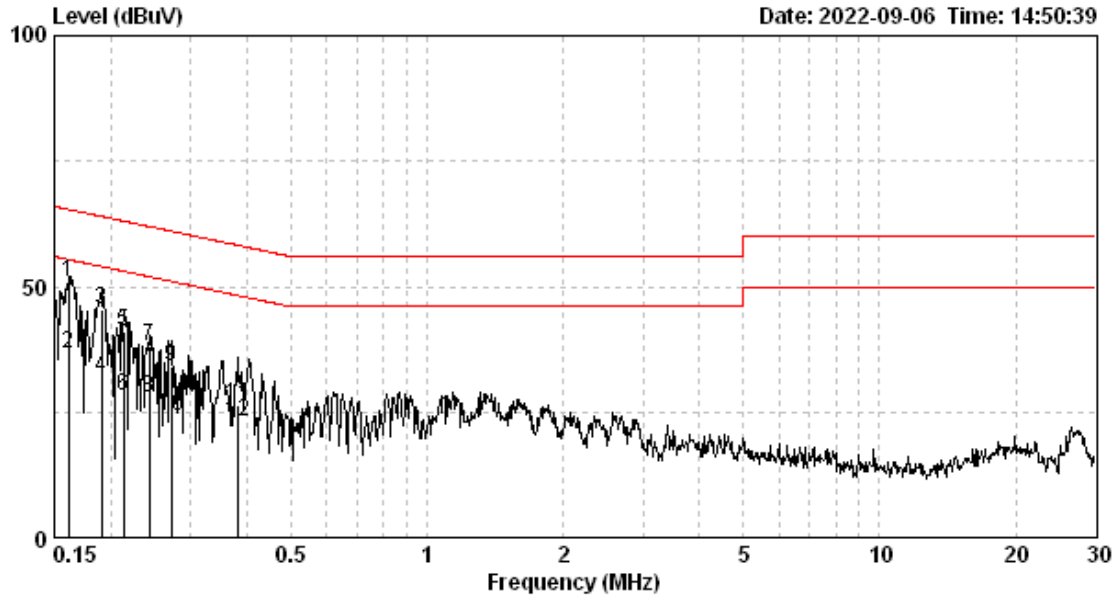

Test voltage :AC 120V / 60Hz
 Temp. / R.H. :28 °C / 60 %
 Atmospheric pressure :1008 hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading	Level	Limit	Reading	Level	Limit	Margin (dB)	
			QP (dBuV)	QP (dBuV)	QP (dBuV)	AV (dBuV)	AV (dBuV)	AV (dBuV)	QP	AV
NEUTRAL	0.162	9.66	41.13	50.79	65.38	26.91	36.57	55.38	-14.59	-18.81
NEUTRAL	0.190	9.66	35.91	45.57	64.02	22.06	31.72	54.02	-18.45	-22.30
NEUTRAL	0.214	9.66	31.45	41.11	63.05	18.73	28.39	53.05	-21.94	-24.67
NEUTRAL	0.243	9.66	28.57	38.24	62.00	18.29	27.95	52.00	-23.76	-24.04
NEUTRAL	0.272	9.66	24.51	34.18	61.07	14.40	24.07	51.07	-26.89	-27.01
NEUTRAL	0.381	9.67	16.81	26.47	58.25	13.51	23.18	48.25	-31.78	-25.08

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2022/08/09	2023/08/08
Signal Analyzer	Agilent	N9030A	MY51380492	2022/08/09	2023/08/08
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2022/04/13	2023/04/12
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2022/01/20	2023/01/19
Horn Antenna	SHWARZBECK	BBHA 9120 D	9120D-456	2022/01/21	2023/01/20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2020/08/20	2023/08/19
Pre-amplifier	SGH	SGH184	20201124-1	2021/12/06	2022/12/05
Power Meter	Anritsu	ML2495A	0844001	2022/07/04	2023/07/03
966-2(A) Cable	SUHNER	SUCOFLEX 104	295105/4	2022/03/04	2023/03/03
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2022/03/04	2023/03/03
966-2 Cable	SUHNER	SUCOFLEX 104P	9403/4P	2021/11/30	2022/11/29
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2022/01/14	2023/01/13
Hight Pass Filter	Reactel	7HS-3G/18G-S11	N/A	2022/05/25	2023/05/24
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2022/05/25	2023/05/24
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

Test Equipment	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	R&S	ESCI	100018	2021/11/16	2022/11/15
LISN	R&S	ENV216	101160	2022/07/13	2023/07/12
CON-2 Cable	SUHNER	EMCCFD300-BM -NM-6000	170502	2022/04/29	2023/04/28
Test software	Audix	e3	V4.20040112L	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
Occupied Bandwidth	7.78 %
Maximum Peak Conducted Output Power	0.44 dB
Power Spectral Density	1.27 dB
Emissions In Non-Restricted Frequency Bands	1.27 dB
AC Power Line Conducted Emission	3.08 dB