


TEST REPORT

For LORA

Report No. : **CHEW23110070** Report Verification: 


Project No..... : **SHT2306080101EW**

FCC ID..... : **2A8OE-F8926-GW-02**

Applicant's name..... : **Xiamen Four-Faith Communication Technology Co., Ltd.**

Address..... : 11th Floor,A-06 Area,No.370,Chengyi Street,Jimei,Xiamen,Fujian,China.

Product Name : **LoRaWAN Gateway**

Trade Mark : 

Model No. : F8926-GW-02

Listed Model(s) : -


Standard : **FCC CFR Title 47 Part 15 Subpart C § 15.247**

Date of receipt of test sample..... : Aug. 07, 2023


Date of testing..... : Aug. 14, 2023- Nov. 24, 2023

Date of issue..... : Nov. 27, 2023

Result..... : PASS

Compiled by 
 (Position+Printed name+Signature): File administrator Caspar Chen

Supervised by 
 (Position+Printed name+Signature): Project Engineer Caspar Chen

Approved by 
 (Position+Printed name+Signature): RF Manager Xu yang

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Support unit used in test configuration and system	7
4.4.	Testing environmental condition	7
4.5.	Statement of the measurement uncertainty	8
4.6.	Equipment Used during the Test	9
5.	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	14
5.4.	Power Spectral Density	15
5.5.	6dB bandwidth	16
5.6.	99% Occupied Bandwidth	17
5.7.	Duty Cycle	18
5.8.	Conducted Band edge and Spurious Emission	19
5.9.	Radiated Band edge Emission	21
5.10.	Radiated Spurious Emission	23
6.	TEST SETUP PHOTOS	28
7.	EXTERNAL AND INTERNAL PHOTOS	30
7.1.	External Photos	30
7.2.	Internal Photos	32
8.	APPENDIX REPORT	36

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart C § 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2023-11-27	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Caspar Chen
5.2	AC Conducted Emission	15.207	PASS	Caspar Chen
5.3	Peak Output Power	15.247(b)(3)	PASS	Caspar Chen
5.4	Power Spectral Density	15.247(e)	PASS	Caspar Chen
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Caspar Chen
5.6	99% Occupied Bandwidth	-	PASS* ¹	Caspar Chen
5.7	Duty cycle	-	PASS* ¹	Caspar Chen
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Caspar Chen
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Yifan Wang

Note:


- The measurement uncertainty is not included in the test result.
- *1: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Xiamen Four-Faith Communication Technology Co., Ltd.
Address:	11th Floor,A-06 Area,No.370,Chengyi Street,Jimei,Xiamen,Fujian,China.
Manufacturer:	Xiamen Four-Faith Communication Technology Co., Ltd.
Address:	11th Floor,A-06 Area,No.370,Chengyi Street,Jimei,Xiamen,Fujian,China.

3.2. Product Description

Main unit information:	
Product Name:	LoRaWAN Gateway
Trade Mark:	
Model No.:	F8926-GW-02
Listed Model(s):	-
Power supply:	DC 12V from Adapter
Hardware version:	V 1.0.0.2
Software version:	F8926GW-V2-IOTGW-32M-STD-VPN-20230313.flash
Accessory unit information:	
Adapter information:	MODEL: KL-AD3060VA INPUT: 100-240V~50/60Hz 0.7A OUTPUT: DC 12V, 1.5A

3.3. Radio Specification Description

Support function ^{*2} :	LORA
Modulation:	LORA
Operation frequency:	903MHz~914.2MHz
Channel number:	8
Channel separation:	1.6MHz
Antenna type:	External antenna
Antenna gain:	1.78dBi

Note:

*2: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Contact information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
CH-L	903.0
CH-M	907.8
CH-H	914.2

4.2. Descriptions of Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT connect to laptop by USB cable. the laptop control LORA transmitting.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

4.4. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.5. Statement of the measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.6. Equipment Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2023/08/22	2024/08/21
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2023/08/22	2024/08/21
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2023/05/23	2024/05/22
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2023/8/22	2024/8/21
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2023/8/18	2024/8/17
●	Protection Network	SCHWARZBECK	HTWE0567	VTSD9561FN	00899	2023/8/18	2024/8/17
●	ISN	FCC	HTWE0148	FCC-TLISN-T2-02	20371	2023/8/18	2024/8/17
●	ISN	FCC	HTWE0150	FCC-TLISN-T8-02	20375	2023/8/18	2024/8/17
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission – 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/8/22	2024/8/21
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/4/6	2024/4/5
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission - 30MHz~1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/8/22	2024/8/21
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission-Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2023/8/22	2024/8/21
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2023/2/20	2026/2/19
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

Passed Not Applicable

The antenna type is an External antenna, please refer to the below antenna photo.



5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

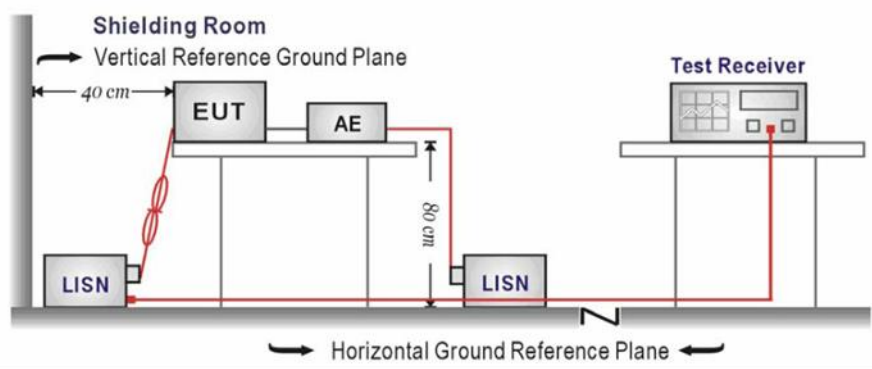

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Test Line:

L

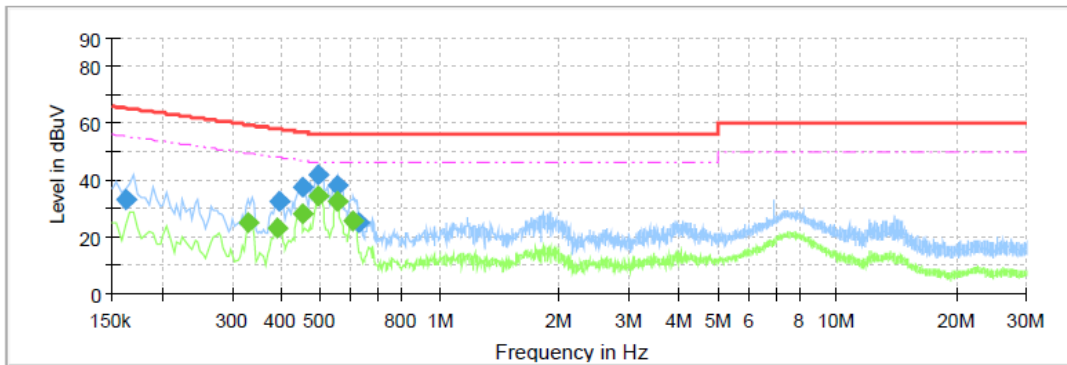


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1620	33.00	---	65.36	32.36	L1	10.0
0.3315	---	25.11	49.41	24.31	L1	10.0
0.3915	---	23.40	48.03	24.64	L1	10.0
0.3955	32.45	---	57.95	25.50	L1	10.0
0.4515	---	28.03	46.85	18.82	L1	10.0
0.4515	37.30	---	56.85	19.55	L1	10.0
0.4955	41.83	---	56.08	14.24	L1	10.0
0.4955	---	34.63	46.08	11.45	L1	10.0
0.5515	38.30	---	56.00	17.70	L1	10.0
0.5515	---	32.28	46.00	13.72	L1	10.0
0.6075	---	25.78	46.00	20.22	L1	10.0
0.6275	25.14	---	56.00	30.86	L1	10.0

Test Line:

N

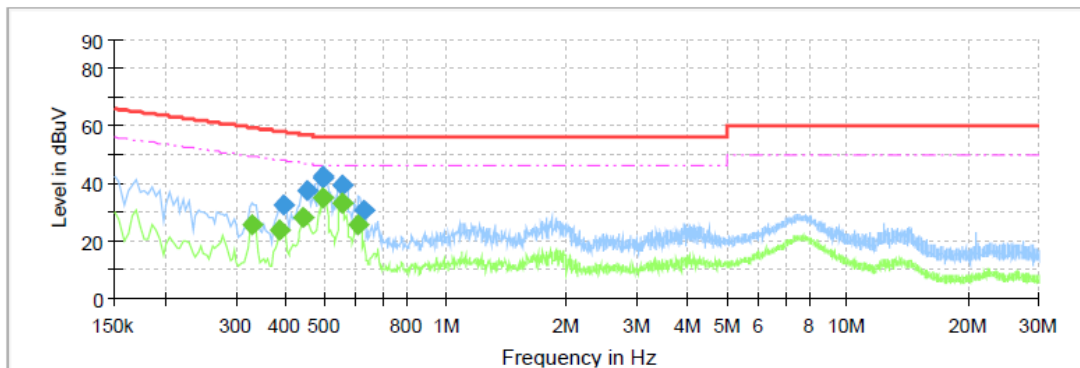

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.3315	---	25.41	49.41	24.01	N	10.0
0.3875	---	23.77	48.12	24.35	N	10.0
0.3955	32.80	---	57.95	25.14	N	10.0
0.4435	---	28.17	47.00	18.83	N	10.0
0.4515	37.59	---	56.85	19.26	N	10.0
0.4955	42.14	---	56.08	13.93	N	10.0
0.4955	---	34.91	46.08	11.17	N	10.0
0.4965	42.36	---	56.06	13.70	N	10.0
0.5515	39.12	---	56.00	16.88	N	10.0
0.5515	---	32.99	46.00	13.01	N	10.0
0.6075	---	25.58	46.00	20.42	N	10.0
0.6235	30.88	---	56.00	25.12	N	10.0

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

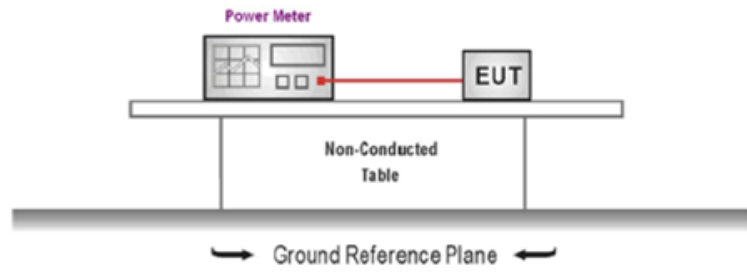

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA

Refer to the appendix report


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

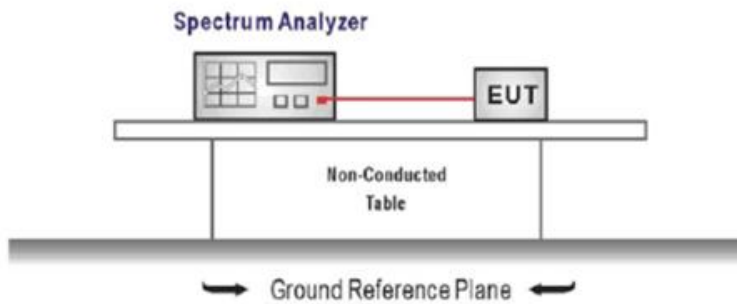

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA

Refer to the appendix report


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

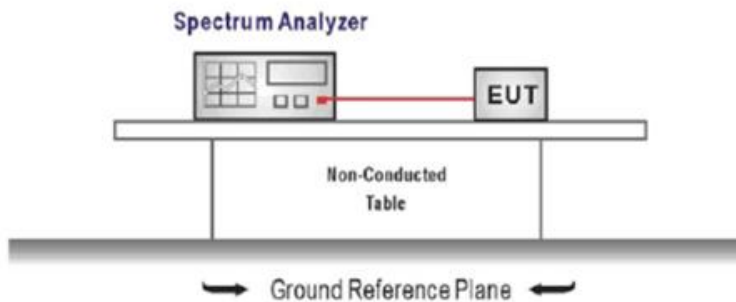

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency =DTS channel center frequency
Span=2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time= auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

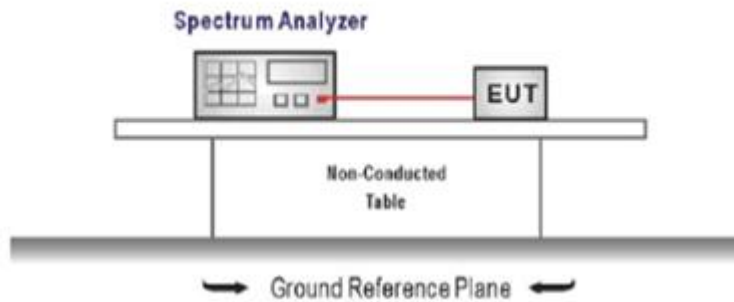

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times$ OBW
RBW = 1%~5%OBW
VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION

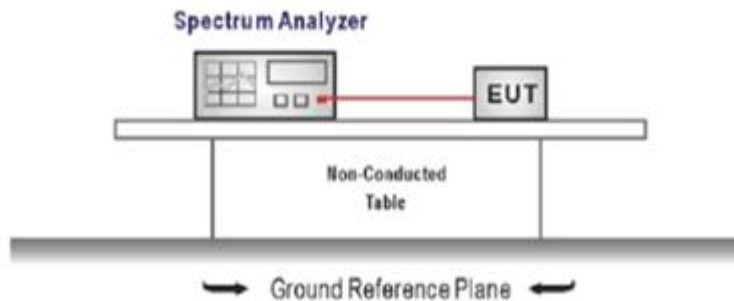

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW \geq RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE:

Refer to the clause 4.2

TEST DATA


Refer to the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

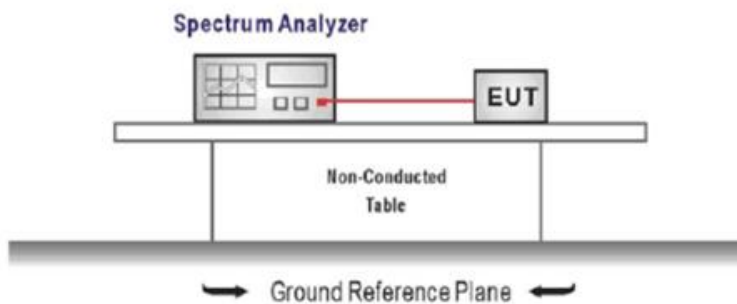

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed **Not Applicable**

TEST DATA

Refer to the appendix report


5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

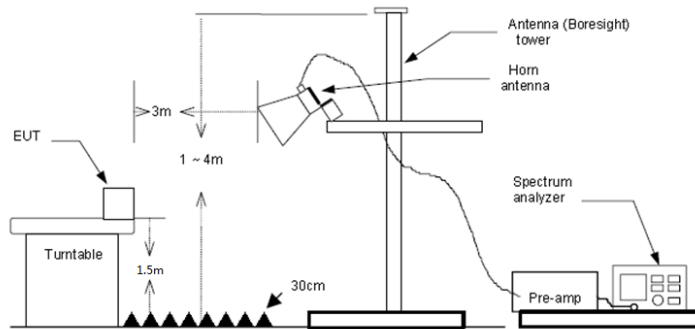

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level- Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Test channel:		CH-L			Polarity			Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	902.00	12.69	22.90	6.16	0.00	41.75	75.92	-34.17	Peak	
2	903.03	66.85	22.91	6.16	0.00	95.92	75.92	20.00	Peak	

Test channel:		CH-L			Polarity			Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	902.00	14.36	22.90	6.16	0.00	43.42	79.08	-35.66	Peak	
2	903.03	70.01	22.91	6.16	0.00	99.08	79.08	20.00	Peak	

Test channel:		CH-H			Polarity			Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	914.26	66.29	22.93	6.22	0.00	95.44	75.44	20.00	Peak	
2	928.00	12.71	22.96	6.26	0.00	41.93	75.44	-33.51	Peak	

Test channel:		CH-H			Polarity			Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	914.26	69.80	22.93	6.22	0.00	98.95	78.95	20.00	Peak	
2	928.00	12.12	22.96	6.26	0.00	41.34	78.95	-37.61	Peak	

NOTE: The limit is calculated by 20dB down from fundamental peak

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9 kHz ~ 30 MHz

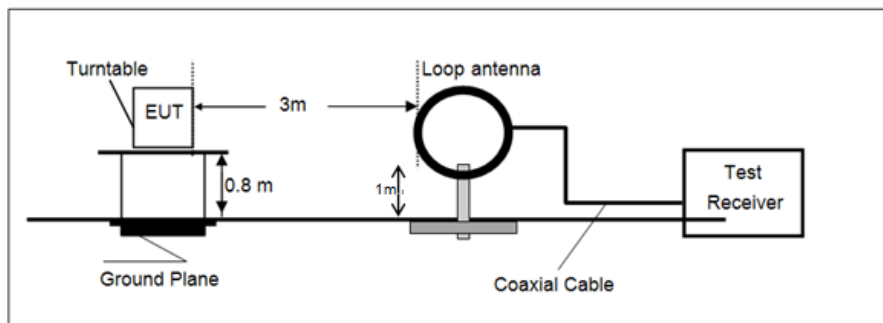

- 30 MHz ~ 1 GHz

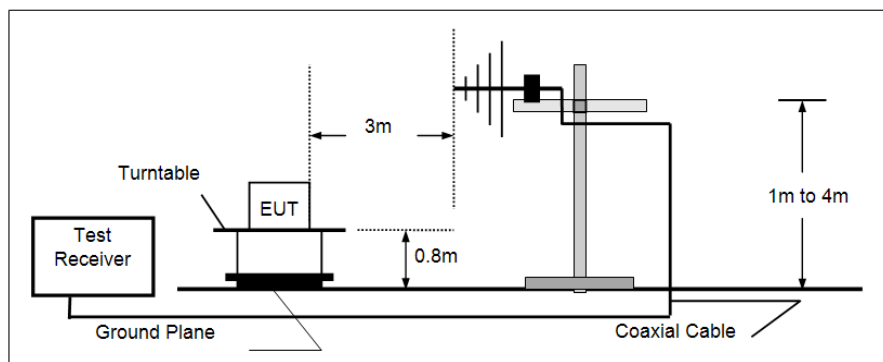

- Above 1 GHz

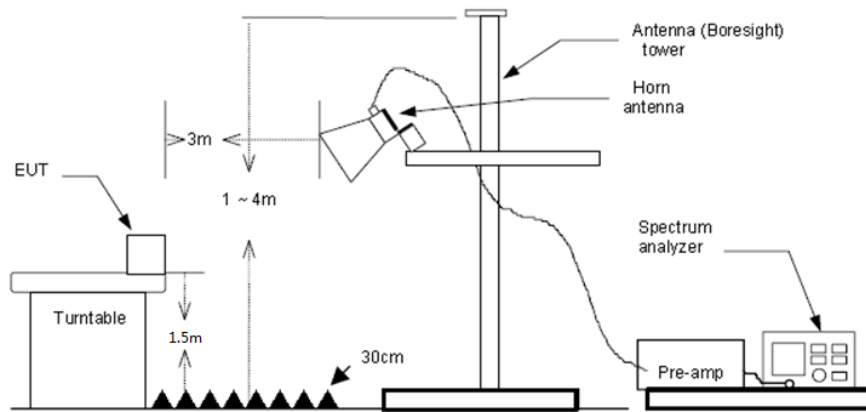

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
 - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - For average measurement:
 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Refer to the clause 4.2

TEST RESULT

Passed **Not Applicable**

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

FOR 9 kHz ~ 30 MHz


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

FOR 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH-L which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

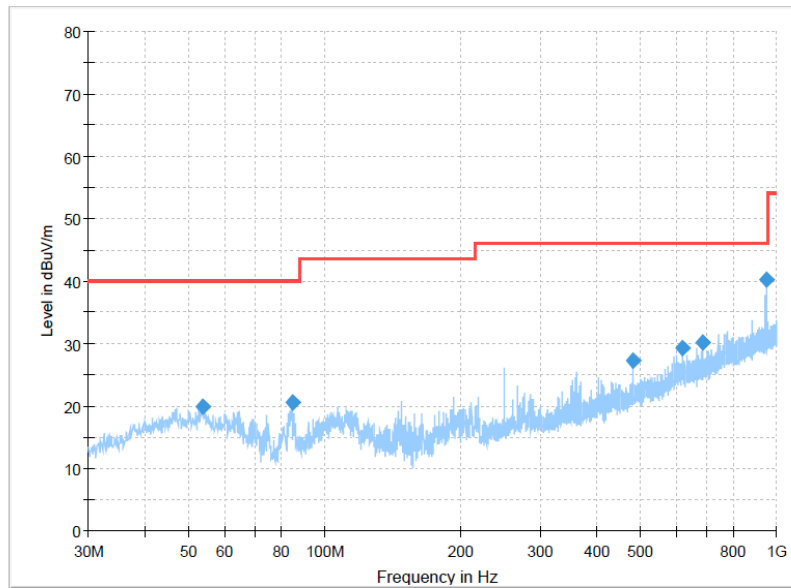


Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.8863	19.94	40.00	20.06	300.0	H	199.0	-9.1
84.9263	20.53	40.00	19.47	300.0	H	191.0	-14.5
479.9588	27.19	46.00	18.81	100.0	H	198.0	-2.8
618.9113	29.31	46.00	16.69	300.0	H	318.0	1.4
687.5388	30.22	46.00	15.78	100.0	H	325.0	2.1
948.4688	40.20	46.00	5.80	100.0	H	285.0	7.1

Polarization:

Vertical

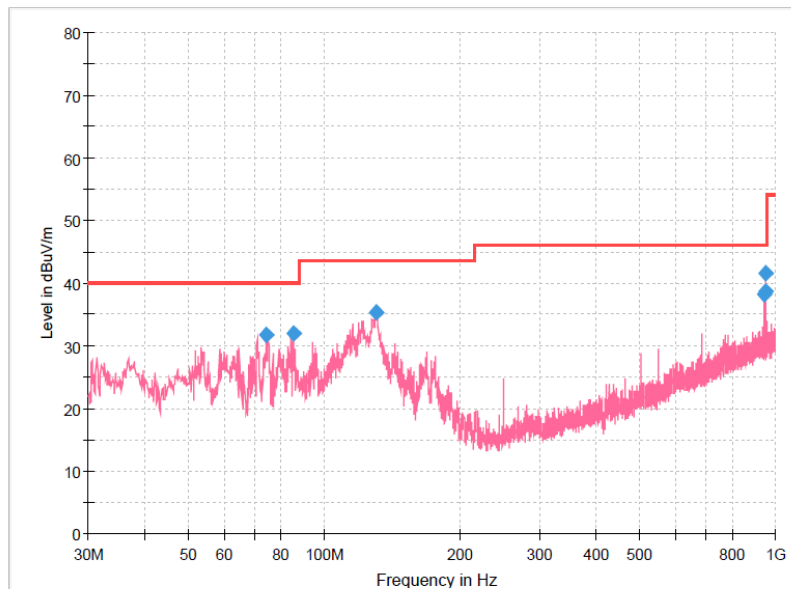

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
74.4988	31.64	40.00	8.36	100.0	V	149.0	-14.9
85.5325	32.02	40.00	7.98	100.0	V	243.0	-14.4
130.2738	35.30	43.50	8.20	100.0	V	161.0	-13.9
945.1950	38.29	46.00	7.71	100.0	V	75.0	7.1
947.9838	38.75	46.00	7.25	100.0	V	254.0	7.1
948.4688	41.62	46.00	4.38	100.0	V	98.0	7.1

NOTE: For blocking the fundamental A Notch filter was used in the testing

FOR 1 GHz ~ 10 GHz

Test channel		CH-L			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1063.00	53.53	25.03	2.66	42.40	38.82	74.00	-35.18	Peak
2	1805.01	53.90	25.32	3.56	42.09	40.69	74.00	-33.31	Peak
3	1993.40	50.64	26.06	3.68	41.90	38.48	74.00	-35.52	Peak
4	5762.24	44.25	31.92	6.66	40.71	42.12	74.00	-31.88	Peak

Test channel		CH-L			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1491.30	53.25	25.73	3.20	42.20	39.98	74.00	-34.02	Peak
2	1805.01	53.97	25.32	3.56	42.09	40.76	74.00	-33.24	Peak
3	2124.37	52.84	27.35	3.80	41.86	42.13	74.00	-31.87	Peak
4	5762.24	50.94	31.92	6.66	40.71	48.81	74.00	-25.19	Peak

Test channel		CH-M			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1060.30	51.73	25.02	2.66	42.40	37.01	74.00	-36.99	Peak
2	1814.22	52.88	25.36	3.56	42.08	39.72	74.00	-34.28	Peak
3	4946.07	51.83	31.20	6.06	41.17	47.92	74.00	-26.08	Peak
4	5448.41	45.63	31.79	6.59	40.85	43.16	74.00	-30.84	Peak



Test channel		CH-M			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1814.22	53.42	25.36	3.56	42.08	40.26	74.00	-33.74	Peak
2	2129.79	49.45	27.40	3.82	41.85	38.82	74.00	-35.18	Peak
3	4946.07	52.32	31.20	6.06	41.17	48.41	74.00	-25.59	Peak
4	5762.24	49.88	31.92	6.66	40.71	47.75	74.00	-26.25	Peak

Test channel		CH-H			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1065.71	51.83	25.03	2.66	42.40	37.12	74.00	-36.88	Peak
2	1828.13	52.07	25.41	3.57	42.06	38.99	74.00	-35.01	Peak
3	1993.40	50.64	26.06	3.68	41.90	38.48	74.00	-35.52	Peak
4	5762.24	44.45	31.92	6.66	40.71	42.32	74.00	-31.68	Peak

Test channel		CH-H			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1828.13	56.86	25.41	3.57	42.06	43.78	74.00	-30.22	Peak
2	2651.00	48.91	27.60	4.33	41.80	39.04	74.00	-34.96	Peak
3	5762.24	50.46	31.92	6.66	40.71	48.33	74.00	-25.67	Peak
4	7413.73	46.32	36.20	7.84	41.02	49.34	74.00	-24.66	Peak

6. TEST SETUP PHOTOS

Radiated Emission

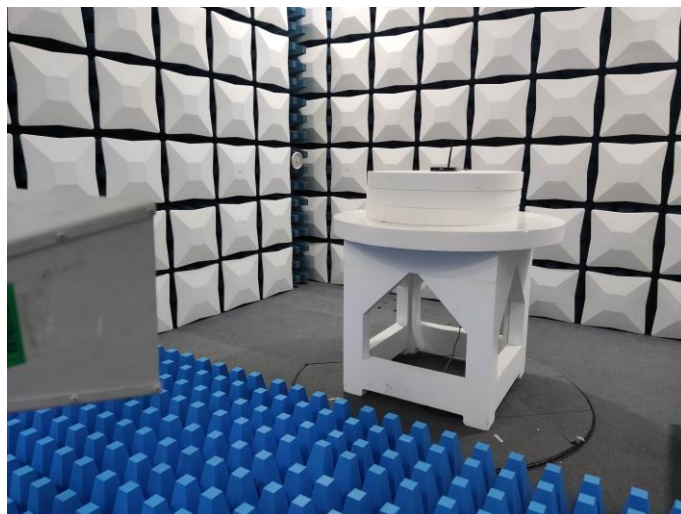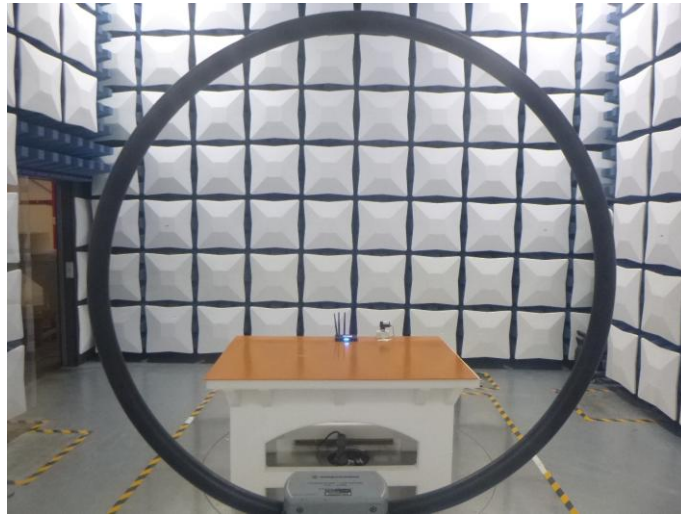




AC Conducted Emission





7. EXTERNAL AND INTERNAL PHOTOS




7.1. External Photos

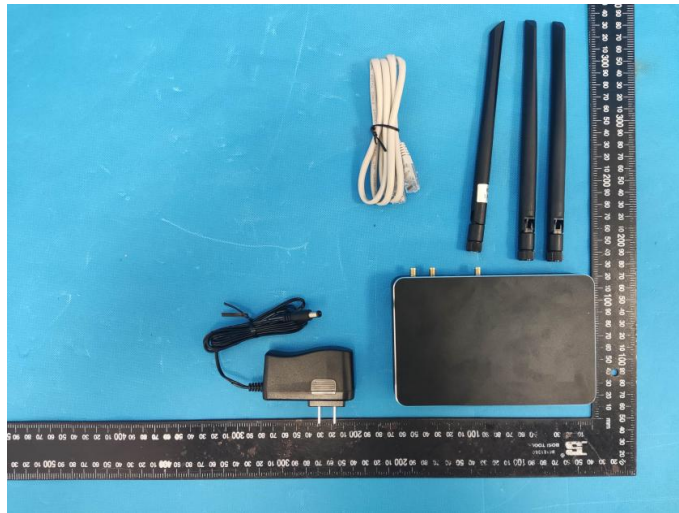


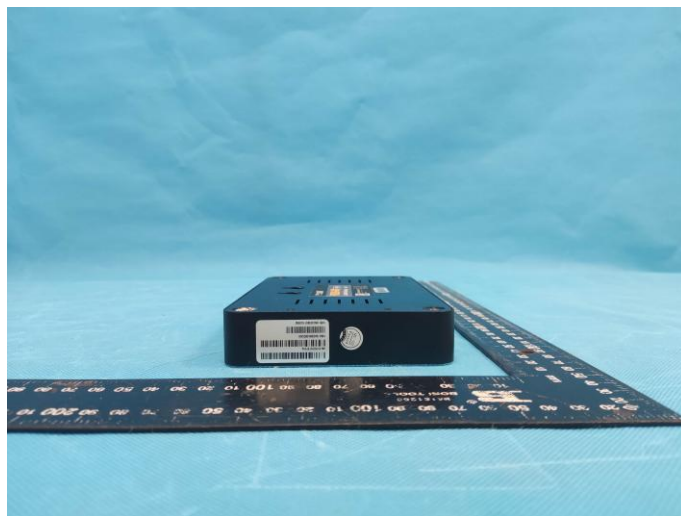
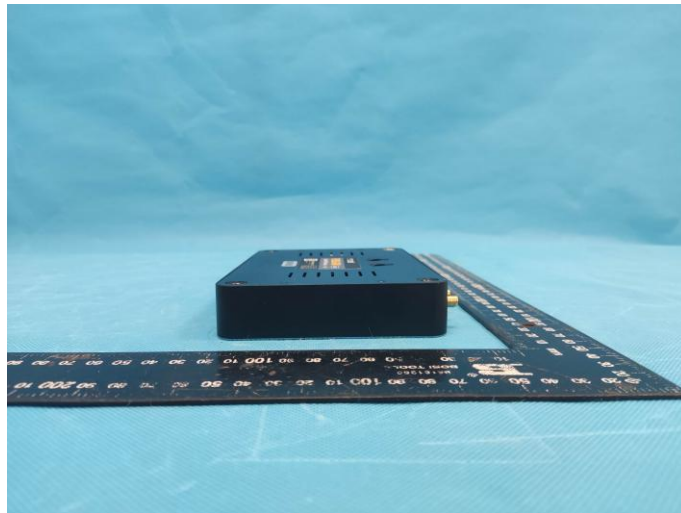



7.2. Internal Photos

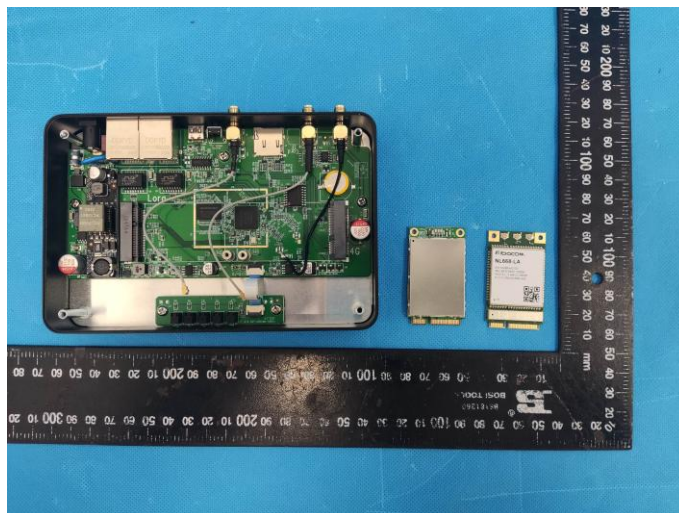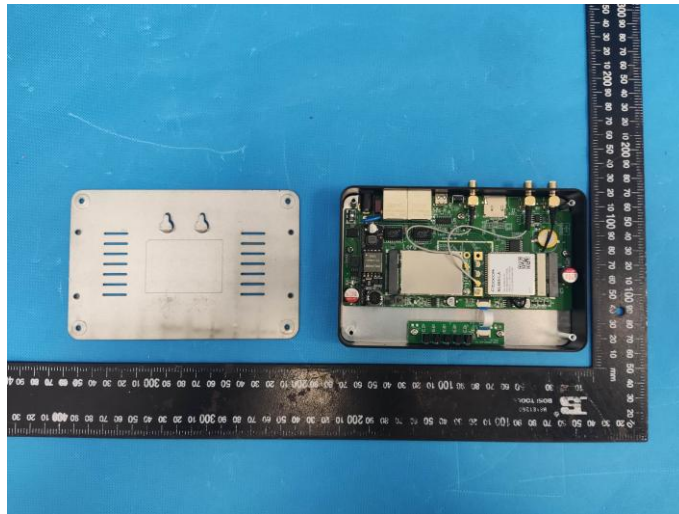

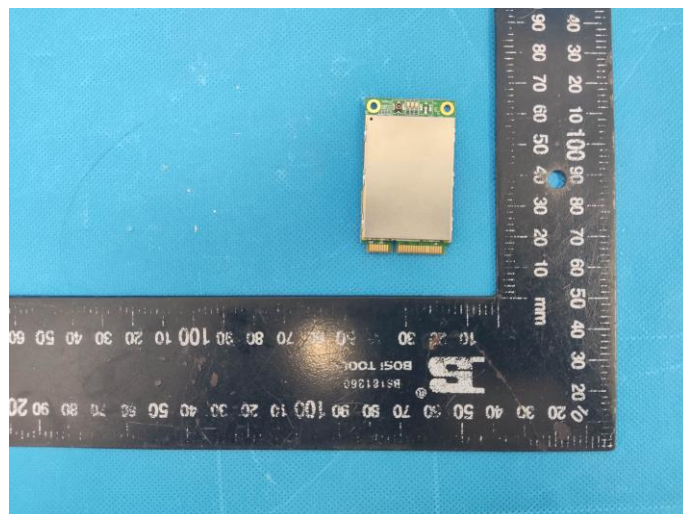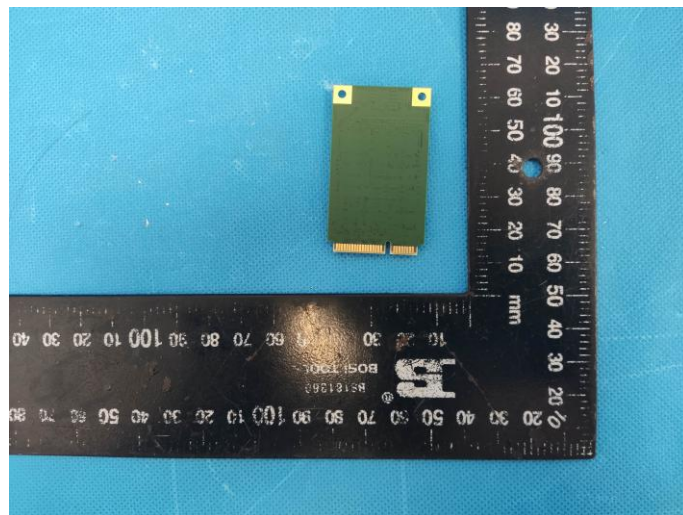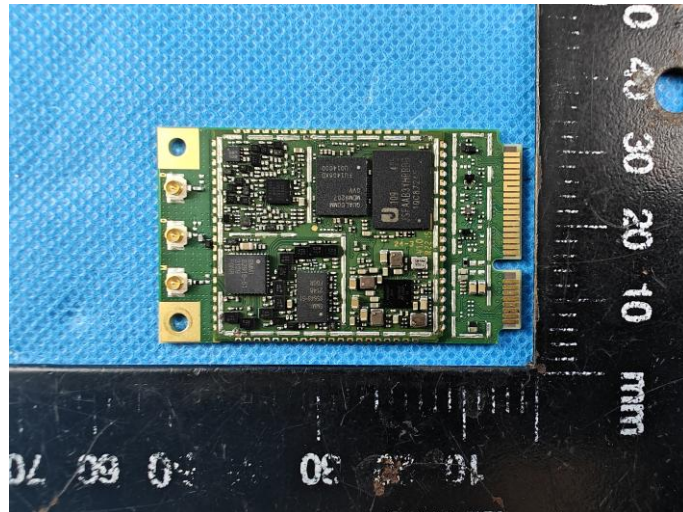

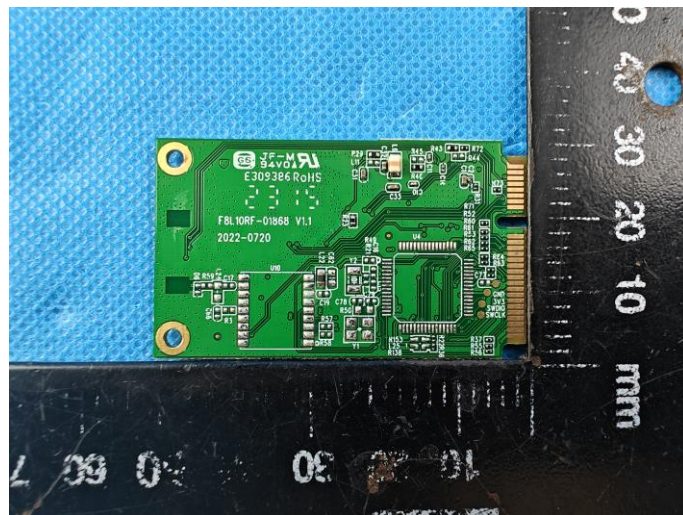

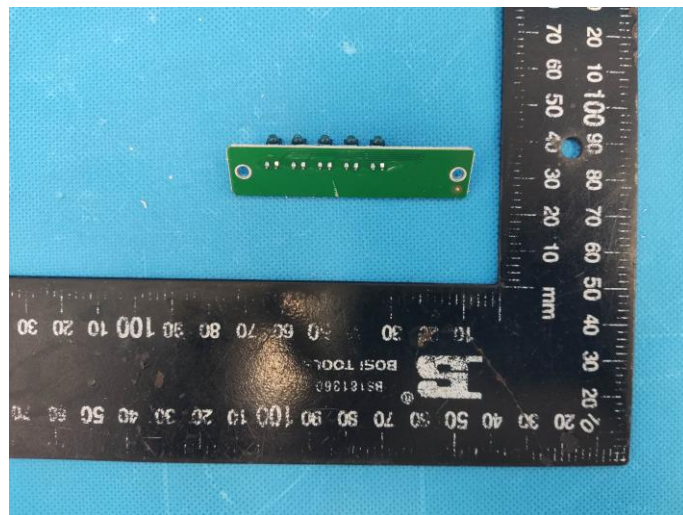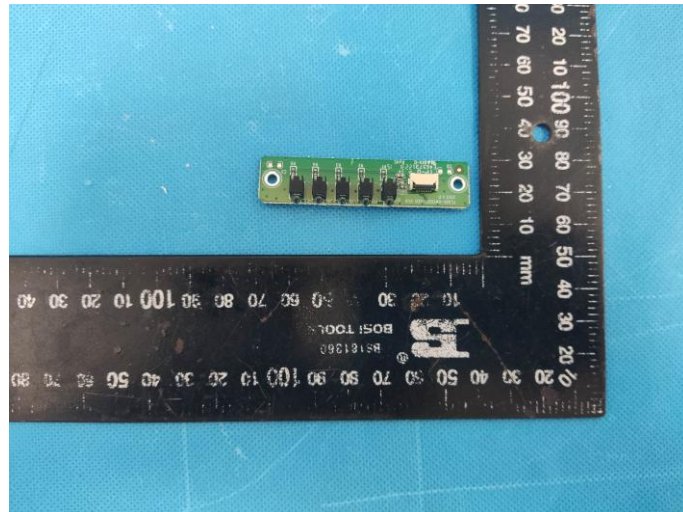

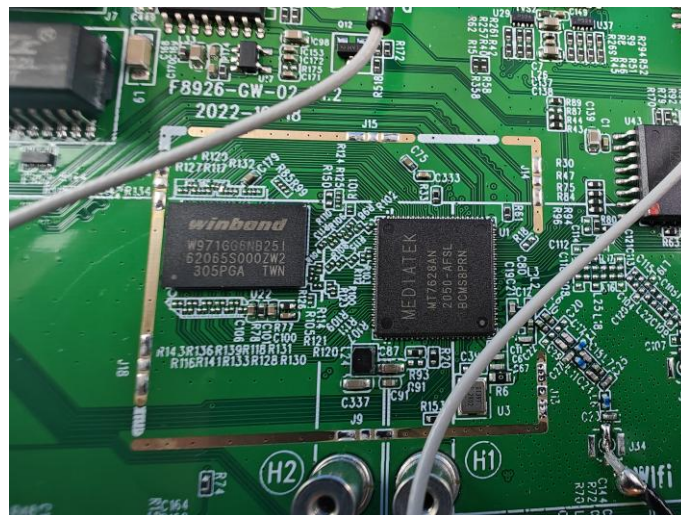

8. APPENDIX REPORT

APPENDIX REPORT

Project No.	SHT2306080101EW	Radio Specification	GFSK
Test sample No.	YPHT23060801006	Model No.	F8926-GW-02
Start test date	2023-11-17	Finish date	2023-11-21
Temperature	24.9°C	Humidity	51%
Test Engineer	Xiangyu Wei	Auditor	Xiaodong Zheo

Appendix clause	Test item	Result
A	Peak Output Power	Pass
B	Power Spectral Density	Pass
C	6 dB Bandwidth	Pass
D	99% Occupied Bandwidth	Pass
E	Duty cycle	Pass
F	Band edge and Spurious Emissions (conducted)	Pass

Appendix A: Peak Output Power

Type	Channel	Peak Output power (dBm)	Limit (dBm)
GFSK	CH _L	11.05	≤30.00
	CH _M	11.10	
	CH _H	10.41	

Appendix B: Power Spectral Density


Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
GFSK	CH _L	7.11	≤8.00	Pass
	CH _M	6.47		
	CH _H	5.85		

<p>CH_L</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 3 kHz Att 35 dB SWT 632.3 μs VBW 10 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] 7.11 dBm 903.07090 MHz CF 903.0 MHz 691 pts Span 1.0 MHz Date: 20 NOV 2023 14:14:28</p>
<p>CH_M</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 3 kHz Att 35 dB SWT 632.3 μs VBW 10 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] 6.47 dBm 907.71750 MHz CF 907.8 MHz 691 pts Span 1.0 MHz Date: 20 NOV 2023 14:16:05</p>
<p>CH_H</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 3 kHz Att 35 dB SWT 632.3 μs VBW 10 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] 5.85 dBm 913.95830 MHz CF 914.2 MHz 691 pts Span 1.0 MHz Date: 20 NOV 2023 14:17:15</p>


Appendix C: 6dB bandwidth

Type	Channel	6dB Bandwidth(kHz)	Limit (kHz)	Result
GFSK	CH _L	638.00	≥500	Pass
	CH _M	640.00		
	CH _H	642.00		


CH_L

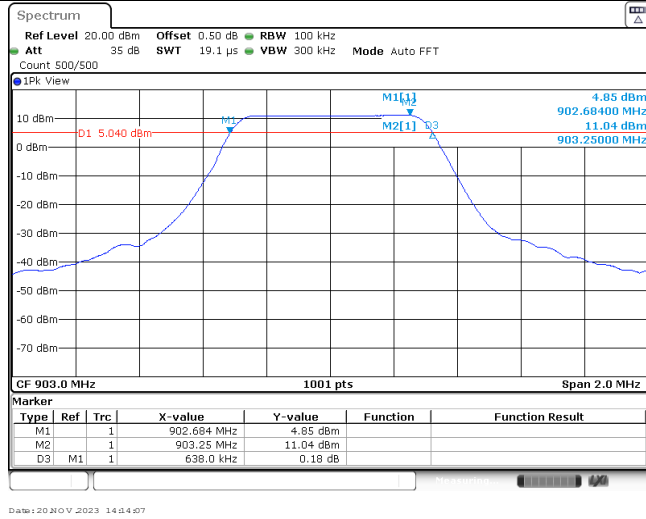

CH_M

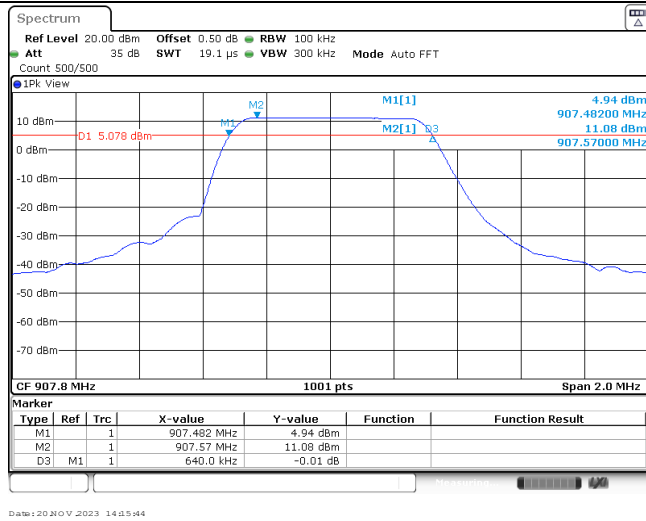

CH_H

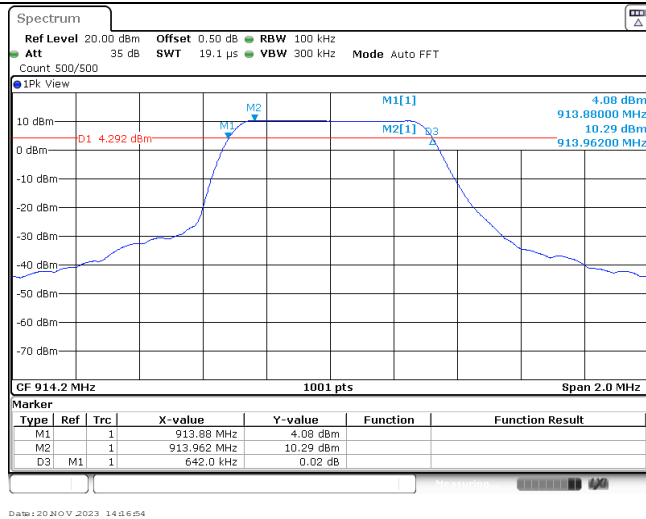


Appendix D: 99% Occupied Bandwidth

Type	Channel	99% Occupied Bandwidth(MHz)	Limit (kHz)	Result
GFSK	CH _L	0.50	-	Pass
	CH _M	0.50		
	CH _H	0.50		


<p>CH_L</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 10 kHz Att 35 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT Count 500/500</p> <p>IPK View</p> <p>M1[1] 10.34 dBm 903.14790 MHz 503.496503497 kHz</p> <p>CF 903.0 MHz 1001 pts Span 2.0 MHz</p> <p>Date: 20 NOV 2023 14:44:14</p>
<p>CH_M</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 10 kHz Att 35 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT Count 500/500</p> <p>IPK View</p> <p>M1[1] 10.30 dBm 907.59020 MHz 503.496503497 kHz</p> <p>CF 907.8 MHz 1001 pts Span 2.0 MHz</p> <p>Date: 20 NOV 2023 14:45:52</p>
<p>CH_H</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 10 kHz Att 35 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT Count 500/500</p> <p>IPK View</p> <p>M1[1] 10.07 dBm 913.99220 MHz 503.496503497 kHz</p> <p>CF 914.2 MHz 1001 pts Span 2.0 MHz</p> <p>Date: 20 NOV 2023 14:47:01</p>




Appendix E: Duty cycle

Test Frequency (MHz)	T _{on} time for single burst (ms)	T _{period} (ms)	Duty cycle	1/T _{on} time (kHz)
907.8	1.96	2.01	97.51%	0.51

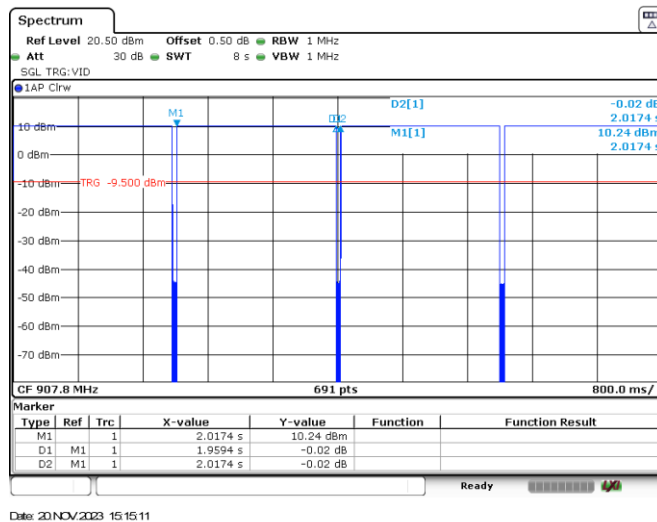


Appendix F: Band edge and Spurious Emissions (conducted)

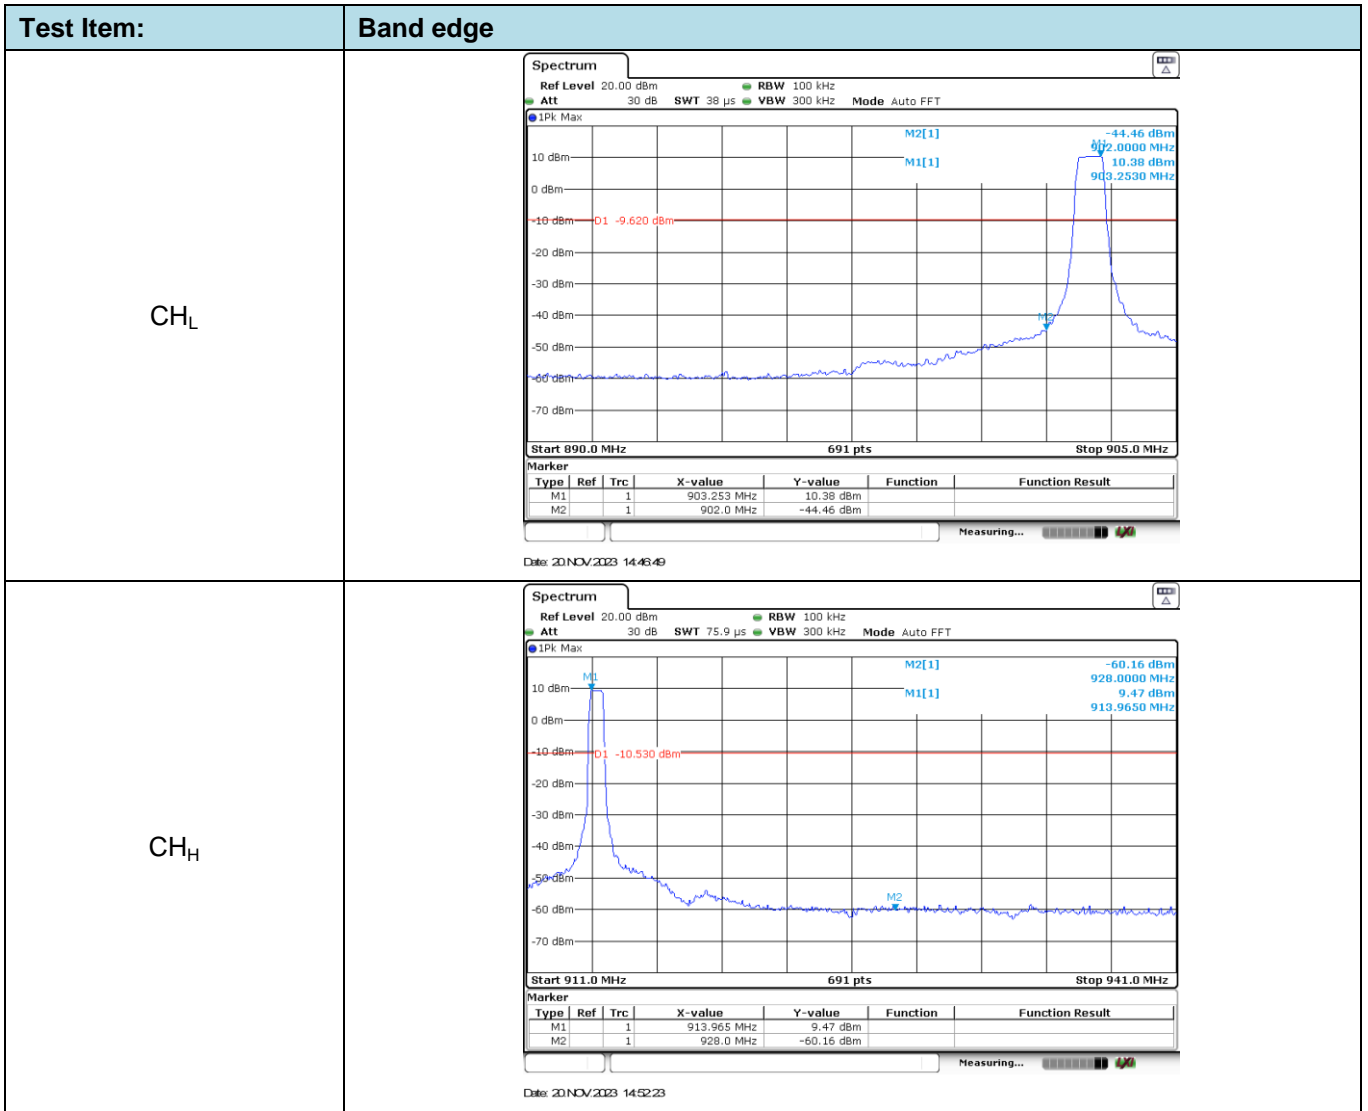


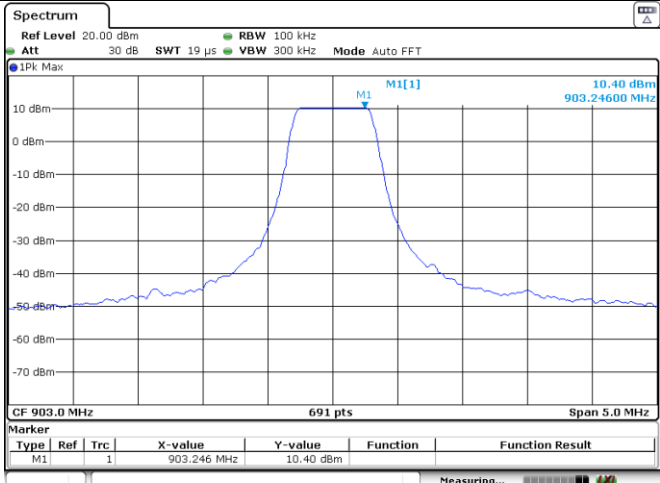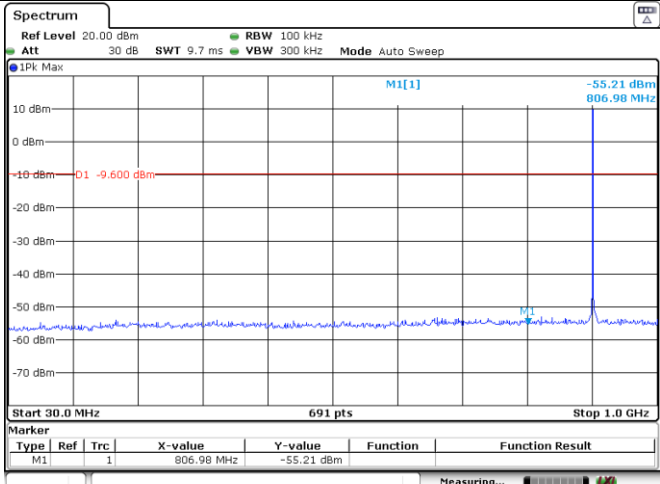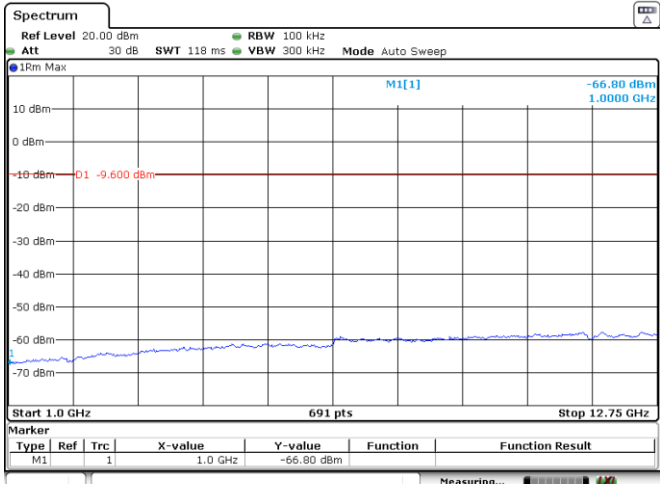Test Item:	SE																
<p>CH_L Reference level</p>	 <p>CF 903.0 MHz 691 pts Span 5.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td></td> <td>1</td> <td>903.246 MHz</td> <td>10.40 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 20 NOV 2023 15:01:34</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1			1	903.246 MHz	10.40 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result										
M1			1	903.246 MHz	10.40 dBm												
<p>CH_L 30MHz~1000MHz</p>	 <p>Start 30.0 MHz 691 pts Stop 1.0 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td></td> <td>1</td> <td>806.98 MHz</td> <td>-55.21 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 20 NOV 2023 15:04:02</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1			1	806.98 MHz	-55.21 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result										
M1			1	806.98 MHz	-55.21 dBm												
<p>CH_L 1GHz~26GHz</p>	 <p>Start 1.0 GHz 691 pts Stop 12.75 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td></td> <td>1</td> <td>1.0 GHz</td> <td>-66.80 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 20 NOV 2023 15:05:54</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1			1	1.0 GHz	-66.80 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result										
M1			1	1.0 GHz	-66.80 dBm												


CH_M
Reference level

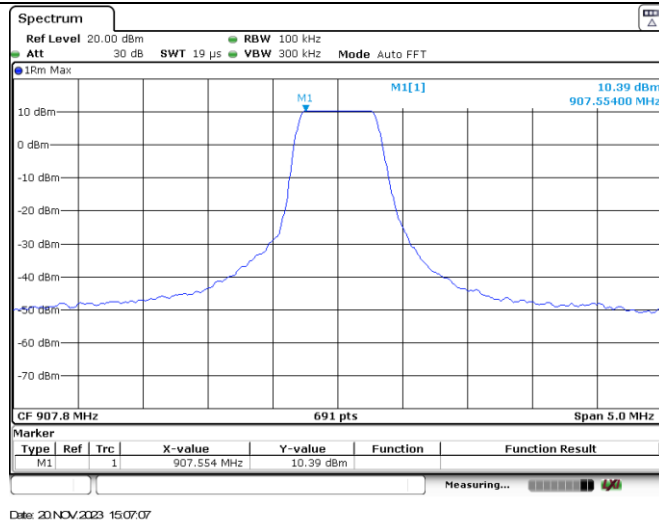


CH_M
30MHz~1000MHz

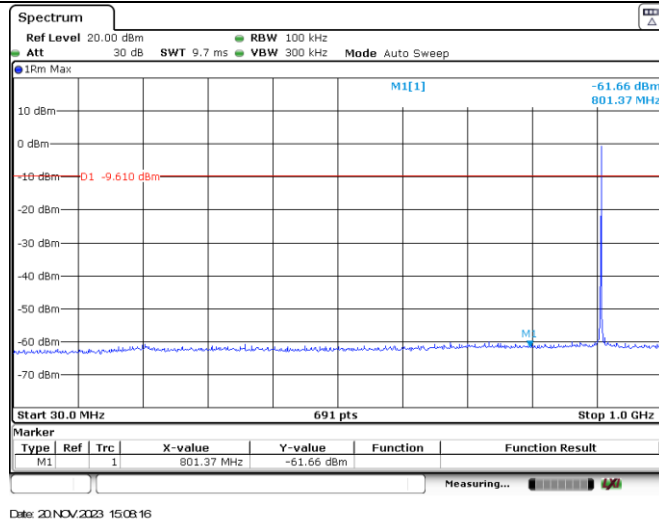

CH_M
1GHz~26GHz

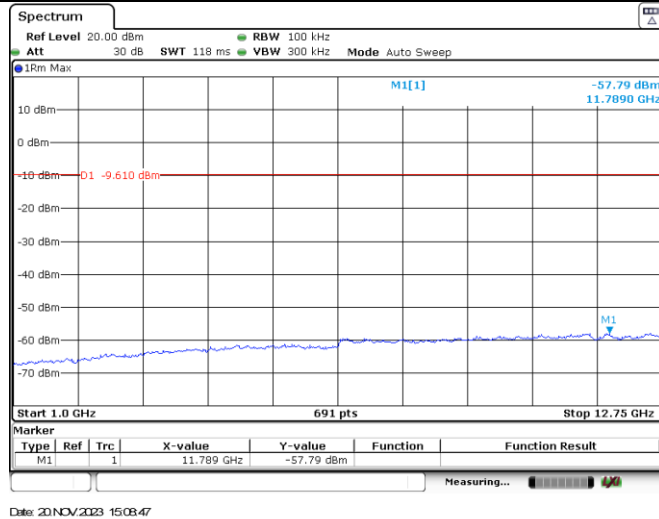


CH_H
Reference level

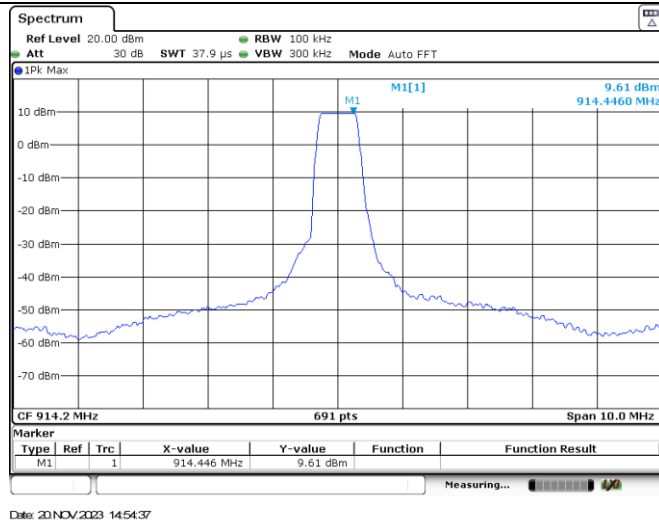


Date: 20 NOV 2023 14:54:37

CH_H
30MHz~1000MHz

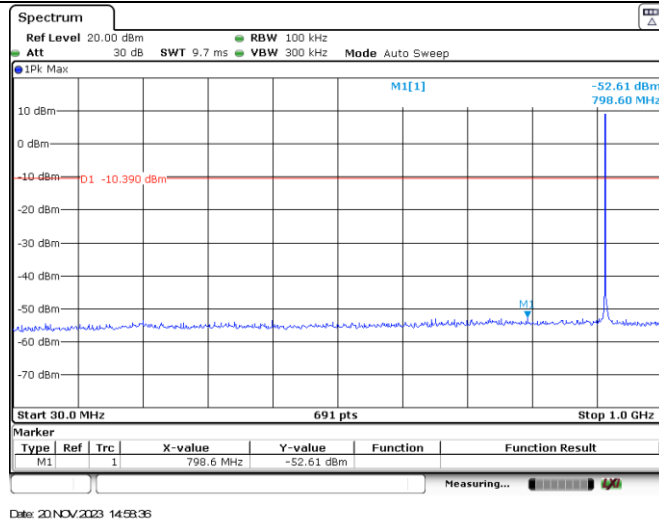

Date: 20 NOV 2023 14:58:35

CH_H
1GHz~26GHz

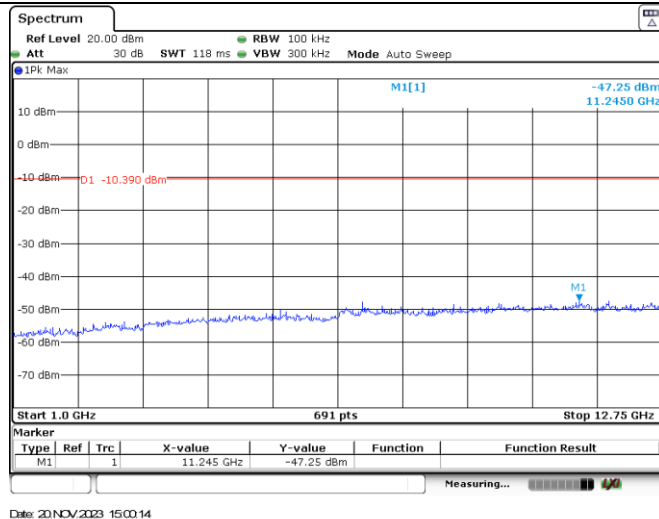

Date: 20 NOV 2023 15:00:14

-----End of Report-----