


[TestMode: TX middle channel]; [Polarity: Vertical]

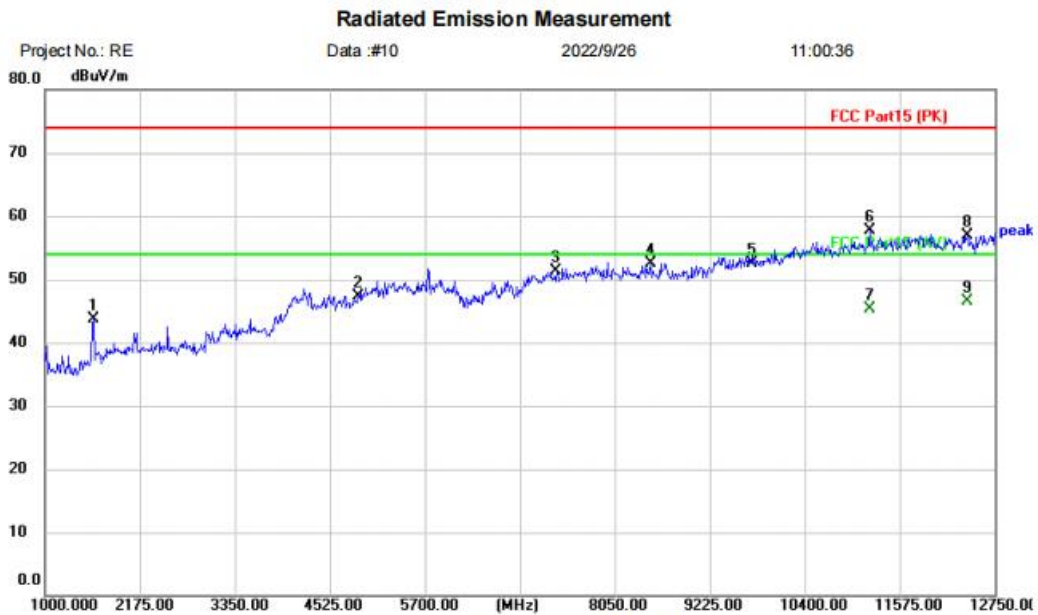

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth headset
 M/N: LP40
 Mode: TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1599.250	49.17	-5.40	43.77	74.00	-30.23	peak	
2		4882.000	43.03	4.37	47.40	74.00	-26.60	peak	
3		7323.000	43.00	8.21	51.21	74.00	-22.79	peak	
4		8496.500	43.39	9.12	52.51	74.00	-21.49	peak	
5		9764.000	41.25	11.30	52.55	74.00	-21.45	peak	
6		11199.000	44.16	13.54	57.70	74.00	-16.30	peak	
7		11199.000	31.75	13.54	45.29	54.00	-8.71	AVG	
8		12409.250	43.11	13.88	56.99	74.00	-17.01	peak	
9	*	12409.250	32.67	13.88	46.55	54.00	-7.45	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

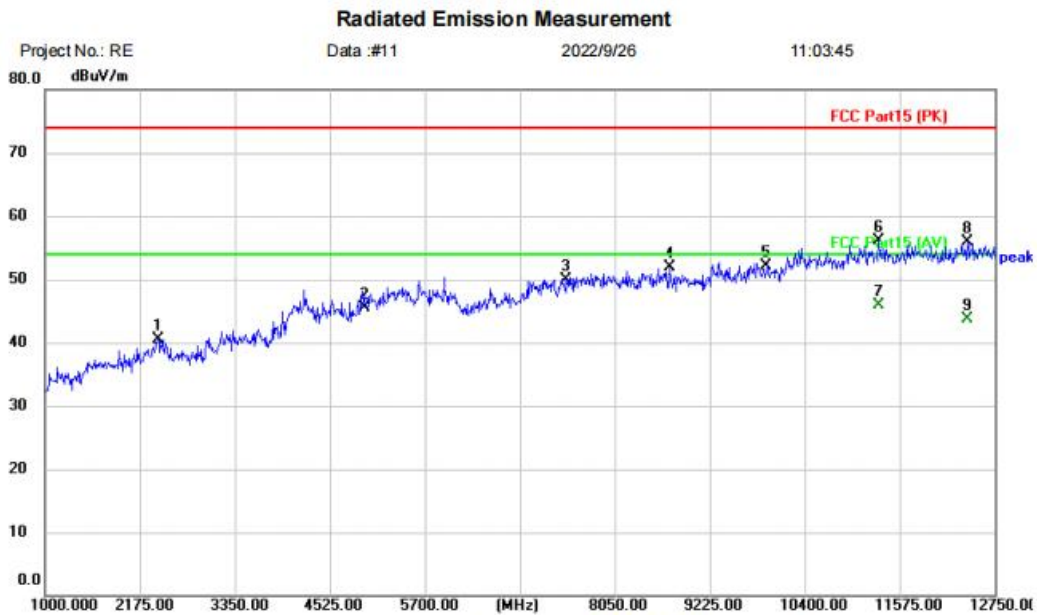

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth headset
 M/N: LP40
 Mode: TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2398.250	41.59	-1.14	40.45	74.00	-33.55	peak	
2		4960.000	39.99	5.42	45.41	74.00	-28.59	peak	
3		7440.000	41.37	8.48	49.85	74.00	-24.15	peak	
4		8731.500	42.62	9.23	51.85	74.00	-22.15	peak	
5		9920.000	40.44	11.69	52.13	74.00	-21.87	peak	
6		11316.500	42.50	13.59	56.09	74.00	-17.91	peak	
7	*	11316.500	32.23	13.59	45.82	54.00	-8.18	AVG	
8		12409.250	42.12	13.88	56.00	74.00	-18.00	peak	
9		12409.250	29.91	13.88	43.79	54.00	-10.21	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

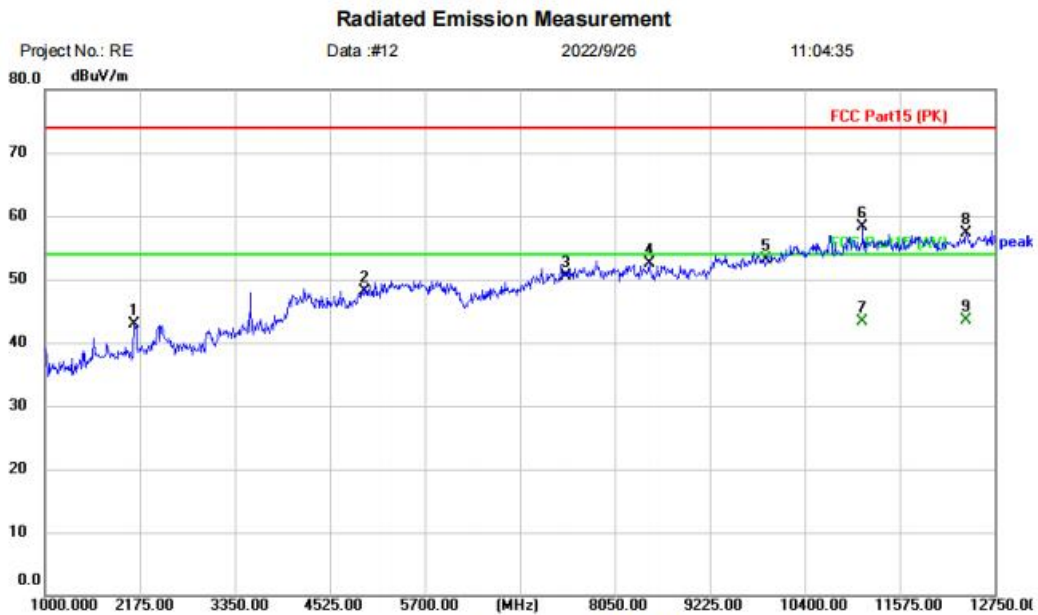

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth headset
 M/N: LP40
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2104.500	46.94	-3.99	42.95	74.00	-31.05	peak	
2		4960.000	42.67	5.42	48.09	74.00	-25.91	peak	
3		7440.000	41.97	8.48	50.45	74.00	-23.55	peak	
4		8473.000	43.33	9.12	52.45	74.00	-21.55	peak	
5		9920.000	41.47	11.69	53.16	74.00	-20.84	peak	
6		11116.750	44.82	13.50	58.32	74.00	-15.68	peak	
7		11116.750	29.74	13.50	43.24	54.00	-10.76	AVG	
8		12397.500	43.34	13.88	57.22	74.00	-16.78	peak	
9	*	12397.500	29.66	13.88	43.54	54.00	-10.46	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

19 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

19.2 BLOCK DIAGRAM OF TEST SETUP

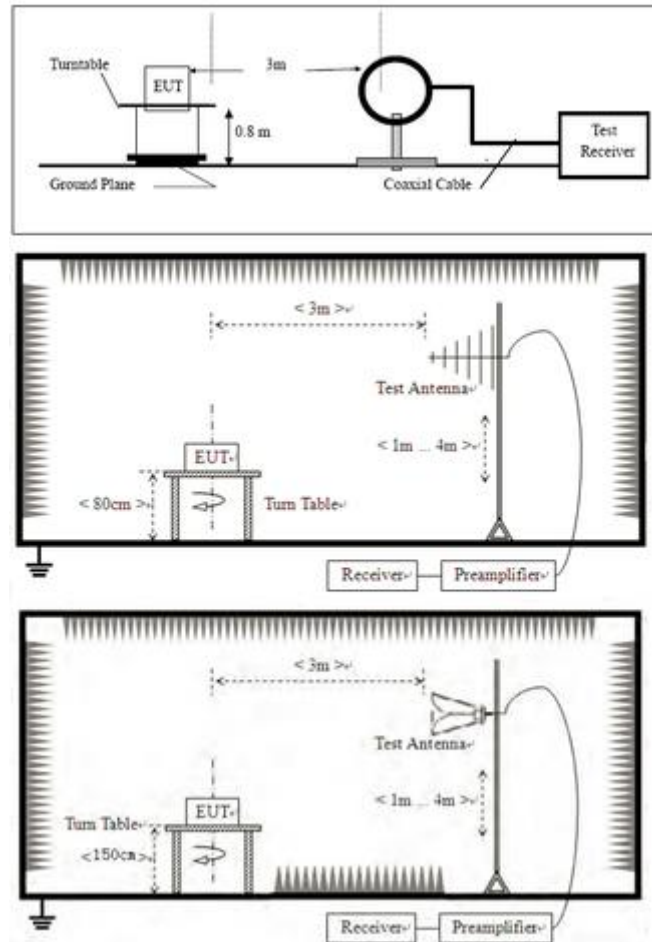

19.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

19.4 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

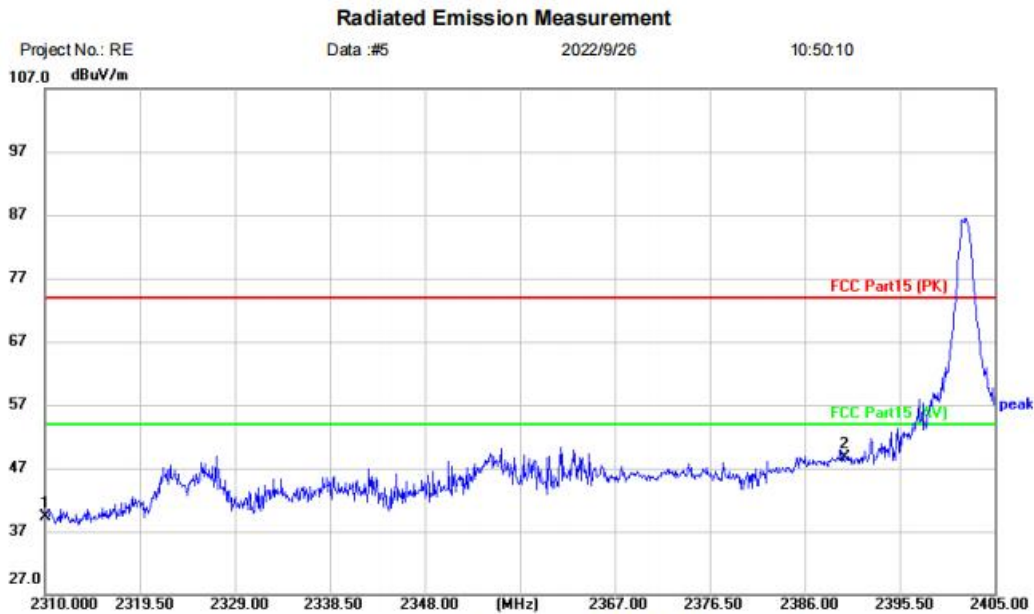

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Bluetooth headset		
M/N: LP40		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.61	-4.27	39.34	74.00	-34.66	peak	
2	*	2390.000	52.48	-3.82	48.66	74.00	-25.34	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

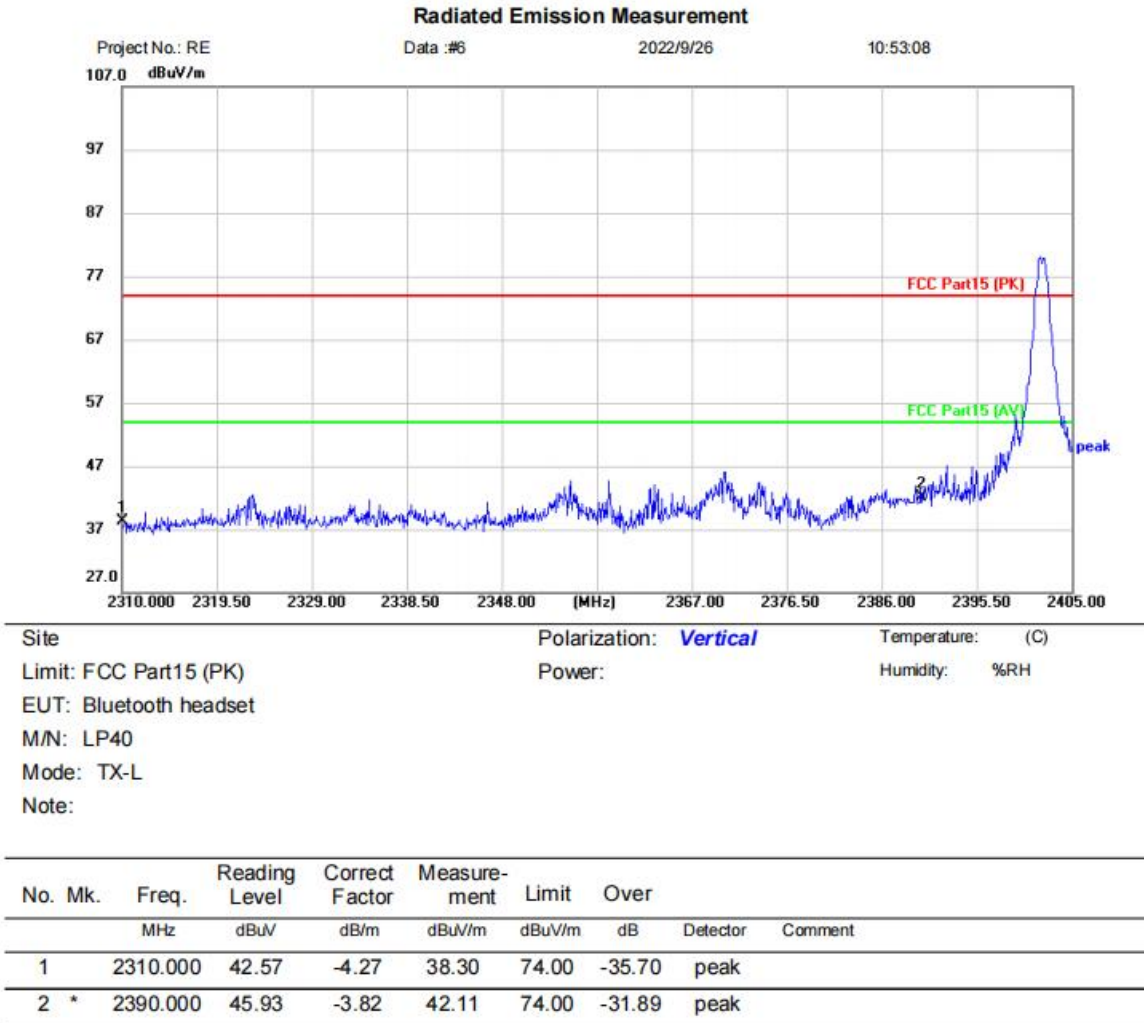


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

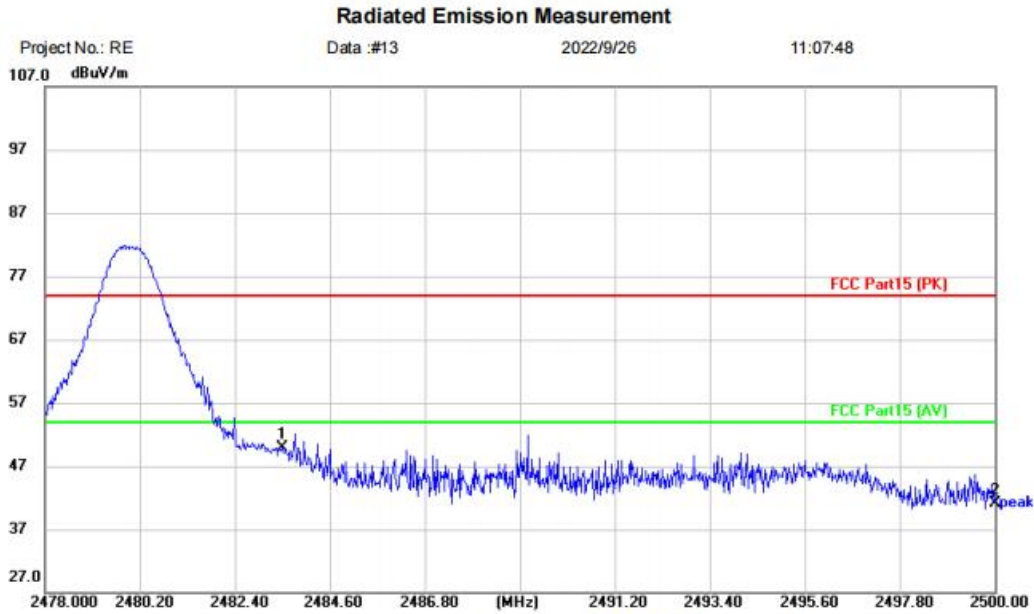

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Bluetooth headset		
M/N: LP40		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	53.84	-3.96	49.88	74.00	-24.12	peak	
2		2500.000	45.05	-4.00	41.05	74.00	-32.95	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

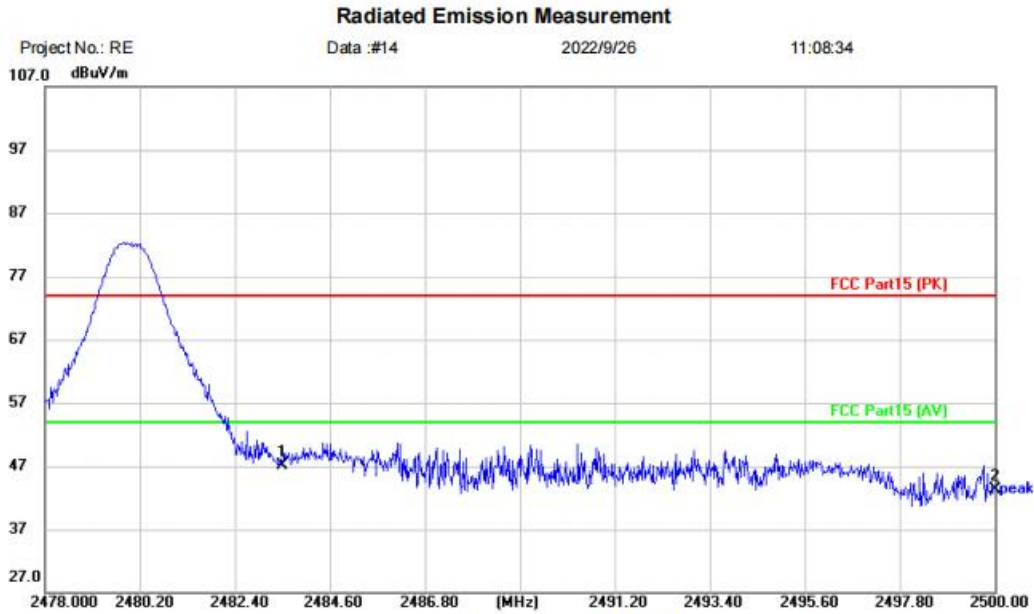

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Bluetooth headset		
M/N: LP40		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	51.10	-3.96	47.14	74.00	-26.86	peak	
2		2500.000	47.26	-4.00	43.26	74.00	-30.74	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


20 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	24°C
Humidity	52%

20.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

20.2 BLOCK DIAGRAM OF TEST SETUP

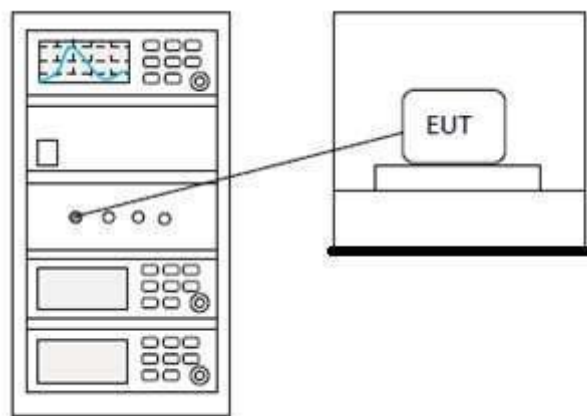

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


21 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-3.047	21	Pass
NVNT	1-DH1	2441	Ant1	-3.801	21	Pass
NVNT	1-DH1	2480	Ant1	-4.752	21	Pass
NVNT	2-DH1	2402	Ant1	-2.246	21	Pass
NVNT	2-DH1	2441	Ant1	-3.062	21	Pass
NVNT	2-DH1	2480	Ant1	-3.903	21	Pass
NVNT	3-DH1	2402	Ant1	-2.205	21	Pass
NVNT	3-DH1	2441	Ant1	-2.977	21	Pass
NVNT	3-DH1	2480	Ant1	-3.876	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

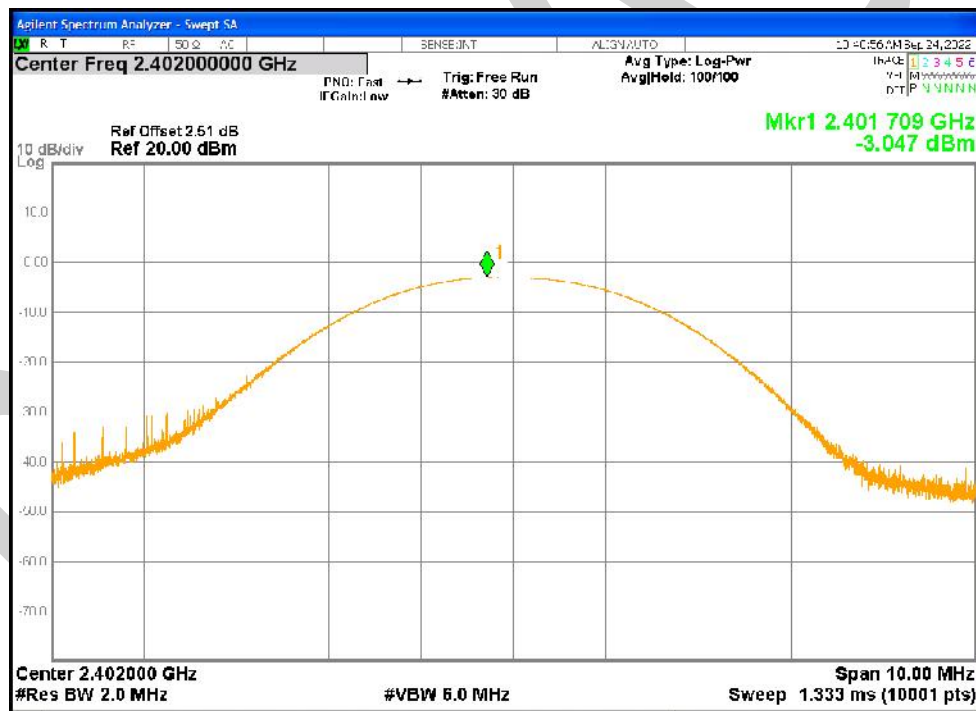


Power NVNT 1-DH1 2441MHz Ant1

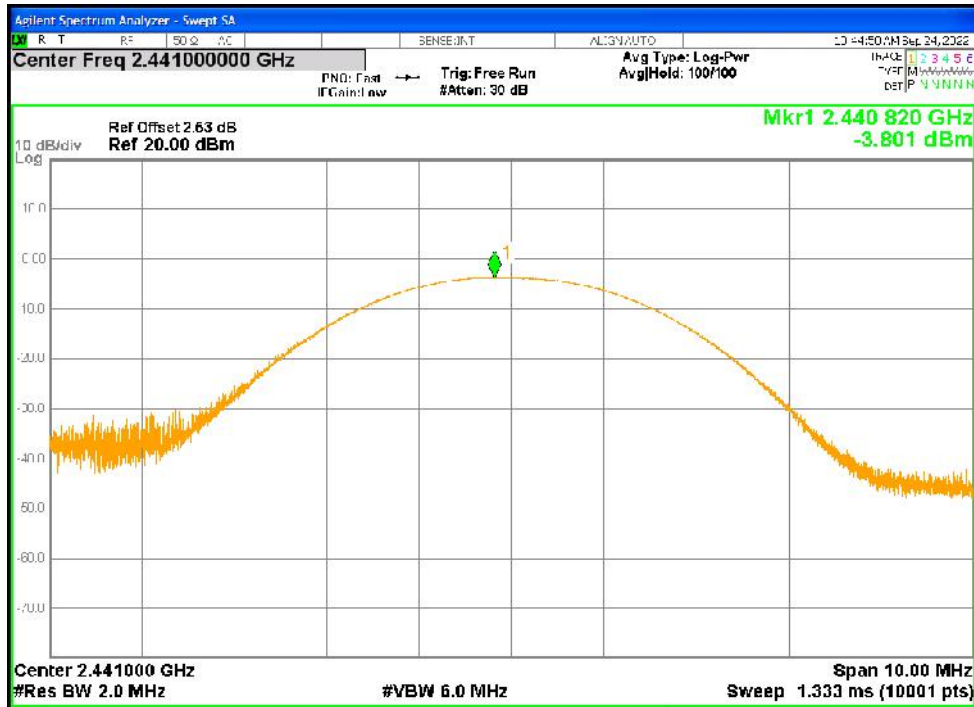


Power NVNT 1-DH1 2480MHz Ant1

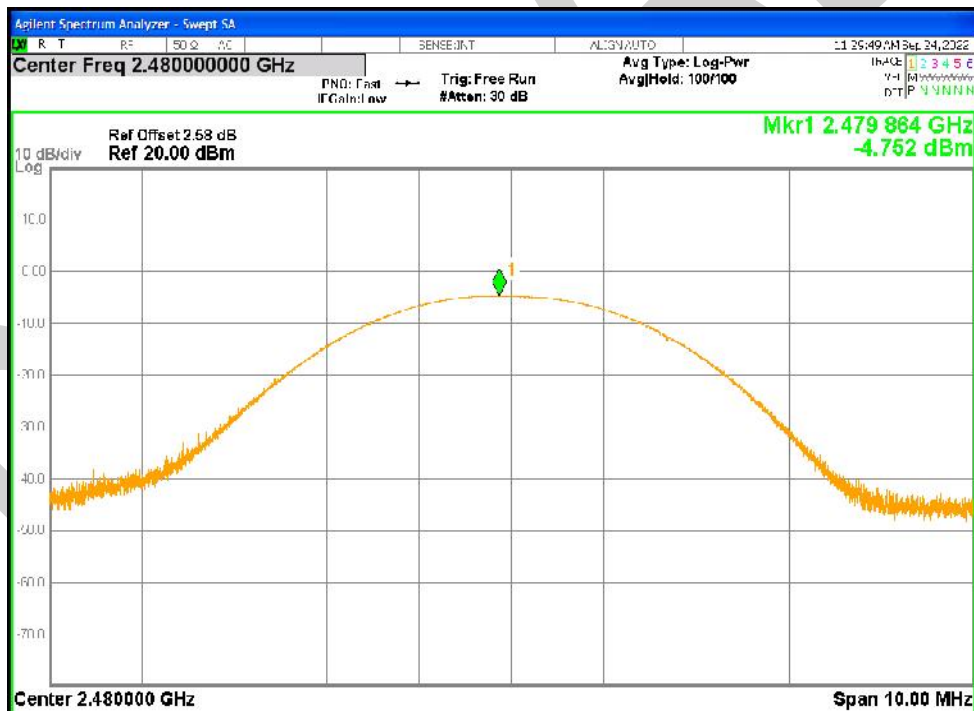


Power NVNT 2-DH1 2402MHz Ant1

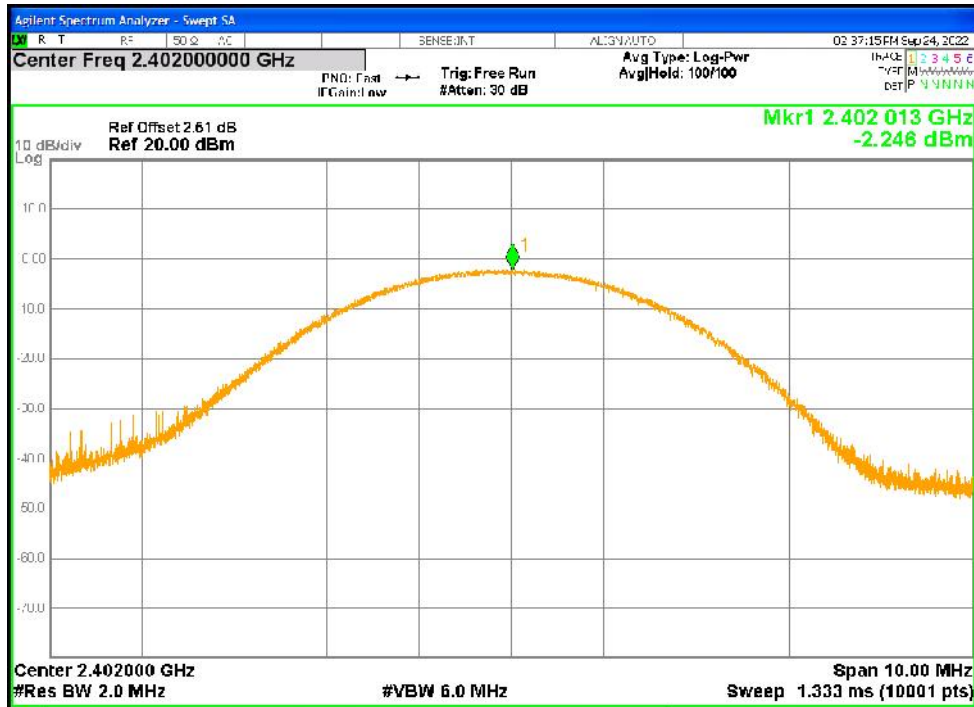


Power NVNT 2-DH1 2441MHz Ant1

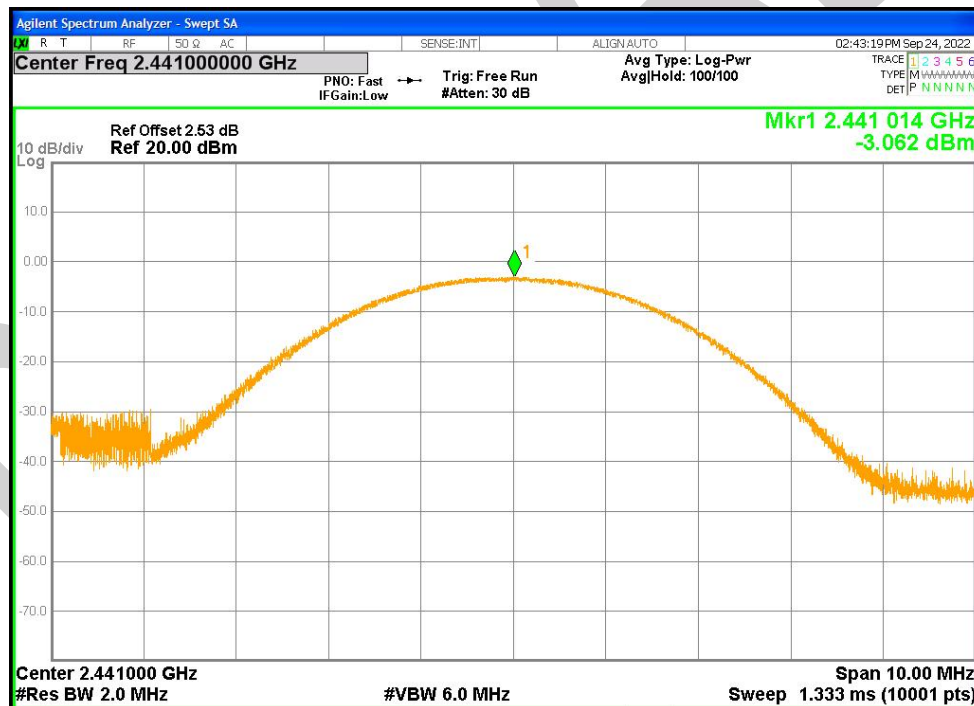


Power NVNT 2-DH1 2480MHz Ant1

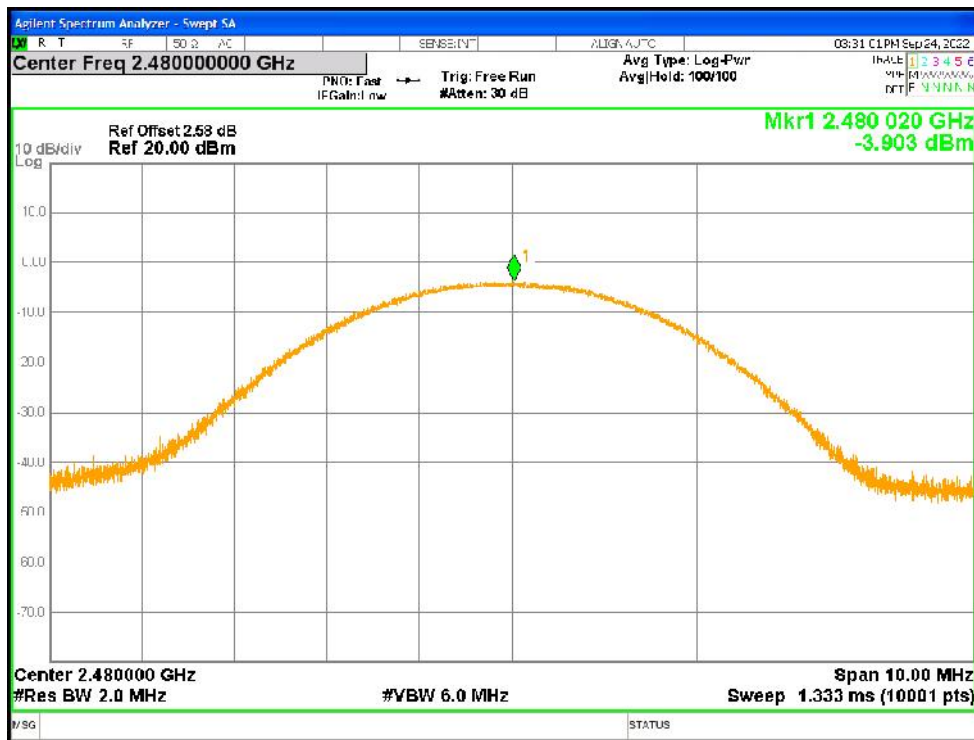


Power NVNT 3-DH1 2402MHz Ant1

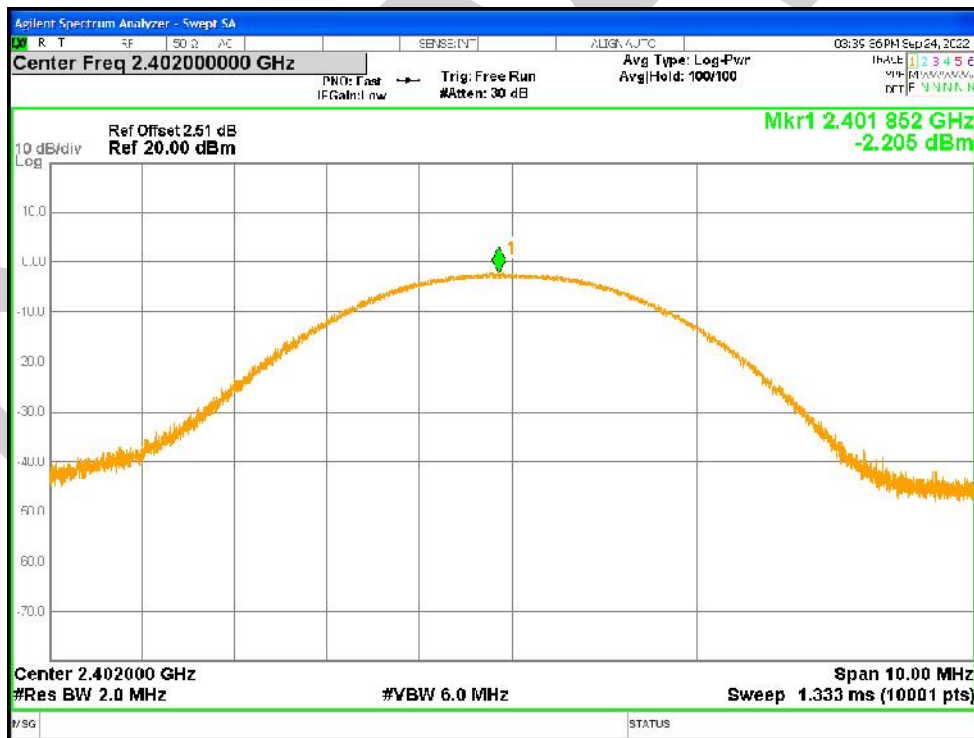

Power NVNT 3-DH1 2441MHz Ant1

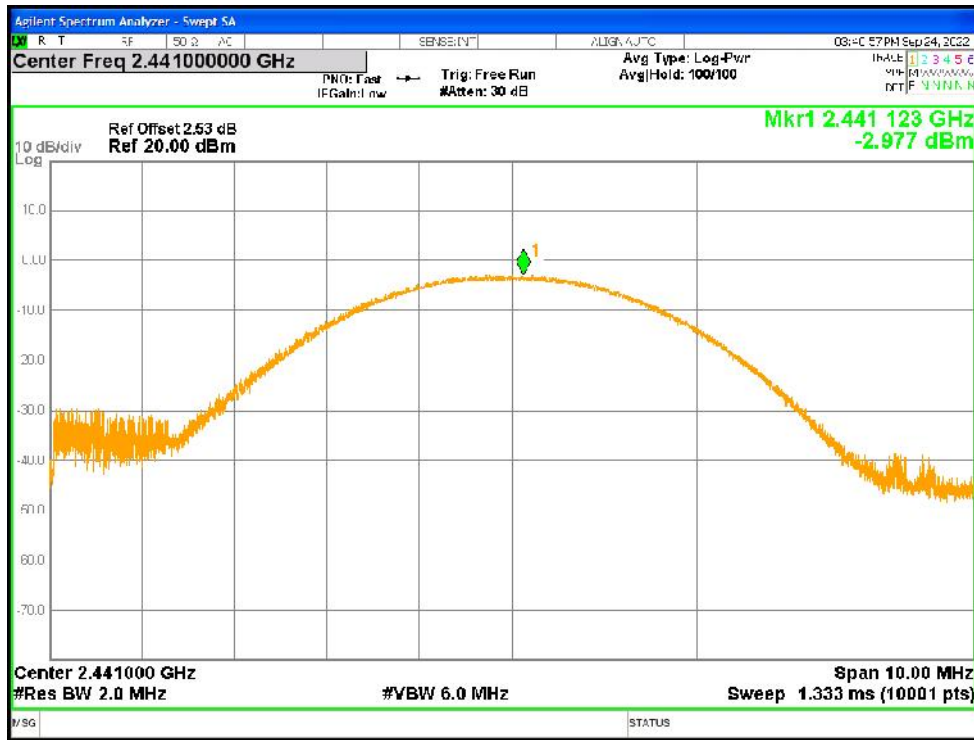


Power NVNT 3-DH1 2480MHz Ant1

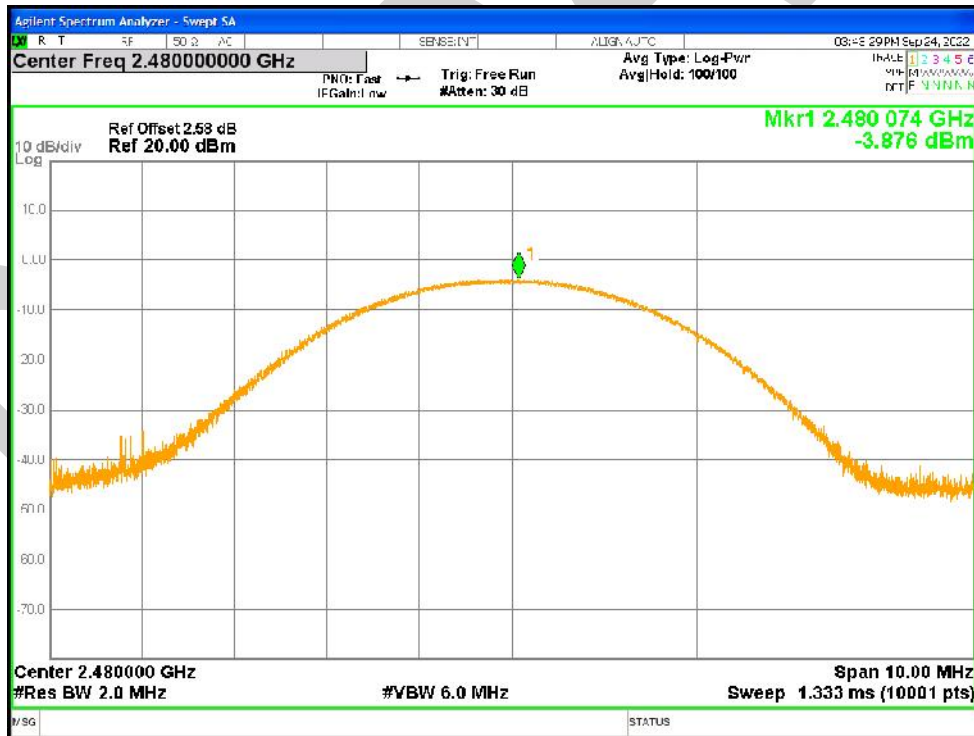

-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.878	0	Pass
NVNT	1-DH1	2441	Ant1	0.88	0	Pass
NVNT	1-DH1	2480	Ant1	0.877	0	Pass
NVNT	2-DH1	2402	Ant1	1.231	0	Pass
NVNT	2-DH1	2441	Ant1	1.226	0	Pass
NVNT	2-DH1	2480	Ant1	1.246	0	Pass
NVNT	3-DH1	2402	Ant1	1.229	0	Pass
NVNT	3-DH1	2441	Ant1	1.248	0	Pass
NVNT	3-DH1	2480	Ant1	1.23	0	Pass

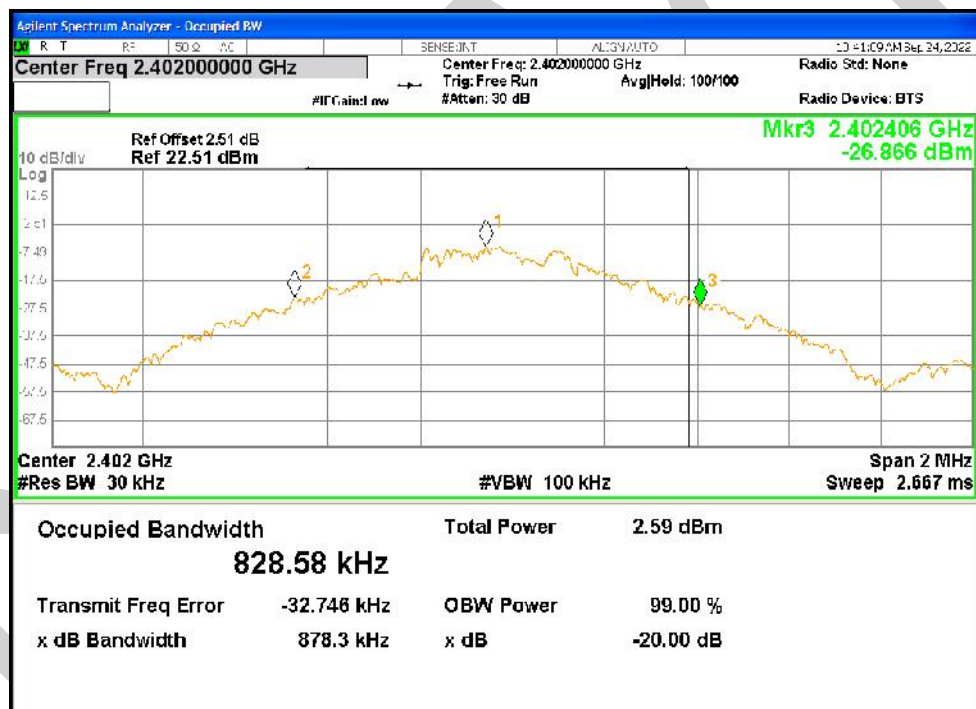
-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

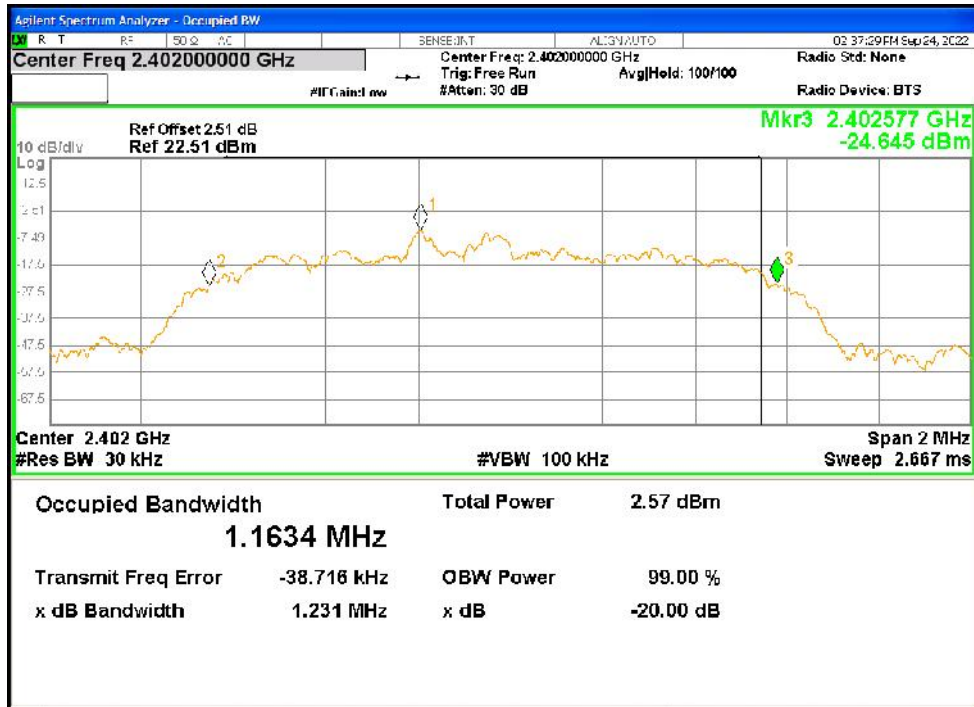


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1




-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

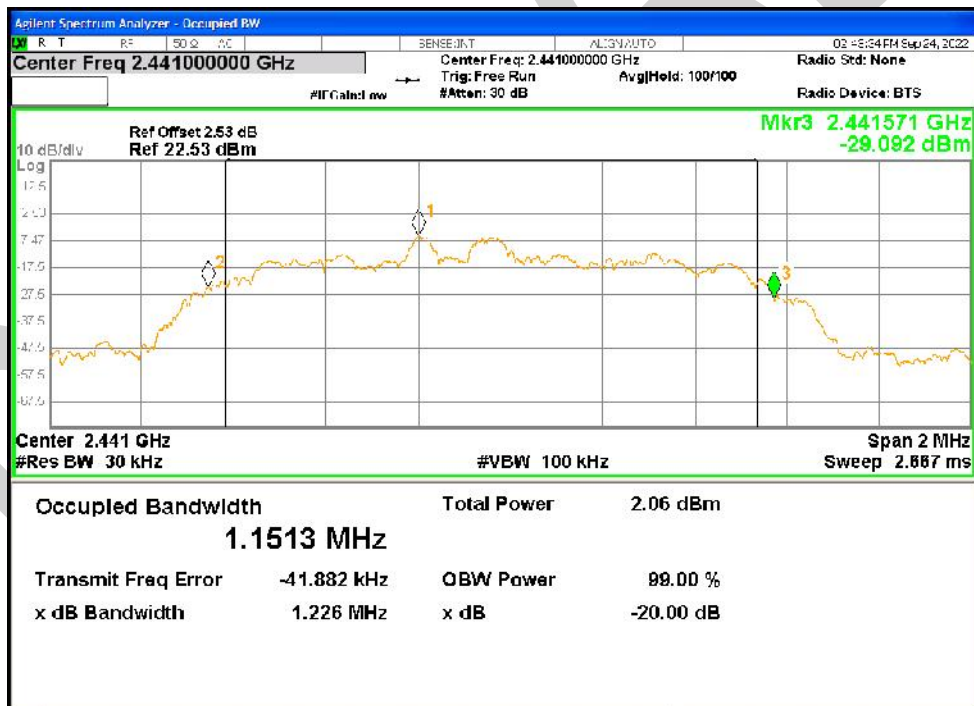


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

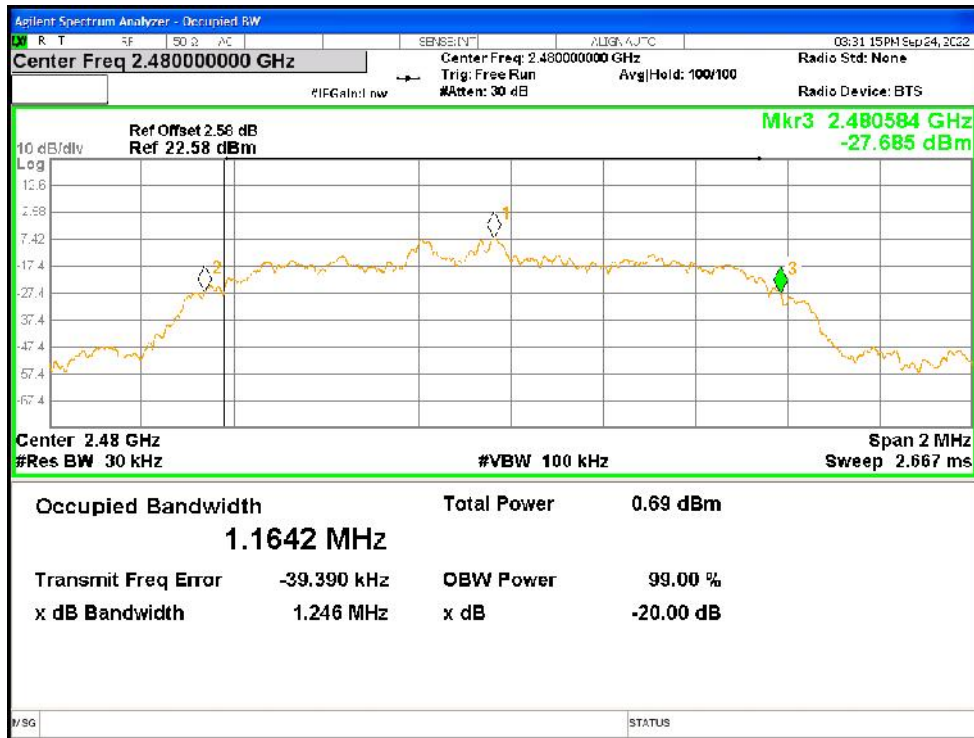


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

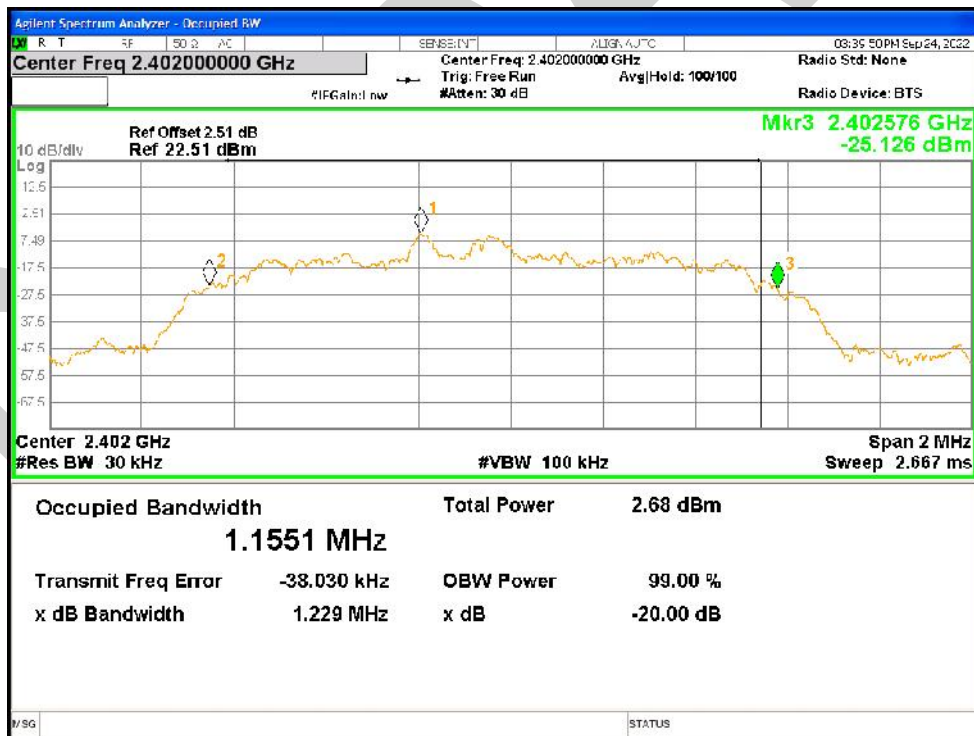

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

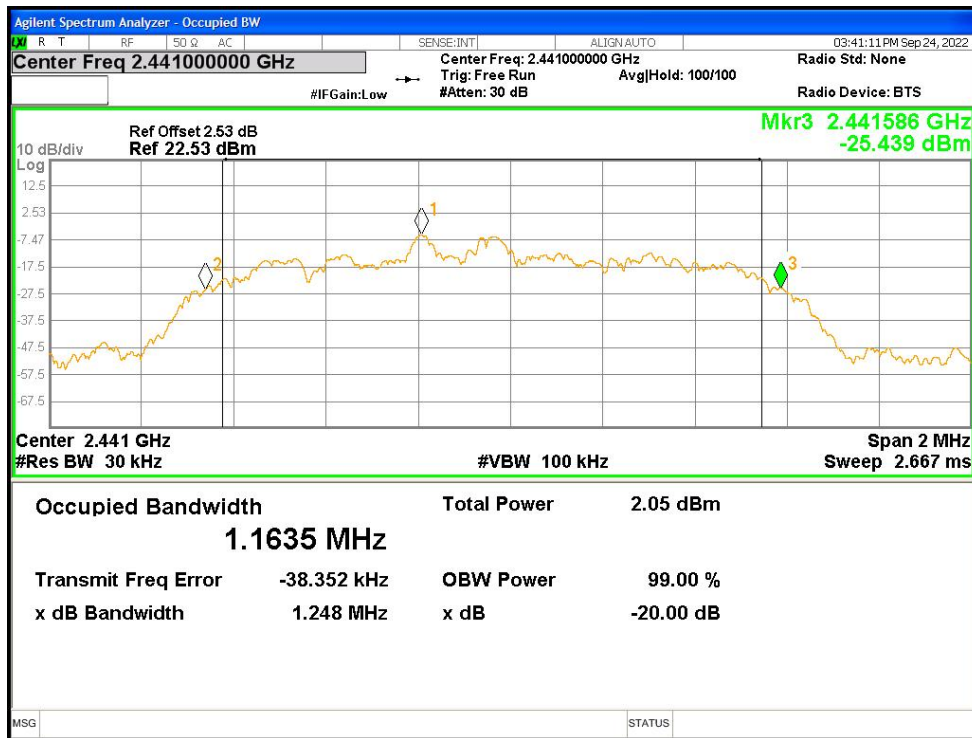


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

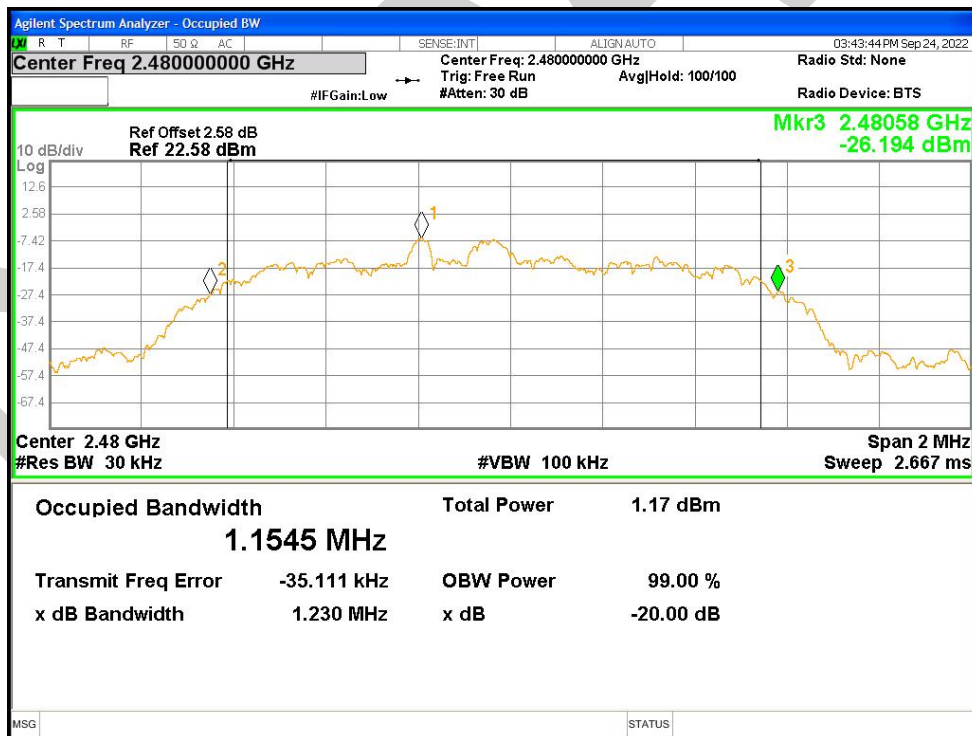


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.81554
NVNT	1-DH1	2441	Ant1	0.81004
NVNT	1-DH1	2480	Ant1	0.82445
NVNT	2-DH1	2402	Ant1	1.1490
NVNT	2-DH1	2441	Ant1	1.1615
NVNT	2-DH1	2480	Ant1	1.1509
NVNT	3-DH1	2402	Ant1	1.1669
NVNT	3-DH1	2441	Ant1	1.1571
NVNT	3-DH1	2480	Ant1	1.1606


OBW NVNT 1-DH1 2402MHz Ant1

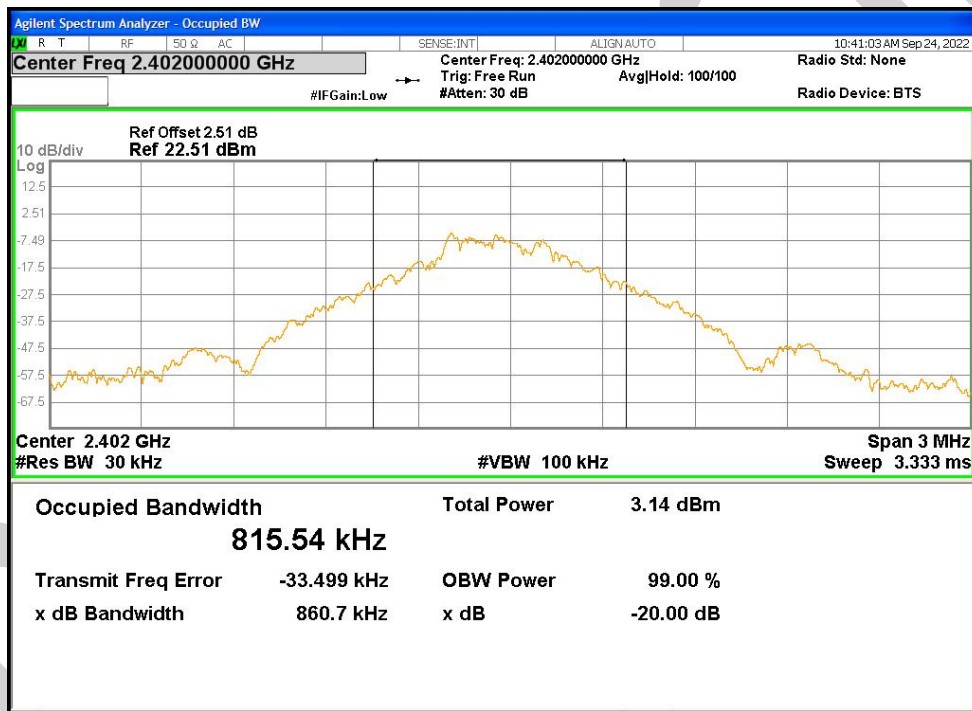

OBW NVNT 1-DH1 2441MHz Ant1

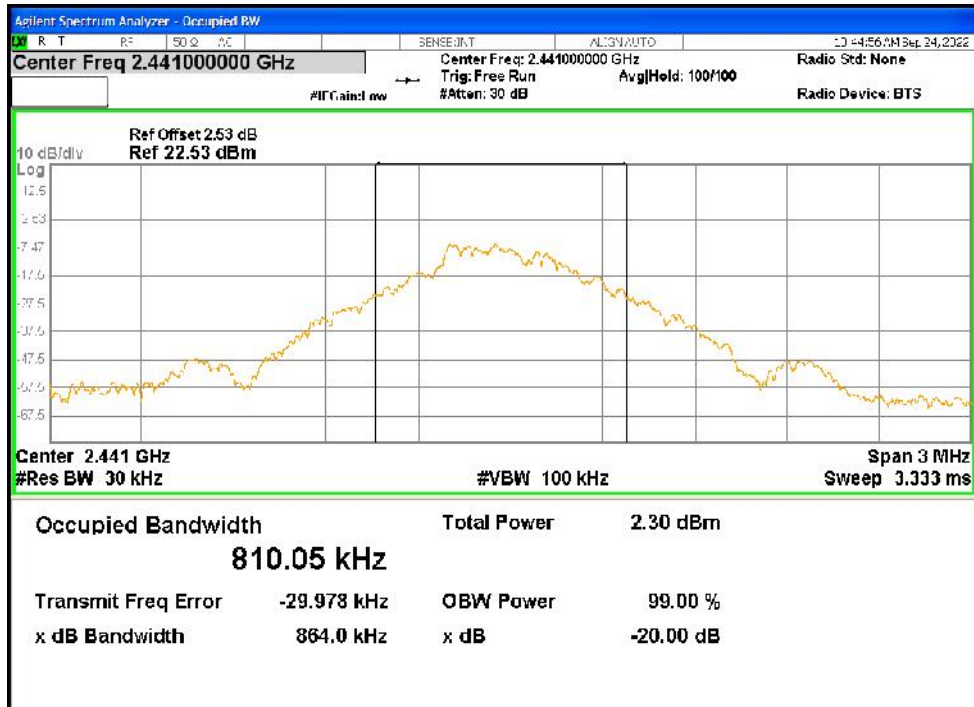


OBW NVNT 1-DH1 2480MHz Ant1

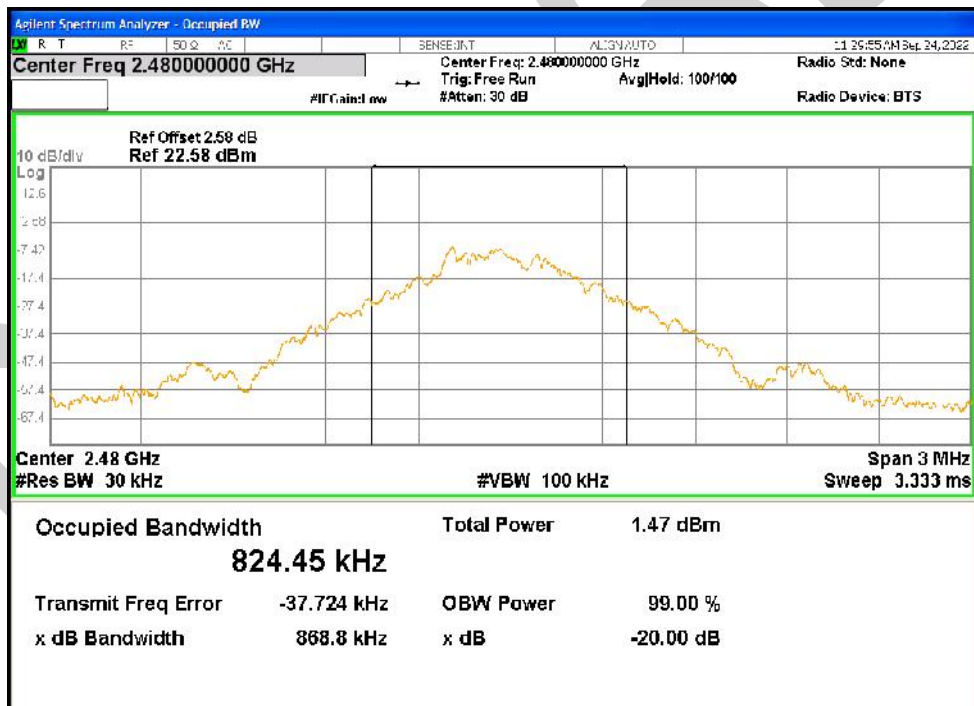


OBW NVNT 2-DH1 2402MHz Ant1




OBW NVNT 2-DH1 2441MHz Ant1

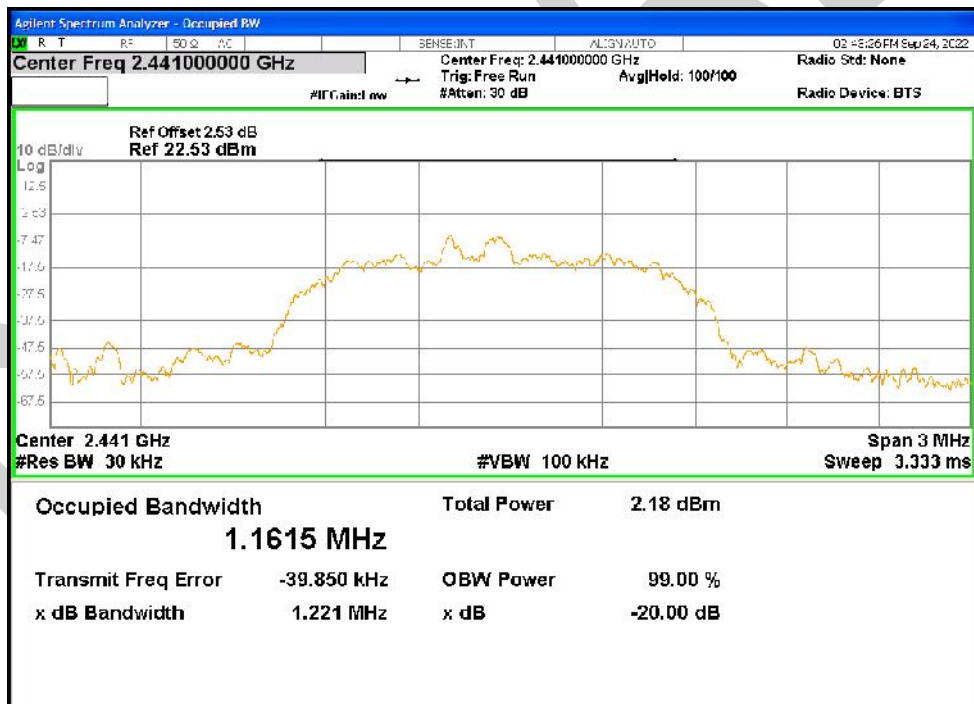


OBW NVNT 2-DH1 2480MHz Ant1

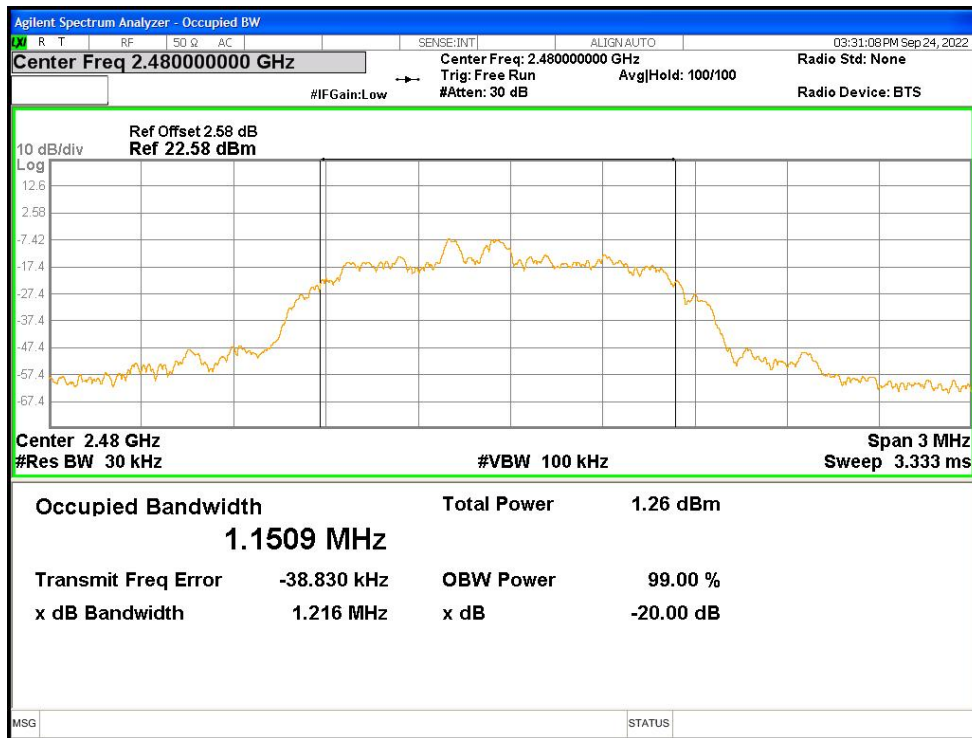


OBW NVNT 3-DH1 2402MHz Ant1

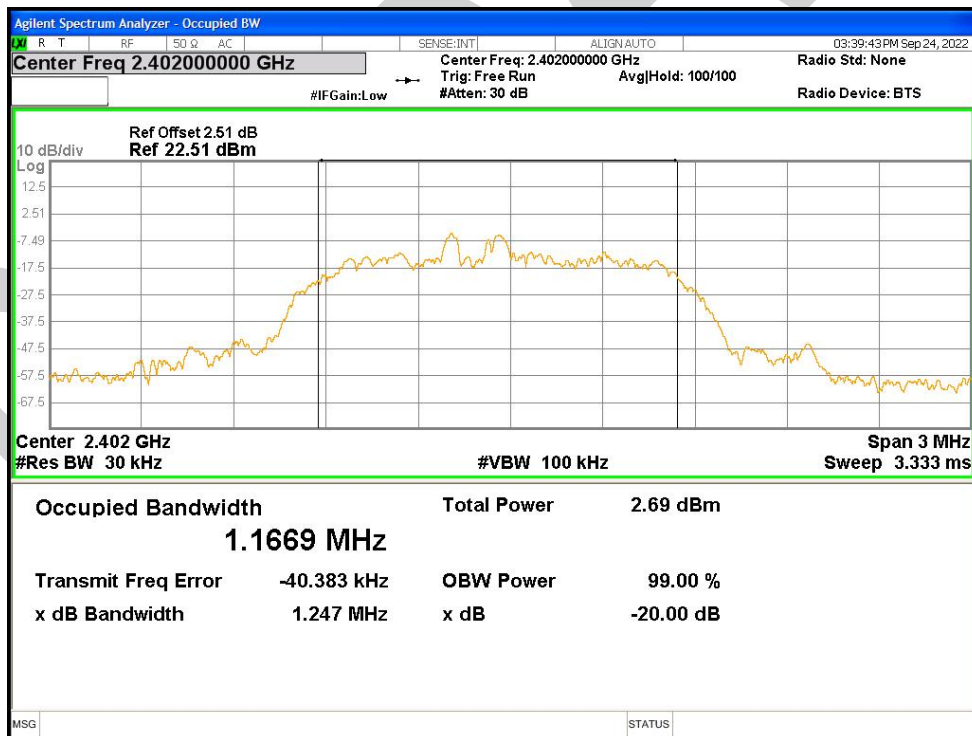

OBW NVNT 3-DH1 2441MHz Ant1

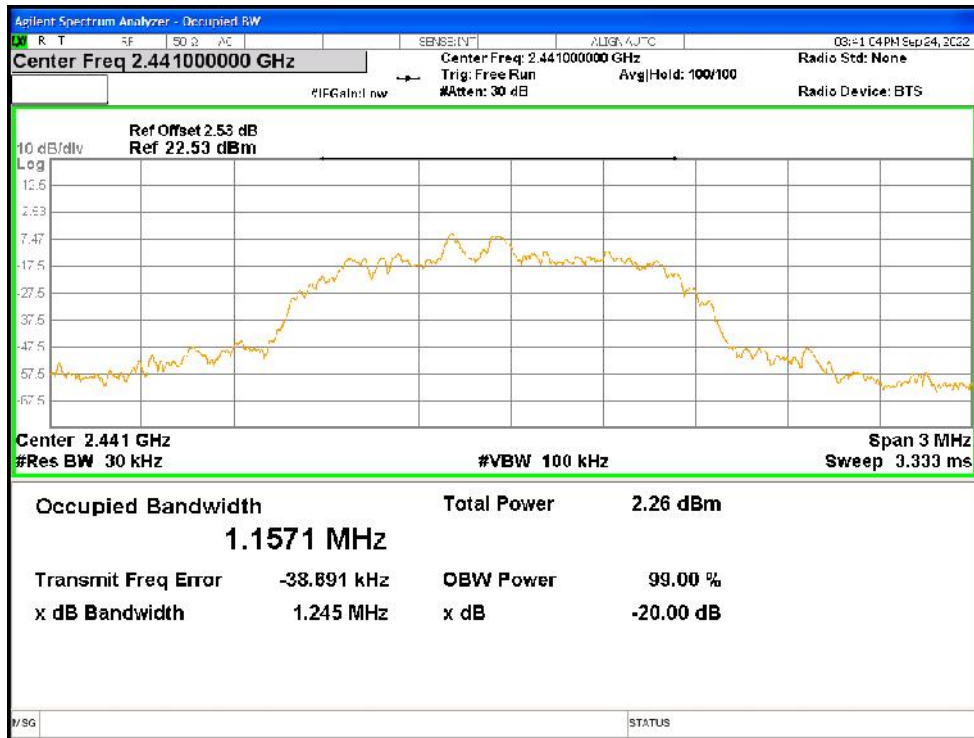

OBW NVNT 3-DH1 2480MHz Ant1

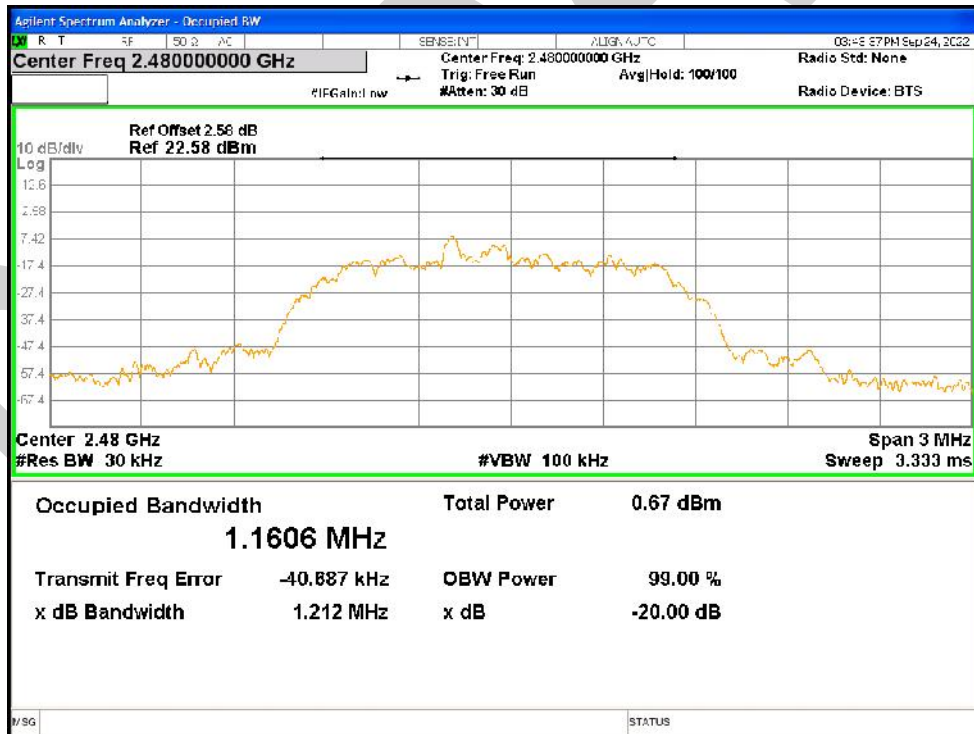


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-52.16	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-48.28	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-52.4	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-48.98	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-52.36	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-49.87	-20	Pass

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

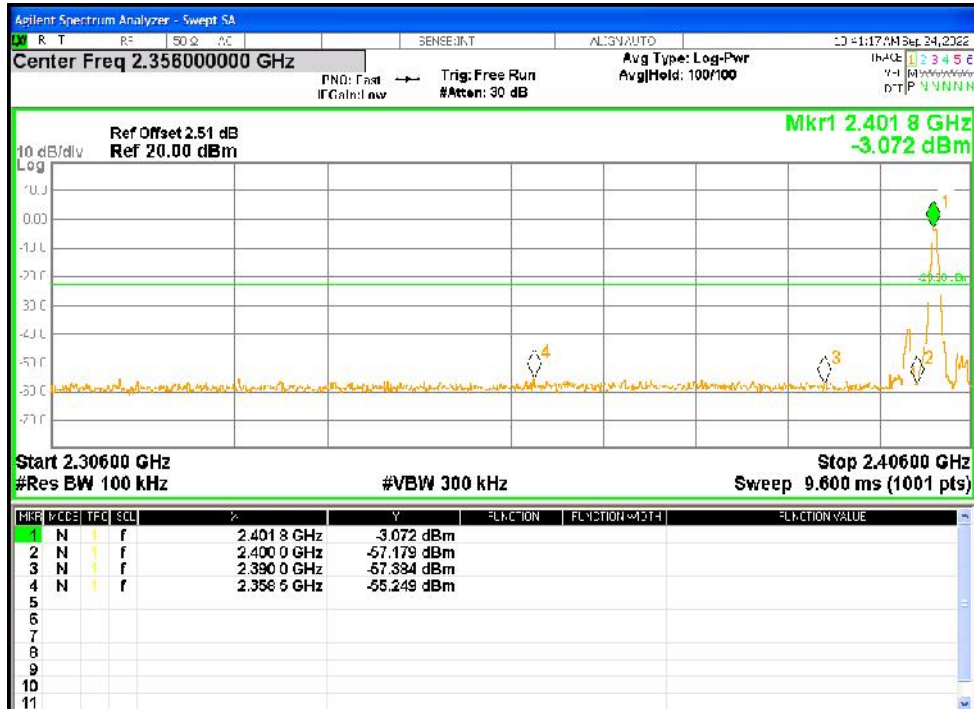

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

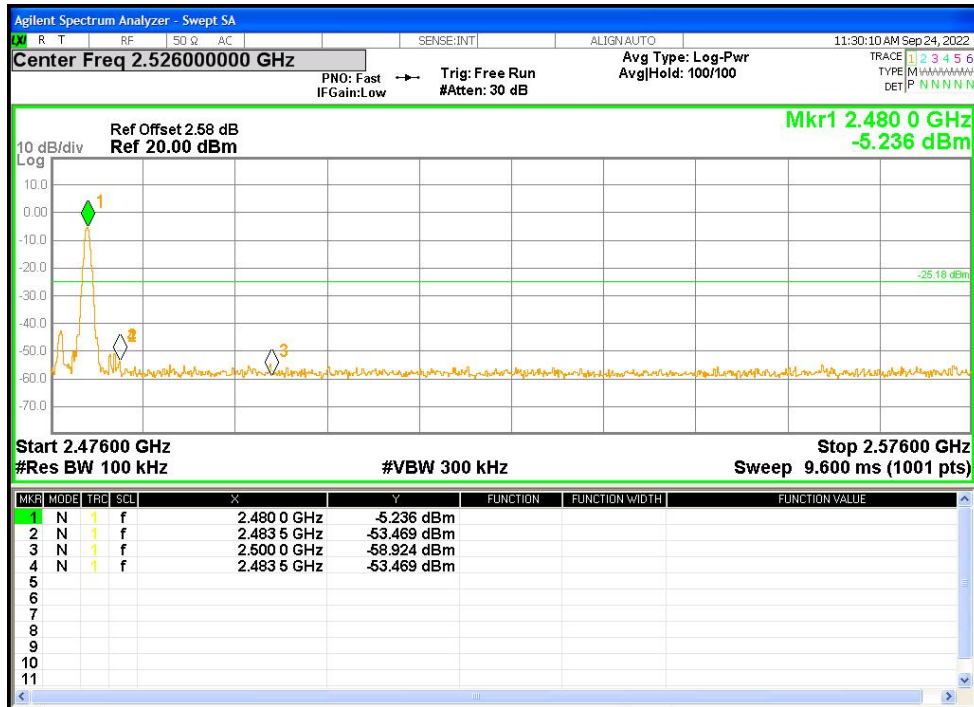

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

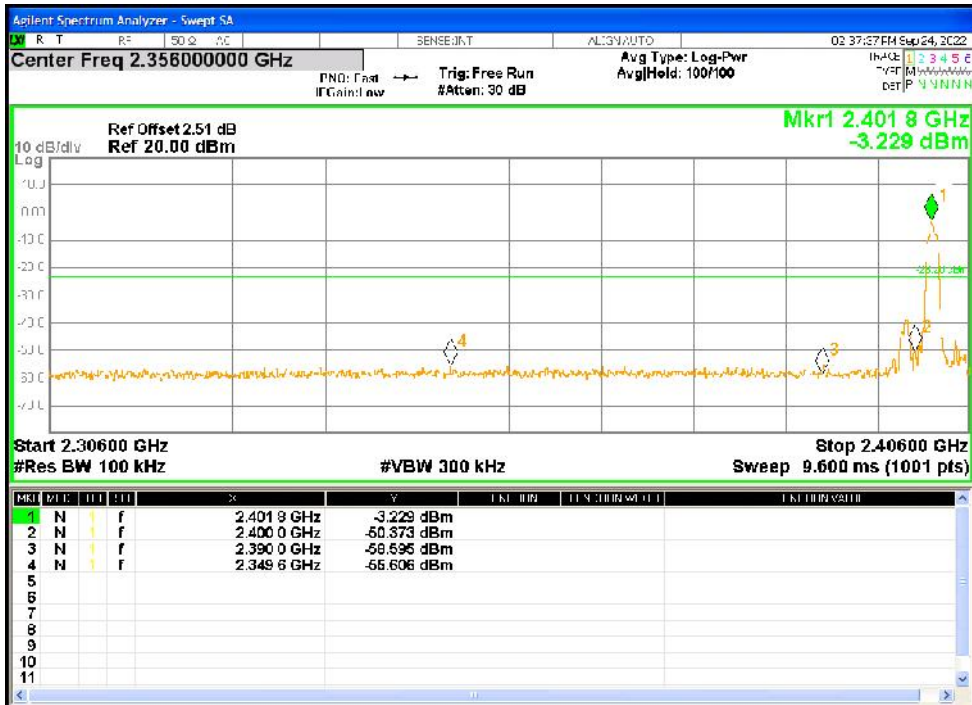


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

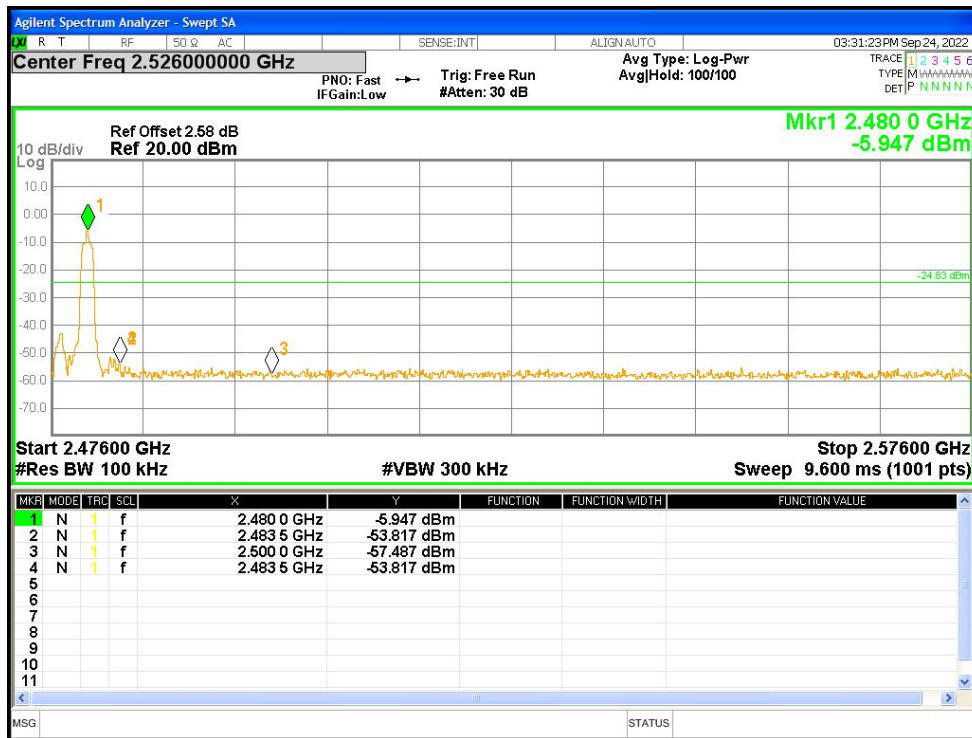

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref

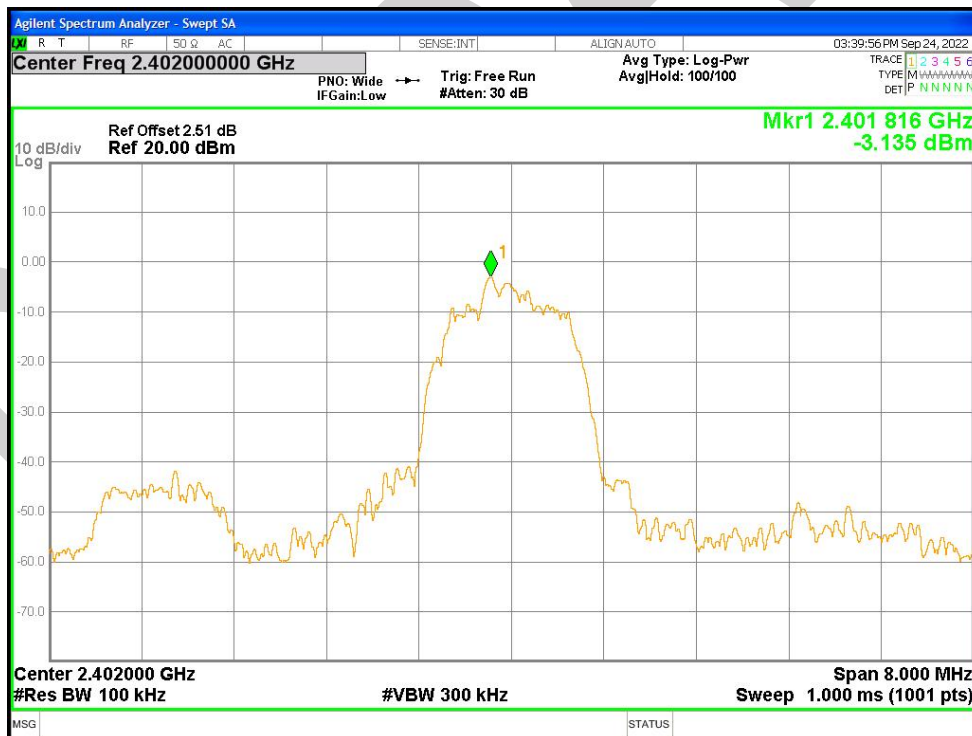


Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

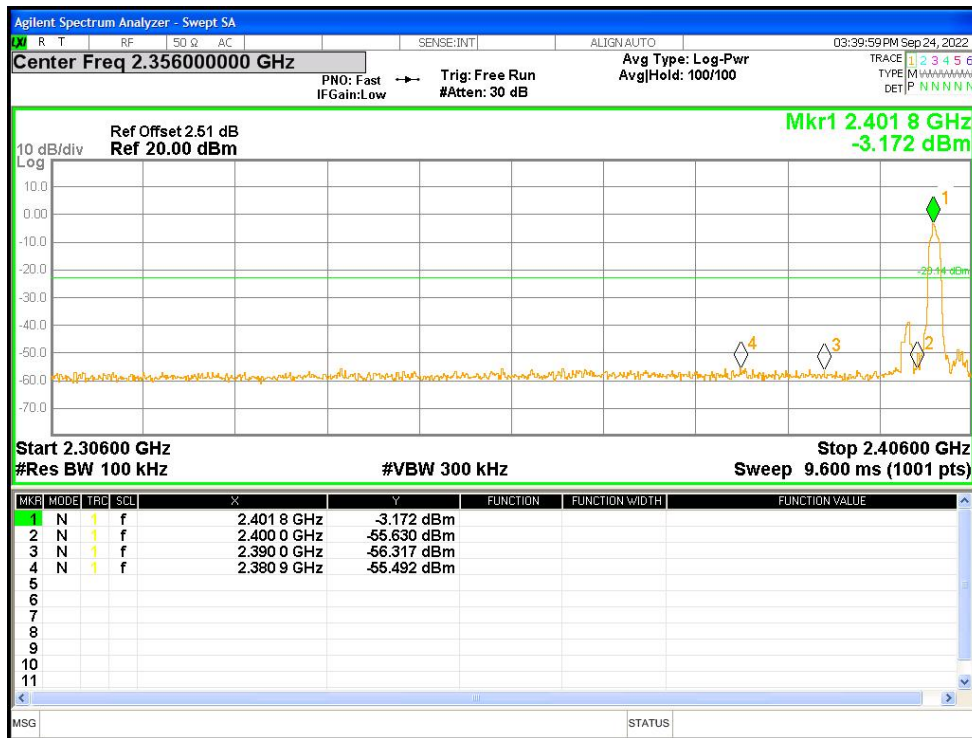

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

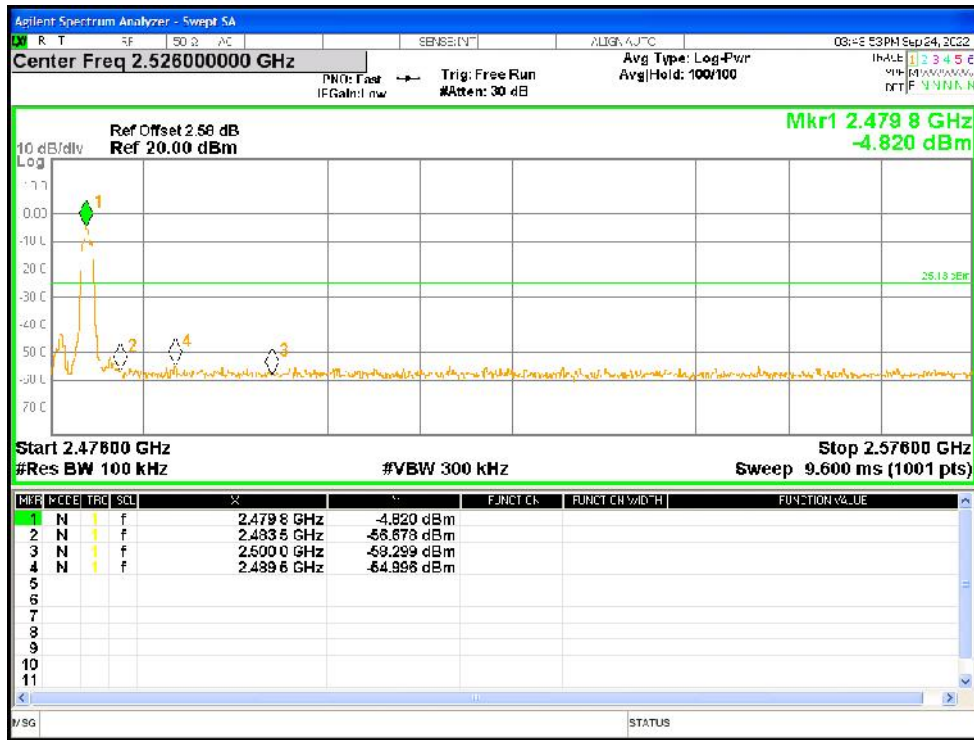

Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-51.27	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-49.59	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-51.03	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-48.74	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-51.15	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-49.21	-20	Pass

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission