



FCC RADIO TEST REPORT

Applicant : Acer India PVT Limited

Address : Acer India PVT Limited, 6th Floor, Embassy Heights, No. 13, Magrath Road, Bangalore- 560025, India

Equipment : Wifi module

Model No. : WXT2JM2511, WXT2JM2511(ACER ALTOS EZBA65), WXT2JM2511(ACER ALTOS EZB65), WXT2JM2511(ALTOS EZBA65), WXT2JM2511(ALTOS EZB65), WXT2JM2511(ACER ALTOS EZBA75), WXT2JM2511(ACER ALTOS EZB75), WXT2JM2511(ALTOS EZBA75), WXT2JM2511(ALTOS EZB75), WXT2JM2511(ACER ALTOS EZBA86), WXT2JM2511(ACER ALTOS EZB86), WXT2JM2511(ALTOS EZBA86), WXT2JM2511(ALTOS EZB86), WXT2JM2511(ACER ALTOS EZBA98), WXT2JM2511(ACER ALTOS EZB98), WXT2JM2511(ALTOS EZBA98), WXT2JM2511(ALTOS EZB98)

Trade Name : ACER, ALTOS


FCC ID : 2A94K-WXT2JM2511

Standard : FCC part 15 Subpart C §15.247

I HEREBY CERTIFY THAT:

The sample was received on Aug. 05, 2024 and the testing was completed on Aug. 21, 2024 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:


Leevin Li /Supervisor



Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels	7
2.3 Test Mode & Test Software	8
2.5 Description of Test System.....	10
2.6 General Information of Test.....	11
2.7 Measurement Uncertainty	11
3. Test Equipment and Ancillaries Used for Tests.....	12
4. Antenna Requirements.....	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain.....	14
5. Test of Conducted Emission.....	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data.....	17
6. Test of Radiated Emission	19
6.1 Test Limit	19
6.2 Test Procedures.....	20
6.3 Typical Test Setup	21
6.4 Test Result and Data (9kHz ~ 30MHz)	22
6.5 Test Result and Data (30MHz ~ 1GHz)	22
6.6 Test Result and Data (1GHz ~ 25GHz)	24
6.7 Restricted Bands of Operation.....	42
7. Test of Conducted Spurious Emission.....	55
7.1 Test Limit	55
7.2 Test Procedure	55
7.3 Test Setup Layout	55
7.4 Test Result and Data.....	55
8. 20dB Bandwidth Measurement Data.....	61
8.1 Test Limit	61
8.2 Test Procedures	61
8.3 Test Setup Layout	61
8.4 Test Result and Data.....	61
9. Frequencies Separation	64
9.1 Test Limit	64
9.2 Test Procedures	64
9.3 Test Setup Layout	64
9.4 Test Result and Data.....	64
10. Dwell Time on each channel.....	67



- 10.1 Test Limit 67
- 10.2 Test Procedures 67
- 10.3 Test Setup Layout 67
- 10.4 Test Result and Data 67
- 11. Number of Hopping Channels 71**
 - 11.1 Test Limit 71
 - 11.2 Test Procedures 71
 - 11.3 Test Setup Layout 71
 - 11.4 Test Result and Data 71
- 12. Maximum Peak Output Power 73**
 - 12.1 Test Limit 73
 - 12.2 Test Procedures 73
 - 12.3 Test Setup Layout 73
 - 12.4 Test Result and Data 73



History of this test report

Version No.	Report No	Date	Description
Rev.01	24080098-DRFCC04	Aug. 26, 2024	Initial Issue



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10: 2013

KDB 558074 D01 DTS Meas Guidance v05r02

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
§ 15.203	. Antenna Requirement	Pass
§ 15.207(a)	. Conducted Emission	Pass
§ 15.209(a)	. Radiated Emission	Pass
§ 15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
§ 15.247(a)(1)	. 20dB Bandwidth Measurement	Pass
§ 15.247(a)(1)	. Dwell Time	Pass
§ 15.247(b)	. Number of Hopping Channels	Pass
§ 15.247(b)	. Peak Output Power Measurement Data	Pass
§ 15.247(d)	. Band Edges Measurement Data	Pass

Note: Deviations Yes No ■

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Equipment	Wifi module
Model Name	WXT2JM2511, WXT2JM2511(ACER ALTOS EZBA65), WXT2JM2511(ACER ALTOS EZB65), WXT2JM2511(ALTOS EZBA65), WXT2JM2511(ALTOS EZB65), WXT2JM2511(ACER ALTOS EZBA75), WXT2JM2511(ACER ALTOS EZB75), WXT2JM2511(ALTOS EZBA75), WXT2JM2511(ALTOS EZB75), WXT2JM2511(ACER ALTOS EZBA86), WXT2JM2511(ACER ALTOS EZB86), WXT2JM2511(ALTOS EZBA86), WXT2JM2511(ALTOS EZB86), WXT2JM2511(ACER ALTOS EZBA98), WXT2JM2511(ACER ALTOS EZB98),WXT2JM2511(ALTOS EZBA98), WXT2JM2511(ALTOS EZB98)
Model Discrepancy	All models are identical to each other except for model name and trade name. Model WXT2JM2511 is the representative for final test.
Frequency Range	BT/BLE/ WIFI 2.4G: 2400MHz-2483.5MHz WIFI 5G: 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz -5725MHz, 5725MHz -5850MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 2.4GHz 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Data Rate	BT: GFSK:1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK:3Mbps BLE: GFSK: 1Mbps, 2Mbps, 125kbps, 500kbps WIFI 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6,9,12,18,24,36,48,54Mbps 802.11n: MCS0-MCS15, HT20/HT40 802.11ax: MCS0-MCS11, HE20/HE40 WIFI 5GHz: 802.11a: 6,9,12,18,24,36,48,54Mbps 802.11n: MCS0-MCS15, HT20/HT40 802.11ac: MCS0-MCS9, VHT20/40/80 802.11ax: MCS0-MCS11, HE20/HE40/HE80
Working Temperature	0°C to 60°C
EUT Power Rating:	5V±10%

Note:

1. EUT support Client mode without radar detection.
2. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---



2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- b. The complete test system included support units and EUT for RF test.
- c. An executive program, “WCN_Combo_Tool.exe (Ver.: W2022)” under Windows 10 System was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps) for AC120V
2	$\pi/4$ -DQPSK (2Mbps) for AC120V
3	8DPSK (3Mbps) for AC120V
4	8DPSK (3Mbps) for AC240V
caused “Test Mode 3 and CH00:2480” generated the worst case, it was reported as the final data.	
Radiation Emissions (Below 1GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused “Test Mode 3 and CH00:2480” generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)
caused “Test Mode 1, 2, 3” generated the worst case, they were reported as the final data.	




2.4 Power Parameter Value of the test software

Mode	Frequency (MHz)	Power Setting
GFSK (1Mbps)	2402	7
	2441	7
	2480	7
$\pi/4$ -DQPSK (2Mbps)	2402	7
	2441	7
	2480	7
8DPSK (3Mbps)	2402	7
	2441	7
	2480	7



2.5 Description of Test System

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook	SONY	PCG-71811P	27544574 7000251	Non-Shielded, 1.8m

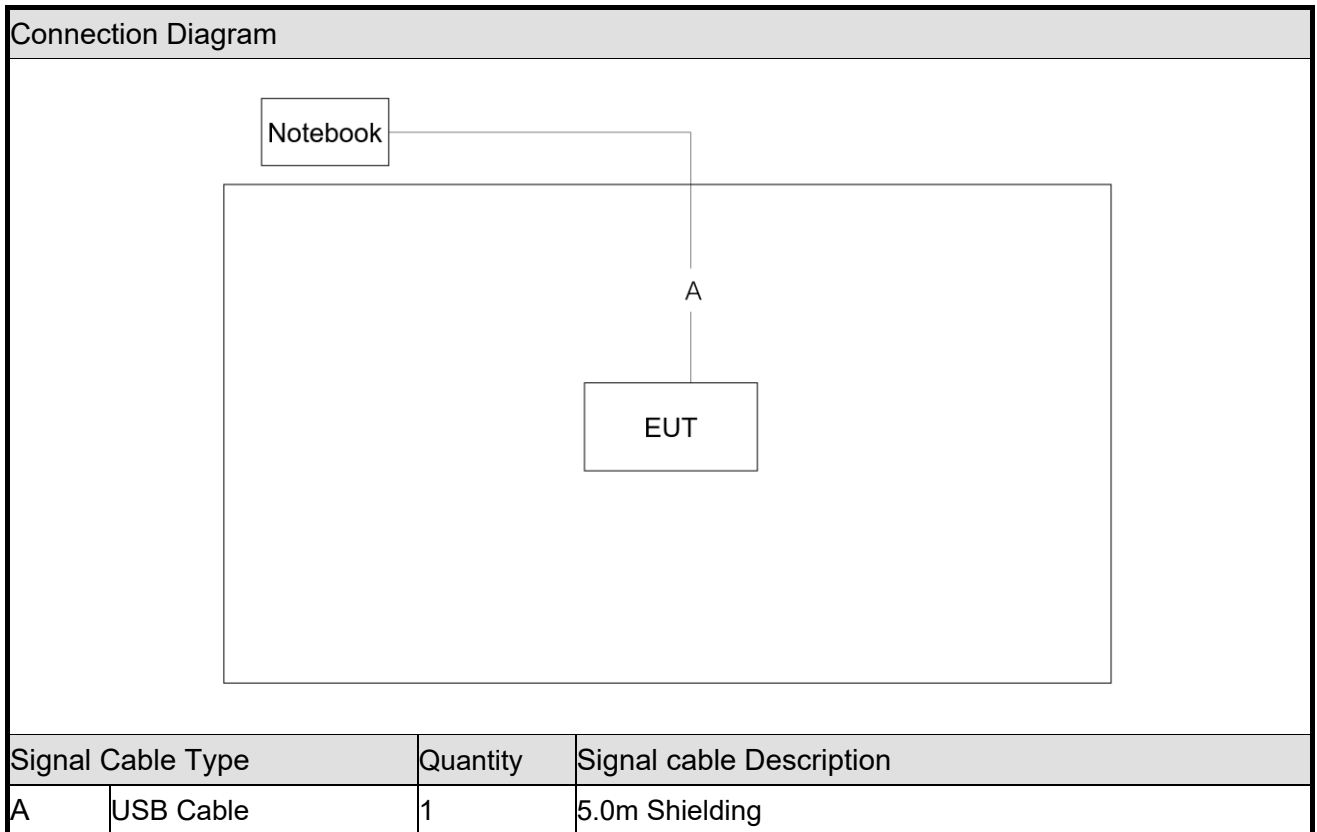



2.6 General Information of Test

Test Site	CerpPASS Technology Corporation(CerpPASS Laboratory) Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 25,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-DG	2024/08/13	24°C / 55%	Amos Zhang
Radiated Emissions	3M01-DG	2024/08/12~2024/08/21	23~25°C / 50~58%	Amos Zhang
AC Power Line Conducted Emission	CON02-DG	2024/08/14	22°C / 60%	Amos Zhang

2.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±2.60dB
Radiated Spurious Emission(9KHz~30MHz)	±4.10dB
Radiated Spurious Emission(30MHz~1GHz)	±4.51dB
Radiated Spurious Emission(1GHz~18GHz)	±5.36dB
Radiated Spurious Emission(18GHz~40GHz)	±5.43dB
6dB Bandwidth&20dB Bandwidth	±4.8%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±0.94dB
Power Spectral Density	±1.01dB
Dwell Time / Deactivation Time	±3.5%

**3. Test Equipment and Ancillaries Used for Tests**

AC Power Line Conducted Emission					
Test Site	CON02-DG				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESR-EMI TEST RECEIYER	R&S	ESR3	102728	2024/08/01	2025/07/31
Two-Line V-Network	R&S	ENV216	100325	2024/08/01	2025/07/31
LISN	SCHWARZBECK	NSLK 8127	8127749	2024/08/01	2025/07/31
Cable	Aoda	RG214	Cable-07	2024/08/01	2025/07/31
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2024/08/02	2025/08/01
Software	AUDIX	E3	Version: 8.14806b	N/A	N/A

Radiated Emissions					
Test Site	3M01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100565	2024/08/01	2025/07/31
Amplifier	EMCI	EMC330	980082	2024/01/03	2025/01/02
Loop Antenna	R&S	HFH2-Z2	100150	2024/01/03	2026/01/02
Bilog Antenna	Sunol Science	JB1	A072414-3	2023/06/18	2025/06/17
Preamplifier	Agilent	8449B	3008A02342	2024/08/01	2025/07/31
Preamplifier	COM-POWER	PA-840	711885	2024/01/03	2025/01/02
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 D	9120D-619	2024/01/03	2026/01/02
Standard Gain Horn Antenna	TRC	HA-2640	18050	2024/01/03	2026/01/02
Standard Gain Horn Antenna	TRC	HA-1726	18051	2024/01/03	2026/01/02
FSQ Signal Analyzer	R&S	FSQ40	200012	2024/01/03	2025/01/02
Cable	EMCI	EM104-NM SM-8.5M	Cable-03	2024/08/01	2025/07/31
Cable	Jiuzhoubona	T-SMA	SMA48AL-7000	2024/08/01	2025/07/31
Cable	CH-CoDesigh	CCXA81-S MAMNM-1 M	Cable-05	2024/08/01	2025/07/31
Cable	CH-CoDesigh	CCXA40-2.92-2.92-1M	21071954	2024/08/02	2025/08/01
Cable	CH-CoDesigh	CCX40-2.92 M-2.92M-9 M	21070892	2024/08/02	2025/08/01
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2024/08/02	2025/08/01
Software	AUDIX	E3	Version: 8.14806b	N/A	N/A



RF Conducted					
Test Site	RFCON01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2024/01/03	2025/01/02
EXA Signal Analyzer	KEYSIGHT	N9010A	MY53400169	2024/01/03	2025/01/02
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2024/01/03	2025/01/02
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2024/01/03	2025/01/02
USB Wideband Power Sensor	Boonton	55006	9778	2024/08/02	2025/08/01
Temperature/ Humidity Meter	mingle	ETH529	N/A	2024/01/03	2025/01/02



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Antenna Gain
PIFA Antenna	4.01dBi



5. Test of Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

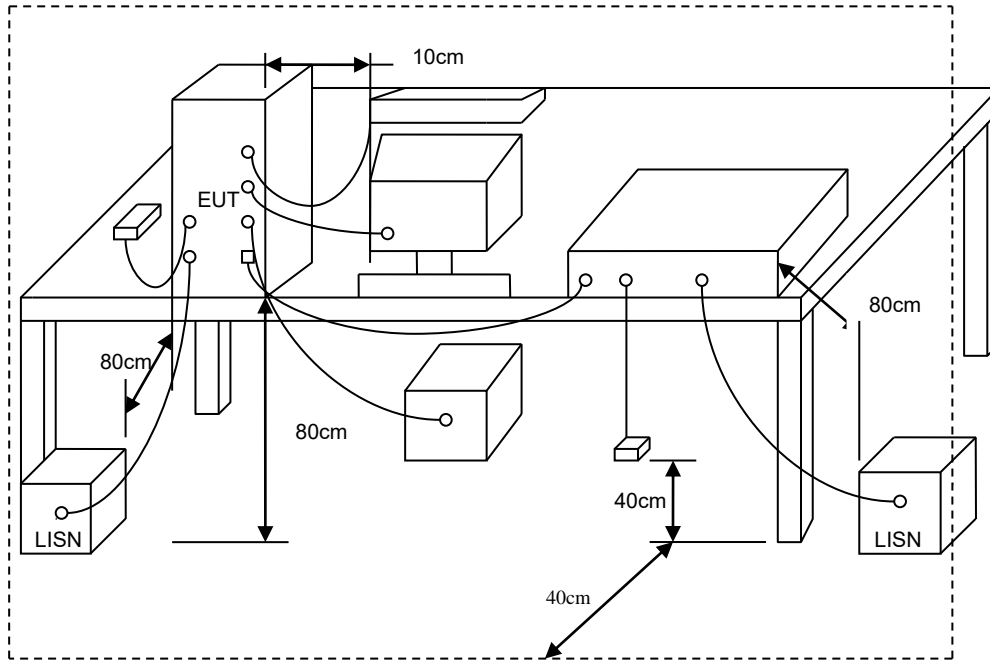




5.4 Test Result and Data

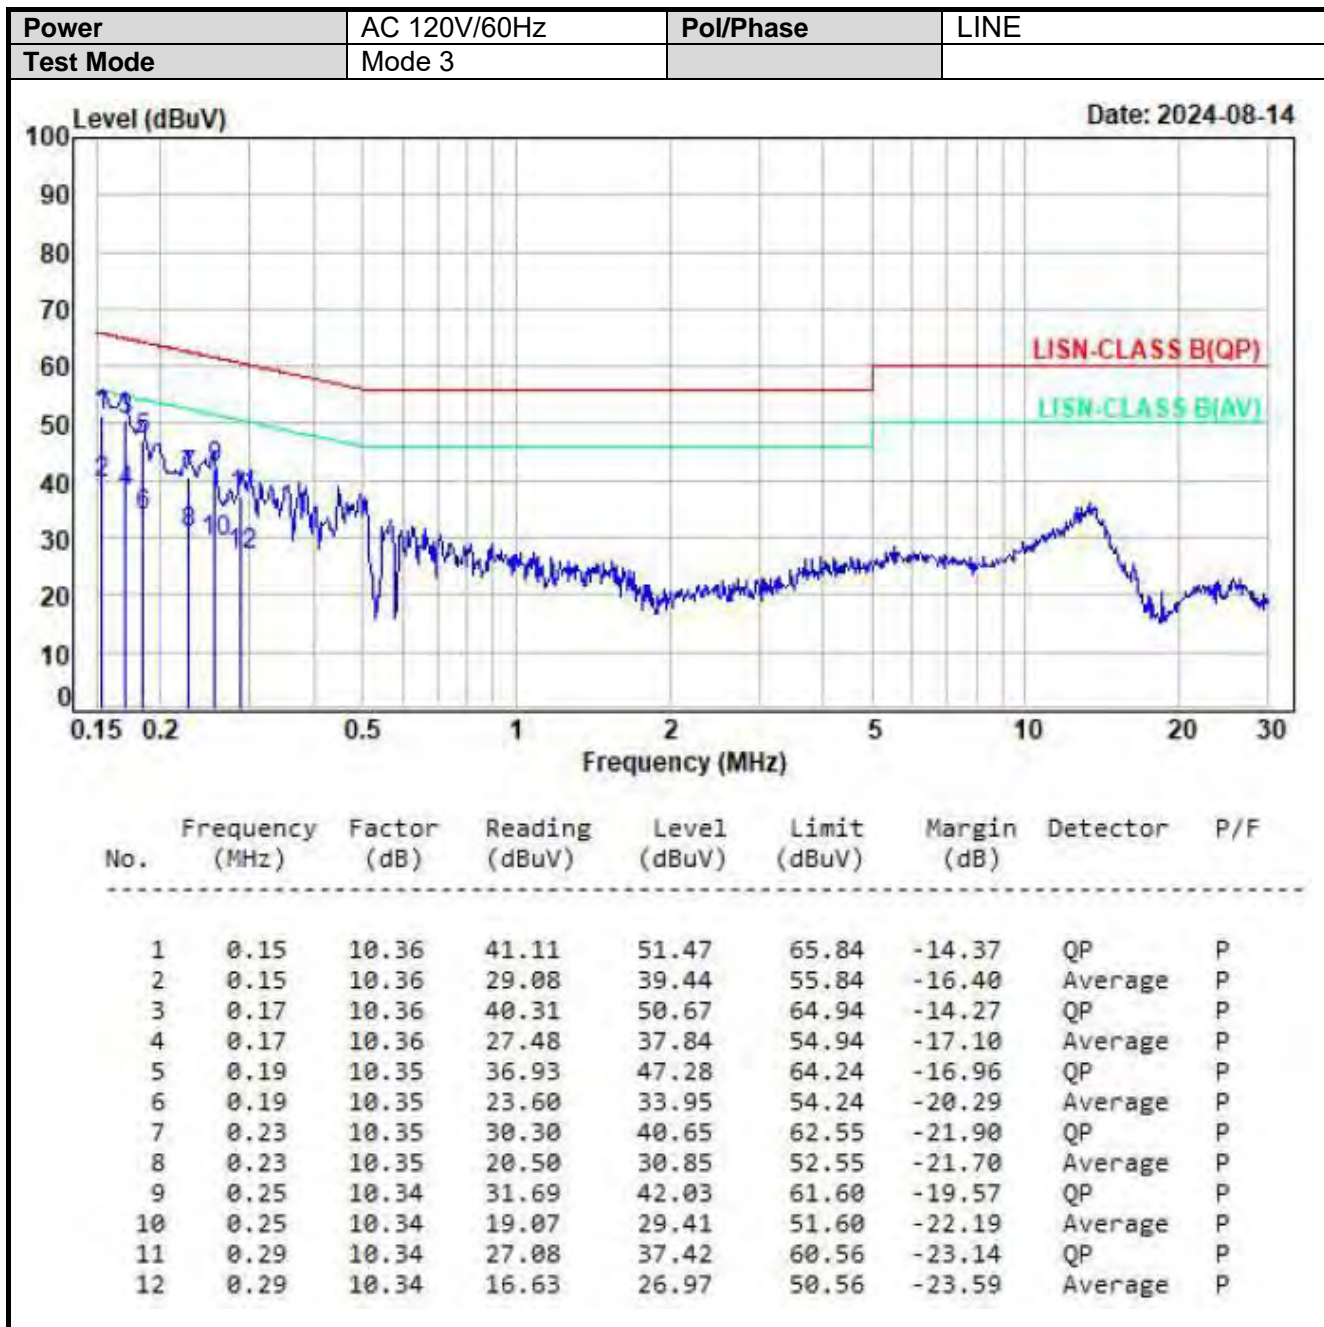

Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator

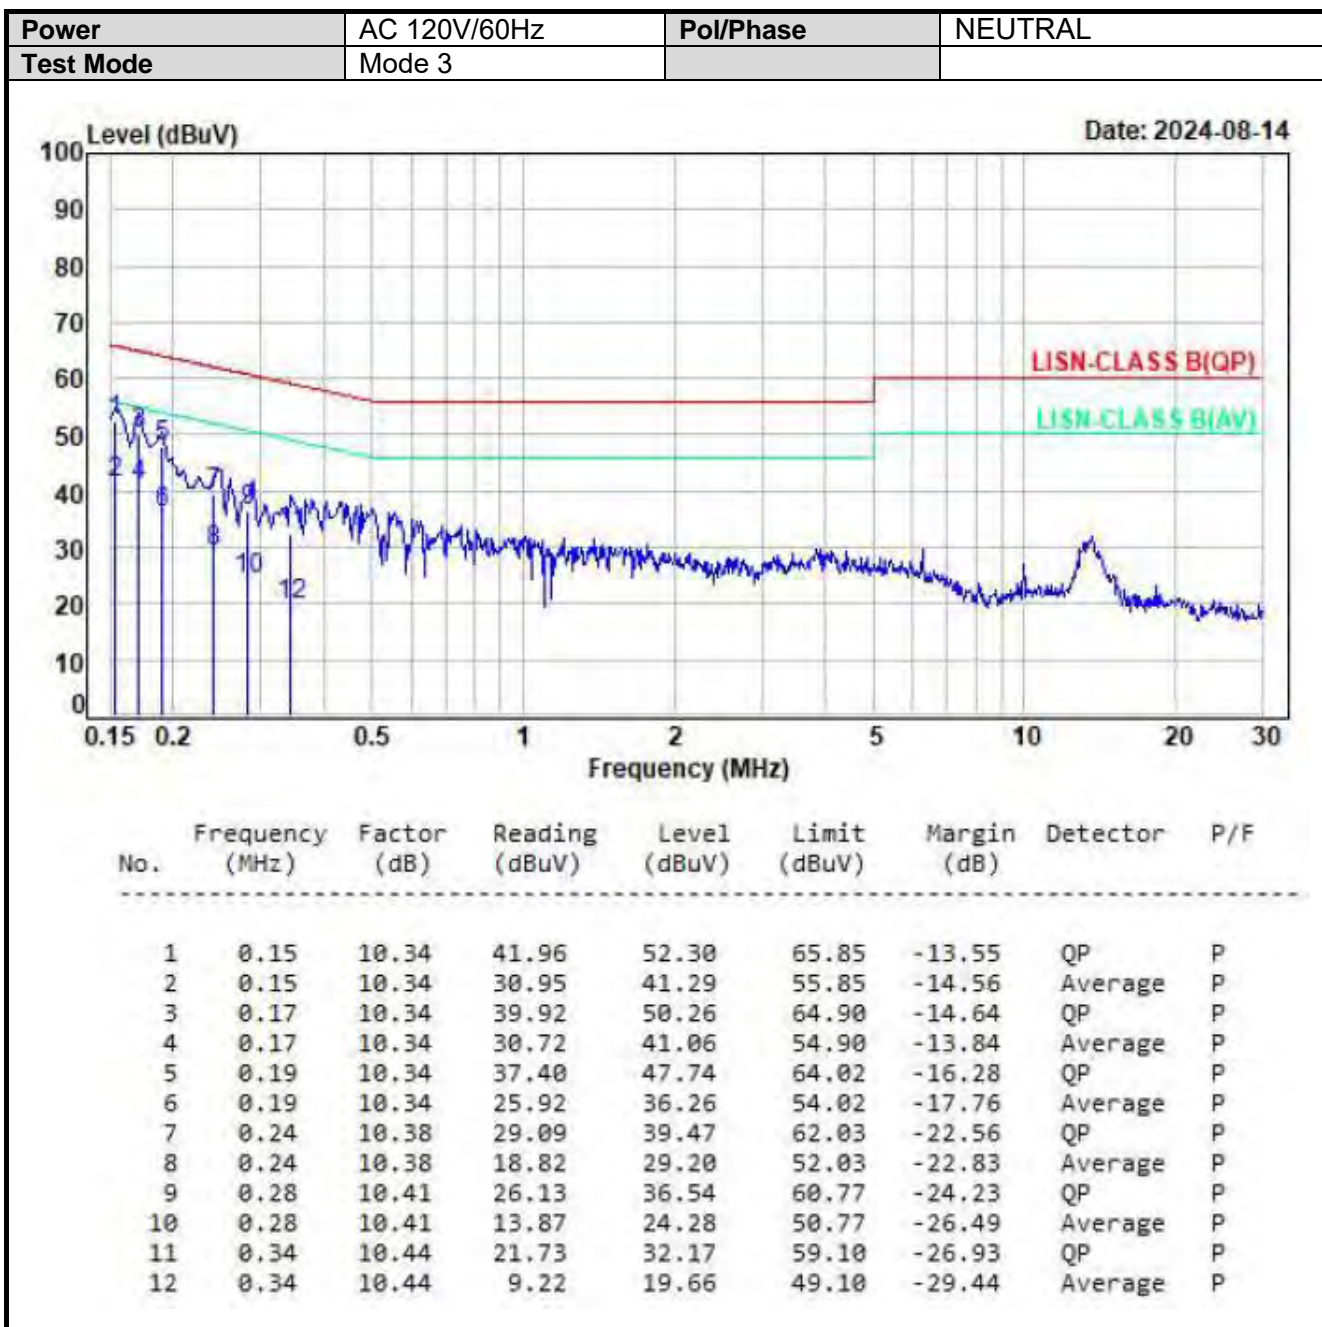

Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



6. Test of Radiated Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH(microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground; above 1GHz, the height was 1.5m.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.

(X AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

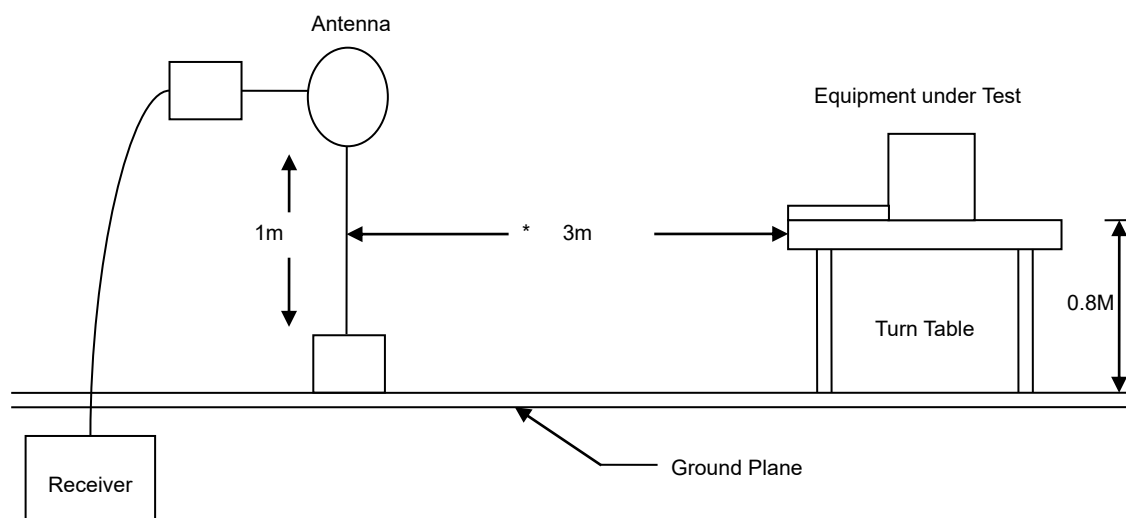

30MHz- 1GHz Test Setup

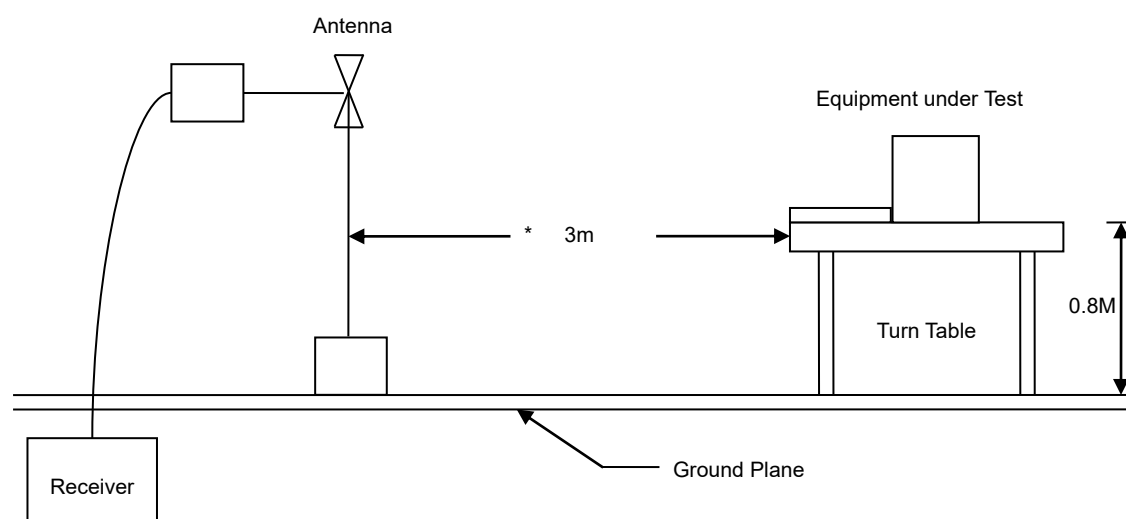

Above 1GHz Test Setup

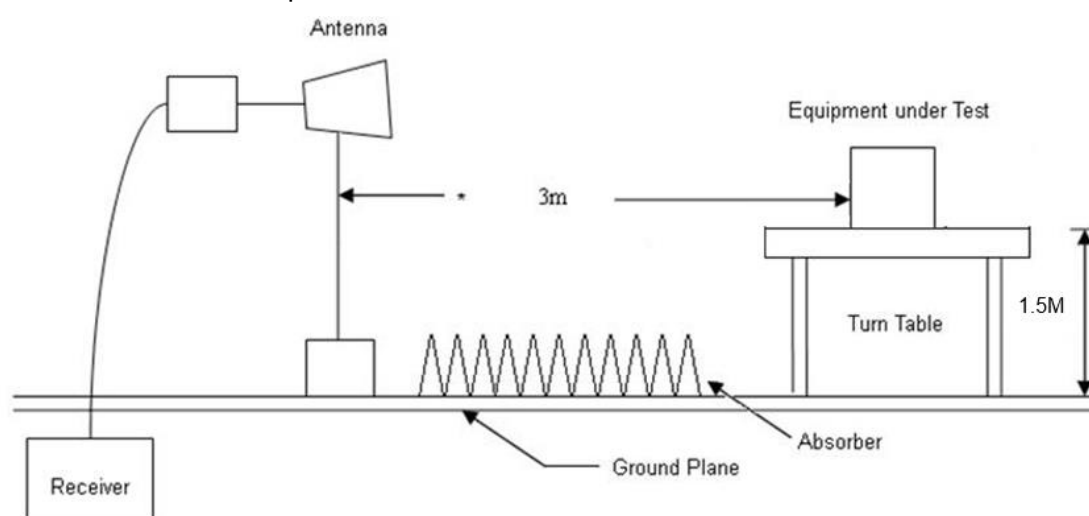





6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

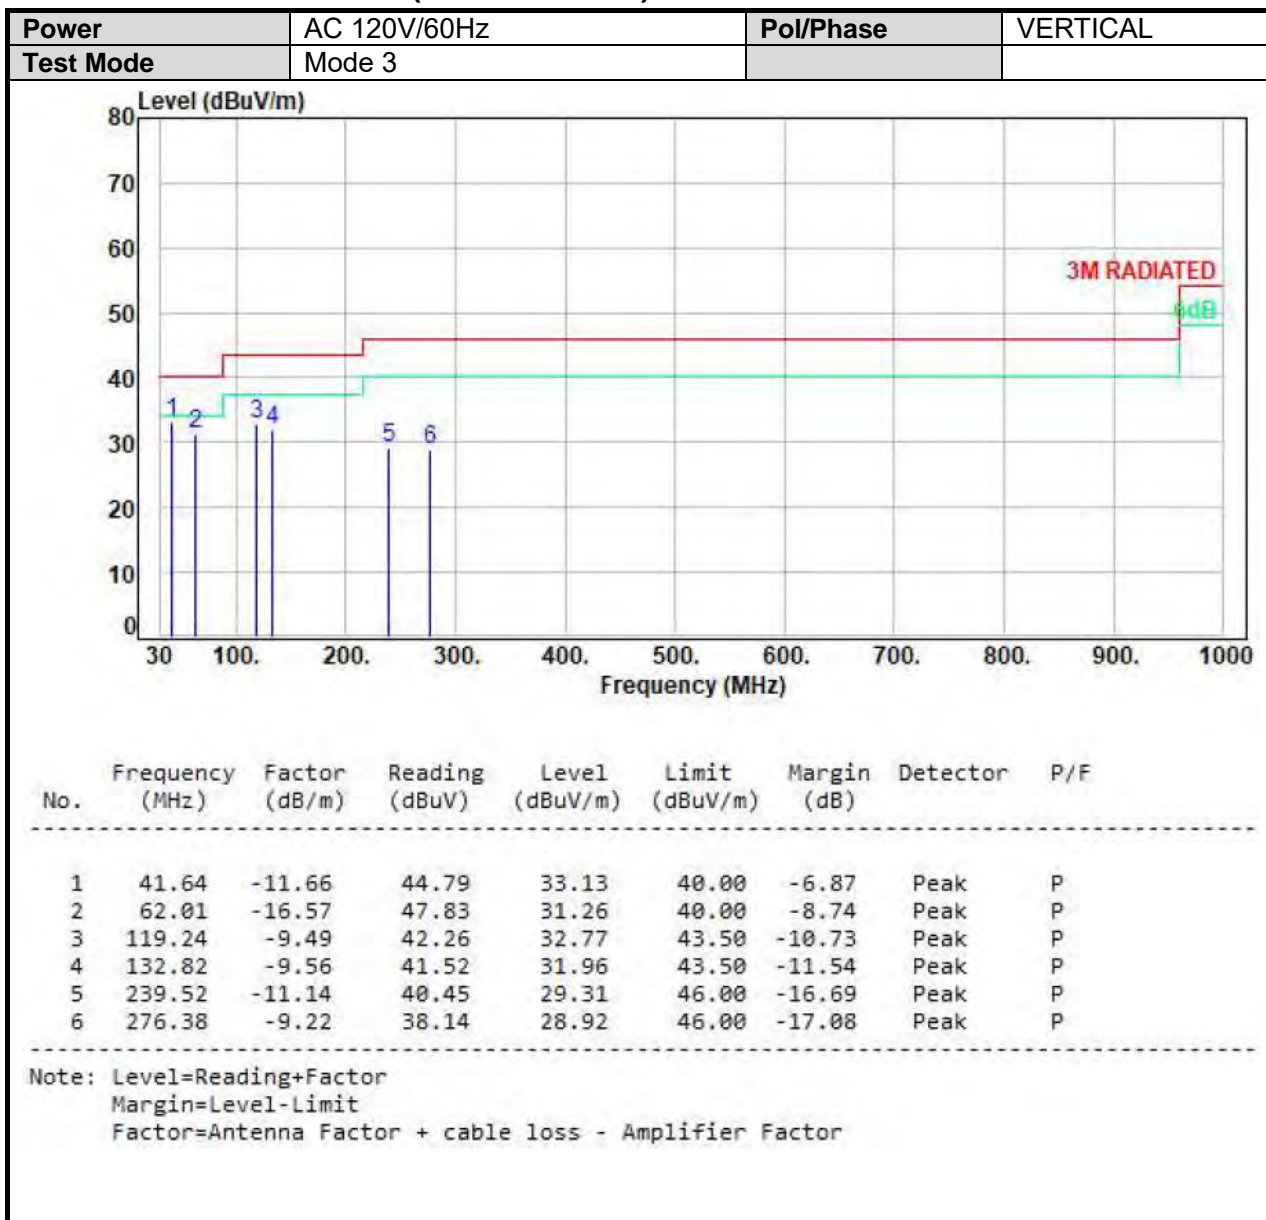


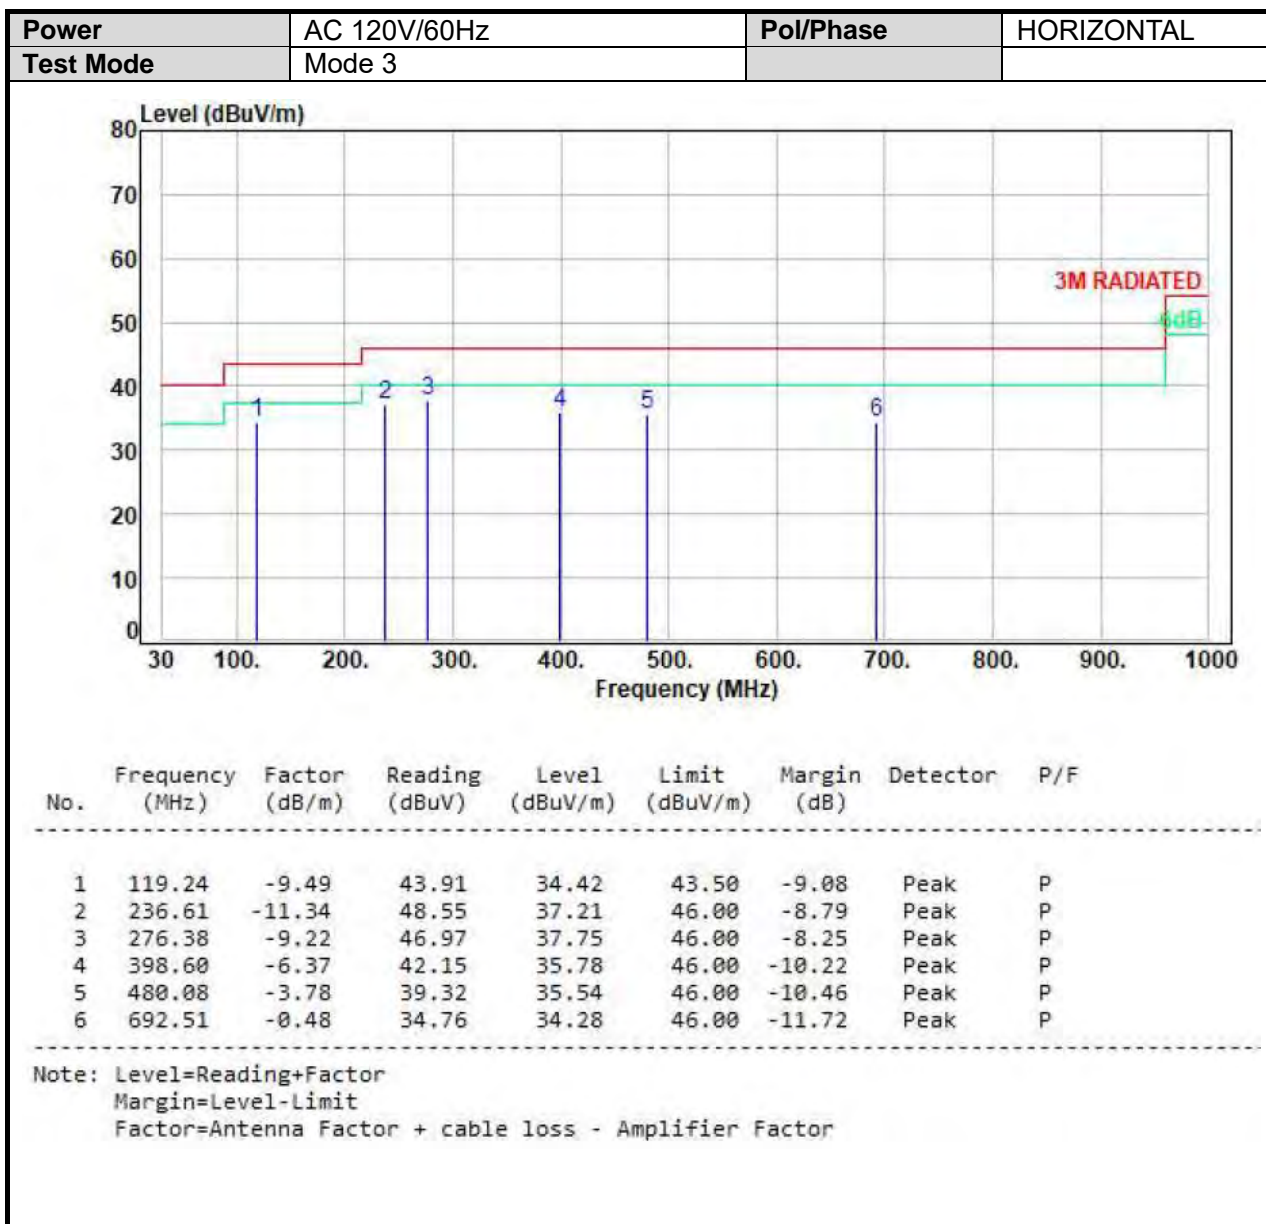



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, CH 00	Operation mode	TX

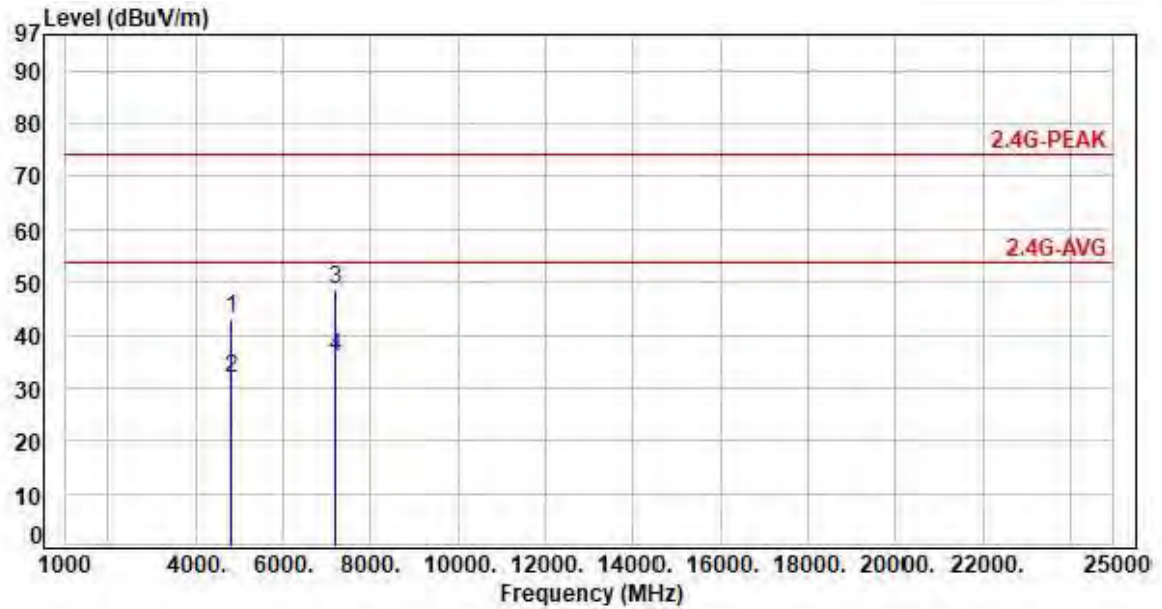


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4804.00	1.22	42.01	43.23	74.00	-30.77	Peak	P
2	4804.00	1.22	30.43	31.65	54.00	-22.35	Average	P
3	7206.00	7.72	40.80	48.52	74.00	-25.48	Peak	P
4	7206.00	7.72	28.22	35.94	54.00	-18.06	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, CH 00	Operation mode	TX

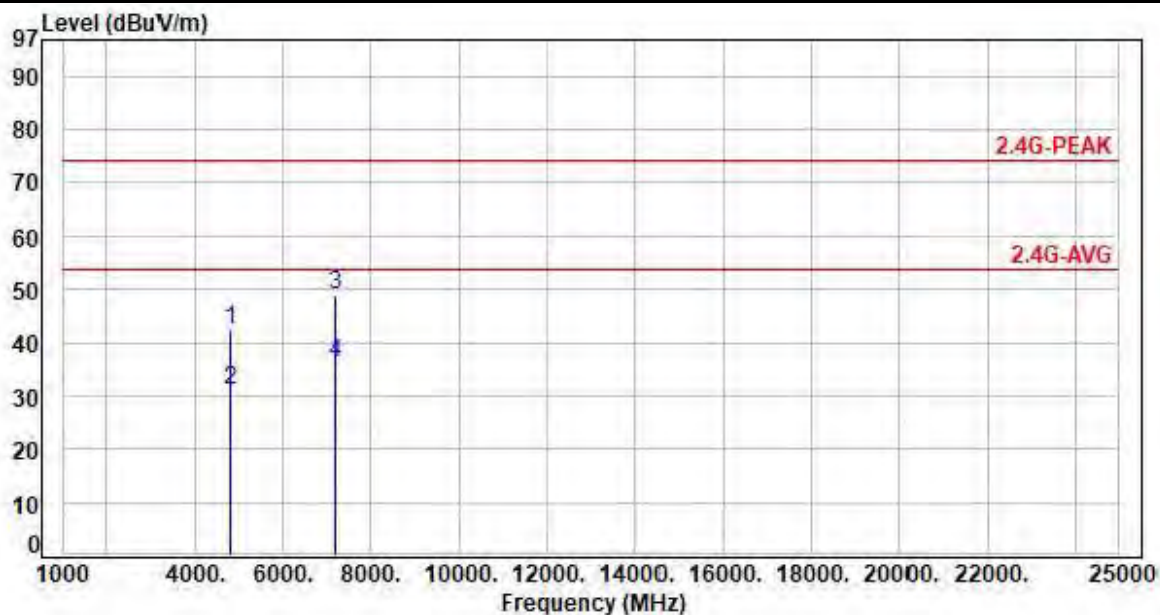

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4804.00	1.22	41.11	42.33	74.00	-31.67	Peak	P
2	4804.00	1.22	29.67	30.89	54.00	-23.11	Average	P
3	7206.00	7.72	41.17	48.89	74.00	-25.11	Peak	P
4	7206.00	7.72	28.53	36.25	54.00	-17.75	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

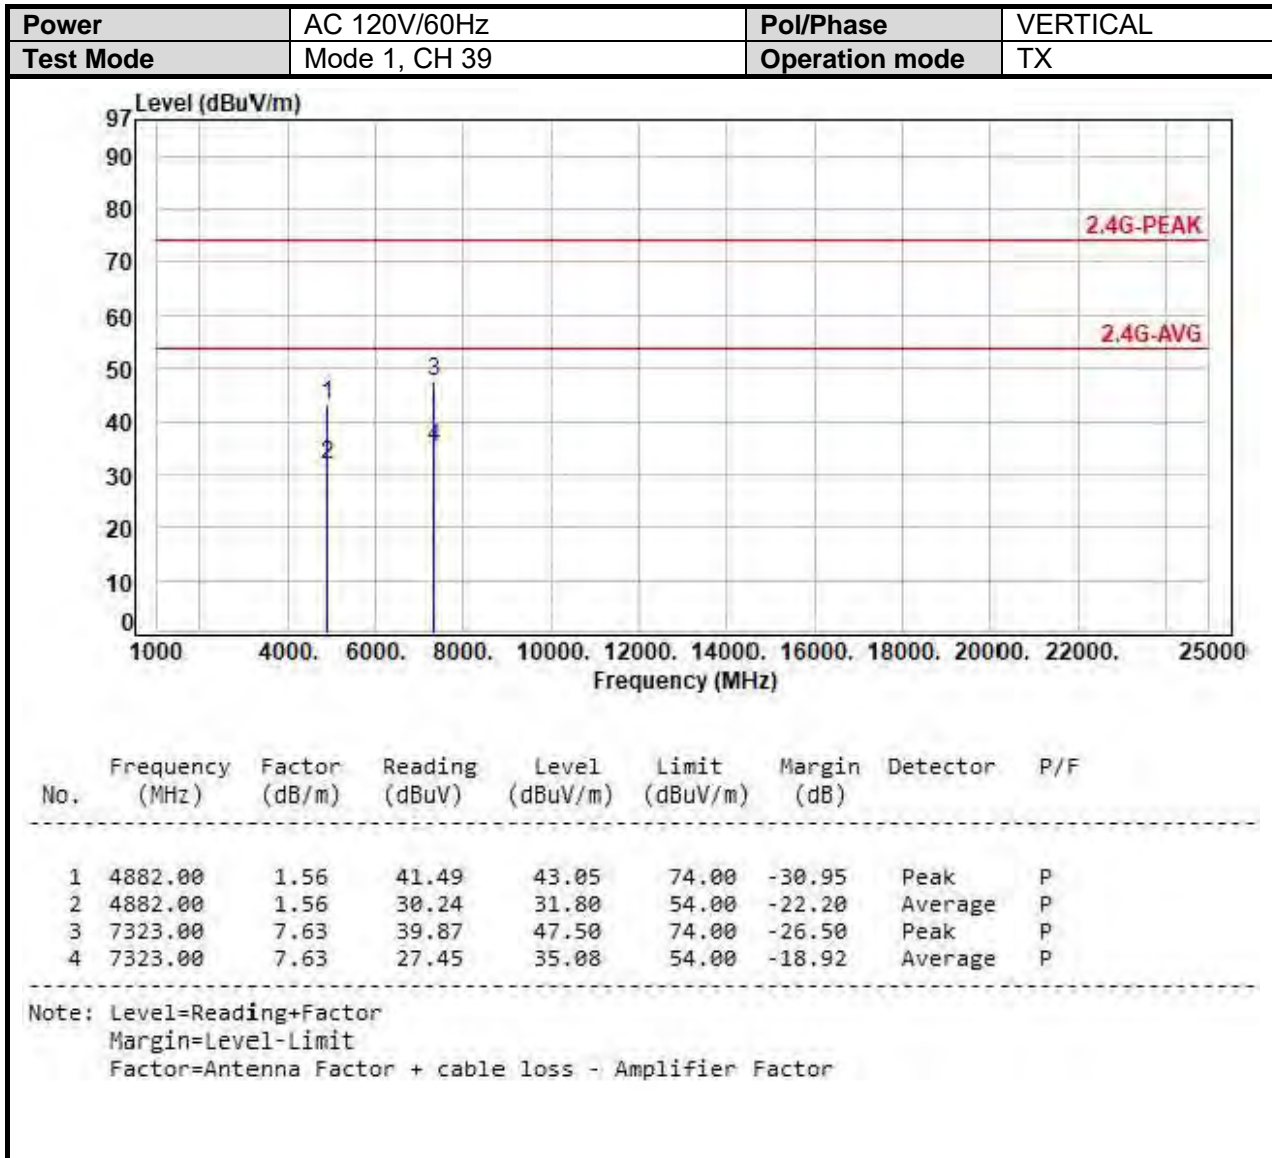

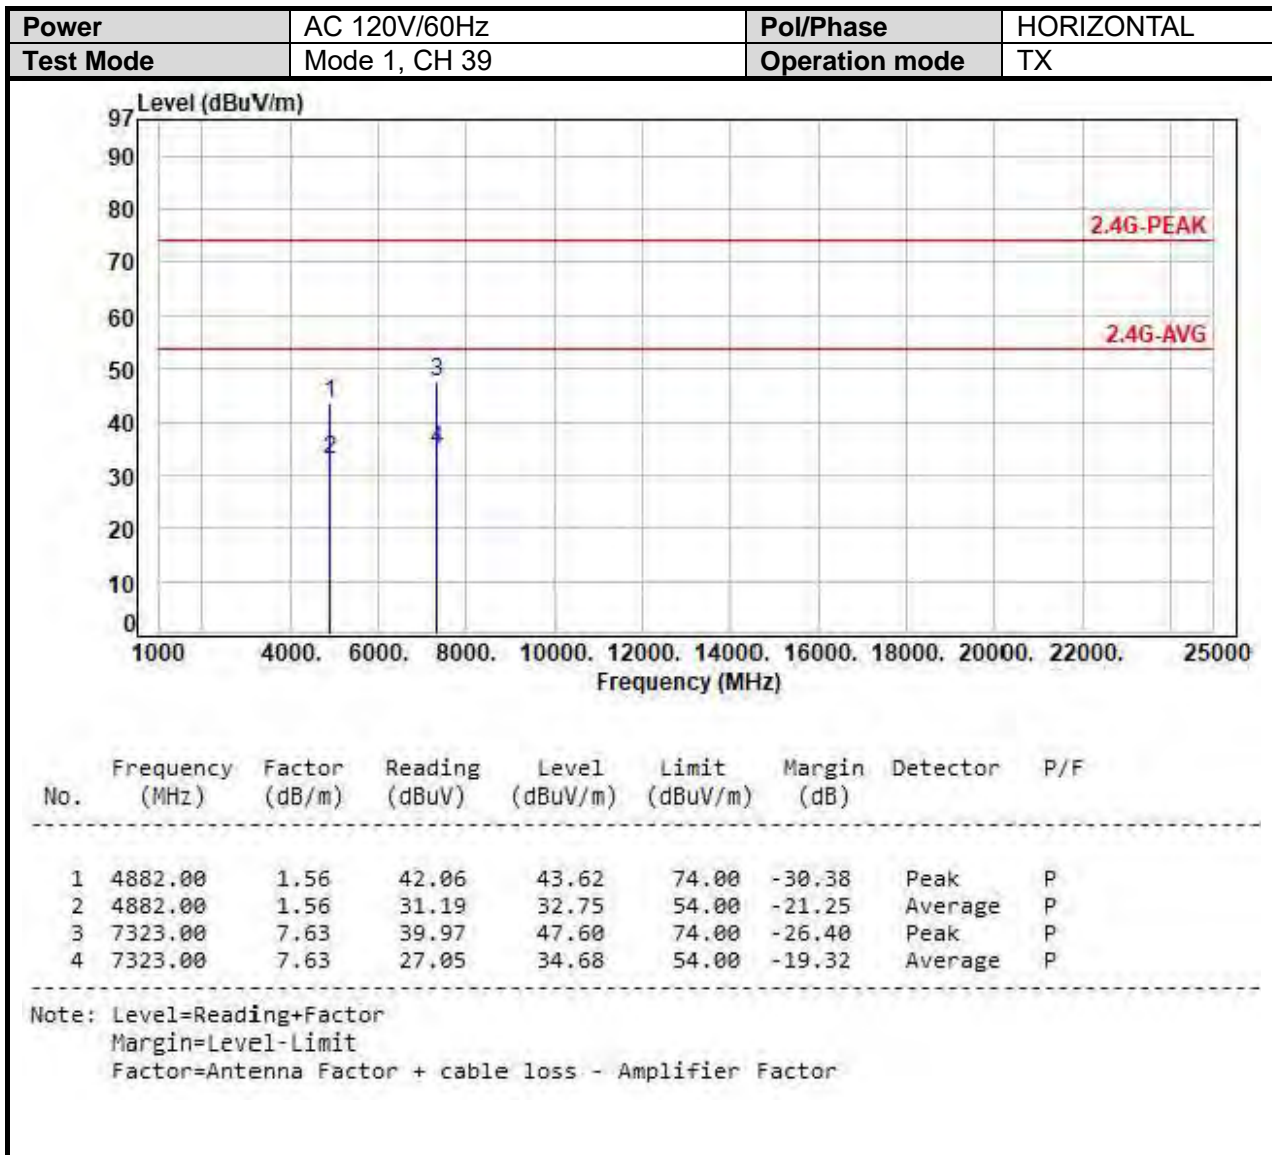





Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, CH 78	Operation mode	TX

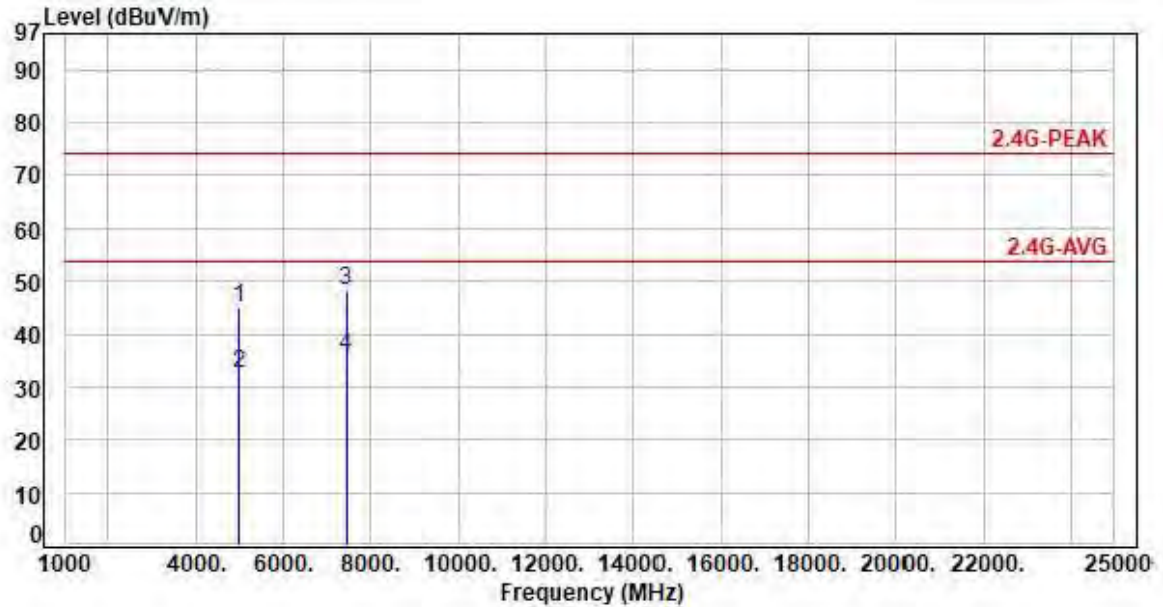

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	4960.00	1.90	42.96	44.86	74.00	-29.14	Peak	P
2	4960.00	1.90	30.60	32.50	54.00	-21.50	Average	P
3	7440.00	7.51	40.67	48.18	74.00	-25.82	Peak	P
4	7440.00	7.51	28.18	35.69	54.00	-18.31	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

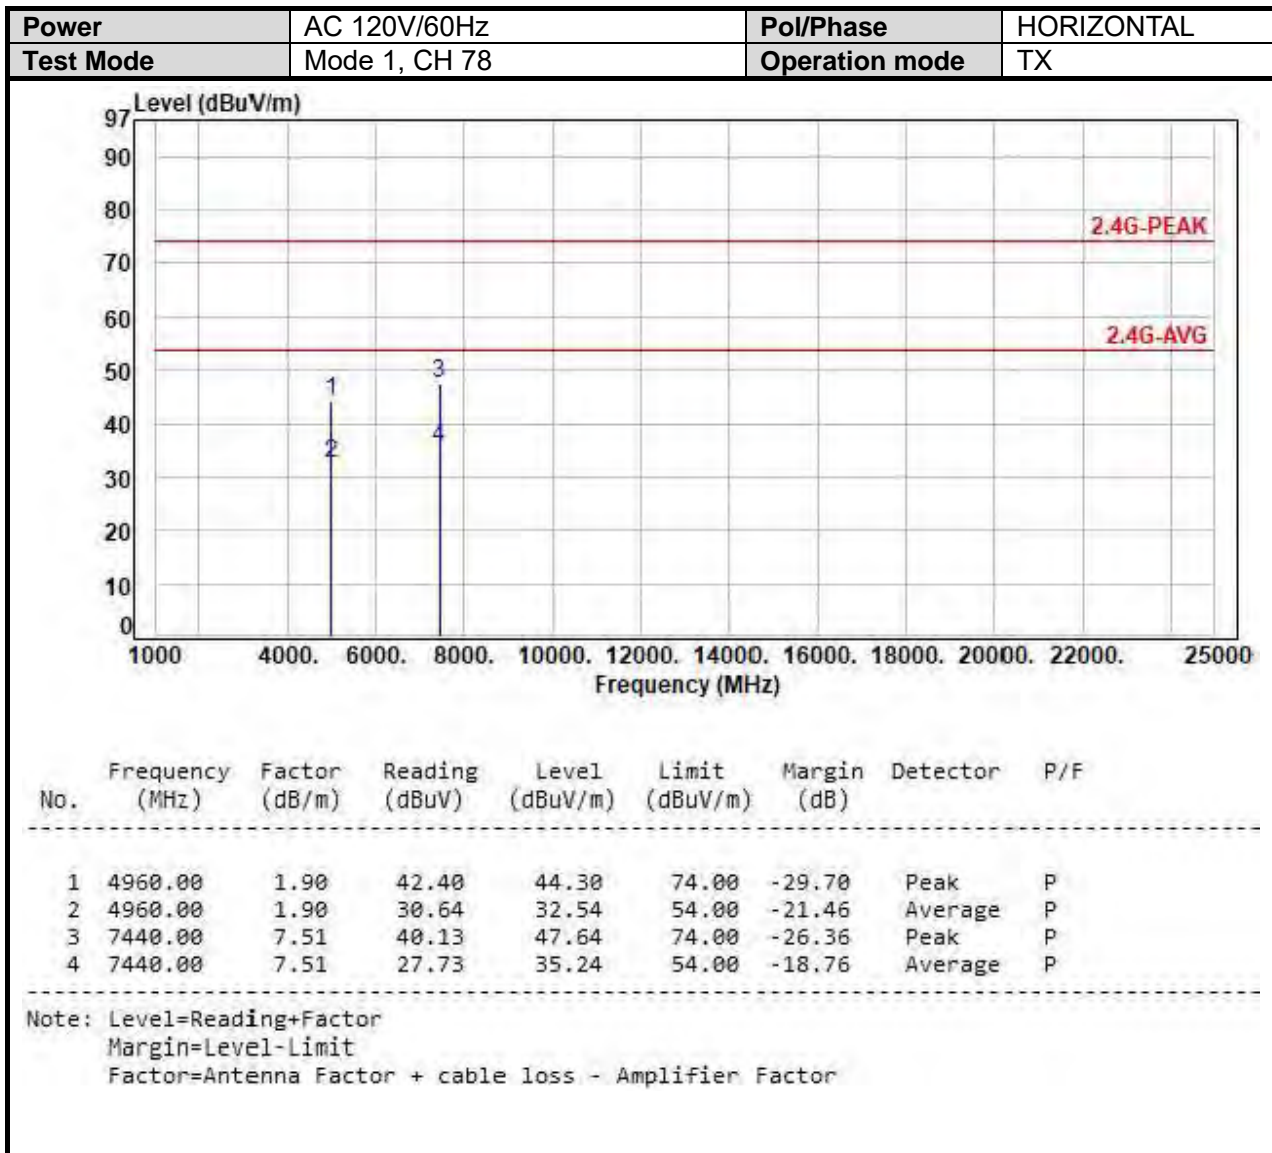

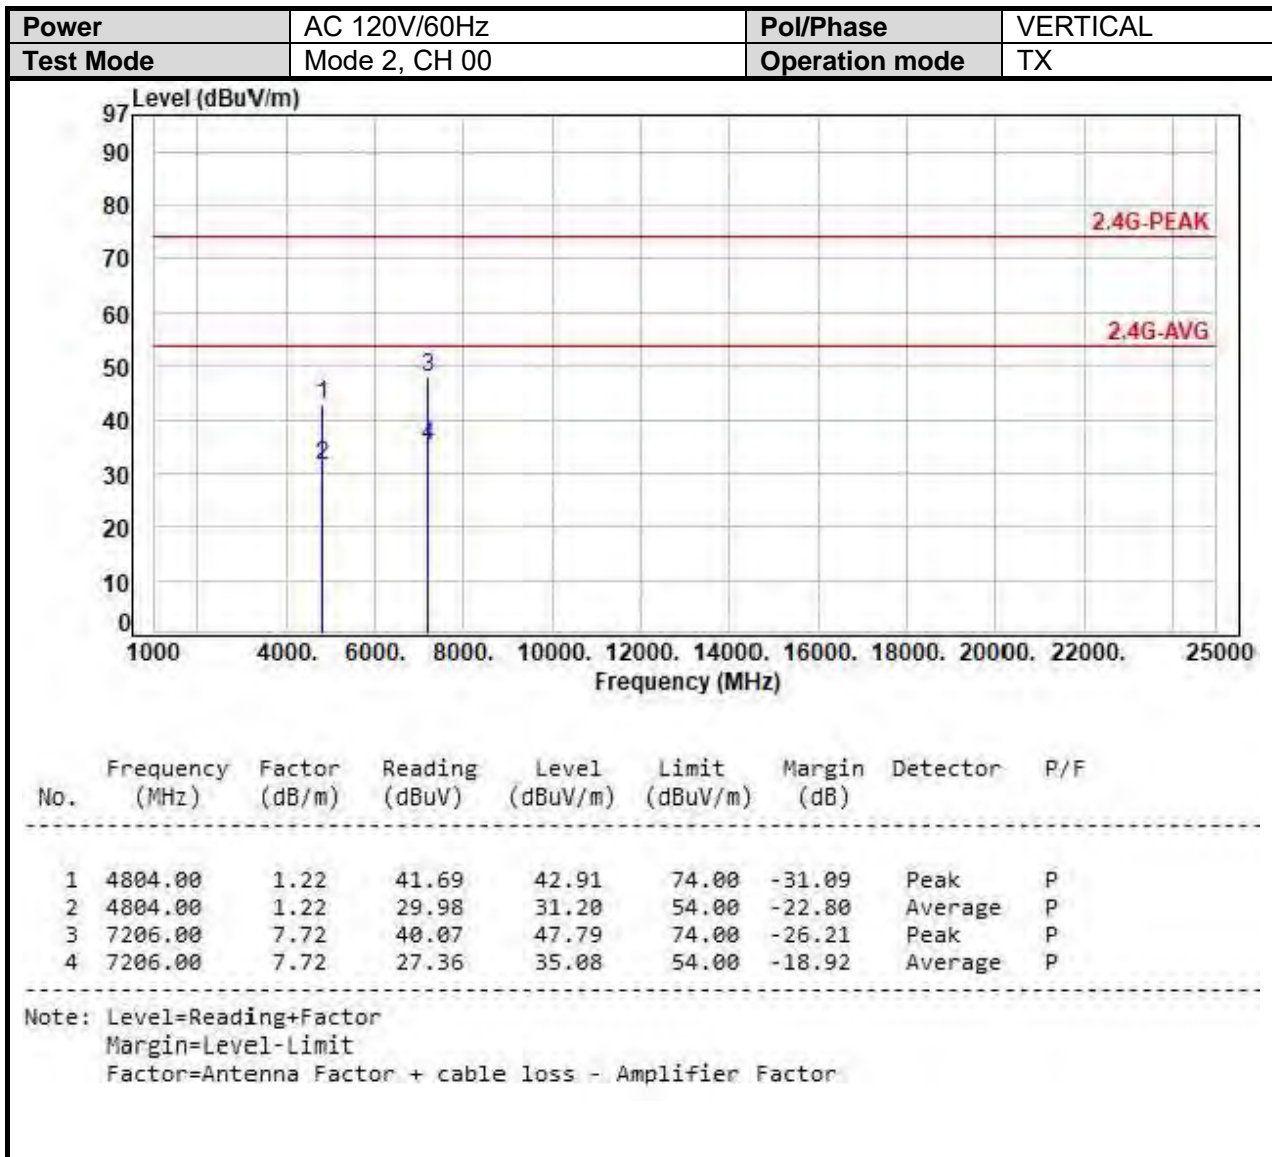



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 2, CH 00	Operation mode	TX

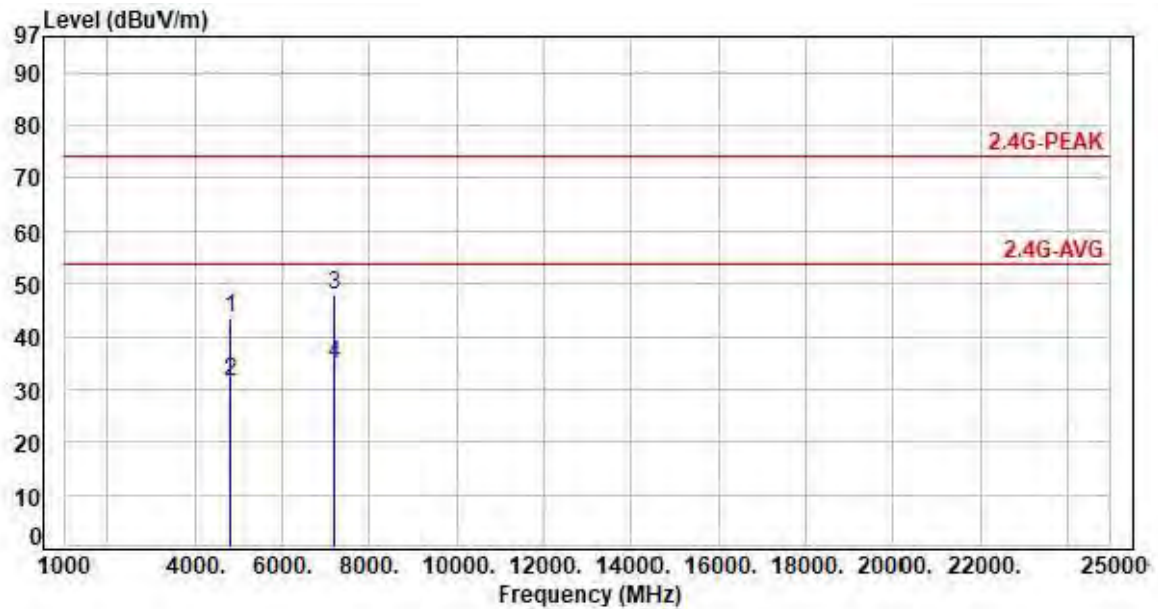


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4804.00	1.22	42.13	43.35	74.00	-30.65	Peak	P
2	4804.00	1.22	30.13	31.35	54.00	-22.65	Average	P
3	7206.00	7.72	40.08	47.80	74.00	-26.20	Peak	P
4	7206.00	7.72	27.09	34.81	54.00	-19.19	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 2, CH 39	Operation mode	TX

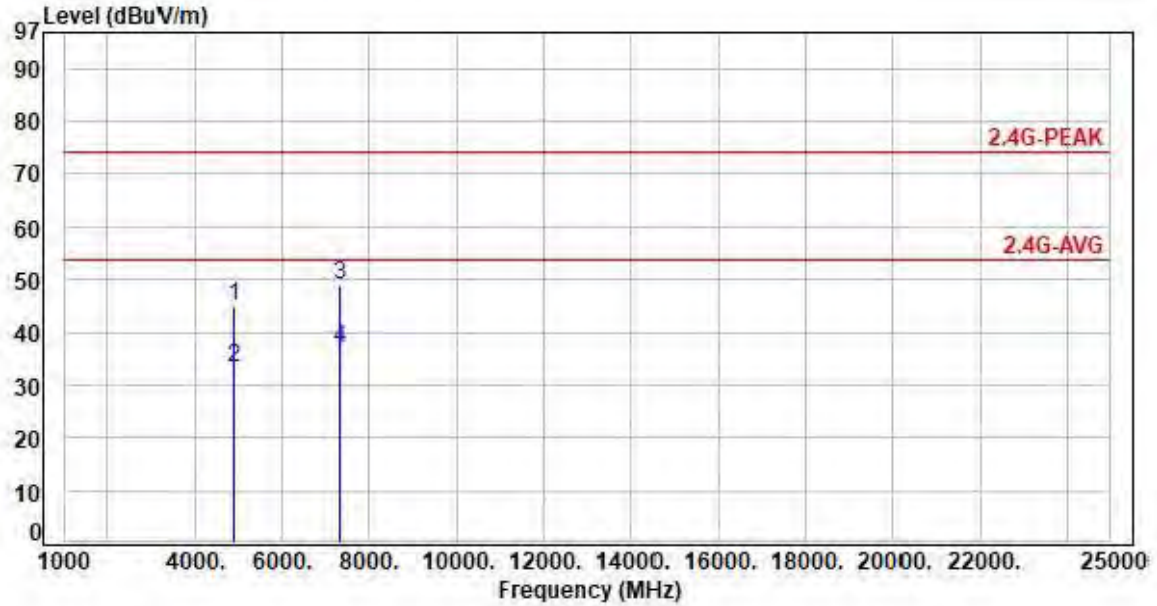



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4882.00	1.56	43.58	45.14	74.00	-28.86	Peak	P
2	4882.00	1.56	31.71	33.27	54.00	-20.73	Average	P
3	7323.00	7.63	41.40	49.03	74.00	-24.97	Peak	P
4	7323.00	7.63	29.27	36.90	54.00	-17.10	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

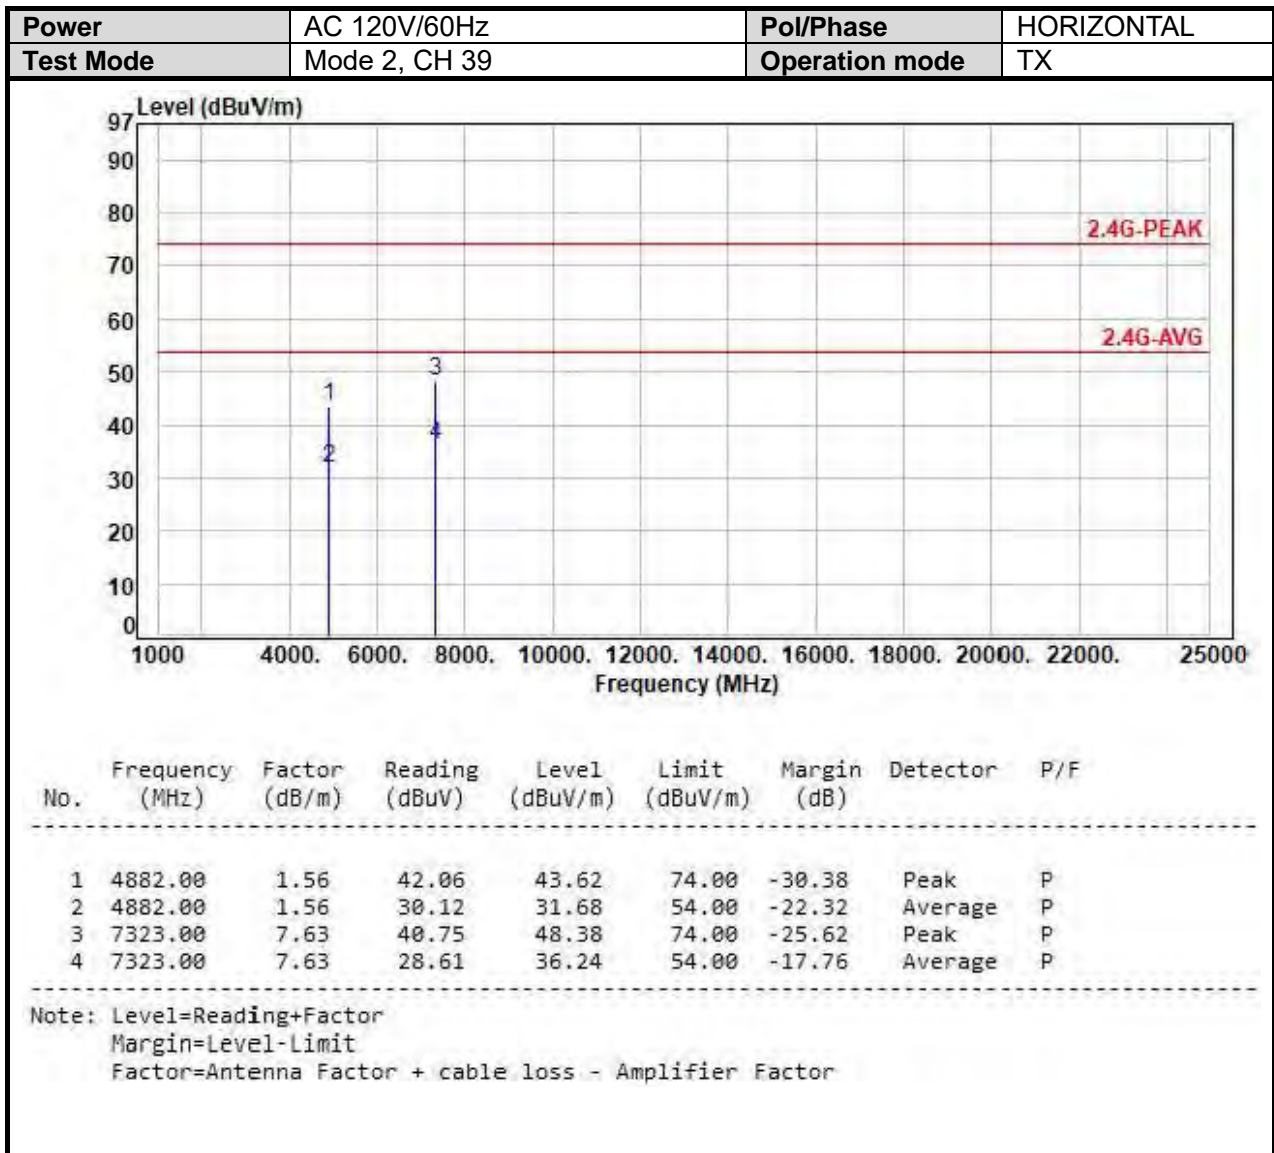


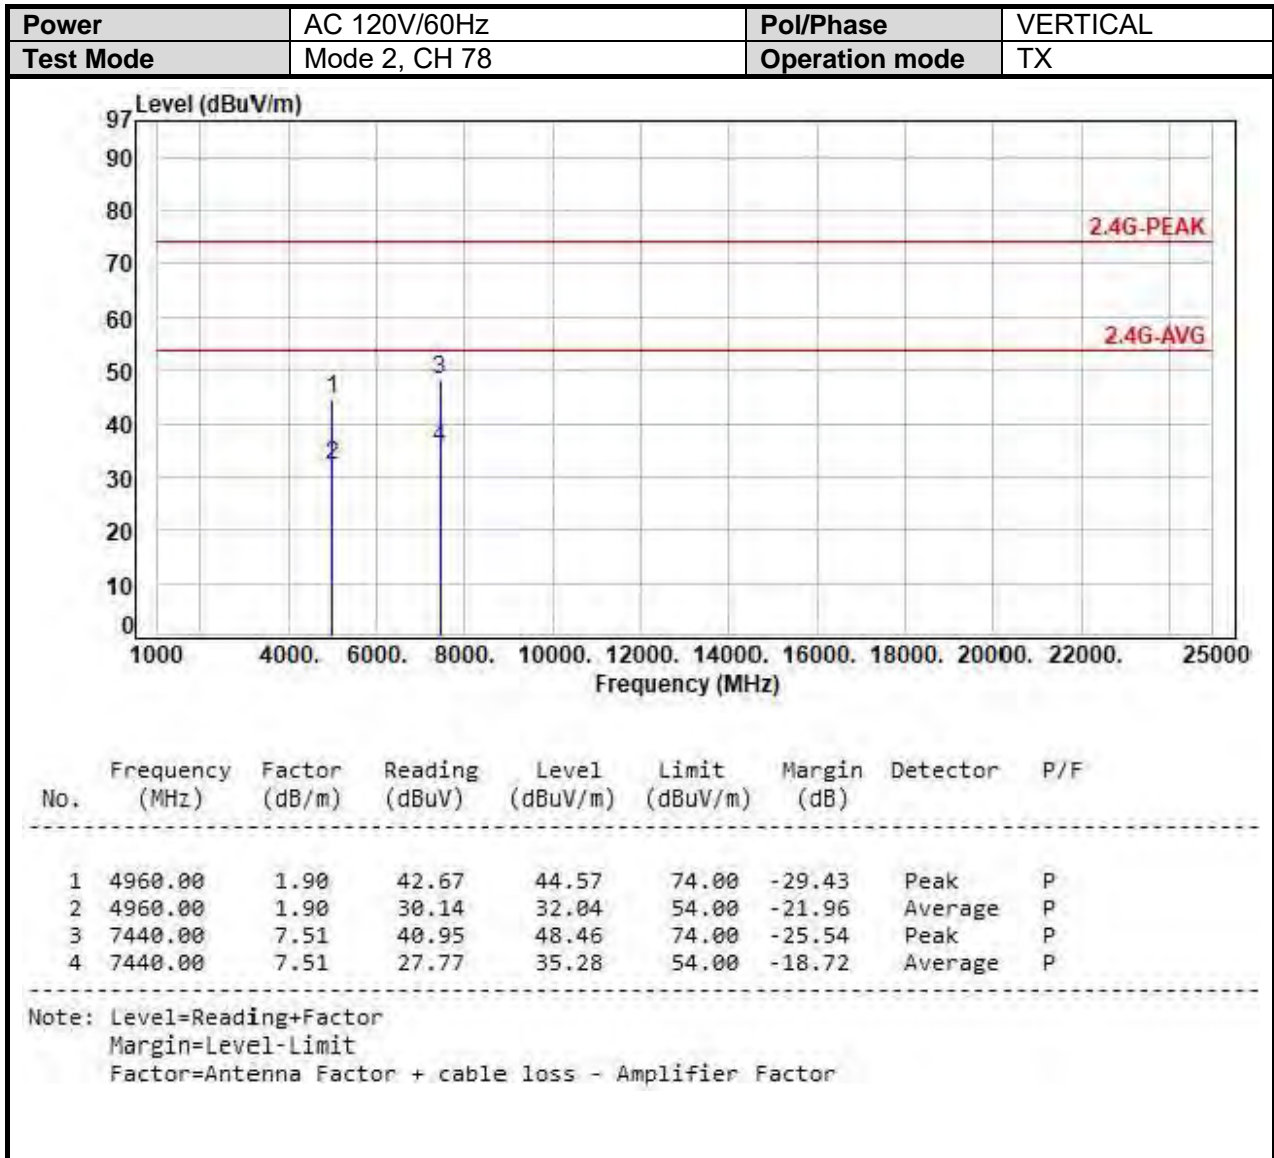


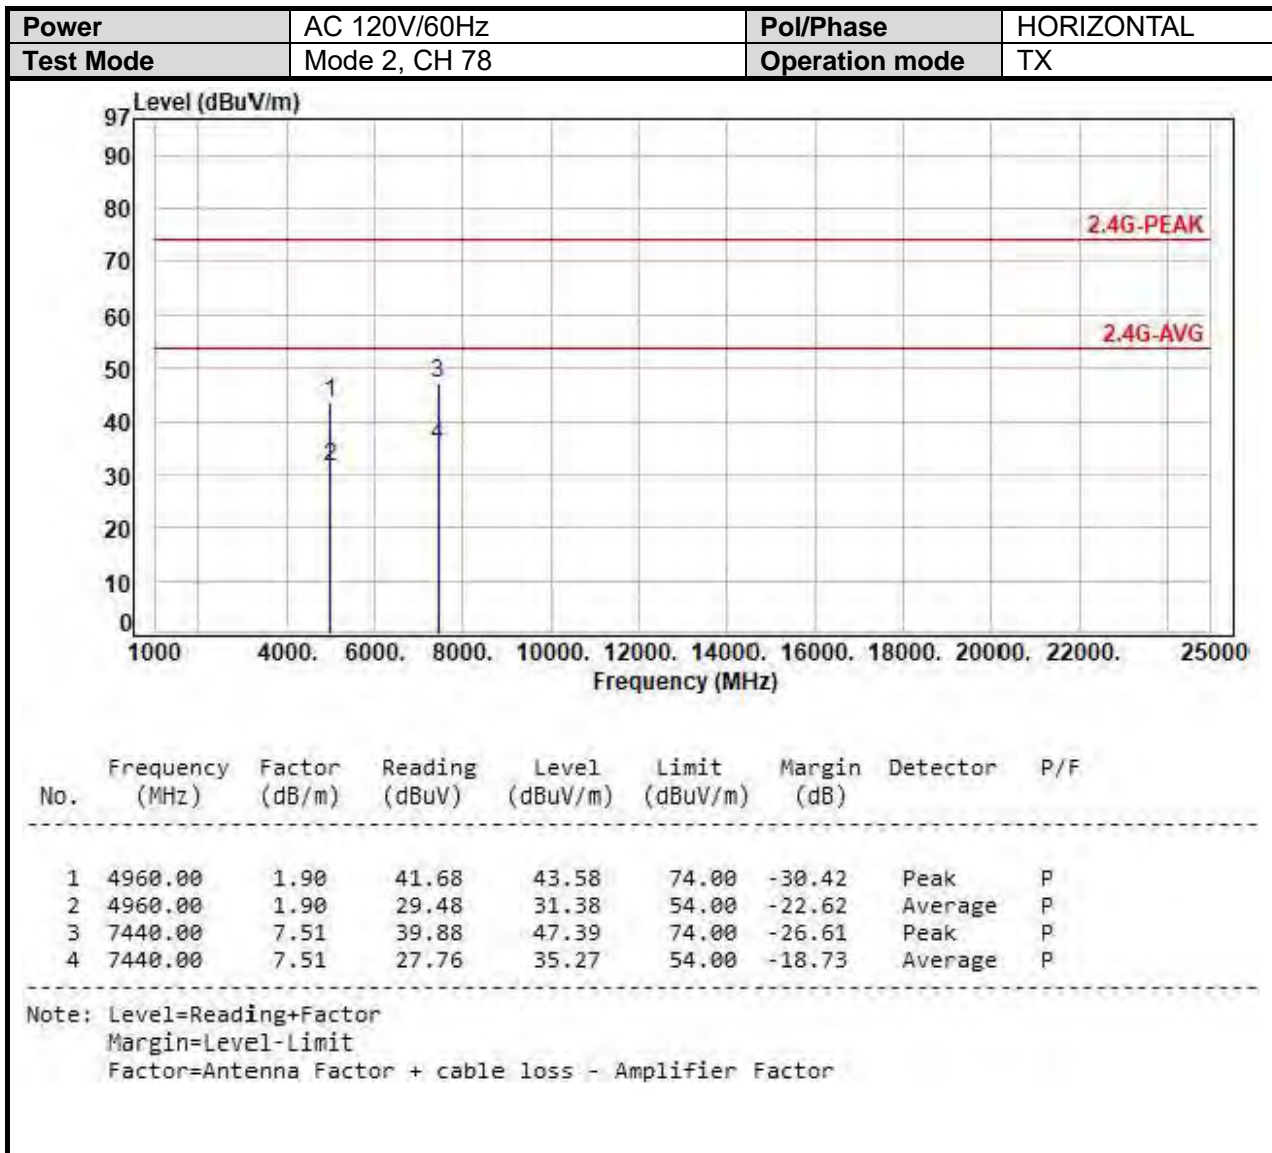

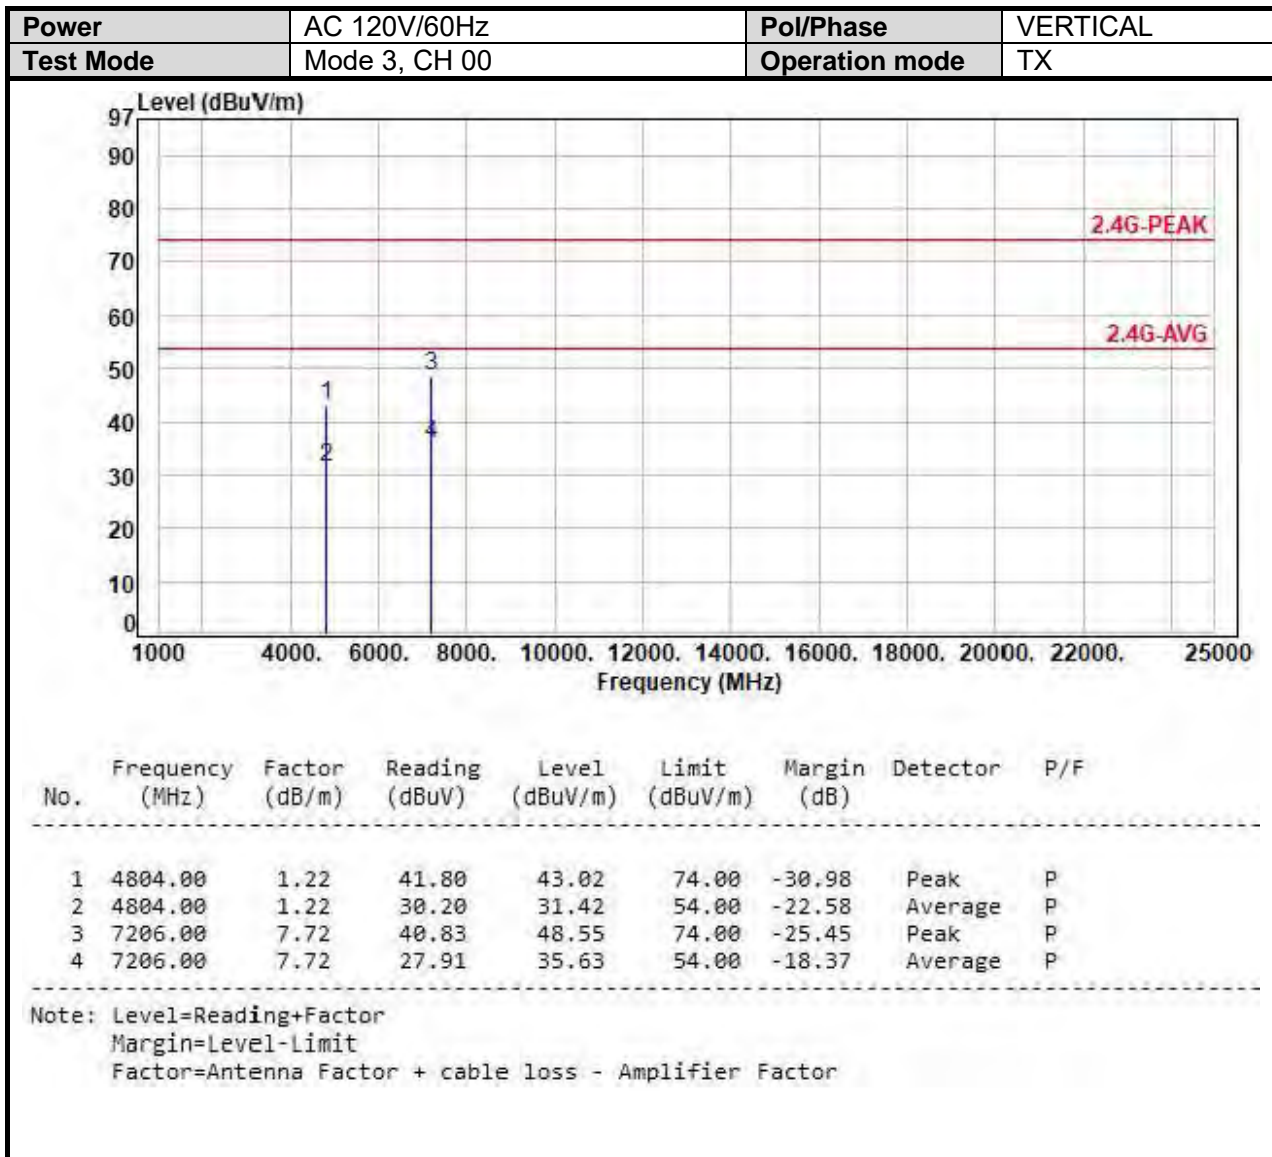

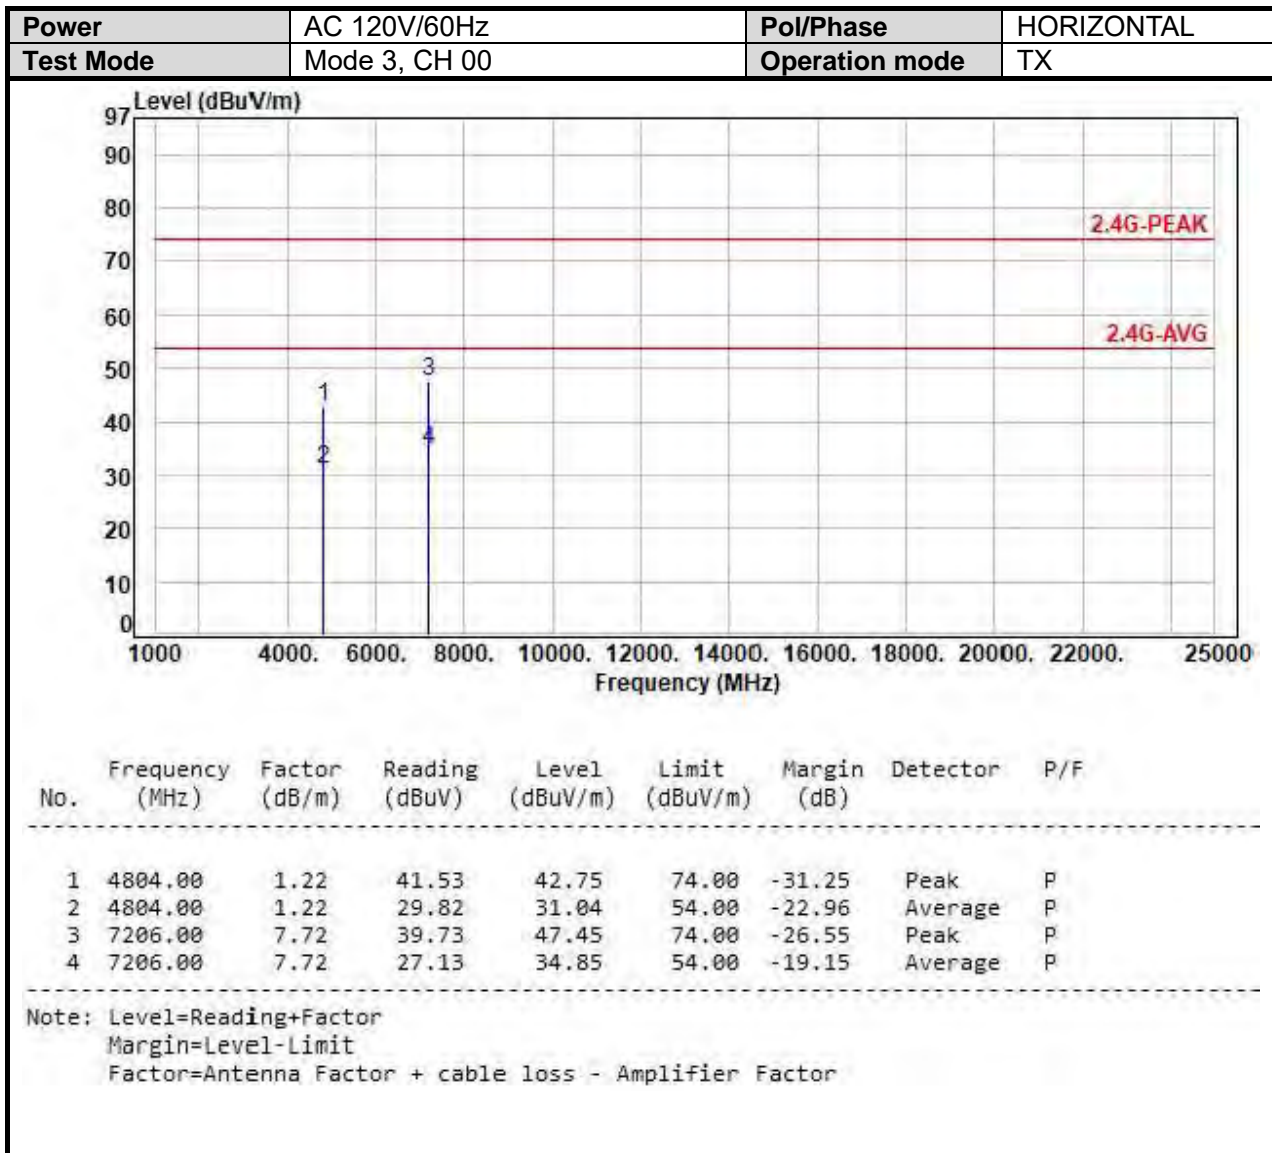


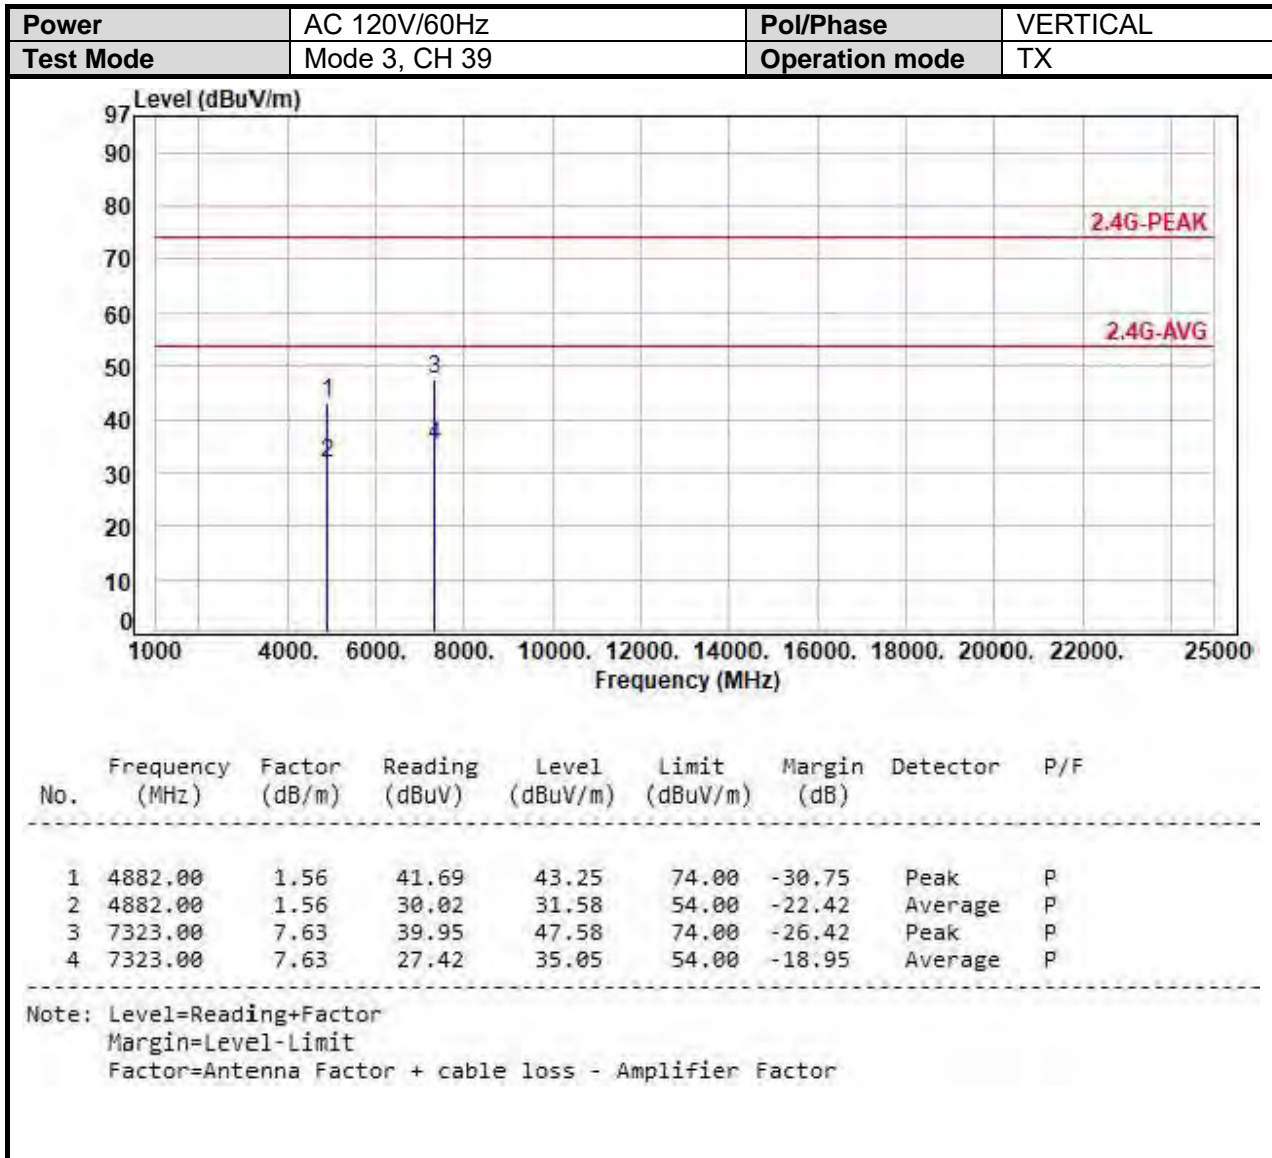

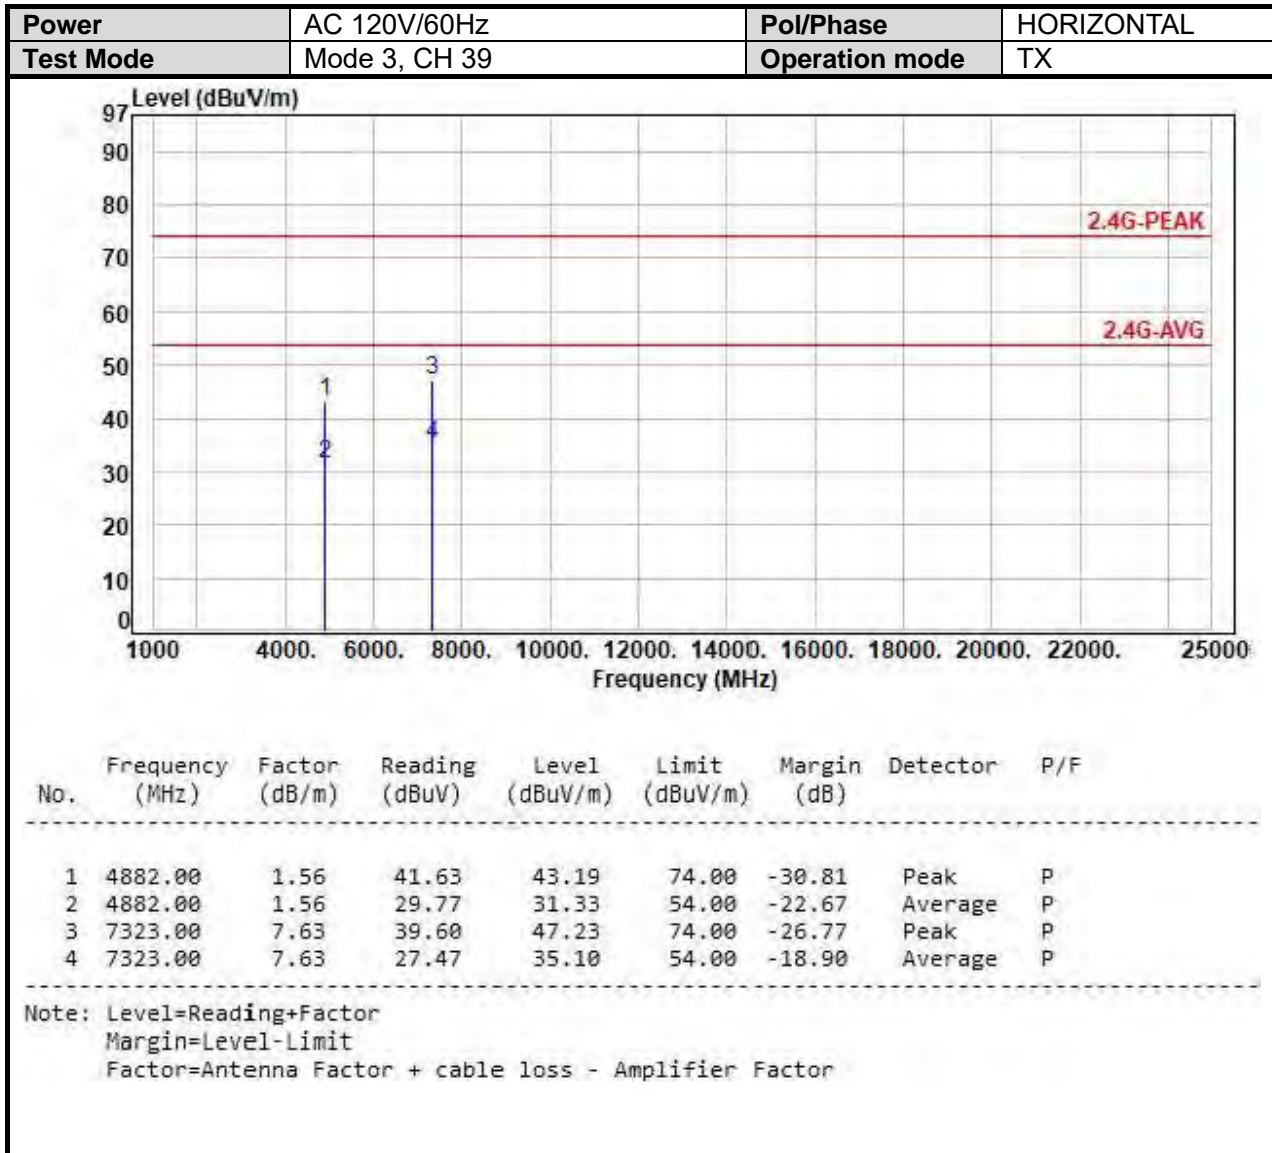



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, CH 78	Operation mode	TX

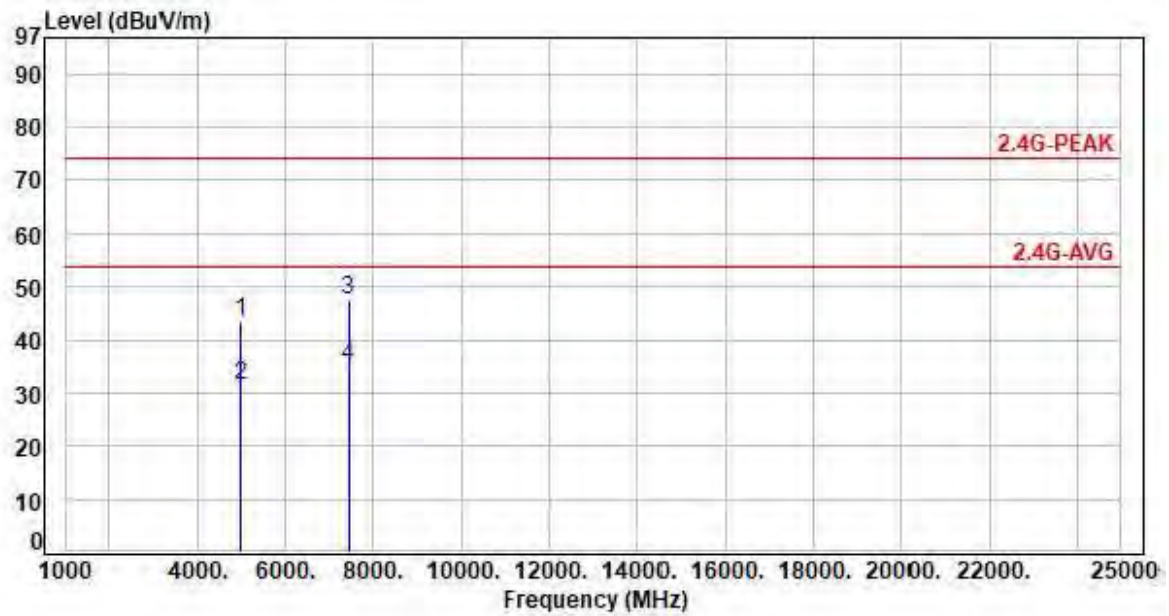


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4960.00	1.90	41.46	43.36	74.00	-30.64	Peak	P
2	4960.00	1.90	29.62	31.52	54.00	-22.48	Average	P
3	7440.00	7.51	40.20	47.71	74.00	-26.29	Peak	P
4	7440.00	7.51	27.61	35.12	54.00	-18.88	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 3, CH 78	Operation mode	TX

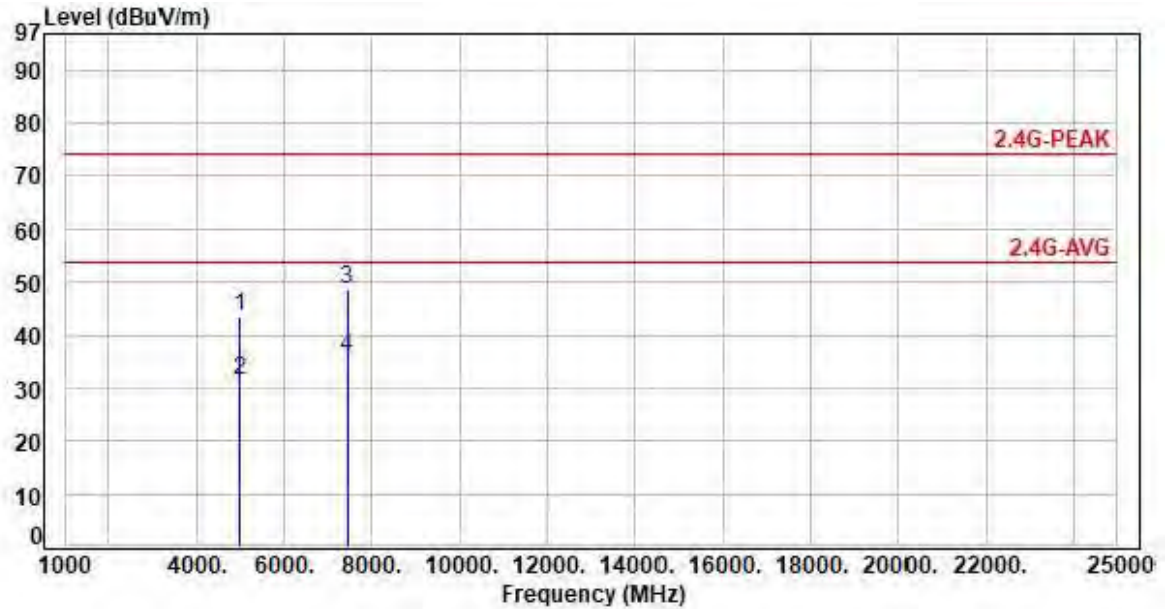

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4960.00	1.90	41.68	43.58	74.00	-30.42	Peak	P
2	4960.00	1.90	29.48	31.38	54.00	-22.62	Average	P
3	7440.00	7.51	41.13	48.64	74.00	-25.36	Peak	P
4	7440.00	7.51	28.32	35.83	54.00	-18.17	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation


Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz





Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	GFSK, CH00		

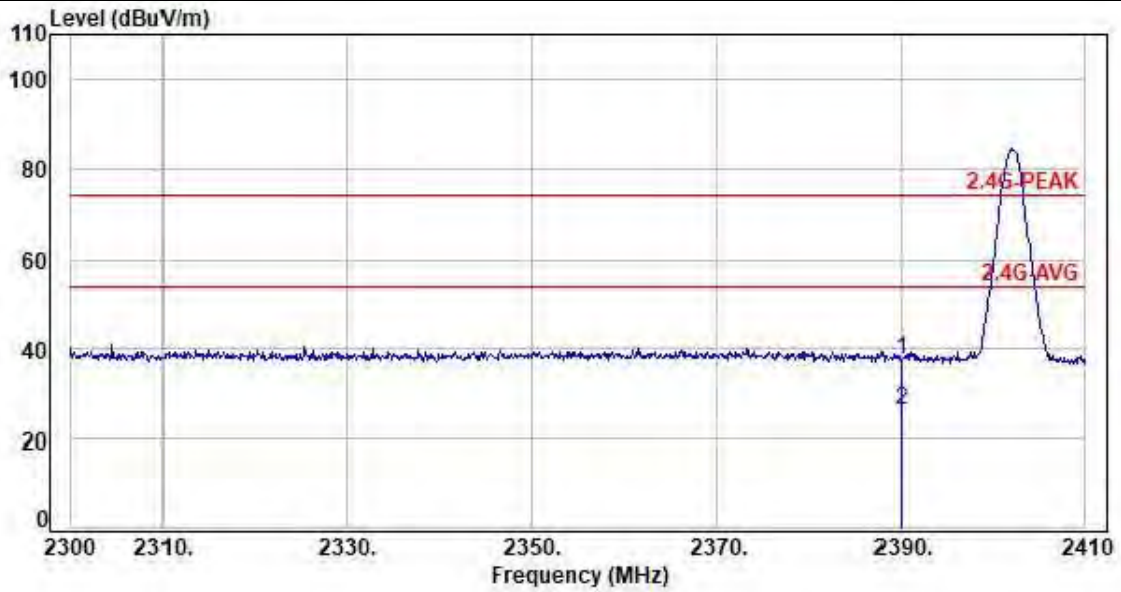

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.00	-5.44	43.01	37.57	74.00	-36.43	Peak	P
2	2390.00	-5.44	31.86	26.42	54.00	-27.58	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

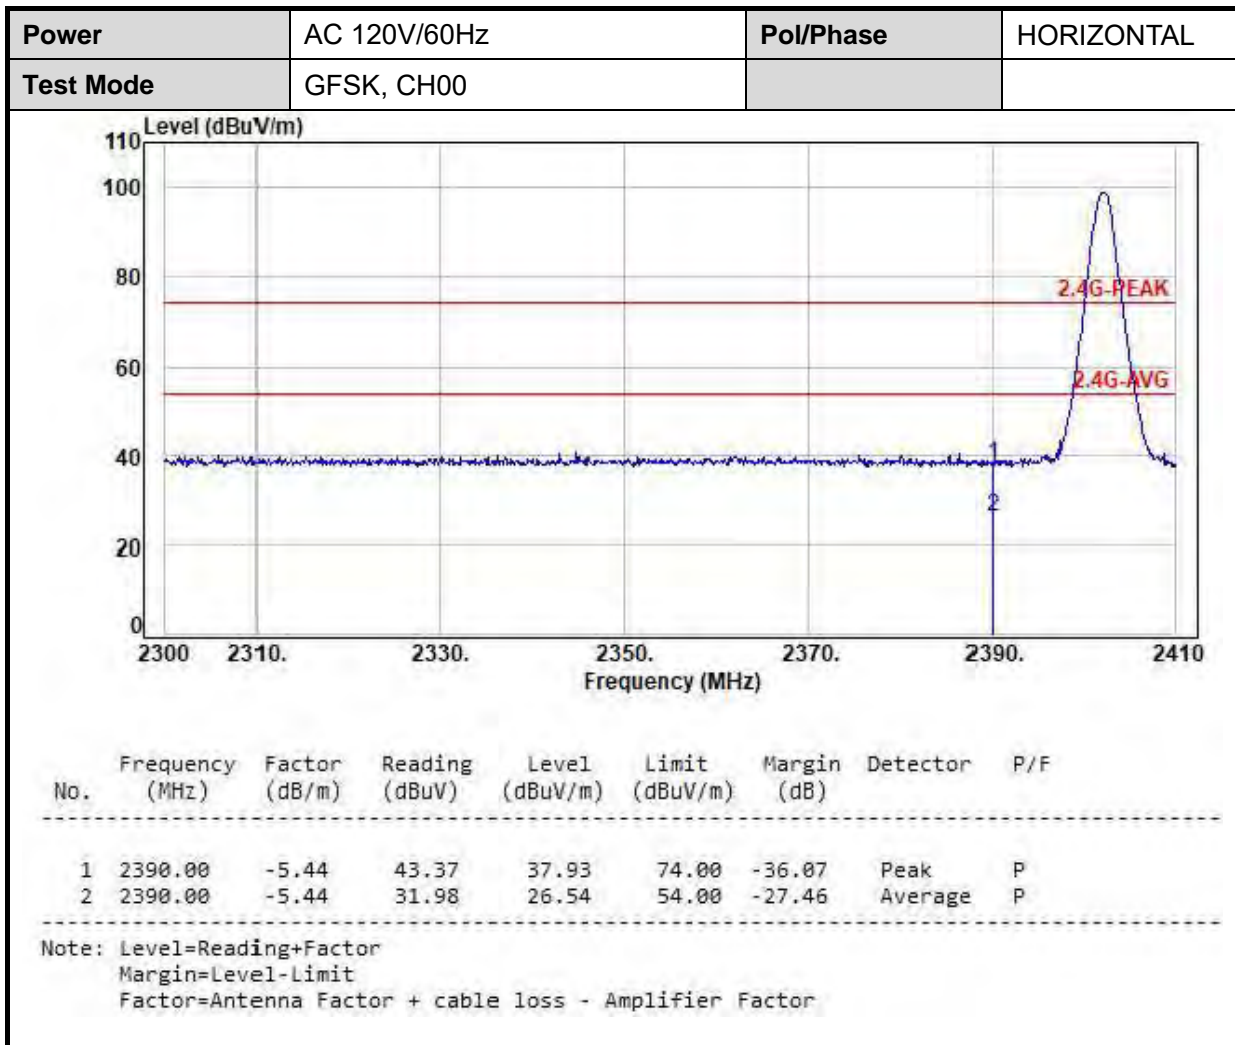

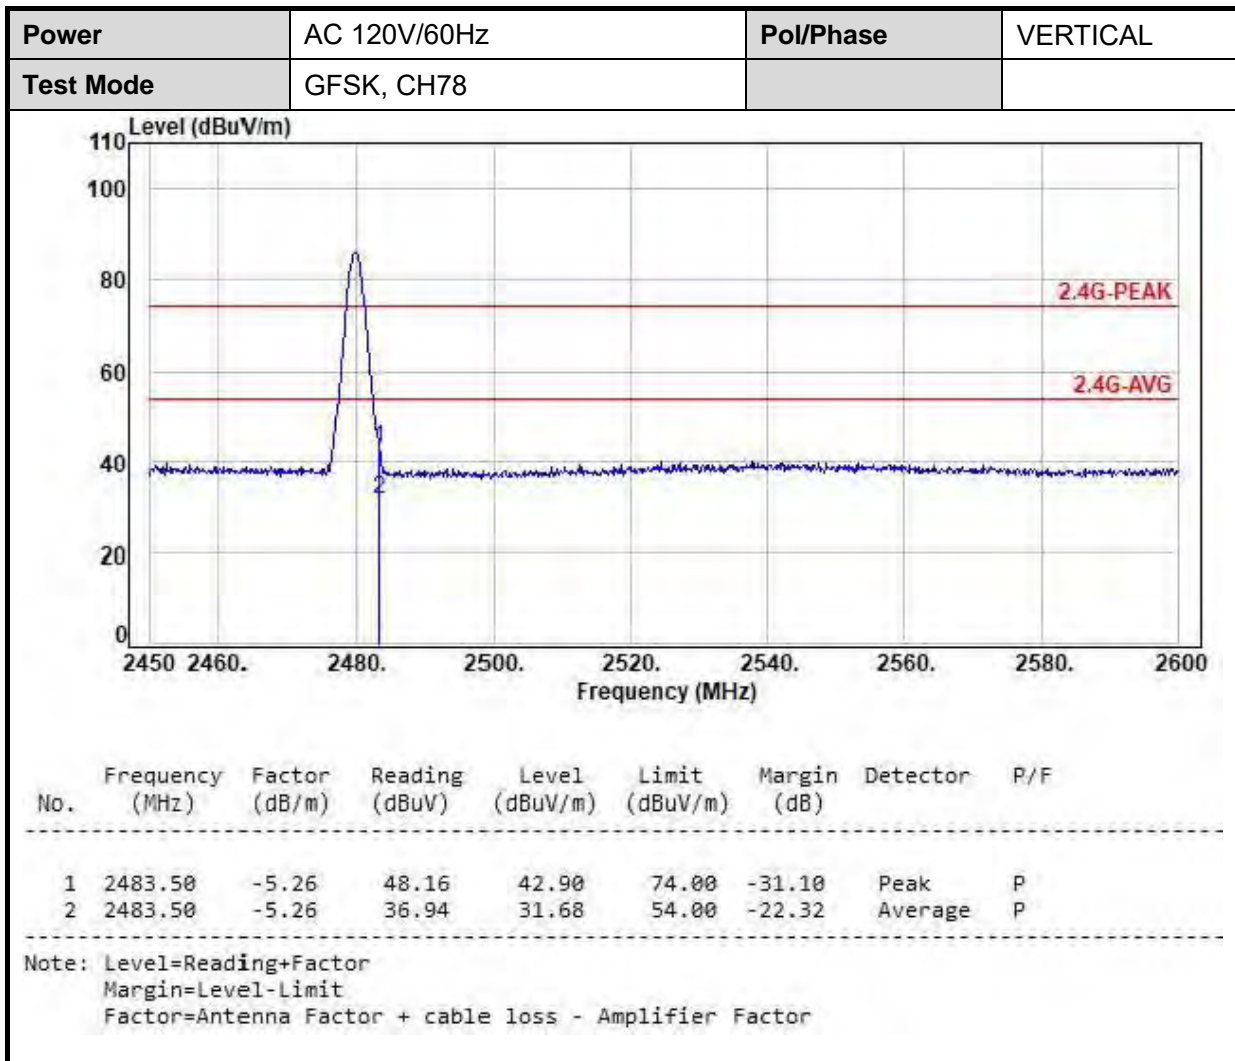





Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	GFSK, CH78		

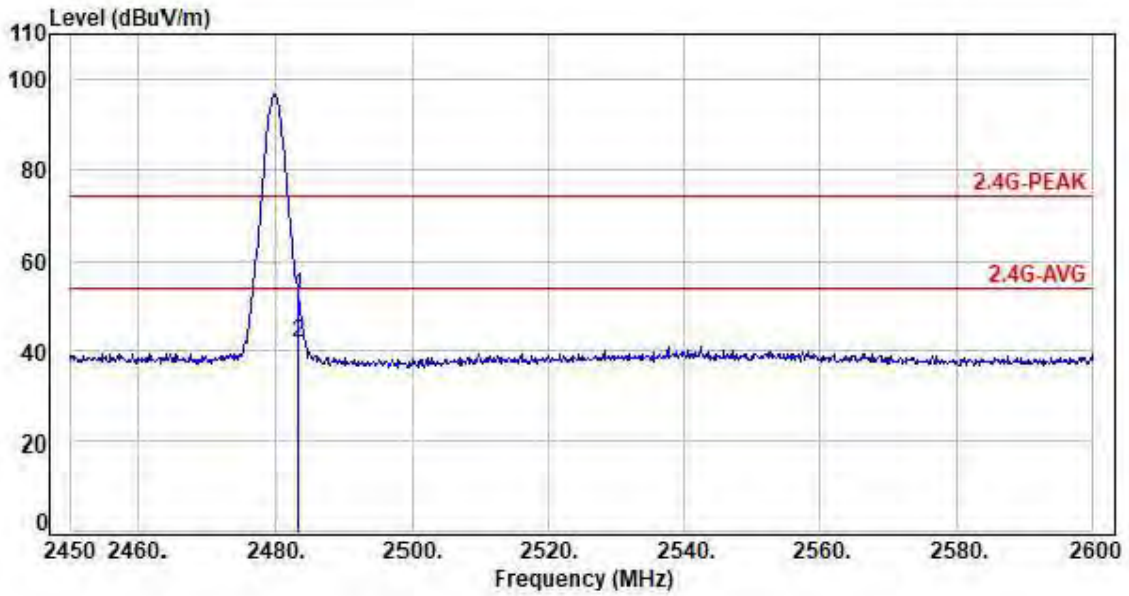



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.50	-5.26	57.38	52.12	74.00	-21.88	Peak	P
2	2483.50	-5.26	47.12	41.86	54.00	-12.14	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

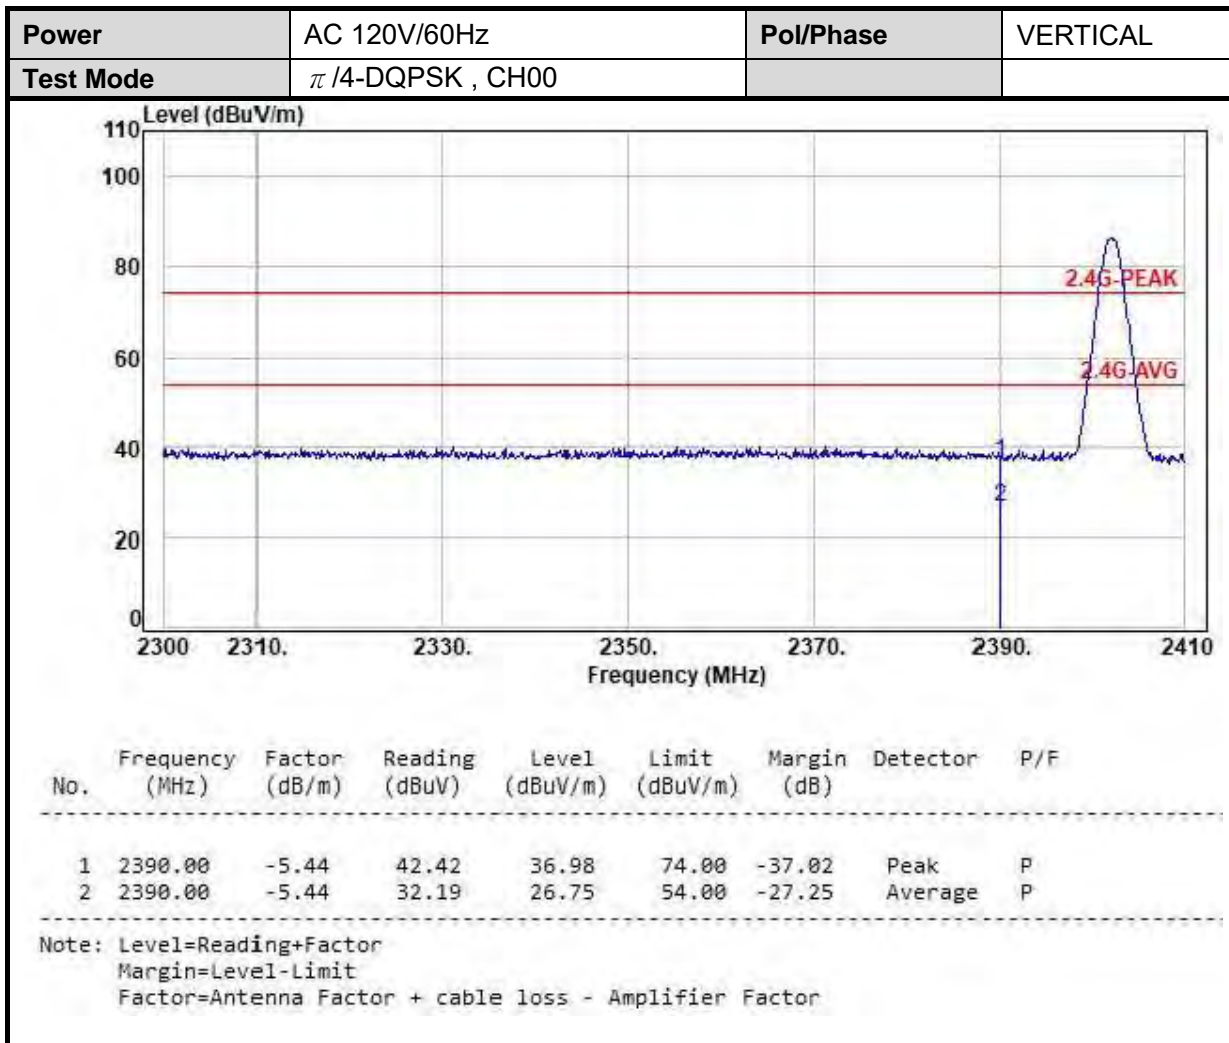

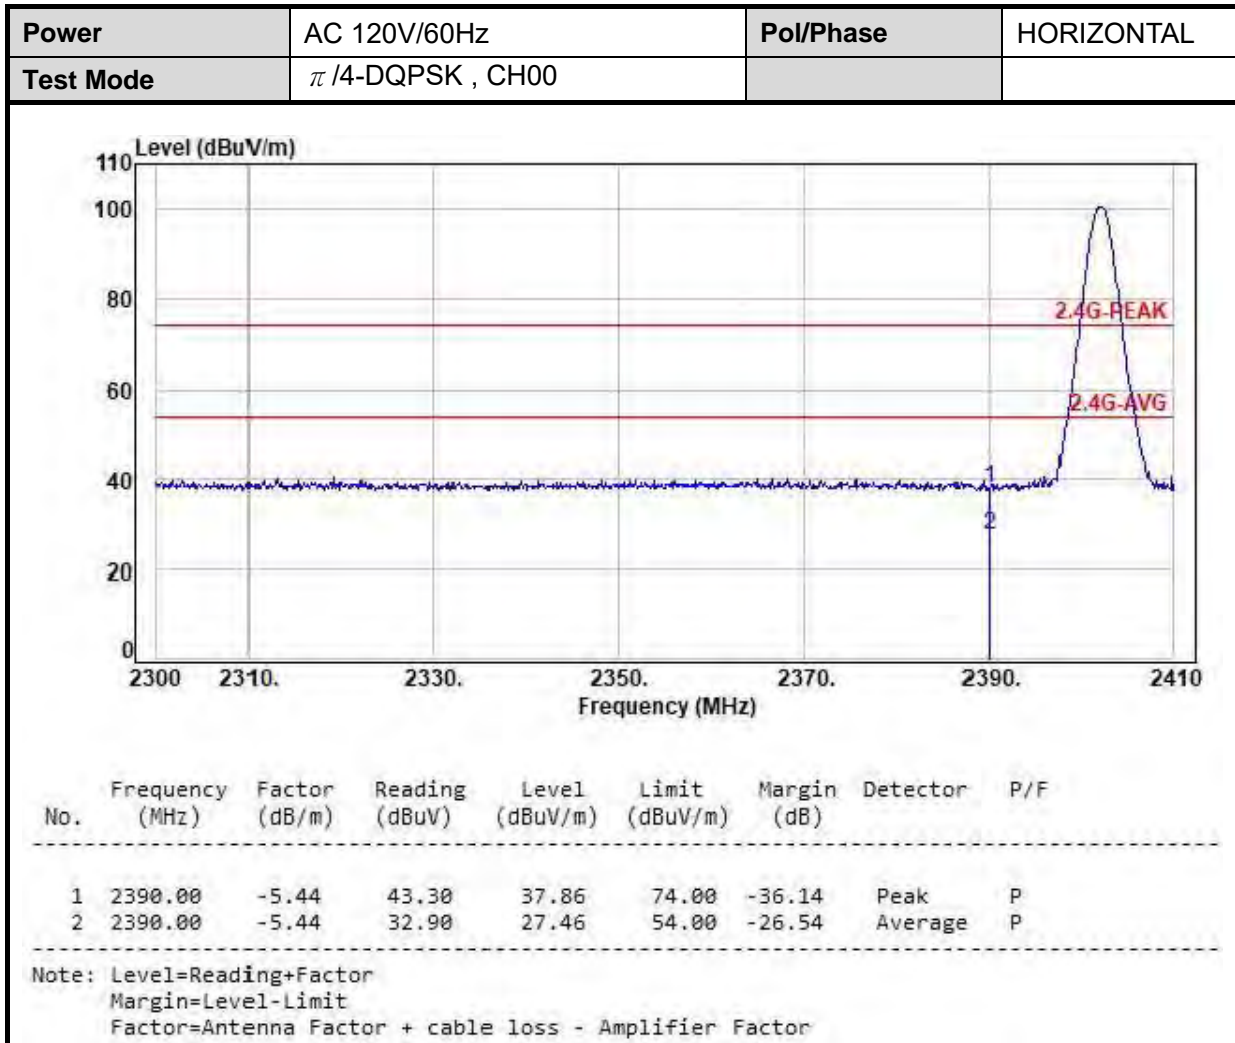


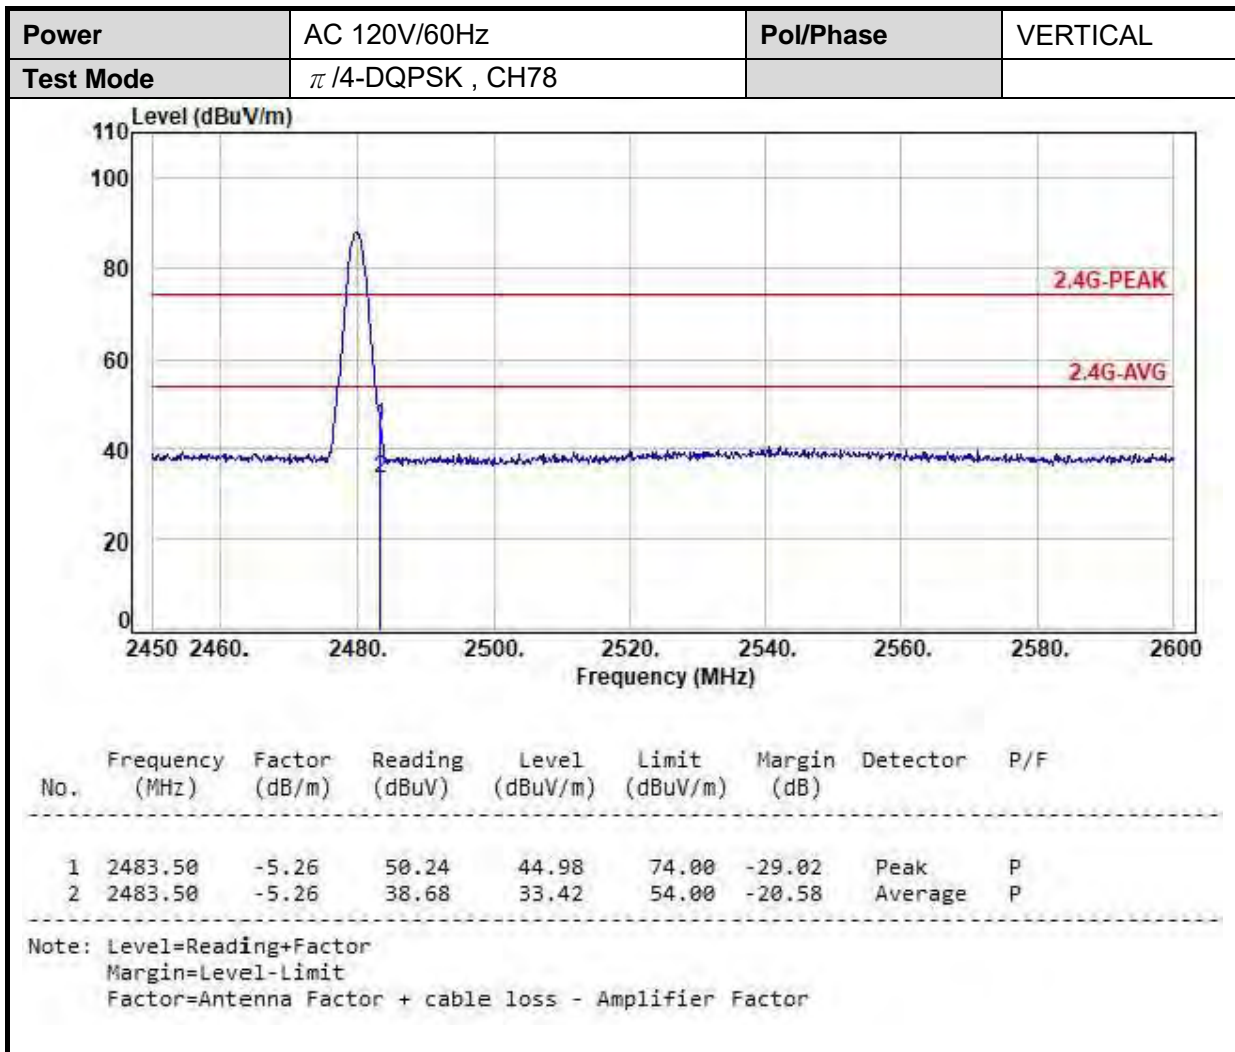

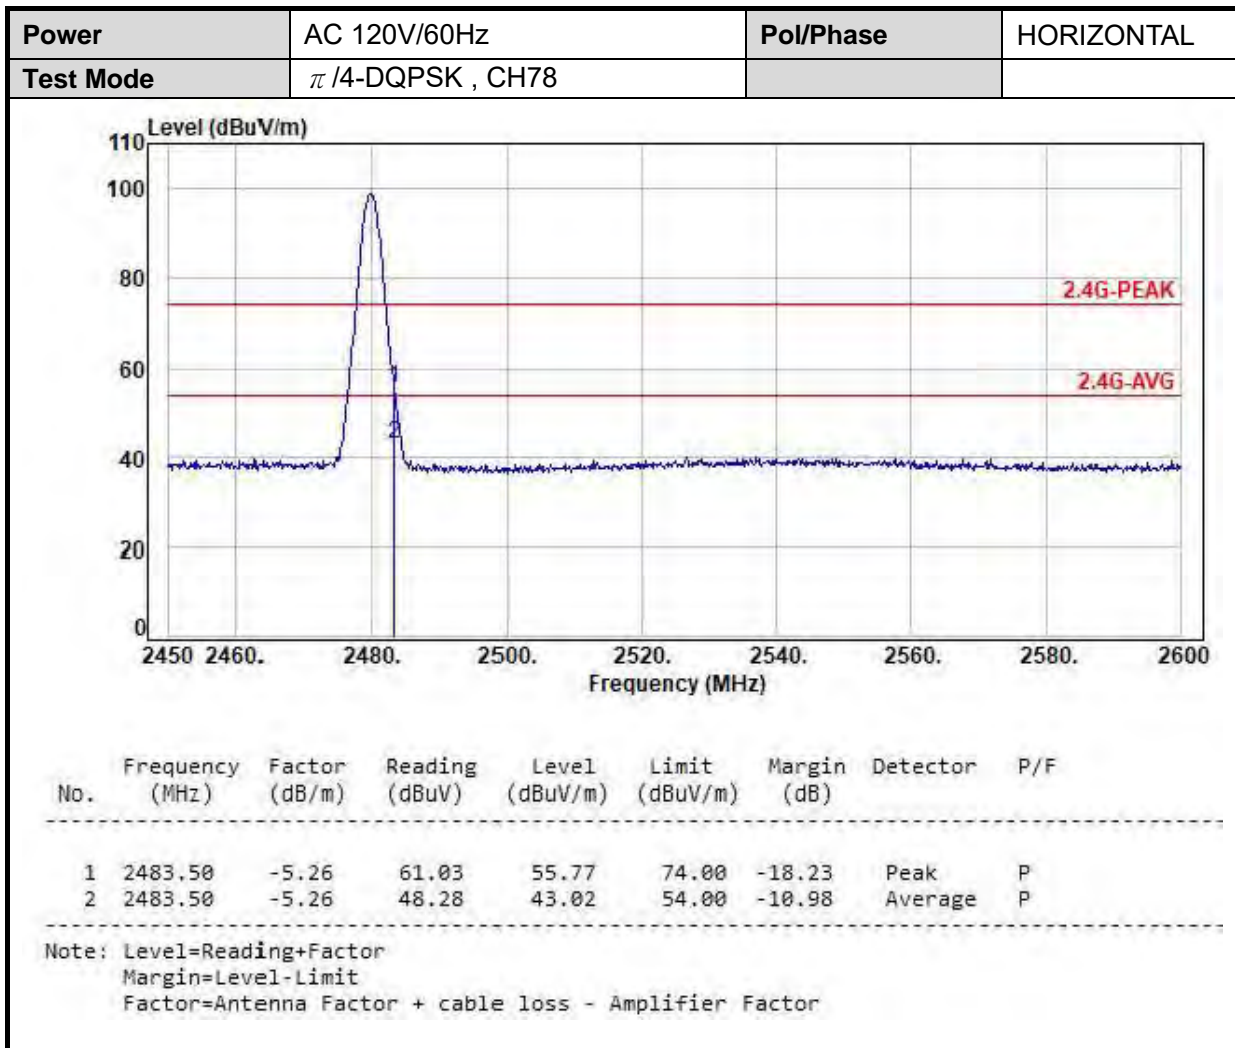




Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	8DPSK, CH00		

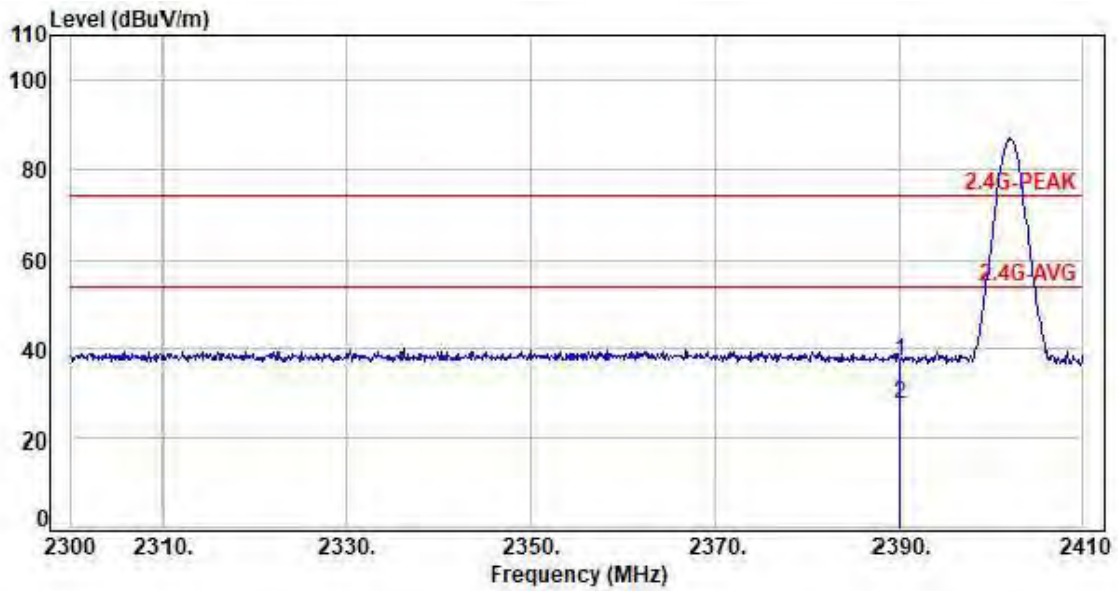


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.00	-5.44	42.79	37.35	74.00	-36.65	Peak	P
2	2390.00	-5.44	32.85	27.41	54.00	-26.59	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

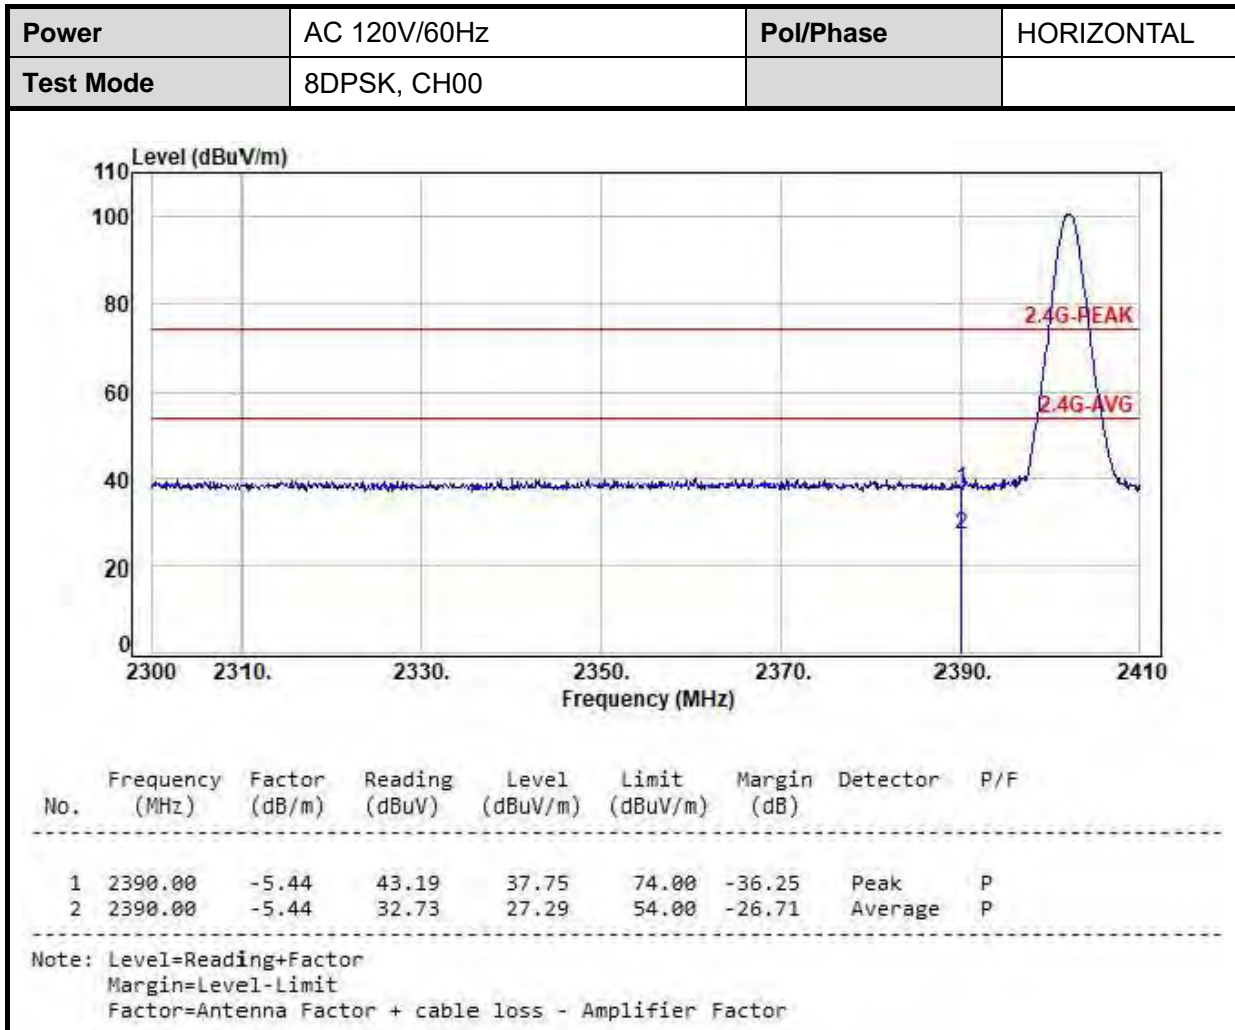



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	8DPSK, CH78		

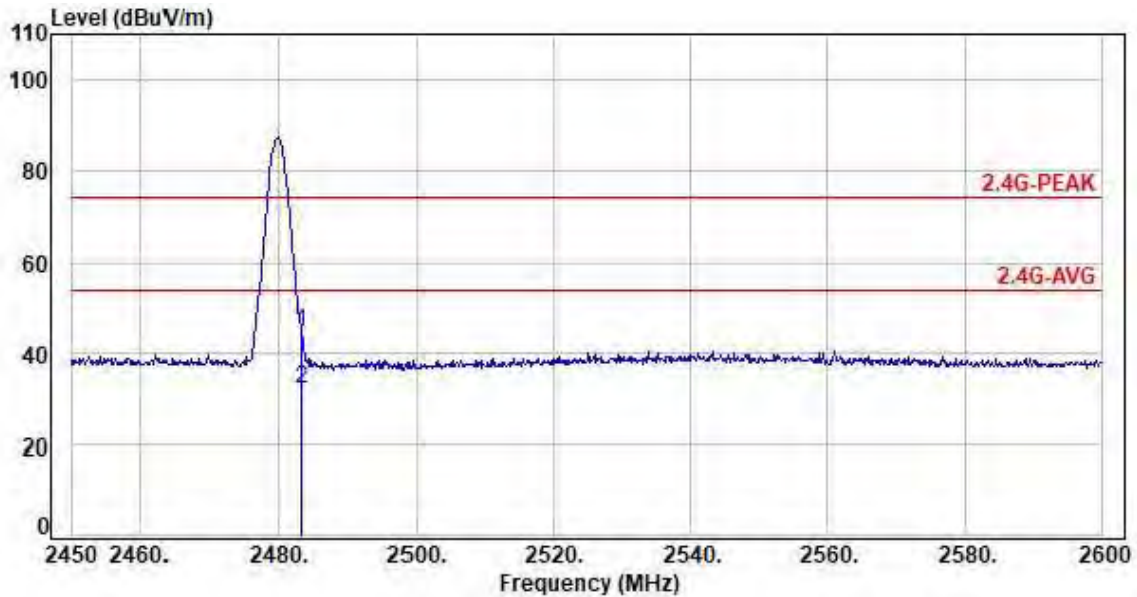


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.50	-5.26	49.88	44.62	74.00	-29.38	Peak	P
2	2483.50	-5.26	37.47	32.21	54.00	-21.79	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	8DPSK, CH78		

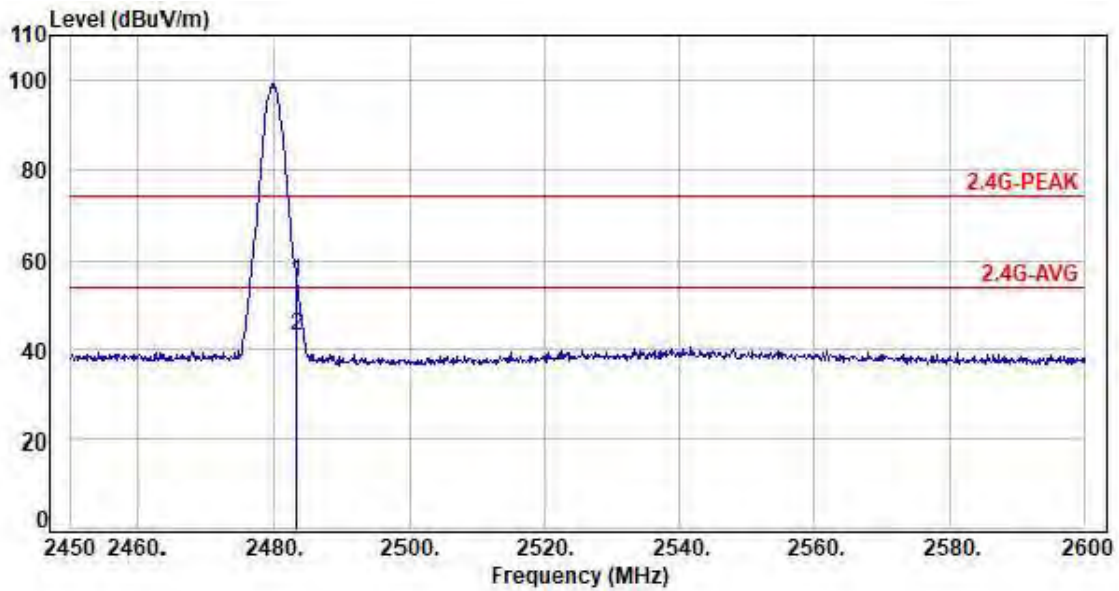

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.50	-5.26	60.51	55.25	74.00	-18.75	Peak	P
2	2483.50	-5.26	48.31	43.05	54.00	-10.95	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Test Result and Data



Note: Test plots refer to the following pages.



Single test



Modulation Standard: GFSK (1Mbps)

Channel: 00

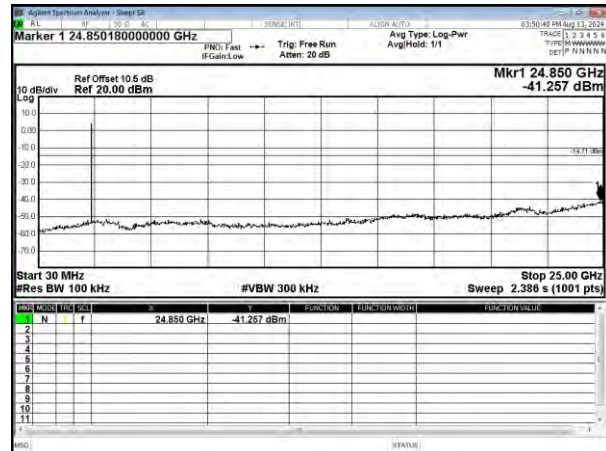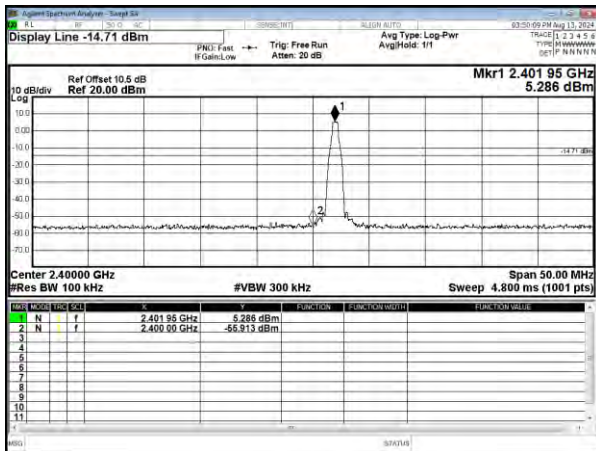



Modulation Standard: GFSK (1Mbps)

Channel: 39

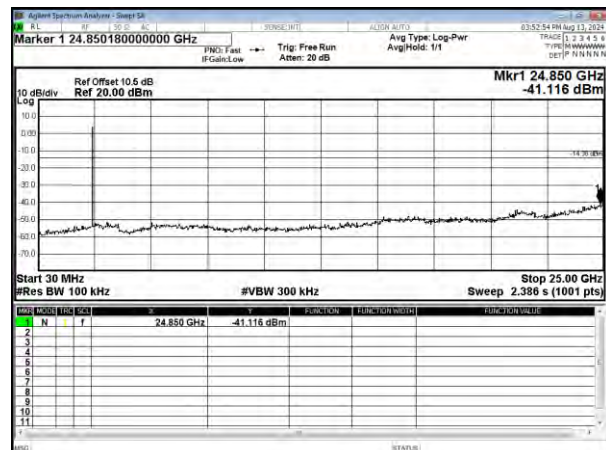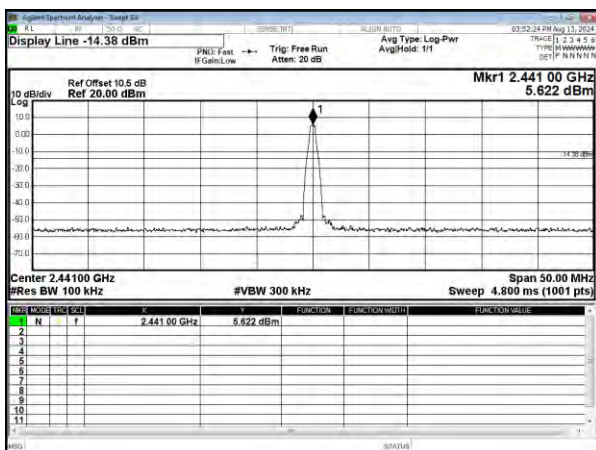



Modulation Standard: GFSK (1Mbps)

Channel: 78

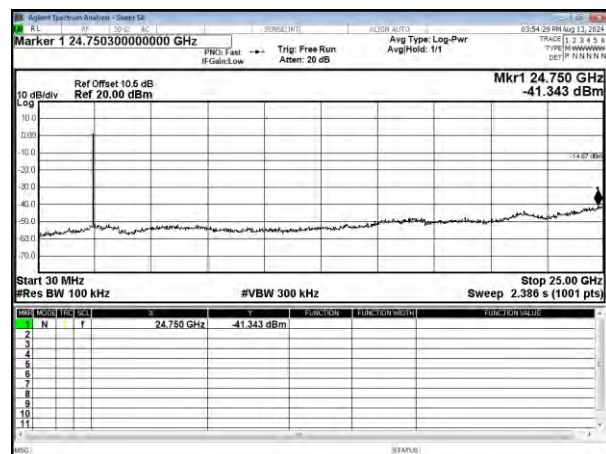
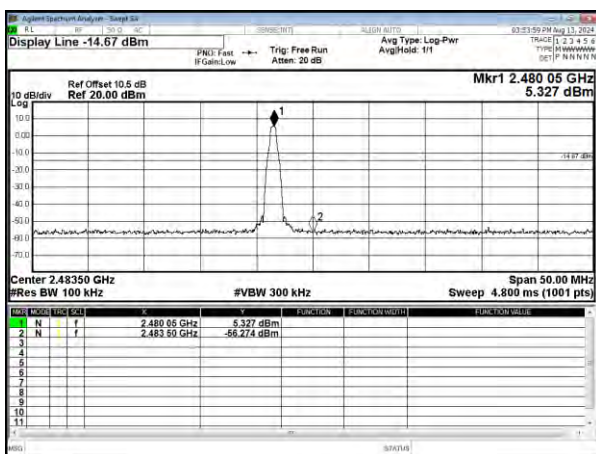






Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

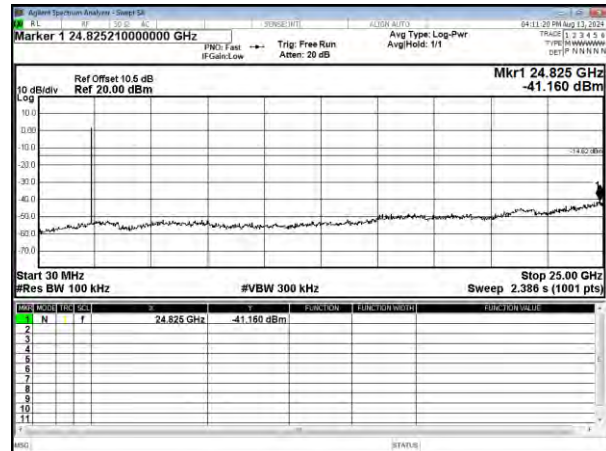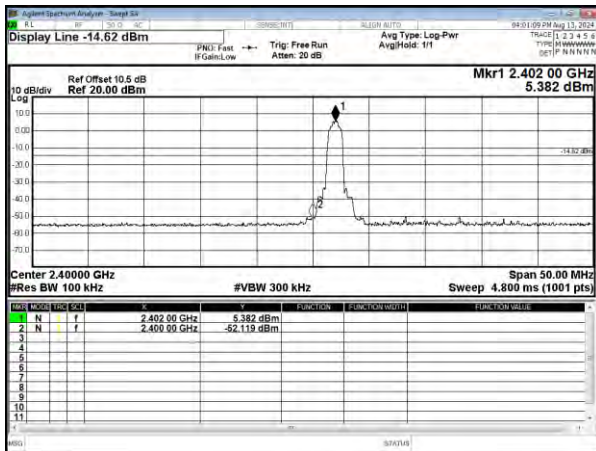

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 39

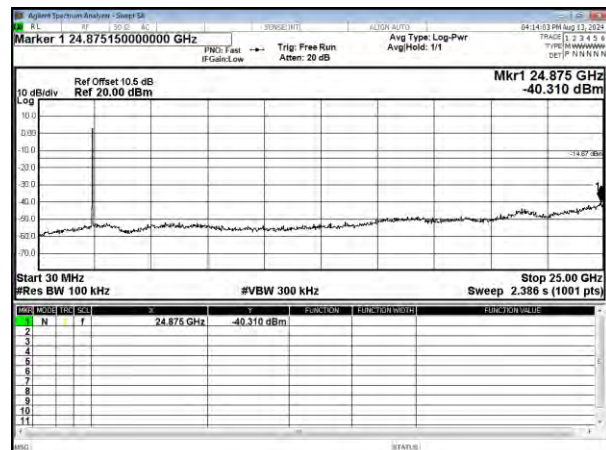
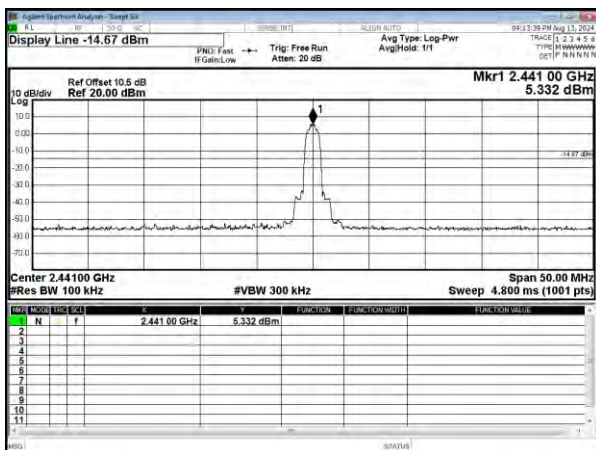


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)
Channel: 78

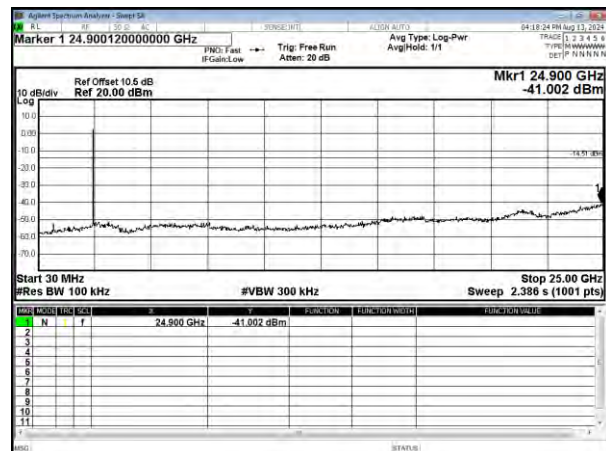
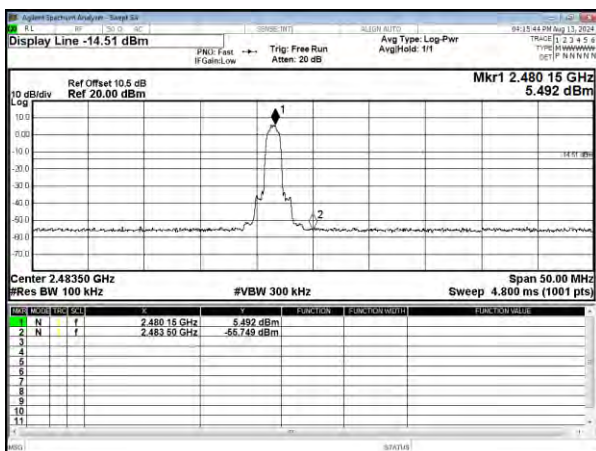






Modulation Standard: 8DPSK (3Mbps)
Channel: 00

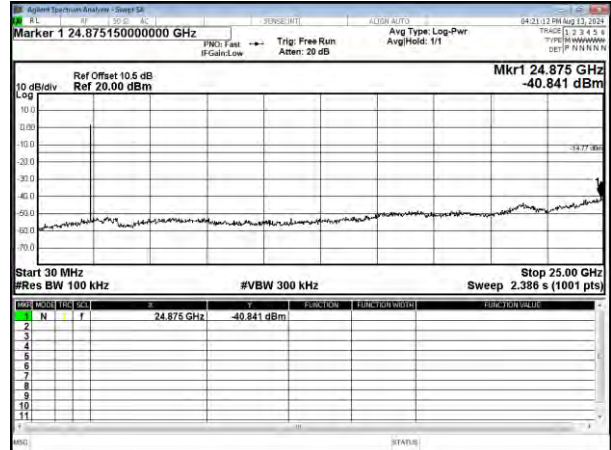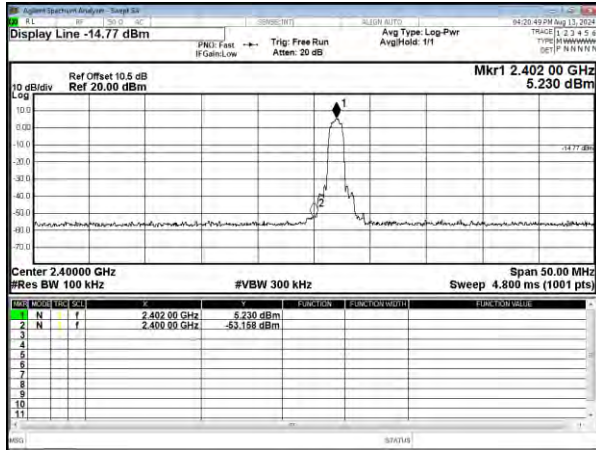

Modulation Standard: 8DPSK (3Mbps)
Channel: 39

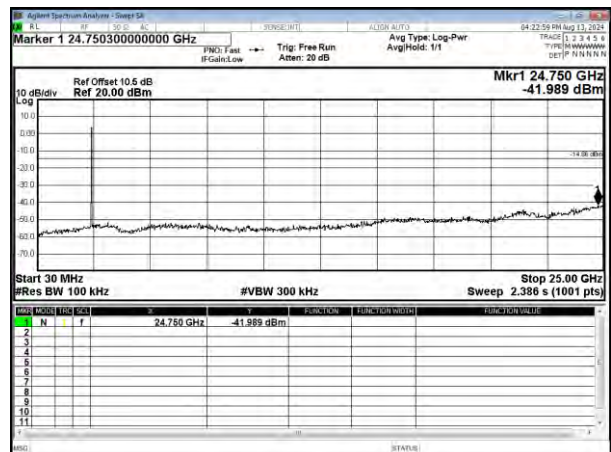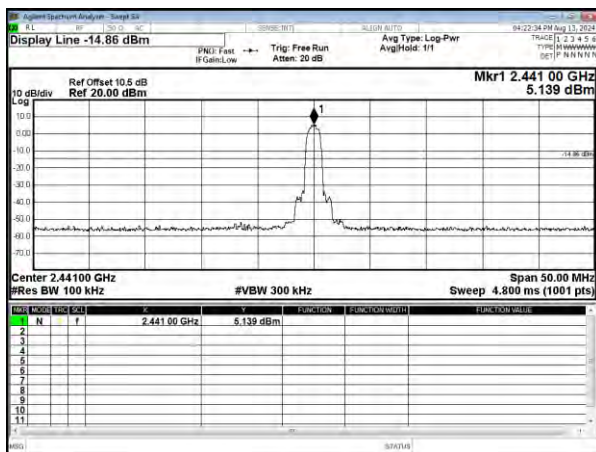


Modulation Standard: 8DPSK (3Mbps)
Channel: 78

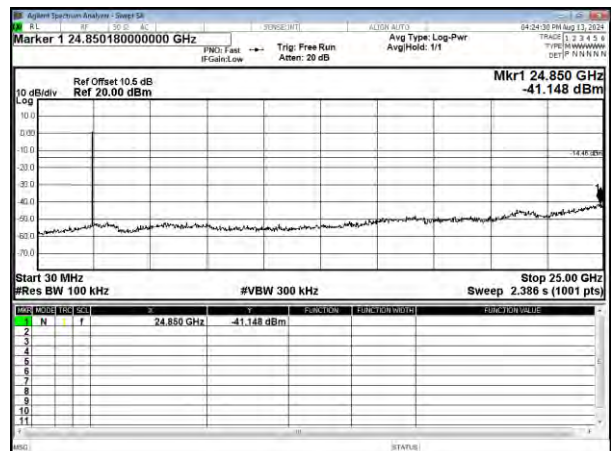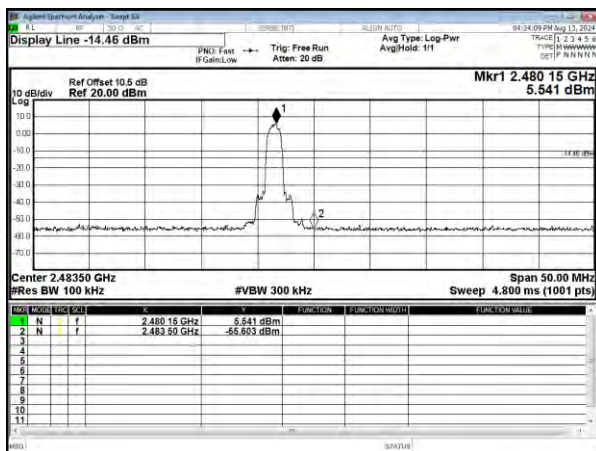




Hopping test


Modulation Standard: GFSK (1Mbps)

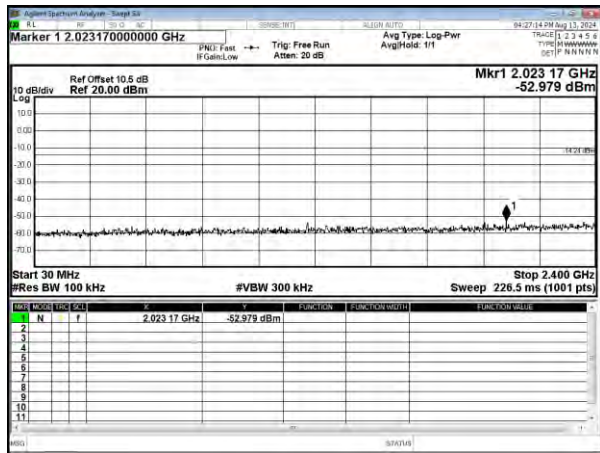


Modulation Standard: GFSK (1Mbps)

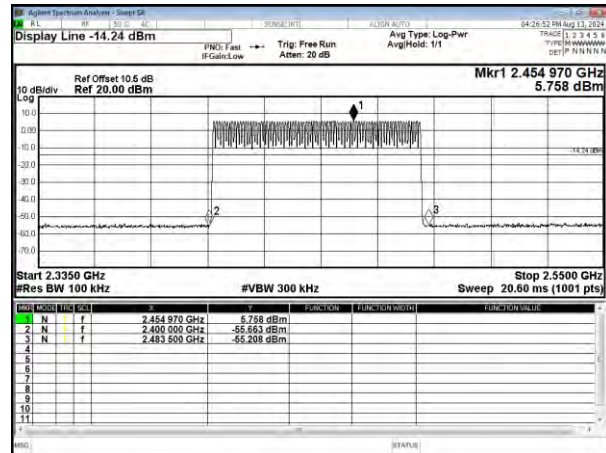


Modulation Standard: GFSK (1Mbps)

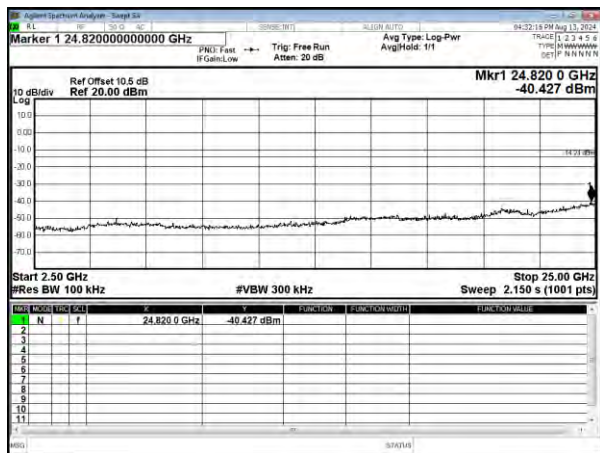


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

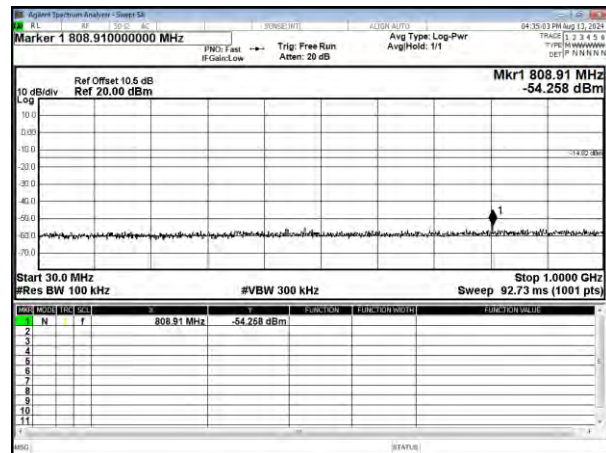

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

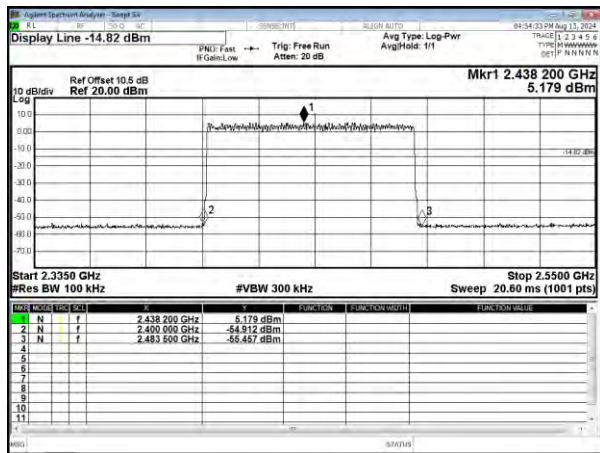


Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

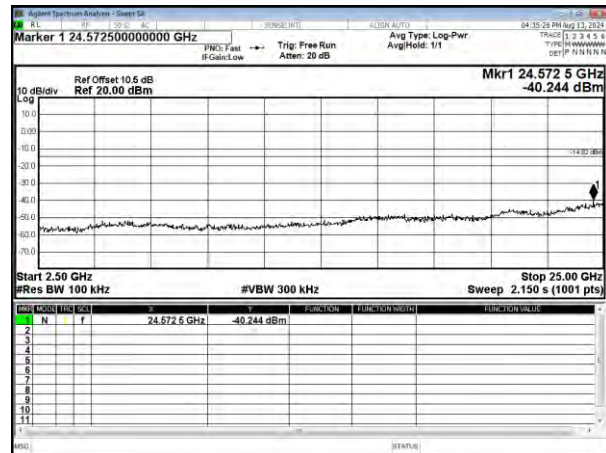





Modulation Standard: 8DPSK (3Mbps)

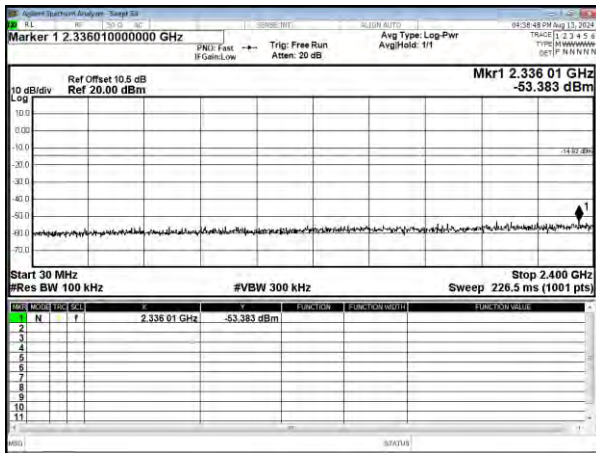

Modulation Standard: 8DPSK (3Mbps)

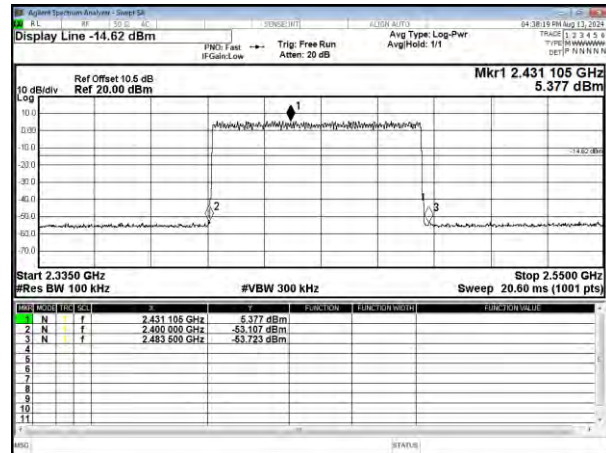

Modulation Standard: 8DPSK (3Mbps)

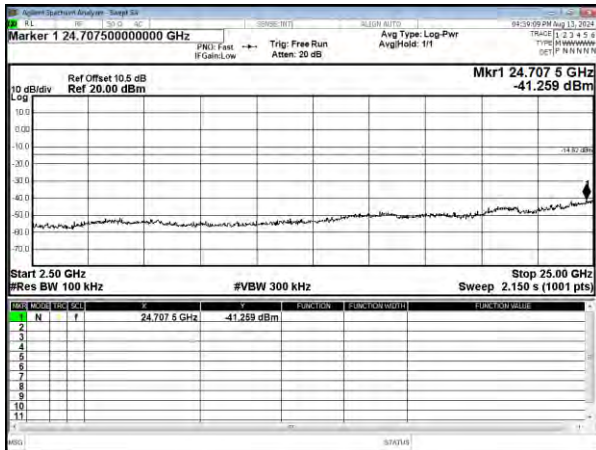



8. 20dB Bandwidth Measurement Data


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

8.3 Test Setup Layout





8.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth(MHz)
GFSK (1Mbps)	00	2402	0.817	0.545
	39	2441	0.841	0.561
	78	2480	0.848	0.565
$\pi/4$ -DQPSK (2Mbps)	00	2402	1.317	0.878
	39	2441	1.316	0.877
	78	2480	1.315	0.877
8DPSK (3Mbps)	00	2402	1.306	0.871
	39	2441	1.305	0.870
	78	2480	1.310	0.873
Note	2/3*20dB Bandwidth=20dB Bandwidth x 2/3			





Modulation Type: GFSK (1Mbps)
Channel: 00

Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

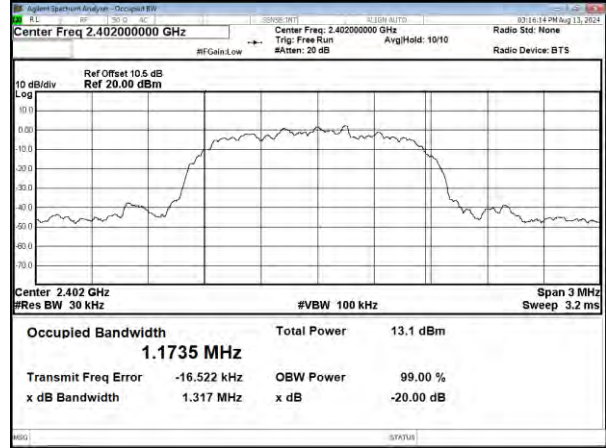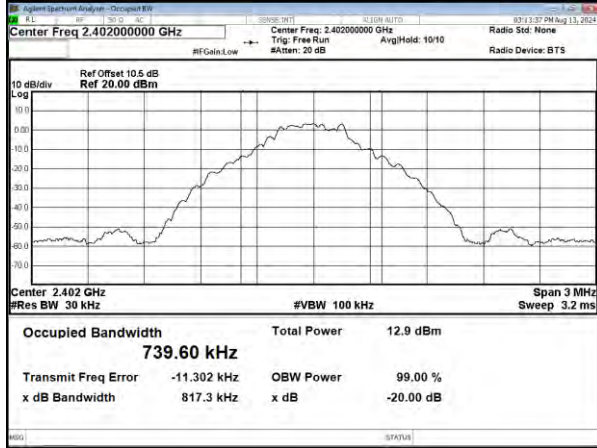



CH39

CH39

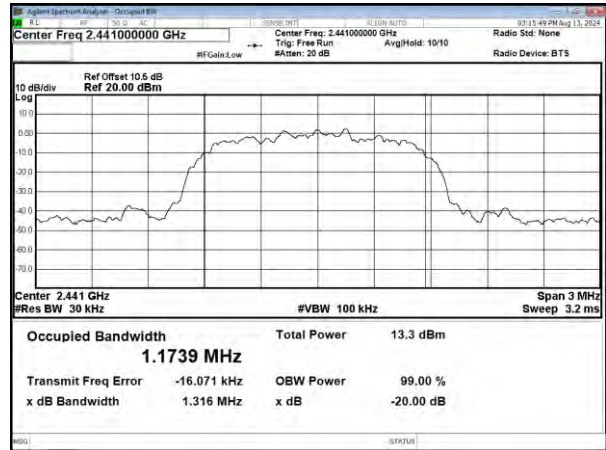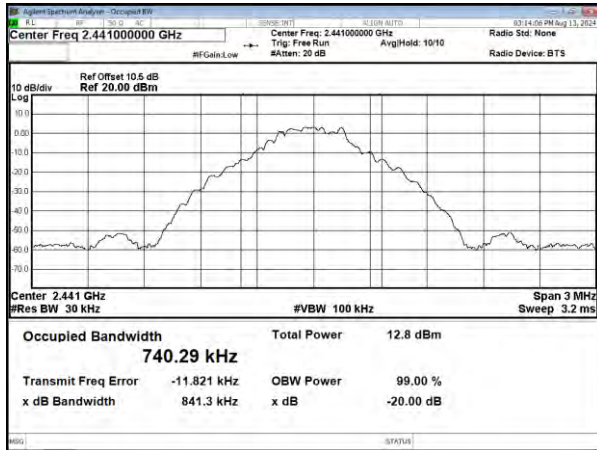


CH78

CH78

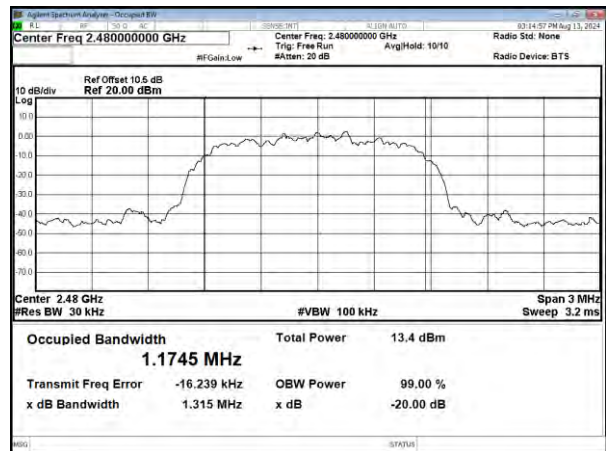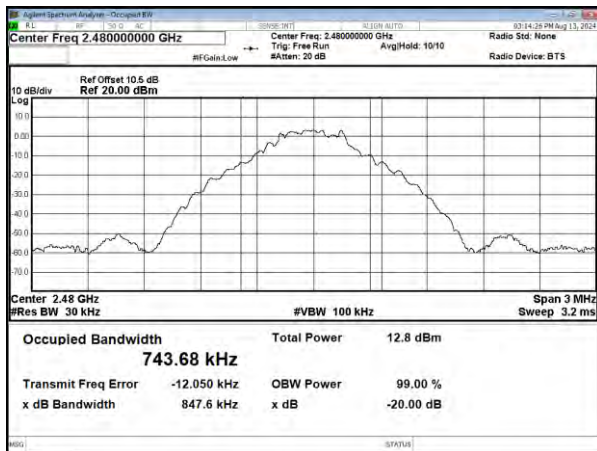





Modulation Type: 8DPSK (3Mbps)
Channel: 00

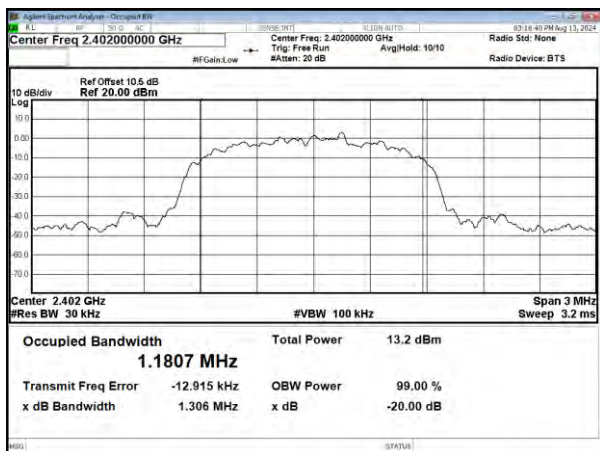

CH39

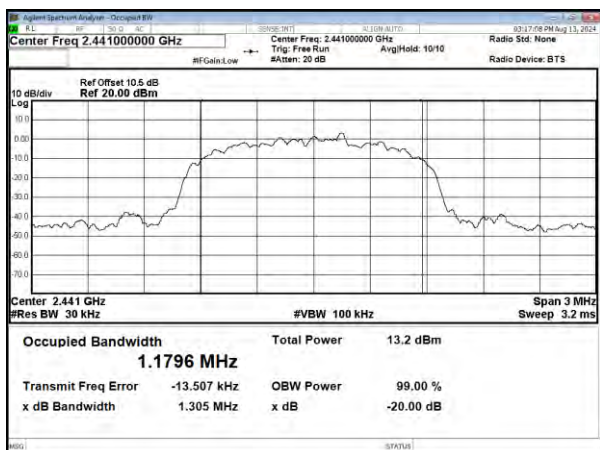

CH78

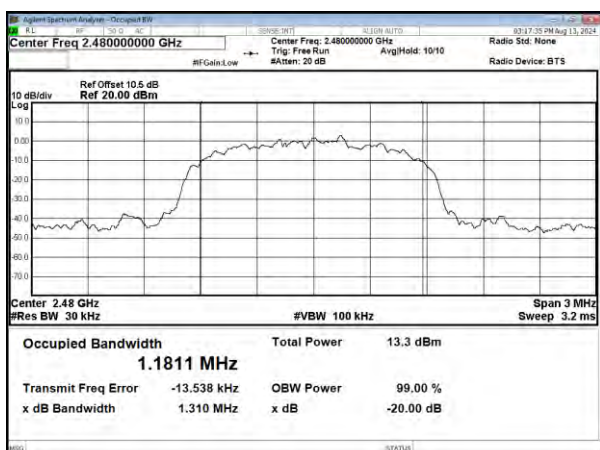



9. Frequencies Separation


9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels.

9.3 Test Setup Layout




9.4 Test Result and Data


Modulation Type	Channel	Channel Separation (MHz)	Limit (MHz)
GFSK	00	1.000	0.545
	39	1.000	0.561
	78	1.000	0.565
$\pi/4$ -DQPSK	00	1.000	0.878
	39	1.000	0.877
	78	1.000	0.877
8DPSK	00	1.000	0.871
	39	1.000	0.870
	78	1.000	0.873




Modulation Type: GFSK (1Mbps)
Channel: 00

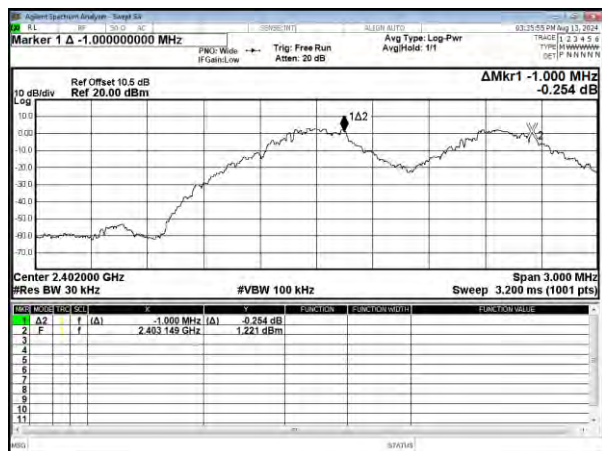


Modulation Type: $\pi/4$ -DQPSK (2Mbps)
Channel: 00

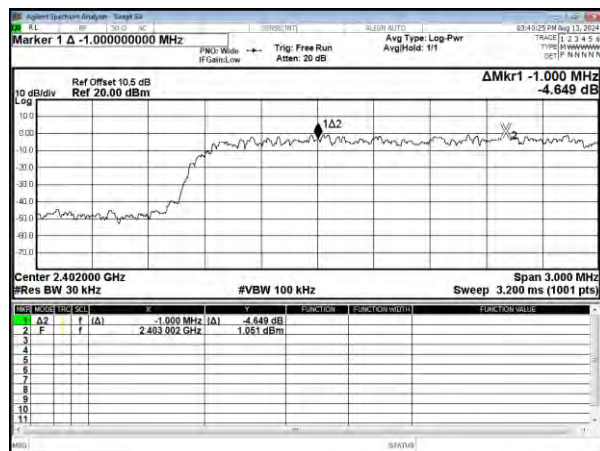


CH39

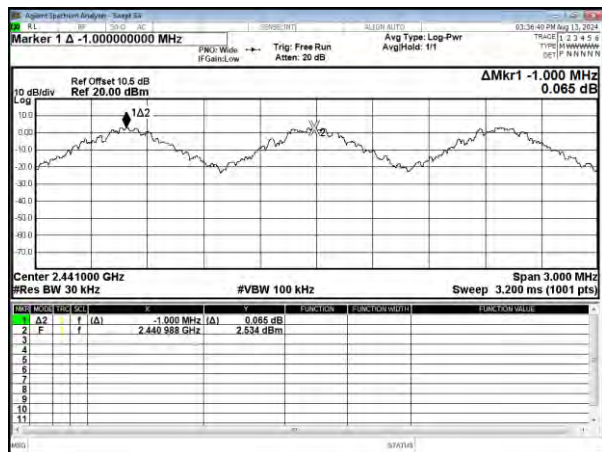


CH39

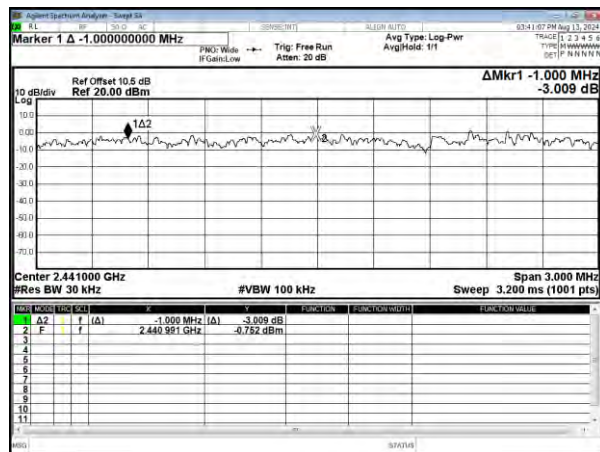

CH78

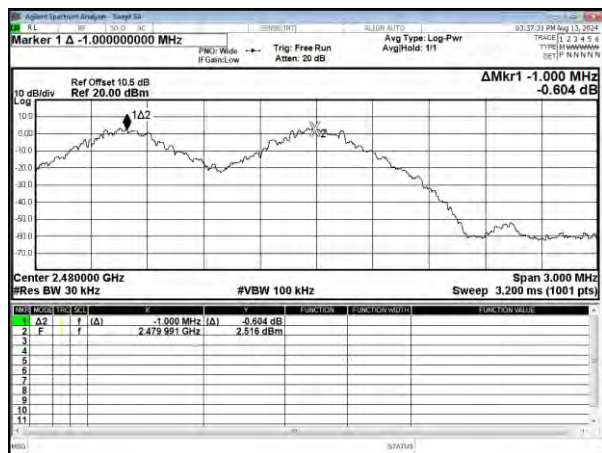


CH78

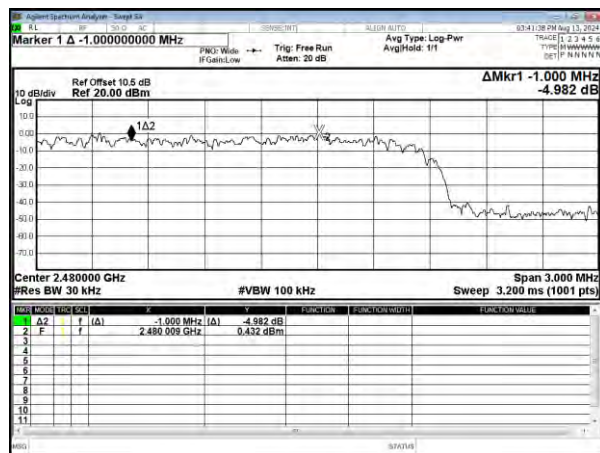





Modulation Type: 8DPSK (3Mbps)
Channel: 00

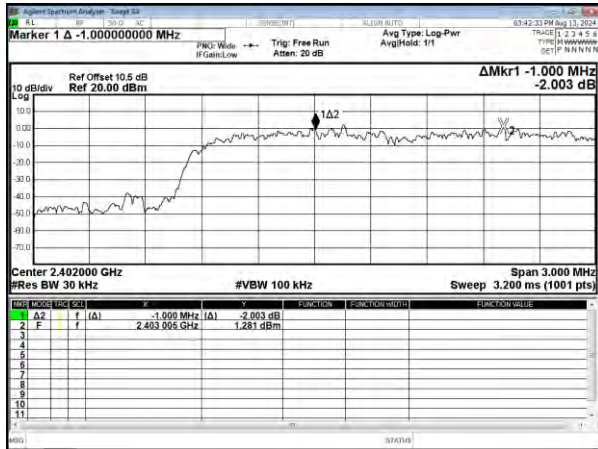

CH39

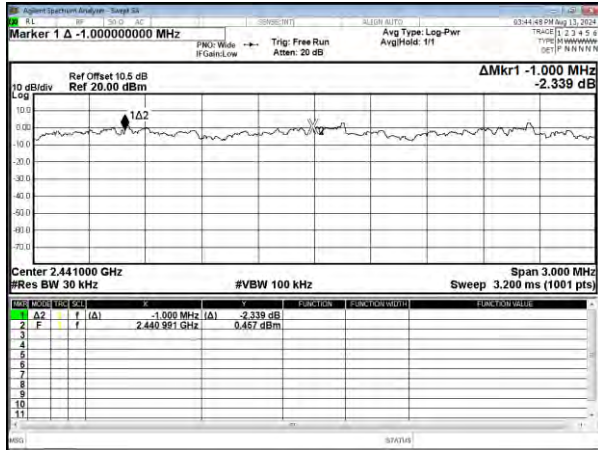

CH78

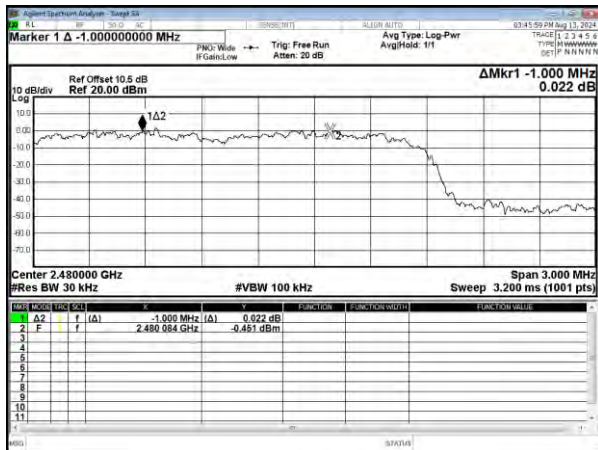



10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout




10.4 Test Result and Data

Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec


Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK (DH1)	2402	0.385	320.00	123.20	400
GFSK (DH3)	2402	1.647	160.00	263.52	400
GFSK (DH5)	2402	2.900	106.67	309.33	400
$\pi/4$ -DQPSK (DH1)	2402	0.396	320.00	126.72	400
$\pi/4$ -DQPSK (DH3)	2402	1.650	160.00	264.00	400
$\pi/4$ -DQPSK (DH5)	2402	2.900	106.67	309.33	400
8DPSK (DH1)	2402	0.392	320.00	125.44	400
8DPSK (DH3)	2402	1.650	160.00	264.00	400
8DPSK (DH5)	2402	2.910	106.67	310.40	400




Modulation Type: GFSK (1Mbps)
DH1

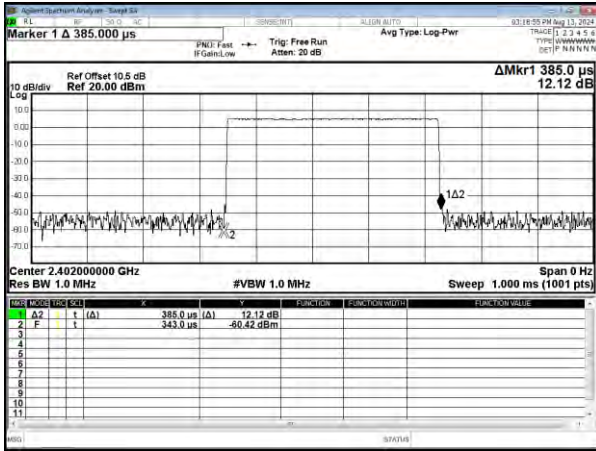


Modulation Type: $\pi/4$ -DQPSK (2Mbps)
DH1

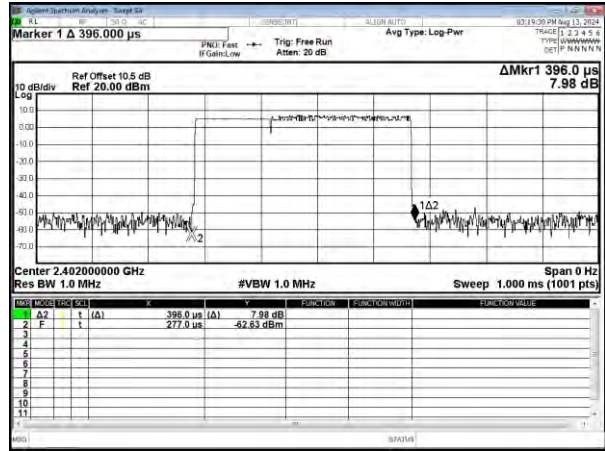


DH3

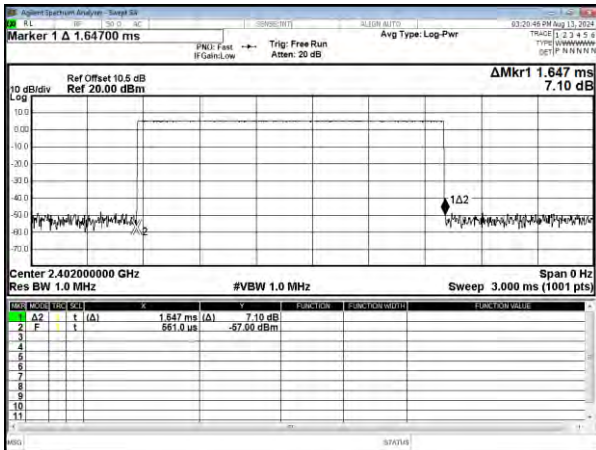


DH3

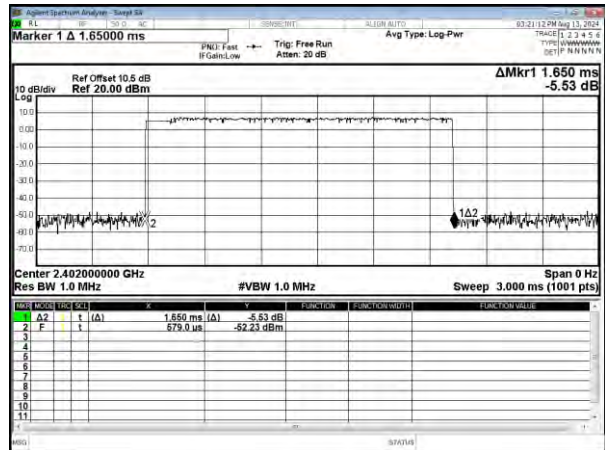

DH5

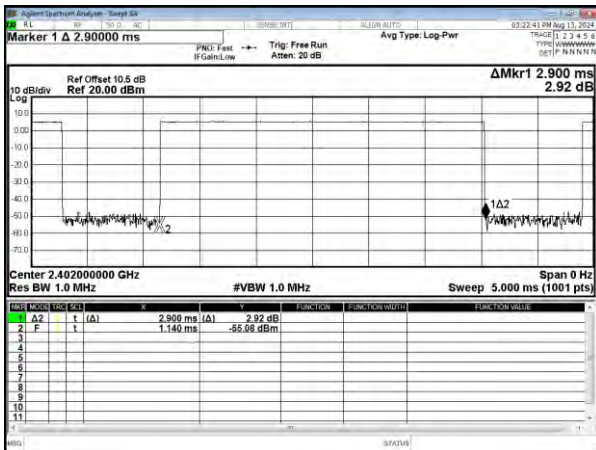


DH5

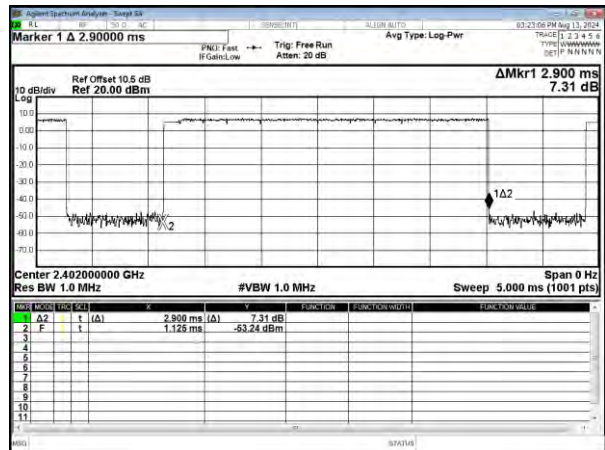





Modulation Type: 8DPSK (3Mbps)
DH1

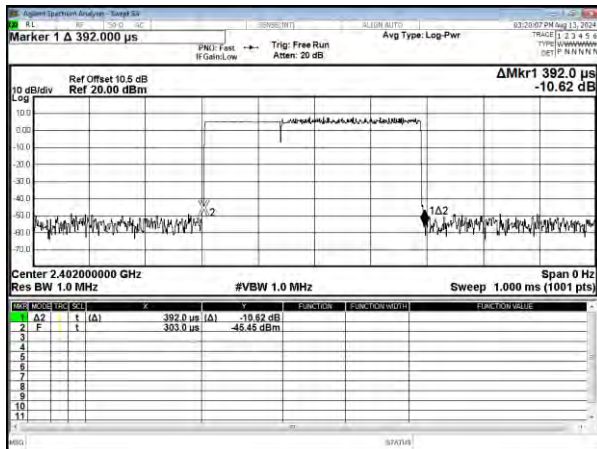

DH3

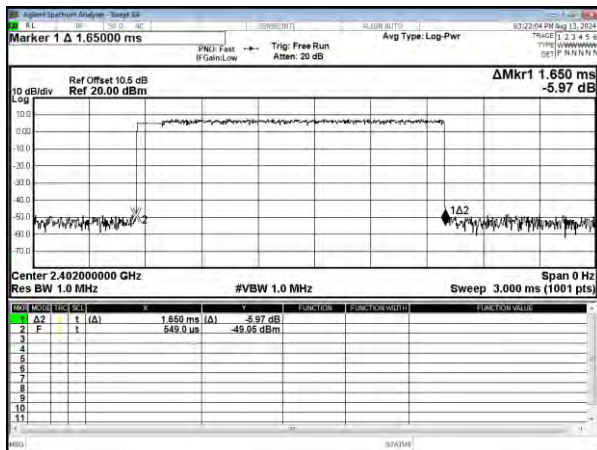


DH5

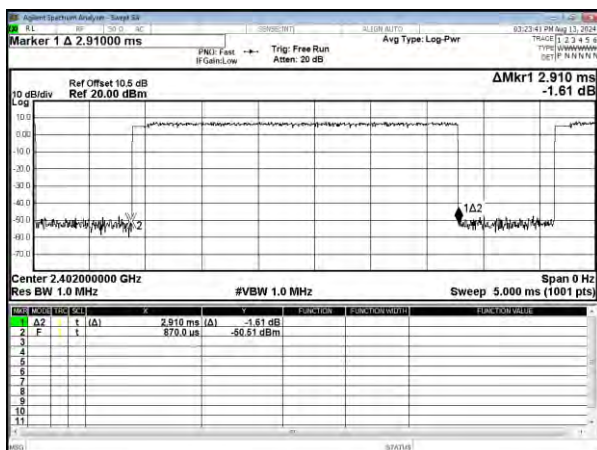



Test Period = 0.4 (second/ channel) x 20 Channel = 8 sec

Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 8 (20 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
AFH (DH1)	2402-2421	0.397	160	63.52	400
AFH (DH3)	2402-2421	1.656	80	132.48	400
AFH (DH5)	2402-2421	2.905	53.33	154.92	400

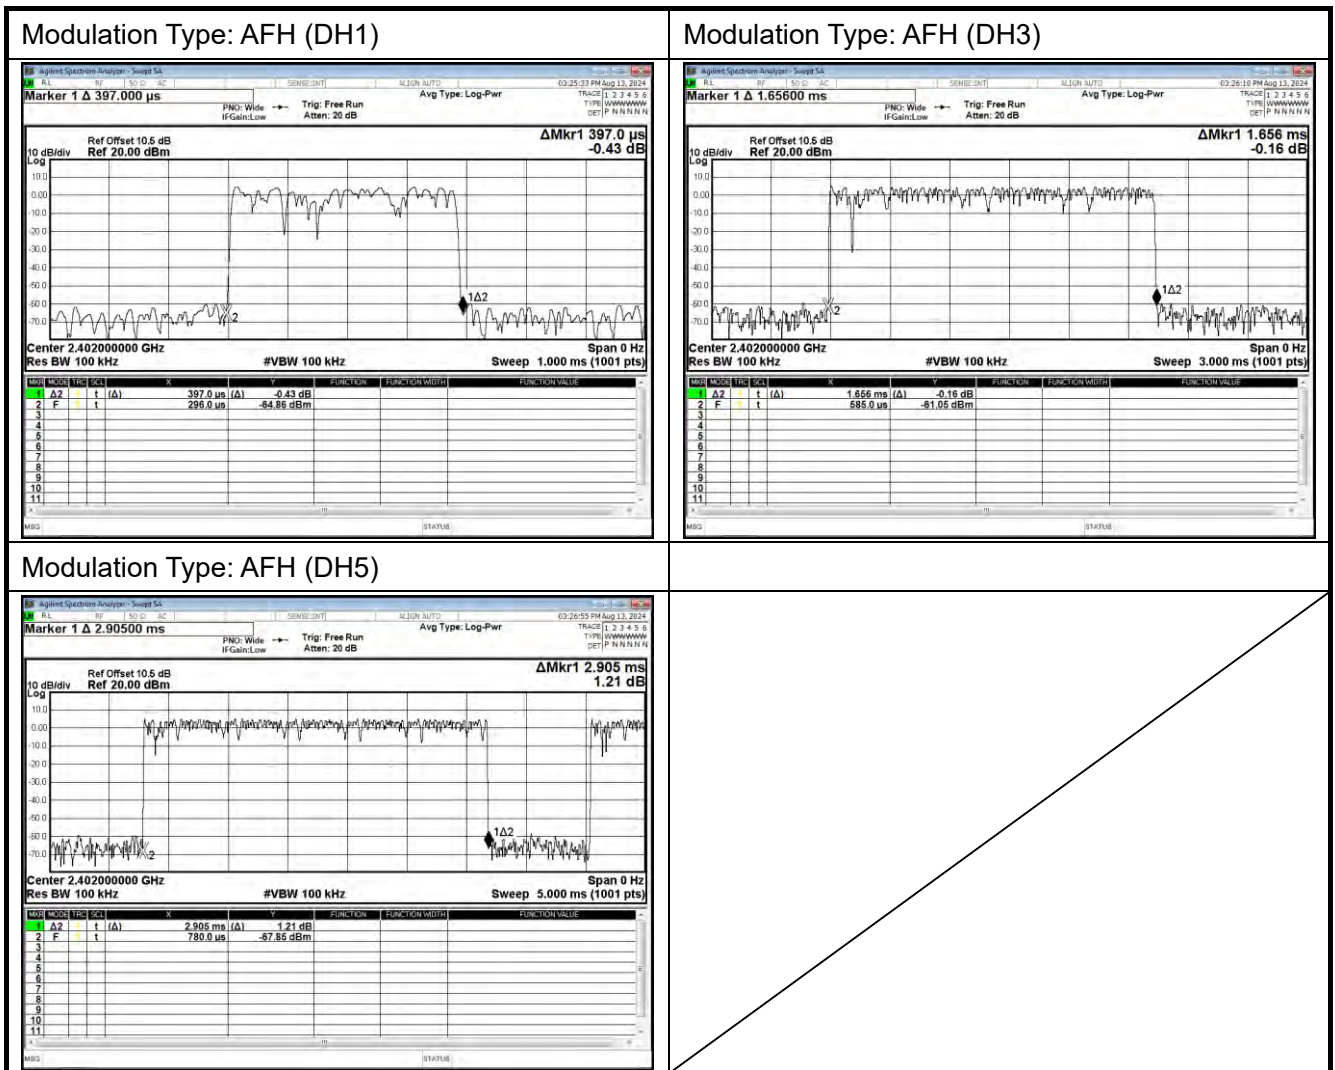



11. Number of Hopping Channels


11.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 300 KHz and VBW to 300 KHz.
- c. Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

11.3 Test Setup Layout




11.4 Test Result and Data


Modulation Type	Number of hopping channels
GFSK	79
$\pi/4$ -DQPSK	79
8DPSK	79




Modulation Standard: GFSK (1Mbps)

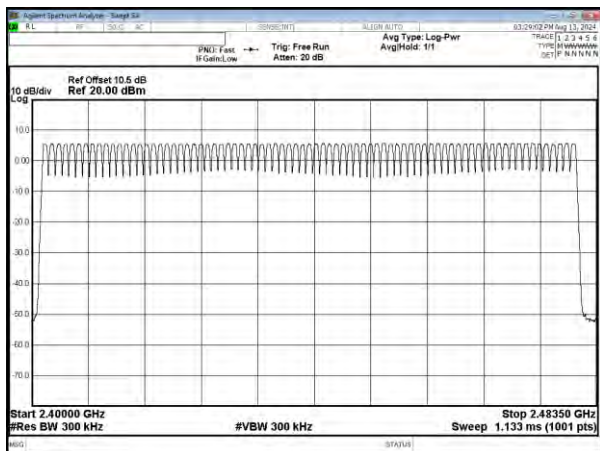

Modulation Standard: $\pi/4$ -DQPSK (2Mbps)

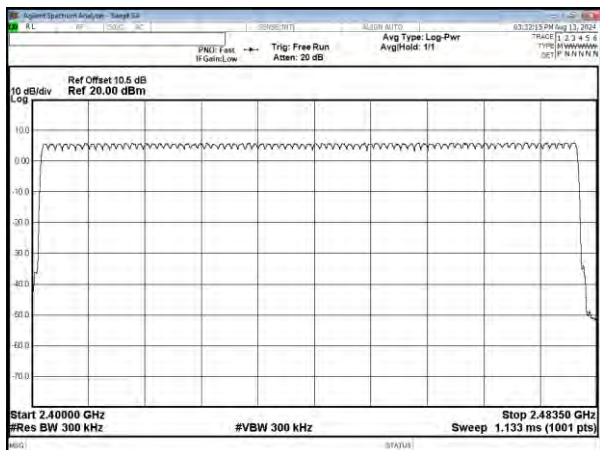

Modulation Standard: 8DPSK (3Mbps)

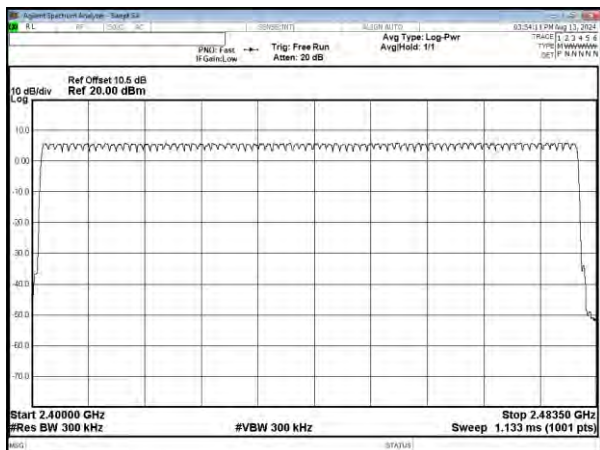



12. Maximum Peak Output Power


12.1 Test Limit

The Maximum Peak Output Power Measurement is 21dBm.

12.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout



12.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
GFSK (1Mbps)	00	2402	5.766	3.772
	39	2441	5.628	3.654
	78	2480	5.898	3.889
$\pi/4$ -DQPSK (2Mbps)	00	2402	8.080	6.427
	39	2441	8.127	6.497
	78	2480	8.525	7.120
8DPSK (3Mbps)	00	2402	8.493	7.068
	39	2441	8.564	7.185
	78	2480	8.947	7.847

----- End of the report -----