

TEST REPORT

Product Name: TV
FCC ID: 2A9L7TV55-US3B
Trademark: GAZER
Model Number: TV55-US3B, TV55-US3S, TV55-US3W, TV55-US3G, TV50-US3B, TV50-US3S, TV50-US3W, TV50-US3G, TV43-US3B, TV43-US3S, TV43-US3W, TV43-US3G
Prepared For: Gazer Limited
Address: 17 HANOVER SQUARE, LONDON, UNITED KINGDOM, W1S 1BN
Manufacturer: Gazer Limited
Address: 17 HANOVER SQUARE, LONDON, UNITED KINGDOM, W1S 1BN
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Oct. 29, 2022
Sample tested Date: Oct. 29, 2022 to Nov.14, 2022
Issue Date: Nov.14, 2022
Report No.: CTB221114046RFX
Test Standards 47 CFR Part 15 Subpart E
Test Results PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	10
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. AC POWER LINE CONDUCTED EMISSION	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 Test Result	16
7. RADIATED SPURIOUS EMISSIONS	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	18
7.3 Test procedure	19
7.4 Test Result	20
8. BAND EDGE	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	44
9.1 Block Diagram Of Test Setup	44
9.2 Limit	44
9.3 Test procedure	45
10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	72
10.1 Block Diagram Of Test Setup	72
10.2 Limits	72
10.3 Test Procedure	72
10.4 Test Results	74
11. POWER SPECTRAL DENSITY	100
11.1 Block Diagram Of Test Setup	100
11.2 Limit	100
11.3 Test procedure	100
11.4 Test Result	102
12. FREQUENCY STABILITY	128
12.1 Block Diagram Of Test Setup	128
12.2 Limit	128
12.3 Test procedure	128
12.4 Test Result	129
13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT	153
13.1 Requirement	153
13.2 Test Results	153
14. ANTENNA REQUIREMENT	154



15. EUT PHOTOGRAPHS 155
16. EUT TEST SETUP PHOTOGRAPHS 156

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB221114046RFX	Nov.14, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (b)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	/	PASS

Remark:
Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Adjacent channel power	U=±1.3dB
Conducted Adjacent channel power	U=±1.38dB
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m camber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted emission(150K-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	TV55-US3B, TV55-US3S, TV55-US3W, TV55-US3G, TV50-US3B, TV50-US3S, TV50-US3W, TV50-US3G, TV43-US3B, TV43-US3S, TV43-US3W, TV43-US3G
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: TV55-US3B
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5250MHz ~5350 MHz/ 4 channel IEEE802.11n/ac(40M): 5250MHz ~5350 MHz/ 2 channel IEEE802.11ac(80M): 5250MHz ~5350 MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5470MHz ~5725 MHz/ 11 channel IEEE802.11n/ac(40M): 5470MHz ~5725 MHz/ 5 channel IEEE802.11ac(80M): 5470MHz ~5725 MHz/ 3 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 17.838dBm
Type of Modulation:	WiFi (5G): DSSS, OFDM, CCK
Antenna installation:	WiFi (5G): PIFA antenna
Antenna Gain:	WiFi (5G): 5.2G:2.88dBi 5.3G:3.13dBi 5.6G:3.36dBi 5.8G:3.14dBi
Ratings:	AC 120V~240V 50/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Router	Huawei	AX2 Pro	/	/
2	Laptop	DELL	Vostro 5490	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
52	5260MHz	60	5300MHz
56	5280MHz	64	5320MHz
For 802.11a/n/ac(20M) Operation in the 5470MHz ~5725 MHz band			
Channel	Frequency	Channel	Frequency
100	5500MHz	124	5620 MHz
104	5520MHz	128	5640 MHz
108	5540MHz	132	5660 MHz
112	5560MHz	136	5680MHz
116	5580MHz	140	5700MHz
120	5600 MHz		
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
54	5270MHz	62	5310MHz
For 802.11n/ac(40M) Operation in the 5470MHz ~5725 MHz band			
Channel	Frequency	Channel	Frequency
102	5510MHz	126	5630MHz
110	5550MHz	134	5670MHz
118	5590MHz		
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
58	5290MHz	NA	NA
For 802.11ac(80M) Operation in the 5470MHz ~5725 MHz band			
Channel	Frequency	Channel	Frequency
106	5530MHz	138	5690MHz
122	5610 MHz		
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

NOTE: Dutycycle>98%.

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
Channel 38		N/A	Channel 46	
5190MHz		N/A	5230MHz	
802.11ac(80M)		N/A	Channel 42	N/A
N/A		5210MHz	N/A	
802.11a/n/ac(20M)	5250MHz ~5350 MHz	Channel 52	Channel 56	Channel 64
		5260MHz	5280MHz	5320MHz
Channel 54		N/A	Channel 62	
5270MHz		N/A	5310MHz	
802.11ac(80M)		N/A	Channel 58	N/A
N/A		5290MHz	N/A	
802.11a/n/ac(20M)	5470MHz ~5725 MHz	Channel 100	Channel 116	Channel 140
		5500MHz	5580MHz	5700MHz
Channel 102		N/A	Channel 134	
5510MHz		N/A	5670MHz	
802.11ac(80M)		N/A	Channel 106	N/A
N/A		5530MHz	N/A	
802.11a/n/ac(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
Channel 151		N/A	Channel 159	
5755MHz		N/A	5795MHz	
802.11ac(80M)		N/A	Channel 155	N/A
N/A		5775MHz	N/A	

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):NV	120V
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

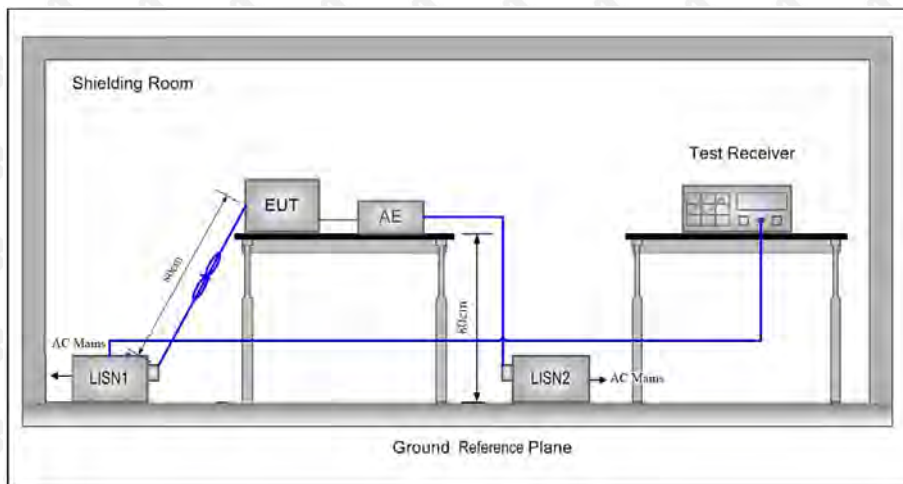

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

L:

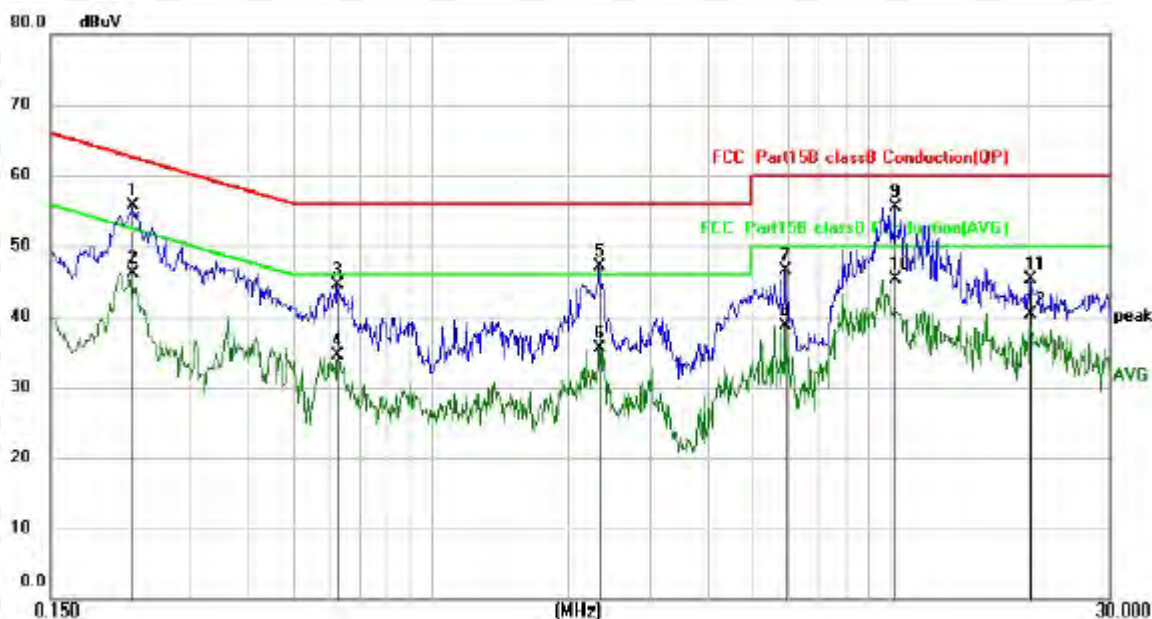


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2260	45.69	10.00	55.69	62.60	-6.91	QP
2		0.2260	36.04	10.00	46.04	52.60	-6.56	AVG
3		0.6260	34.56	9.97	44.53	56.00	-11.47	QP
4		0.6260	24.56	9.97	34.53	46.00	-11.47	AVG
5		2.3220	37.03	10.04	47.07	56.00	-8.93	QP
6		2.3220	25.42	10.04	35.46	46.00	-10.54	AVG
7		5.9100	36.34	10.20	46.54	60.00	-13.46	QP
8		5.9100	28.59	10.20	38.79	50.00	-11.21	AVG
9	*	10.2459	45.15	10.36	55.51	60.00	-4.49	QP
10		10.2459	34.99	10.36	45.35	50.00	-4.65	AVG
11		20.2576	34.69	10.57	45.26	60.00	-14.74	QP
12		20.2576	29.72	10.57	40.29	50.00	-9.71	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

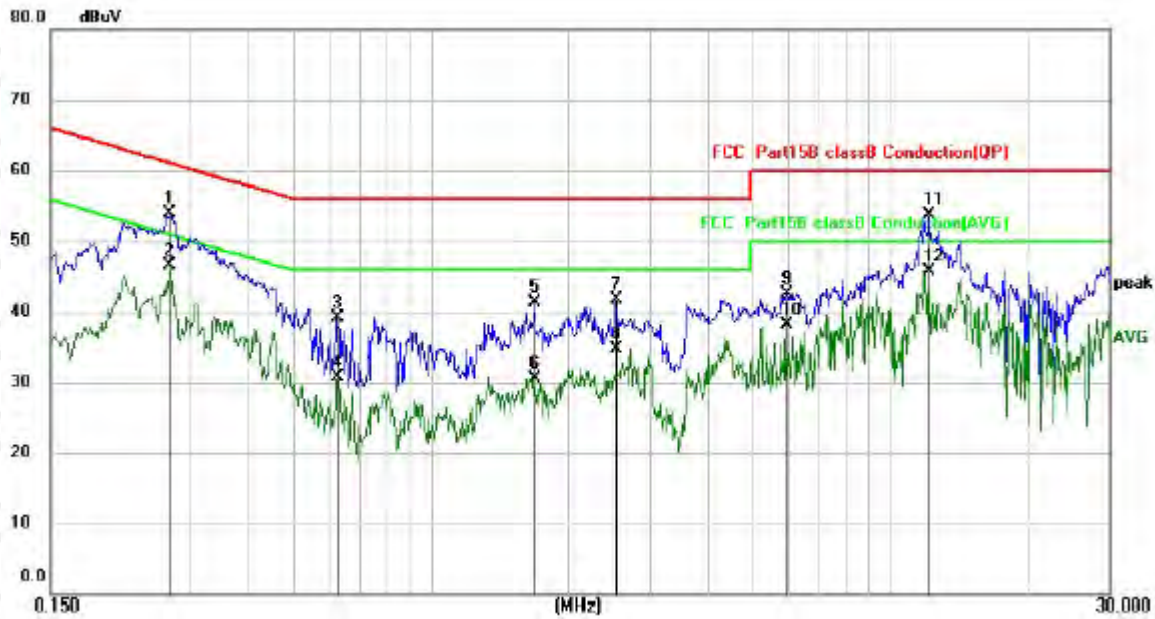

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2714	43.93	10.00	53.93	61.07	-7.14	QP
2		0.2714	36.49	10.00	46.49	51.07	-4.58	AVG
3		0.6260	29.09	9.97	39.06	56.00	-16.94	QP
4		0.6260	20.64	9.97	30.61	46.00	-15.39	AVG
5		1.6814	31.28	10.01	41.29	56.00	-14.71	QP
6		1.6814	20.54	10.01	30.55	46.00	-15.45	AVG
7		2.5379	31.58	10.05	41.63	56.00	-14.37	QP
8		2.5379	24.57	10.05	34.62	46.00	-11.38	AVG
9		5.9419	32.27	10.20	42.47	60.00	-17.53	QP
10		5.9419	27.91	10.20	38.11	50.00	-11.89	AVG
11		12.1339	43.27	10.40	53.67	60.00	-6.33	QP
12	*	12.1339	35.21	10.40	45.61	50.00	-4.39	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Remark:

1. Factor = Cable loss + LISN factor, Margin = Limit – Level
2. All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
3. All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

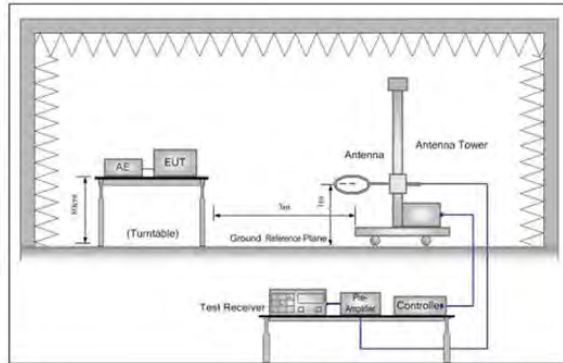


Figure 1. Below 30MHz

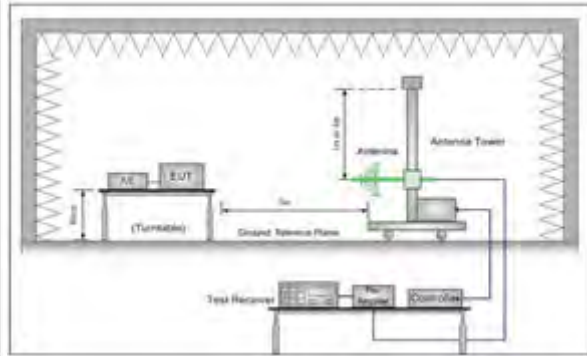


Figure 2. 30MHz to 1GHz

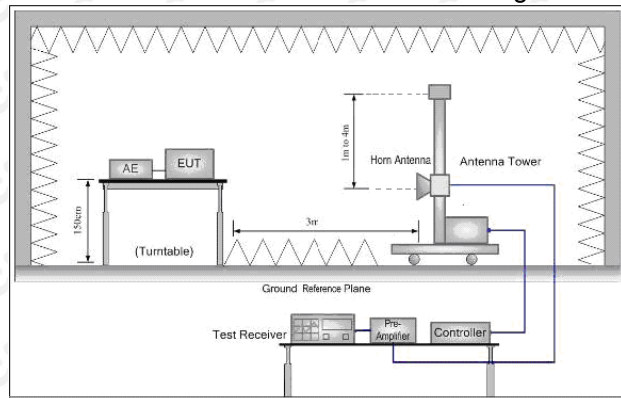


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F$ (kHz) + 80	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F$ (kHz) + 40	Quasi-peak	3
1.705MHz-30MHz	$20\log 30$ + 40	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = ((E*d)^2) / 30$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:

$$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

30MHz-1GHz Test Results:
 Modulation : 802.11a (the worst data)
 Test Channel : 5780MHz
 Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.3509	36.59	-6.55	30.04	40.00	-9.96	QP
2	!	72.0841	43.56	-9.38	34.18	40.00	-5.82	QP
3	!	168.7093	45.31	-6.52	38.79	43.50	-4.71	QP
4		317.1444	44.01	-4.98	39.03	46.00	-6.97	QP
5	!	722.9923	37.98	4.30	42.28	46.00	-3.72	QP
6	*	892.2907	35.40	6.96	42.36	46.00	-3.64	QP

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	32.4628	41.08	-6.77	34.31	40.00	-5.69	QP
2		70.8315	41.51	-9.20	32.31	40.00	-7.69	QP
3		108.8375	41.97	-8.88	33.09	43.50	-10.41	QP
4		217.5440	45.81	-9.03	36.78	46.00	-9.22	QP
5	*	434.8267	43.18	-1.71	41.47	46.00	-4.53	QP
6	!	596.1770	38.72	2.36	41.08	46.00	-4.92	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

- The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11a20 (the worst)

Radiated Spurious Emission (Above 1GHz):

ANT 1+ANT2

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	41.30	16.39	57.69	74	-16.31	PK	1.28	265	H
10360	25.82	16.39	42.21	54	-11.79	AV	1.39	4	H
10360	40.23	16.39	56.62	74	-17.38	PK	1.57	206	V
10360	25.74	16.39	42.13	54	-11.87	AV	1.49	213	V
Channel:5240MHz									
10480	39.85	16.11	55.96	74	-18.04	PK	1.81	168	H
10480	25.97	16.11	42.08	54	-11.92	AV	1.24	37	H
10480	41.37	16.11	57.48	74	-16.52	PK	1.23	156	V
10480	27.26	16.11	43.37	54	-10.63	AV	1.29	164	V
Channel:5260MHz									
10520	40.37	16.11	56.48	74	-17.52	PK	1.48	340	H
10520	27.33	16.11	43.44	54	-10.56	AV	1.08	149	H
10520	41.86	16.11	57.97	74	-16.03	PK	1.66	251	V
10520	25.48	16.11	41.59	54	-12.41	AV	1.12	305	V
Channel:5320MHz									
10640	40.28	16.39	56.67	74	-17.33	PK	1.07	314	H
10640	27.55	16.39	43.94	54	-10.06	AV	1.21	218	H
10640	40.10	16.39	56.49	74	-17.51	PK	1.27	349	V
10640	27.16	16.39	43.55	54	-10.45	AV	1.57	255	V
Channel:5500MHz									
11000	40.15	16.39	56.54	74	-17.46	PK	1.23	301	H
11000	27.18	16.39	43.57	54	-10.43	AV	1.37	137	H
11000	41.37	16.39	57.76	74	-16.24	PK	1.02	271	V
11000	25.74	16.39	42.13	54	-11.87	AV	1.58	122	V

Channel:5700MHz									
11400	40.11	16.39	56.50	74	-17.50	PK	1.36	79	H
11400	25.52	16.39	41.91	54	-12.09	AV	1.09	261	H
11400	41.55	16.39	57.94	74	-16.06	PK	1.34	14	V
11400	25.44	16.39	41.83	54	-12.17	AV	1.01	72	V
Channel:5745MHz									
11490	41.70	16.39	58.09	74	-15.91	PK	1.14	356	H
11490	26.82	16.39	43.21	54	-10.79	AV	1.10	336	H
11490	41.30	16.39	57.69	74	-16.31	PK	1.13	355	V
11490	25.26	16.39	41.65	54	-12.35	AV	1.22	205	V
Channel:5825MHz									
11650	39.32	16.39	55.71	74	-18.29	PK	1.45	330	H
11650	27.96	16.39	44.35	54	-9.65	AV	1.60	243	H
11650	40.36	16.39	56.75	74	-17.25	PK	1.14	247	V
11650	26.39	16.39	42.78	54	-11.22	AV	1.32	139	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	41.37	16.34	57.71	74	-16.29	PK	1.56	40	H
10380	27.60	16.34	43.94	54	-10.06	AV	1.89	304	H
10380	39.31	16.34	55.65	74	-18.35	PK	1.62	170	V
10380	26.83	16.34	43.17	54	-10.83	AV	1.10	133	V
Channel:5230MHz									
10460	40.22	16.15	56.37	74	-17.63	PK	1.79	299	H
10460	27.58	16.15	43.73	54	-10.27	AV	1.11	12	H
10460	40.59	16.15	56.74	74	-17.26	PK	1.73	326	V
10460	27.48	16.15	43.63	54	-10.37	AV	1.46	269	V

Channel:5270MHz									
10540	41.81	16.34	58.15	74	-15.85	PK	1.03	303	H
10540	27.35	16.34	43.69	54	-10.31	AV	1.70	193	H
10540	41.48	16.34	57.82	74	-16.18	PK	1.84	14	V
10540	26.27	16.34	42.61	54	-11.39	AV	1.50	60	V
Channel:5310MHz									
10620	41.51	16.34	57.85	74	-16.15	PK	1.90	142	H
10620	27.51	16.34	43.85	54	-10.15	AV	1.17	330	H
10620	40.56	16.34	56.90	74	-17.10	PK	1.54	79	V
10620	27.59	16.34	43.93	54	-10.07	AV	1.64	9	V
Channel:5510MHz									
11020	41.11	16.34	57.45	74	-16.55	PK	1.87	316	H
11020	27.65	16.34	43.99	54	-10.01	AV	1.43	39	H
11020	41.35	16.34	57.69	74	-16.31	PK	1.72	314	V
11020	26.66	16.34	43.00	54	-11.00	AV	1.12	45	V
Channel:5670MHz									
11340	40.97	16.34	57.31	74	-16.69	PK	1.60	226	H
11340	27.05	16.34	43.39	54	-10.61	AV	1.34	280	H
11340	40.79	16.34	57.13	74	-16.87	PK	1.29	239	V
11340	27.90	16.34	44.24	54	-9.76	AV	1.45	77	V

Channel:5755MHz									
11510	39.50	17.49	56.99	74	-17.01	PK	1.25	282	H
11510	26.10	17.49	43.59	54	-10.41	AV	1.42	23	H
11510	40.90	17.49	58.39	74	-15.61	PK	1.81	95	V
11510	27.20	17.49	44.69	54	-9.31	AV	1.20	325	V
Channel:5795MHz									
11590	40.37	17.52	57.89	74	-16.96	PK	1.40	88	H
11590	25.57	17.52	43.09	54	-16.11	AV	1.58	127	H
11590	39.12	17.52	56.64	74	-17.36	PK	1.07	145	V
11590	25.29	17.52	42.81	54	-11.19	AV	1.01	221	V

Modulation : 802.11(VH80) (the worst data)


Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	40.68	16.25	56.93	74	-17.07	PK	1.86	31	H
10420	27.49	16.25	43.74	54	-10.26	AV	1.05	79	H
10420	39.20	16.25	55.45	74	-18.55	PK	1.79	44	V
10420	27.82	16.25	44.07	54	-9.93	AV	1.56	322	V
Channel:5290MHz									
10580	41.21	16.25	57.46	74	-16.54	PK	1.33	191	H
10580	26.03	16.25	42.28	54	-11.72	AV	1.49	322	H
10580	40.89	16.25	57.14	74	-16.86	PK	1.26	299	V
10580	27.61	16.25	43.86	54	-10.14	AV	1.66	209	V
Channel:5530MHz									
11060	41.46	16.25	57.71	74	-16.29	PK	1.84	42	H
11060	25.05	16.25	41.30	54	-12.70	AV	1.07	230	H
11060	40.13	16.25	56.38	74	-17.62	PK	1.15	104	V
11060	26.50	16.25	42.75	54	-11.25	AV	1.58	47	V
Channel:5775MHz									
11550	41.22	17.50	58.72	74	-15.28	PK	1.46	87	H
11550	25.08	17.50	42.58	54	-11.42	AV	1.02	71	H
11550	39.59	17.50	57.09	74	-16.91	PK	1.85	336	V
11550	25.07	17.50	42.57	54	-11.43	AV	1.89	67	V

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
2. The EUT was tested in the low, high channel and the worst case position data was reported.
3. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

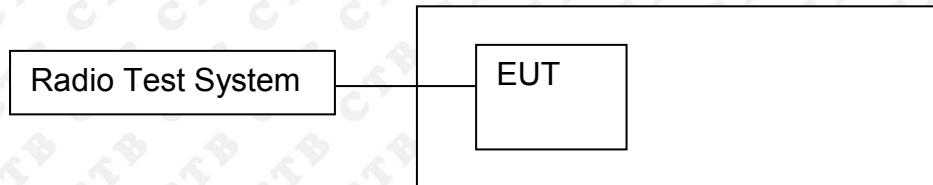

8.2 Limit


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


8.4 Test Result

Test Graph
5150-5250MHz:
ANT 1

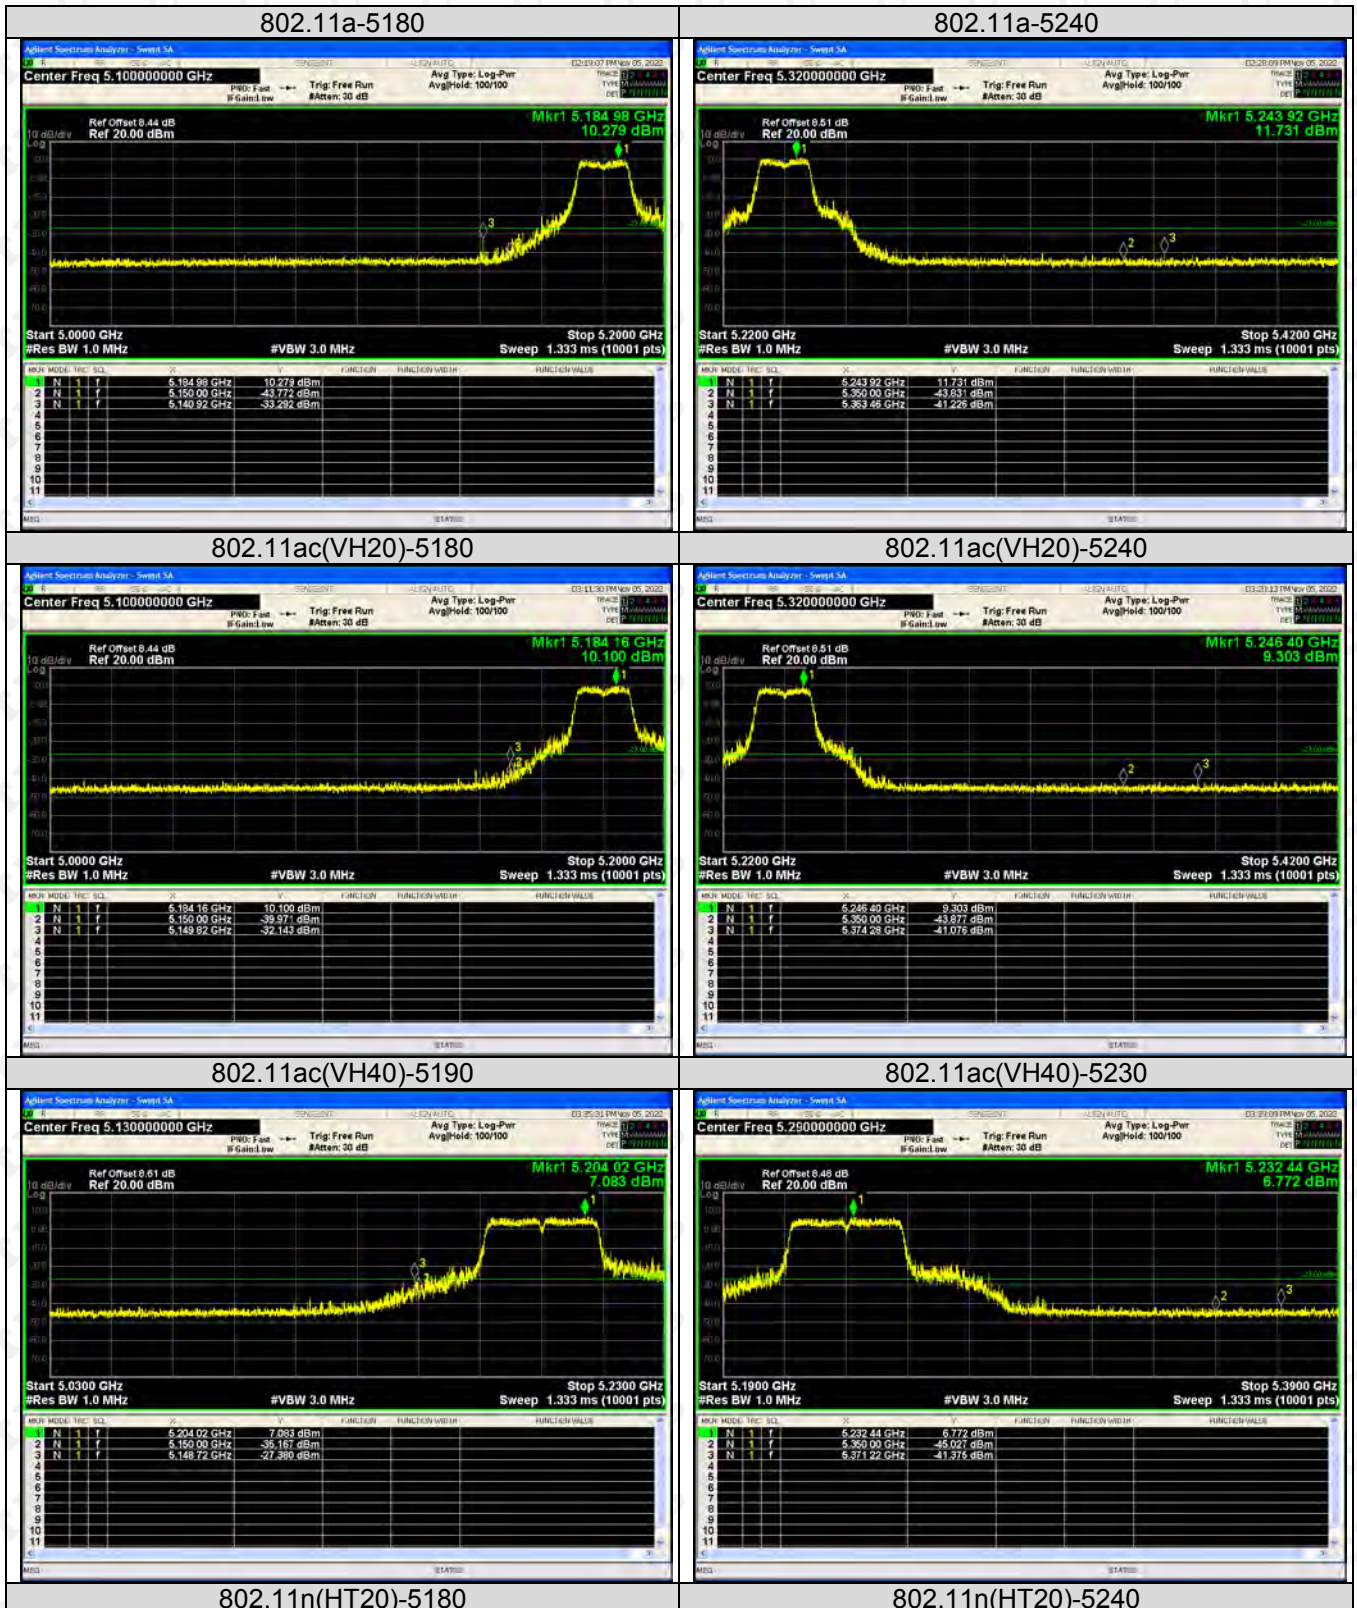


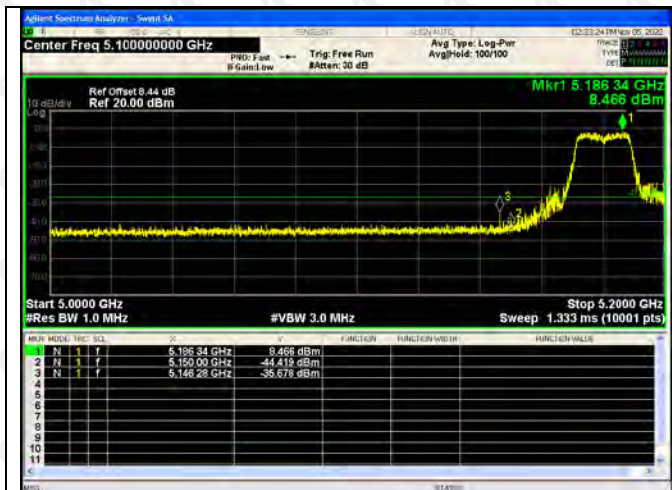



802.11n(HT40)-5190

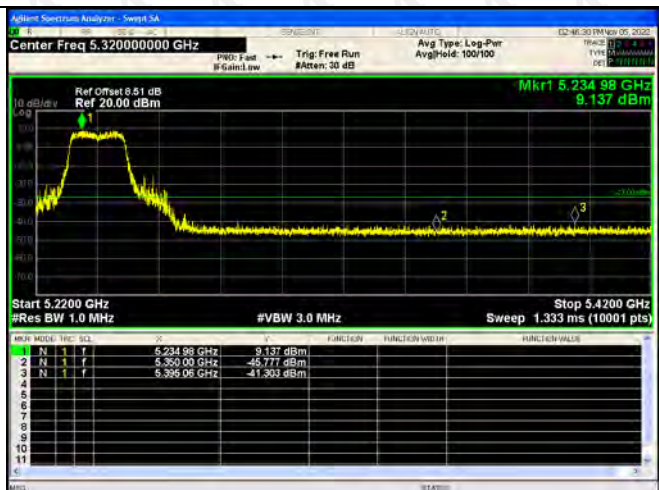


802.11n(HT40)-5230

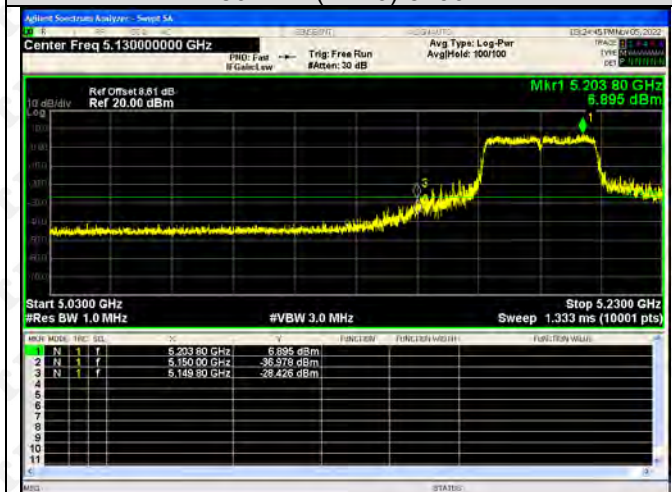


802.11ac(VH80)-5210

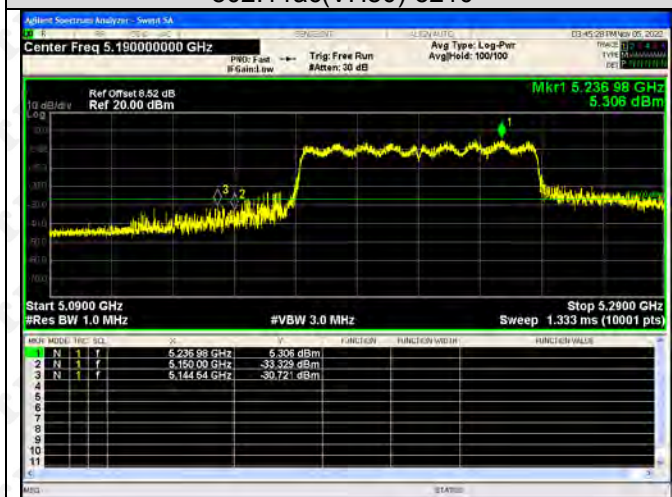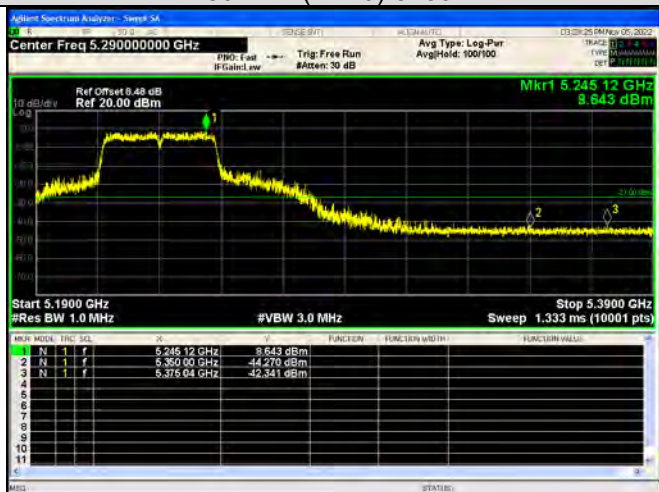

ANT 2

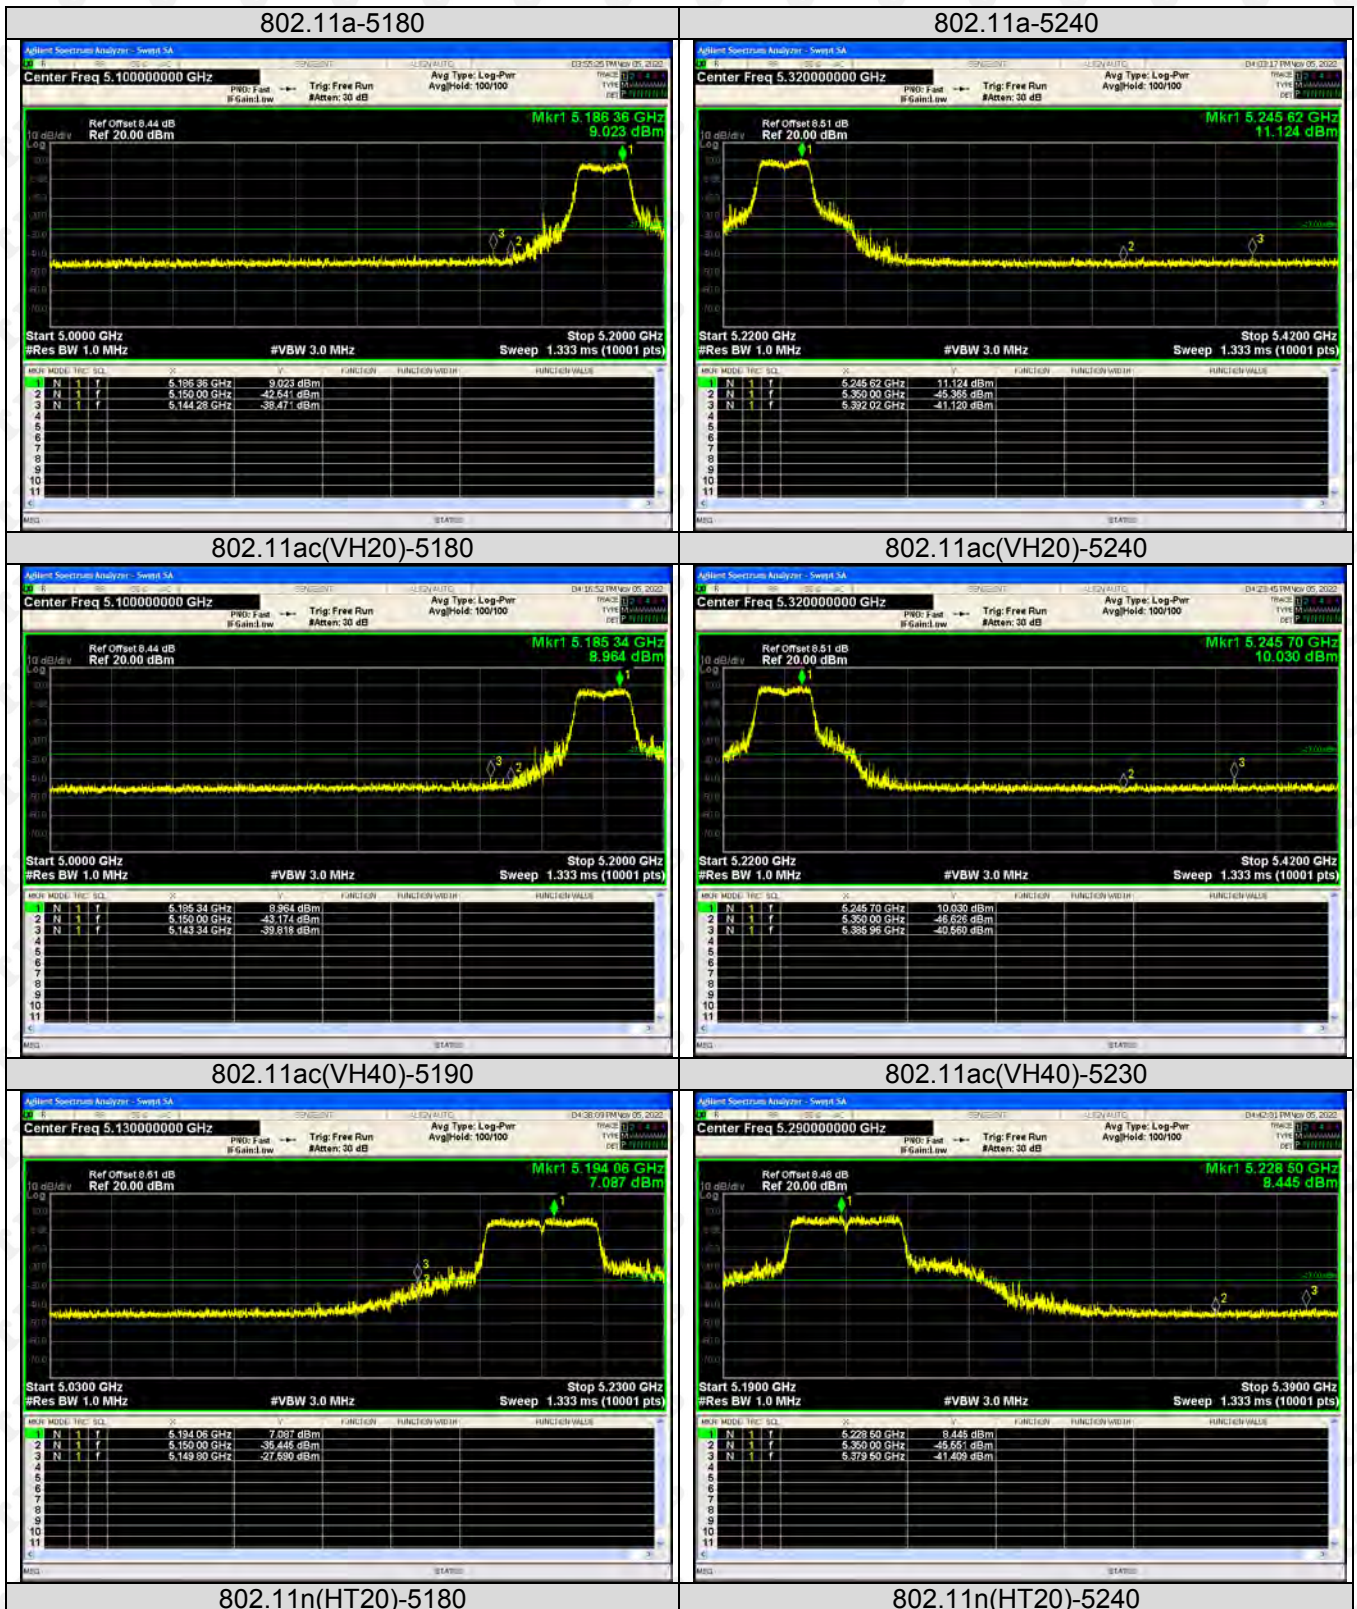


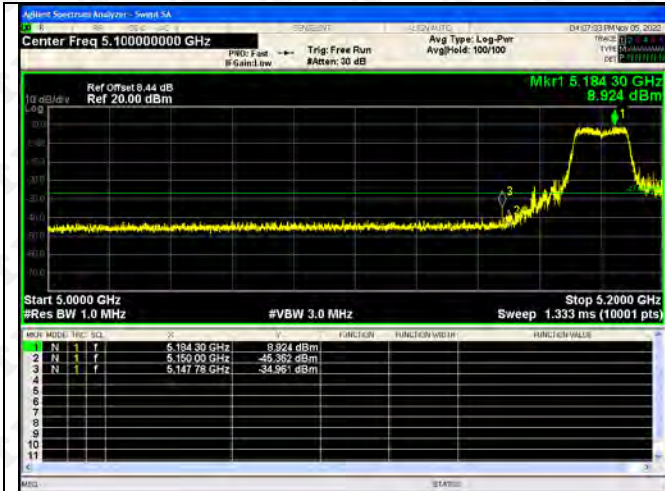



802.11n(HT40)-5190




802.11n(HT40)-5230

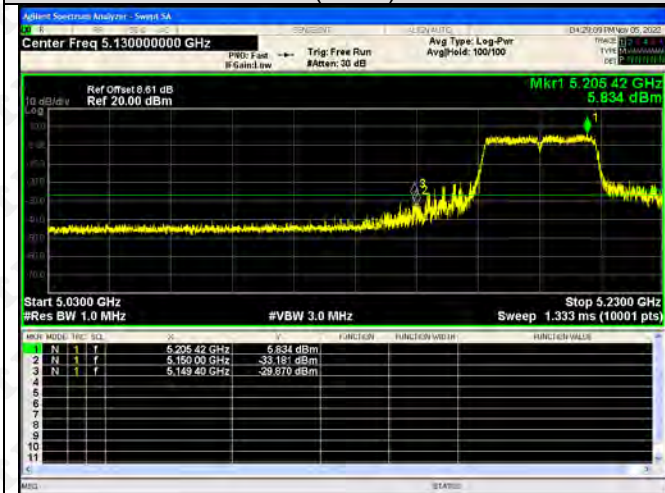

802.11ac(VH80)-5210

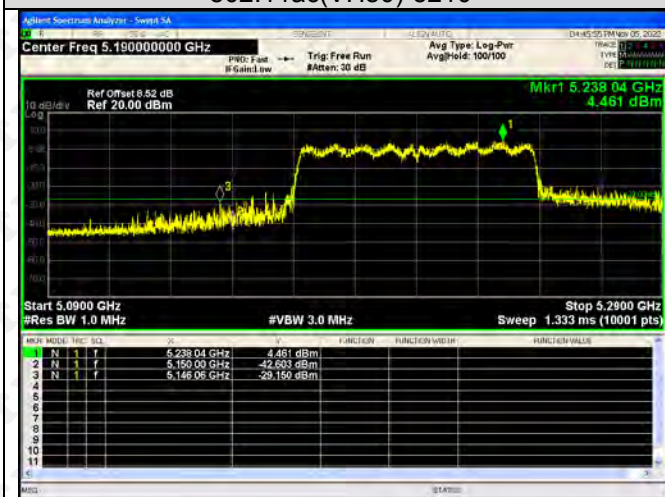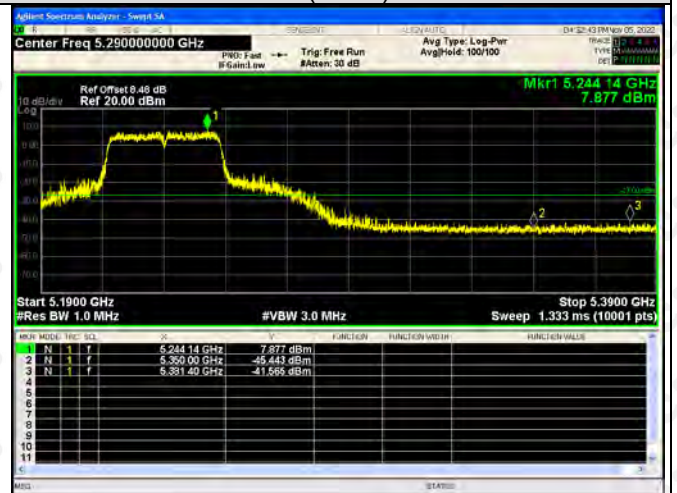

5250-5350MHz:
ANT1

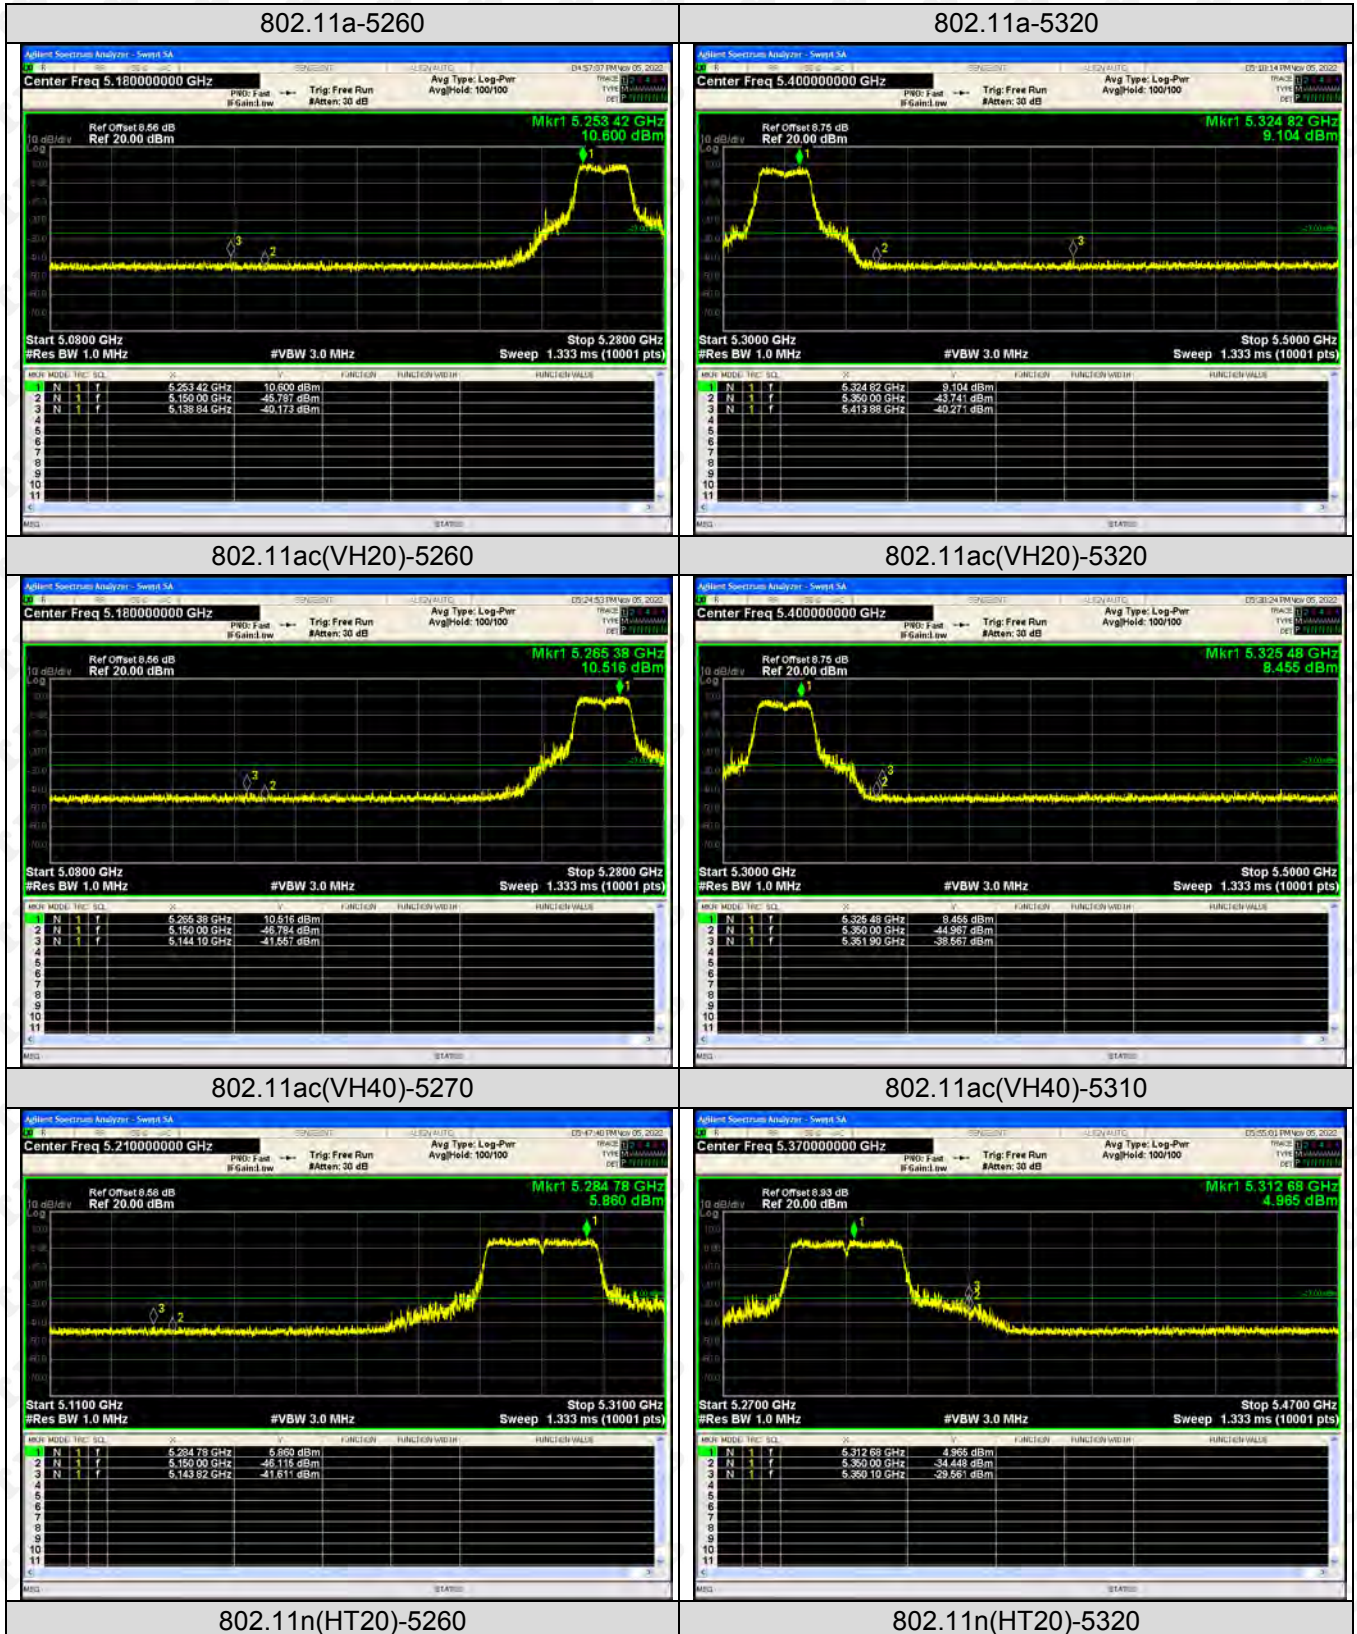






802.11n(HT40)-5270




802.11n(HT40)-5310

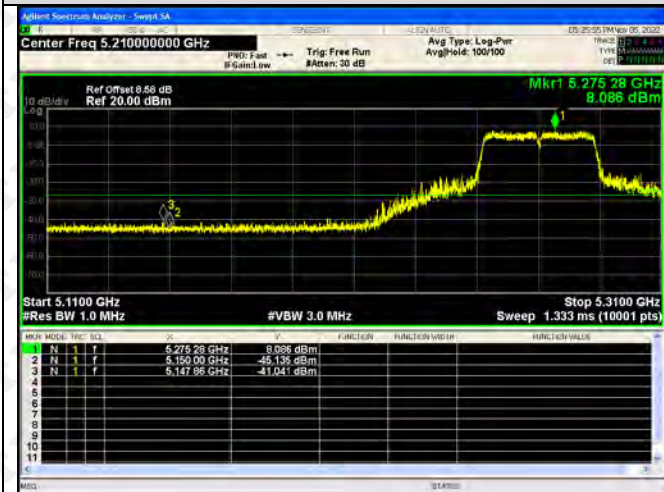


802.11ac(VH80)-5290

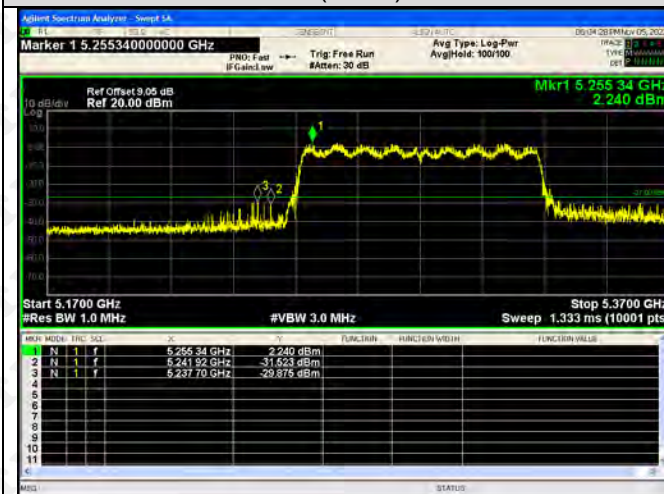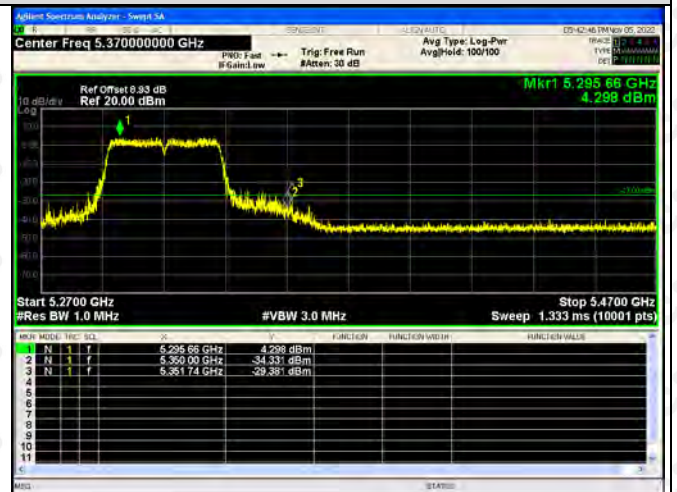

ANT2

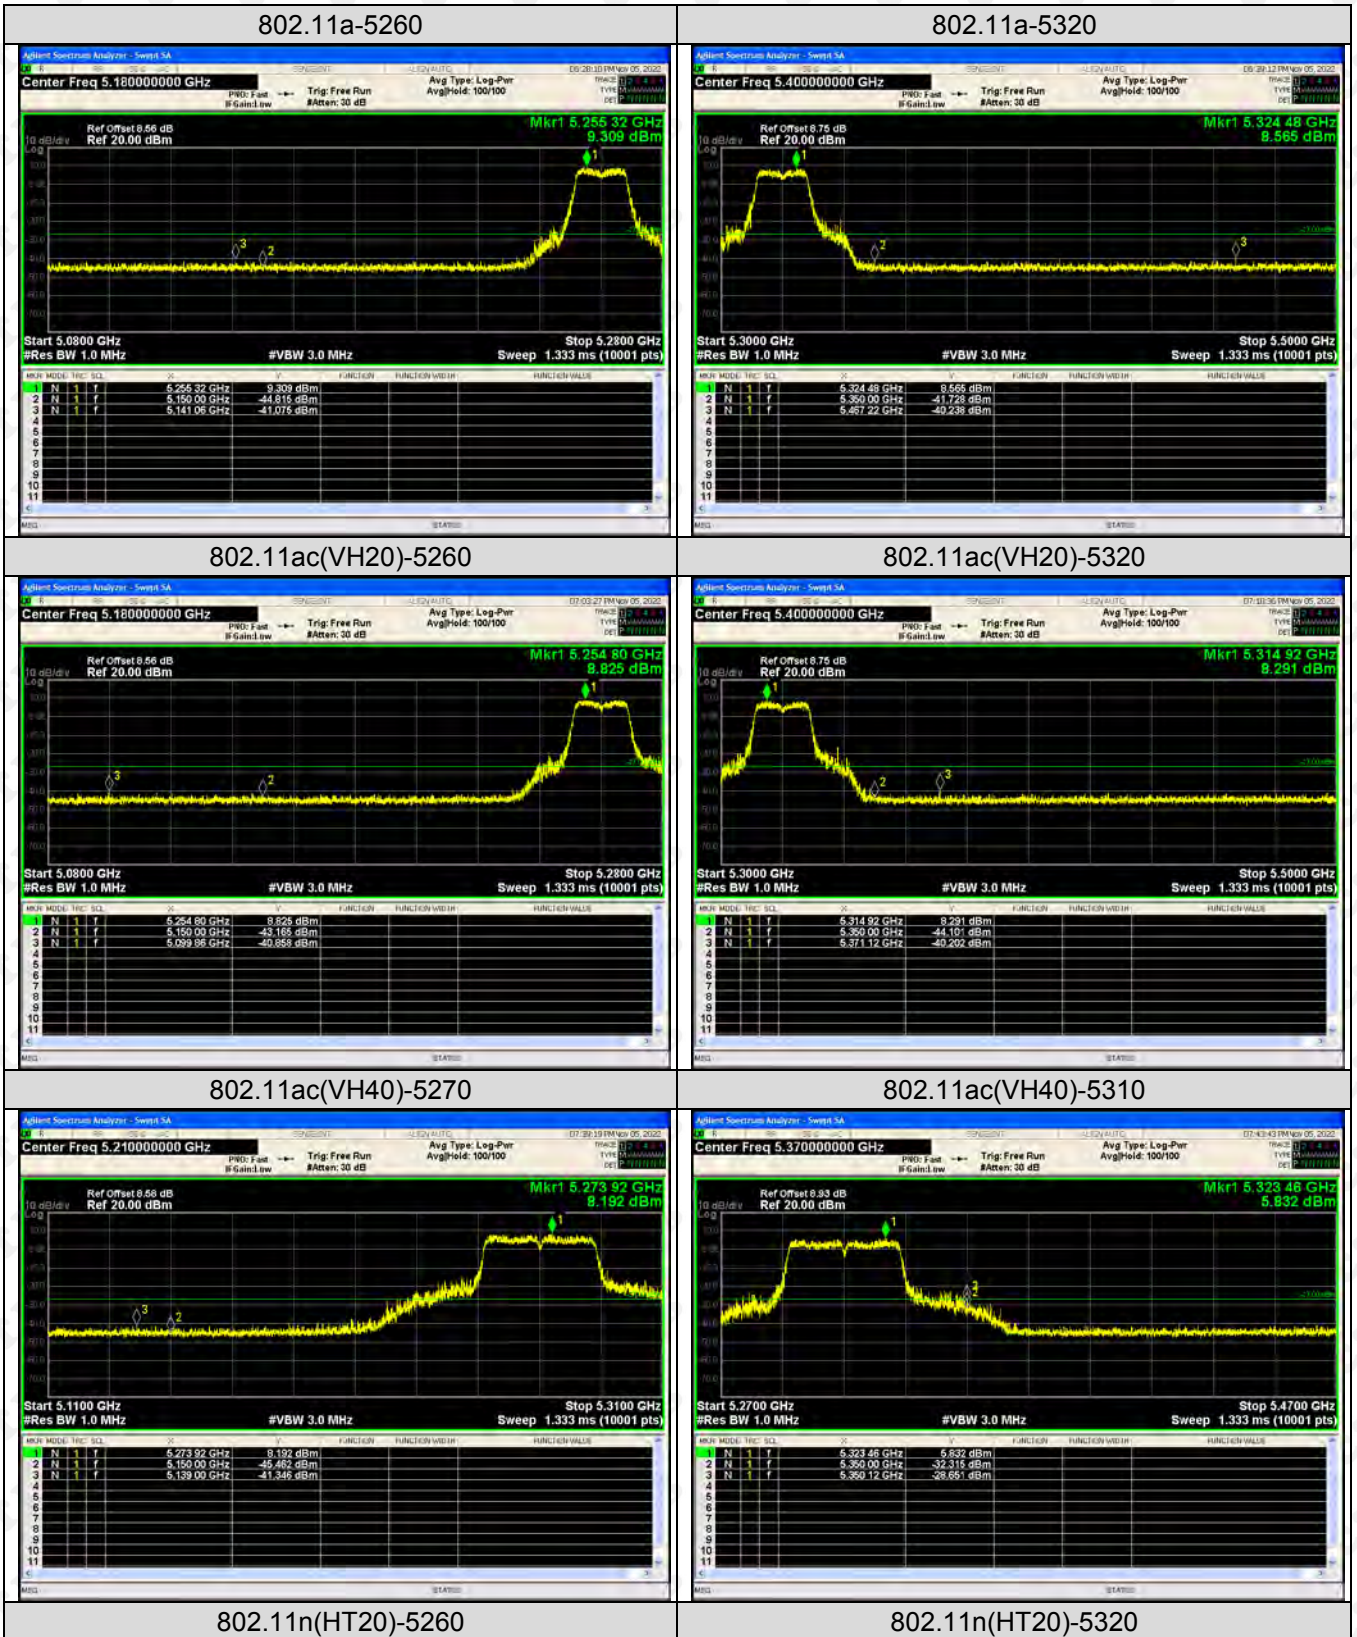


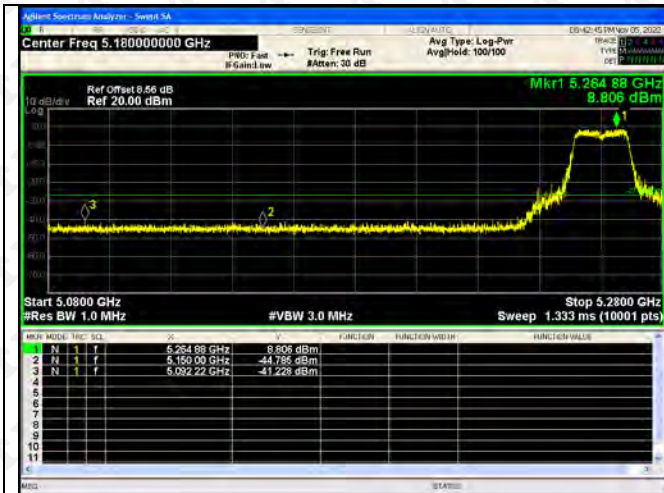



802.11n(HT40)-5270




802.11n(HT40)-5310

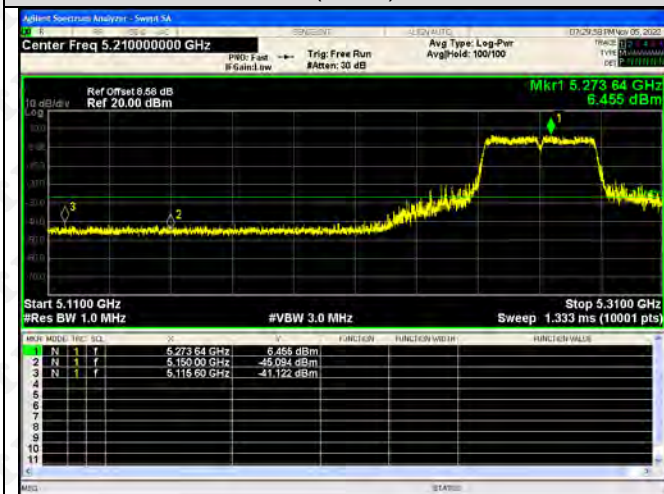


802.11ac(VH80)-5290

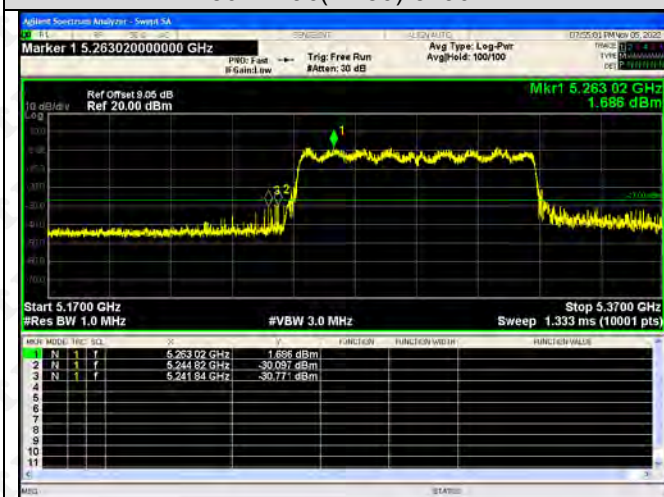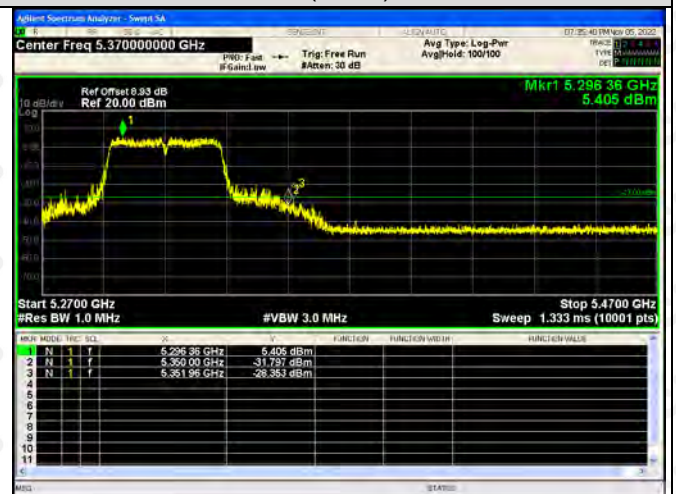


5470-5725MHz:
ANT1

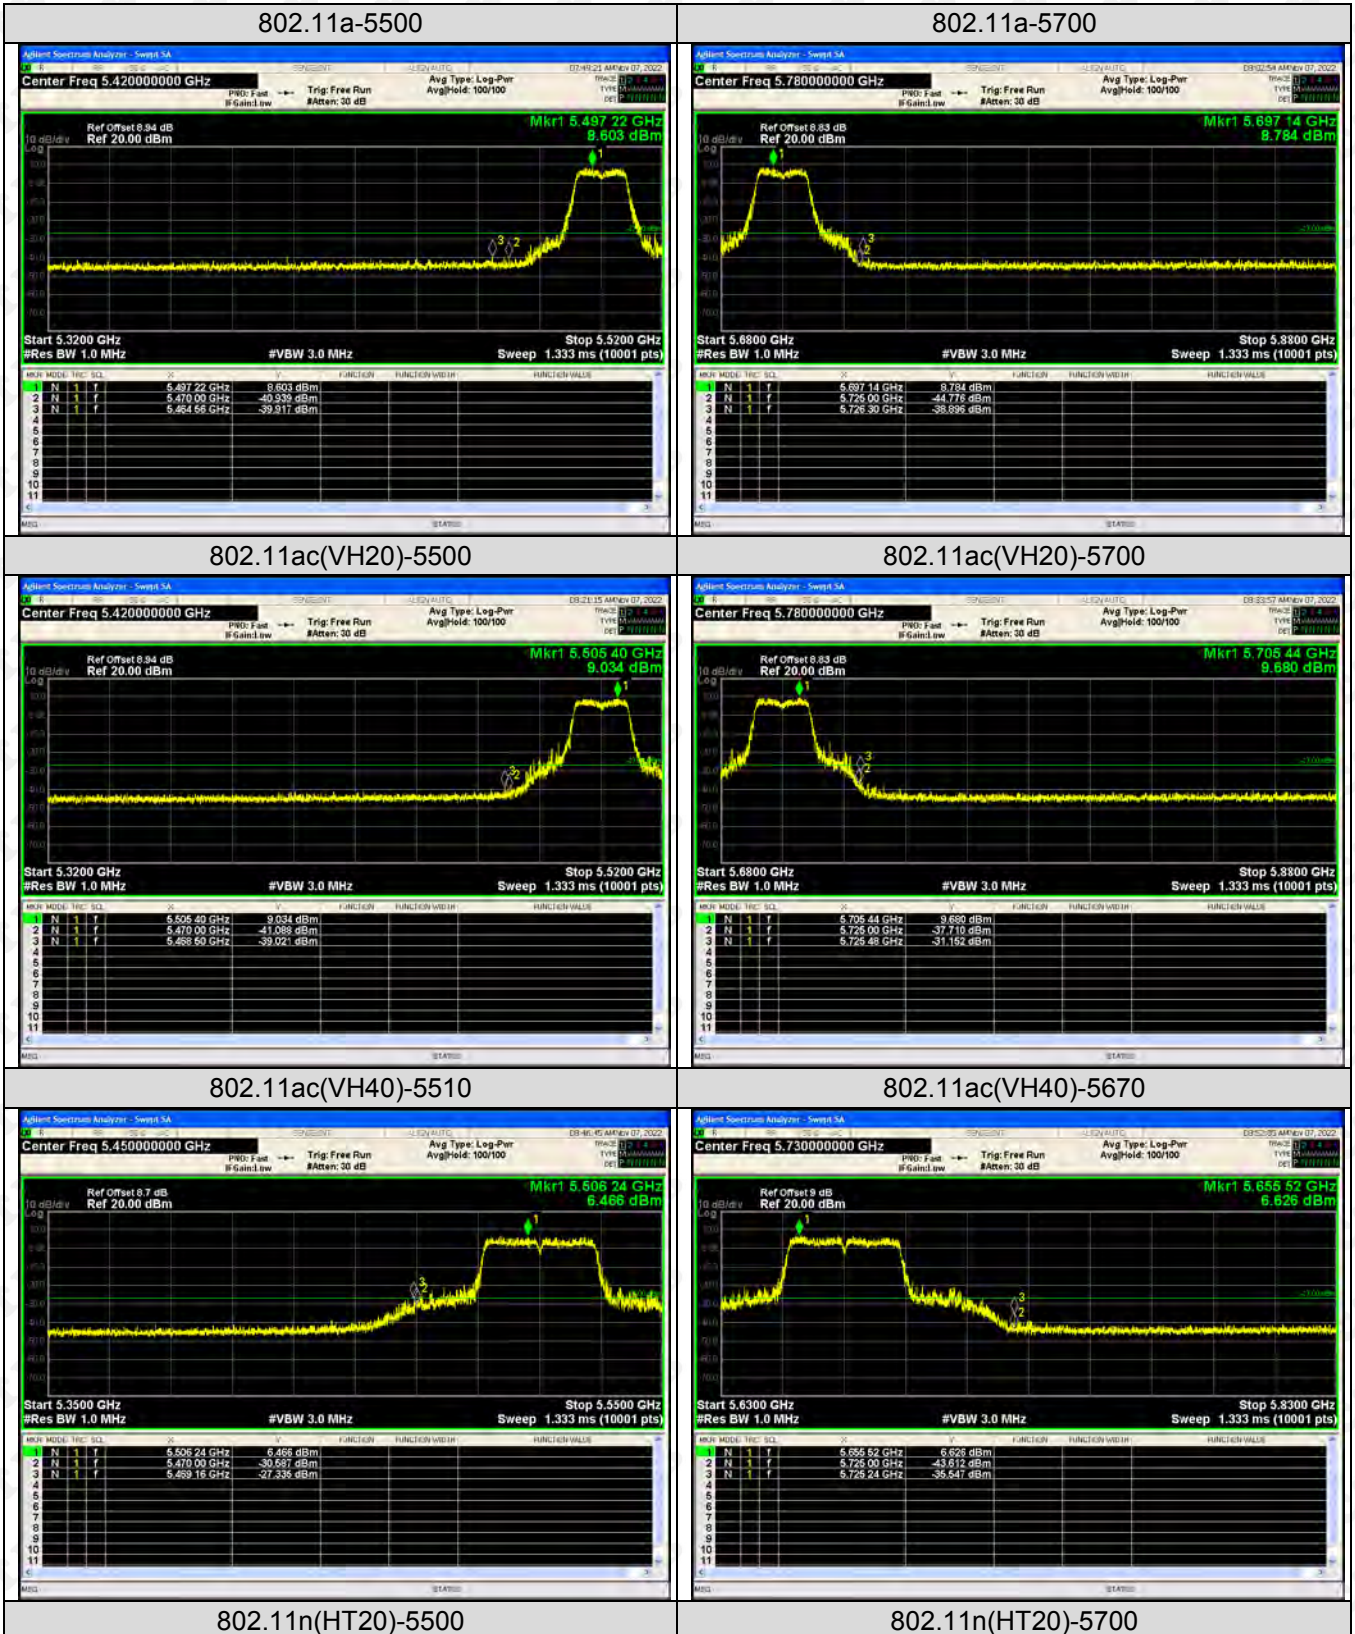


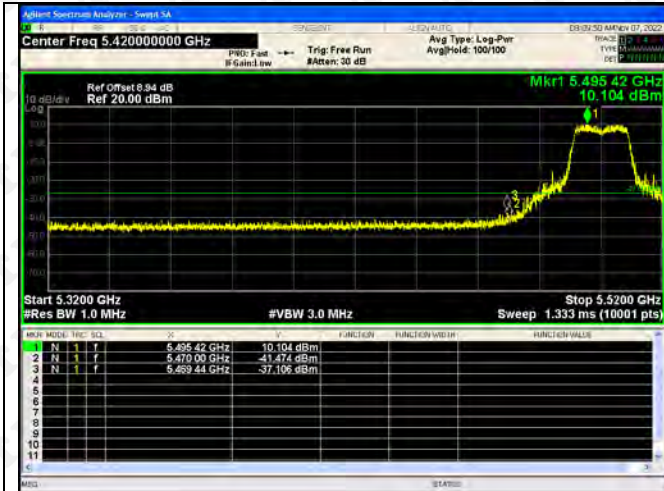

802.11n(HT40)-5510

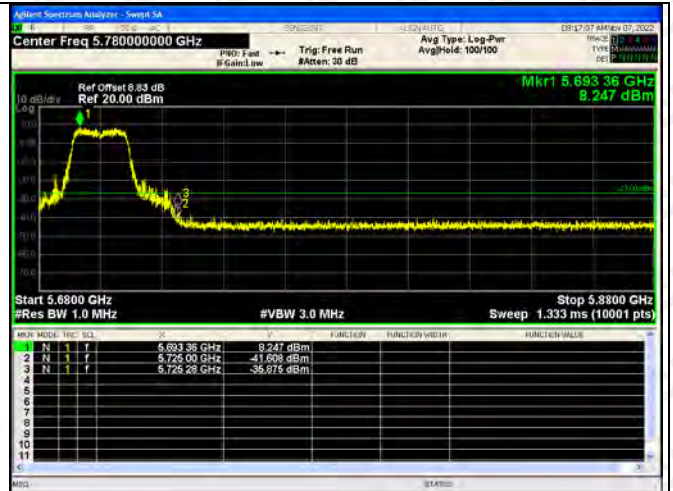


802.11n(HT40)-5670

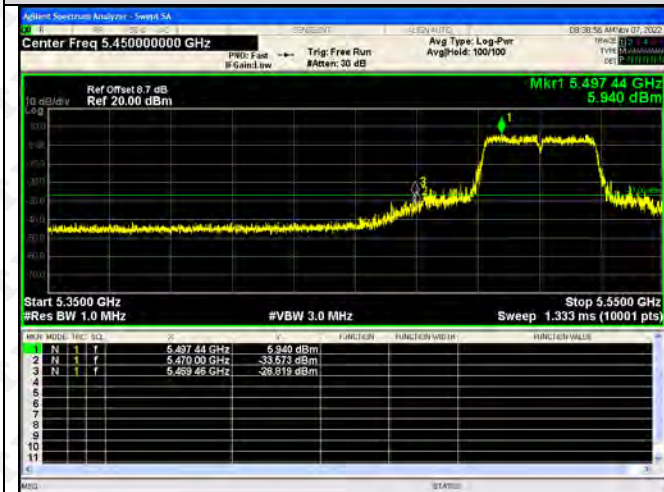


802.11ac(VH80)-5530




ANT2

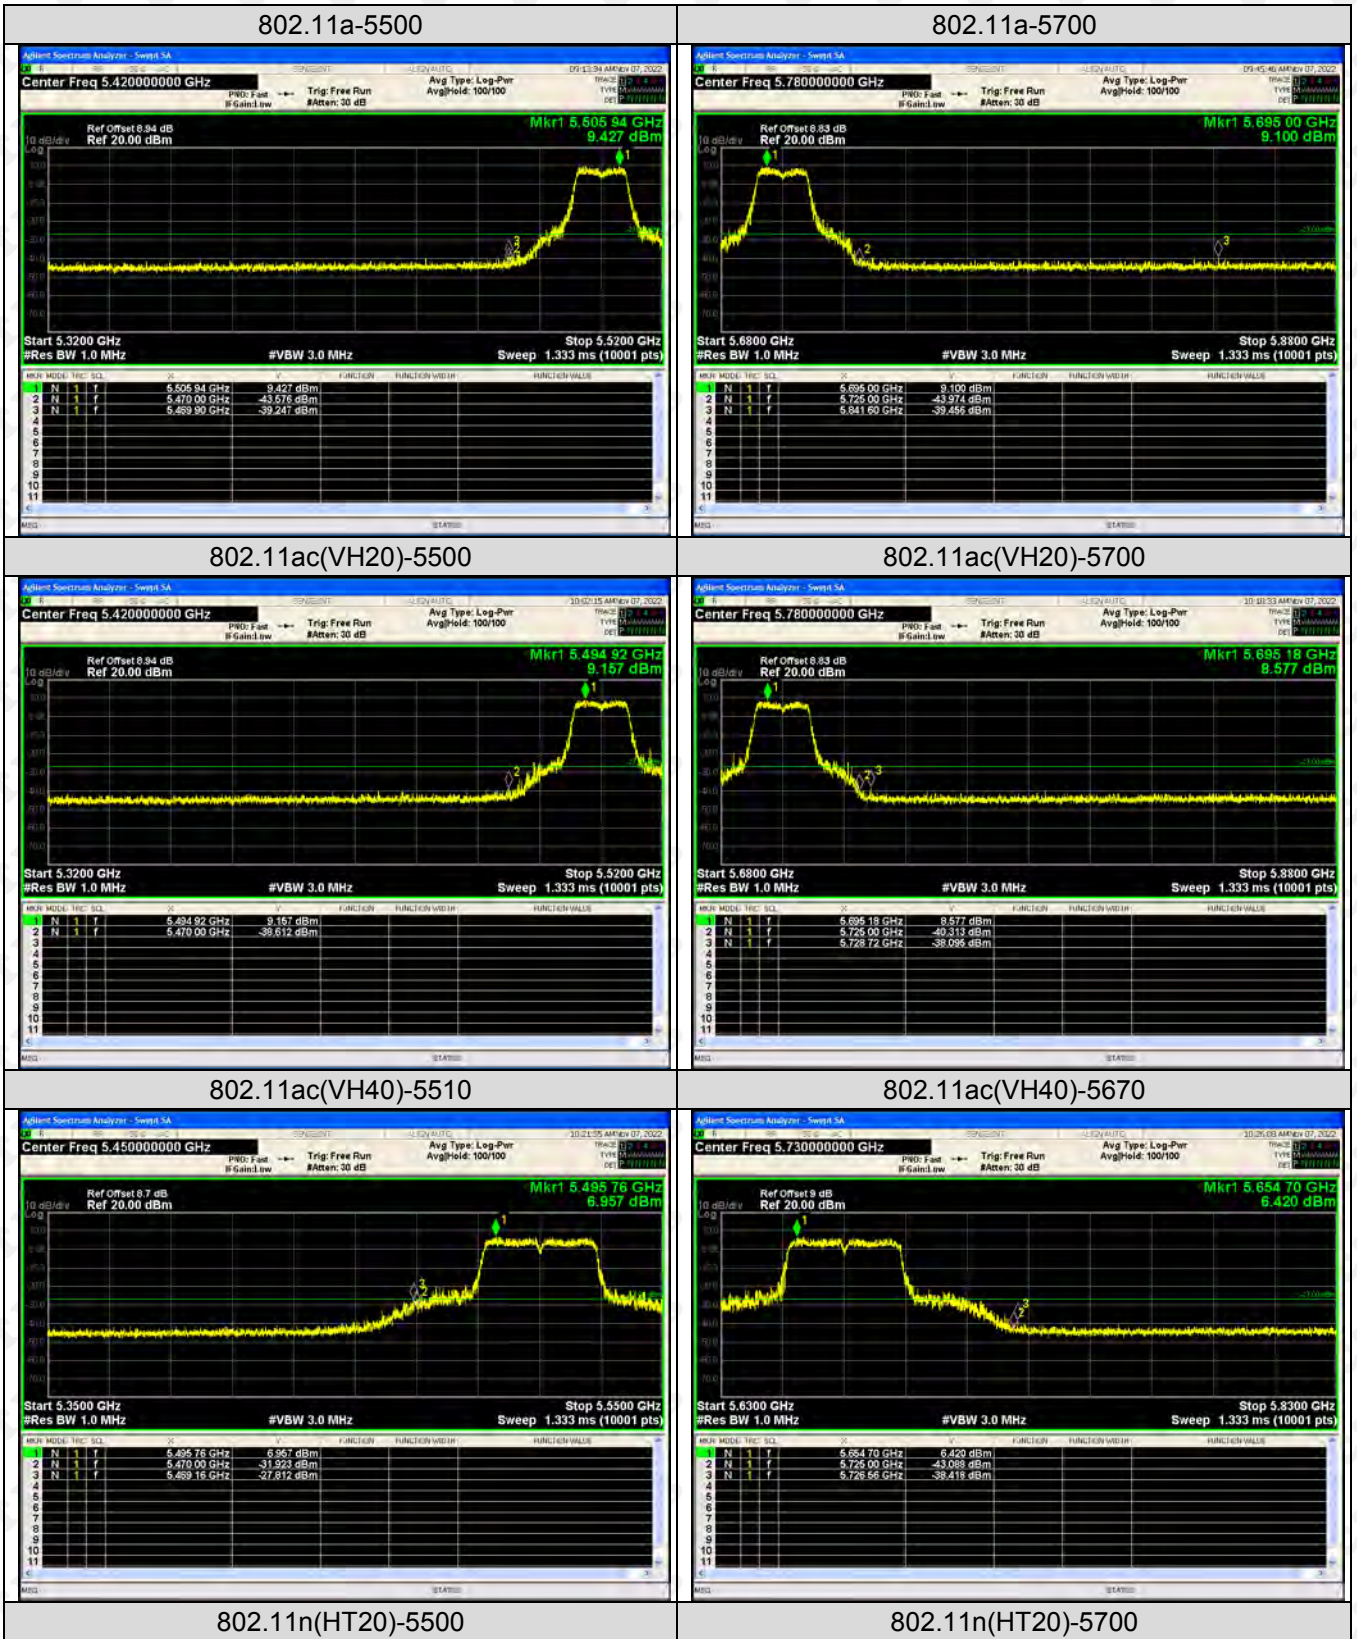


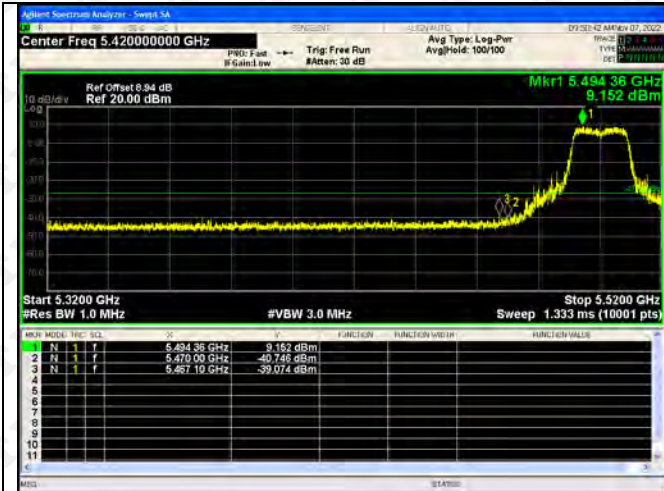


802.11n(HT40)-5510

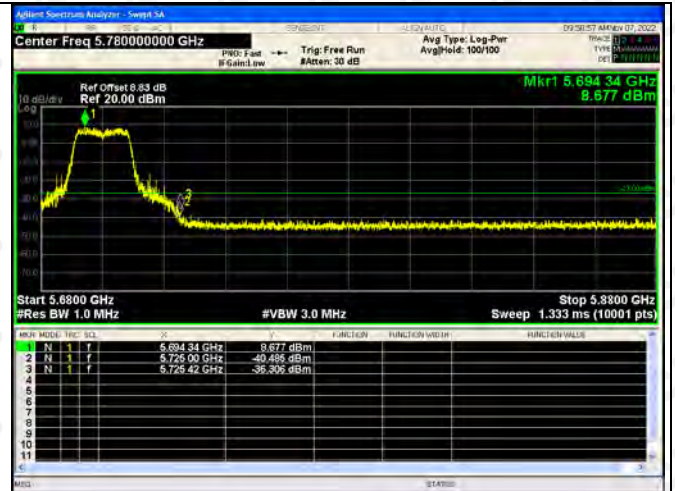

802.11n(HT40)-5670

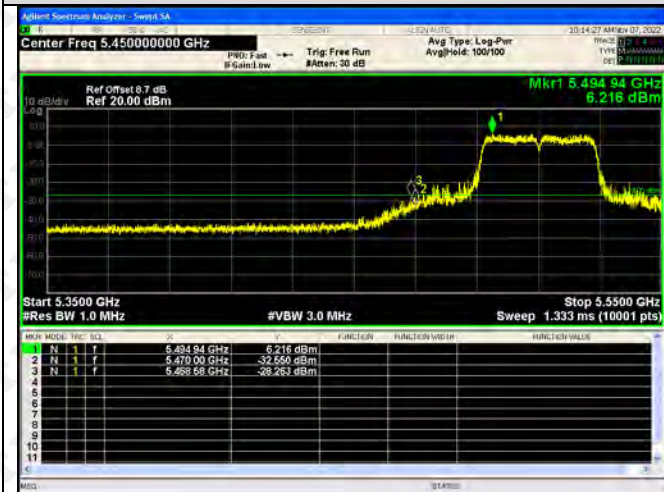

802.11ac(VH80)-5530

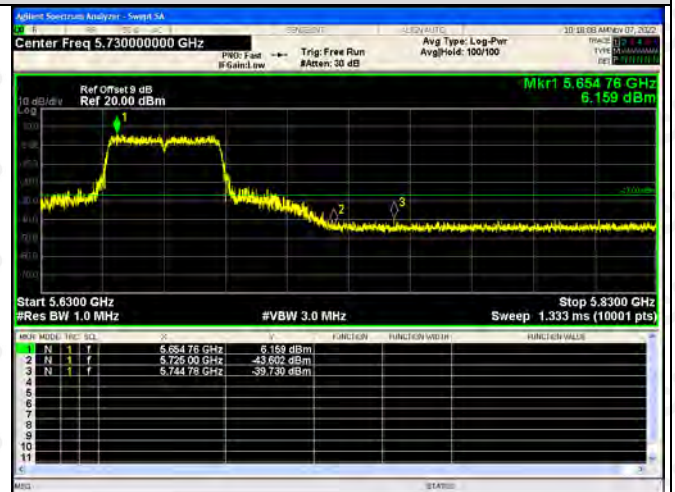

5725-5850MHz
ANT1

