

TEST REPORT

Reference No. : WTD13S0806547E
FCC ID : 2AA3HBT-2638
Applicant : Shenzhen 3nod Digital Technology Co., Ltd.
Address : Building D Park 8# Langhui Road Tangxiayong Village, Industrial Zone
Songgang Town, Baoan District, Shenzhen City, China.
Manufacturer : The same as above
Address : The same as above
Equipment Under Test (EUT) :
Product Name : Wireless Portable Speaker
Model No. : CODEblu 08
Standards : FCC Part15.247:2012
Date of Receipt sample : August 16, 2013
Date of Test : Jan 02 to 07, 2014
Date of Issue : Jan 07, 2014

Test Result : **PASS**

Remark:

* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China



Testing location: The same as above

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:



Maikou Zhang / Project Engineer

Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge Emissions	15.247(d)	PASS
Spurious RF Conducted Emissions from out of band	15.247(d)	PASS
Duty Cycle	15.35	PASS
Conducted Emissions	15.207	PASS
20dB Bandwidth	15.215c 15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.....	5
4.2 DETAILS OF E.U.T.....	5
4.3 CHANNEL LIST.....	5
4.4 DESCRIPTION OF SUPPORT UNITS.....	5
4.5 TEST FACILITY.....	6
4.6 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST.....	7
5.2 MEASUREMENT UNCERTAINTY.....	7
5.3 TEST EQUIPMENT CALIBRATION.....	7
6 CONDUCTED EMISSION	8
6.1 E.U.T. OPERATION.....	8
6.2 EUT SETUP.....	8
6.3 CONDUCTED EMISSION TEST RESULT.....	9
7 SPURIOUS RADIATED EMISSIONS	11
7.1 EUT OPERATION :.....	11
7.2 TEST SETUP.....	12
7.3 SPECTRUM ANALYZER SETUP.....	13
7.4 TEST PROCEDURE.....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
7.6 SUMMARY OF TEST RESULTS.....	15
8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND	23
8.1 TEST PROCEDURE.....	23
8.2 TEST RESULT.....	23
9 DUTY CYCLE	33
9.1 TEST PROCEDURE.....	33
9.2 TEST RESULT.....	33
10 BAND EDGE MEASUREMENT	34
10.1 TEST PROCEDURE.....	34
10.2 TEST RESULT:.....	35
11 20 DB BANDWIDTH MEASUREMENT	39
11.1 TEST PROCEDURE:.....	39
11.2 TEST RESULT:.....	39
12 MAXIMUM PEAK OUTPUT POWER	45
12.1 TEST PROCEDURE:.....	45
12.2 TEST RESULT:.....	45
13 HOPPING CHANNEL SEPARATION	51
13.1 TEST PROCEDURE:.....	51
13.2 TEST RESULT:.....	51

14	NUMBER OF HOPPING FREQUENCY	57
14.1	TEST PROCEDURE:	57
14.2	TEST RESULT:	57
15	DWELL TIME.....	59
15.1	TEST PROCEDURE:	59
15.2	TEST RESULT:	59
16	ANTENNA REQUIREMENT.....	75
17	RF EXPOSURE	76
17.1	REQUIMENTS:	76
17.2	THE PROCEDURES / LIMIT	76
17.3	MPE CALCULATION METHOD.....	77
18	PHOTOGRAPHS – TEST SETUP	78
18.1	CONDUCTED EMISSIONS	78
18.2	RADIATED EMISSIONS.....	78
19	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	80
19.1	EUT – EXTERNAL VIEW	80
19.2	EUT – INTERNAL VIEW.....	82

4 General Information

4.1 General Description of E.U.T.

Product Name	: Wireless Portable Speaker
Model No.	: CODEblu 08
Model Description	: N/A
Operation Frequency	: 2402MHz ~ 2480MHz, 79 channels in total, separated by 1MHz
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Oscillator	: Crystal 26MHz for RF module
Antenna installation	: PCB Printed Antenna
Antenna Gain	: 0 dBi

4.2 Details of E.U.T.

Technical Data	: (1)DC 5V, 1A for USB Charging (2)3.7V, 500mAh lithium battery x 2
-----------------------	--

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

4.4 Description of Support Units

No.	Equipment	Manufacturer	Model No.	Serial No.
1.	Notebook	LENOVO	X201i	75Y4408

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.6 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.21,2013	Sep.20,2014
2.	LISN	R&S	ENV216	101215	Sep.21,2013	Sep.20,2014
3.	Cable	Top	TYPE16(3.5M)	-	Sep.21,2013	Sep.20,2014
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.21,2013	Sep.20,2014
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.21,2013	Sep.20,2014
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Sep.21,2013	Sep.20,2014
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Sep.21,2013	Sep.20,2014
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Sep.21,2013	Sep.20,2014
6.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Sep.21,2013	Sep.20,2014
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Sep.21,2013	Sep.20,2014
8.	Cable	Top	EWO2014-7	-	Sep.21,2013	Sep.20,2014
9.	Cable	Top	TYPE16(13M)	-	Sep.21,2013	Sep.20,2014
10.	DC POWER SUPPLY	LWDQGS	PS-303D		Sep.21,2013	Sep.20,2014
11.	Humidity Chamber	GTH-225-40-1P	IAA061213		Sep.21,2013	Sep.20,2014
12	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.21,2013	Sep.20,2014

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Temperature	± 1 °C
DC Source	$\pm 0.05\%$
Radiated Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (150kHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1011 mbar

EUT Operation:


The test was performed in bluetooth linking+USB charging mode, and the data is not show in the report.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup


The EUT was placed on the test table in shielding room.

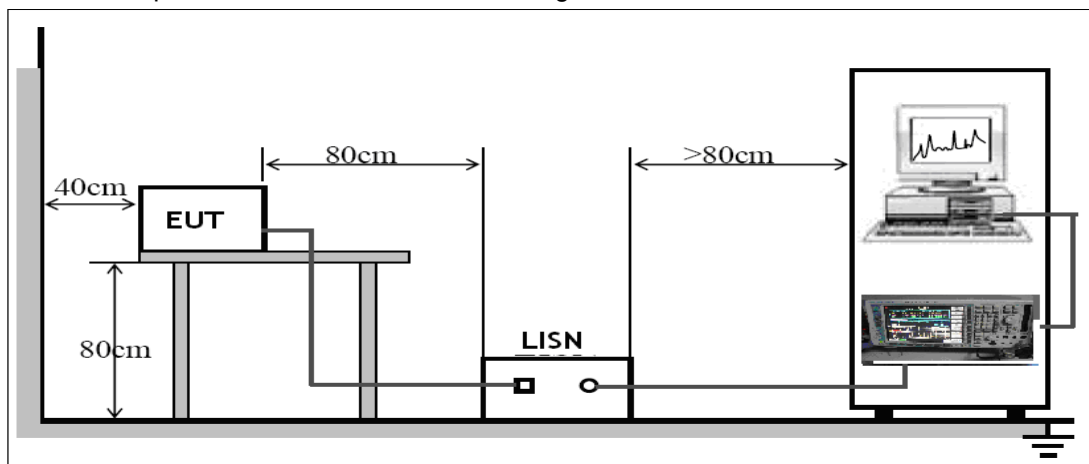

6.3 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

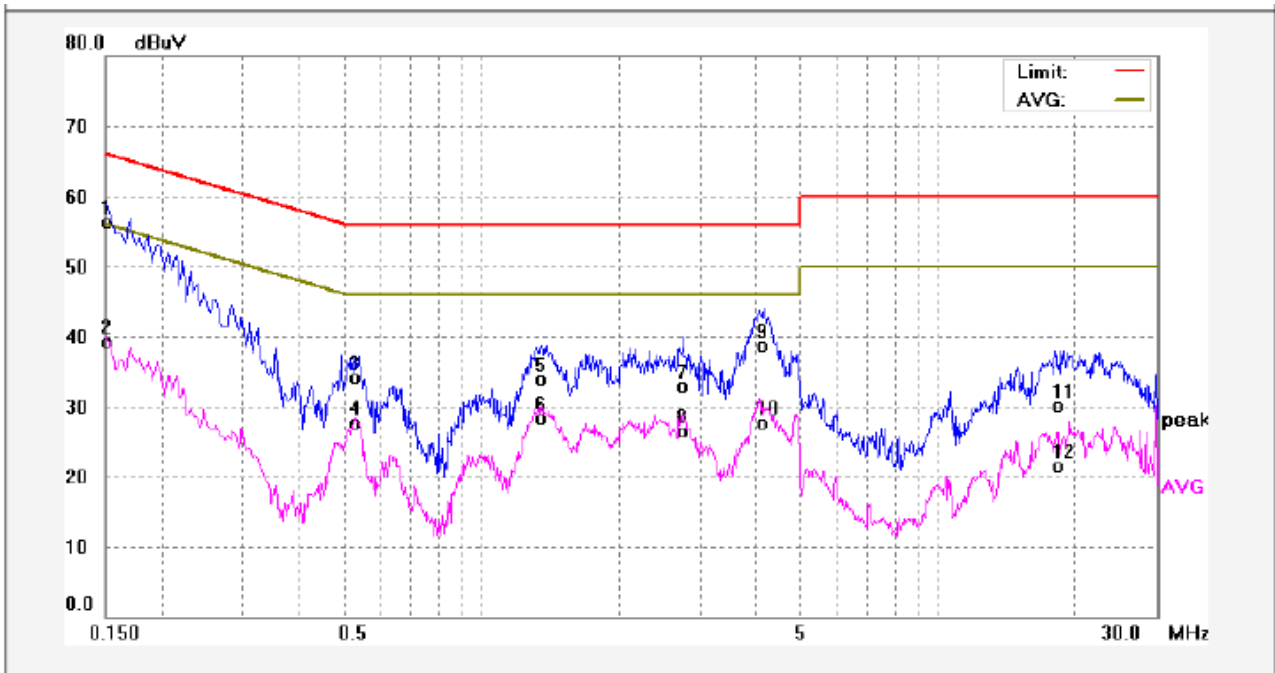

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	46.55	9.80	56.35	65.99	-9.64	QP	
2	0.1500	29.41	9.80	39.21	55.99	-16.78	AVG	
3	0.5260	24.14	9.93	34.07	56.00	-21.93	QP	
4	0.5260	17.69	9.93	27.62	46.00	-18.38	AVG	
5	1.3500	23.90	10.00	33.90	56.00	-22.10	QP	
6	1.3500	18.22	10.00	28.22	46.00	-17.78	AVG	
7	2.7540	22.91	10.03	32.94	56.00	-23.06	QP	
8	2.7540	16.45	10.03	26.48	46.00	-19.52	AVG	
9	4.1500	28.65	10.07	38.72	56.00	-17.28	QP	
10	4.1500	17.59	10.07	27.66	46.00	-18.34	AVG	
11	18.4500	19.05	11.11	30.16	60.00	-29.84	QP	
12	18.4500	10.46	11.11	21.57	50.00	-28.43	AVG	

Neutral line:

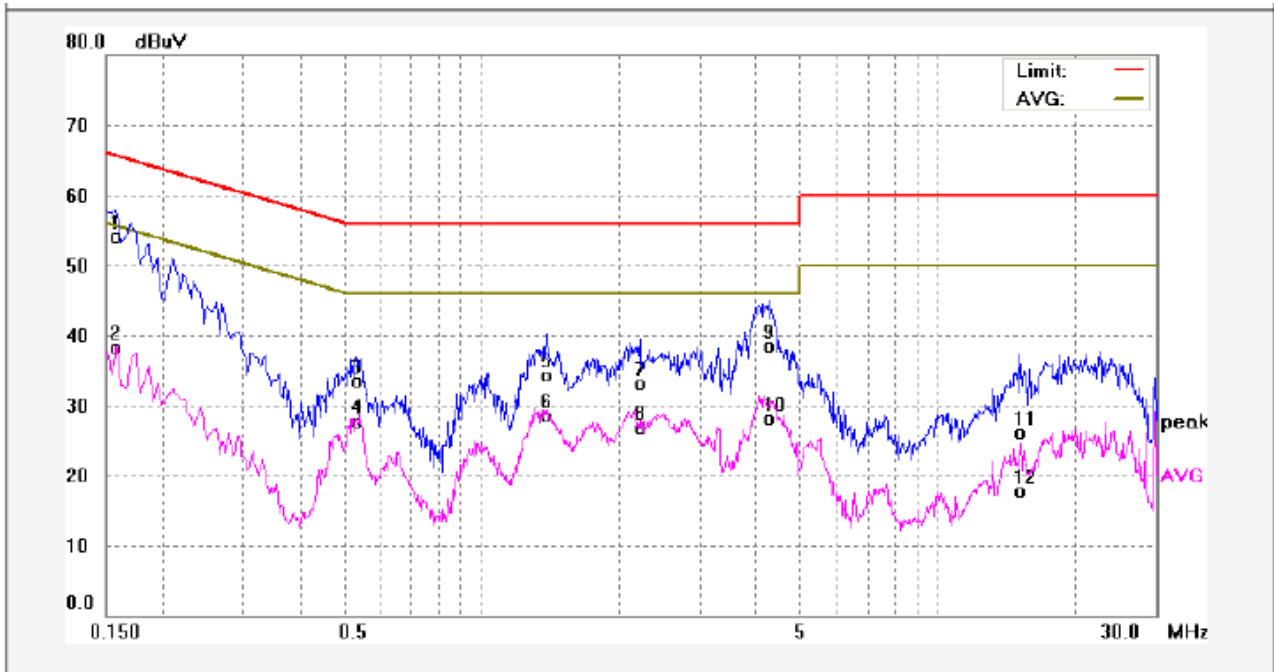

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	44.33	9.81	54.14	65.56	-11.42	QP	
2	0.1580	28.42	9.81	38.23	55.56	-17.33	AVG	
3	0.5299	23.53	9.93	33.46	56.00	-22.54	QP	
4	0.5299	17.83	9.93	27.76	46.00	-18.24	AVG	
5	1.3820	24.25	10.00	34.25	56.00	-21.75	QP	
6	1.3820	18.43	10.00	28.43	46.00	-17.57	AVG	
7	2.2139	23.17	10.01	33.18	56.00	-22.82	QP	
8	2.2139	16.90	10.01	26.91	46.00	-19.09	AVG	
9	4.2540	28.35	10.07	38.42	56.00	-17.58	QP	
10	4.2540	18.09	10.07	28.16	46.00	-17.84	AVG	
11	15.0820	15.18	10.90	26.08	60.00	-33.92	QP	
12	15.0820	6.74	10.90	17.64	50.00	-32.36	AVG	

7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH


Atmospheric Pressure: 1008 mbar

EUT Operation:


The pre-test was performed in Bluetooth transmission mode+USB Charging mode, and the data is show in the report.

7.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.
 The test setup for emission measurement below 30MHz.

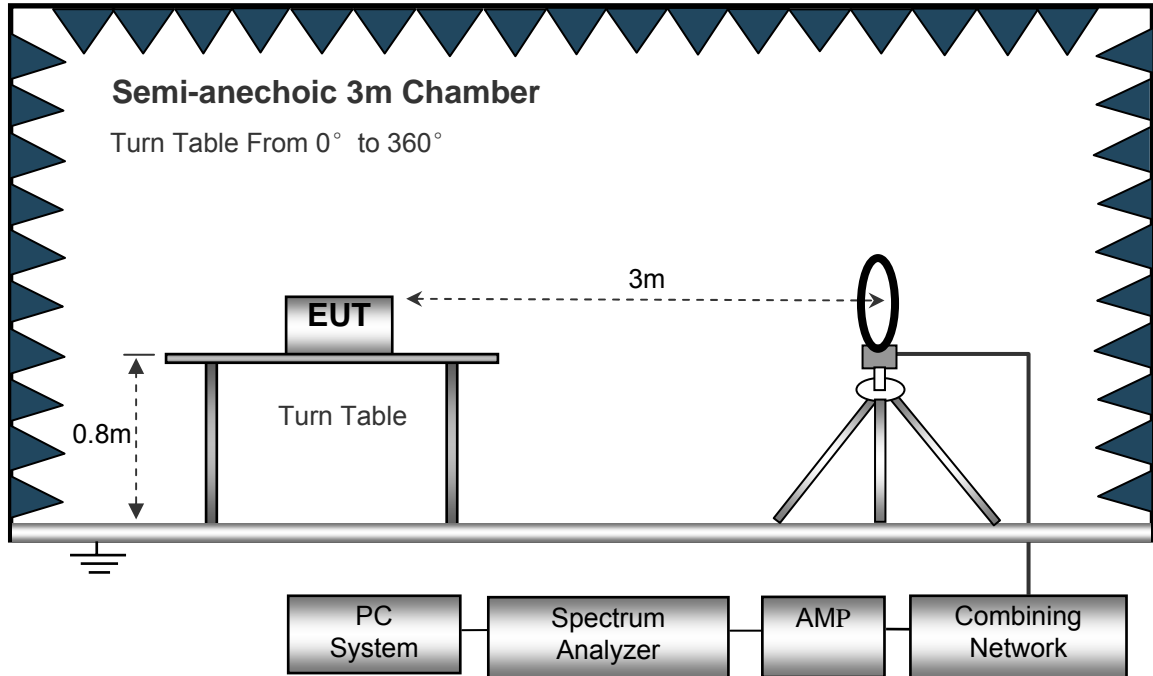

The test setup for emission measurement from 30 MHz to 1 GHz.

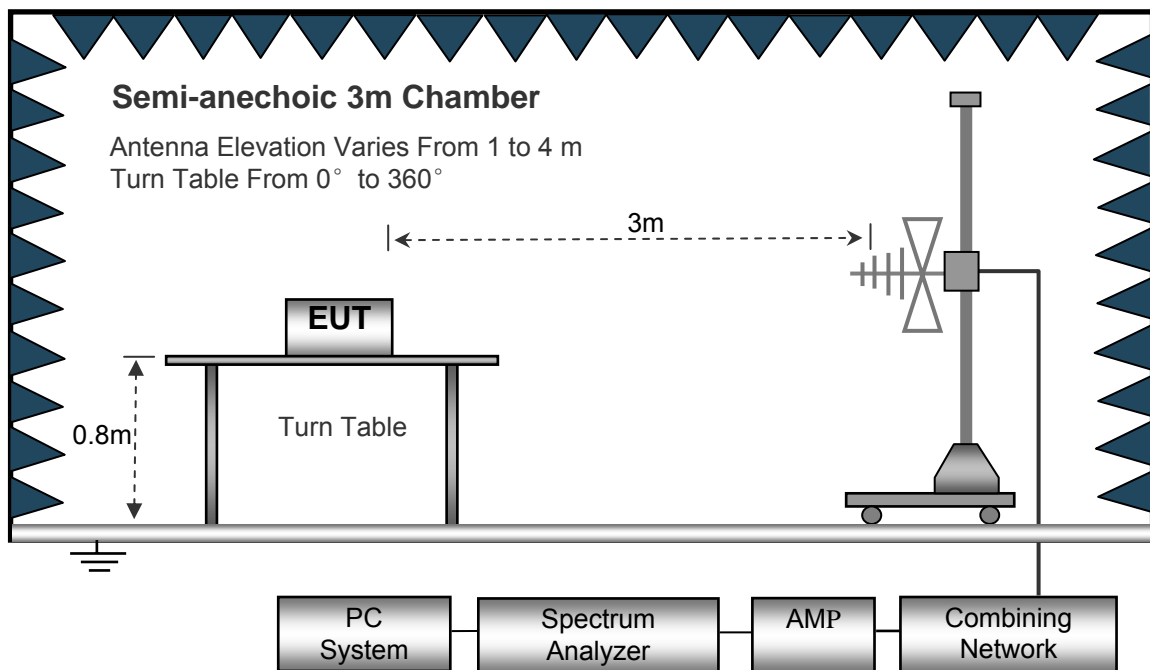

The test setup for emission measurement above 1 GHz.

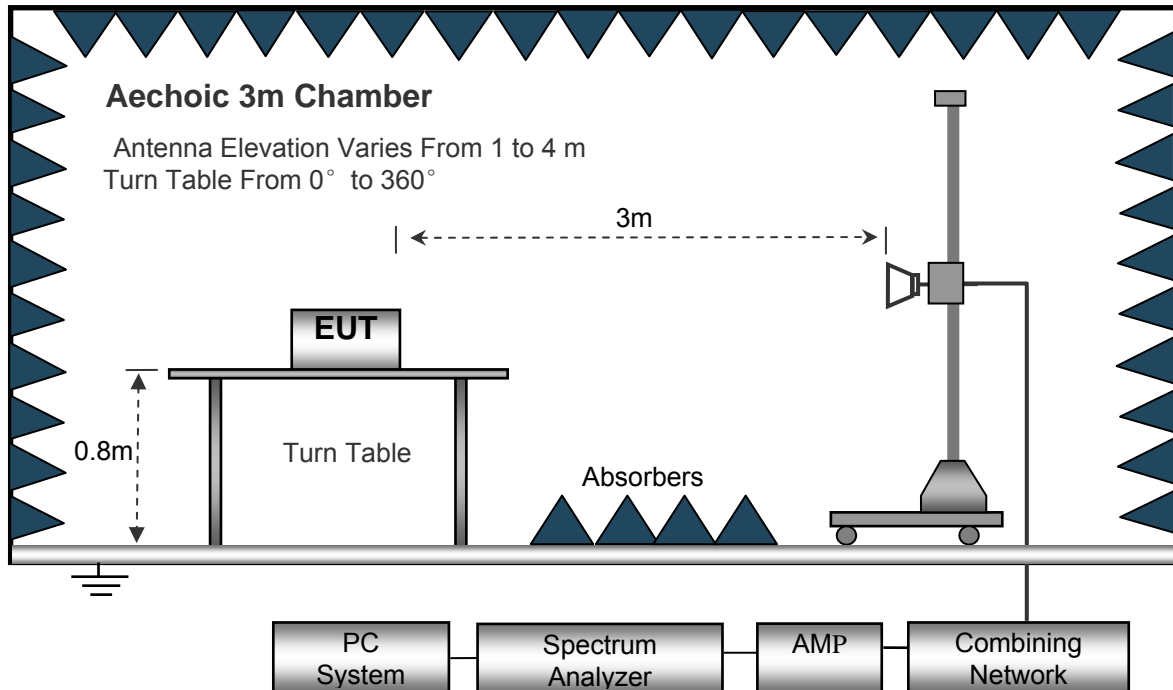

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 26MHz to 25000MHz.

Below 30MHz

Sweep SpeedAuto
 IF Bandwidth10KHz
 Video Bandwidth10KHz
 Resolution Bandwidth10KHz

30MHz ~ 1GHz

Sweep SpeedAuto
 IF Bandwidth120 KHz
 Video Bandwidth100KHz
 Quasi-Peak Adapter Bandwidth120 KHz
 Quasi-Peak Adapter ModeNormal
 Resolution Bandwidth100KHz

Above 1GHz

Sweep SpeedAuto
 IF Bandwidth120 KHz
 Video Bandwidth3MHz
 Quasi-Peak Adapter Bandwidth120 KHz
 Quasi-Peak Adapter ModeNormal
 Resolution Bandwidth1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency :Below 30MHz


The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1000MHz

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the middle Channel, so the data show was the middle channel only.


Test worst Mode: bluetooth transmission+ USB Charging

Antenna polarization: Vertical

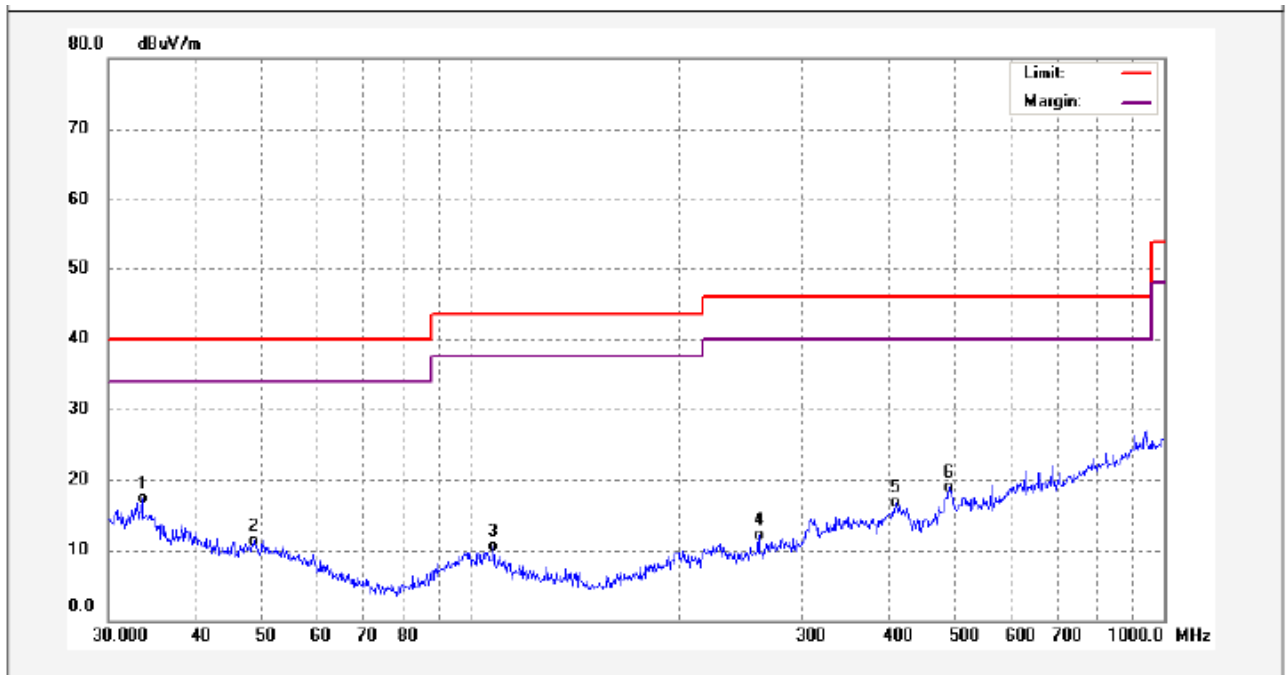

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	33.5624	36.15	-18.86	17.29	40.00	-22.71	QP	
2	48.6719	32.25	-20.88	11.37	40.00	-28.63	QP	
3	107.8877	32.54	-22.11	10.43	43.50	-33.07	QP	
4	260.1444	33.08	-21.00	12.08	46.00	-33.92	QP	
5	410.3825	32.88	-16.22	16.66	46.00	-29.34	QP	
6	490.7447	31.04	-12.11	18.93	46.00	-27.07	QP	

Antenna polarization: Horizontal

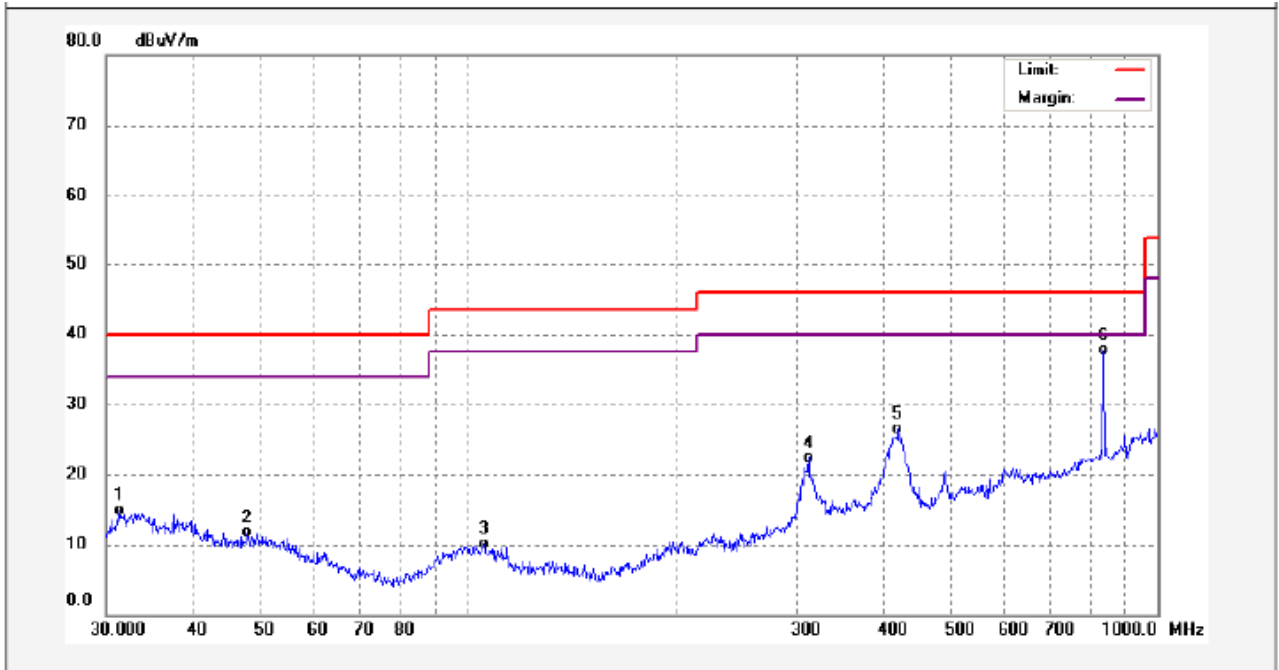

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.2893	33.86	-18.94	14.92	40.00	-25.08	QP	
2	47.9940	32.48	-20.85	11.63	40.00	-28.37	QP	
3	105.6415	31.91	-21.85	10.06	43.50	-33.44	QP	
4	312.1794	41.62	-19.22	22.40	46.00	-23.60	QP	
5	420.5803	43.22	-16.78	26.44	46.00	-19.56	QP	
6	833.3171	45.42	-7.78	37.64	46.00	-8.36	QP	


Test Frequency: 1GHz ~ 18GHz

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

AV = Peak +20Log₁₀(duty cycle) =PK+(-9.5)=PK-9.5 [refer to section 9 for more detail]

Test mode: transmitting at lower channel+USB Charging

Antenna polarization: Vertical

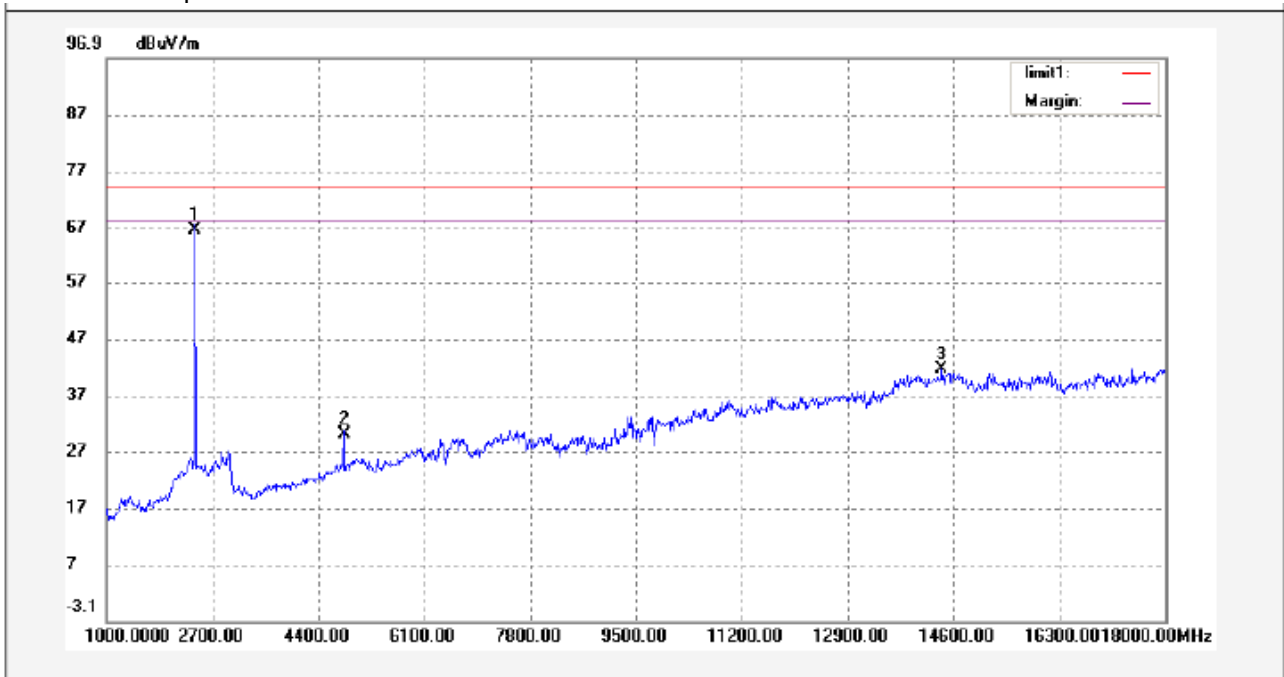


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	82.11	-15.58	66.53	74.00	-7.47	peak	
2	4804.000	42.05	-11.97	30.08	74.00	-43.92	peak	
3	14413.000	41.10	0.41	41.51	74.00	-32.49	peak	

Remark: The marker 1 is the fundamental

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
2	4804.000	-9.5	20.58	54.00	-33.42	AV	
3	14413.000	-9.5	32.01	54.00	-21.99	AV	

Antenna polarization: Horizontal

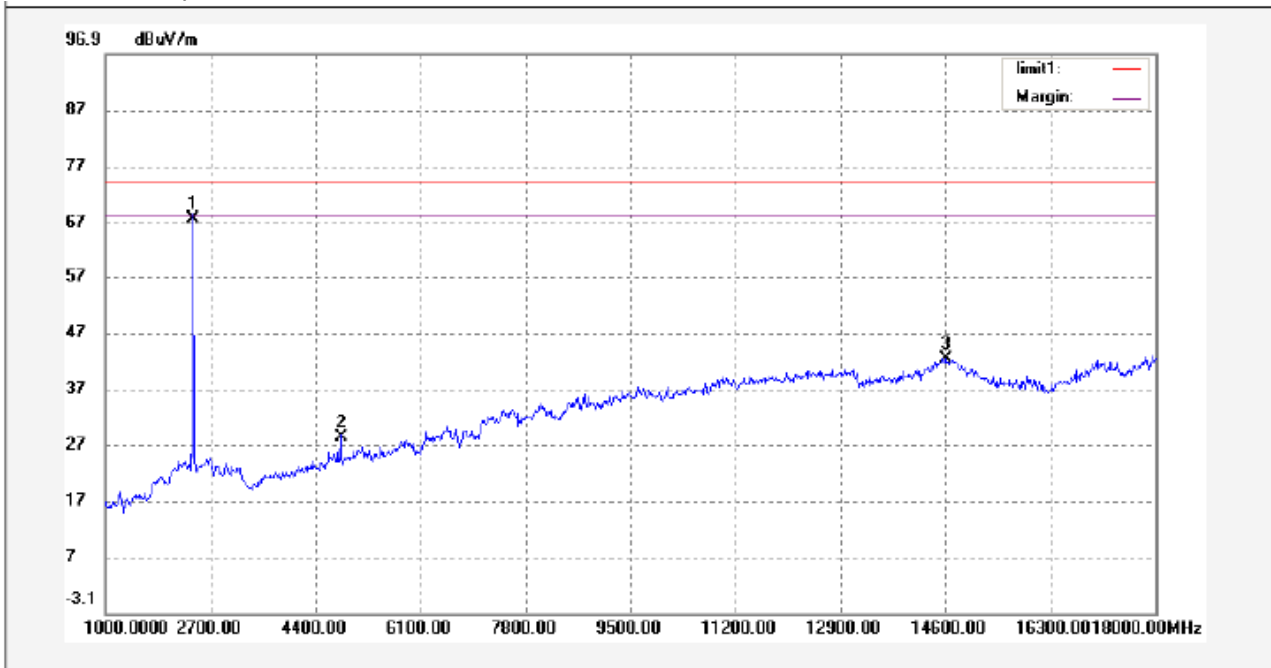


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	83.22	-15.58	67.64	74.00	-6.36	peak	
2	4804.000	40.22	-11.97	28.25	74.00	-45.75	peak	
3	14600.000	41.77	0.43	42.20	74.00	-31.80	peak	

Remark: The marker 1 is the fundamental

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
2	4804.000	-9.5	18.75	54.00	-35.25	AV	
3	14600.000	-9.5	32.70	54.00	-21.30	AV	

Test mode: transmitting at middle channel

Antenna polarization: Vertical

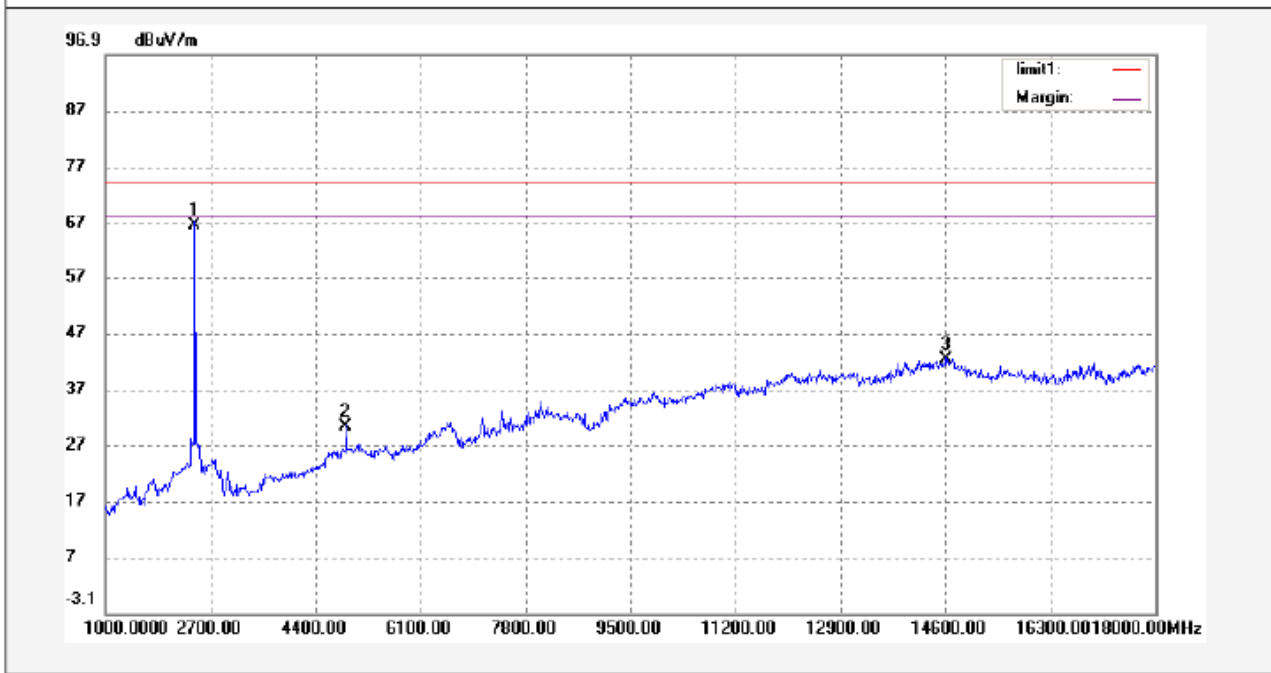


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2441.000	82.32	-15.70	66.62	74.00	-7.38	peak	
2	4882.000	42.13	-11.92	30.21	74.00	-43.79	peak	
3	14617.000	41.99	0.41	42.40	74.00	-31.60	peak	

Remark: The marker 1 is the fundamental

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
2	4882.000	-9.5	20.71	54.00	-33.29	AV	
3	14617.000	-9.5	32.9	54.00	-21.1	AV	

Antenna polarization: Horizontal

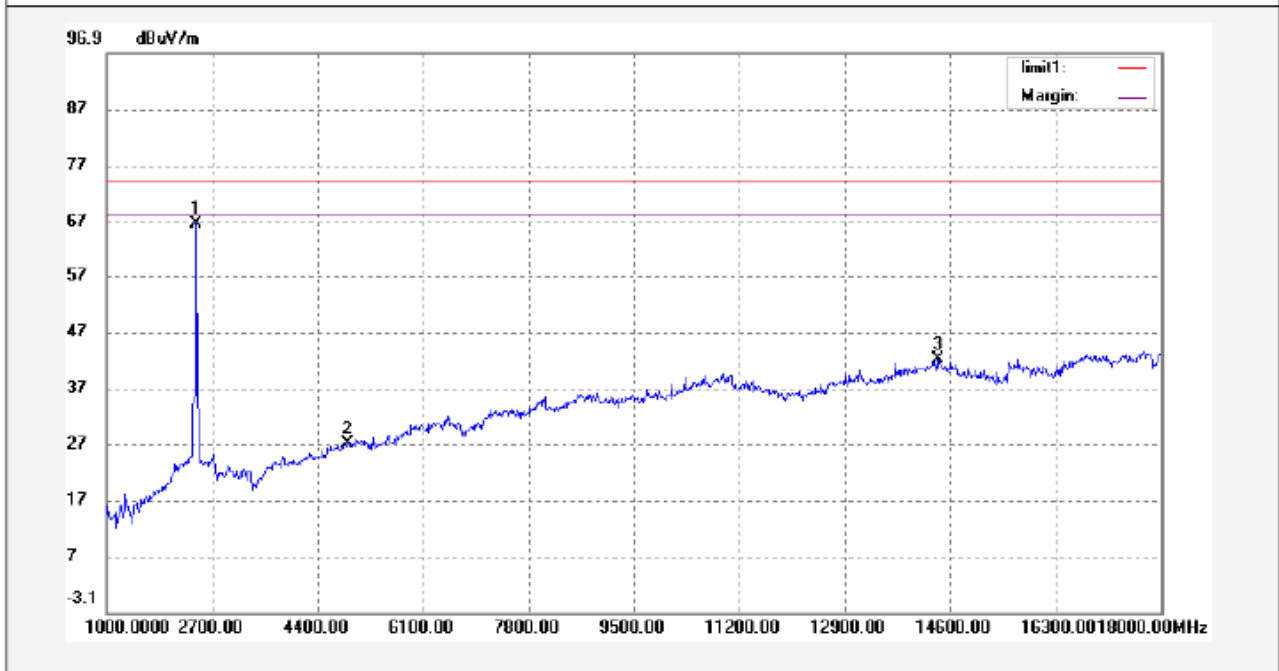


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2445.000	82.36	-15.71	66.65	74.00	-7.35	peak	
2	4882.000	39.04	-11.92	27.12	74.00	-46.88	peak	
3	14396.000	41.54	0.38	41.92	74.00	-32.08	peak	

Remark: The marker 1 is the fundamental

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
2	4882.000	-9.5	17.62	54.00	-36.38	AV	
3	14396.000	-9.5	32.42	54.00	-21.58	AV	

Test mode: transmitting at upper channel

Antenna polarization: Vertical

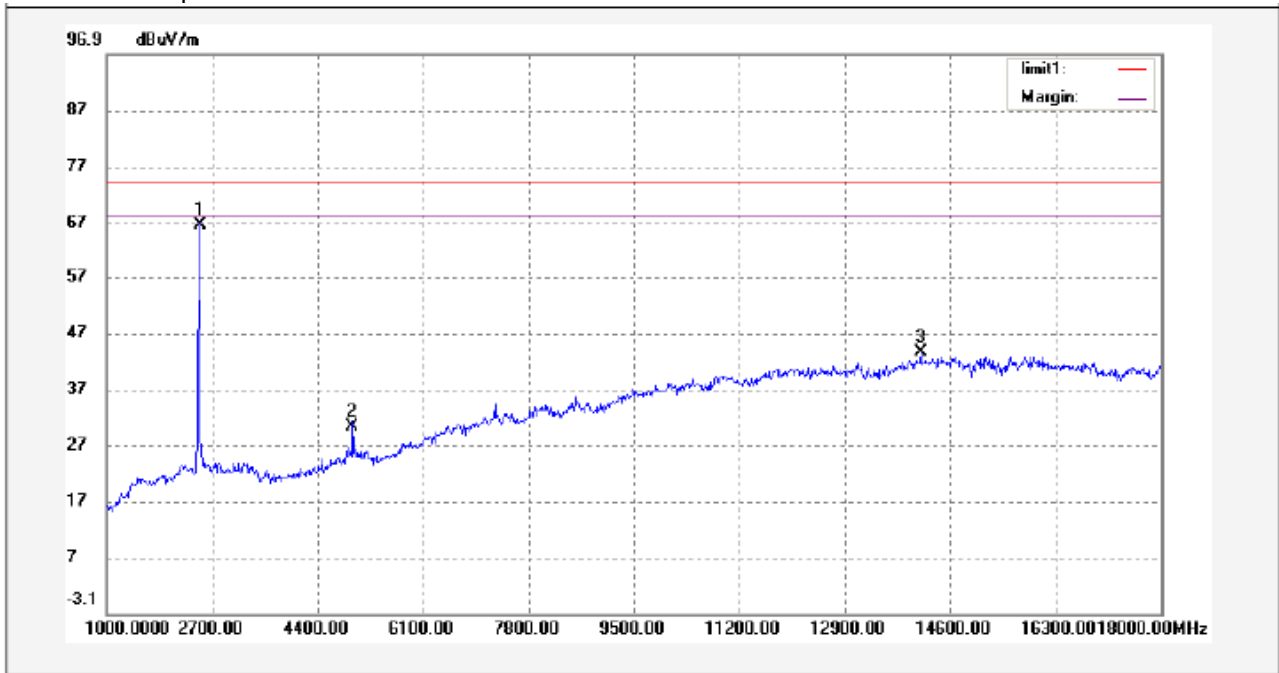


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	82.10	-15.68	66.42	74.00	-7.58	peak	
2	4960.000	42.11	-11.77	30.34	74.00	-43.66	peak	
3	14124.000	43.90	-0.28	43.62	74.00	-30.38	peak	

Remark: The marker 1 is the fundamental

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
2	4960.000	-9.5	20.84	54.00	-33.16	AV	
3	14124.000	-9.5	34.12	54.00	-19.88	AV	

Antenna polarization: Horizontal

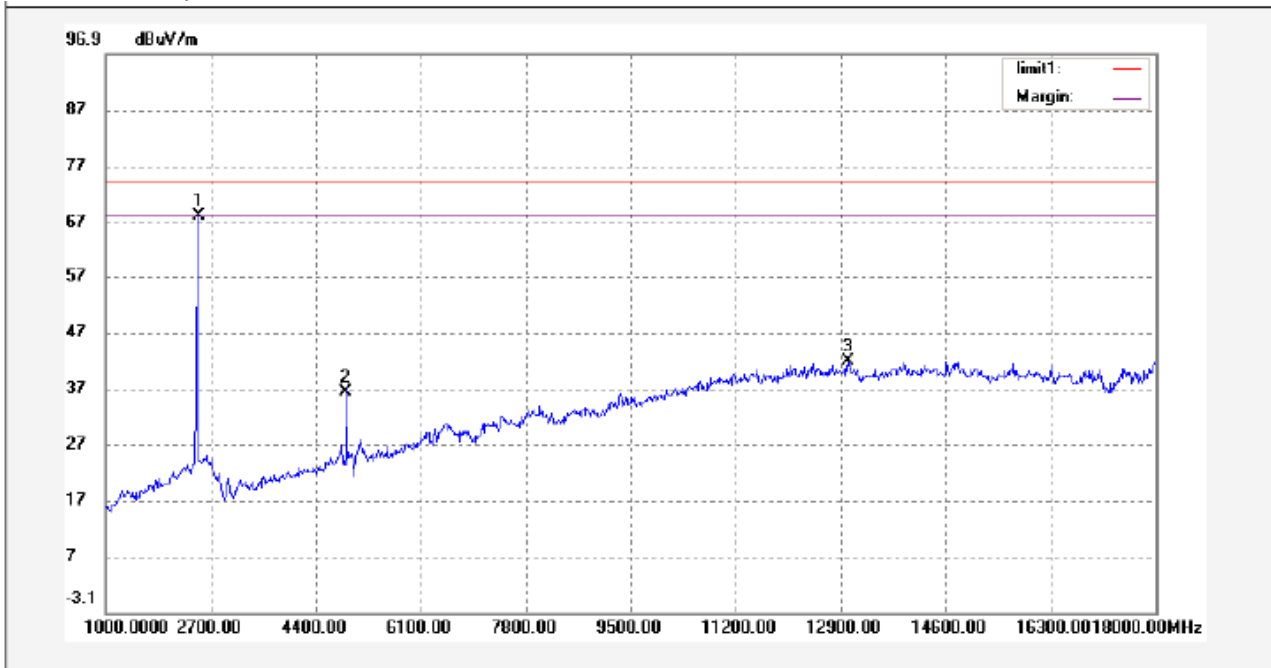

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	83.60	-15.68	67.92	74.00	-6.08	peak	
2	4860.000	48.22	-11.93	36.29	74.00	-37.71	peak	
3	13019.000	45.70	-3.83	41.87	74.00	-32.13	peak	

Remark: The marker 1 is the fundamental

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
2	4960.000	-9.5	26.79	54.00	-27.21	AV	
3	13019.000	-9.5	32.37	54.00	-21.63	AV	

Test Frequency :Above 18GHz

The measurements were more than 20 dB below the limit and not reported.

8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz.Sweep =auto.
4. mark the worst point and record.

8.2 Test Result

Test Frequency: Below 30MHz



Remark: For emissions below 30MHz,no emission higher than background level, so the data does not show in the report.

Test Frequency: 30MHz ~ 25GHz



Test result plots shown as follows:

Modulation:GFSK



Lower Channel

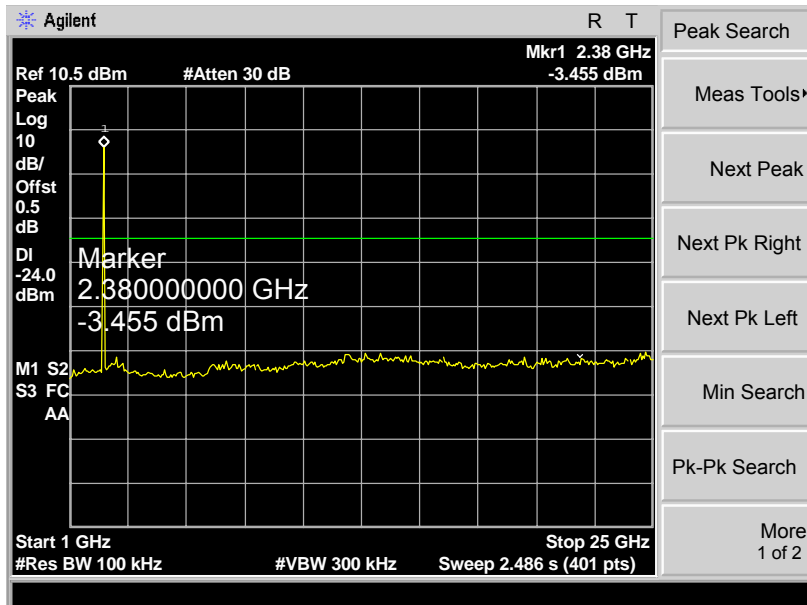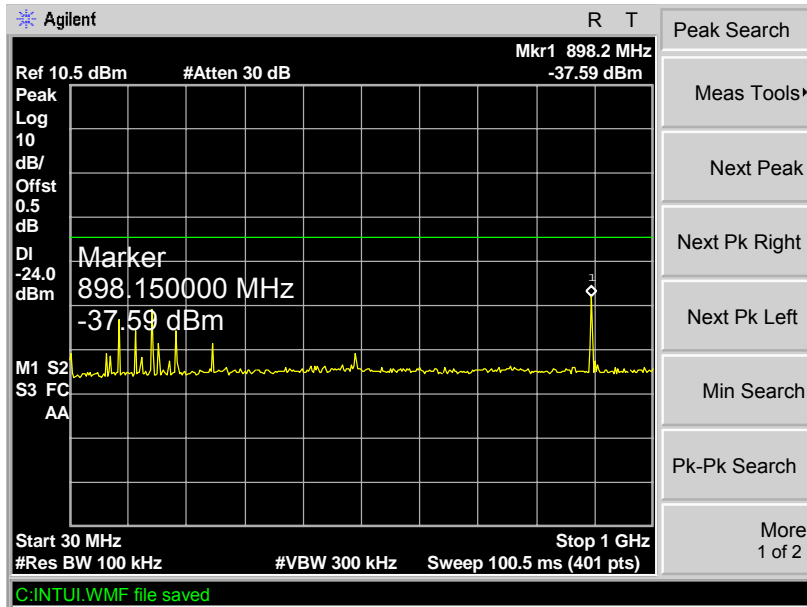

Middle Channel

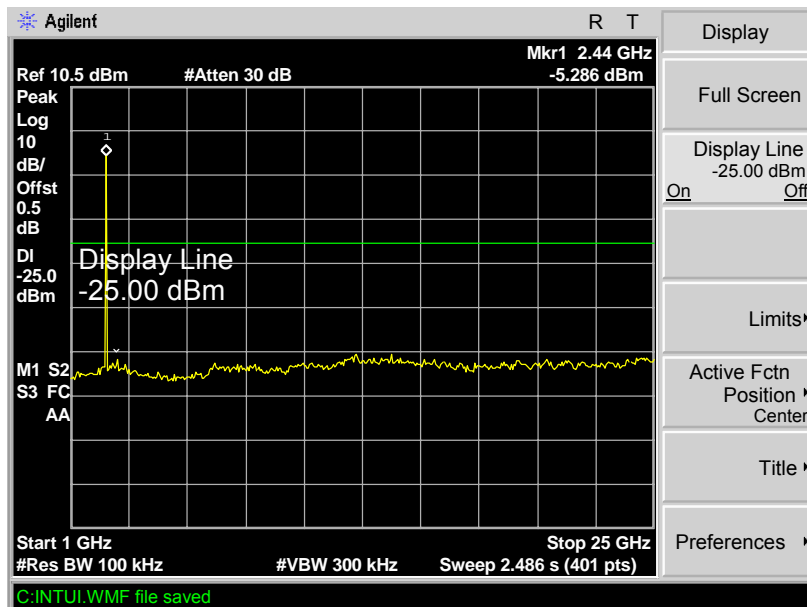
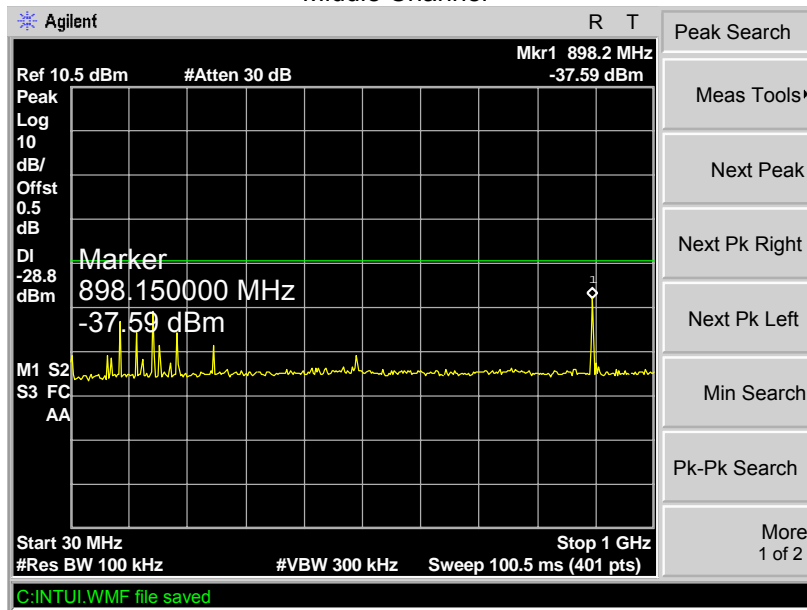


Upper Channel

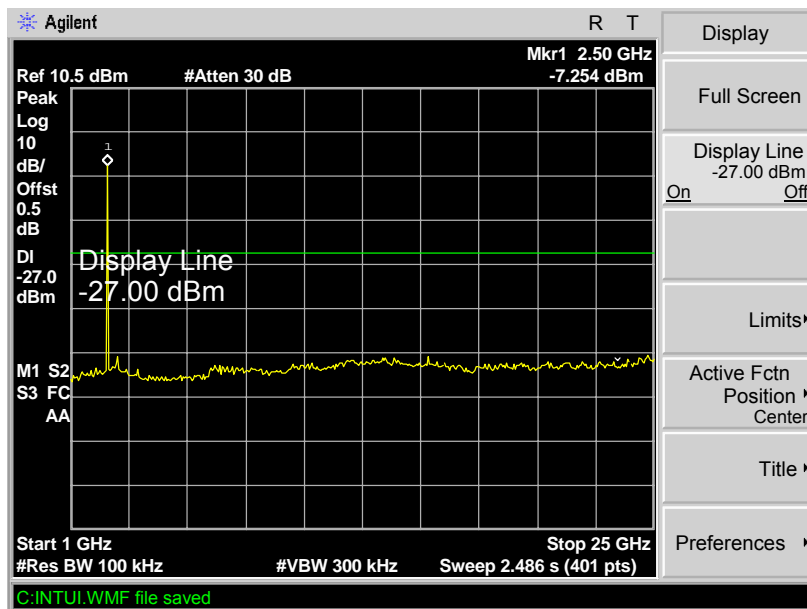
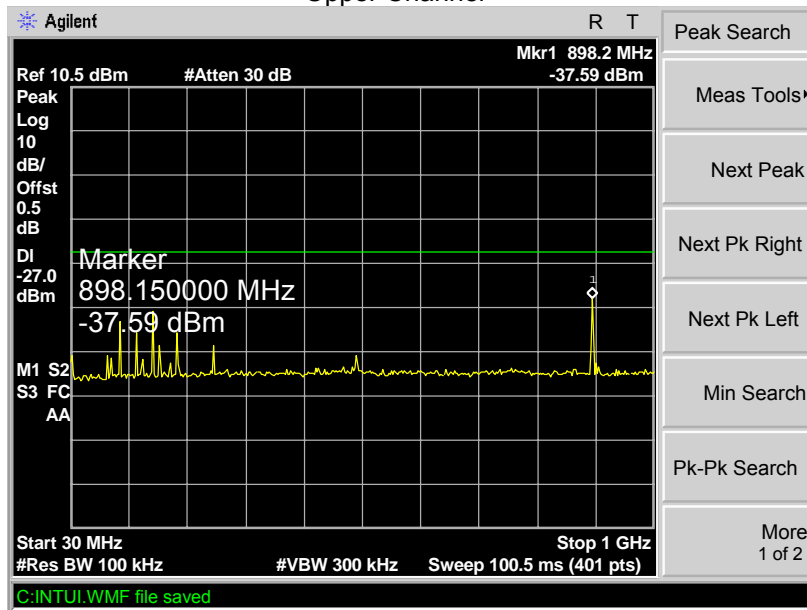


Modulation: Pi/4DQPSK



Lower Channel

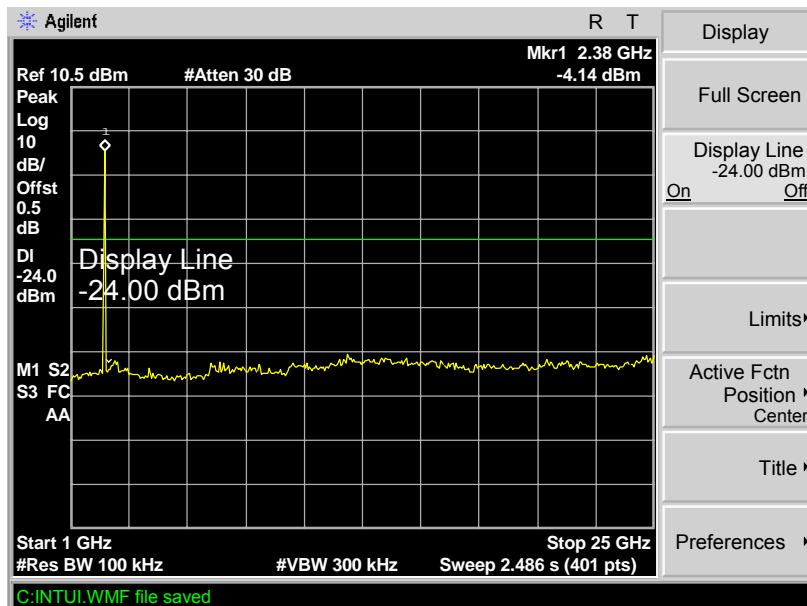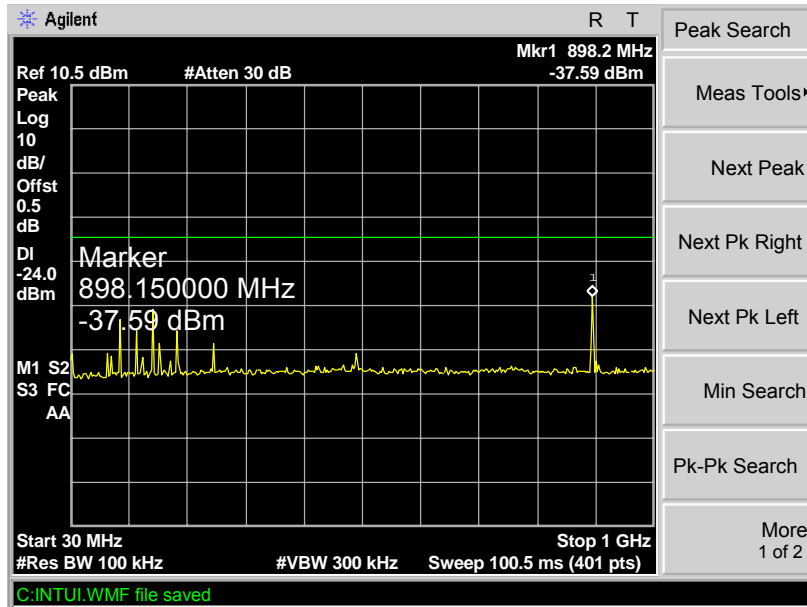

Middle Channel

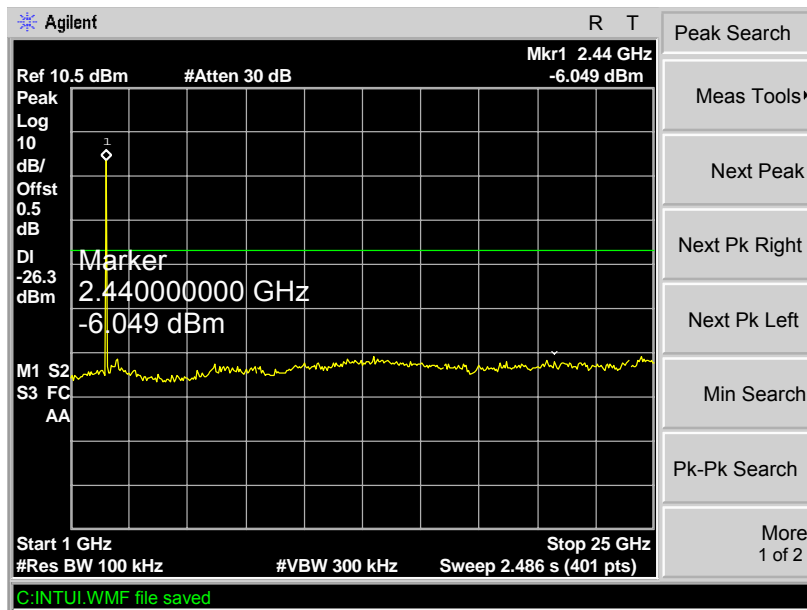
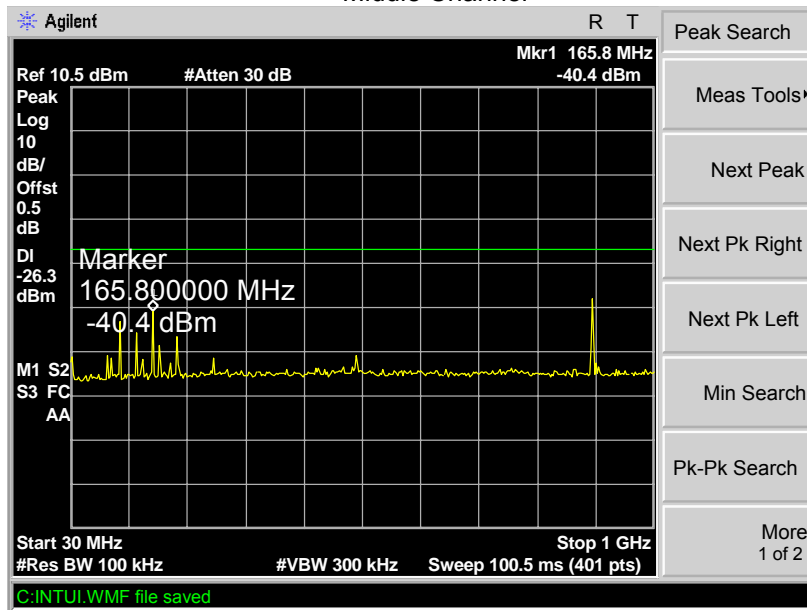


Upper Channel

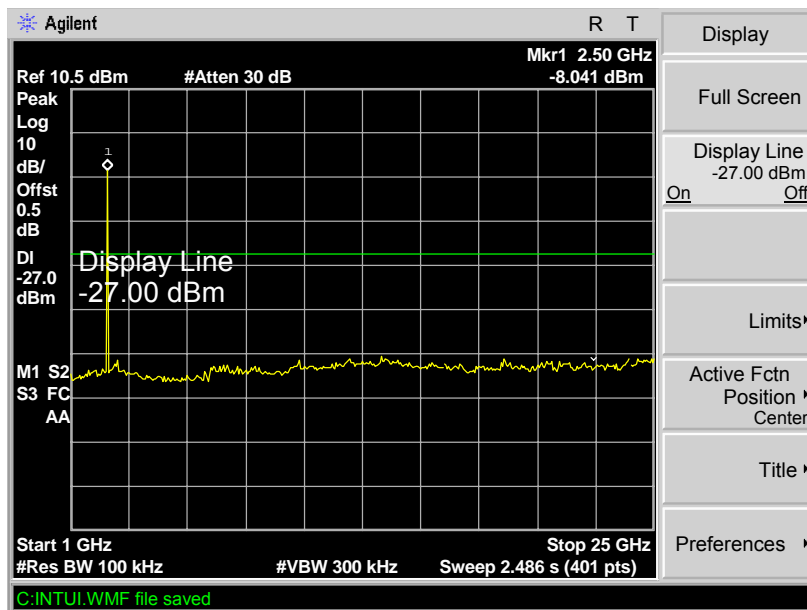
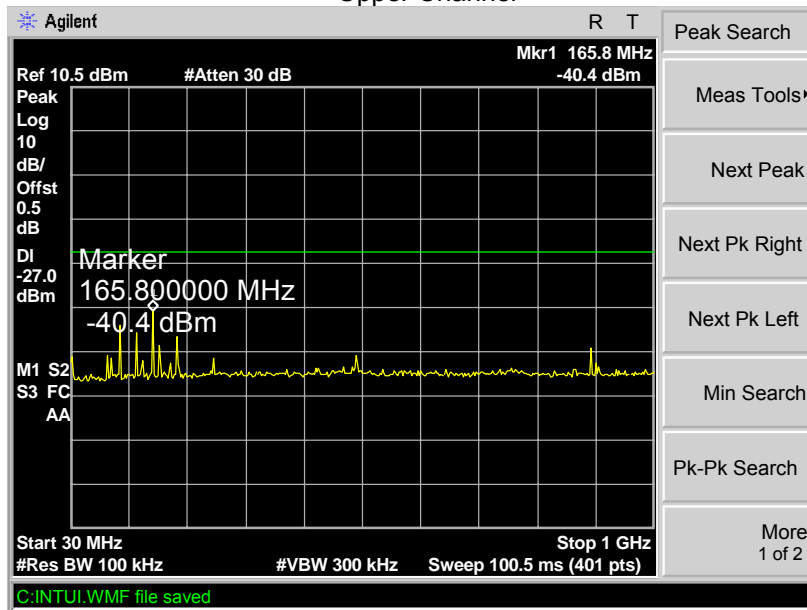


Modulation: 8DPSK



Lower Channel

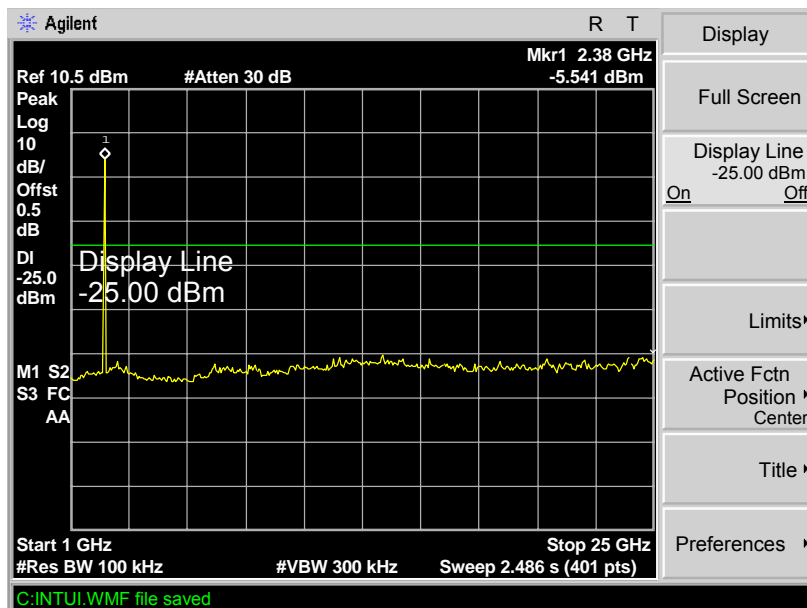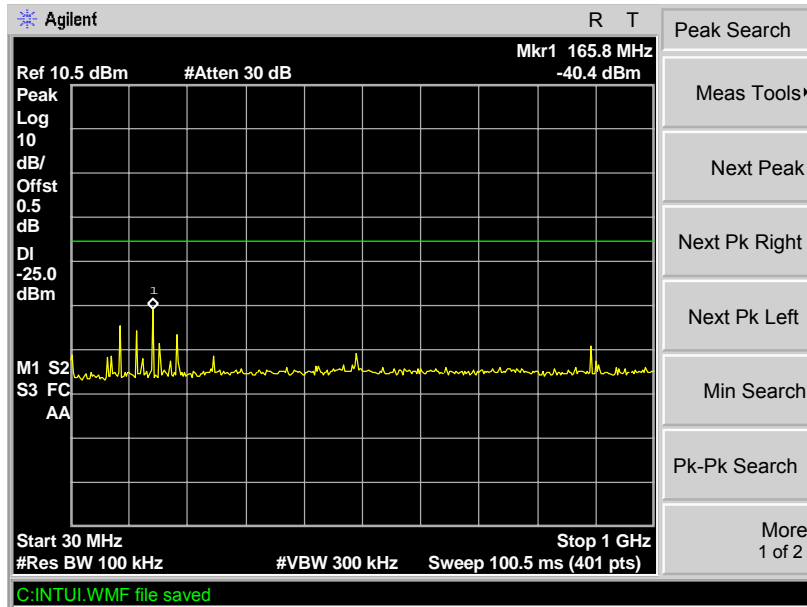

Middle Channel

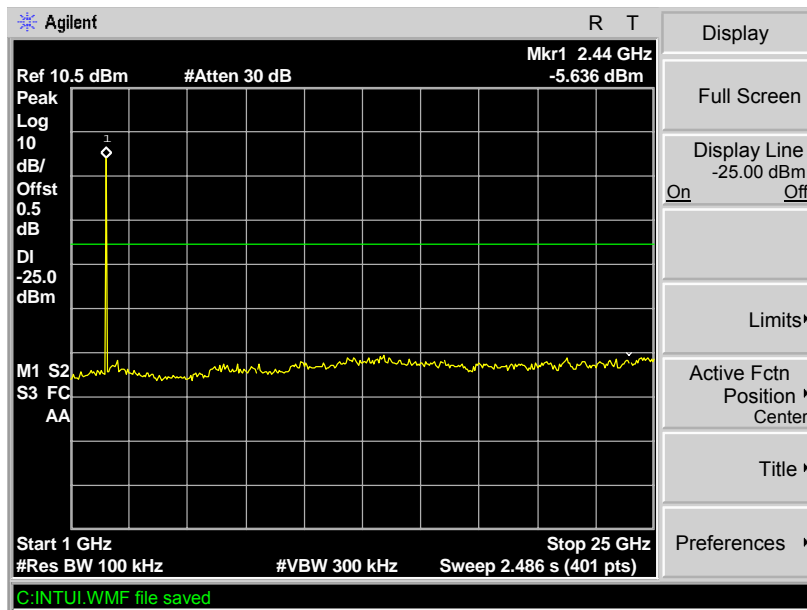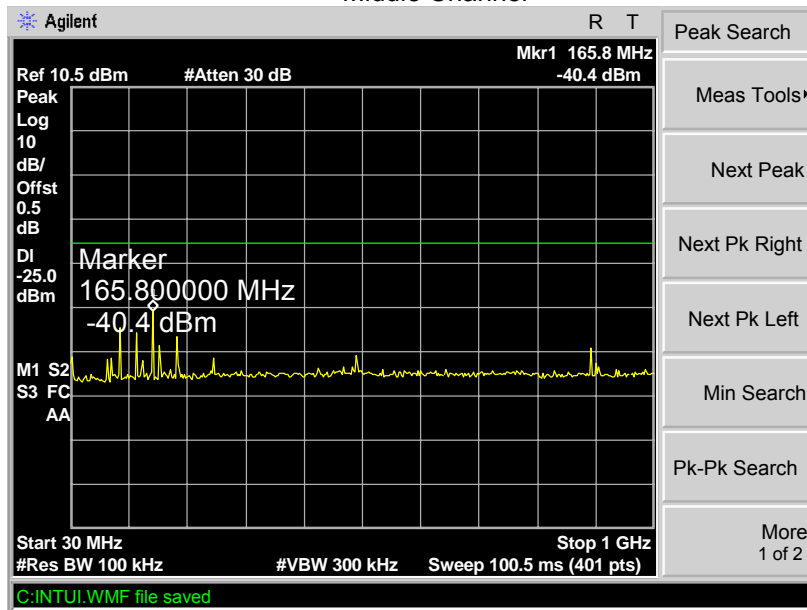

Upper Channel

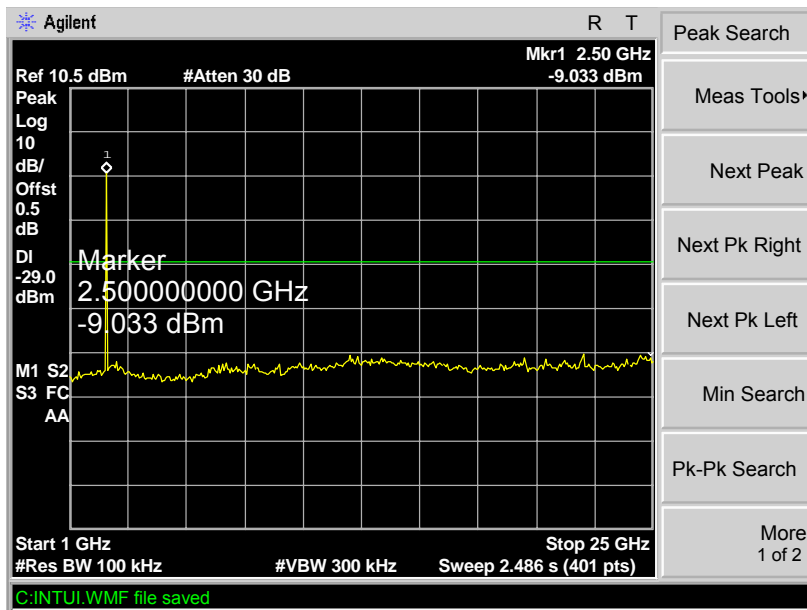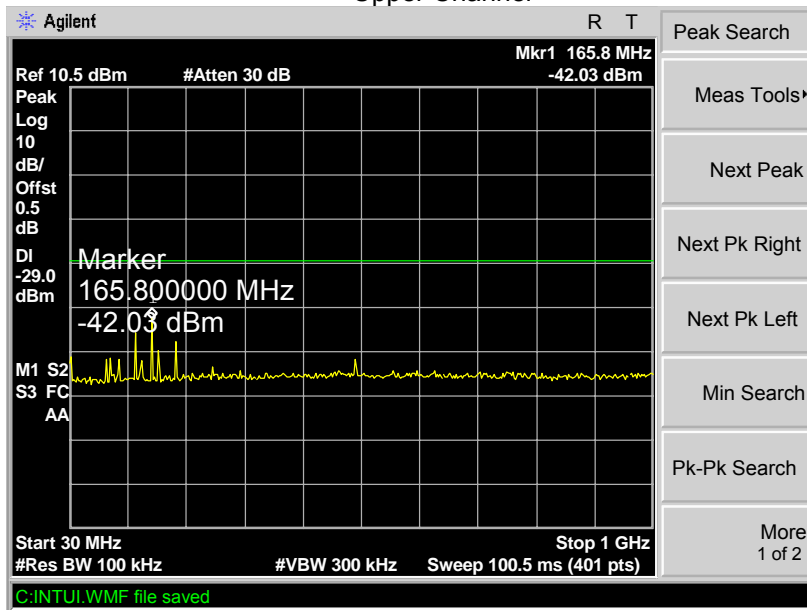


9 Duty Cycle

Test Requirement: FCC Part 15.35
 Test Method: ANSI C63.4:2003
 Test Status: TX mode.

9.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 1000 kHz, VBW = 1000 kHz, Span = 0 Hz, Adjacent sweep time.

9.2 Test Result

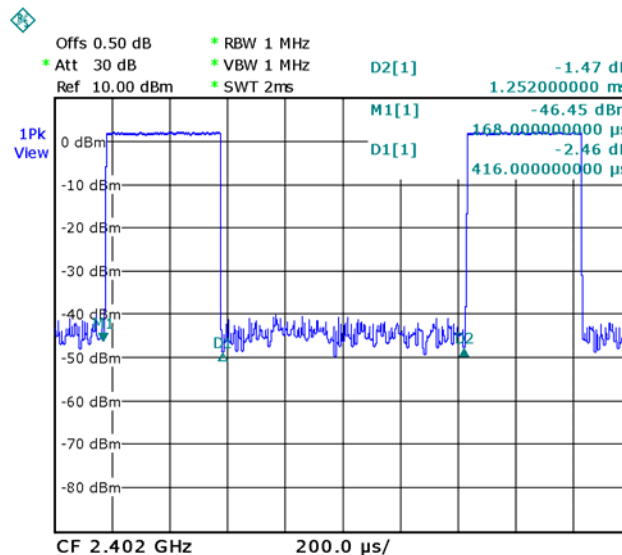

Transmission period(D2) is 1.252ms

Single pulse time(D1) is 0.416ms

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time : $T_{on} = \text{pulse time} = 0.416 \text{ ms}$

The EUT's work period : $T = T_{ON} + T_{OFF} = \text{transmission period} = 1.252 \text{ ms}$

The EUT's duty cycle : $D = T_{on} / T = 0.416 / 1.252 * 100\% = 33.2\%$

Duty Cycle Correction Factor(dB) = $20 * \text{Log}_{10}(\text{Duty Cycle}) = 20 * \text{Log}_{10}(33.2\%)$
 = -9.5dB

10 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz


10.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
 - For Peak value:
RBW = 1 MHz for $f \geq 1$ GHz
VBW \geq RBW; Sweep = auto
Detector function = peak
Trace = max hold
 - For AVG value:
RBW = 1 MHz for $f \geq 1$ GHz
VBW = 10Hz; Sweep = auto
Detector function = AVG
Trace = max hold
4. continuous transmitting

10.2 Test Result:

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.


Modulation: GFSK
 Lower Channel – Peak, Vertical

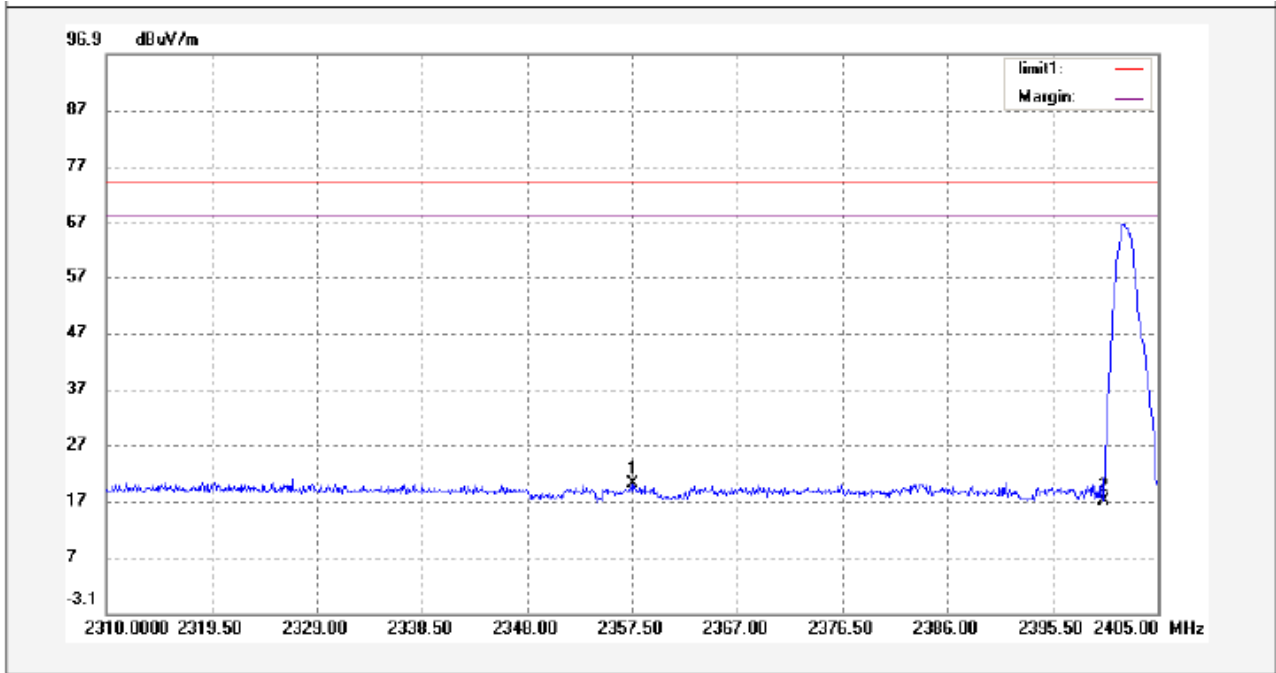

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2357.595	35.58	-15.45	20.13	74.00	-53.87	peak	
2	2400.000	32.69	-15.58	17.11	74.00	-56.89	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2357.000	-9.5	10.63	54.00	-43.37	AV	
2	2400.000	-9.5	7.61	54.00	-46.39	AV	


Lower Channel – Peak, Horizontal

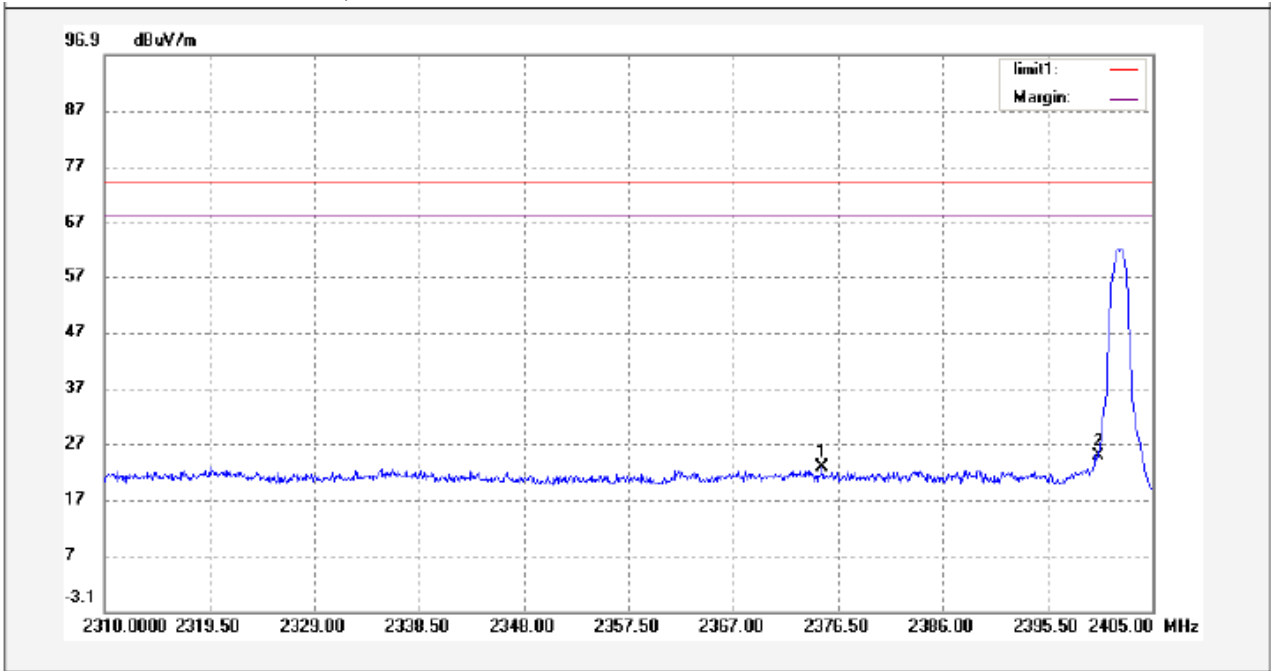

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2375.075	38.28	-15.51	22.77	74.00	-51.23	peak	
2	2400.000	40.42	-15.58	24.84	74.00	-49.16	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2375.000	-9.5	13.27	54.00	-40.73	AV	
2	2400.000	-9.5	15.34	54.00	-38.66	AV	


Upper Channel – Peak, Vertical

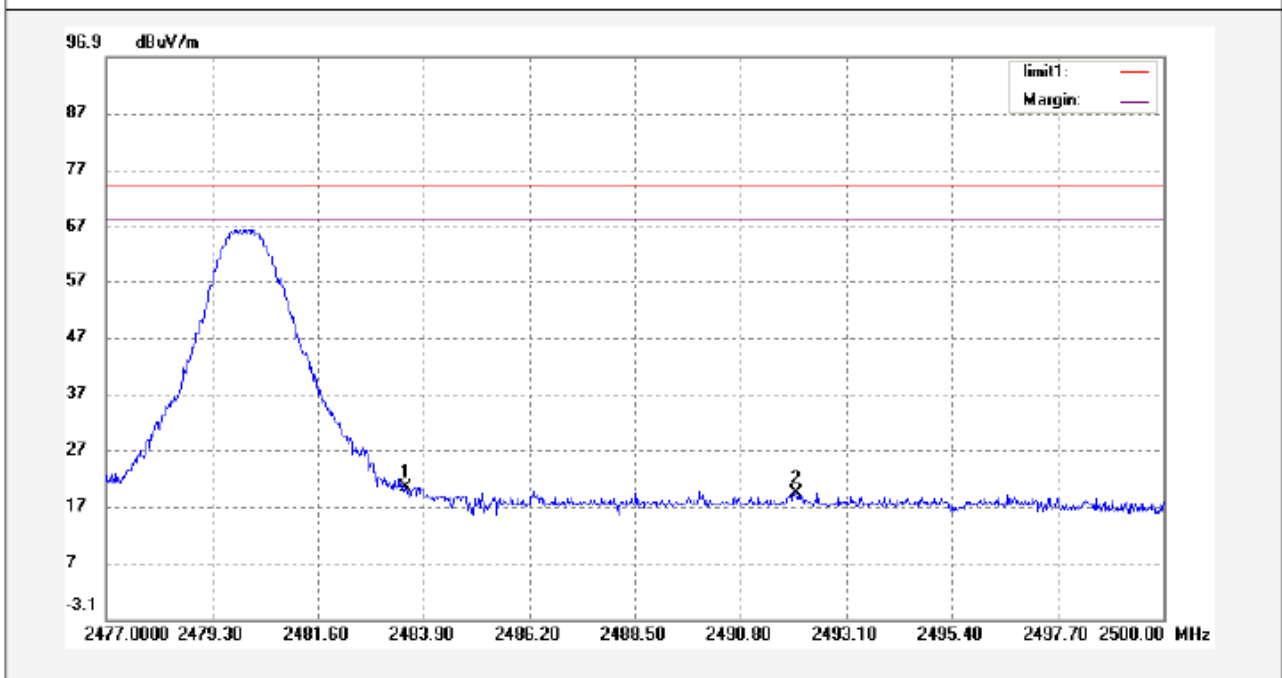

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	35.91	-15.67	20.24	74.00	-53.76	peak	
2	2492.019	35.06	-15.66	19.40	74.00	-54.60	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	-9.5	10.74	54.00	-43.26	AV	
2	2492.019	-9.5	9.90	54.00	-44.10	AV	

Upper Channel – Peak, Horizontal

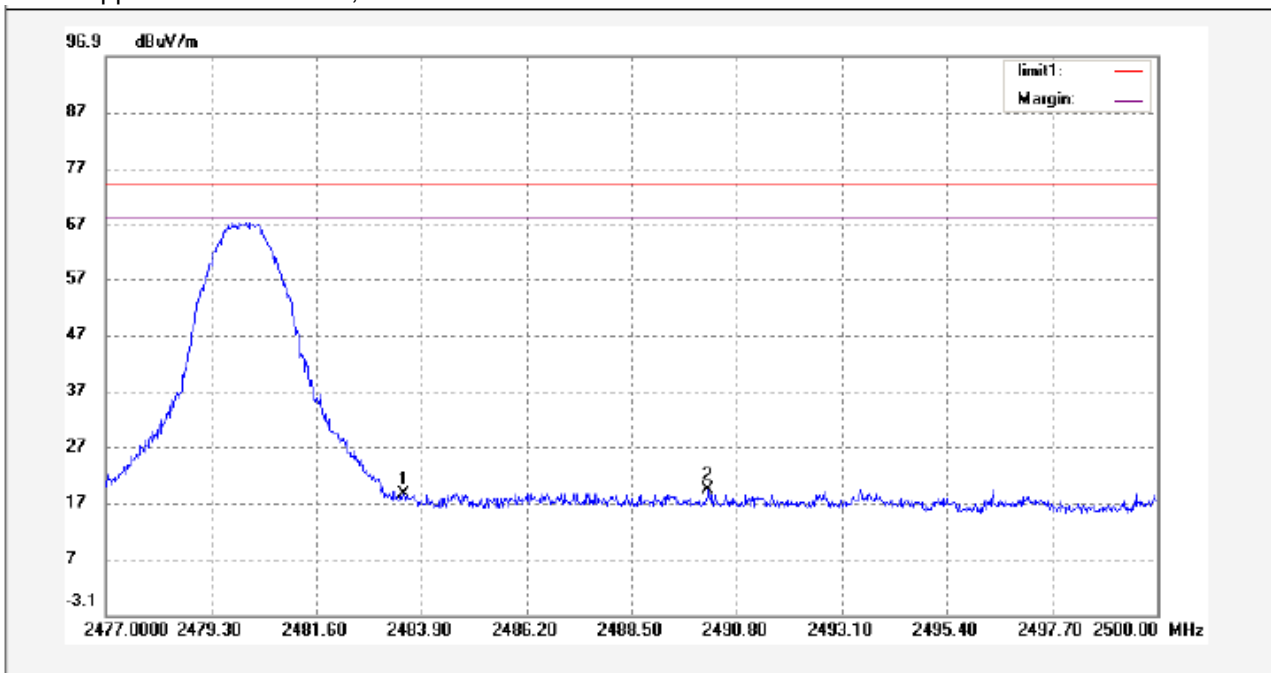

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	34.21	-15.67	18.54	74.00	-55.46	peak	
2	2490.179	35.03	-15.67	19.36	74.00	-54.64	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	-9.5	9.04	54.00	-44.96	AV	
2	2490.179	-9.5	9.86	54.00	-44.14	AV	

11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: DA 00-705
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz


11.2 Test Result:

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Lower	0.922
	Middle	0.916
	Upper	0.916
Pi/4DQPSK	Lower	1.240
	Middle	1.240
	Upper	1.240
8DPSK	Lower	1.216
	Middle	1.222
	Upper	1.228


Test result plot as follows:


Modulation:GFSK

Lower Channel

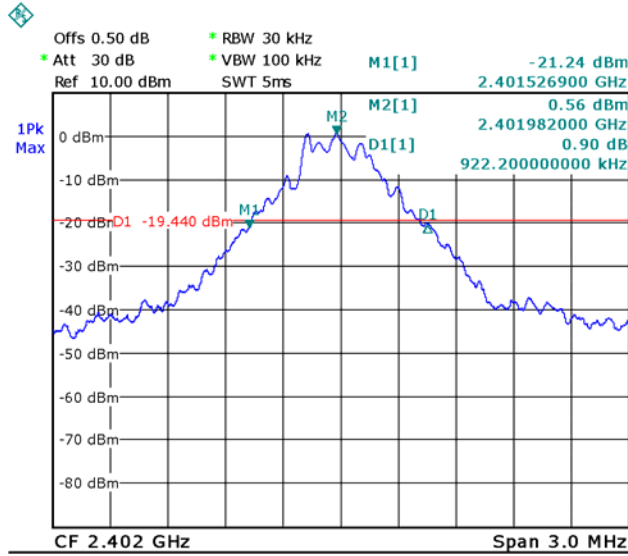


Middle Channel

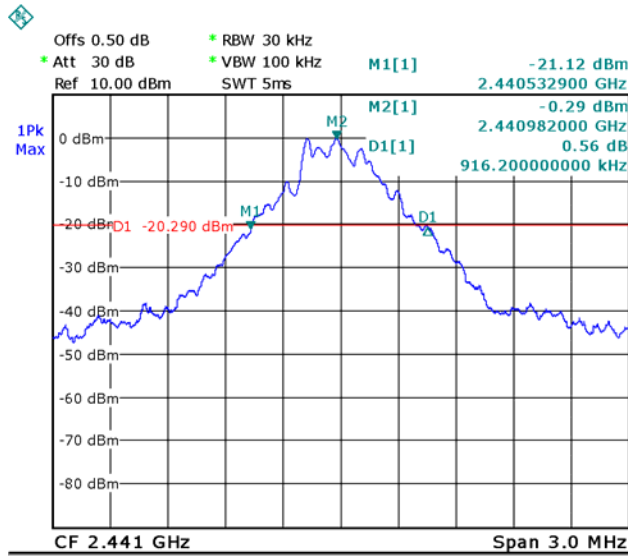


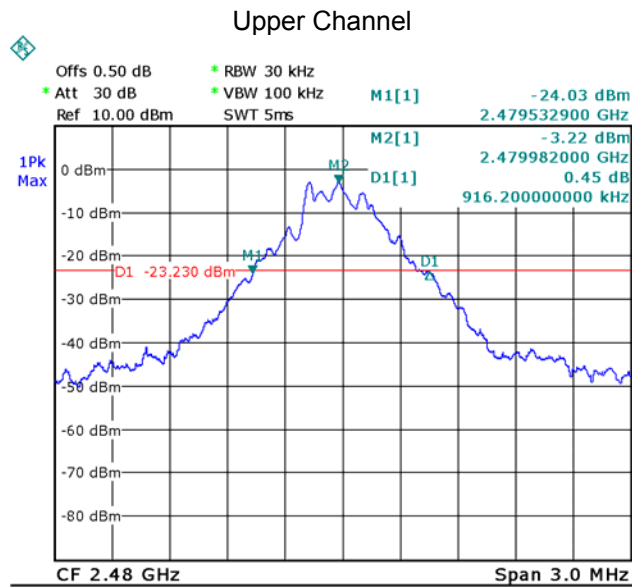


Modulation: Pi/4DQPSK

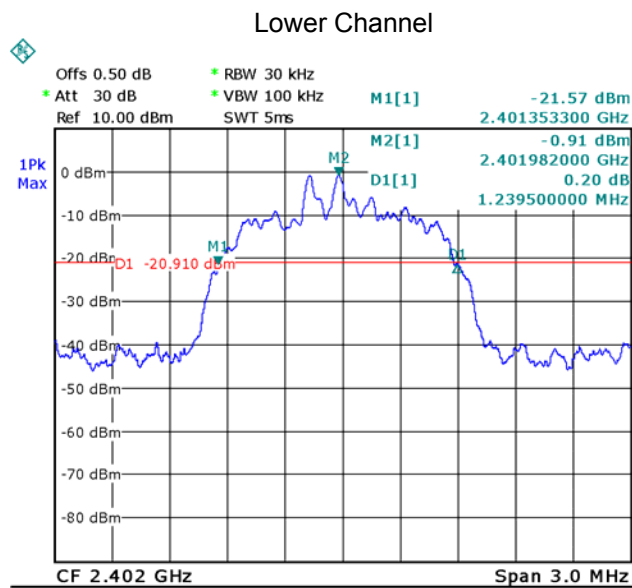

Middle Channel

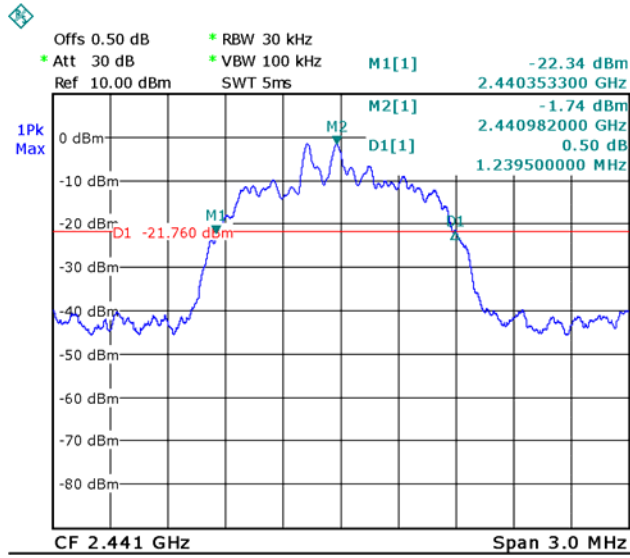


Upper Channel

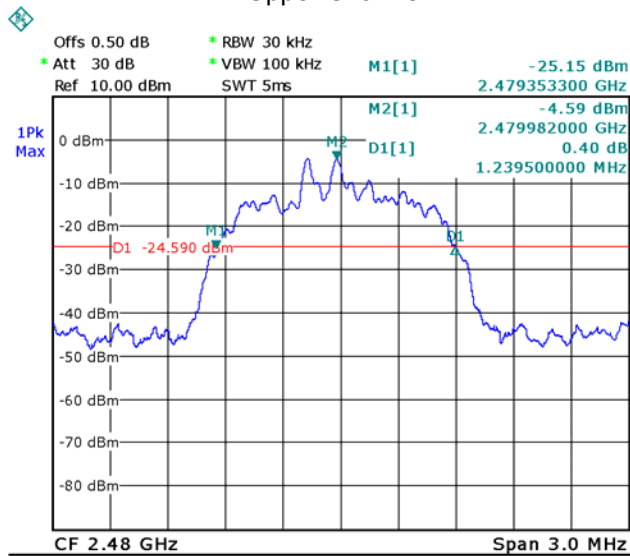



Modulation: 8DPSK

Lower Channel

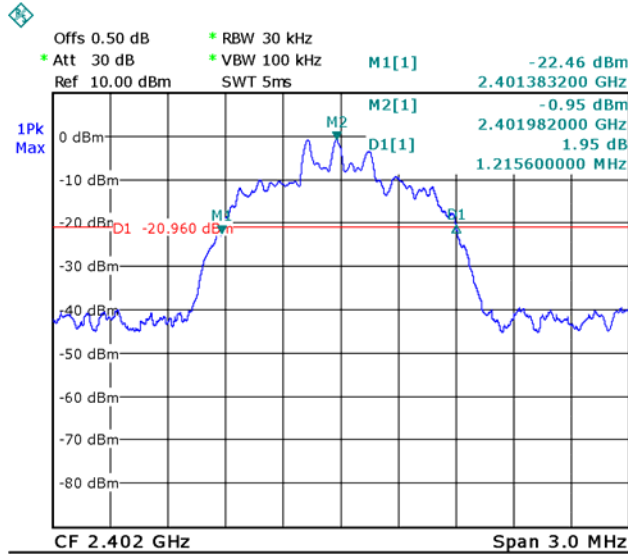

Middle Channel

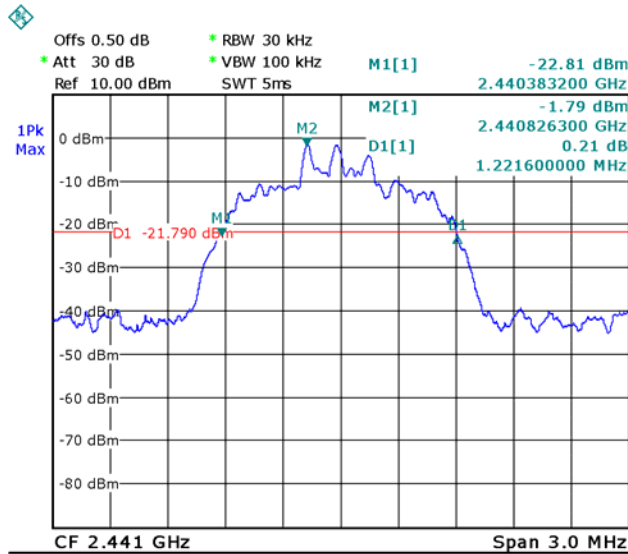

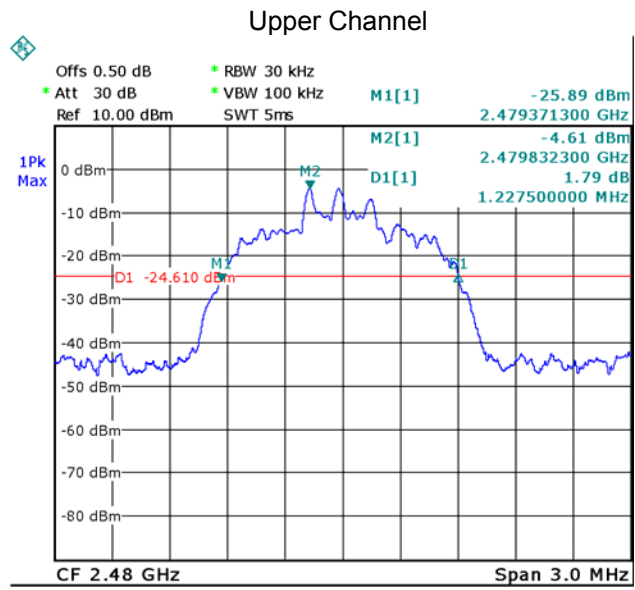

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


12.2 Test Result:

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Lower	1.87	30
	Middle	1.23	30
	Upper	-1.63	30
Pi/4DQPSK	Lower	0.74	30
	Middle	0.05	30
	Upper	-2.68	30
8DPSK	Lower	0.90	30
	Middle	0.25	30
	Upper	-2.53	30


Test result plot as follows:

Modulation:GFSK


Lower Channel

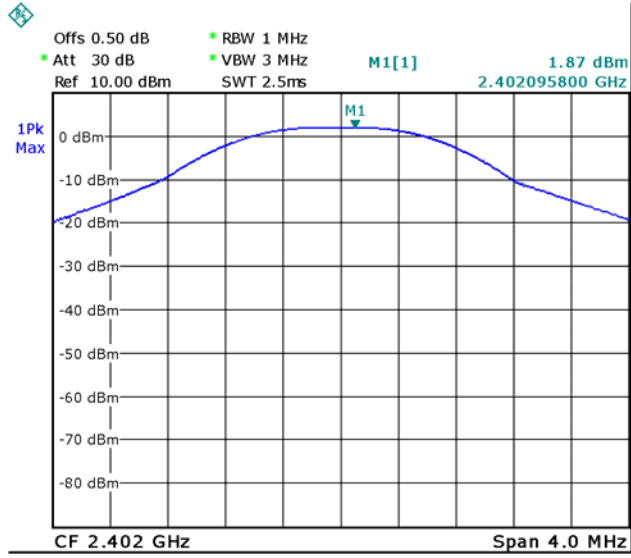

Middle Channel

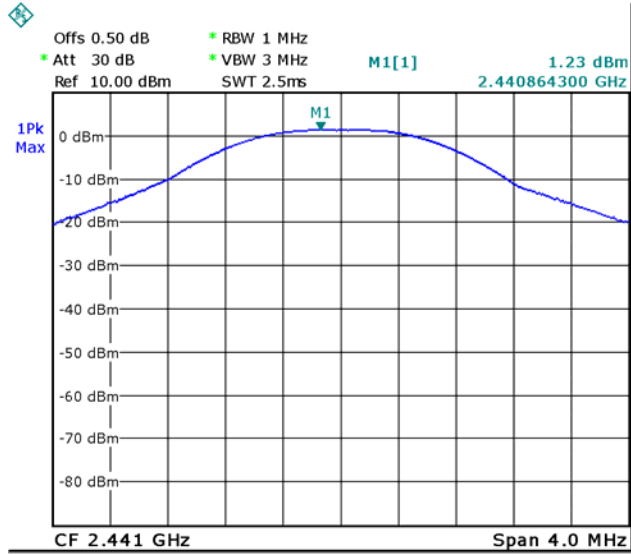


Upper Channel

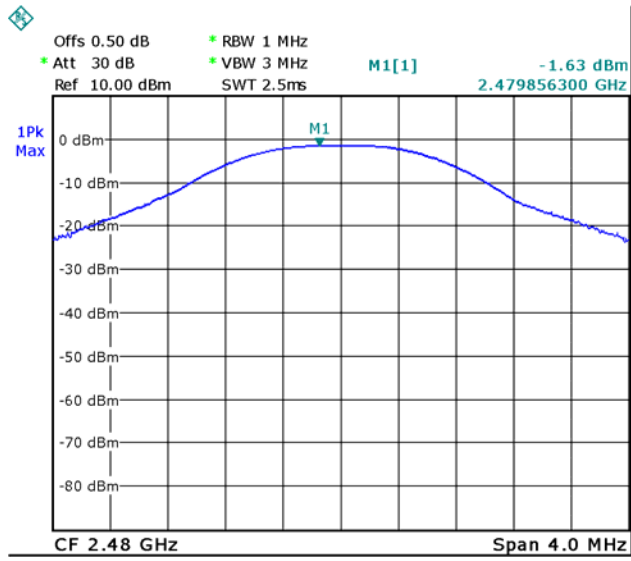


Modulation: Pi/4DQPSK


Lower Channel

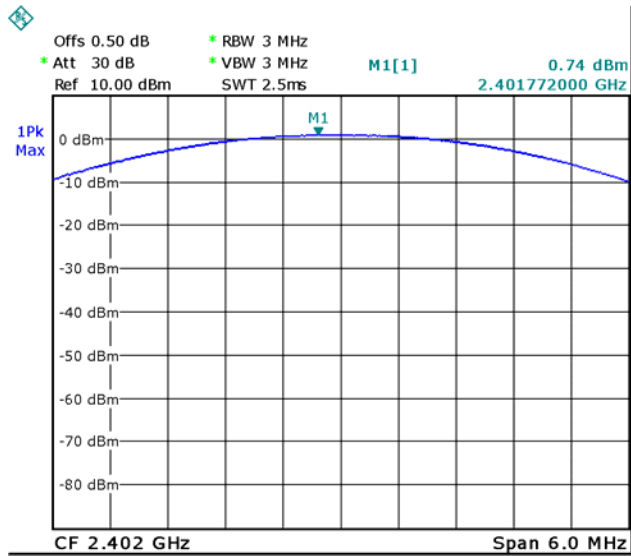

Middle Channel

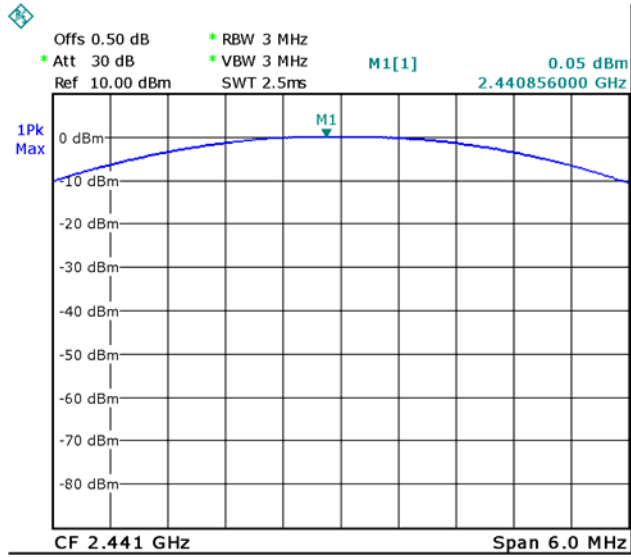


Upper Channel

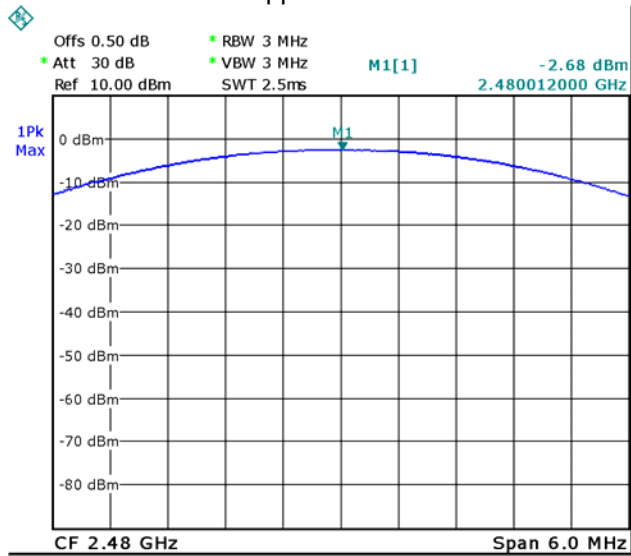



Modulation: 8DPSK

Lower Channel

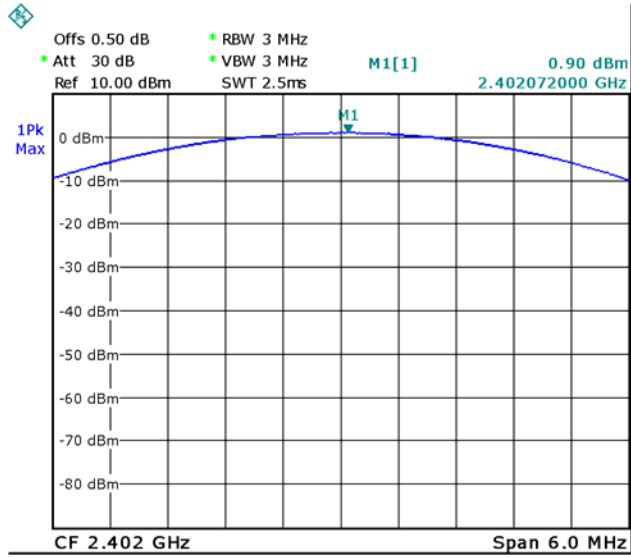

Middle Channel

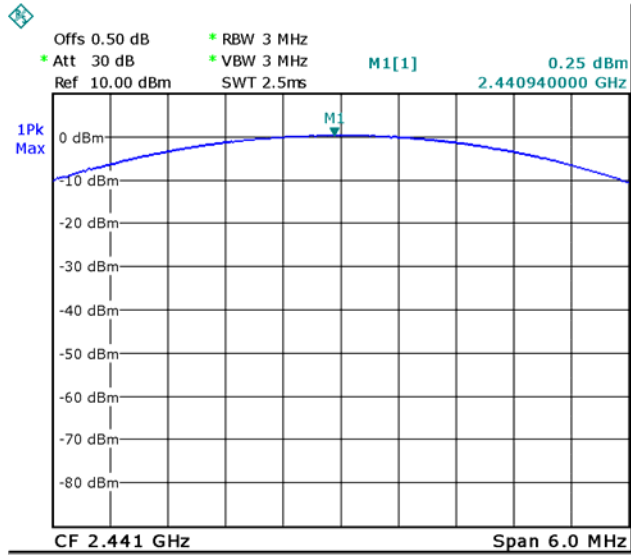

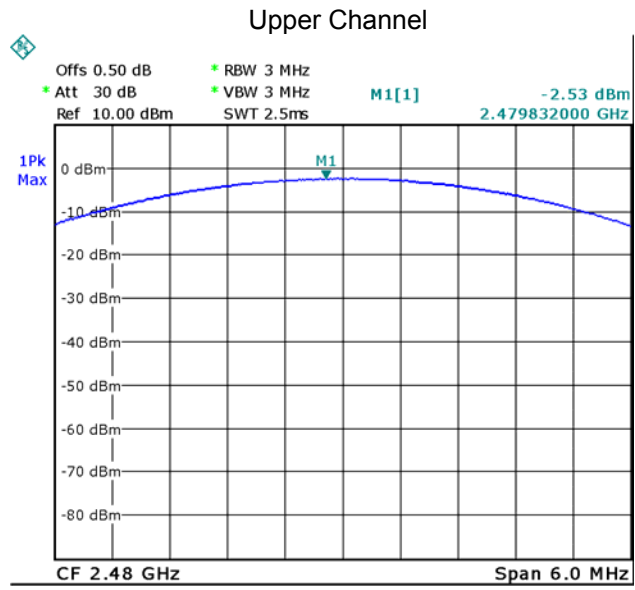

13 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


13.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Lower	1.000
	Middle	1.000
	Upper	1.000
Pi/4DQPSK	Lower	1.000
	Middle	1.000
	Upper	1.000
8DPSK	Lower	1.000
	Middle	1.000
	Upper	1.000


Test result plot as follows:

Modulation:GFSK


Lower Channel

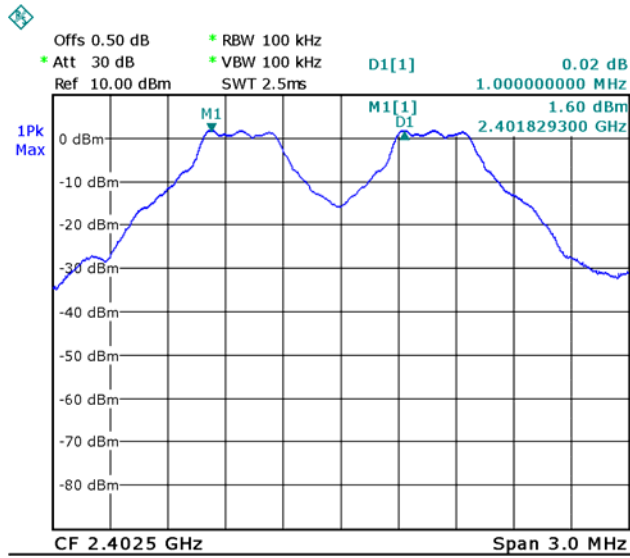

Middle Channel

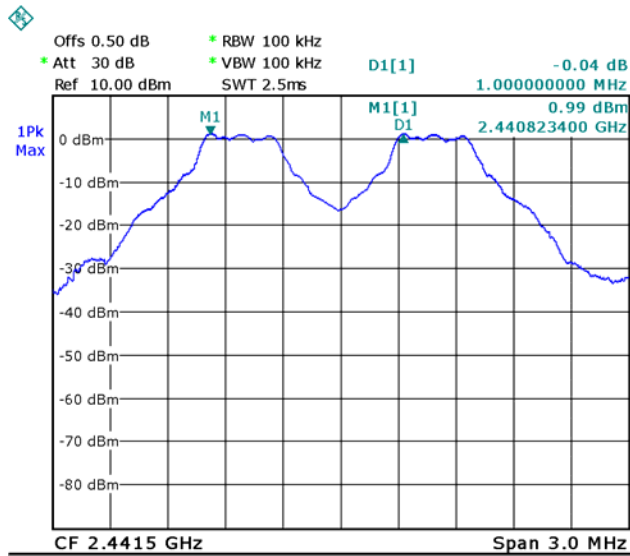


Upper Channel

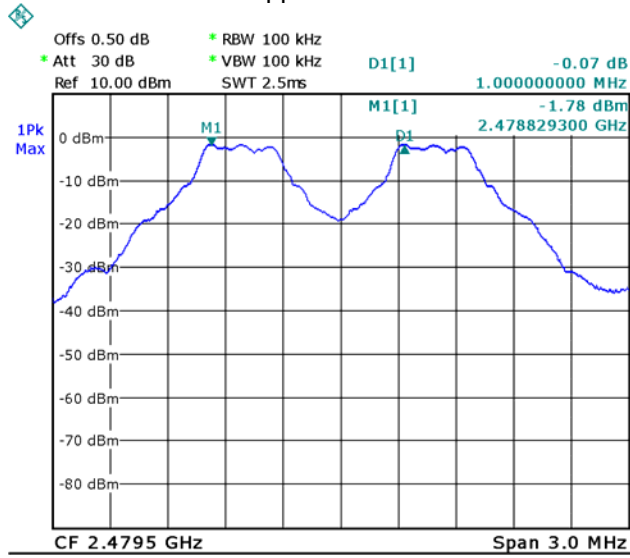


Modulation: Pi/4DQPSK


Lower Channel

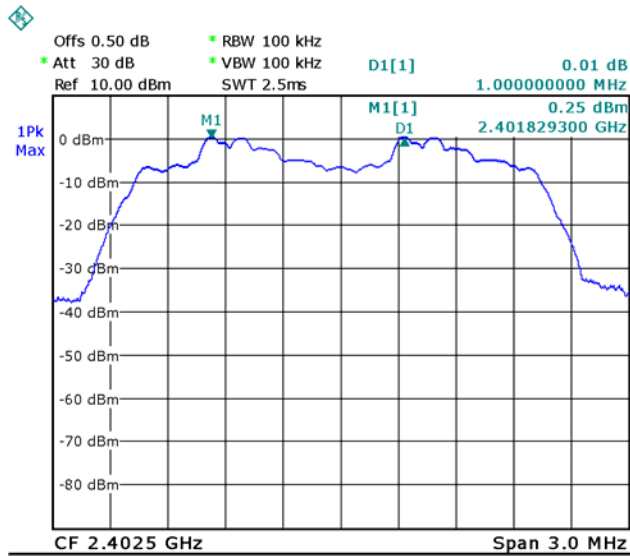

Middle Channel

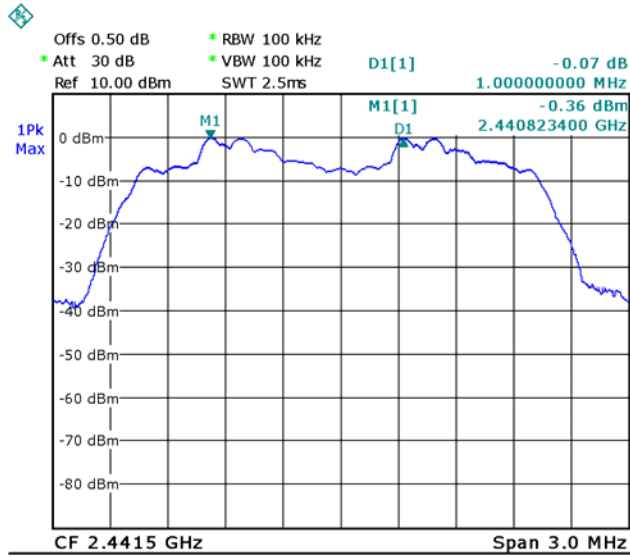


Upper Channel

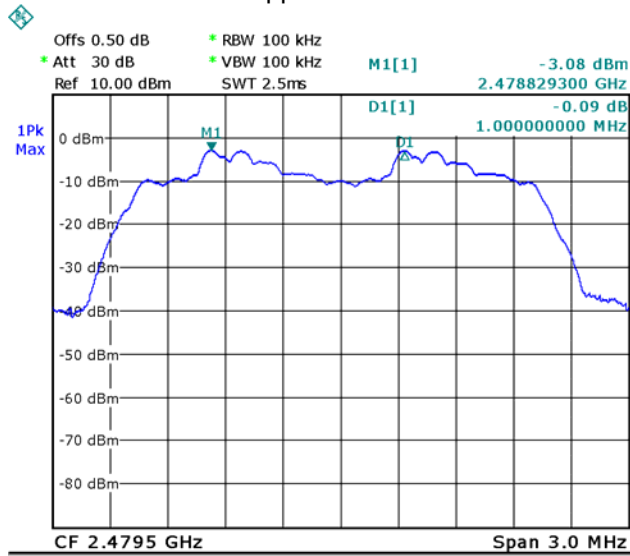



Modulation: 8DPSK

Lower Channel

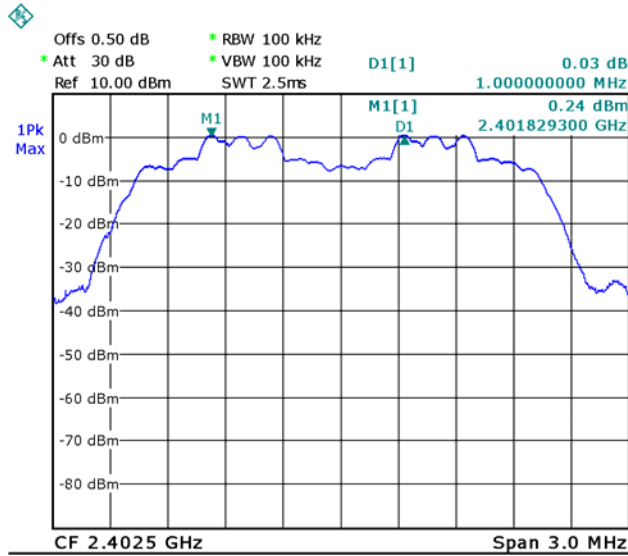

Middle Channel

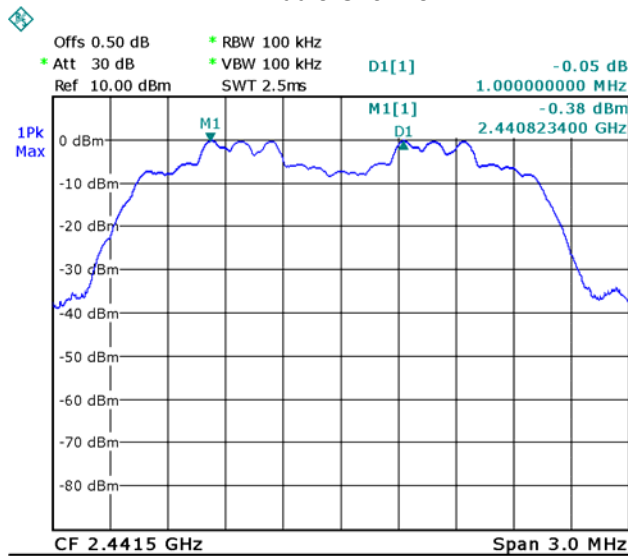

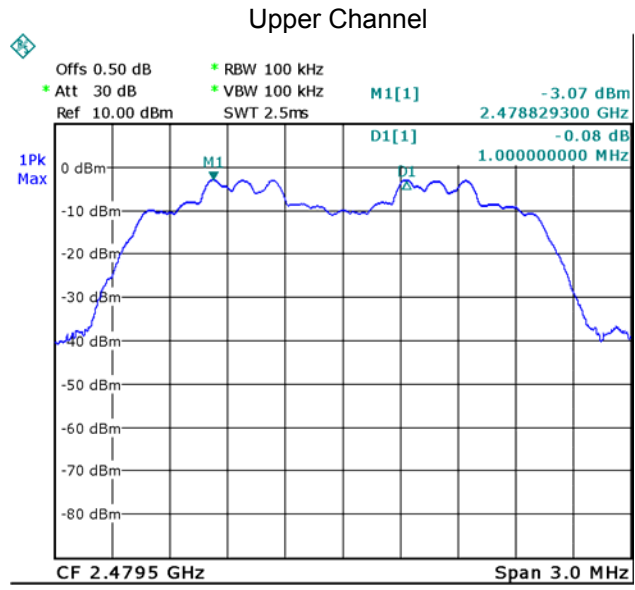

14 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

14.2 Test Result:


Total Channels are 79 Channels.

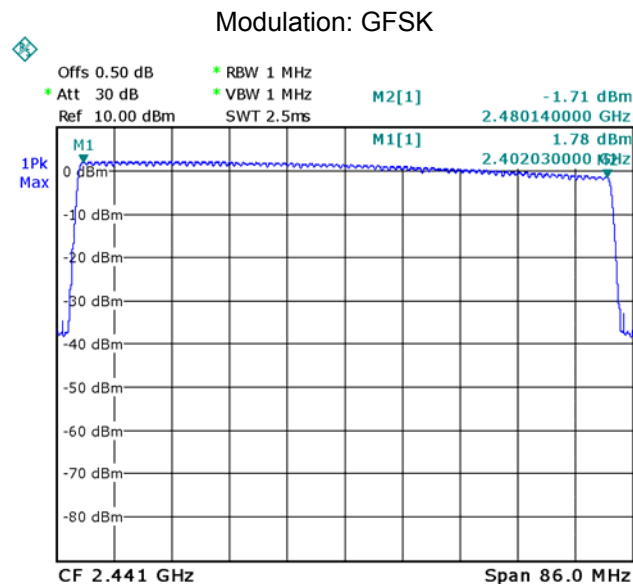

Modulation: Pi/4DQPSK

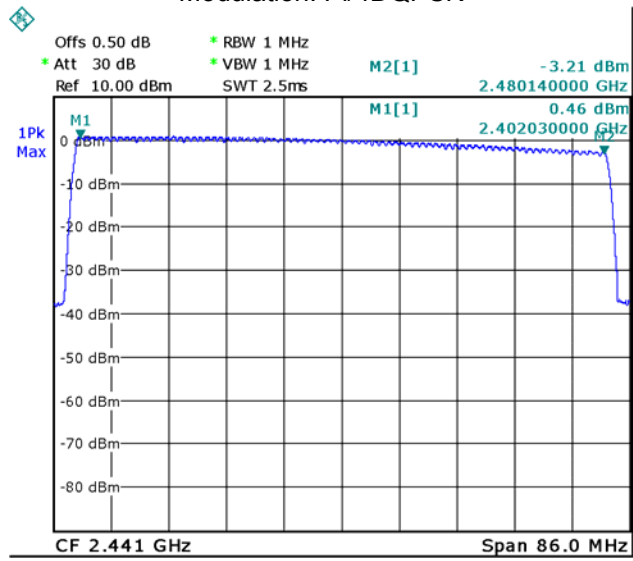

Modulation: 8DPSK

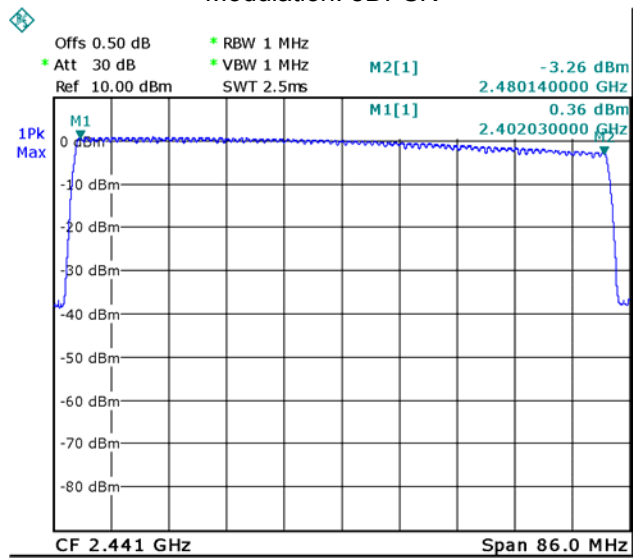

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.


Modulation	Frequency	Data Packet	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
GFSK	Lower channel	DH1	0.440	0.1408	0.400
	Middle channel		0.420	0.1344	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.680	0.2688	0.400
	Middle channel		1.680	0.2688	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	2.940	0.3136	0.400
	Middle channel		2.980	0.3179	0.400
	Upper channel		2.940	0.3136	0.400
Pi/4DQPSK	Lower channel	DH1	0.480	0.1536	0.400
	Middle channel		0.520	0.1664	0.400
	Upper channel		0.480	0.1536	0.400
	Lower channel	DH3	1.720	0.2752	0.400
	Middle channel		1.740	0.2784	0.400
	Upper channel		1.740	0.2784	0.400
	Lower channel	DH5	2.960	0.3157	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		3.000	0.3200	0.400
8DPSK	Lower channel	DH1	0.460	0.1472	0.400
	Middle channel		0.460	0.1472	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.820	0.2912	0.400
	Middle channel		1.760	0.2816	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	3.020	0.3221	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		2.980	0.3179	0.400

Modulation:GFSK


Data Packet:DH1,Lower channel

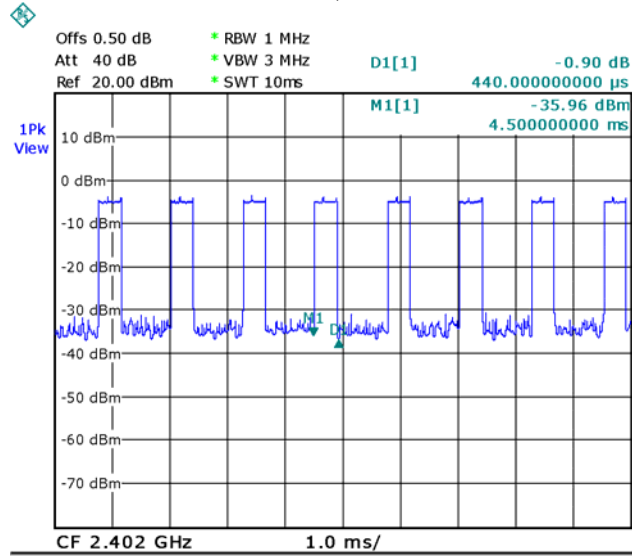


Data Packet:DH1,Middle channel

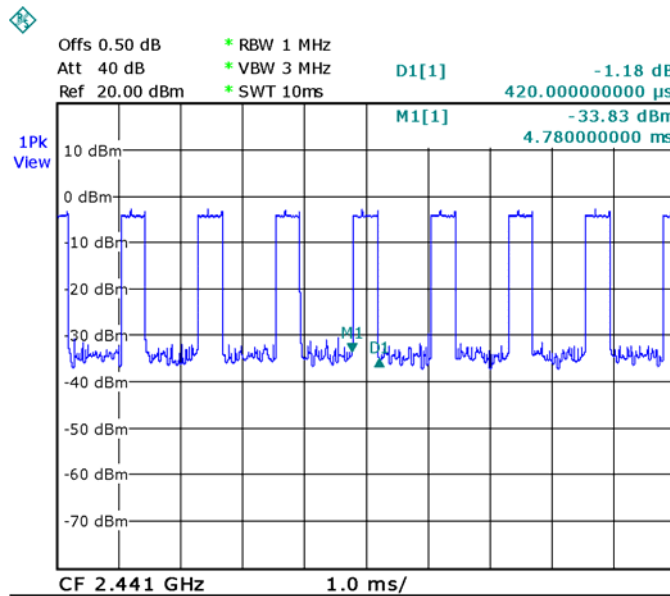


Data Packet:DH1,Upper channel

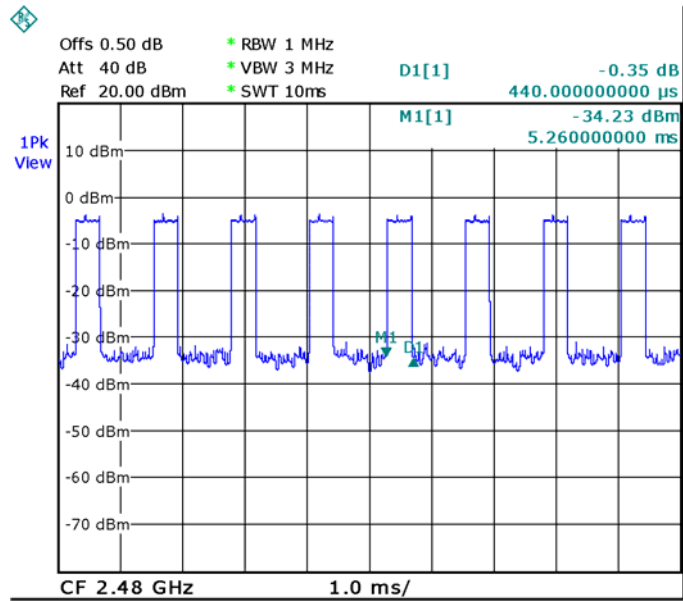


Data Packet:DH3,Lower channel

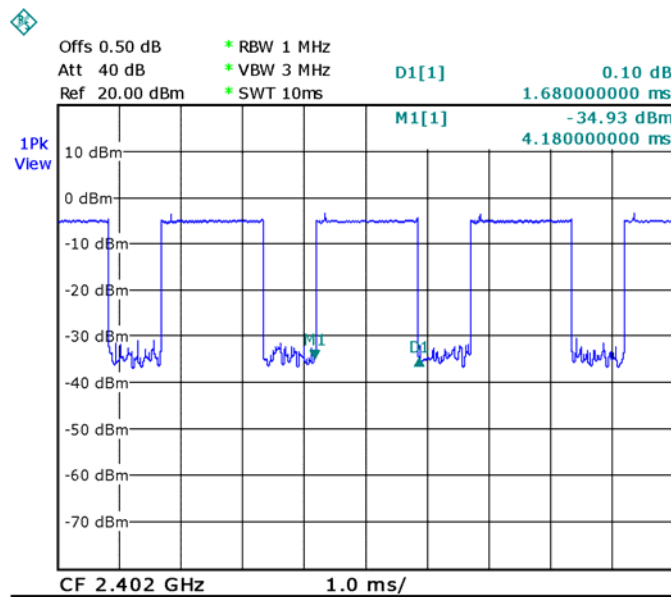


Data Packet:DH3,Middle channel

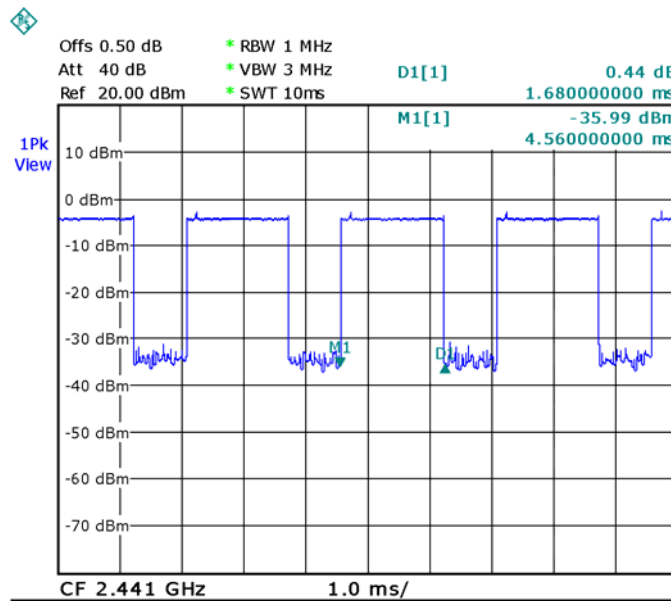


Data Packet:DH3,Upper channel

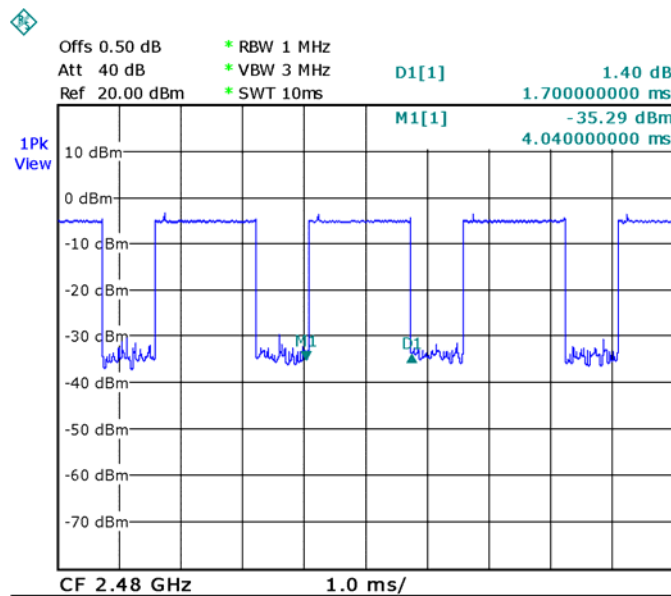


Data Packet:DH5,Lower channel

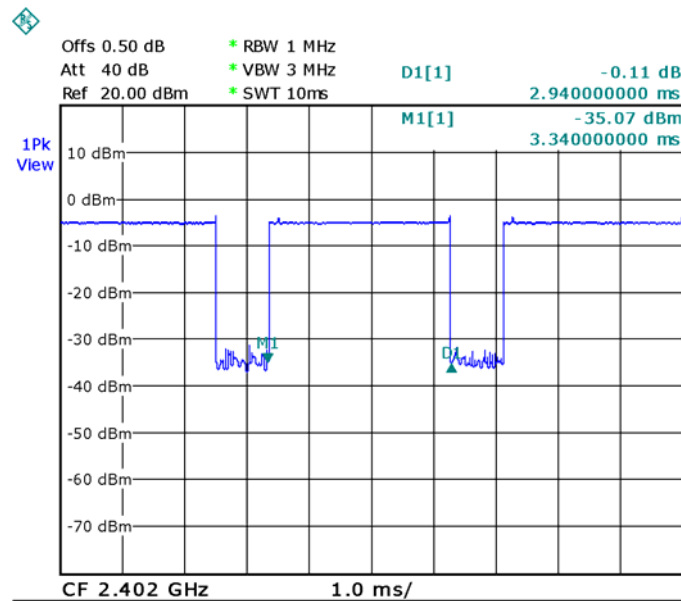

Data Packet:DH5,Middle channel

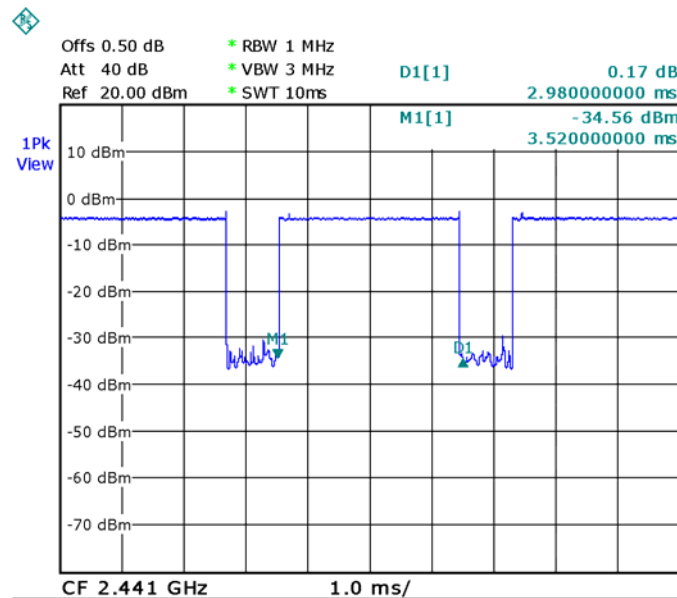


Data Packet:DH5,Upper channel

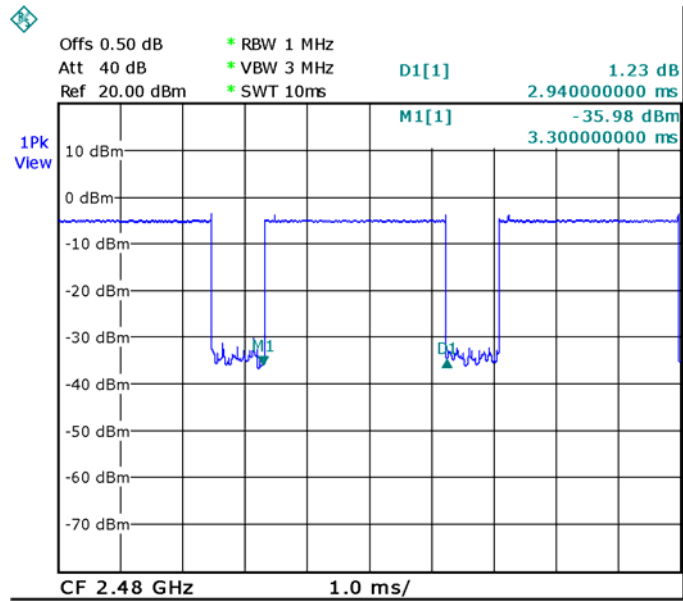


Modulation: Pi/4DQPSK


Data Packet:DH1,Lower channel

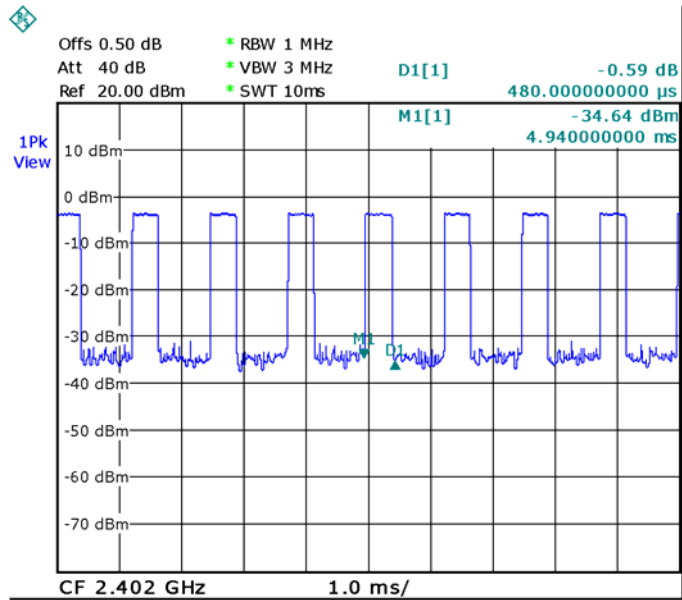


Data Packet:DH1,Middle channel

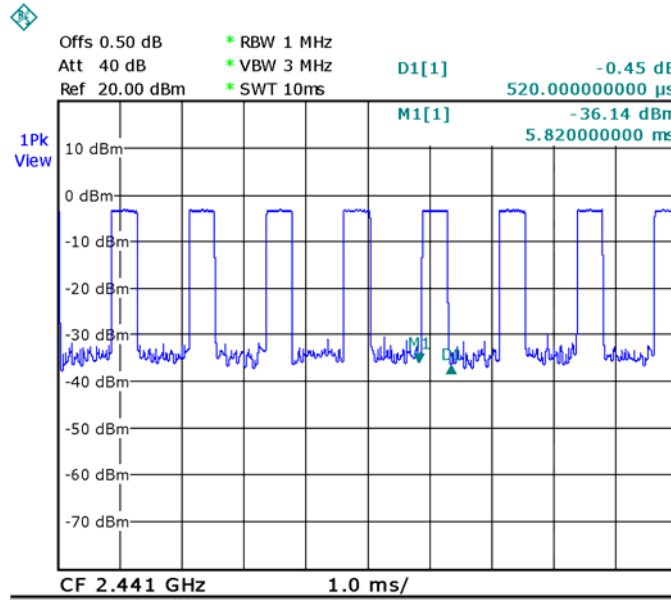


Data Packet:DH1,Upper channel

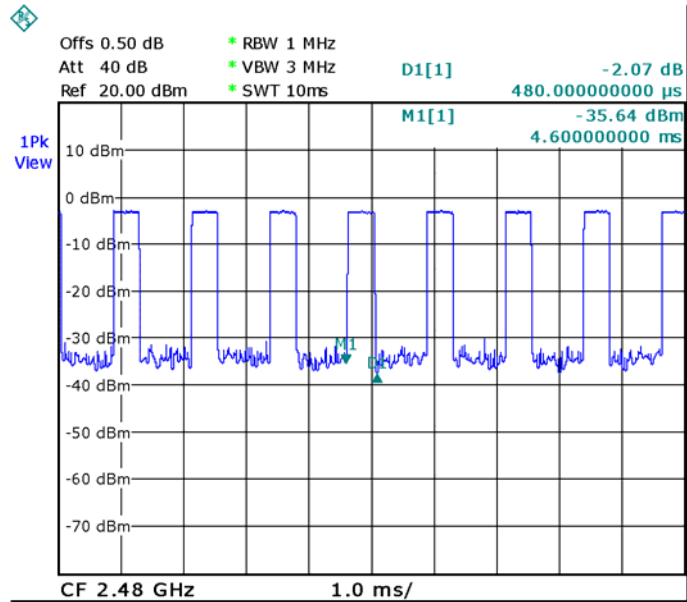


Data Packet:DH3,Lower channel

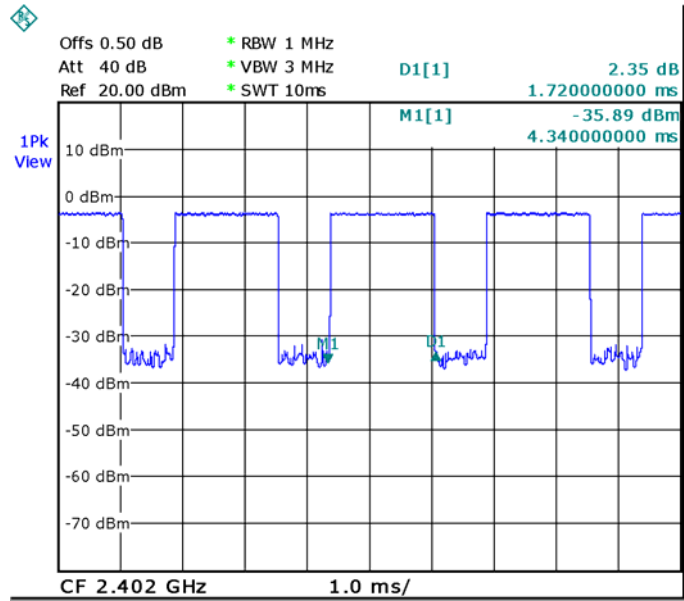


Data Packet:DH3,Middle channel

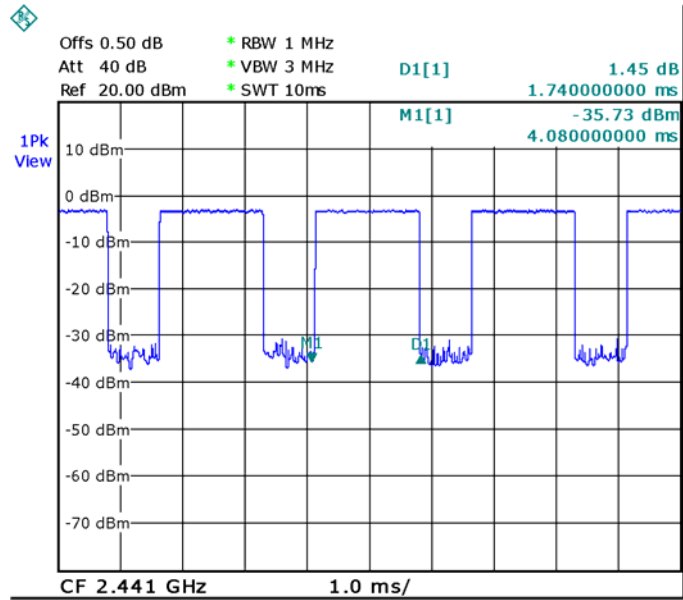


Data Packet:DH3,Upper channel

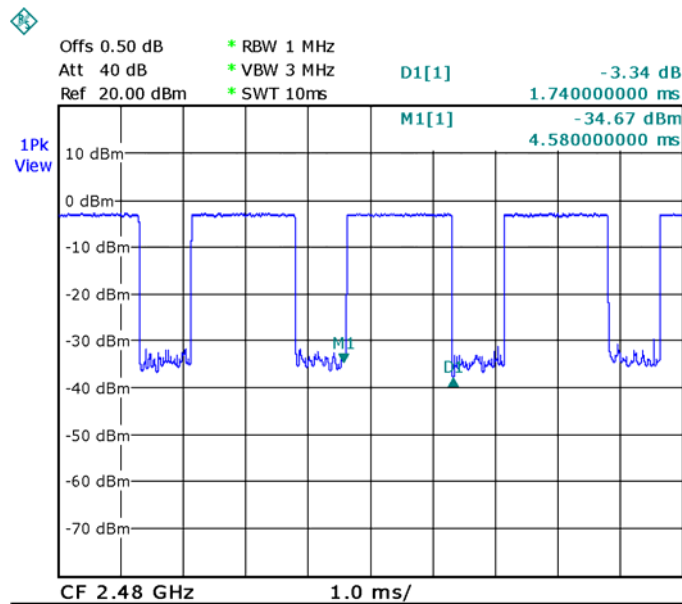


Data Packet:DH5,Lower channel

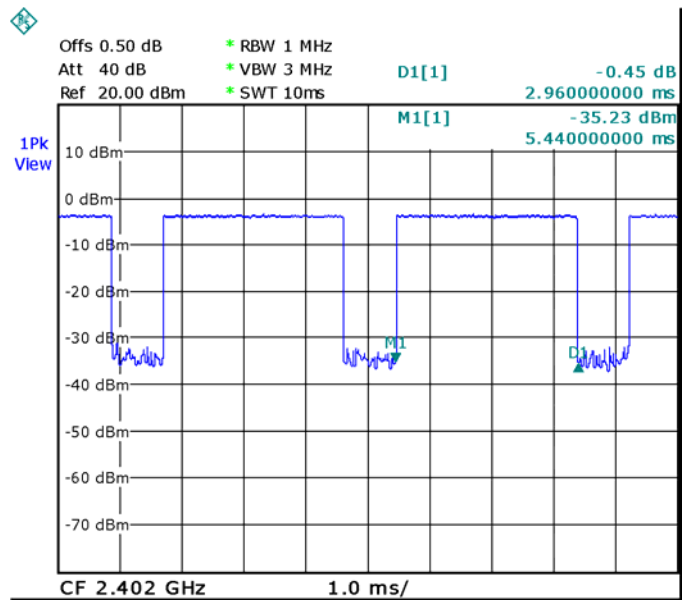


Data Packet:DH5,Middle channel

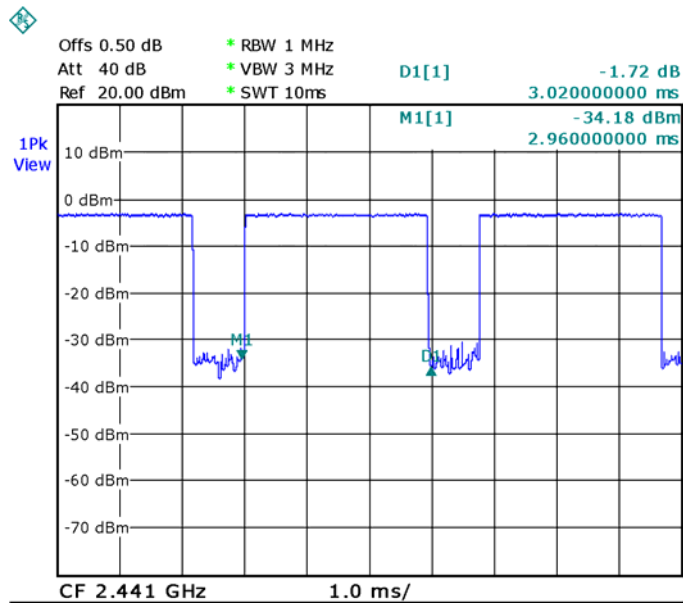


Data Packet:DH5,Upper channel

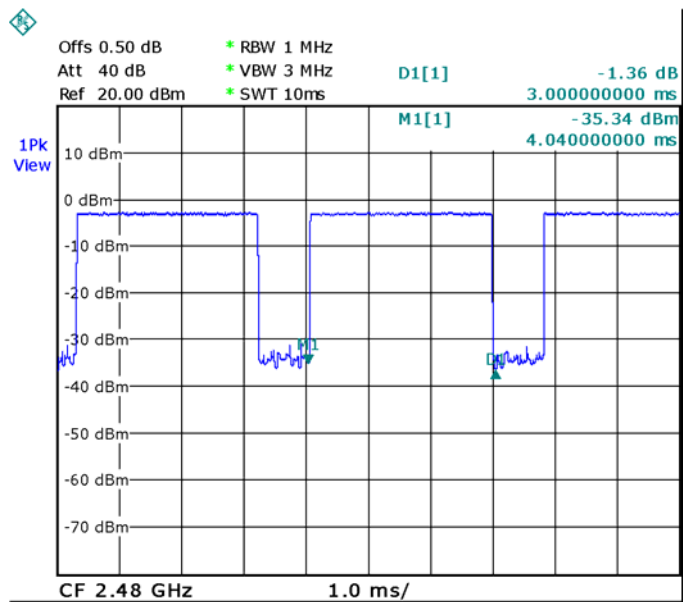


Modulation: 8DPSK
Data Packet:DH1,Lower channel

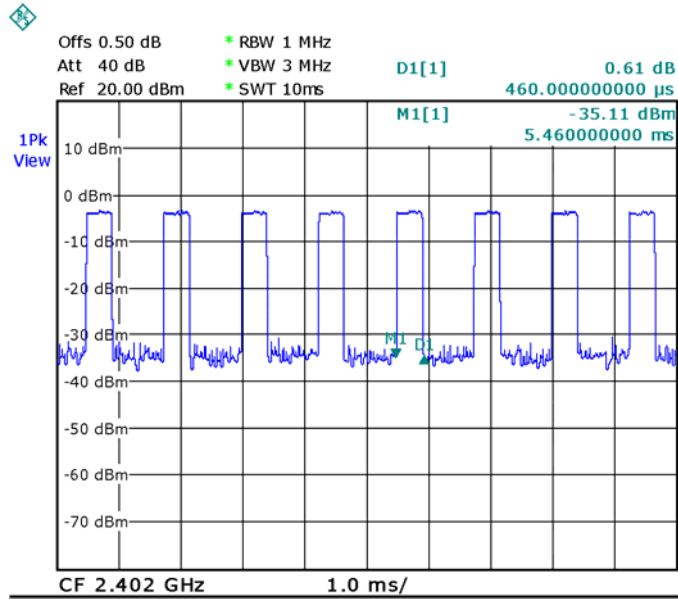


Data Packet:DH1,Middle channel

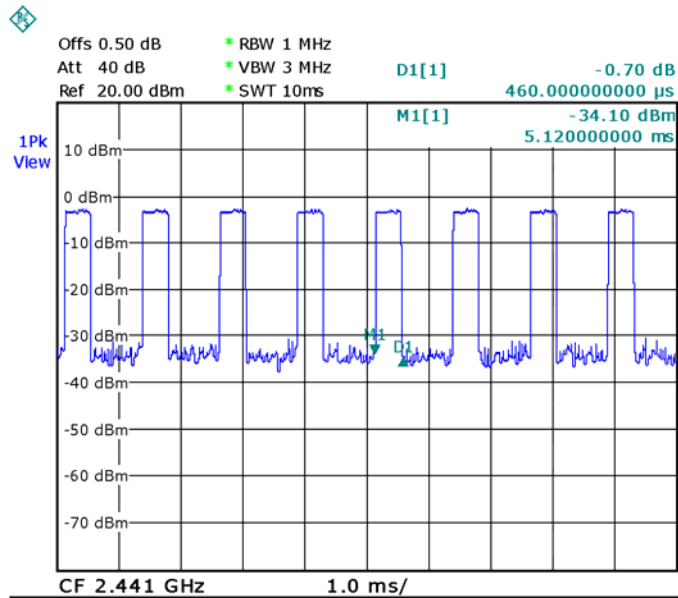


Data Packet:DH1,Upper channel

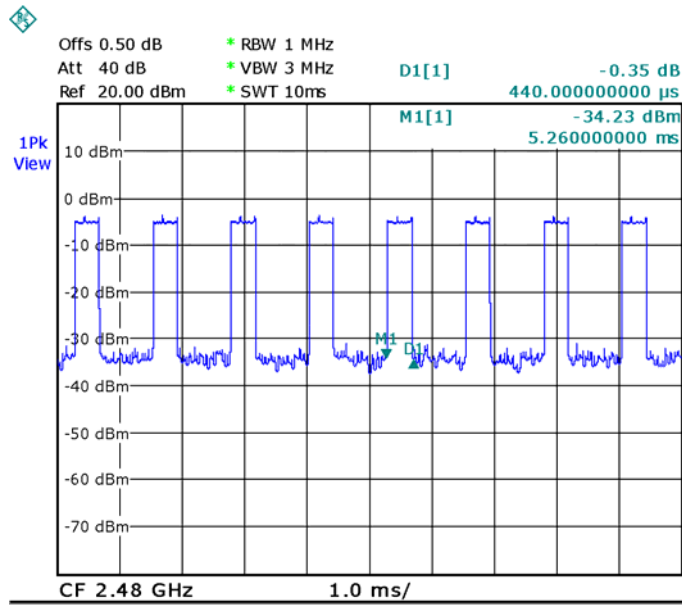


Data Packet:DH3,Lower channel

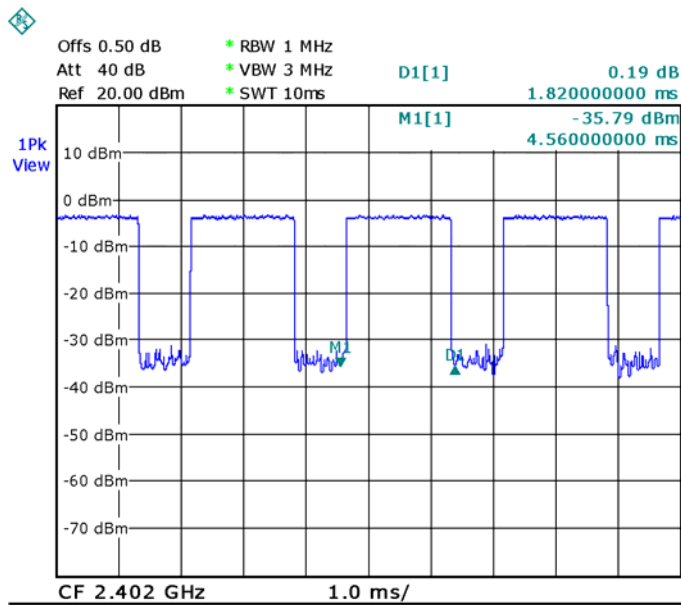


Data Packet:DH3,Middle channel

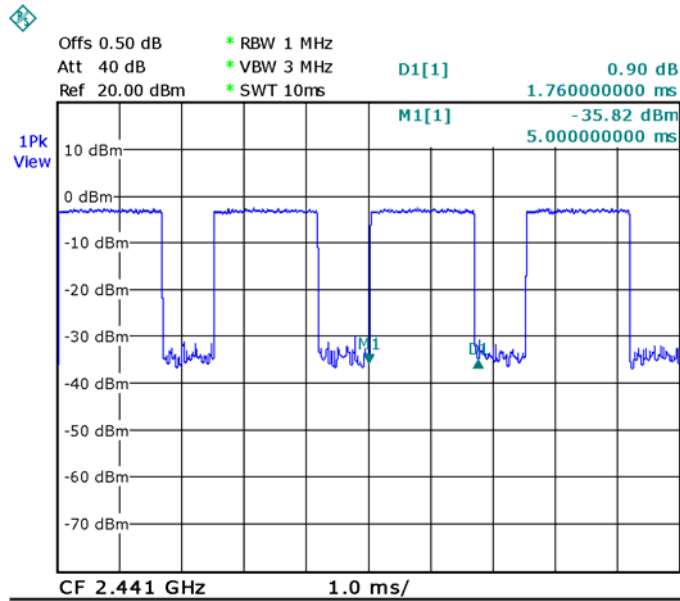


Data Packet:DH3,Upper channel

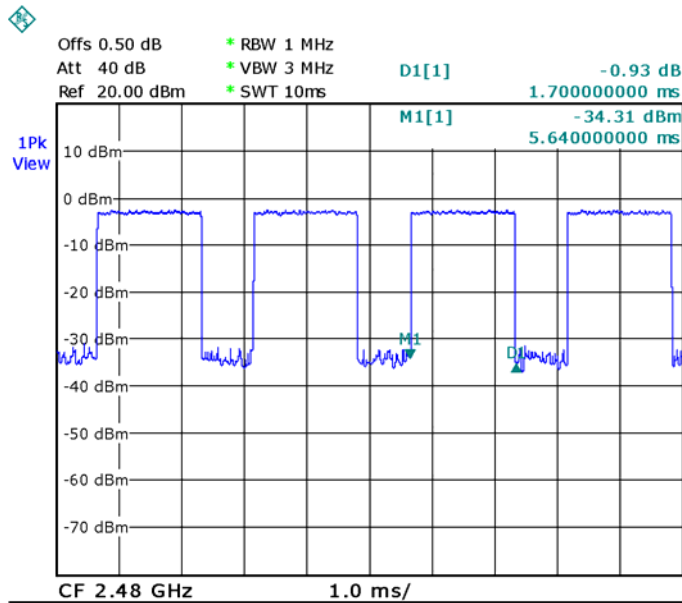


Data Packet:DH5,Lower channel

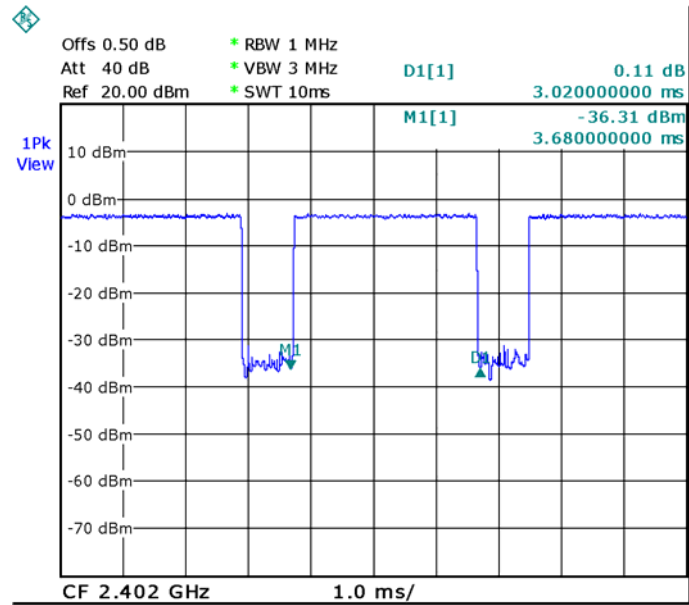

Data Packet:DH5,Middle channel

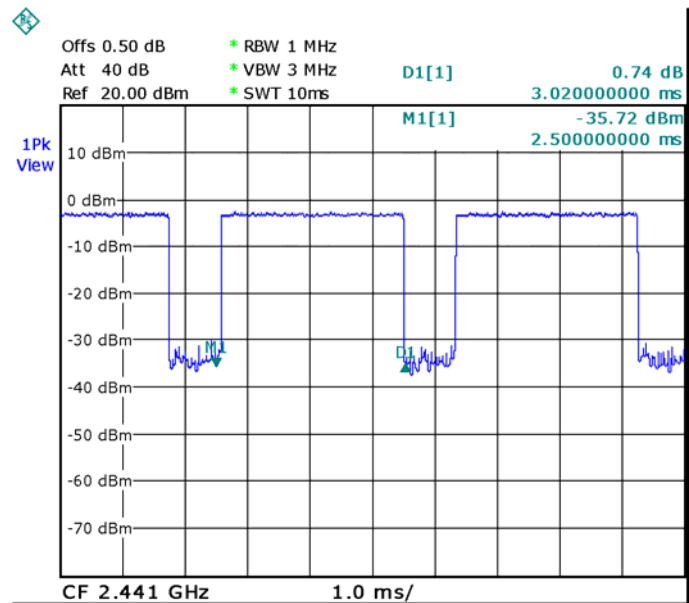

Data Packet:DH5,Upper channel

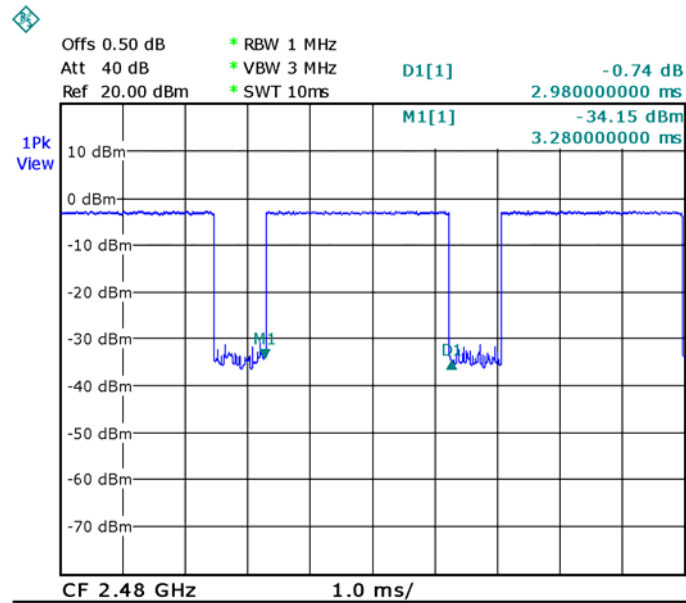

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

17 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

17.1 Requirments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

17.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

17.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, $d=0.2\text{m}$, as well as the gain of the used antenna, the RF power density can be obtained

Modulation	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
GFSK	1	1.87	1.53815464	0.000305999	1
Pi/4DQPSK	1	0.74	1.185768748	0.000235896	1
8DPSK	1	0.90	1.230268771	0.000244748	1

18 Photographs – Test Setup

18.1 Conducted Emissions




18.2 Radiated Emissions


Below 30MHz



From 30-1000MHz

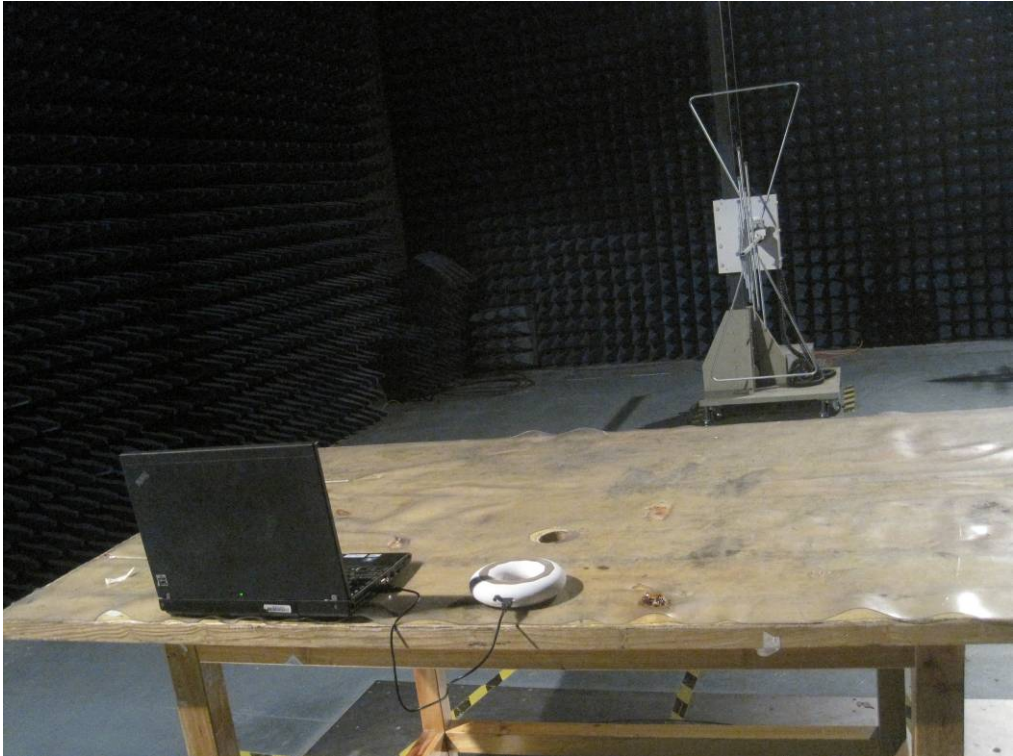

Above 1GHz

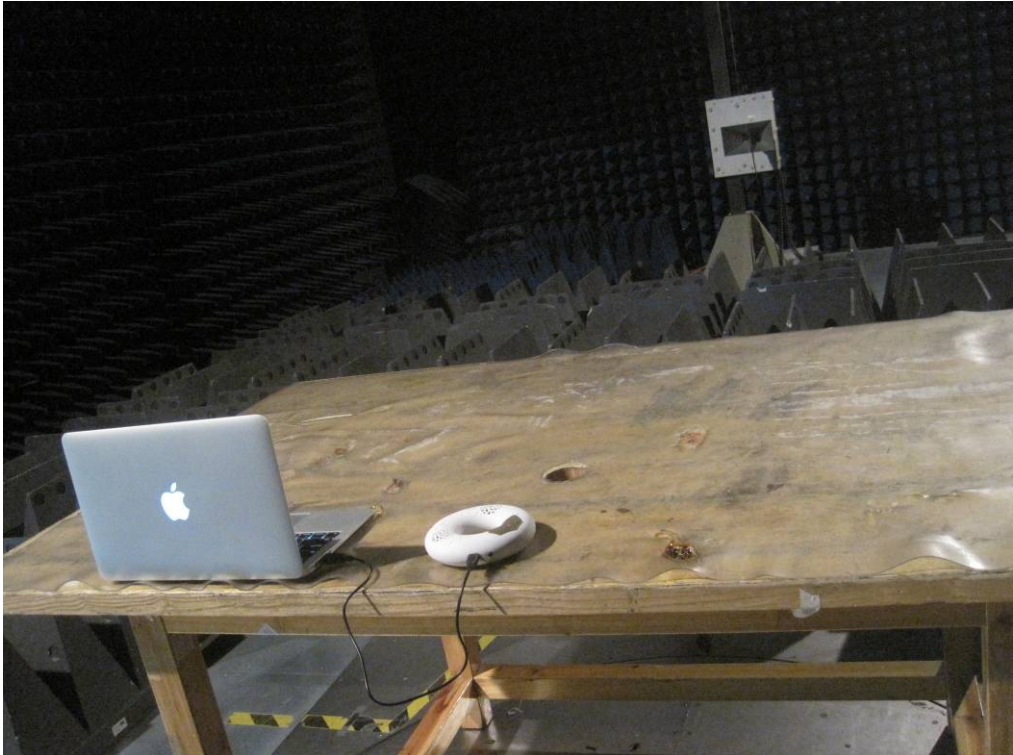


19 Photographs - Constructional Details



19.1 EUT – External View







19.2 EUT – Internal View

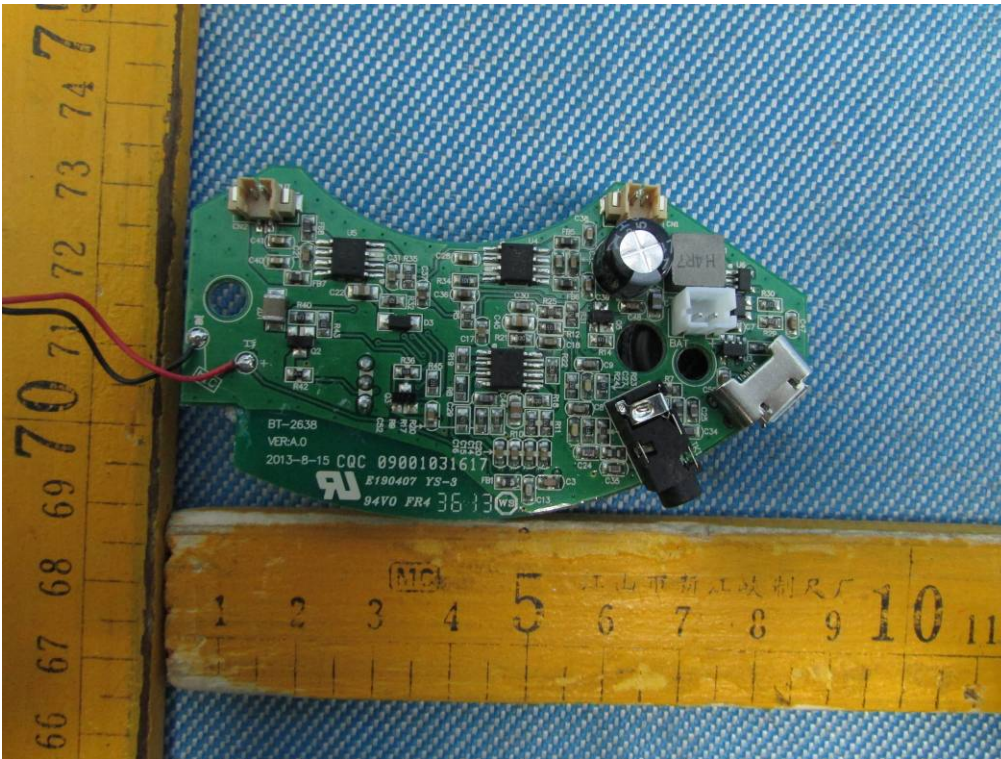

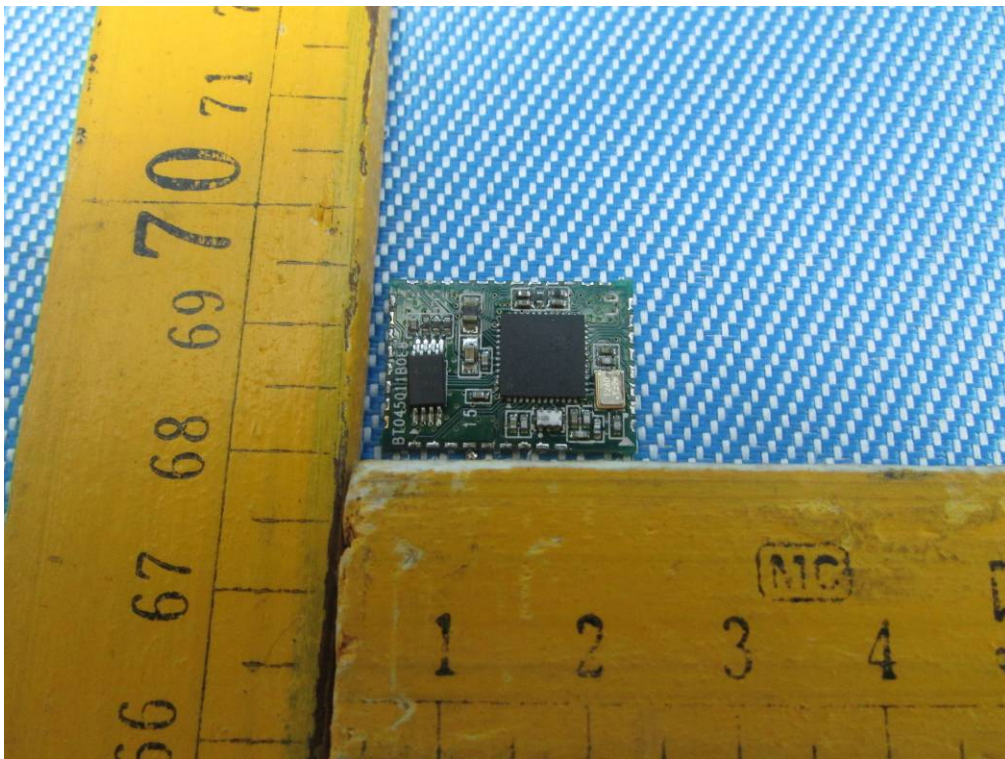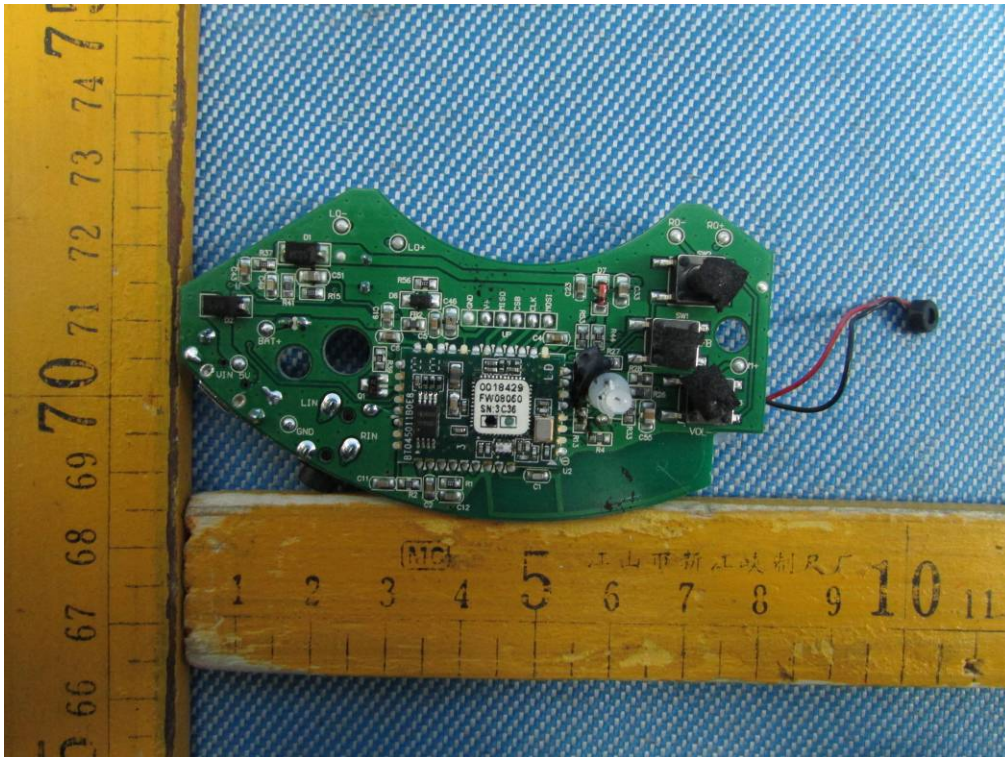

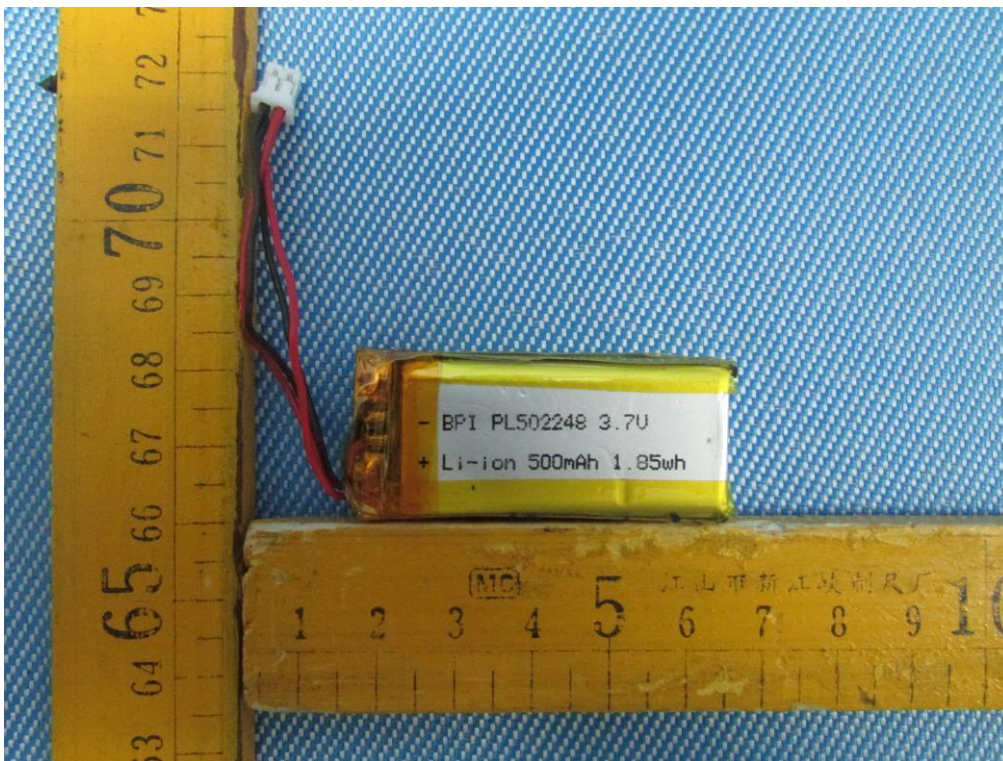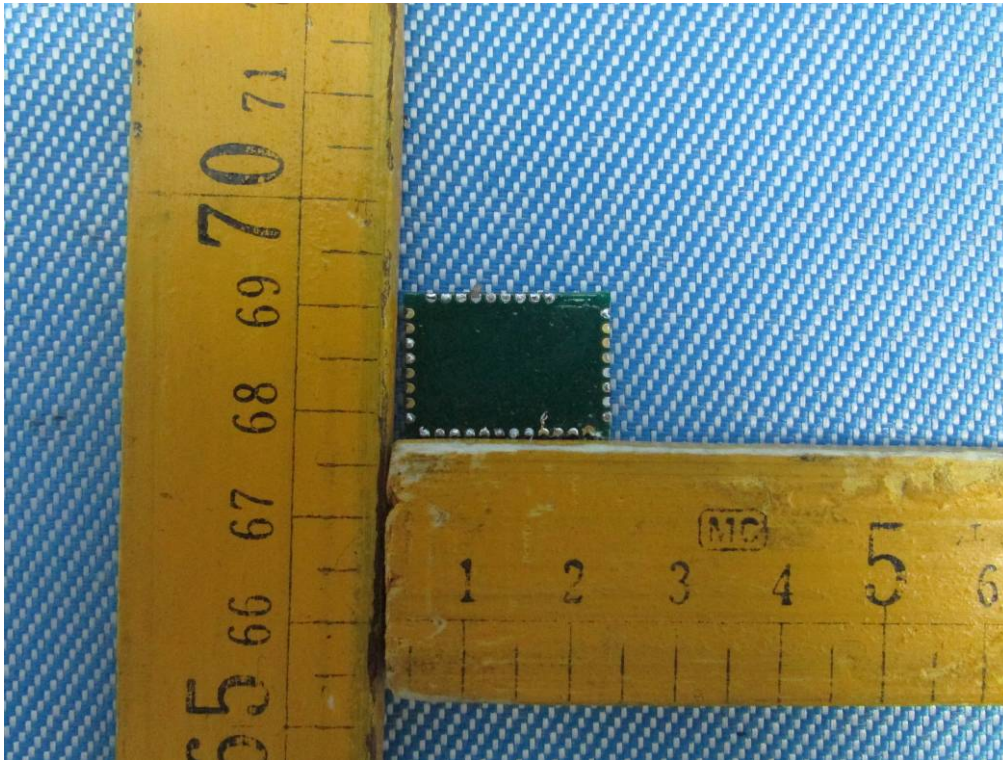

===== End of Test Report =====