



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NEC Platforms, Ltd.
Applicant Address	800 Shimomata, Kakegawa, Shizuoka 436-8501 Japan
FCC ID	2AA5WRGF100L
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.

Product Name	IEEE802.11bgn 2x2 2.4GHz Wi-Fi Repeater
Brand Name	NEC
Model No.	RG-F100L
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Apr. 15, 2015
Final Test Date	Apr. 30, 2015
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10 2009, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	9
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	10
3.11. Test Configurations	11
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Power Measurement.....	19
4.3. Power Spectral Density Measurement	21
4.4. 6dB Spectrum Bandwidth Measurement	28
4.5. Radiated Emissions Measurement	35
4.6. Emissions Measurement	54
4.7. Antenna Requirements	72
5. LIST OF MEASURING EQUIPMENTS	73
6. MEASUREMENT UNCERTAINTY	74
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541501	Rev. 01	Initial issue of report	Jun. 25, 2015



1. VERIFICATION OF COMPLIANCE

Product Name : IEEE802.11bgn 2x2 2.4GHz Wi-Fi Repeater
Brand Name : NEC
Model No. : RG-F100L
Applicant : NEC Platforms, Ltd.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 15, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	3.55 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	6.04 dB
4.3	15.247(e)	Power Spectral Density	Complies	12.94 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.68 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.06 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	IEEE 802.11b: 15.54 MHz IEEE 802.11g: 21.71 MHz IEEE 802.11n MCS0 (HT20): 19.62 MHz IEEE 802.11n MCS0 (HT40): 37.04 MHz
Maximum Conducted Output Power	IEEE 802.11b: 23.96 dBm IEEE 802.11g: 23.89dBm IEEE 802.11n MCS0 (HT20): 23.75 dBm IEEE 802.11n MCS0 (HT40): 20.76 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	<input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

Power	Brand Holder	Model	Rating
Adapter	Channel Well Technology	2AAU005B US	INPUT: 100-240V~50/60Hz 0.2A OUTPUT: 5.0V, 1.0A


3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Printed Antenna	I-PEX	2
2	-	-	Printed Antenna	I-PEX	2

<For IEEE 802.11b/g/n mode (2TX/2RX)>:

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

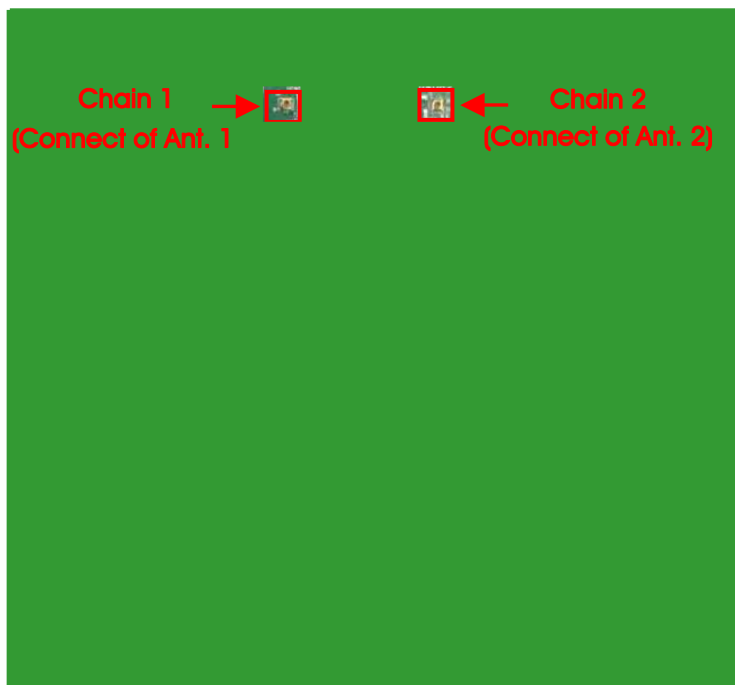

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2

The following test modes were performed for all tests:

There are two modes of EUT, one is AP Mode, the other one is Repeater Mode,

AP Mode has been evaluated to be the worst case after evaluating.

Consequently, measurement for Conducted Emission and Radiated Emission <Below 1GHz> test will follow this same test mode.

For Conducted Emission test:

Mode 1. Normal Link-Repeater Mode

For Radiated Emission test <Below 1GHz>:

Mode 1. Normal Link + X-axis-Repeater Mode

Mode 2. Normal Link + Y-axis-Repeater Mode

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test <Above 1GHz>:

The EUT can be placed in X-axis and Y-axis, After evaluating, Y-axis was the worst case, so it's recorded in this report.

Mode 1. CTX+ Y-axis

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
AP Router	Planex	GW-AP54SGX	KA220030603014-1

For Test Site No: 03CH01-CB <Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	M1340	DoC
Wireless ac AP	Netgear	R6300V2	PY313200227

For Test Site No: 03CH01-CB <Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	RTL819x2.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	41/42	43/45	43/45	-	-	-
802.11g	42/43	54/55	43/43	-	-	-
802.11n MCS0 HT20	42/42	54/55	44/44	-	-	-
802.11n MCS0 HT40	-	-	-	45/45	48/48	46/46

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	100.000	100.000	100.00%	0.00	0.01
802.11g	100.000	100.000	100.00%	0.00	0.01
802.11n MCS0 HT20	100.000	100.000	100.00%	0.00	0.01
802.11n MCS0 HT40	100.000	100.000	100.00%	0.00	0.01

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

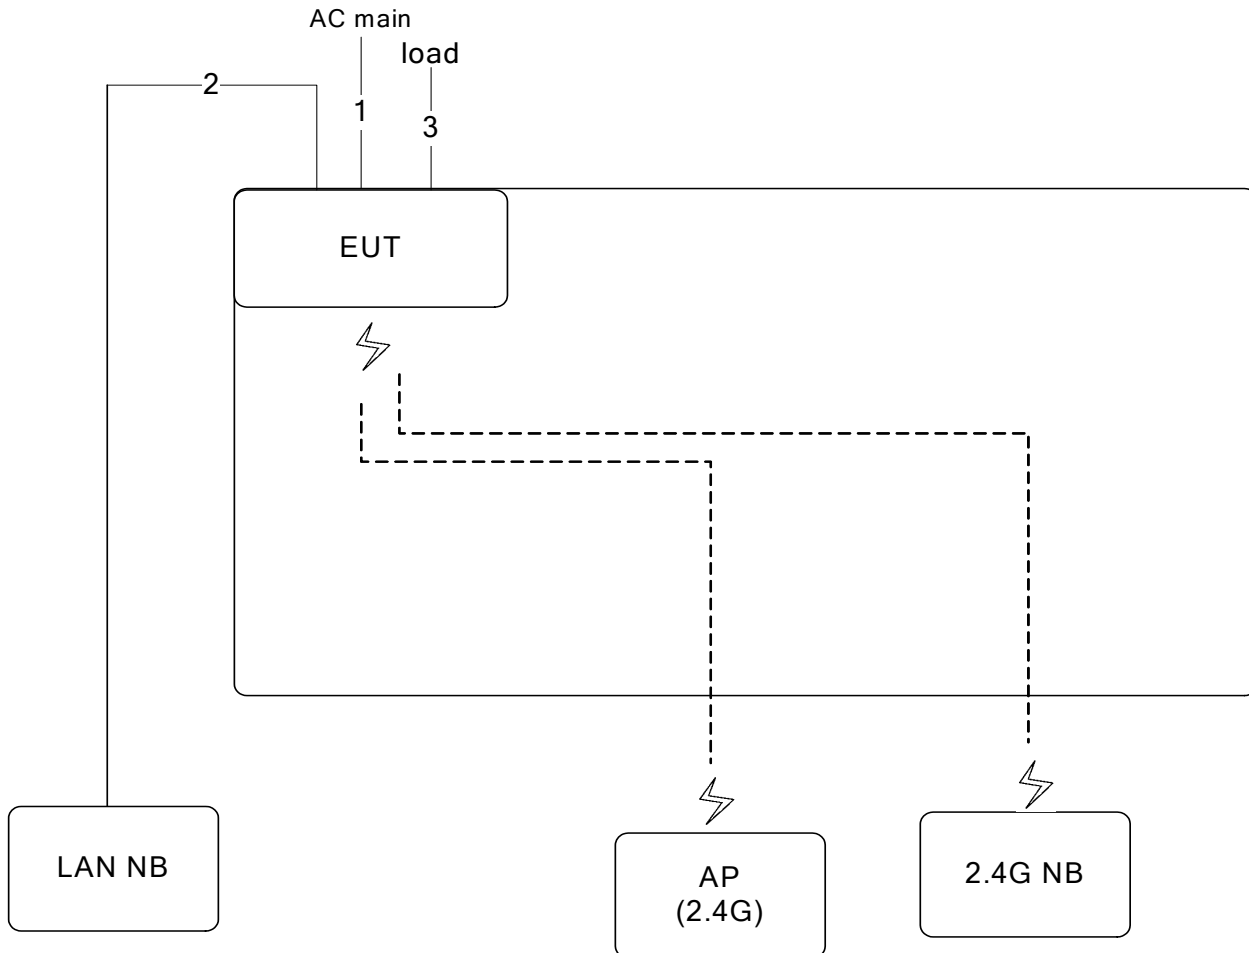

Item	Connection	Shielded	Length(m)	Remark
1	Power cable	No	1.2m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable*3	No	1.5m	Load


3.11.2. Radiation Emissions Test Configuration

Test Configuration: Below 1GHz

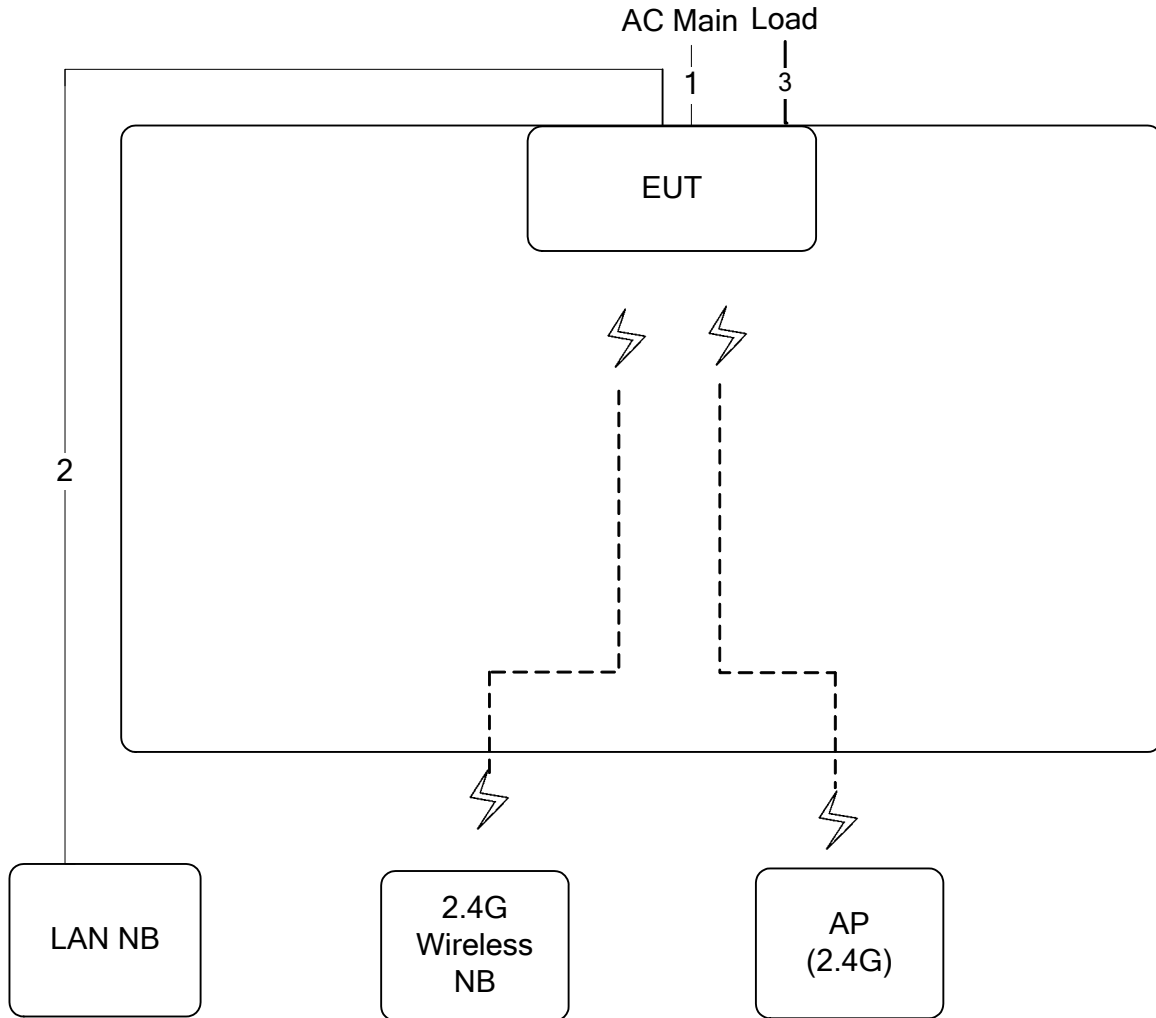

Item	Connection	Shielded	Length(m)	Remark
1	Power cable	No	1.2m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable*3	No	1.5m	Load

Test Configuration: above 1GHz

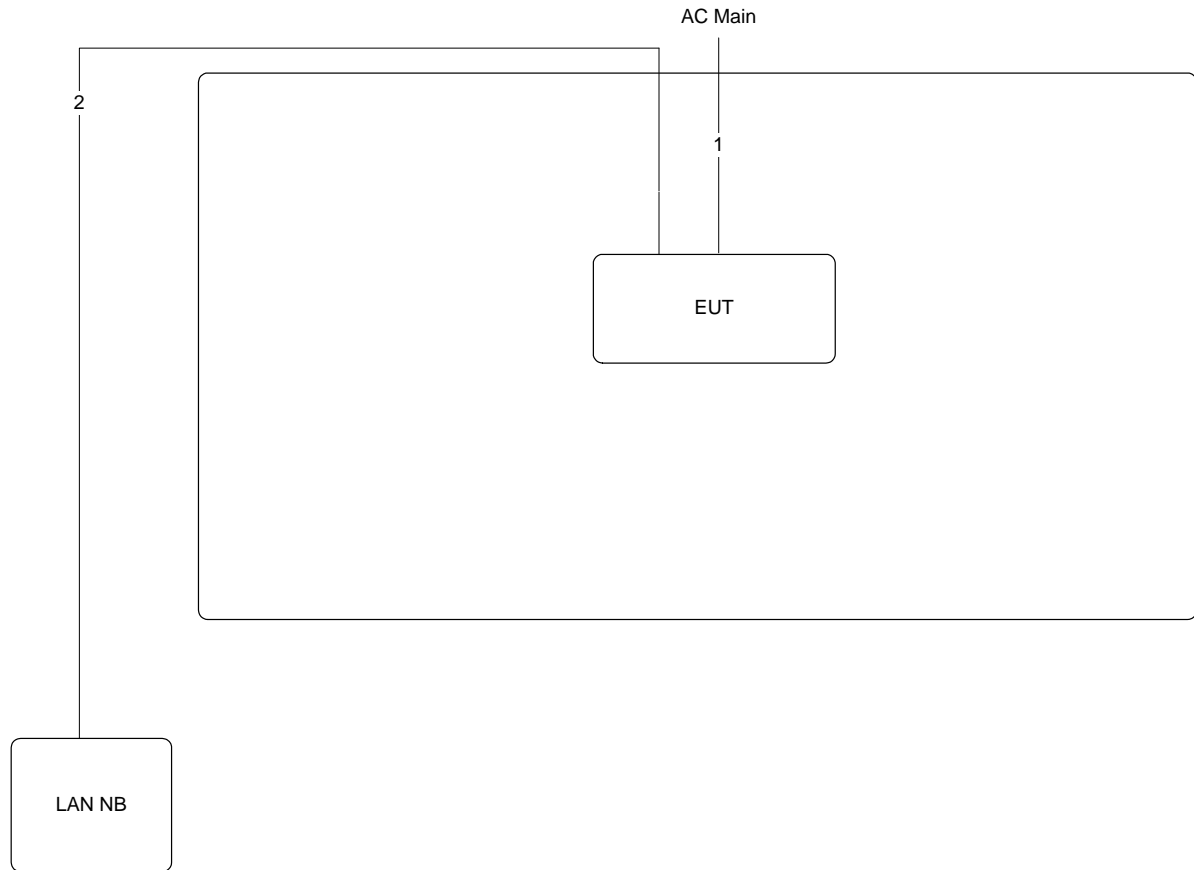

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

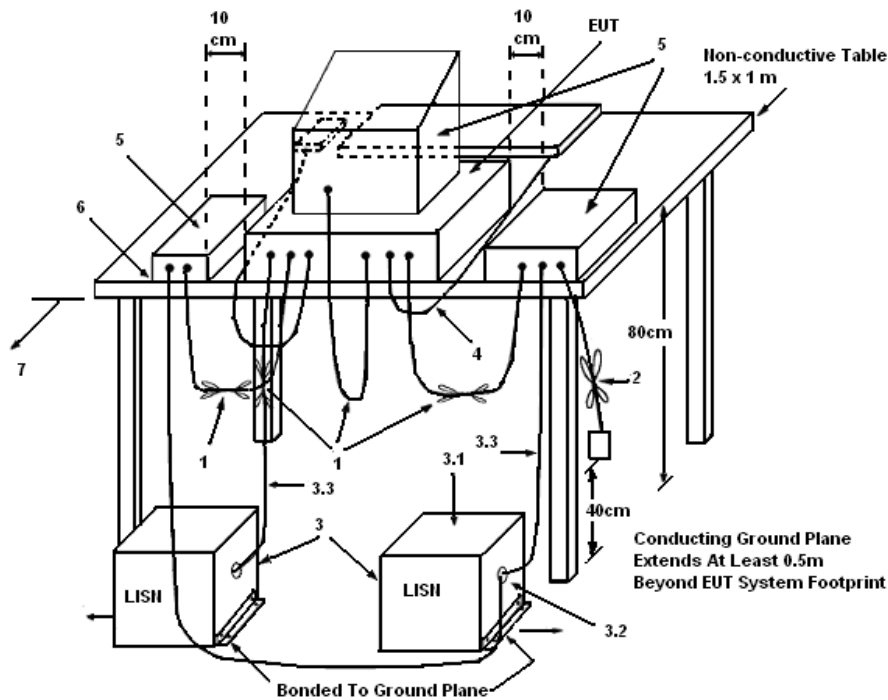

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

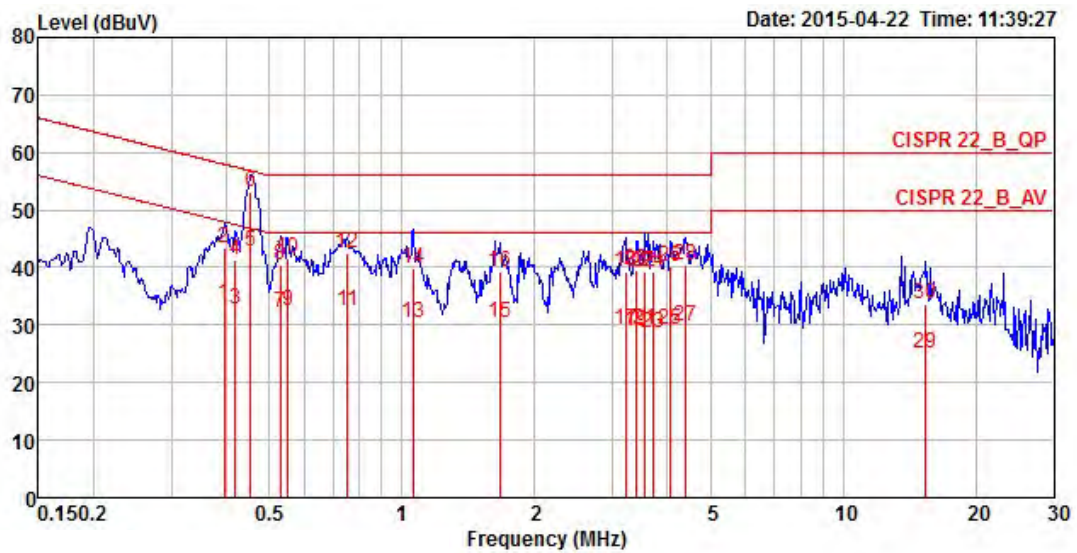


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.40	33.63	-14.32	47.95	23.56	10.03	0.04	LINE	Average
2	0.40	43.52	-14.43	57.95	33.45	10.03	0.04	LINE	QP
3	0.42	32.90	-14.56	47.46	22.83	10.03	0.04	LINE	Average
4	0.42	41.26	-16.20	57.46	31.19	10.03	0.04	LINE	QP
5	0.45	42.82	-3.98	46.80	32.75	10.03	0.04	LINE	Average
6	0.45	53.25	-3.55	56.80	43.18	10.03	0.04	LINE	QP
7	0.53	32.08	-13.92	46.00	22.01	10.03	0.04	LINE	Average
8	0.53	40.58	-15.42	56.00	30.51	10.03	0.04	LINE	QP
9	0.55	32.40	-13.60	46.00	22.33	10.03	0.04	LINE	Average
10	0.55	41.70	-14.30	56.00	31.63	10.03	0.04	LINE	QP
11	0.75	32.60	-13.40	46.00	22.54	10.02	0.04	LINE	Average
12	0.75	42.51	-13.49	56.00	32.45	10.02	0.04	LINE	QP
13	1.06	30.51	-15.49	46.00	20.43	10.03	0.05	LINE	Average
14	1.06	39.72	-16.28	56.00	29.64	10.03	0.05	LINE	QP
15	1.66	30.36	-15.64	46.00	20.27	10.03	0.06	LINE	Average
16	1.66	39.30	-16.70	56.00	29.21	10.03	0.06	LINE	QP
17	3.21	29.09	-16.91	46.00	19.01	10.03	0.05	LINE	Average



	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
18	3.21	39.18	-16.82	56.00	29.10	10.03	0.05	LINE	QP
19	3.40	28.79	-17.21	46.00	18.70	10.03	0.06	LINE	Average
20	3.40	39.65	-16.35	56.00	29.56	10.03	0.06	LINE	QP
21	3.57	29.10	-16.90	46.00	19.01	10.03	0.06	LINE	Average
22	3.57	39.37	-16.63	56.00	29.28	10.03	0.06	LINE	QP
23	3.70	28.75	-17.25	46.00	18.66	10.03	0.06	LINE	Average
24	3.70	39.21	-16.79	56.00	29.12	10.03	0.06	LINE	QP
25	4.07	29.37	-16.63	46.00	19.27	10.03	0.07	LINE	Average
26	4.07	40.16	-15.84	56.00	30.06	10.03	0.07	LINE	QP
27	4.38	29.93	-16.07	46.00	19.82	10.03	0.08	LINE	Average
28	4.38	40.55	-15.45	56.00	30.44	10.03	0.08	LINE	QP
29	15.39	25.22	-24.78	50.00	14.82	10.14	0.26	LINE	Average
30	15.39	33.71	-26.29	60.00	23.31	10.14	0.26	LINE	QP

Temperature	23°C	Humidity	54%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

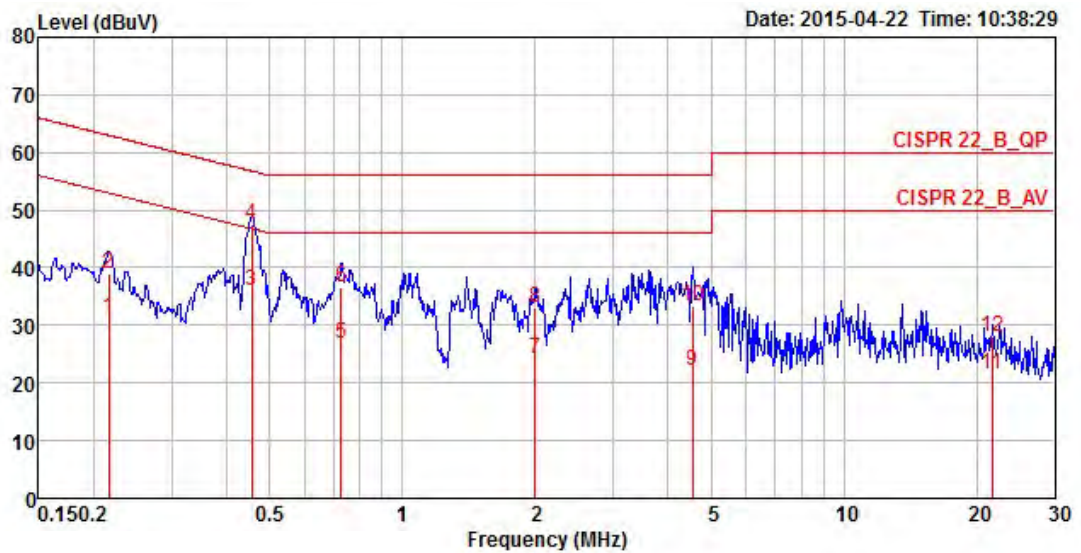

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.22	31.24	-21.72	52.96	21.25	9.97	0.02	NEUTRAL	Average
2	0.22	38.92	-24.04	62.96	28.93	9.97	0.02	NEUTRAL	QP
3	0.46	35.93	-10.83	46.76	26.01	9.88	0.04	NEUTRAL	Average
4	0.46	47.60	-9.16	56.76	37.68	9.88	0.04	NEUTRAL	QP
5	0.73	26.96	-19.04	46.00	17.04	9.88	0.04	NEUTRAL	Average
6	0.73	36.75	-19.25	56.00	26.83	9.88	0.04	NEUTRAL	QP
7	2.00	24.30	-21.70	46.00	14.35	9.89	0.06	NEUTRAL	Average
8	2.00	33.21	-22.79	56.00	23.26	9.89	0.06	NEUTRAL	QP
9	4.55	22.22	-23.78	46.00	12.24	9.89	0.09	NEUTRAL	Average
10	4.55	33.31	-22.69	56.00	23.33	9.89	0.09	NEUTRAL	QP
11	21.71	21.59	-28.41	50.00	11.21	10.11	0.27	NEUTRAL	Average
12	21.71	28.19	-31.81	60.00	17.81	10.11	0.27	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

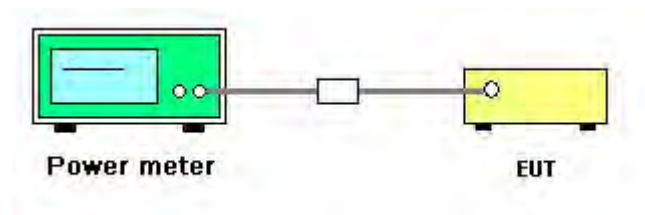

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24.1°C	Humidity	64%
Test Engineer	Lucas Huang	Test Date	Apr. 30, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11b	2412 MHz	20.23	20.03	23.14	30.00	Complies
	2437 MHz	20.95	20.94	23.96	30.00	Complies
	2462 MHz	20.73	20.55	23.65	30.00	Complies
802.11g	2412 MHz	16.77	16.98	19.89	30.00	Complies
	2437 MHz	20.83	20.93	23.89	30.00	Complies
	2462 MHz	16.61	16.55	19.59	30.00	Complies
802.11n MCS0 HT20	2412 MHz	16.81	16.55	19.69	30.00	Complies
	2437 MHz	20.68	20.80	23.75	30.00	Complies
	2462 MHz	17.65	17.40	20.54	30.00	Complies
802.11n MCS0 HT40	2422 MHz	16.87	17.02	19.96	30.00	Complies
	2437 MHz	17.88	17.61	20.76	30.00	Complies
	2452 MHz	16.93	16.77	19.86	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

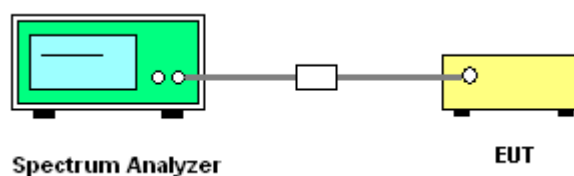

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24.1°C	Humidity	64%
Test Engineer	Lucas Huang		


Mode	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
802.11b	2412 MHz	-9.76	-10.26	-6.99	8.00	Complies
	2437 MHz	-9.51	-9.34	-6.41	8.00	Complies
	2462 MHz	-9.93	-9.64	-6.77	8.00	Complies
802.11g	2412 MHz	-12.27	-12.69	-9.46	8.00	Complies
	2437 MHz	-7.60	-8.34	-4.94	8.00	Complies
	2462 MHz	-14.50	-13.67	-11.05	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-12.85	-12.57	-9.70	8.00	Complies
	2437 MHz	-7.27	-7.11	-4.18	8.00	Complies
	2462 MHz	-11.38	-11.03	-8.19	8.00	Complies
802.11n MCS0 HT40	2422 MHz	-12.47	-12.63	-9.54	8.00	Complies
	2437 MHz	-10.98	-12.21	-8.54	8.00	Complies
	2452 MHz	-13.23	-12.62	-9.90	8.00	Complies

Note 1: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.01 \text{ dBi} < 6 \text{ dBi}$, so the limit doesn't reduce.


Note 2: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

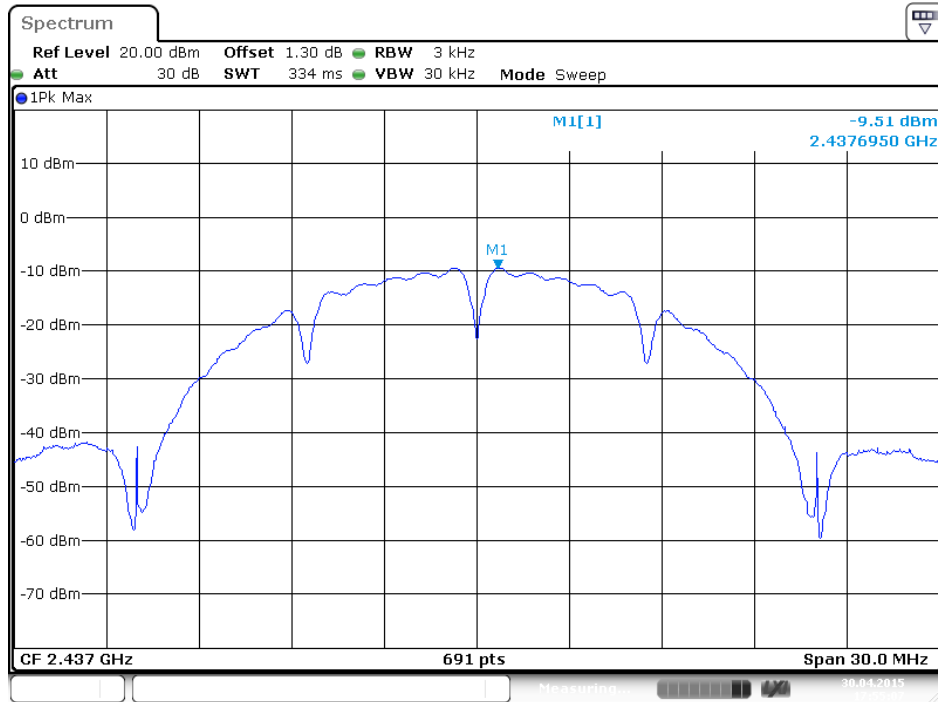


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

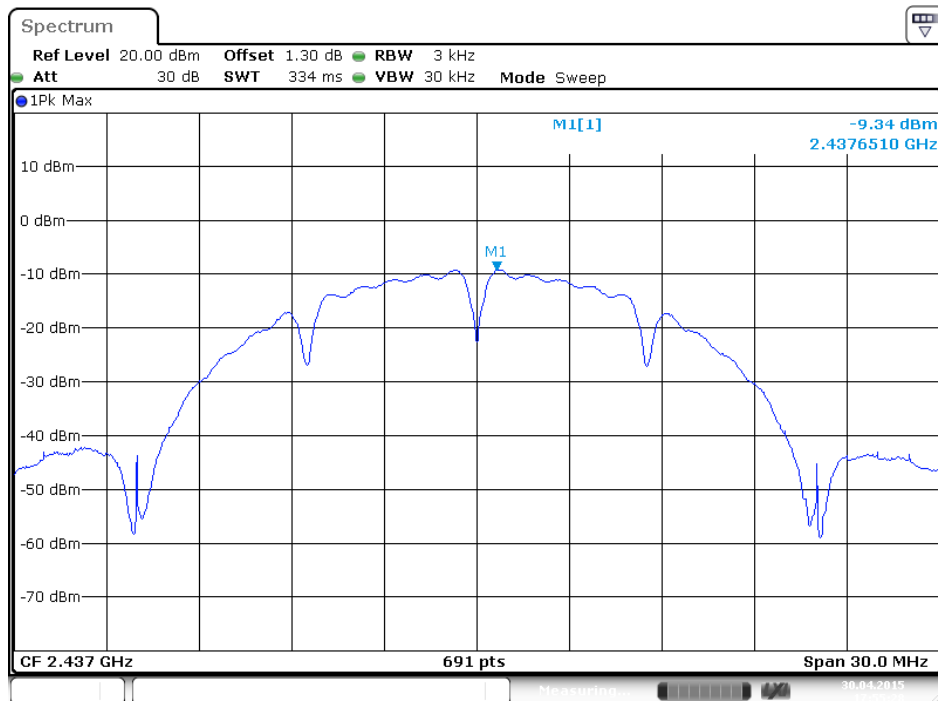


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

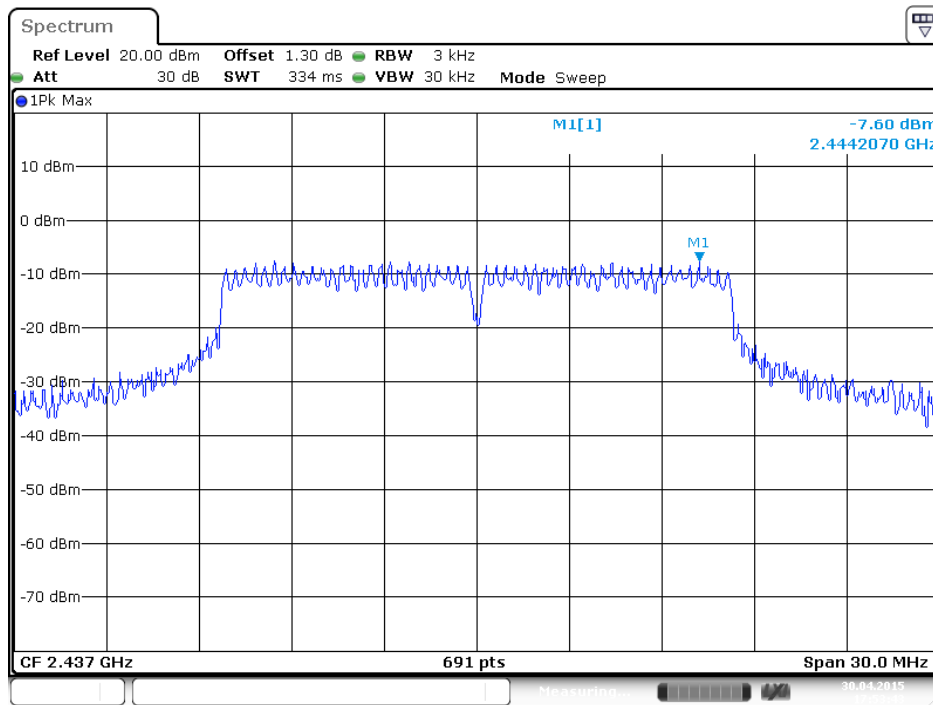


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

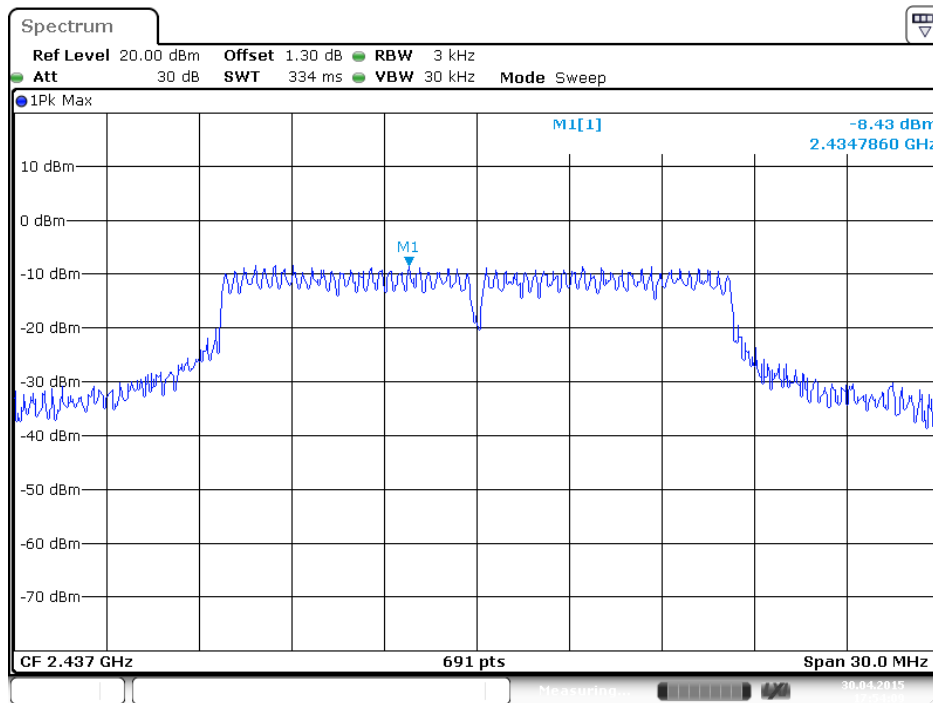


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

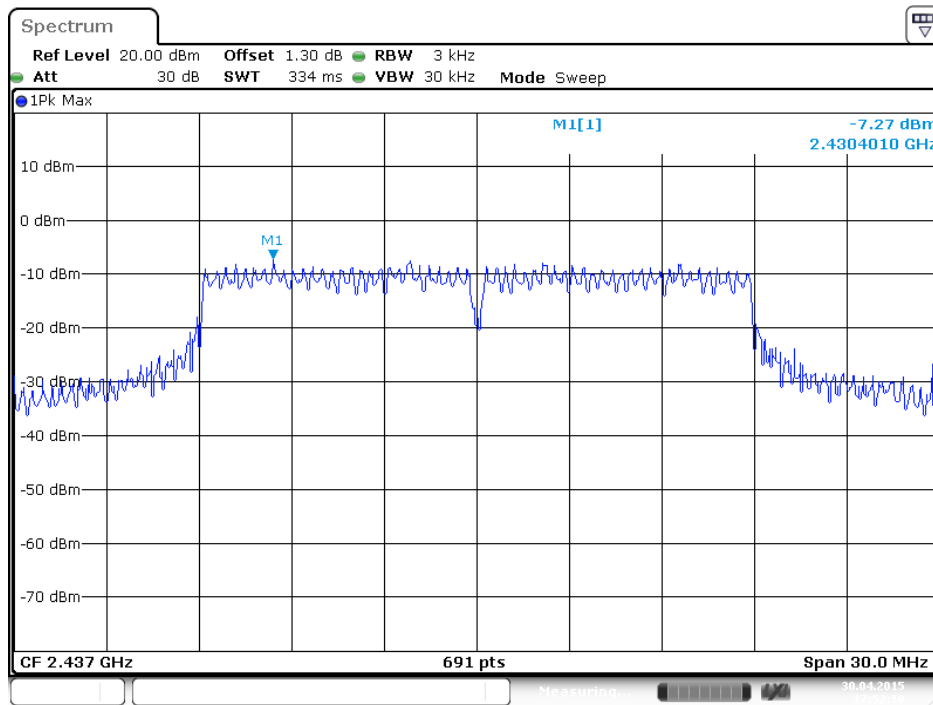


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

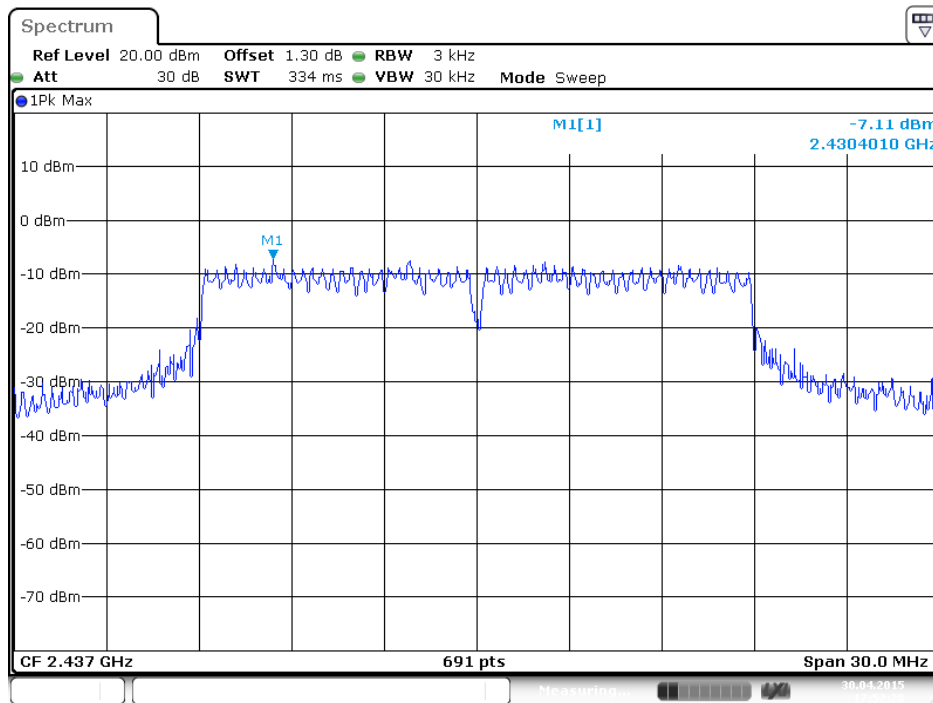

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

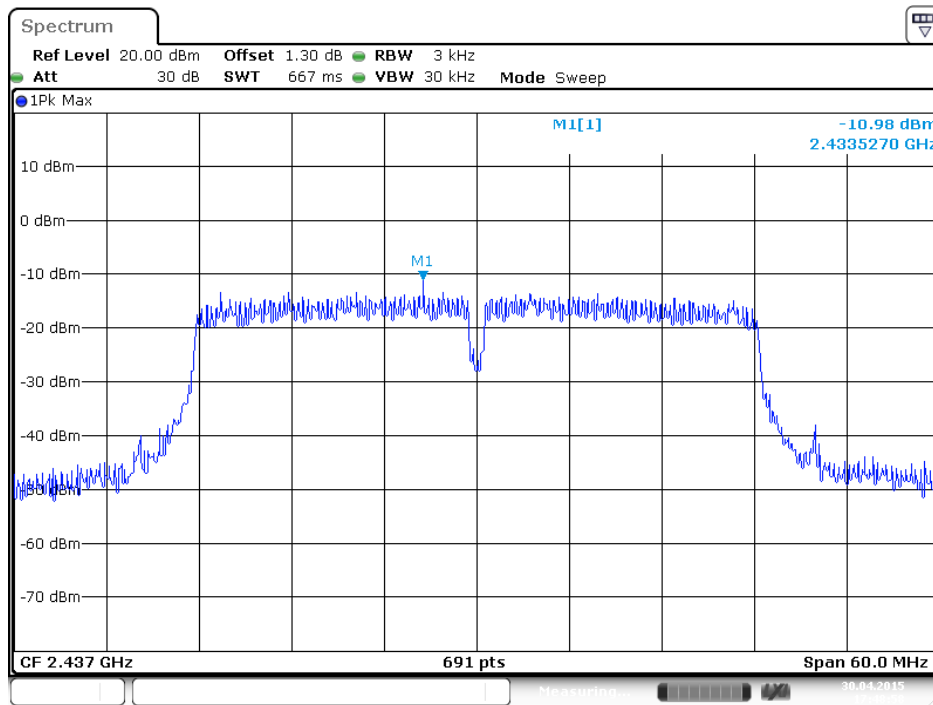

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

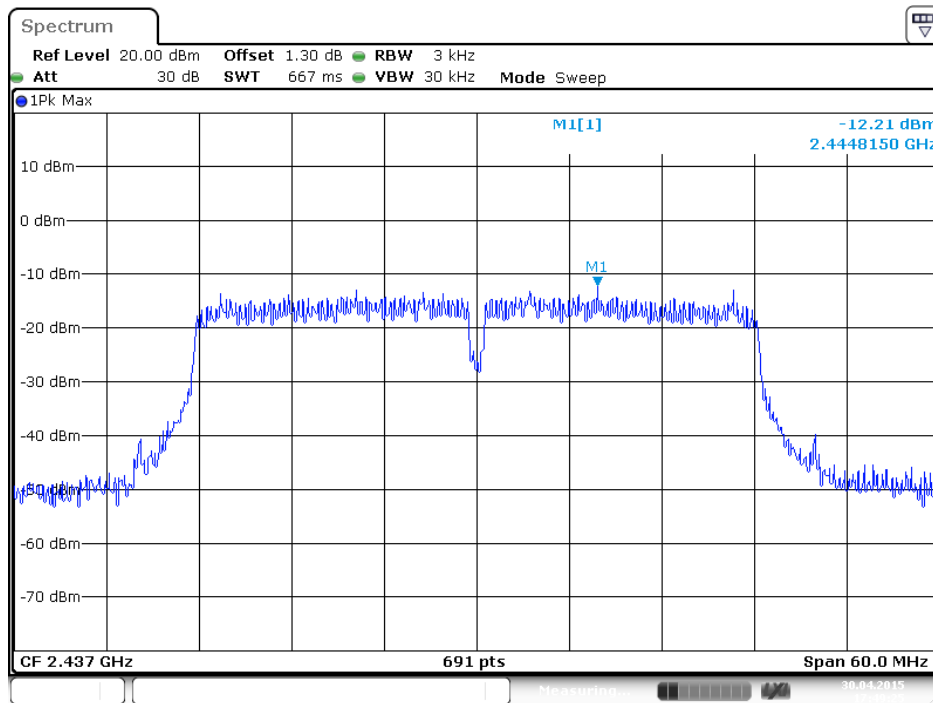

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	24.1°C	Humidity	64%
Test Engineer	Lucas Huang		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	10.87	15.54	500	Complies
	2437 MHz	10.87	15.45	500	Complies
	2462 MHz	10.87	15.36	500	Complies
802.11g	2412 MHz	12.96	15.89	500	Complies
	2437 MHz	16.58	21.71	500	Complies
	2462 MHz	12.70	15.89	500	Complies
802.11n MCS0 HT20	2412 MHz	17.85	18.06	500	Complies
	2437 MHz	17.85	19.62	500	Complies
	2462 MHz	17.85	18.06	500	Complies
802.11n MCS0 HT40	2422 MHz	36.41	36.90	500	Complies
	2437 MHz	36.41	37.04	500	Complies
	2452 MHz	36.41	36.90	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2

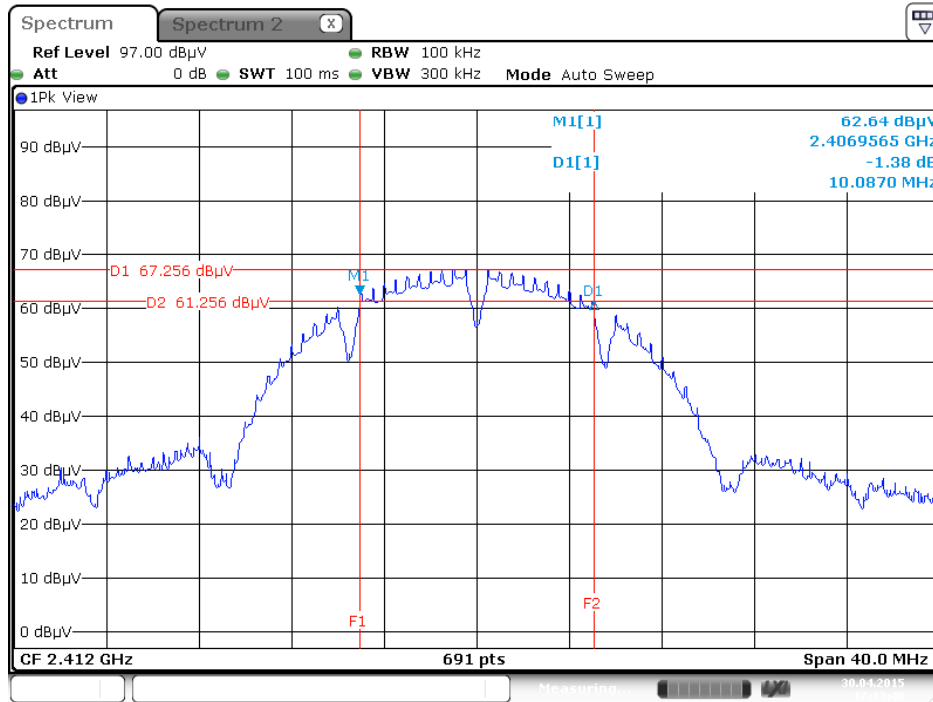


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2

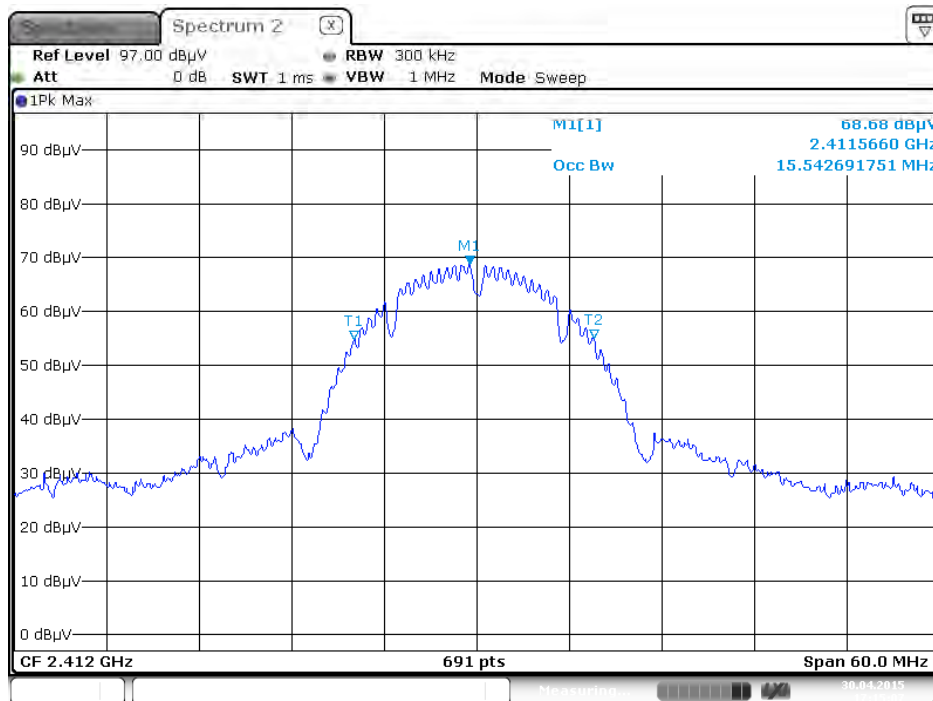


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2

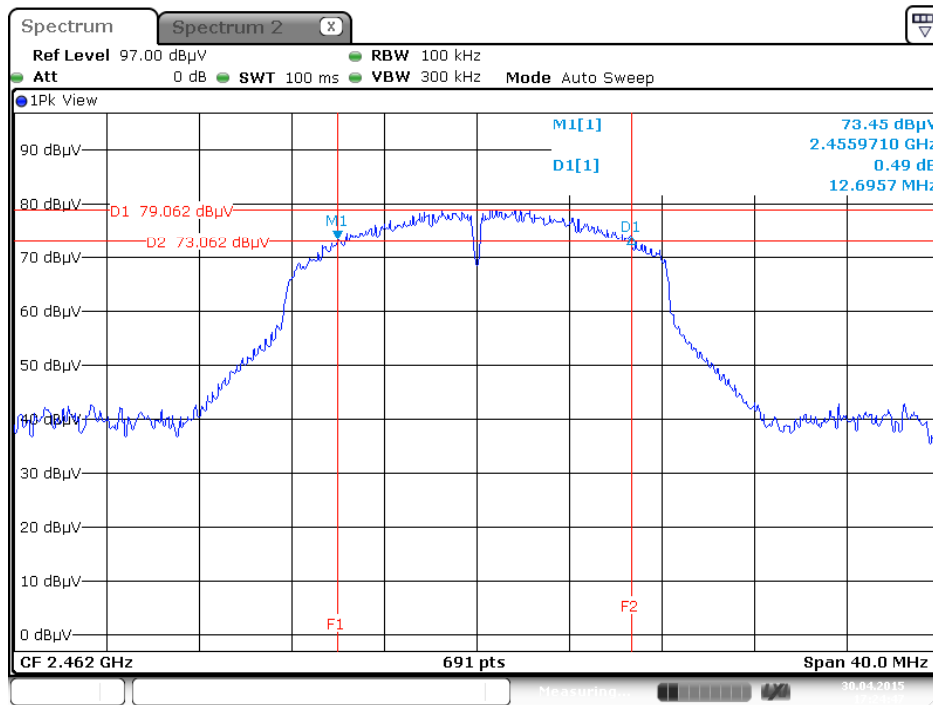


99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2

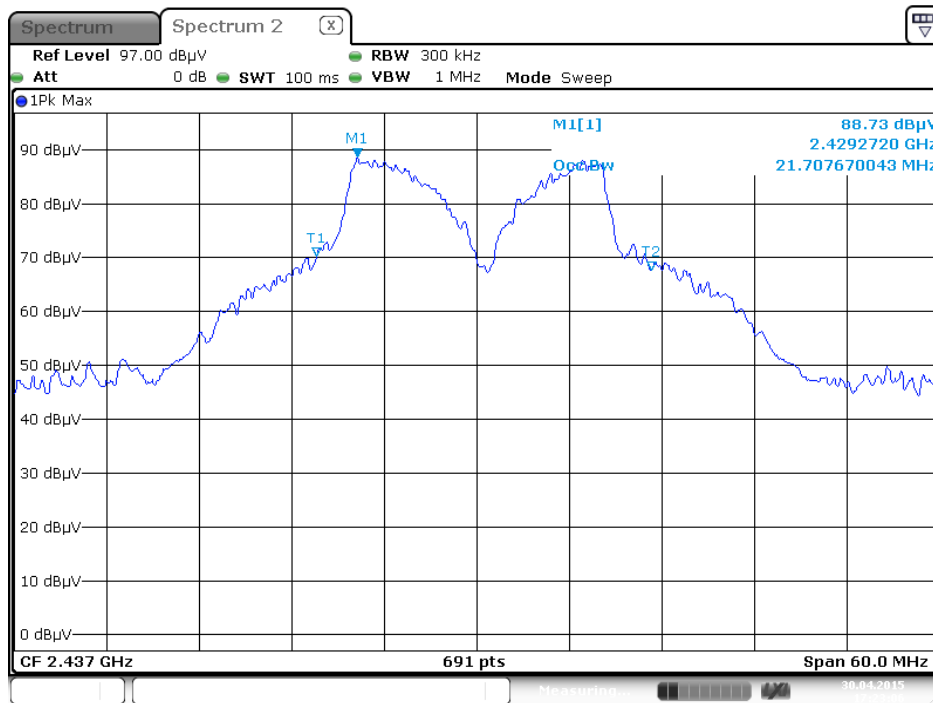


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2

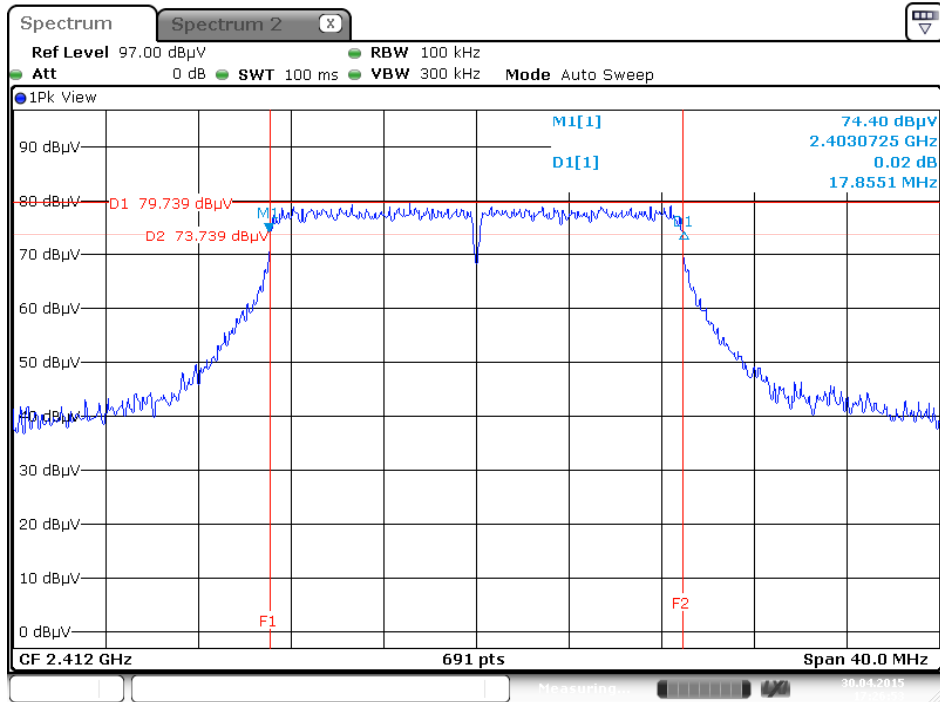

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2

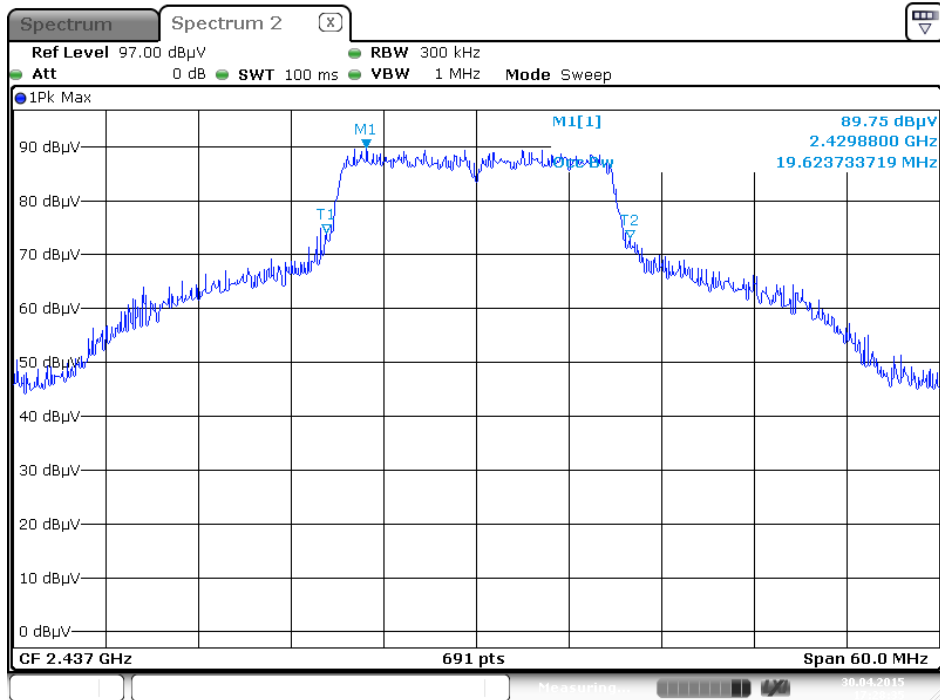


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2

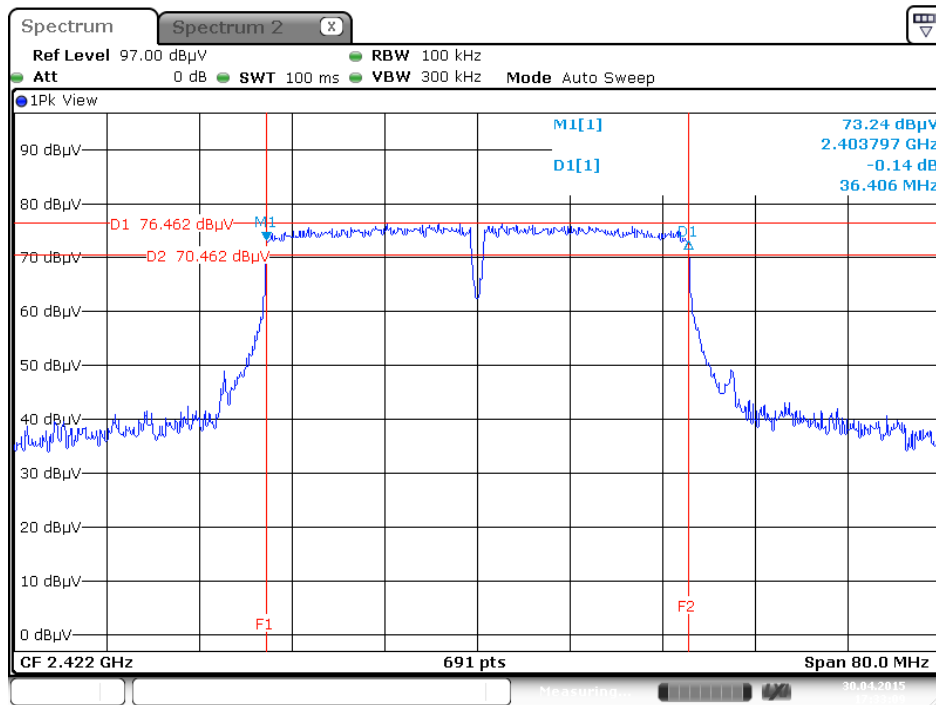

Date: 30.APR.2015 17:33:09

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2

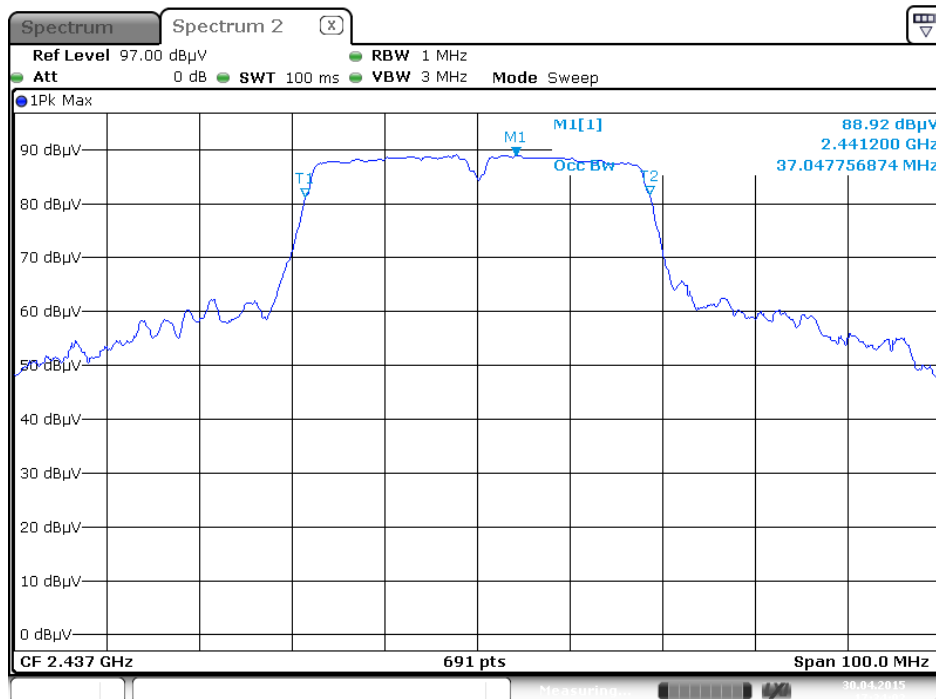

Date: 30.APR.2015 17:34:03

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

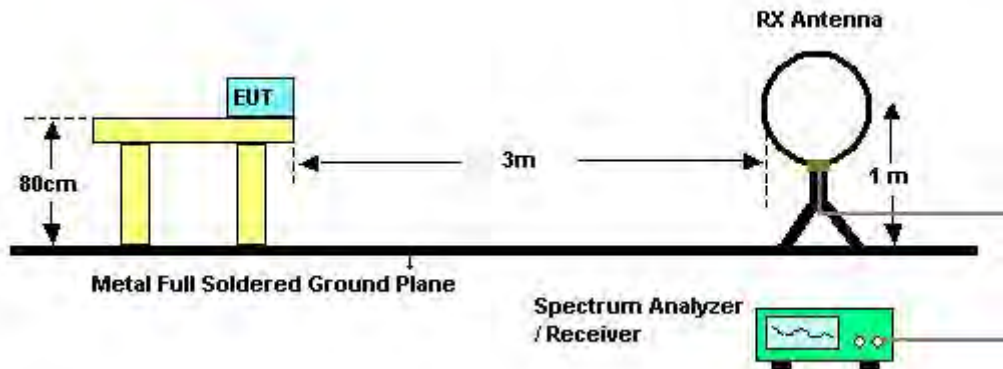

For Radiated Emissions: 30MHz~1GHz

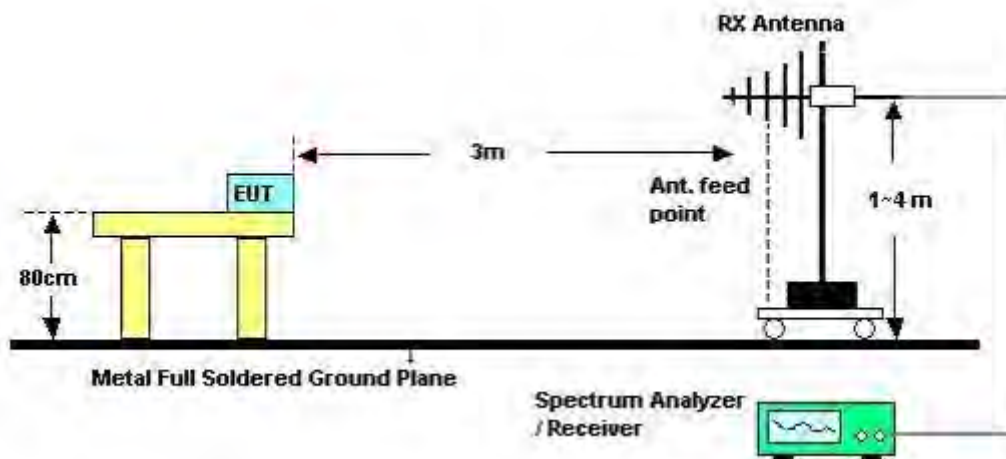

For Radiated Emissions: Above 1GHz

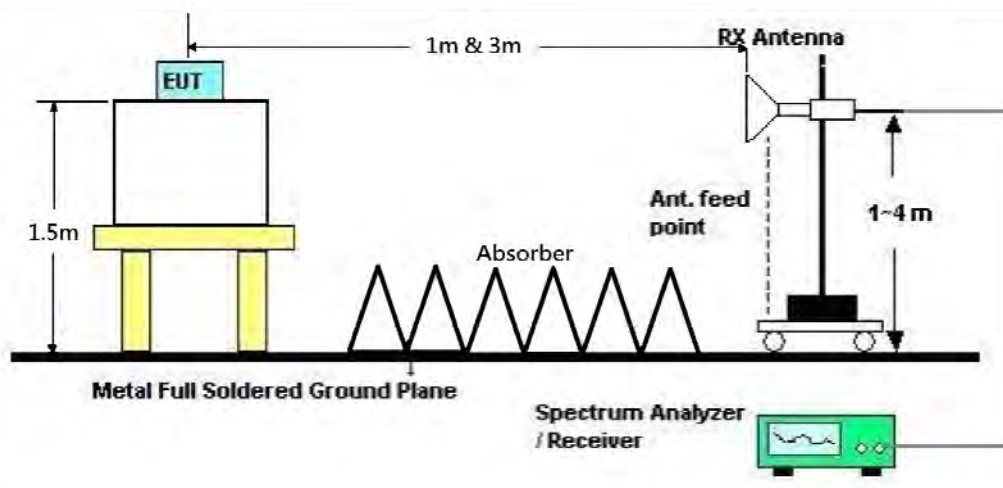

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	Normal Link
Test Date	Apr. 30, 2015	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

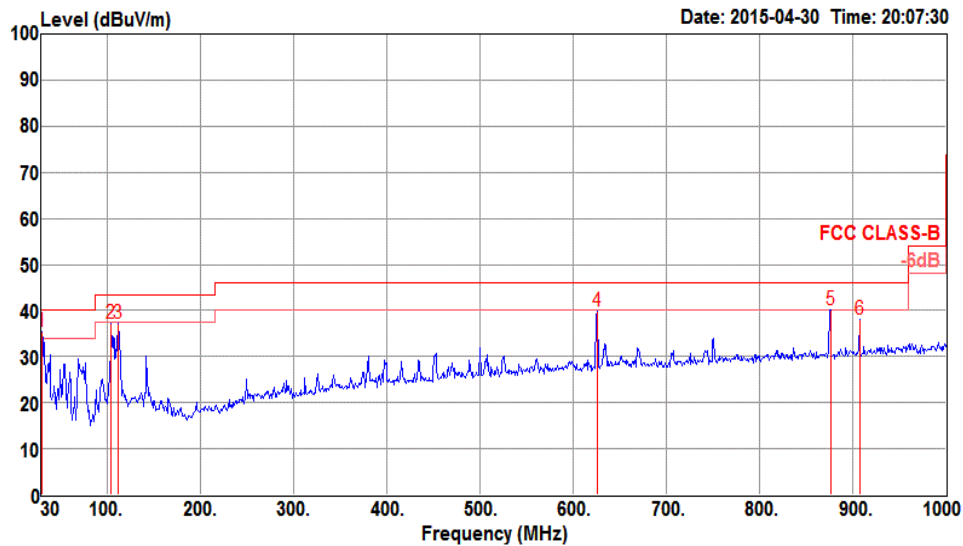

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.00	35.38	40.00	-4.62	46.88	0.64	20.10	32.24	100	179	QP	HORIZONTAL
2	104.69	37.11	43.50	-6.39	56.72	0.96	11.70	32.27	150	360	QP	HORIZONTAL
3	112.45	37.27	43.50	-6.23	56.11	0.99	12.44	32.27	100	322	QP	HORIZONTAL
4	625.58	39.90	46.00	-6.10	50.71	2.08	19.35	32.24	150	169	QP	HORIZONTAL
5	875.84	40.09	46.00	-5.91	47.86	2.40	21.51	31.68	200	175	QP	HORIZONTAL
6	906.88	37.94	46.00	-8.06	45.09	2.44	21.74	31.33	125	186	QP	HORIZONTAL

Vertical

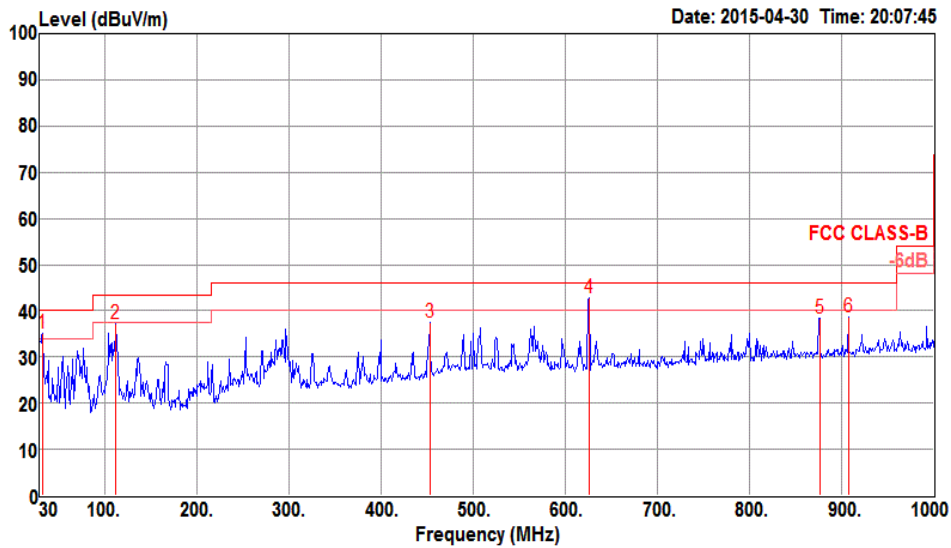

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	32.91	35.04	40.00	-4.96	48.33	0.64	18.30	32.23	150	266 QP	VERTICAL
2	112.45	37.19	43.50	-6.31	56.04	0.99	12.43	32.27	100	256 QP	VERTICAL
3	452.92	37.45	46.00	-8.55	50.59	1.82	17.14	32.10	100	155 QP	VERTICAL
4	625.58	42.73	46.00	-3.27	53.53	2.08	19.36	32.24	100	175 QP	VERTICAL
5	875.84	38.37	46.00	-7.63	46.14	2.40	21.51	31.68	100	93 QP	VERTICAL
6	906.88	38.62	46.00	-7.38	45.77	2.44	21.74	31.33	100	185 QP	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2
Test Date	Apr. 28, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4823.99	47.09	54.00	-6.91	42.65	31.09	7.05	33.70	192	10	HORIZONTAL	Average
2	4824.04	51.65	74.00	-22.35	47.21	31.09	7.05	33.70	192	10	HORIZONTAL	Peak
3	7235.18	54.82	74.00	-19.18	44.08	35.87	8.80	33.93	198	64	HORIZONTAL	Peak
4	7235.20	44.34	54.00	-9.66	33.60	35.87	8.80	33.93	198	64	HORIZONTAL	Average
5	14471.92	63.58	74.00	-10.42	44.51	41.27	12.37	34.57	173	163	HORIZONTAL	Peak
6	14471.97	52.59	54.00	-1.41	33.52	41.27	12.37	34.57	173	163	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4823.98	49.36	54.00	-4.64	44.93	31.08	7.05	33.70	158	83	VERTICAL	Average
2	4824.08	53.18	74.00	-20.82	48.75	31.08	7.05	33.70	158	83	VERTICAL	Peak
3	12060.09	60.61	74.00	-13.39	45.52	38.86	11.26	35.03	174	265	VERTICAL	Peak
4	12060.78	49.32	54.00	-4.68	34.23	38.86	11.26	35.03	174	265	VERTICAL	Average
5	14471.86	64.85	74.00	-9.15	45.75	41.30	12.37	34.57	209	288	VERTICAL	Peak
6	14472.00	53.32	54.00	-0.68	34.22	41.30	12.37	34.57	209	288	VERTICAL	Average

Temperature	26°C	Humidity	62%
Test Engineer	Paul Chen	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2
Test Date	Apr. 28, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4873.90	50.03	74.00	-23.97	45.44	31.18	7.09	33.68	207	360	HORIZONTAL	Peak
2	4873.99	43.59	54.00	-10.41	39.00	31.18	7.09	33.68	207	360	HORIZONTAL	Average
3	7310.20	44.63	54.00	-9.37	33.72	36.05	8.86	34.00	203	65	HORIZONTAL	Average
4	7311.38	55.08	74.00	-18.92	44.16	36.06	8.86	34.00	203	65	HORIZONTAL	Peak
5	14621.95	64.13	74.00	-9.87	45.10	41.15	12.43	34.55	170	132	HORIZONTAL	Peak
6	14621.96	52.64	54.00	-1.36	33.61	41.15	12.43	34.55	170	132	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4873.99	47.06	54.00	-6.94	42.47	31.18	7.09	33.68	197	82	VERTICAL	Average
2	4874.11	51.95	74.00	-22.05	47.36	31.18	7.09	33.68	197	82	VERTICAL	Peak
3	7310.23	46.08	54.00	-7.92	35.17	36.05	8.86	34.00	197	86	VERTICAL	Average
4	7310.91	56.29	74.00	-17.71	45.38	36.05	8.86	34.00	197	86	VERTICAL	Peak
5	14621.87	63.40	74.00	-10.60	44.37	41.15	12.43	34.55	207	287	VERTICAL	Peak
6	14621.95	51.75	54.00	-2.25	32.72	41.15	12.43	34.55	207	287	VERTICAL	Average

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2
Test Date	Apr. 28, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4924.00	35.51	54.00	-18.49	30.78	31.27	7.13	33.67	137	179	HORIZONTAL	Average
2	4924.35	46.95	74.00	-27.05	42.22	31.27	7.13	33.67	137	179	HORIZONTAL	Peak
3	7384.52	39.23	54.00	-14.77	28.15	36.23	8.92	34.07	217	295	HORIZONTAL	Average
4	7384.65	53.98	74.00	-20.02	42.90	36.23	8.92	34.07	217	295	HORIZONTAL	Peak
5	14771.48	62.58	74.00	-11.42	43.65	40.97	12.49	34.53	171	139	HORIZONTAL	Peak
6	14771.96	50.18	54.00	-3.82	31.25	40.97	12.49	34.53	171	139	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4923.93	49.12	74.00	-24.88	44.38	31.28	7.13	33.67	168	87	VERTICAL	Peak
2	4923.96	42.95	54.00	-11.05	38.21	31.28	7.13	33.67	168	87	VERTICAL	Average
3	7385.29	46.99	54.00	-7.01	35.89	36.25	8.92	34.07	218	75	VERTICAL	Average
4	7387.23	56.20	74.00	-17.80	45.10	36.25	8.92	34.07	218	75	VERTICAL	Peak
5	14771.97	51.10	54.00	-2.90	32.19	40.95	12.49	34.53	206	85	VERTICAL	Average
6	14772.54	62.87	74.00	-11.13	43.96	40.95	12.49	34.53	206	85	VERTICAL	Peak



Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4828.36	33.95	54.00	-20.05	27.36	6.11	33.56	33.08	34	175	Average	HORIZONTAL
2	4830.83	46.45	74.00	-27.55	39.86	6.11	33.56	33.08	34	175	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4825.15	46.27	74.00	-27.73	39.68	6.11	33.56	33.08	23	176	Peak	VERTICAL
2	4825.51	33.69	54.00	-20.31	27.10	6.11	33.56	33.08	23	176	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.12	52.04	74.00	-21.96	45.38	6.08	33.66	33.08	14	178	Peak	HORIZONTAL
2	4874.26	35.98	54.00	-18.02	29.32	6.08	33.66	33.08	14	178	Average	HORIZONTAL
3	7315.23	38.66	54.00	-15.34	27.19	8.30	36.64	33.47	109	178	Average	HORIZONTAL
4	7318.18	52.75	74.00	-21.25	41.23	8.30	36.69	33.47	109	178	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.92	37.63	54.00	-16.37	30.97	6.08	33.66	33.08	61	175	Average	VERTICAL
2	4877.01	52.37	74.00	-21.63	45.71	6.08	33.66	33.08	61	175	Peak	VERTICAL
3	7314.78	52.83	74.00	-21.17	41.36	8.30	36.64	33.47	86	175	Peak	VERTICAL
4	7315.20	38.91	54.00	-15.09	27.44	8.30	36.64	33.47	86	175	Average	VERTICAL

Temperature	26°C	Humidity	62%
Test Engineer	Paul Chen	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.66	32.39	54.00	-21.61	25.64	6.05	33.76	33.06	361	175	Average	HORIZONTAL
2	4924.76	45.98	74.00	-28.02	39.23	6.05	33.76	33.06	361	175	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.10	46.38	74.00	-27.62	39.63	6.05	33.76	33.06	0	175	Peak	VERTICAL
2	4923.65	32.34	54.00	-21.66	25.59	6.05	33.76	33.06	0	175	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4821.47	46.37	74.00	-27.63	39.78	6.11	33.56	33.08	333	175	Peak	HORIZONTAL
2	4822.59	33.71	54.00	-20.29	27.12	6.11	33.56	33.08	333	175	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.10	46.56	74.00	-27.44	39.97	6.11	33.56	33.08	322	173	Peak	VERTICAL
2	4825.89	33.58	54.00	-20.42	26.99	6.11	33.56	33.08	322	173	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4871.76	53.13	74.00	-20.87	46.47	6.08	33.66	33.08	356	201 Peak	HORIZONTAL
2	4873.89	37.07	54.00	-16.93	30.41	6.08	33.66	33.08	356	201 Average	HORIZONTAL
3	7311.64	39.52	54.00	-14.48	28.05	8.30	36.64	33.47	1	200 Average	HORIZONTAL
4	7313.24	50.99	74.00	-23.01	39.52	8.30	36.64	33.47	1	200 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4869.43	53.63	74.00	-20.37	46.97	6.08	33.66	33.08	69	200 Peak	VERTICAL
2	4874.00	38.79	54.00	-15.21	32.13	6.08	33.66	33.08	69	200 Average	VERTICAL
3	7315.01	39.84	54.00	-14.16	28.37	8.30	36.64	33.47	81	201 Average	VERTICAL
4	7317.65	53.20	74.00	-20.80	41.68	8.30	36.69	33.47	81	201 Peak	VERTICAL



Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4899.64	33.77	54.00	-20.23	27.08	6.07	33.69	33.07	292	201	Average	HORIZONTAL
2	4948.84	46.31	74.00	-27.69	39.53	6.04	33.80	33.06	292	201	Peak	HORIZONTAL
3	7365.49	38.78	54.00	-15.22	27.16	8.34	36.77	33.49	149	200	Average	HORIZONTAL
4	7409.72	52.00	74.00	-22.00	40.23	8.37	36.89	33.49	149	200	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4921.76	47.57	74.00	-26.43	40.82	6.05	33.76	33.06	66	194	Peak	VERTICAL
2	4923.68	34.09	54.00	-19.91	27.34	6.05	33.76	33.06	66	194	Average	VERTICAL
3	7367.49	38.85	54.00	-15.15	27.19	8.34	36.81	33.49	328	201	Average	VERTICAL
4	7404.19	51.55	74.00	-22.45	39.78	8.37	36.89	33.49	328	201	Peak	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4821.08	33.71	54.00	-20.29	27.12	6.11	33.56	33.08	320	205	Average	HORIZONTAL
2	4823.33	46.44	74.00	-27.56	39.85	6.11	33.56	33.08	320	205	Peak	HORIZONTAL
3	7251.34	50.71	74.00	-23.29	39.41	8.24	36.52	33.46	50	205	Peak	HORIZONTAL
4	7289.64	38.42	54.00	-15.58	27.01	8.28	36.60	33.47	50	205	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.81	45.79	74.00	-28.21	39.20	6.11	33.56	33.08	280	201	Peak	VERTICAL
2	4823.89	33.20	54.00	-20.80	26.61	6.11	33.56	33.08	280	201	Average	VERTICAL
3	7252.62	38.43	54.00	-15.57	27.13	8.24	36.52	33.46	45	201	Average	VERTICAL
4	7271.53	51.60	74.00	-22.40	40.25	8.26	36.56	33.47	45	201	Peak	VERTICAL



Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4851.72	45.86	74.00	-28.14	39.22	6.10	33.62	33.08	64	198	Peak	HORIZONTAL
2	4898.76	33.61	54.00	-20.39	26.92	6.07	33.69	33.07	64	198	Average	HORIZONTAL
3	7315.81	51.48	74.00	-22.52	39.96	8.30	36.69	33.47	244	200	Peak	HORIZONTAL
4	7316.05	38.76	54.00	-15.24	27.24	8.30	36.69	33.47	244	200	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4868.15	33.76	54.00	-20.24	27.10	6.08	33.66	33.08	281	200	Average	VERTICAL
2	4889.87	45.62	74.00	-28.38	38.93	6.07	33.69	33.07	281	200	Peak	VERTICAL
3	7313.32	38.65	54.00	-15.35	27.18	8.30	36.64	33.47	146	200	Average	VERTICAL
4	7317.97	52.14	74.00	-21.86	40.62	8.30	36.69	33.47	146	200	Peak	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4905.33	47.76	74.00	-26.24	41.03	6.07	33.73	33.07	336	200	Peak	HORIZONTAL
2	4948.52	33.87	54.00	-20.13	27.09	6.04	33.80	33.06	336	200	Average	HORIZONTAL
3	7365.01	38.87	54.00	-15.13	27.25	8.34	36.77	33.49	239	200	Average	HORIZONTAL
4	7368.69	51.95	74.00	-22.05	40.29	8.34	36.81	33.49	239	200	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4945.47	48.13	74.00	-25.87	41.35	6.04	33.80	33.06	33	203	Peak	VERTICAL
2	4946.12	33.62	54.00	-20.38	26.84	6.04	33.80	33.06	33	203	Average	VERTICAL
3	7367.09	38.91	54.00	-15.09	27.25	8.34	36.81	33.49	250	203	Average	VERTICAL
4	7379.43	51.57	74.00	-22.43	39.91	8.34	36.81	33.49	250	203	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Apr. 24, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2385.95	61.57	74.00	-12.43	29.63	27.03	4.91	0.00	120	82	HORIZONTAL	Peak
2	2386.82	52.37	54.00	-1.63	20.43	27.03	4.91	0.00	120	82	HORIZONTAL	Average
3	2412.00	110.20			78.17	27.09	4.94	0.00	120	82	HORIZONTAL	Peak
4	2412.87	107.41			75.38	27.09	4.94	0.00	120	82	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2387.68	59.15	74.00	-14.85	27.21	27.03	4.91	0.00	221	290	HORIZONTAL	Peak
2	2390.00	45.73	54.00	-8.27	13.77	27.04	4.92	0.00	221	290	HORIZONTAL	Average
3	2437.00	110.42			78.31	27.15	4.96	0.00	221	290	HORIZONTAL	Peak
4	2437.87	107.59			75.47	27.15	4.97	0.00	221	290	HORIZONTAL	Average
5	2486.68	59.77	74.00	-14.23	27.48	27.27	5.02	0.00	221	290	HORIZONTAL	Peak
6	2500.00	48.72	54.00	-5.28	16.39	27.30	5.03	0.00	221	290	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2462.14	109.25			77.04	27.22	4.99	0.00	119	339	VERTICAL	Peak
2	2462.72	106.40			74.19	27.22	4.99	0.00	119	339	VERTICAL	Average
3	2484.37	62.02	74.00	-11.98	29.74	27.27	5.01	0.00	119	339	VERTICAL	Peak
4	2487.55	52.62	54.00	-1.38	20.33	27.27	5.02	0.00	119	339	VERTICAL	Average

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Apr. 24, 2015		

Channel 1

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2389.86	70.60	74.00	-3.40	38.66	27.03	4.91	0.00	139	348	VERTICAL	Peak
2	2390.00	53.82	54.00	-0.18	21.87	27.03	4.92	0.00	139	348	VERTICAL	Average
3	2405.78	100.89			68.88	27.08	4.93	0.00	139	348	VERTICAL	Average
4	2408.67	109.69			77.68	27.08	4.93	0.00	139	348	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2389.71	64.77	74.00	-9.23	32.83	27.03	4.91	0.00	137	342	VERTICAL	Peak
2	2390.00	48.91	54.00	-5.09	16.96	27.03	4.92	0.00	137	342	VERTICAL	Average
3	2429.76	113.66			81.57	27.13	4.96	0.00	137	342	VERTICAL	Peak
4	2430.92	104.21			72.12	27.13	4.96	0.00	137	342	VERTICAL	Average
5	2485.24	62.59	74.00	-11.41	30.31	27.27	5.01	0.00	137	342	VERTICAL	Peak
6	2500.00	48.36	54.00	-5.64	16.03	27.30	5.03	0.00	137	342	VERTICAL	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2464.03	99.73			67.52	27.22	4.99	0.00	137	337	VERTICAL	Average
2	2464.75	109.26			77.05	27.22	4.99	0.00	137	337	VERTICAL	Peak
3	2483.50	53.23	54.00	-0.77	20.95	27.27	5.01	0.00	137	337	VERTICAL	Average
4	2484.95	70.92	74.00	-3.08	38.64	27.27	5.01	0.00	137	337	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2389.13	71.45	74.00	-2.55	39.51	27.03	4.91	0.00	138	353	VERTICAL	Peak
2	2390.00	53.57	54.00	-0.43	21.62	27.03	4.92	0.00	138	353	VERTICAL	Average
3	2408.96	109.70			77.68	27.08	4.94	0.00	138	353	VERTICAL	Peak
4	2417.35	99.31			67.27	27.10	4.94	0.00	138	353	VERTICAL	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2389.42	66.95	74.00	-7.05	35.00	27.04	4.91	0.00	217	285	HORIZONTAL	Peak
2	2390.00	49.61	54.00	-4.39	17.65	27.04	4.92	0.00	217	285	HORIZONTAL	Average
3	2429.19	112.95			80.86	27.13	4.96	0.00	217	285	HORIZONTAL	Peak
4	2431.50	103.09			70.99	27.14	4.96	0.00	217	285	HORIZONTAL	Average
5	2483.50	65.24	74.00	-8.76	32.97	27.26	5.01	0.00	217	285	HORIZONTAL	Peak
6	2483.50	49.44	54.00	-4.56	17.17	27.26	5.01	0.00	217	285	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2453.75	98.59			66.41	27.20	4.98	0.00	142	338	VERTICAL	Average
2	2459.11	108.66			76.47	27.20	4.99	0.00	142	338	VERTICAL	Peak
3	2483.50	53.66	54.00	-0.34	21.38	27.27	5.01	0.00	142	338	VERTICAL	Average
4	2483.93	72.41	74.00	-1.59	40.13	27.27	5.01	0.00	142	338	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Paul Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2
Test Date	Apr. 25, 2015		

Channel 3

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2386.24	73.47	74.00	-0.53	41.53	27.03	4.91	0.00	226	292	HORIZONTAL	Peak
2	2390.00	53.94	54.00	-0.06	21.98	27.04	4.92	0.00	226	292	HORIZONTAL	Average
3	2414.47	106.33			74.29	27.10	4.94	0.00	226	292	HORIZONTAL	Peak
4	2416.50	96.10			64.06	27.10	4.94	0.00	226	292	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2388.84	69.28	74.00	-4.72	37.34	27.03	4.91	0.00	136	353	VERTICAL	Peak
2	2390.00	53.73	54.00	-0.27	21.78	27.03	4.92	0.00	136	353	VERTICAL	Average
3	2429.47	107.40			75.31	27.13	4.96	0.00	136	353	VERTICAL	Peak
4	2431.50	96.98			64.89	27.13	4.96	0.00	136	353	VERTICAL	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	2458.95	94.61			62.42	27.20	4.99	0.00	179	340	VERTICAL	Average
2	2462.42	104.80			72.59	27.22	4.99	0.00	179	340	VERTICAL	Peak
3	2483.50	53.79	54.00	-0.21	21.51	27.27	5.01	0.00	179	340	VERTICAL	Average
4	2484.66	70.43	74.00	-3.57	38.15	27.27	5.01	0.00	179	340	VERTICAL	Peak


Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band
Plot on Configuration IEEE 802.11b / Reference Level

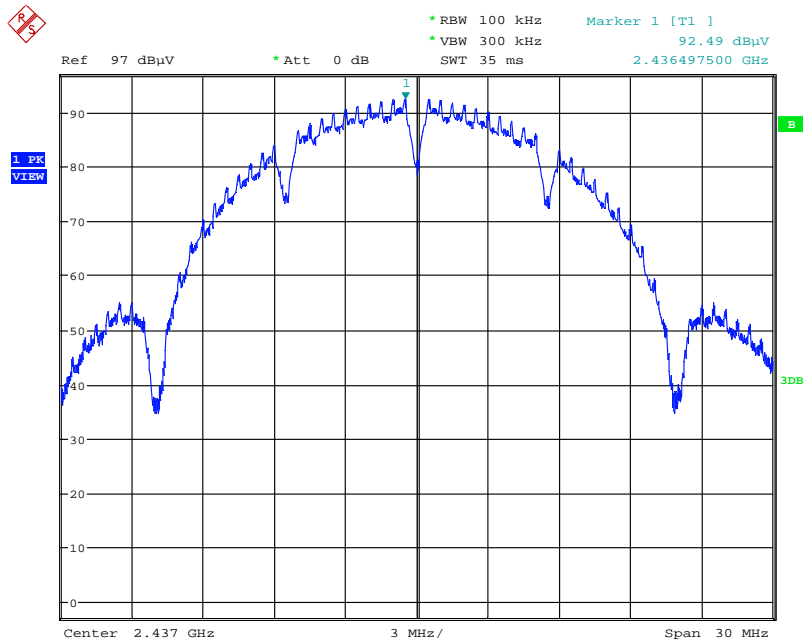


Date: 25.APR.2015 17:20:20

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

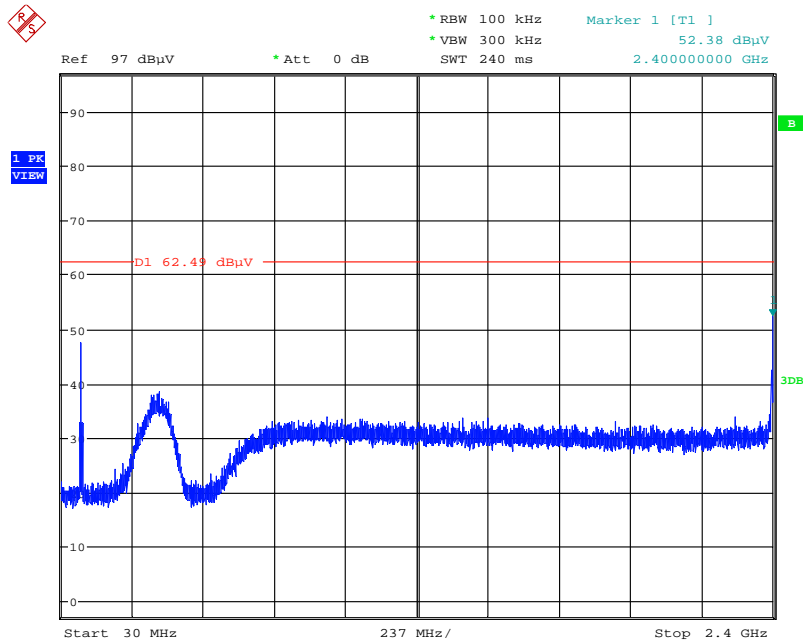


Date: 25.APR.2015 17:21:56

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

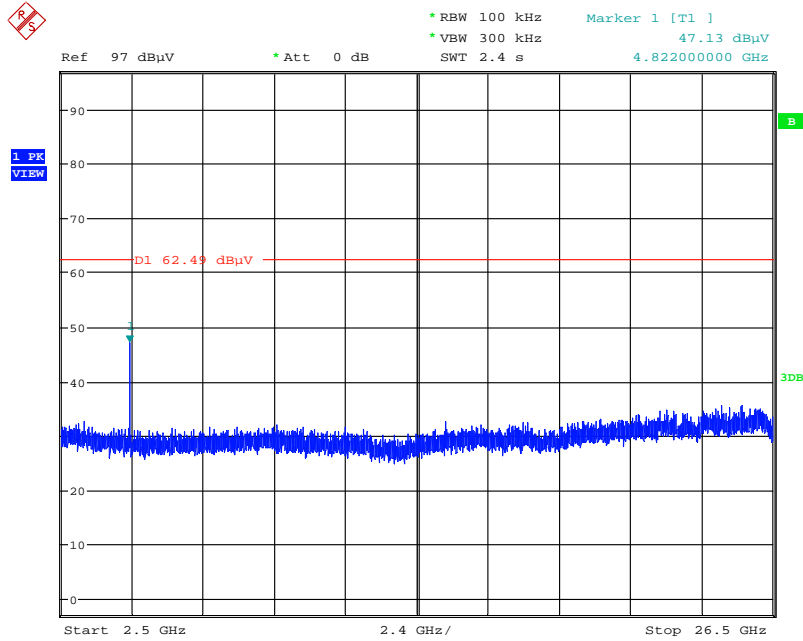


Date: 25.APR.2015 17:22:37

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

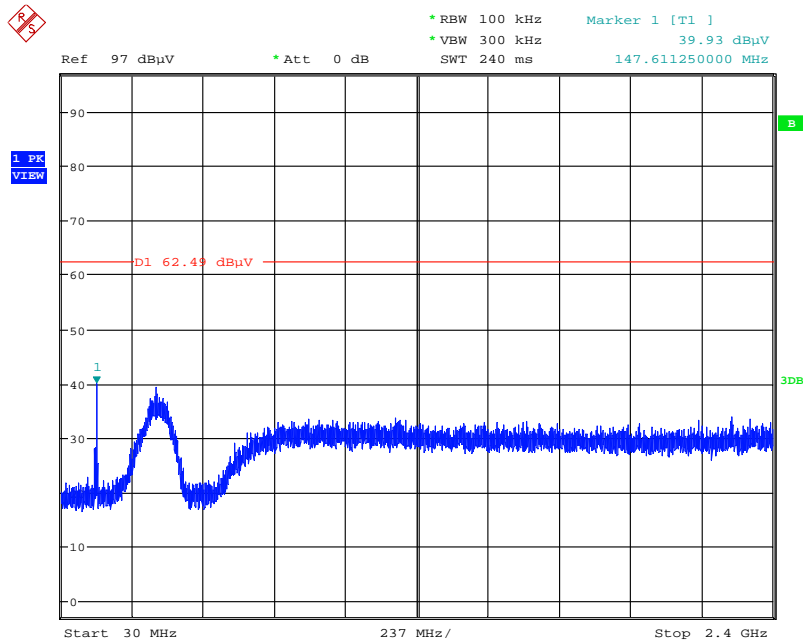


Date: 25.APR.2015 17:25:01

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

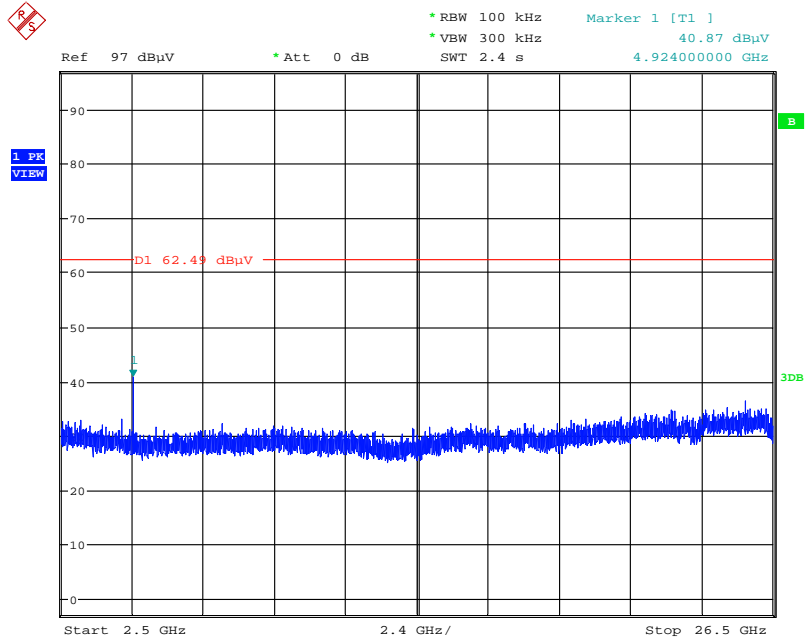


Date: 25.APR.2015 17:25:44

Plot on Configuration IEEE 802.11g / Reference Level

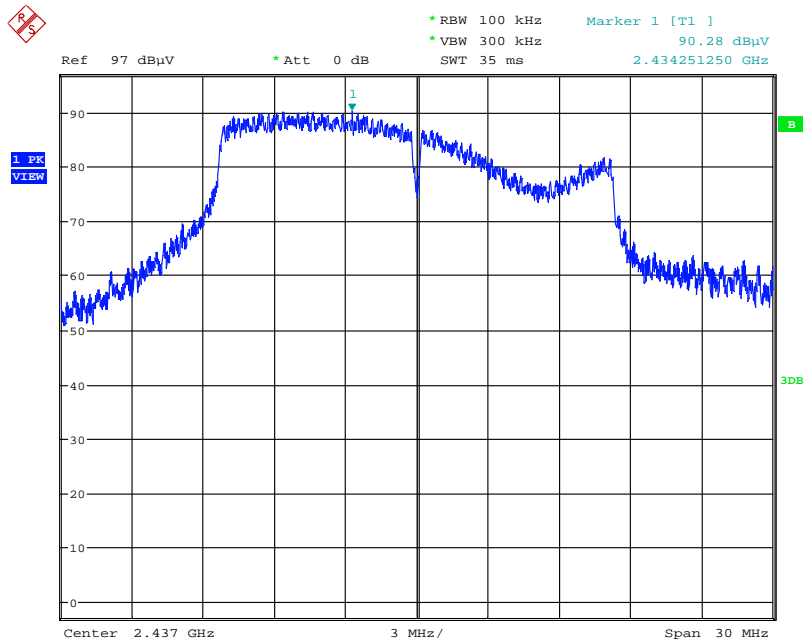


Date: 25.APR.2015 17:58:42

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

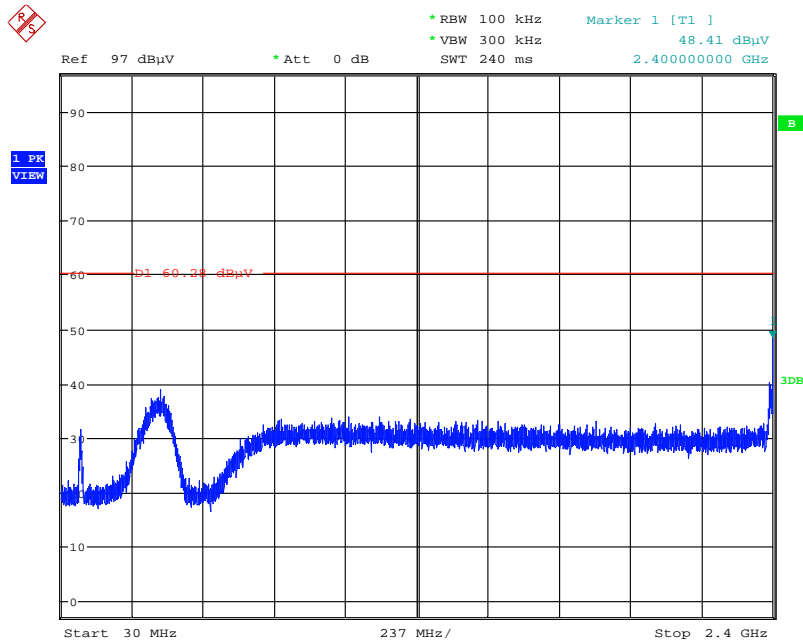


Date: 25.APR.2015 18:00:19

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

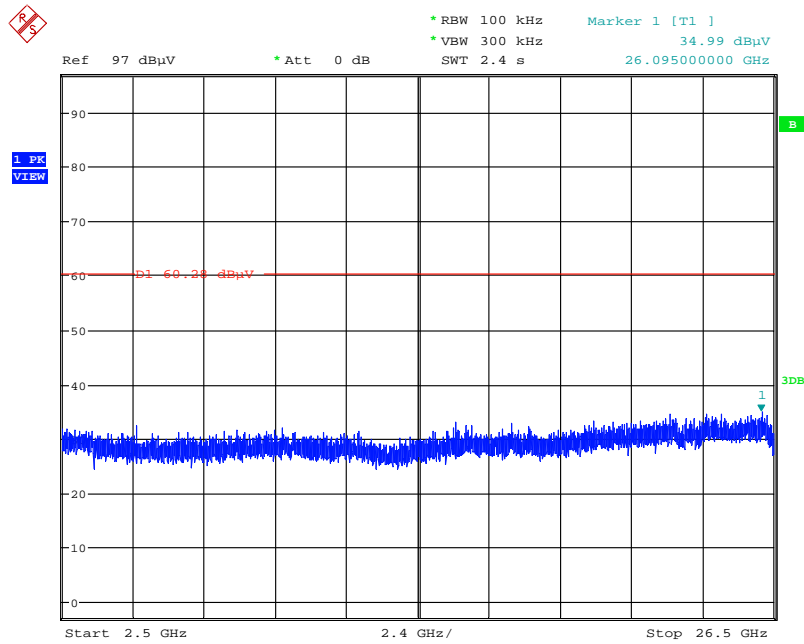


Date: 25.APR.2015 18:00:46

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

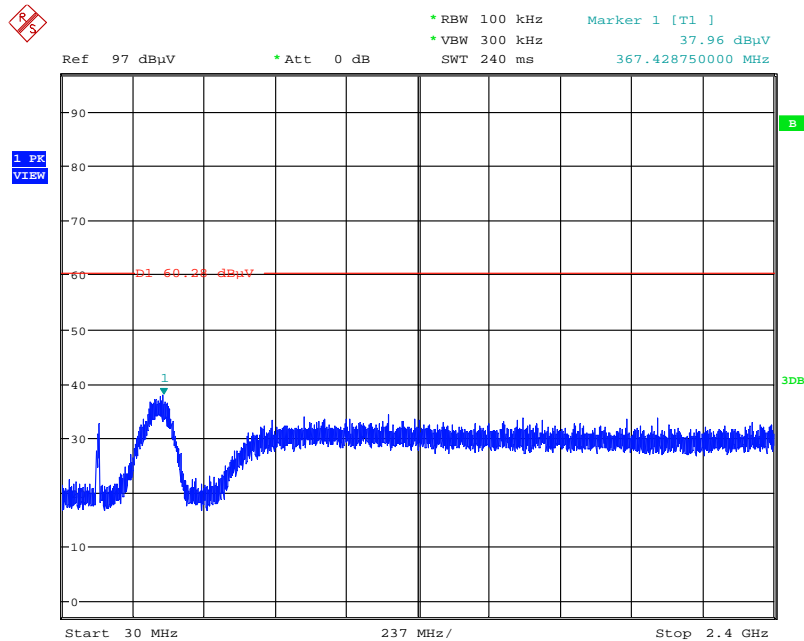


Date: 25.APR.2015 18:01:48

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

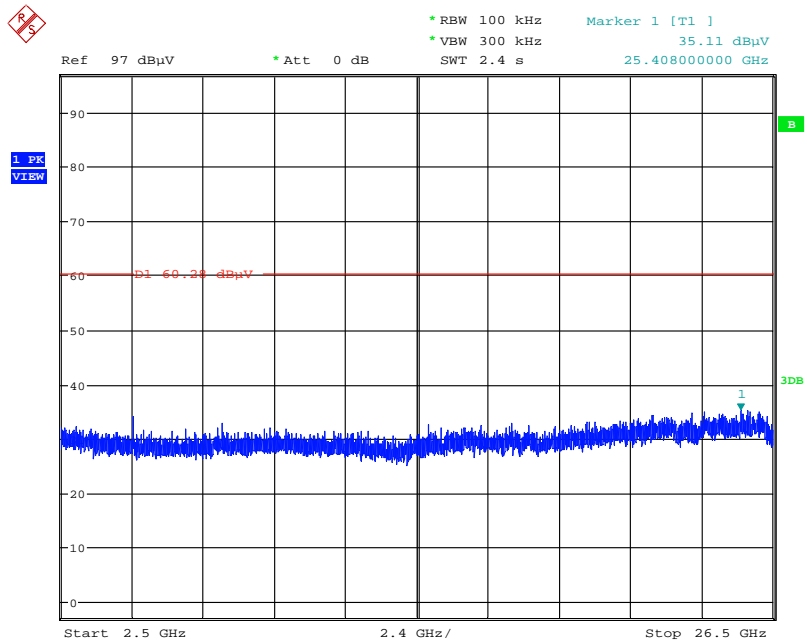


Date: 25.APR.2015 18:02:26

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

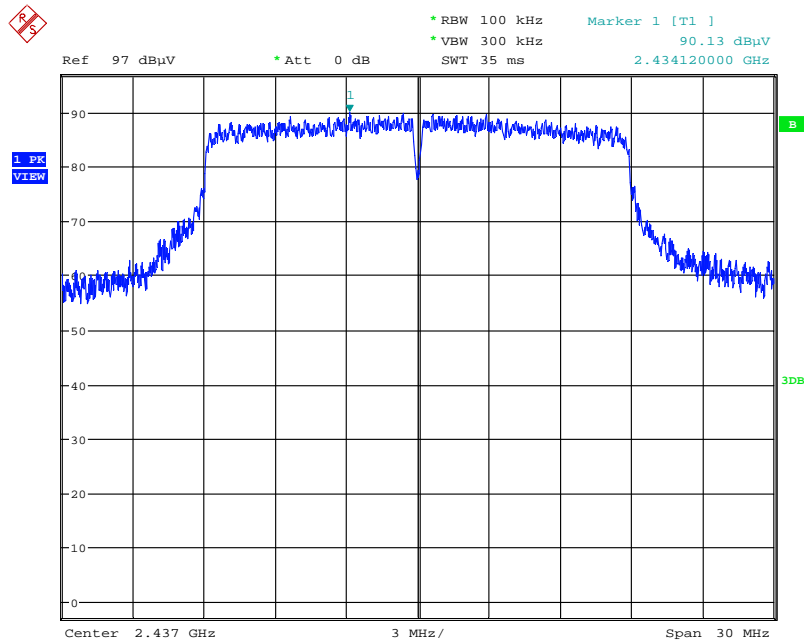


Date: 25.APR.2015 18:16:14

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

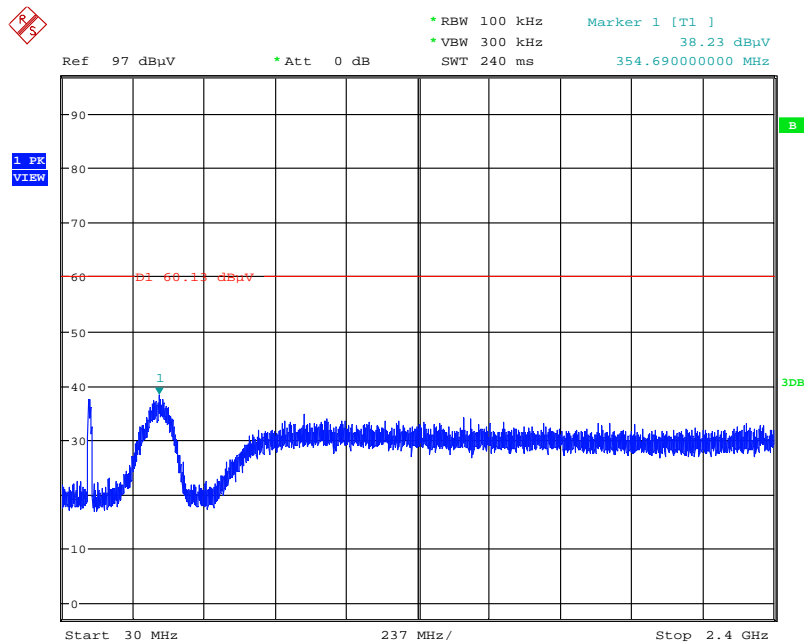


Date: 25.APR.2015 18:17:24

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

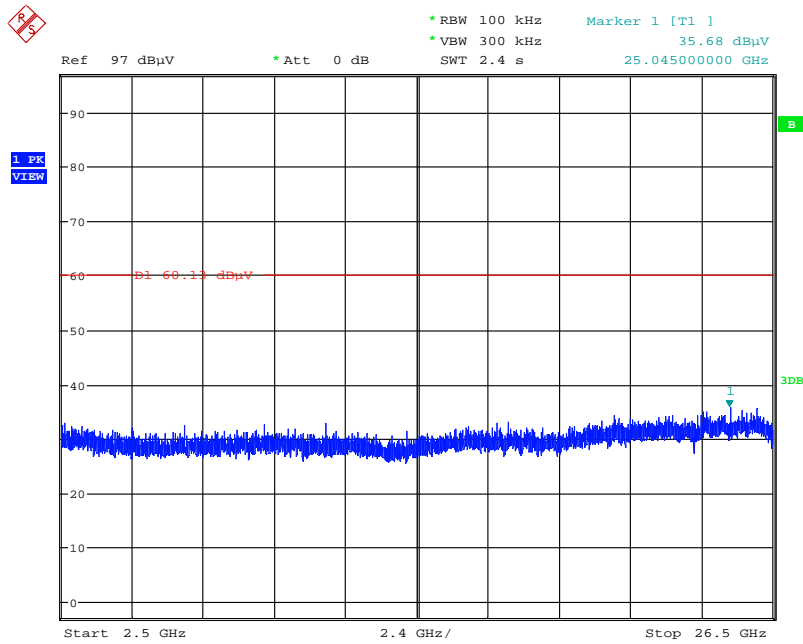


Date: 25.APR.2015 18:19:37

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

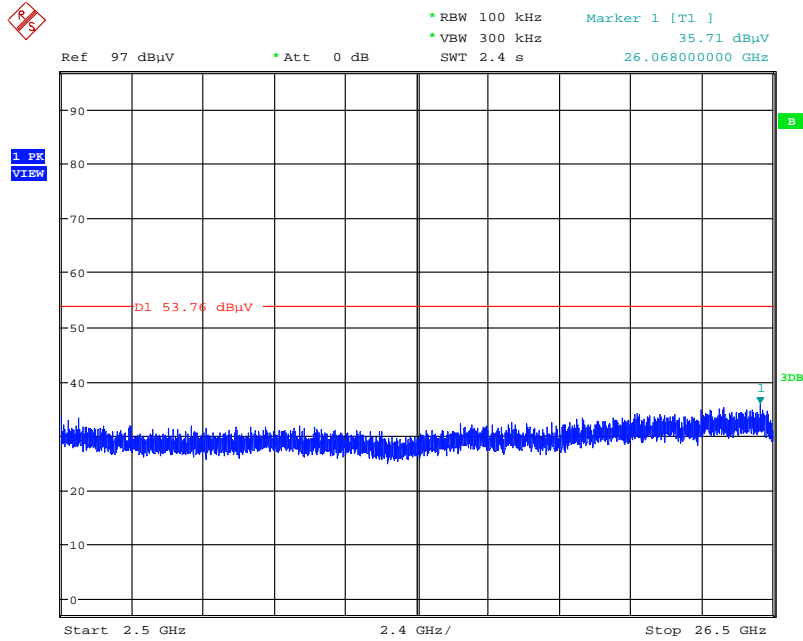


Date: 25.APR.2015 18:41:37

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

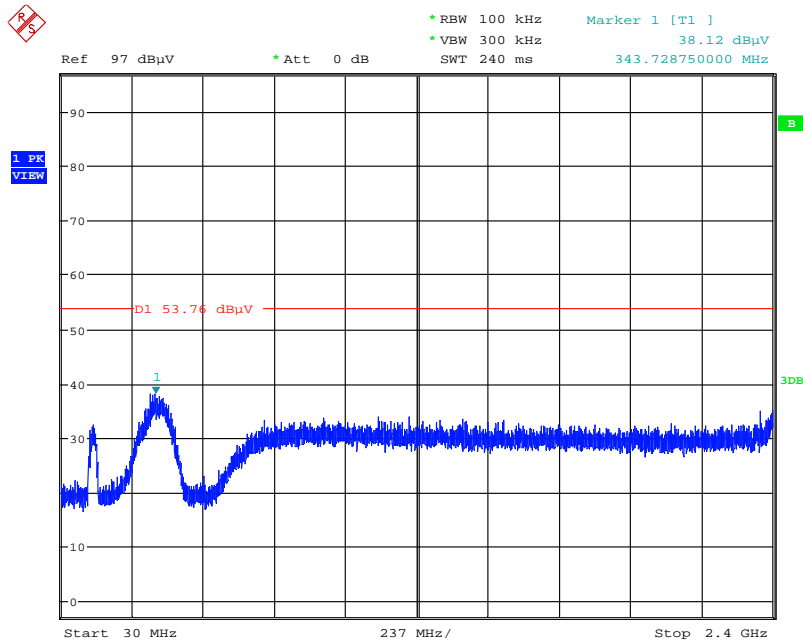

Date: 25.APR.2015 18:44:11

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

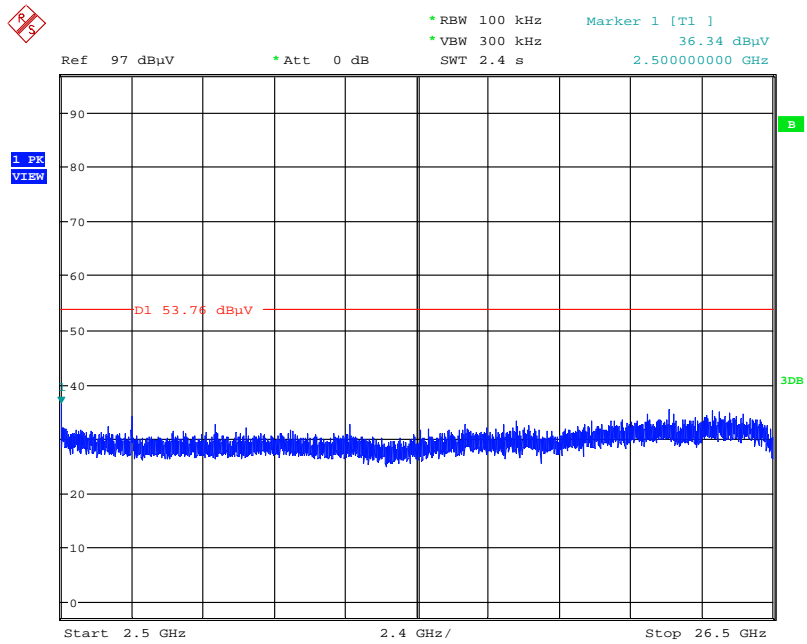

Date: 25.APR.2015 18:44:38

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m ~ 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Thermometer	HTC-1	HTC-1	TP-1	-50°C~70°C	Mar. 11, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Thermometer	HTC-1	HTC-1	TP-8	-50°C~70°C	Mar. 05, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%