

*FCC PART 15, SUBPART B and C; RSS-247 and RSS-GEN  
TEST REPORT*

*for*

**KEYPAD**

**MODEL: KP01**

Prepared for

**VIVINT, INC.  
4931 NORTH 300 WEST  
PROVO, UTAH 84604**

Prepared by: \_\_\_\_\_

**KYLE FUJIMOTO**

Approved by: \_\_\_\_\_

**JAMES ROSS**

**COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500**

**DATE: MAY 11, 2021**

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	23	2	2	2	11	43	83

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



NVLAP LAB CODE 200528-0

**Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500**

**Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400**

**Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044**

**TABLE OF CONTENTS**

<b>Section / Title</b>	<b>PAGE</b>
<b>GENERAL REPORT SUMMARY</b>	<b>4</b>
<b>SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1. PURPOSE</b>	<b>6</b>
1.1 Decision Rule & Risk	6
<b>2. ADMINISTRATIVE DATA</b>	<b>7</b>
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
<b>3. APPLICABLE DOCUMENTS</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	<b>9</b>
4.1.1 Cable Construction and Termination	9
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	<b>10</b>
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	11
<b>6. TEST SITE DESCRIPTION</b>	<b>12</b>
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
6.3 Measurement Uncertainty	12
<b>7. TEST PROCEDURES</b>	<b>13</b>
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions Test	14
7.1.3 RF Emissions Test Results	16
7.1.4 Sample Calculations	17
8.2 DTS Bandwidth	19
8.3 Maximum Peak Conducted Output Power	19
8.4 Emissions in Non-Restricted Bands	20
8.5 RF Band Edges	21
8.6 Spectral Density Test	22
8.7 Variation of the Input Power	22
8.8 99% Bandwidth	23
<b>9. CONCLUSIONS</b>	<b>23</b>

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams and Charts <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Antenna and Effective Gain Factors</li></ul>
E	Data Sheets

**LIST OF FIGURES**

<b>FIGURE</b>	<b>TITLE</b>
1	Conducted Emissions Test Setup
2	Layout of the Semi-Anechoic Test Chamber

**LIST OF TABLES**

<b>TABLE</b>	<b>TITLE</b>
1	Radiated Emissions Test Results

---

## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested:            Keypad  
                                  Model: KP01  
                                  S/N: N/A

Product Description:    The equipment under test is a battery powered Keypad that uses Z-Wave technology. The transmit frequency is 912 and 920 MHz. The clock oscillator is 39 MHz. Dimensions: 14 cm (L) x 8 cm (W) x 2 cm (H).

Modifications:            The EUT was not modified in order to meet the specifications.

Customer:                 Vivint, Inc.  
                                  4931 North 300 West  
                                  Provo, Utah 84604

Test Dates:                March 3, 4, and 5, 2021

Test Specifications covered by accreditation:

Emissions requirements  
CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247;  
RSS-247 and RSS-GEN  
Test Procedure: ANSI C63.4 and ANSI C63.10



## SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery power only.
2	Spurious Radiated RF Emissions, 30 MHz – 9300 MHz	The EUT complies with the <b>Class B</b> limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15, Subpart C, section 15.209; RSS-247 and RSS-GEN <small>Highest reading in relation to spec limit 48.05 dBuV/m (AVG) @ 3680 MHz (*U = 3.95 dB)</small>
3	Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 9 kHz – 9.3 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d); RSS-247 and RSS-GEN
4	Emissions produced by the intentional radiator in restricted bands, 9 kHz – 9.3 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, section 15.247 (d); RSS-247 and RSS-GEN
5	DTS Bandwidth	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (a)(2); RSS-247
6	Maximum Conducted Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(3); RSS-247
7	RF Conducted Antenna Test	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (d); RSS-247
8	Power Spectral Density from the Intentional Radiator to the Antenna	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (e); RSS-247
9	99% Bandwidth	This test was performed to obtain the emission designator required by Innovation, Science and Economic Development Canada.

## 1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Keypad, Model: KP01. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-247 and RSS-Gen.**

### 1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Vivint, Inc.

Greg Hansen                      Regulatory Compliance Manager

Compatible Electronics Inc.

Kyle Fujimoto                  Test Engineer

James Ross                      Test Engineer

### 2.4 Date Test Sample was Received

The test sample was received on prior to the initial test date.

### 2.5 Disposition of the Test Sample

The test sample has not been returned to Vivint, Inc. as of the date of this test report.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

dB	Decibel
RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
AC	Alternating Current
ITE	Information Technology Equipment
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
Tx	Transmit
Rx	Receive
BLE	Bluetooth Low Energy
DC	Direct Current

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

<b>SPEC</b>	<b>TITLE</b>
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
558074 D01 DTS Meas Guidance v05 r02	Guidance for Performing Compliance Measurements on Digital Transmissions Systems (DTS) Operating Under Section 15.247
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation
ANSI C63.4 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
RSS-Gen Issue 5 April 2019 Amendment 1	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmissions Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices



#### **4. DESCRIPTION OF TEST CONFIGURATION**

The Keypad, Model: KP01 (EUT) was tested as a stand alone unit. The EUT was transmitting or receiving at 912 MHz or 920 MHz on a continuous basis.

The EUT was tested for emissions while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT was tested with a new battery. The firmware inside the EUT allowed the EUT to continuously transmit at 912 MHz or 920 MHz.

The firmware is stored on the company's servers.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

##### **4.1.1 Cable Construction and Termination**

The EUT had no external cables.

**5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT****5.1 EUT and Accessory List**

<b>EQUIPMENT</b>	<b>MANUFACTURER</b>	<b>MODEL NUMBER</b>	<b>SERIAL NUMBER</b>	<b>FCC ID</b>
KEYPAD (EUT)	VIVINT, INC.	KP01	N/A	2AAAS-KP01 IC: 10941A-KP01
FIRMWARE	VIVINT, INC>	1.0	N/A	N/A

## 5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CAL. CYCLE
<b>RADIATED EMISSIONS TEST EQUIPMENT</b>					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
MXE EMI Receiver, 3 Hz – 44 GHz	Keysight Technologies, Inc.	N9038A	MY59050117	October 5, 2020	1 Year
Loop Antenna	Com-Power	AL-130R	121090	February 5, 2019	3 Year
CombiLog Antenna	Com-Power	AC-220	061093	June 5, 2019	2 Year
Horn Antenna	Com-Power	AH-118	10050113	February 4, 2020	2 Year
Preamplifier	Com-Power	PA-118	181653	March 3, 2021	1 Year
Horn Antenna	Com-Power	AH-826	71957	N/A	N/A
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A

**6. TEST SITE DESCRIPTION**

**6.1 Test Facility Description**

Please refer to section 2.1 of this report for emissions test location.

**6.2 EUT Mounting, Bonding and Grounding**

**For frequencies 1 GHz and below:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

**For frequencies above 1 GHz:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

**6.3 Measurement Uncertainty**

Compatible Electronics'  $U_{lab}$  value is less than  $U_{cispr}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		$U_{cispr}$	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.73 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.27 dB (Vertical) 3.19 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	3.95 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	3.95 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.69 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.55 dB

## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 RF Emissions

#### 7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

#### **Test Results:**

This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.

### 7.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The frequencies above 1 GHz were averaged using the RMS detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

**Radiated Emissions Test (Continued)**

The measurement bandwidths and transducers used for the radiated emissions test were:

<b>FREQUENCY RANGE</b>	<b>EFFECTIVE MEASUREMENT BANDWIDTH</b>	<b>TRANSDUCER</b>
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 9.3 GHz	1 MHz	Horn Antenna

**Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.247; and the limits of RSS-247 and RSS-Gen for radiated emissions.

### 8.1.3 RF Emissions Test Results

Table 1.0 RADIATED EMISSION RESULTS  
Keypad  
Model: KP01

Frequency MHz	EMI Reading (dBuV/m)	Specification Limit (dBuV/m)	Delta (Cor. Reading – Spec. Limit) dB)
3680.00 (V) (Z-Axis)	48.05 (Avg)	53.97	-5.92
3648.00 (V) (Z-Axis)	48.02 (Avg)	53.97	-5.95
3680.00 (H) (X-Axis)	46.83 (Avg)	53.97	-7.14
3648.00 (V) (X-Axis)	45.31 (Avg)	53.97	-8.66
3648.00 (H) (Z-Axis)	45.08 (Avg)	53.97	-8.90
3648.00 (V) (Y-Axis)	45.02 (Avg)	53.97	-8.95

Notes:

- (Avg) Average
- (QP) Quasi -Peak
- (H) Horizontal
- (V) Vertical



### 8.1.4 Sample Calculations

A correction factor for the antenna, cable, and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ( $\mu\text{V}/\text{m}$ )  $\log \times 20 =$  Specification Limit in  $\text{dB}\mu\text{V}/\text{m}$

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance)  $\log \times 40 =$  distance factor

For measurements above 30 MHz: (Specification distance / test distance)  $\log \times 20 =$  distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F – A + C

where: F = antenna factor  
A = amplifier gain  
C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C [\text{dB}] - G_{PA} [\text{dB}] + AF^H [\text{dB}(\text{S}/\text{m})]$$

where:  $H$  is the magnetic field strength (to be compared with the limit),  
 $V$  is the voltage level measured by the receiver or spectrum analyzer,  
 $L_C$  is the cable loss,  
 $G_{PA}$  is the gain of the preamplifier (if used), and  
 $AF^H$  is the magnetic antenna factor.

The  $G_{PA}$  term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

---

### Sample Calculations (Continued)

If the “electrical” antenna factor is used instead, the above equation becomes:

$$H[\text{dB}(\mu\text{A}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C[\text{dB}] - G_{\text{PA}}[\text{dB}] + AF^E[\text{dB}(\text{m}^{-1})] - 51.5[\text{dB}\Omega]$$

where:  $AF^E$  is the “electric” antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C[\text{dB}] - G_{\text{PA}}[\text{dB}] + AF^E[\text{dB}(\text{m}^{-1})]$$

or, if the magnetic antenna factor is used:

$$E[\text{dB}(\mu\text{V}/\text{m})] = V[\text{dB}(\mu\text{V})] + L_C[\text{dB}] - G_{\text{PA}}[\text{dB}] + AF^H[\text{dB}(\text{S}/\text{m})] + 51.5[\text{dB}\Omega]$$

The display of the receiver (or spectrum analyzer) **shall not** be configured in units of current, e.g.  $\mu\text{A}$  or  $\text{dB}(\mu\text{A})$ . That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is  $50\ \Omega$ , while the magnetic field calculation is based on the free-space impedance of  $377\ \Omega$ .

## 8.2 DTS Bandwidth

The DTS Bandwidth was measured using the EMI Receiver. The bandwidth was measured using a direct connection from the EUT. The following steps were performed for measuring the DTS Bandwidth.

1. Set RBW = 100 kHz
2. Set the video bandwidth (VBW) to equal or greater than 3 times the RBW
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep = Auto Couple
6. Allow the trace to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (a)(2); and RSS-247.

## 8.3 Maximum Peak Conducted Output Power

The maximum peak conducted output power was measured using the EMI Receiver. The following steps were performed for measuring the maximum peak conducted output power.

1. Set the RBW  $\geq$  DTS Bandwidth
2. Set the VBW  $\geq$  [3 X RBW]
3. Set span  $\geq$  [3 X RBW]
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use the peak marker function to determine the peak amplitude level

### Test Results:

The EUT complies with the relevant requirements of CFR Title 47, Part 15, Subpart C Section 15.247 (b)(3); and RSS-247.

## 8.4 Emissions in Non-Restricted Bands

The emissions in the non-restricted frequency bands measurements were performed using the EMI receiver directly connected to the EUT. The reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to  $\geq 1.5$  times the DTS bandwidth. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with sweep set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20 dB below that was the reference level. For emission level measurement, the center frequency and span were set to encompass the frequency range to be measured. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than the span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

### Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d); and RSS-247.

## 8.5 RF Band Edges

The RF band edges were measured using the EMI Receiver. The RF band edges were measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the RF band edges.

The RF band edges were taken at 902 MHz when the EUT was on the low channel and 928 MHz when the EUT was on the high channel using the EMI Receiver.

The following steps were performed for measuring the band edges at 902 MHz and 928 MHz:

1. Set analyzer center frequency to DTS channel center frequency
2. Set the span wide enough to cover the band edges.
3. Set the RBW to 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = Peak
6. Sweep time = auto couple
7. Allow the trace to stabilize
8. Use the peak marker function to determine the maximum amplitude level

### Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d) for band edges; and RSS-247. Please see the data sheets located in Appendix E.

## 8.6 Spectral Density Test

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

1. Set analyzer center frequency to DTS channel center frequency
2. Set the span to at least 1.5 times the OBW.
3. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW  $\geq [3 \times \text{RBW}]$
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize
9. Use the peak marker function to determine the maximum amplitude level within the RBW
10. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (e); and RSS-247.

## 8.7 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

### Test Results:

This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.

## 8.8 99% Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
2. Set VBW to greater than 3 times the RBW.
3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
4. Set the peak detector to max hold.
5. Set the sweep time to auto
6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

## 9. CONCLUSIONS

The Keypad, Model: KP01, as tested, meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-GEN and RSS-247.



**APPENDIX A**

***LABORATORY ACCREDITATIONS AND RECOGNITIONS***

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044



## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

**For the most up-to-date version of our scopes and certificates please visit <http://celectronics.com/quality/scope/>**

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

ISED Test Site Registration Number: 2154A





**APPENDIX B**

***MODIFICATIONS TO THE EUT***

## **MODIFICATIONS TO THE EUT**

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.247; RSS-GEN and RSS-210 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



**APPENDIX C**

***MODELS COVERED  
UNDER THIS REPORT***

## **MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

Keypad  
Model: KP01  
S/N: N/A


There are no additional models covered under this report.




**APPENDIX D**

***DIAGRAMS AND CHARTS***

**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

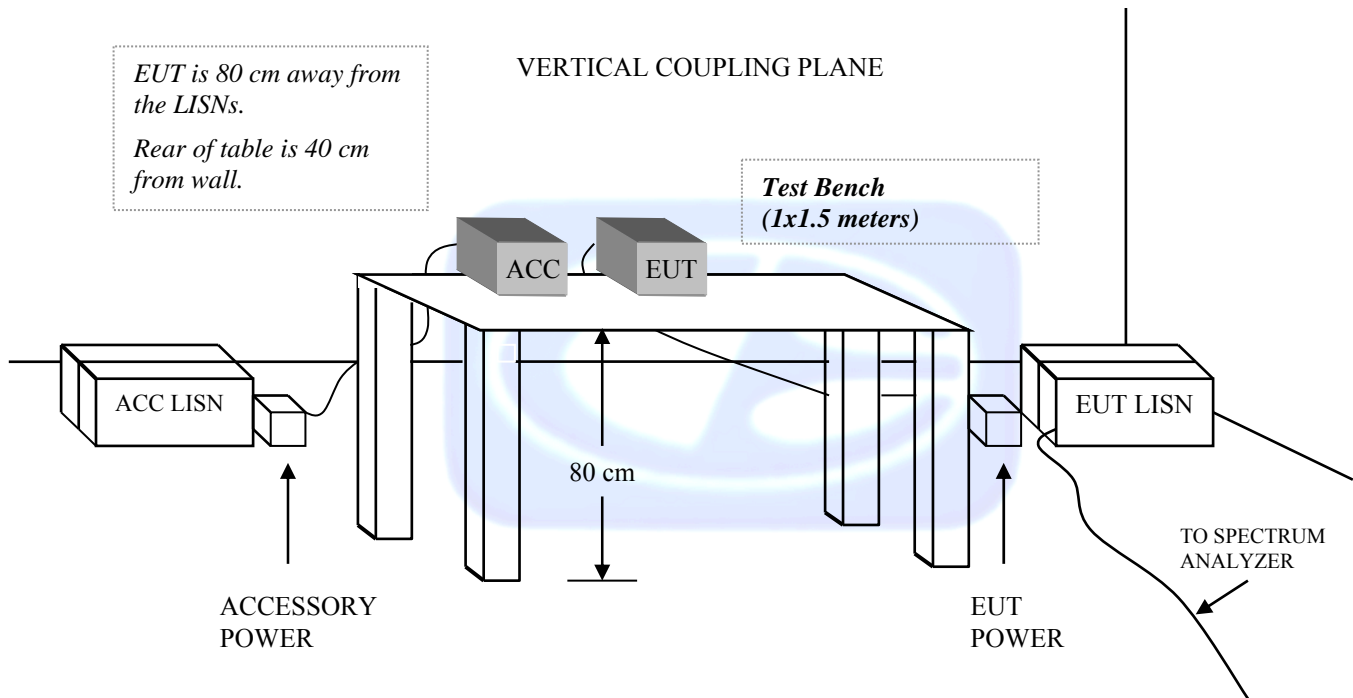

**FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER**

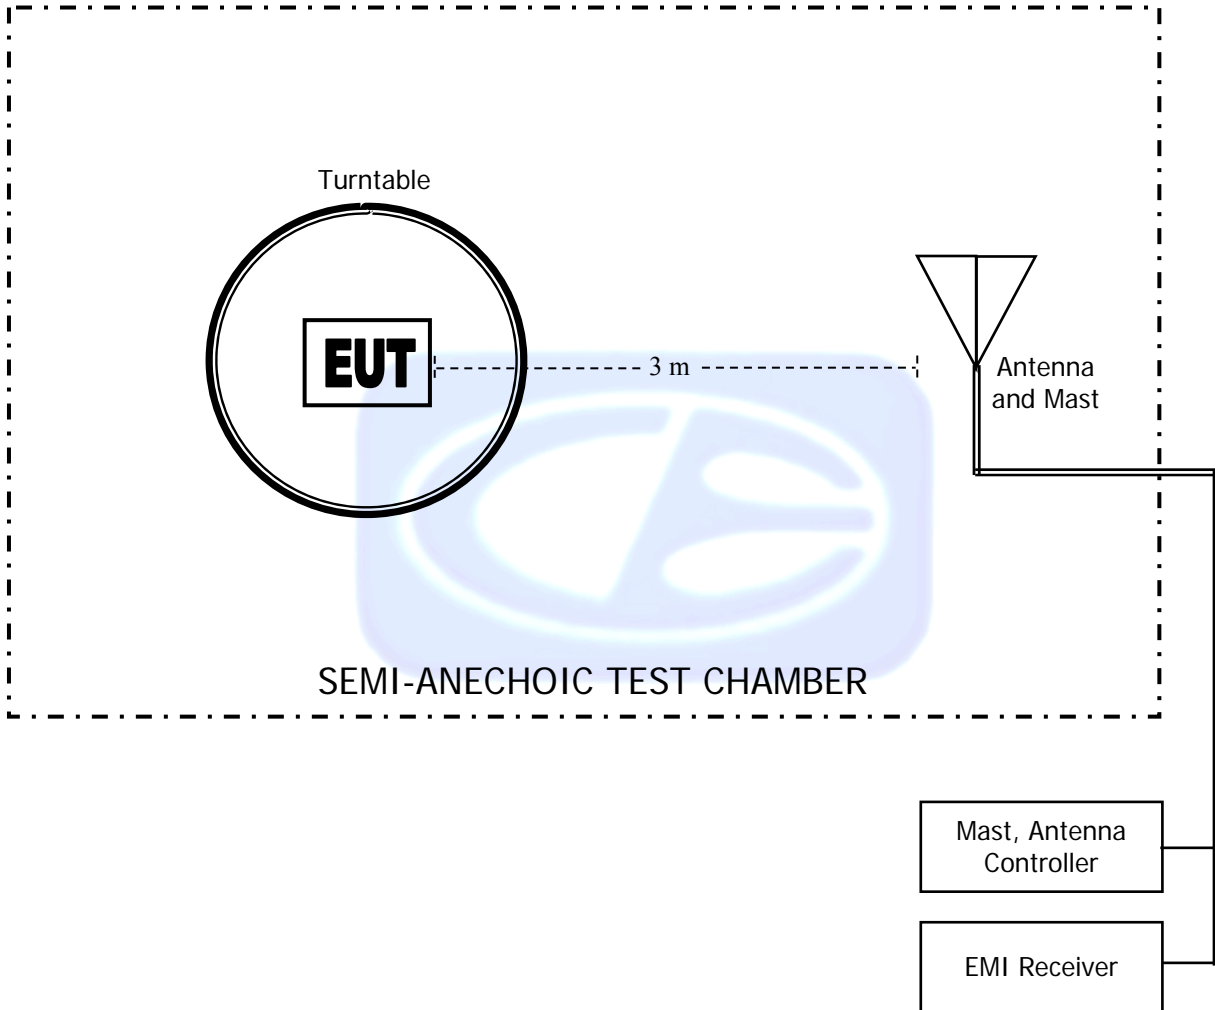



**COM-POWER AL-130R****LOOP ANTENNA**

S/N: 121090

CALIBRATION DATE: FEBRUARY 5, 2019

<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>
0.009	16.1	-35.4
0.01	15.6	-35.9
0.02	14.8	-36.7
0.03	15.6	-35.9
0.04	15.1	-36.4
0.05	14.4	-37.0
0.06	14.6	-36.9
0.07	14.4	-37.1
0.08	14.3	-37.1
0.09	14.5	-36.9
0.10	14.1	-37.3
0.20	14.1	-37.3
0.30	14.0	-37.4
0.40	14.0	-37.4
0.50	14.2	-37.2
0.60	14.2	-37.2
0.70	14.2	-37.2
0.80	14.2	-37.3
0.90	14.3	-37.2
1.00	14.5	-37.0
2.00	14.5	-36.9
3.00	14.5	-36.9
4.00	14.7	-36.8
5.00	14.6	-36.9
6.00	14.6	-36.9
7.00	14.6	-36.9
8.00	14.6	-36.9
9.00	14.6	-36.9
10.00	14.8	-36.6
11.00	14.9	-36.6
12.00	14.8	-36.6
13.00	14.8	-36.7
14.00	14.6	-36.8
15.00	14.5	-36.9
16.00	14.5	-37.0
17.00	14.6	-36.9
18.00	14.7	-36.7
19.00	14.8	-36.6
20.00	14.9	-36.6
21.00	14.6	-36.8
22.00	14.2	-37.2
23.00	13.7	-37.7
24.00	13.3	-38.2
25.00	13.0	-38.5
26.00	12.9	-38.6
27.00	13.0	-38.5
28.00	13.1	-38.4
29.00	13.1	-38.4
30.00	12.9	-38.5

**COM-POWER AC-220****COMBILOG ANTENNA**

S/N: 61093

CALIBRATION DATE: JUNE 5, 2019

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
30	22.10	200	15.30
35	20.90	250	16.80
40	20.10	300	19.00
45	19.40	350	19.60
50	18.40	400	21.70
60	15.10	450	21.60
70	12.00	500	22.20
80	11.60	550	22.70
90	13.50	600	24.20
100	14.70	650	24.40
120	15.90	700	24.50
125	15.90	750	25.40
140	14.80	800	26.30
150	15.50	850	26.70
160	19.80	900	27.50
175	15.20	950	27.80
180	14.90	1000	27.90

**COM POWER AH-118****HORN ANTENNA****S/N: 10050113****CALIBRATION DATE: FEBRUARY 4, 2020**


<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	24.343	10.0	38.826
1.5	25.419	10.5	39.102
2.0	28.838	11.0	38.259
2.5	28.971	11.5	39.920
3.0	29.919	12.0	40.149
3.5	30.674	12.5	40.576
4.0	31.670	13.0	40.264
4.5	32.437	13.5	40.364
5.0	33.414	14.0	40.424
5.5	34.003	14.5	41.677
6.0	34.799	15.0	43.010
6.5	35.381	15.5	39.799
7.0	37.024	16.0	40.187
7.5	37.403	16.5	40.155
8.0	37.445	17.0	40.507
8.5	37.390	17.5	41.963
9.0	38.076	18.0	43.196
9.5	38.809		

**COM-POWER PA-118****PREAMPLIFIER**

S/N: 181653

CALIBRATION DATE: MARCH 3, 2021

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	40.18	6.0	39.04
1.1	39.92	6.5	39.16
1.2	39.99	7.0	39.70
1.3	40.19	7.5	39.70
1.4	40.07	8.0	39.56
1.5	40.22	8.5	38.69
1.6	40.23	9.0	39.16
1.7	40.35	9.5	39.70
1.8	40.24	10.0	39.69
1.9	40.29	11.0	38.64
2.0	40.31	12.0	40.41
2.5	40.41	13.0	39.49
3.0	40.59	14.0	39.46
3.5	40.91	15.0	40.38
4.0	40.42	16.0	38.02
4.5	39.92	17.0	39.34
5.0	40.35	18.0	39.86
5.5	39.13		

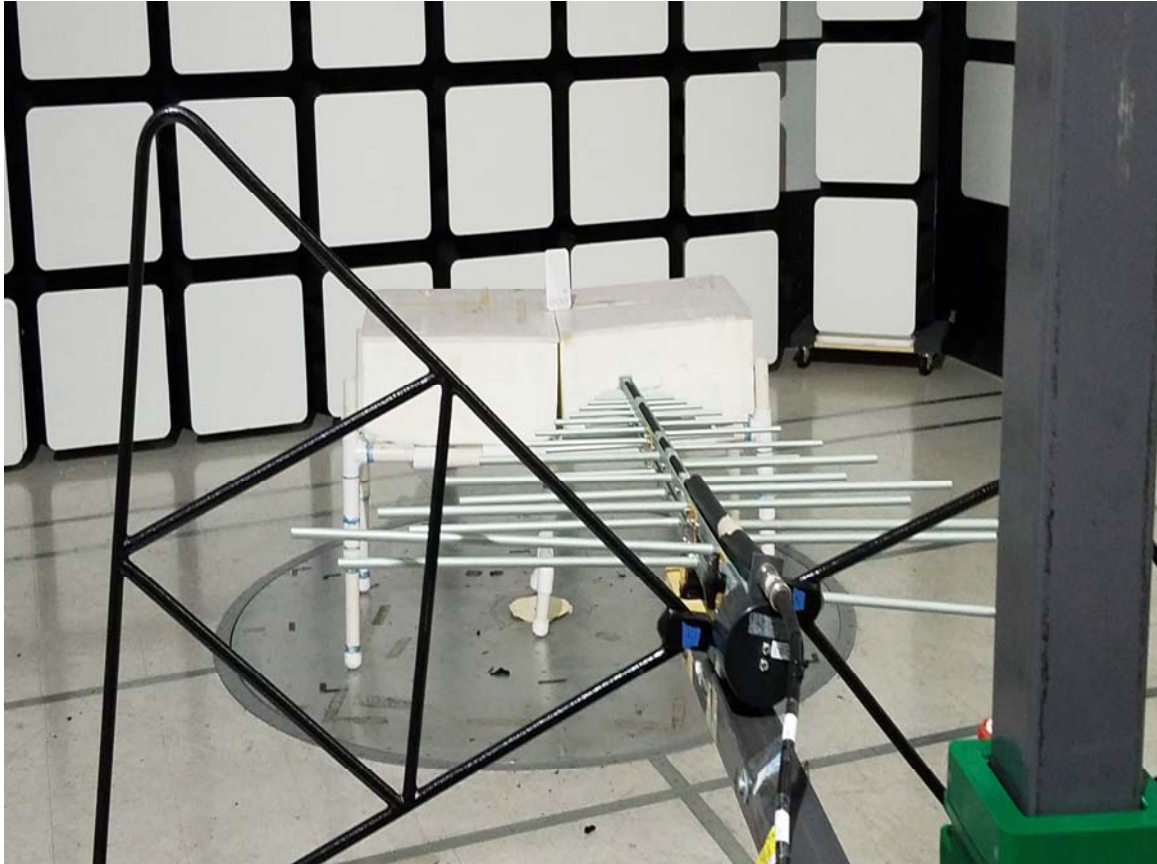

**FRONT VIEW**


VIVINT, INC.

KEYPAD

MODEL: KP01

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – 30 MHz to 1000 MHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

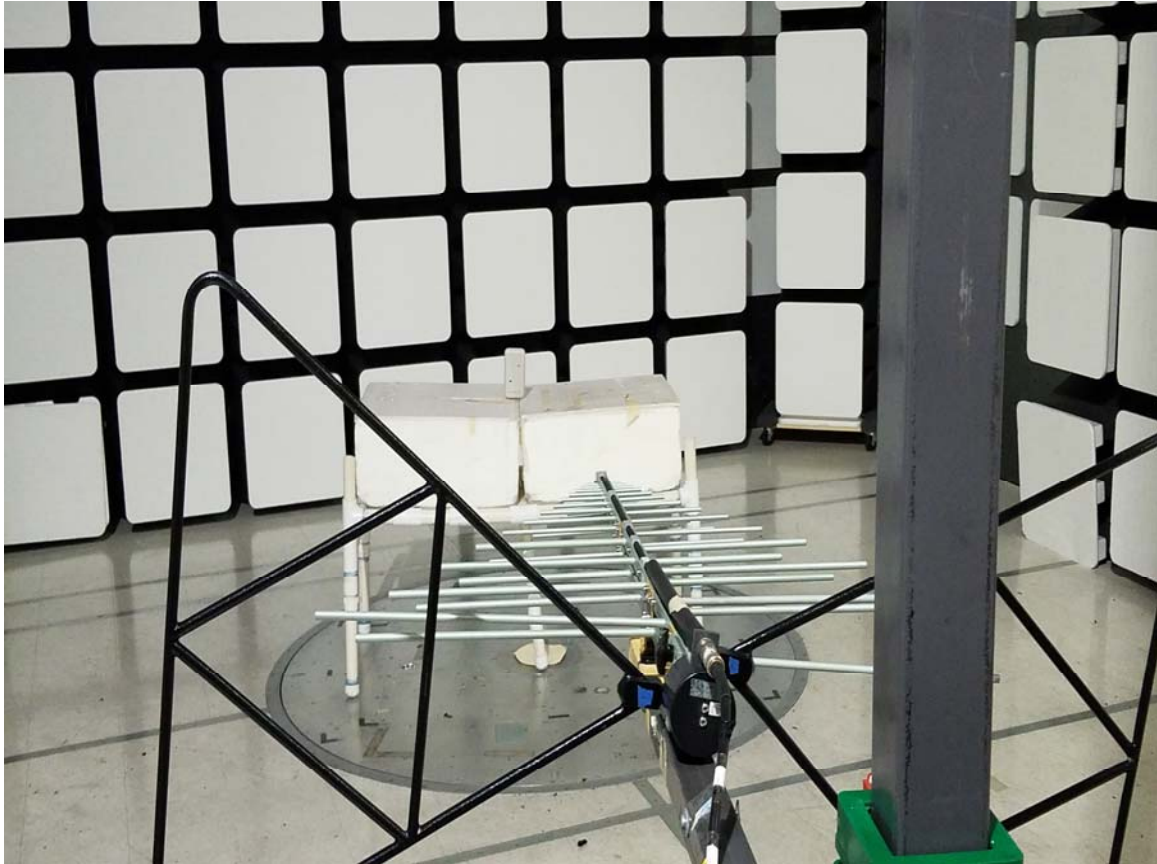

**REAR VIEW**

VIVINT, INC.


KEYPAD

MODEL: KP01

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – 30 MHz to 1000 MHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



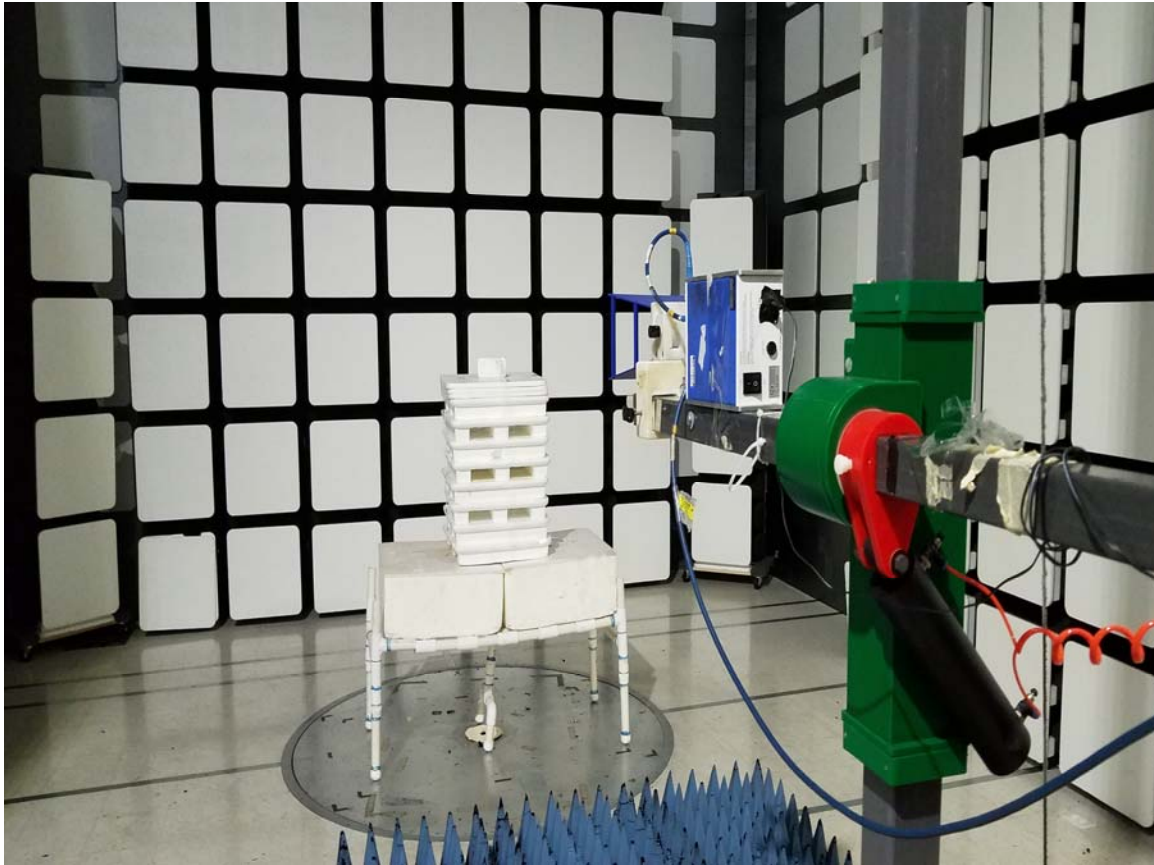


**FRONT VIEW**

VIVINT, INC.  
KEYPAD  
MODEL: KP01

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

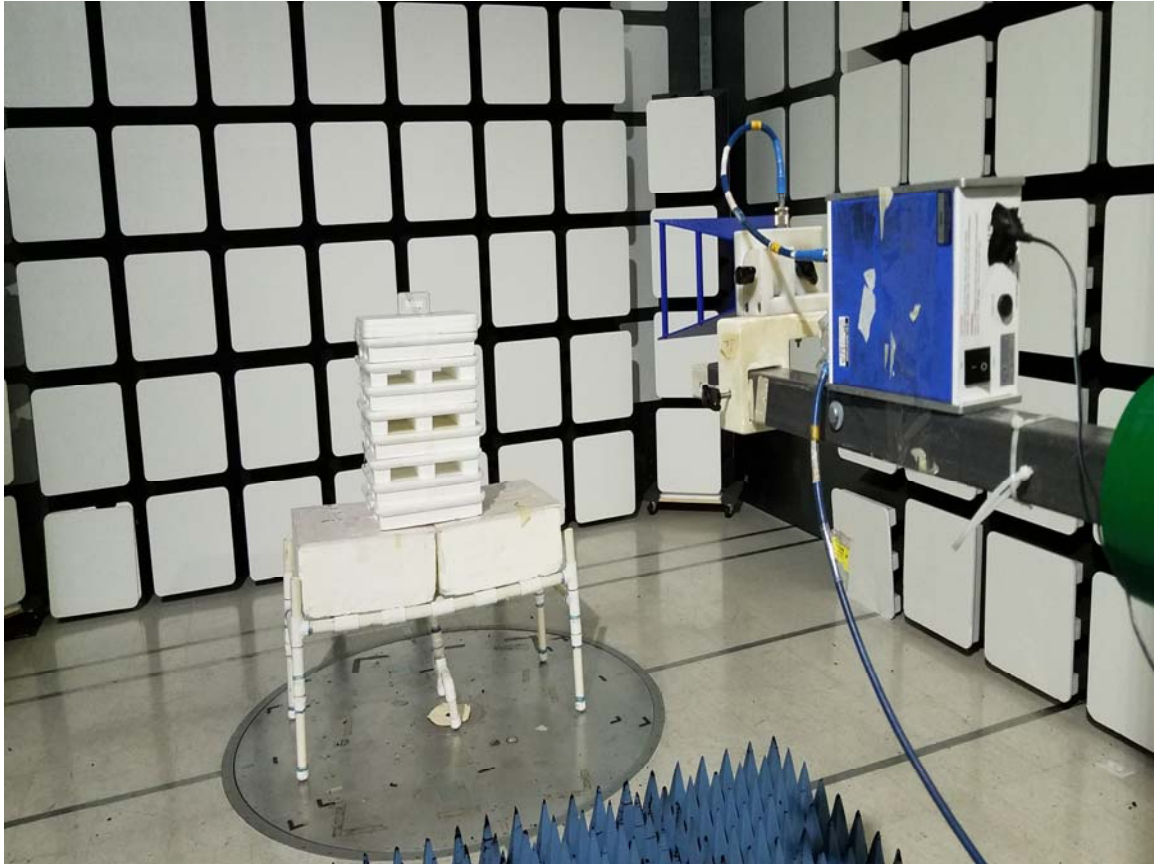

**REAR VIEW**

VIVINT, INC.

KEYPAD


MODEL: KP01

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**APPENDIX E**

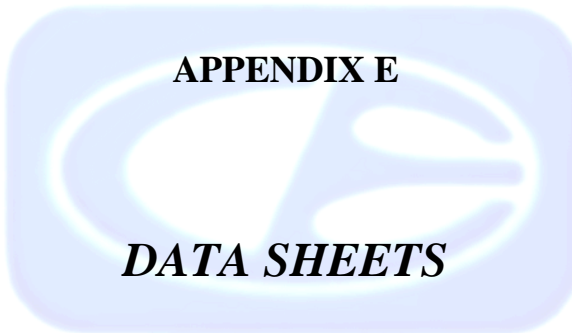

***DATA SHEETS***



***RADIATED EMISSIONS  
DATA SHEETS***

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1824.00								Not in Restricted Band
1824.00								Done Via Conducted
2736.00	38.03	V	73.97	-35.94	Peak	139.00	147.76	
2736.00	25.96	V	53.97	-28.01	Avg	139.00	147.76	
3648.00	50.74	V	73.97	-23.23	Peak	227.00	165.79	
3648.00	45.31	V	53.97	-8.66	Avg	227.00	165.79	
4560.00	48.59	V	73.97	-25.38	Peak	115.00	126.80	
4560.00	41.42	V	53.97	-12.55	Avg	115.00	126.80	
5472.00								Not in Restricted Band
5472.00								Done Via Conducted
6384.00								Not in Restricted Band
6384.00								Done Via Conducted
7296.00	47.21	V	73.97	-26.76	Peak	350.00	126.80	
7296.00	32.79	V	53.97	-21.18	Avg	350.00	126.80	
8208.00	45.61	V	73.97	-28.36	Peak	350.00	124.50	
8208.00	32.28	V	53.97	-21.69	Avg	350.00	124.50	
9120.00	43.08	V	73.97	-30.89	Peak	208.25	126.80	
9120.00	32.02	V	53.97	-21.95	Avg	208.25	126.80	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1824.00								Not in Restricted Band
1824.00								Done Via Conducted
2736.00	39.53	V	73.97	-34.44	Peak	134.25	120.77	
2736.00	27.32	V	53.97	-26.65	Avg	134.25	120.77	
3648.00	50.62	V	73.97	-23.35	Peak	207.25	153.73	
3648.00	45.02	V	53.97	-8.95	Avg	207.25	153.73	
4560.00	46.26	V	73.97	-27.71	Peak	163.25	143.16	
4560.00	37.07	V	53.97	-16.90	Avg	163.25	143.16	
5472.00								Not in Restricted Band
5472.00								Done Via Conducted
6384.00								Not in Restricted Band
6384.00								Done Via Conducted
7296.00	42.81	V	73.97	-31.16	Peak	102.25	130.14	
7296.00	31.31	V	53.97	-22.66	Avg	102.25	130.14	
8208.00	46.08	V	73.97	-27.89	Peak	313.75	141.31	
8208.00	32.01	V	53.97	-21.96	Avg	313.75	141.31	
9120.00	42.70	V	73.97	-31.27	Peak	53.25	121.73	
9120.00	31.83	V	53.97	-22.14	Avg	53.25	121.73	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1824.00								Not in Restricted Band
1824.00								Done Via Conducted
2736.00	37.61	V	73.97	-36.36	Peak	237.25	101.97	
2736.00	25.14	V	53.97	-28.83	Avg	237.25	101.97	
3648.00	53.17	V	73.97	-20.80	Peak	60.75	100.41	
3648.00	48.02	V	53.97	-5.95	Avg	60.75	100.41	
4560.00	51.19	V	73.97	-22.78	Peak	115.75	138.68	
4560.00	44.87	V	53.97	-9.10	Avg	115.75	138.68	
5472.00								Not in Restricted Band
5472.00								Done Via Conducted
6384.00								Not in Restricted Band
6384.00								Done Via Conducted
7296.00	45.84	V	73.97	-28.13	Peak	255.50	138.68	
7296.00	34.24	V	53.97	-19.73	Avg	255.50	138.68	
8208.00	46.92	V	73.97	-27.05	Peak	13.25	135.25	
8208.00	31.95	V	53.97	-22.02	Avg	13.25	135.25	
9120.00	45.46	V	73.97	-28.51	Peak	288.25	138.68	
9120.00	31.97	V	53.97	-22.00	Avg	288.50	138.68	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1824.00								Not in Restricted Band
1824.00								Done Via Conducted
2736.00	38.24	H	73.97	-35.73	Peak	239.00	126.80	
2736.00	27.18	H	53.97	-26.79	Avg	39.00	126.80	
3648.00	48.49	H	73.97	-25.48	Peak	221.00	115.70	
3648.00	42.35	H	53.97	-11.62	Avg	221.00	115.70	
4560.00	48.50	H	73.97	-25.47	Peak	213.25	113.13	
4560.00	42.10	H	53.97	-11.87	Avg	213.25	113.13	
5472.00								Not in Restricted Band
5472.00								Done Via Conducted
6384.00								Not in Restricted Band
6384.00								Done Via Conducted
7296.00	46.17	H	73.97	-27.80	Peak	323.50	100.06	
7296.00	32.91	H	53.97	-21.06	Avg	323.50	100.06	
8208.00	46.07	H	73.97	-27.90	Peak	350.00	100.02	
8208.00	32.08	H	53.97	-21.89	Avg	350.00	100.02	
9120.00	45.83	H	73.97	-28.14	Peak	114.75	102.99	
9120.00	31.96	H	53.97	-22.01	Avg	114.75	102.99	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1824.00								Not in Restricted Band
1824.00								Done Via Conducted
2736.00	38.26	H	73.97	-35.71	Peak	114.75	114.44	
2736.00	26.93	H	53.97	-27.04	Avg	114.75	114.44	
3648.00	46.98	H	73.97	-26.99	Peak	162.00	159.34	
3648.00	40.37	H	53.97	-13.60	Avg	162.00	159.34	
4560.00	49.27	H	73.97	-24.71	Peak	170.00	154.44	
4560.00	42.19	H	53.97	-11.78	Avg	170.00	154.44	
5472.00								Not in Restricted Band
5472.00								Done Via Conducted
6384.00								Not in Restricted Band
6384.00								Done Via Conducted
7296.00	45.25	H	73.97	-28.72	Peak	4.75	132.59	
7296.00	33.68	H	53.97	-20.29	Avg	4.75	132.59	
8208.00	46.25	H	73.97	-27.72	Peak	117.50	124.00	
8208.00	32.10	H	53.97	-21.87	Avg	117.50	124.00	
9120.00	46.35	H	73.97	-27.63	Peak	10.00	124.00	
9120.00	31.91	H	53.97	-22.06	Avg	10.00	124.00	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
 Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1824.00								Not in Restricted Band
1824.00								Done Via Conducted
2736.00	39.18	H	73.97	-34.79	Peak	155.50	128.41	
2736.00	28.70	H	53.97	-25.27	Avg	155.50	128.41	
3648.00	51.26	H	73.97	-22.71	Peak	32.25	184.05	
3648.00	45.08	H	53.97	-8.90	Avg	32.25	184.05	
4560.00	47.53	H	73.97	-26.44	Peak	204.50	142.86	
4560.00	40.04	H	53.97	-13.93	Avg	204.50	142.86	
5472.00								Not in Restricted Band
5472.00								Done Via Conducted
6384.00								Not in Restricted Band
6384.00								Done Via Conducted
7296.00	47.41	H	73.97	-26.56	Peak	223.25	121.43	
7296.00	37.08	H	53.97	-16.89	Avg	223.25	121.43	
8208.00	45.66	H	73.97	-28.31	Peak	137.00	125.25	
8208.00	32.10	H	53.97	-21.87	Avg	137.00	125.25	
9120.00	45.81	H	73.97	-28.16	Peak	350.00	125.00	
9120.00	31.83	H	53.97	-22.14	Avg	350.00	125.00	



**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel  
 Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1840.00								Not in Restricted Band
1840.00								Done Via Conducted
2760.00	36.86	V	73.97	-37.11	Peak	230.75	114.26	
2760.00	24.95	V	53.97	-29.02	Avg	230.75	114.26	
3680.00	47.45	V	73.97	-26.52	Peak	123.50	100.02	
3680.00	41.32	V	53.97	-12.65	Avg	123.50	100.02	
4600.00	46.41	V	73.97	-27.56	Peak	237.25	166.26	
4600.00	38.46	V	53.97	-15.51	Avg	237.25	166.26	
5520.00								Not in Restricted Band
5520.00								Done Via Conducted
6440.00								Not in Restricted Band
6440.00								Done Via Conducted
7360.00	47.03	V	73.97	-26.94	Peak	350.00	147.88	
7360.00	36.70	V	53.97	-17.27	Avg	350.00	147.88	
8280.00	44.00	V	73.97	-29.97	Peak	281.50	124.17	
8280.00	30.42	V	53.97	-23.55	Avg	281.50	124.17	
9200.00	44.43	V	73.97	-29.54	Peak	155.00	125.50	
9200.00	30.67	V	53.97	-23.31	Avg	155.00	125.25	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel  
 Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1840.00								Not in Restricted Band
1840.00								Done Via Conducted
2760.00	37.88	V	73.97	-36.10	Peak	17.00	116.95	
2760.00	24.15	V	53.97	-29.82	Avg	17.00	116.95	
3680.00	49.29	V	73.97	-24.68	Peak	206.25	165.55	
3680.00	42.89	V	53.97	-11.08	Avg	206.25	165.55	
4600.00	43.48	V	73.97	-30.49	Peak	290.25	103.40	
4600.00	34.65	V	53.97	-19.32	Avg	290.25	103.40	
5520.00								Not in Restricted Band
5520.00								Done Via Conducted
6440.00								Not in Restricted Band
6440.00								Done Via Conducted
7360.00	44.98	V	73.97	-28.99	Peak	128.00	234.02	
7360.00	36.28	V	53.97	-17.69	Avg	128.00	234.02	
8280.00	43.86	V	73.97	-30.11	Peak	10.00	207.52	
8280.00	30.77	V	53.97	-23.20	Avg	10.00	207.52	
9200.00	42.65	V	73.97	-31.32	Peak	350.00	207.52	
9200.00	29.23	V	53.97	-24.74	Avg	350.00	207.52	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel  
 Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1840.00								Not in Restricted Band
1840.00								Done Via Conducted
2760.00	37.13	V	73.97	-36.84	Peak	232.50	131.52	
2760.00	26.43	V	53.97	-27.54	Avg	232.50	131.52	
3680.00	53.58	V	73.97	-20.39	Peak	246.00	153.85	
3680.00	48.05	V	53.97	-5.92	Avg	246.00	153.85	
4600.00	45.87	V	73.97	-28.10	Peak	142.25	129.85	
4600.00	37.58	V	53.97	-16.40	Avg	142.25	129.85	
5520.00								Not in Restricted Band
5520.00								Done Via Conducted
6440.00								Not in Restricted Band
6440.00								Done Via Conducted
7360.00	43.69	V	73.97	-30.28	Peak	249.25	116.65	
7360.00	31.52	V	53.97	-22.45	Avg	249.25	116.65	
8280.00	44.40	V	73.97	-29.58	Peak	350.00	112.25	
8280.00	30.34	V	53.97	-23.63	Avg	350.00	112.25	
9200.00	45.36	V	73.97	-28.61	Peak	357.25	114.20	
9200.00	30.52	V	53.97	-23.45	Avg	357.25	114.20	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel  
 Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1840.00								Not in Restricted Band
1840.00								Done Via Conducted
2760.00	38.99	H	73.97	-34.98	Peak	18.50	147.28	
2760.00	25.06	H	53.97	-28.91	Avg	18.50	147.28	
3680.00	52.16	H	73.97	-21.82	Peak	149.50	143.70	
3680.00	46.83	H	53.97	-7.14	Avg	149.50	143.70	
4600.00	46.44	H	73.97	-27.53	Peak	282.50	120.23	
4600.00	38.72	H	53.97	-15.26	Avg	282.50	120.23	
5520.00								Not in Restricted Band
5520.00								Done Via Conducted
6440.00								Not in Restricted Band
6440.00								Done Via Conducted
7360.00	45.68	H	73.97	-28.29	Peak	27.50	140.05	
7360.00	31.39	H	53.97	-22.58	Avg	27.50	140.05	
8280.00	40.96	H	73.97	-33.01	Peak	327.75	142.05	
8280.00	30.69	H	53.97	-23.28	Avg	327.75	142.05	
9200.00	44.30	H	73.97	-29.67	Peak	66.25	142.55	
9200.00	30.57	H	53.97	-23.40	Avg	66.25	142.55	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel  
 Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1840.00								Not in Restricted Band
1840.00								Done Via Conducted
2760.00	38.81	H	73.97	-35.16	Peak	157.50	129.43	
2760.00	25.41	H	53.97	-28.56	Avg	157.50	129.43	
3680.00	46.48	H	73.97	-27.49	Peak	149.00	162.66	
3680.00	39.15	H	53.97	-14.82	Avg	149.00	162.68	
4600.00	44.54	H	73.97	-29.44	Peak	182.50	114.68	
4600.00	36.40	H	53.97	-17.57	Avg	182.50	114.68	
5520.00								Not in Restricted Band
5520.00								Done Via Conducted
6440.00								Not in Restricted Band
6440.00								Done Via Conducted
7360.00	46.33	H	73.97	-27.64	Peak	24.00	109.97	
7360.00	33.63	H	53.97	-20.34	Avg	24.00	109.97	
8280.00	43.70	H	73.97	-30.27	Peak	245.25	106.02	
8280.00	30.71	H	53.97	-23.26	Avg	245.25	106.02	
9200.00	44.40	H	73.97	-29.57	Peak	24.00	109.67	
9200.00	30.48	H	53.97	-23.49	Avg	24.00	109.67	

**FCC 15.247 and RSS-247**

Vivint, Inc.  
 Keypad  
 Model: KP01

Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Harmonics - High Channel  
 Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1840.00								Not in Restricted Band
1840.00								Done Via Conducted
2760.00	37.88	H	73.97	-36.09	Peak	87.75	106.44	
2760.00	24.82	H	53.97	-29.15	Avg	87.75	106.44	
3680.00	49.79	H	73.97	-24.19	Peak	146.50	168.35	
3680.00	43.79	H	53.97	-10.18	Avg	146.50	168.35	
4600.00	46.73	H	73.97	-27.25	Peak	107.75	133.25	
4600.00	40.08	H	53.97	-13.89	Avg	107.75	133.25	
5520.00								Not in Restricted Band
5520.00								Done Via Conducted
6440.00								Not in Restricted Band
6440.00								Done Via Conducted
7360.00	47.66	H	73.97	-26.31	Peak	248.75	125.25	
7360.00	32.71	H	53.97	-21.26	Avg	248.75	125.25	
8280.00	44.10	H	73.97	-29.87	Peak	72.00	127.82	
8280.00	30.26	H	53.97	-23.71	Avg	72.00	127.82	
9200.00	43.41	H	73.97	-30.56	Peak	71.25	105.63	
9200.00	29.49	H	53.97	-24.48	Avg	71.25	105.63	

**FCC 15.247 and RSS-247**

 Vivint, Inc.  
 Keypad  
 Model: KP01

 Date: 03/04/2021  
 Lab: D  
 Tested By: Kyle Fujimoto

**Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz**  
**Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz to 9.3 GHz**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
								No Emissions Detected from 9 kHz to 30 MHz for the digital portion of the EUT
								No Emissions Detected from 1 GHz to 9.3 GHz for the digital portion of the EUT
								No Emissions Detected from 9 kHz to 30 MHz for the Non-Harmonic Emissions of the Transmitter for the EUT
								No Emissions Detected from 1 GHz to 9.3 GHz for the Non-Harmonic Emissions of the Transmitter for the EUT
								Investigated in the X-Axis, Y-Axis, and Z-Axis
								Investigated at both Low channel and High channel





Title: Pre-Scan - FCC Class B  
File: 3 - Keysight - Pre-Scan - 912.00 MHz - Tx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021 set  
Operator: Kyle Fujimoto  
EUT Type: Keypad  
EUT Condition: The EUT is continuously transmitting at 912 MHz  
Company: Vvint, Inc.  
Model: KP01  
S/N: N/A  
Note: The emission at 912 MHz is from the intentional radiator from the EUT and is subject to the limits of FCC 15.249 instead.  
X-Axis

3/5/2021 9:46:59 AM  
Sequence: Preliminary Scan



Title: Radiated Final - FCC Class B  
 File: 3 - Keysight - Final Scan - 912.00 MHz - Tx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021.set  
 Operator: Kyle Fujimoto  
 EUT Type: Keypad  
 EUT Condition: The EUT is continuously transmitting at 912 MHz  
 Company: Vivint, Inc.  
 Model: KP01  
 S/N: N/A  
 X-Axis

3/5/2021 10:19:21 AM  
 Sequence: Final Measurements


FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(QP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deq)	Twr Ht (cm)
799.90	H	38.17	32.73	-7.83	-13.27	46.00	26.30	2.31	150.25	159.76
802.10	H	37.61	32.78	-8.39	-13.22	46.00	26.40	2.31	116.00	142.62
804.90	H	38.36	32.88	-7.64	-13.12	46.00	26.50	2.31	211.25	306.14
833.90	H	39.02	33.08	-6.98	-12.92	46.00	26.82	2.30	219.00	320.89
845.30	H	38.26	32.83	-7.74	-13.17	46.00	26.66	2.29	4.25	323.52
849.60	H	38.45	32.87	-7.55	-13.13	46.00	26.70	2.29	345.00	190.98



Title: Pre-Scan - FCC Class B  
File: 4 - Keysight - Pre-Scan - 920.00 MHz - Tx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021 set  
Operator: Kyle Fujimoto  
EUT Type: Keypad  
EUT Condition: The EUT is continuously transmitting at 920 MHz  
Company: Vivint, Inc.  
Model: KP01  
S/N: N/A  
Note: The emission at 920 MHz is from the intentional radiator from the EUT and is subject to the limits of FCC 15.249 instead.  
X-Axis

3/5/2021 10:36:51 AM  
Sequence: Preliminary Scan

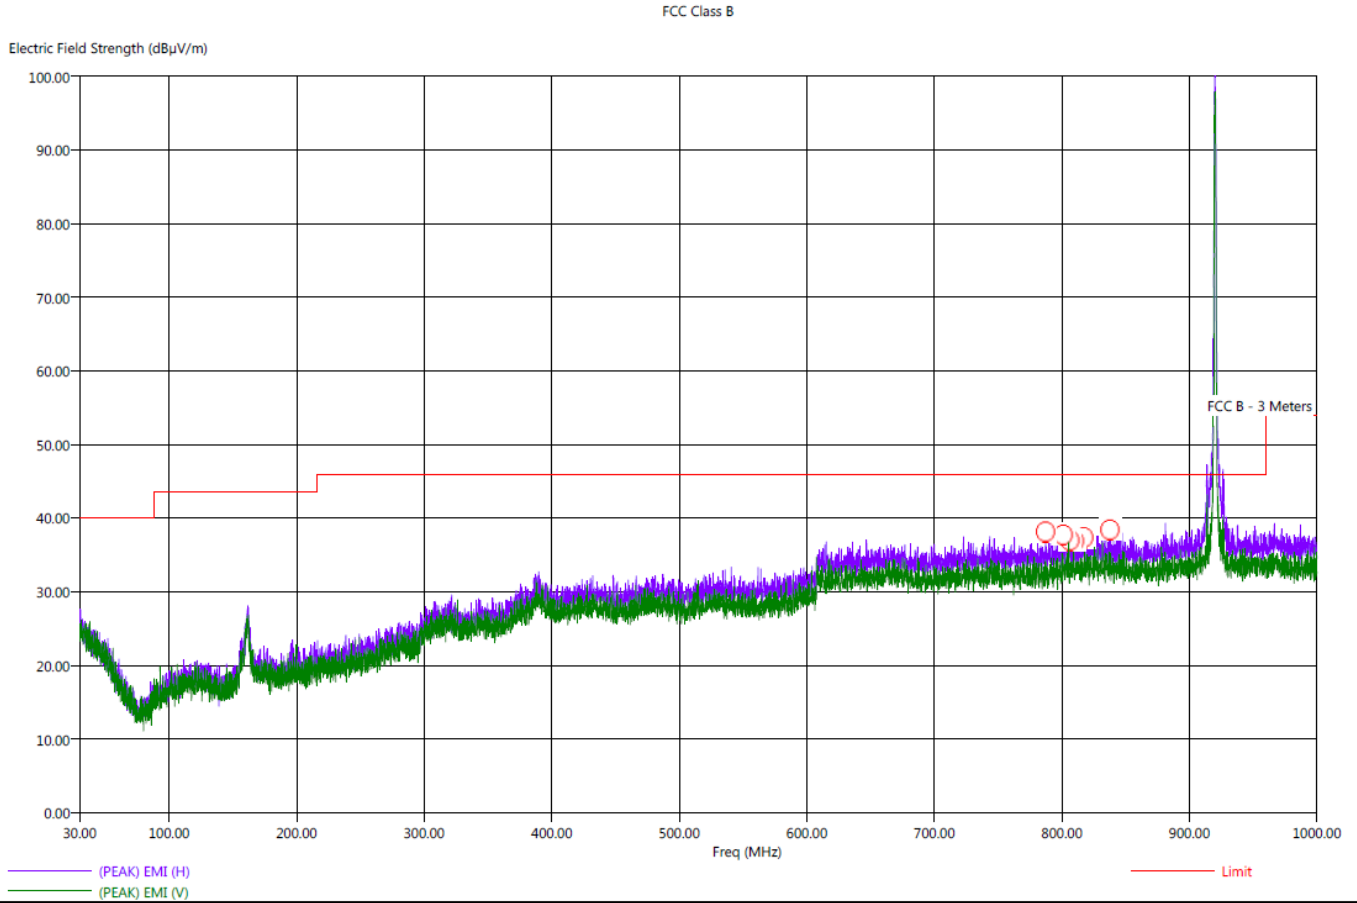

Title: Radiated Final - FCC Class B  
 File: 4 - Keysight - Final Scan - 920.00 MHz - Tx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021.set  
 Operator: Kyle Fujimoto  
 EUT Type: Keypad  
 EUT Condition: The EUT is continuously transmitting at 920 MHz  
 Company: Vivot, Inc.  
 Model: KP01  
 S/N: N/A  
 X-Axis

3/5/2021 11:13:46 AM  
 Sequence: Final Measurements

## FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(QP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (dea)	Twr Ht (cm)
787.10	H	38.54	32.41	-7.46	-13.59	46.00	25.80	2.29	185.00	240.71
801.10	H	39.05	32.81	-6.95	-13.19	46.00	26.30	2.31	45.50	400.05
806.20	H	38.66	33.10	-7.34	-12.90	46.00	26.60	2.31	159.75	362.74
810.00	H	38.90	33.08	-7.10	-12.92	46.00	26.60	2.31	29.25	227.58
817.30	H	37.91	33.30	-8.09	-12.70	46.00	26.90	2.30	282.50	375.82
837.70	H	38.30	33.06	-7.70	-12.94	46.00	26.70	2.29	195.25	111.10




Title: Pre-Scan - FCC Class B  
 File: 7 - Keysight - Pre-Scan - 912.00 MHz - Rx Mode - Z-Axis - KP01 - FCC Class B - 03-05-2021.set  
 Operator: Kyle Fujimoto  
 EUT Type: Keypad  
 EUT Condition: The EUT is continuously receiving at 912.00 MHz  
 Company: Vivint, Inc.  
 Model: KP01  
 S/N: N/A  
 Z-Axis

3/5/2021 2:48:58 PM  
 Sequence: Preliminary Scan

FCC Class B

Electric Field Strength (dBµV/m)

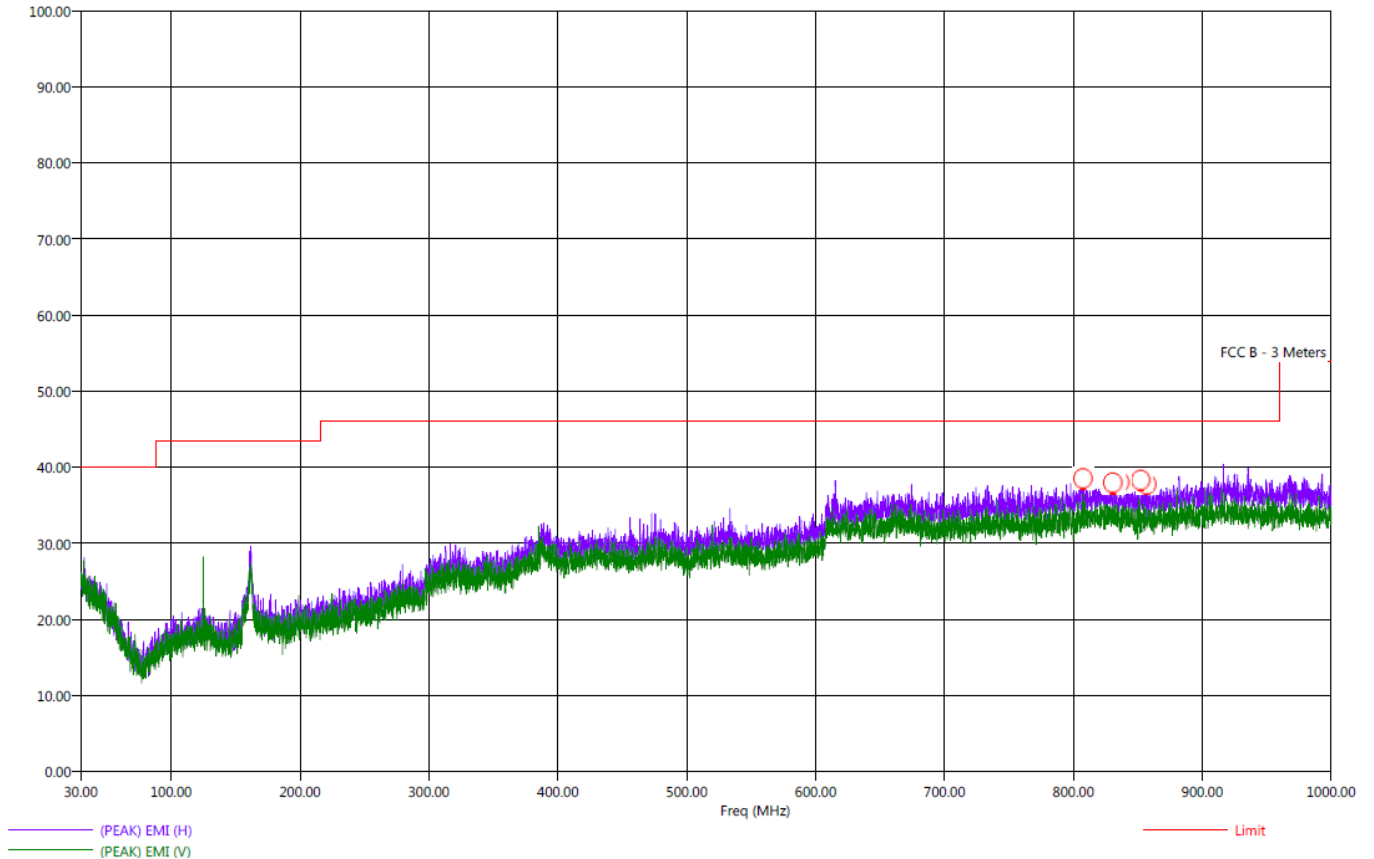

Title: Radiated Final - FCC Class B  
 File: 7 - Keysight - Final Scan - 912.00 MHz - Rx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021.set  
 Operator: Kyle Fujimoto  
 EUT Type: Keypad  
 EUT Condition: The EUT is continuously receiving at 912 MHz  
 Company: Vivint, Inc.  
 Model: KP01  
 S/N: N/A  
 Z-Axis

3/5/2021 2:58:35 PM  
 Sequence: Final Measurements


## FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBμV/m)	(OP) EMI (dBμV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBμV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deg)	Twr Ht (cm)
807.50	H	38.73	33.18	-7.27	-12.82	46.00	26.60	2.31	32.00	400.11
830.50	H	39.04	33.42	-6.96	-12.58	46.00	27.00	2.30	359.75	351.34
830.90	H	38.43	33.42	-7.57	-12.58	46.00	27.00	2.30	194.75	156.59
836.20	H	38.54	33.14	-7.46	-12.86	46.00	26.70	2.30	167.75	110.74
852.20	H	38.96	33.02	-7.04	-12.98	46.00	26.70	2.30	248.75	192.95
857.00	H	38.44	33.06	-7.56	-12.94	46.00	26.78	2.31	227.75	161.79



Title: Pre-Scan - FCC Class B  
 File: 8 - Keysight - Pre-Scan - 920.00 MHz - Rx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021.set  
 Operator: Kyle Fujimoto  
 EUT Type: Keypad  
 EUT Condition: The EUT is continuously receiving at 920.00 MHz  
 Company: Vivint, Inc.  
 Model: KP01  
 S/N: N/A  
 X-Axis

3/5/2021 4:11:06 PM  
 Sequence: Preliminary Scan

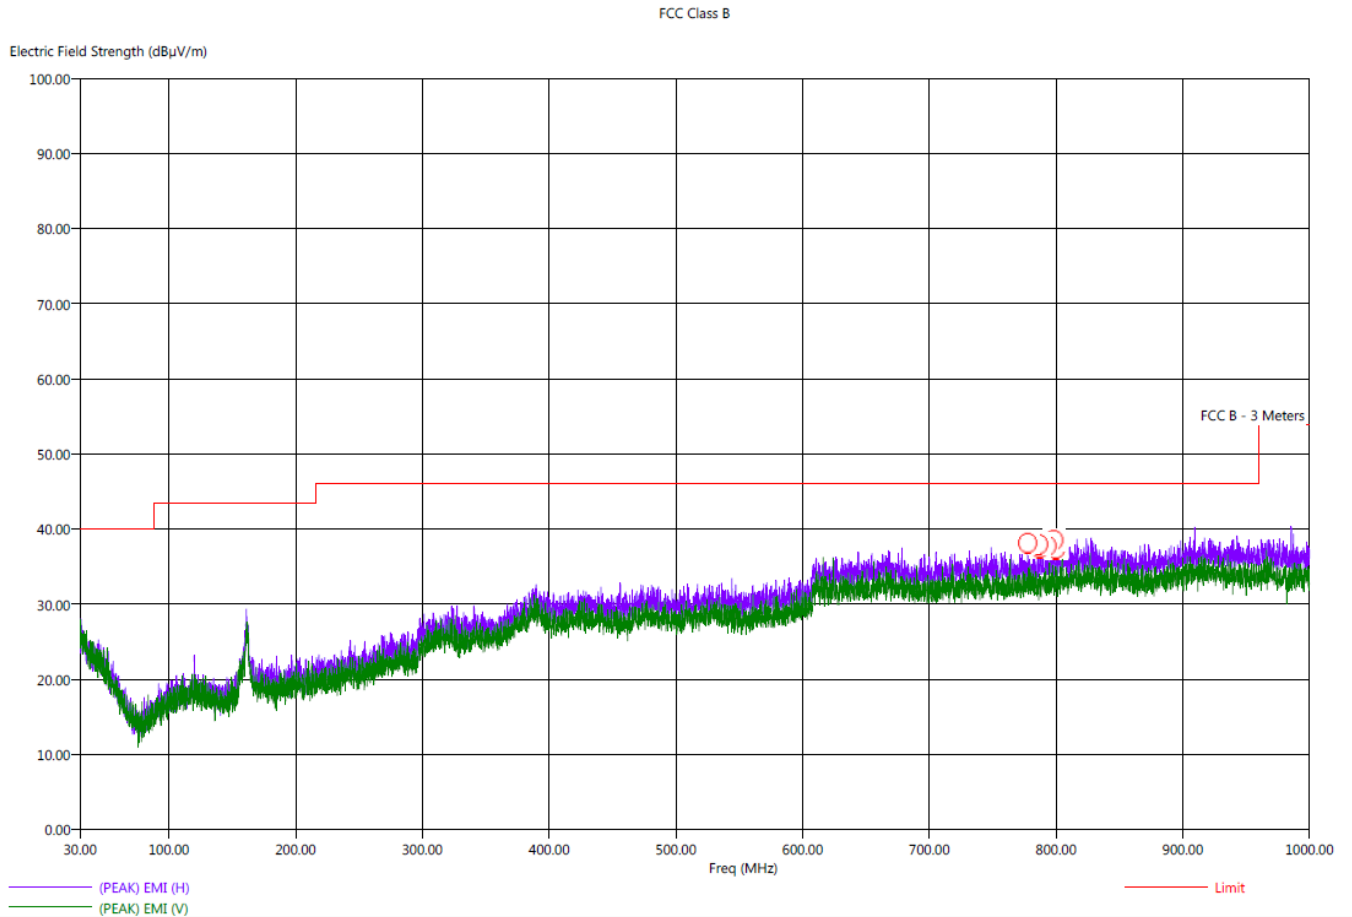

Title: Radiated Final - FCC Class B  
 File: 8 - Keysight - Final Scan - 920.00 MHz - Rx Mode - X-Axis - KP01 - FCC Class B - 03-05-2021.set  
 Operator: Kyle Fujimoto  
 EUT Type: Keypad  
 EUT Condition: The EUT is continuously receiving at 920 MHz  
 Company: Vivint, Inc.  
 Model: KP01  
 S/N: N/A  
 X-Axis

3/5/2021 4:32:29 PM  
 Sequence: Final Measurements

## FCC Class B


Freq (MHz)	Pol	(PEAK) EMI (dB $\mu$ V/m)	(QP) EMI (dB $\mu$ V/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dB $\mu$ V/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deg)	Twr Ht (cm)
777.60	H	36.99	32.38	-9.01	-13.62	46.00	25.60	2.27	21.25	398.14
786.30	H	38.10	32.47	-7.90	-13.53	46.00	25.80	2.28	80.75	353.73
787.20	H	37.35	32.48	-8.65	-13.52	46.00	25.80	2.28	89.25	127.64
792.90	H	38.19	32.68	-7.81	-13.32	46.00	26.00	2.30	173.00	272.23
798.30	H	38.05	32.77	-7.95	-13.23	46.00	26.20	2.31	251.25	350.74
799.90	H	38.23	32.83	-7.77	-13.17	46.00	26.27	2.31	289.25	191.28








***BAND EDGE  
DATA SHEETS***

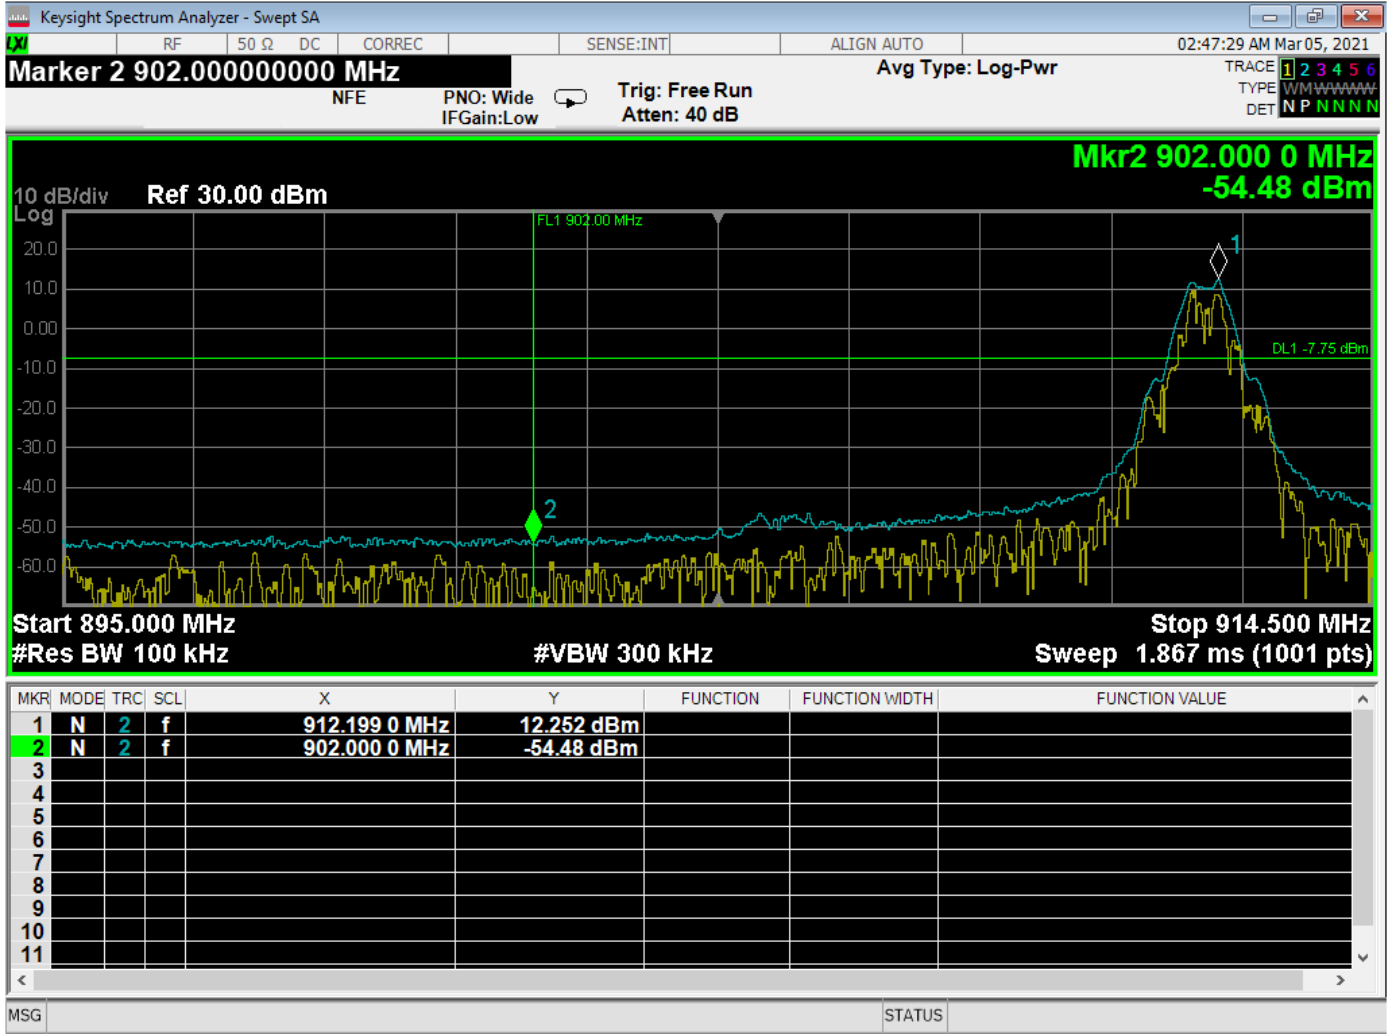


Band Edge – Low Channel

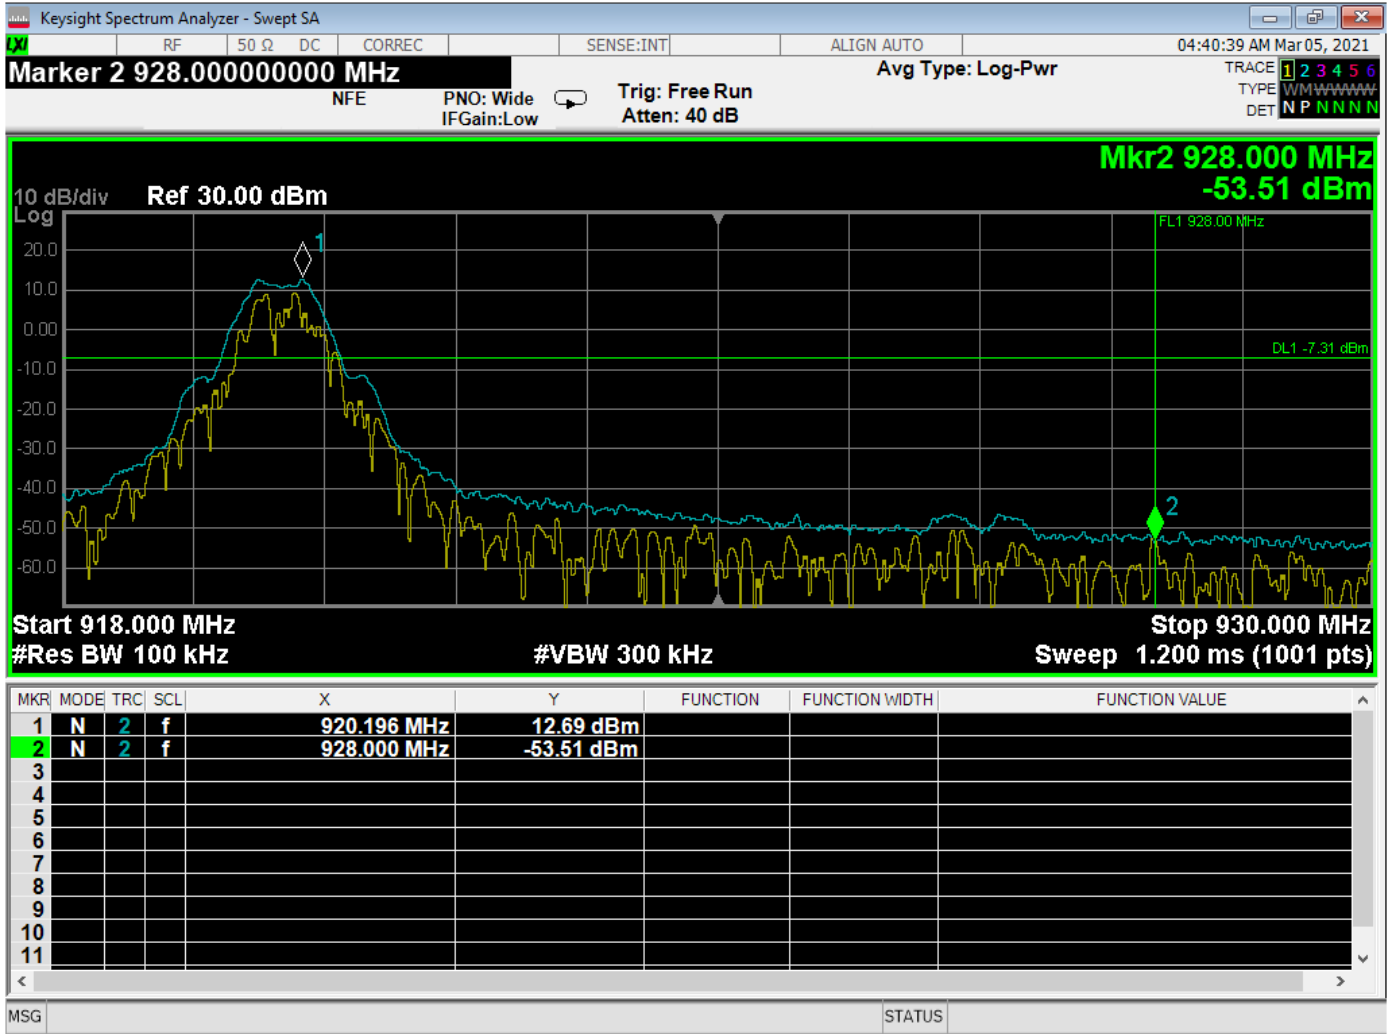


Band Edge – High Channel



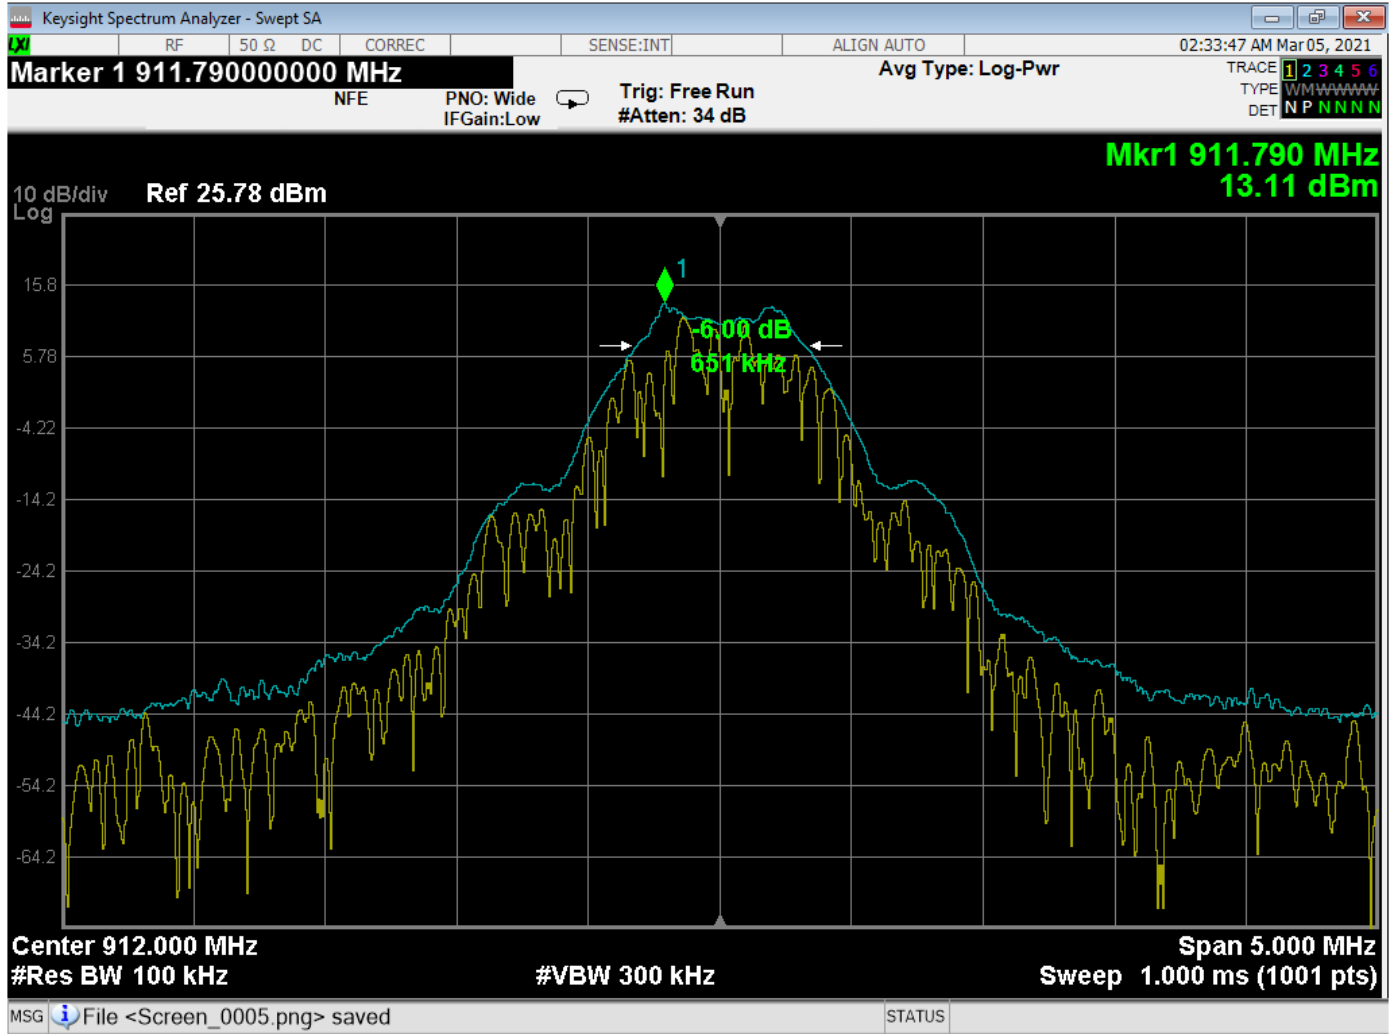


-6 dB Bandwidth – Low Channel

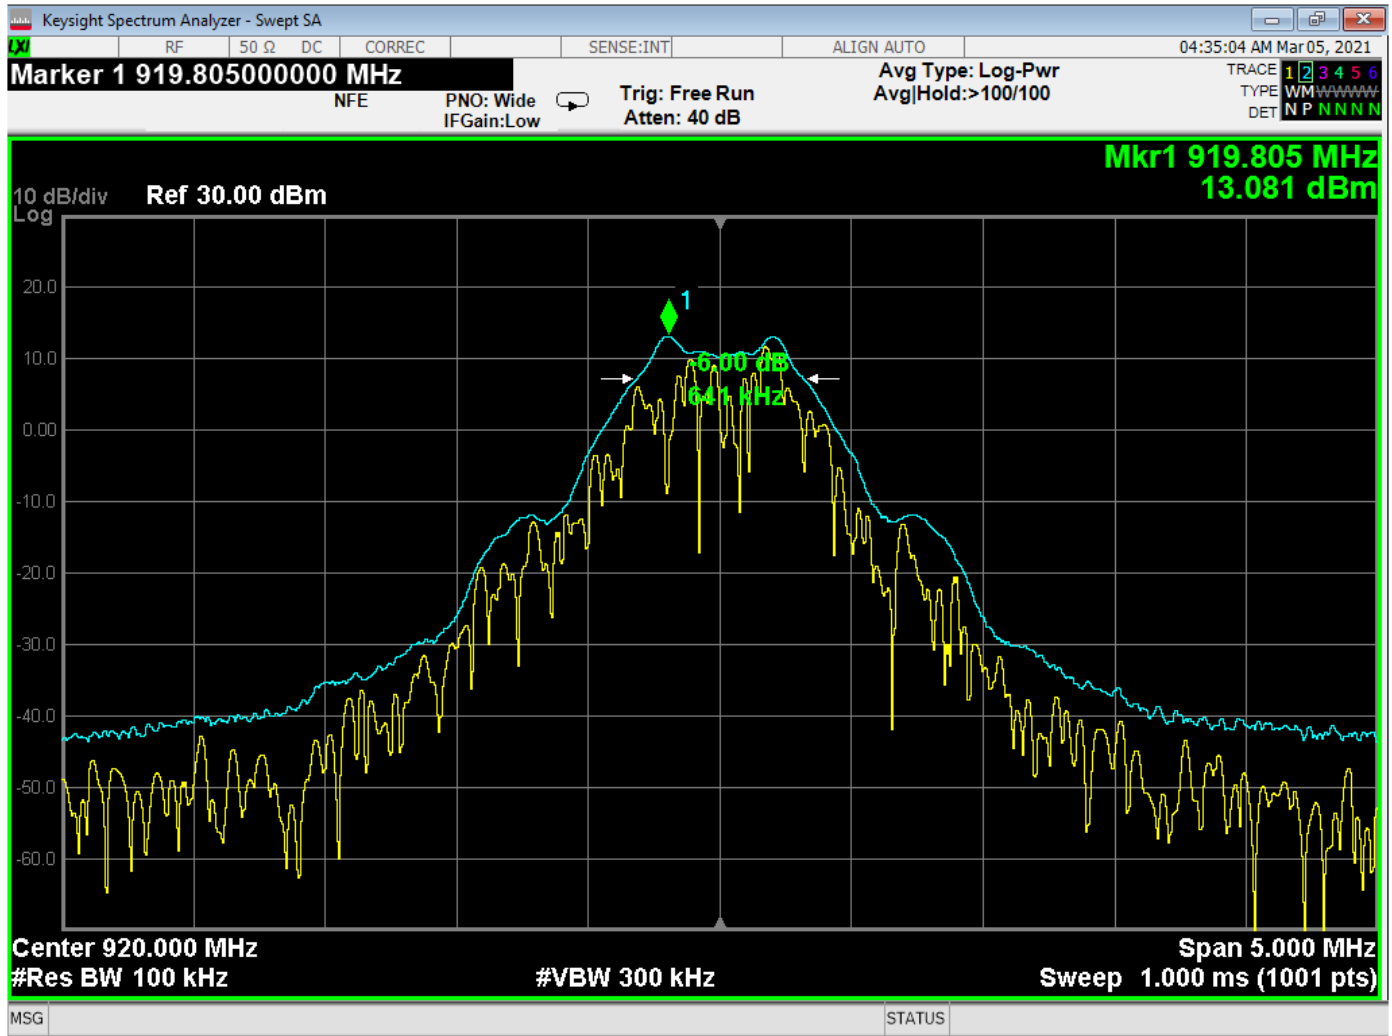

-6 dB Bandwidth – High Channel




***PEAK POWER OUTPUT  
DATA SHEETS***

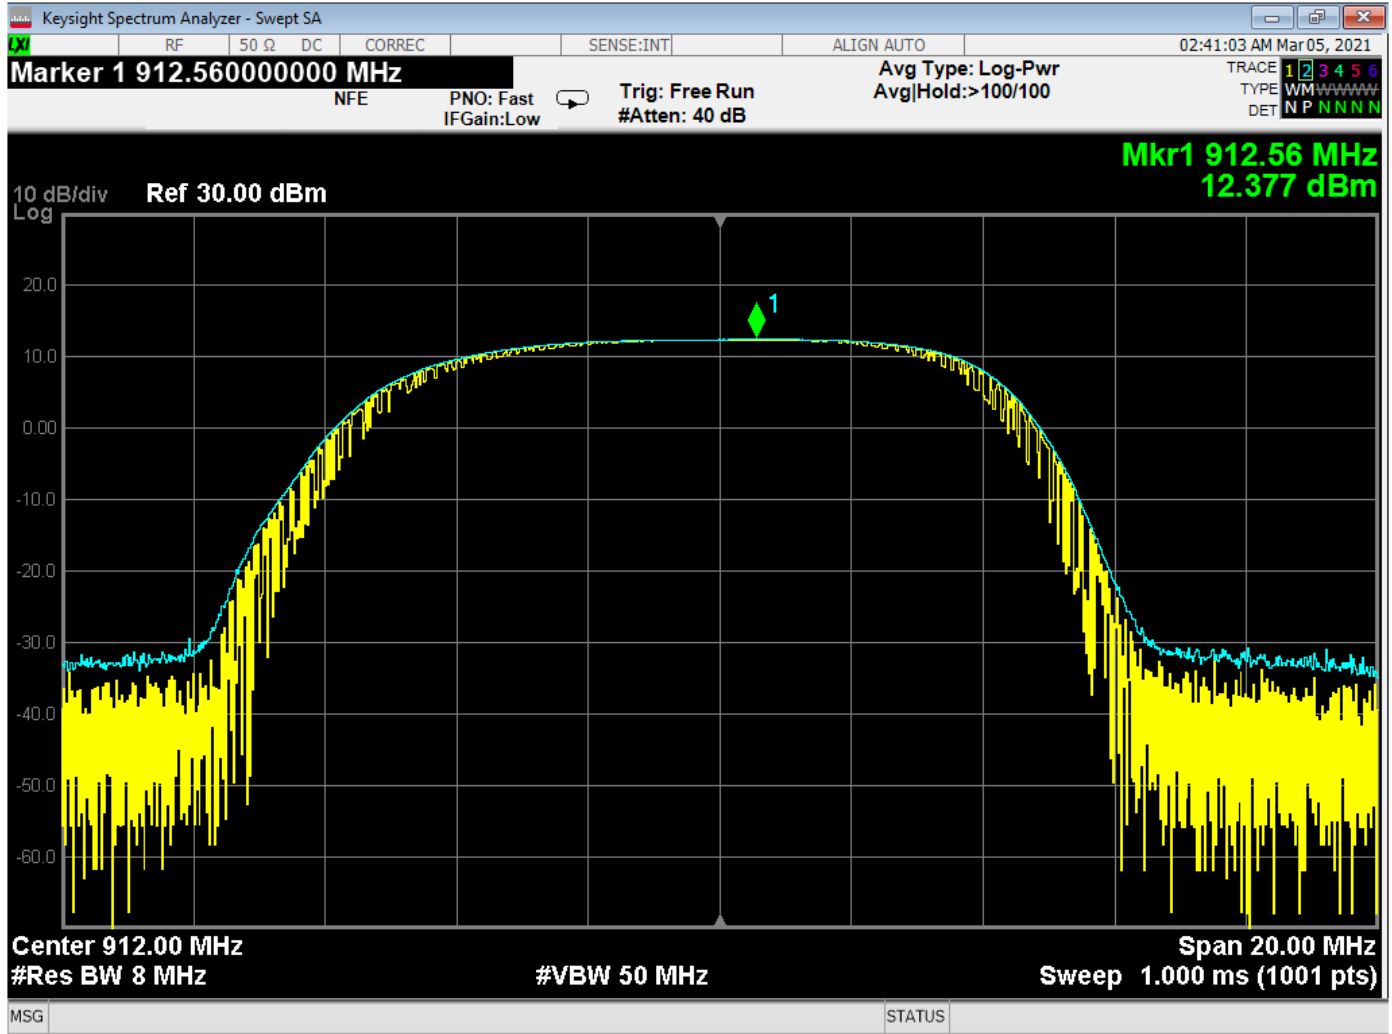

Peak Power Output – Low Channel




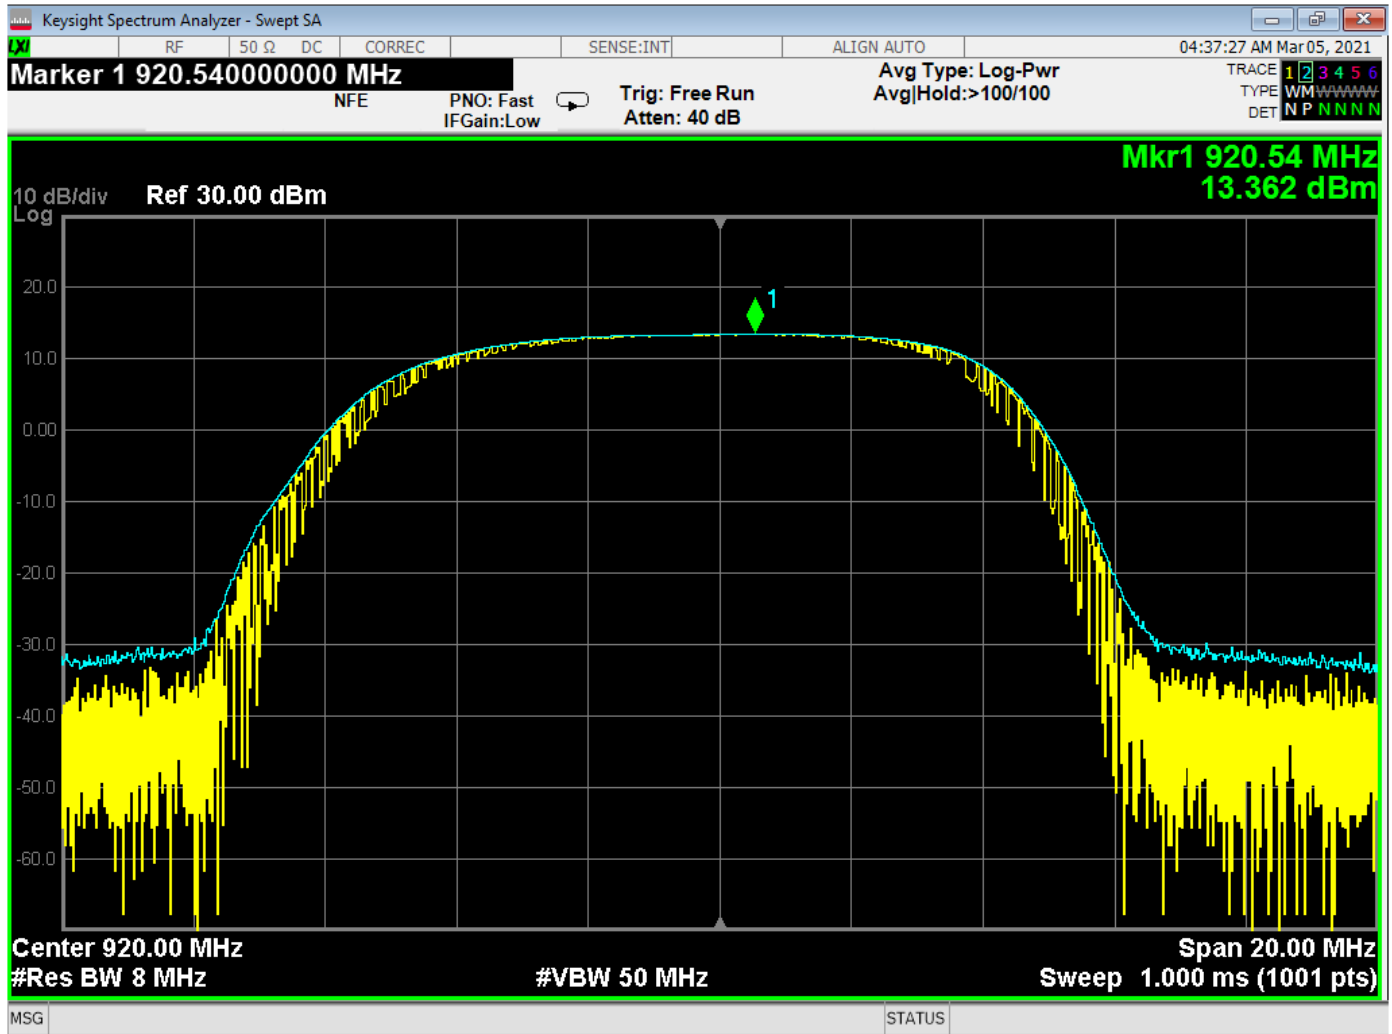


Peak Power Output – High Channel



***RF ANTENNA CONDUCTED***  
***DATA SHEETS***

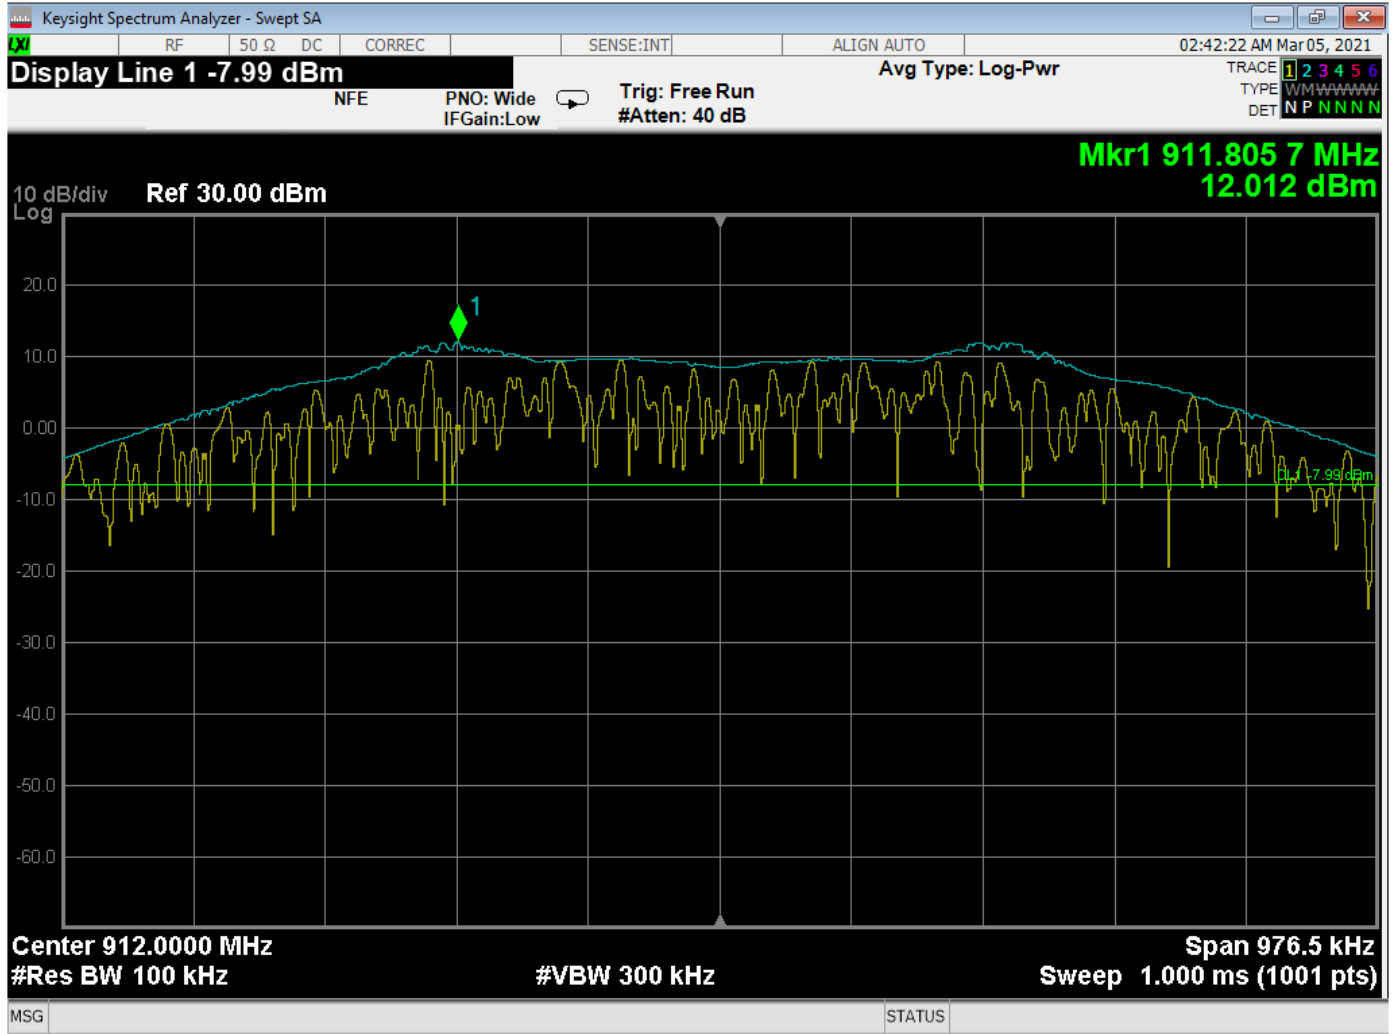

RF Antenna Conducted – Low Channel – Reference Level

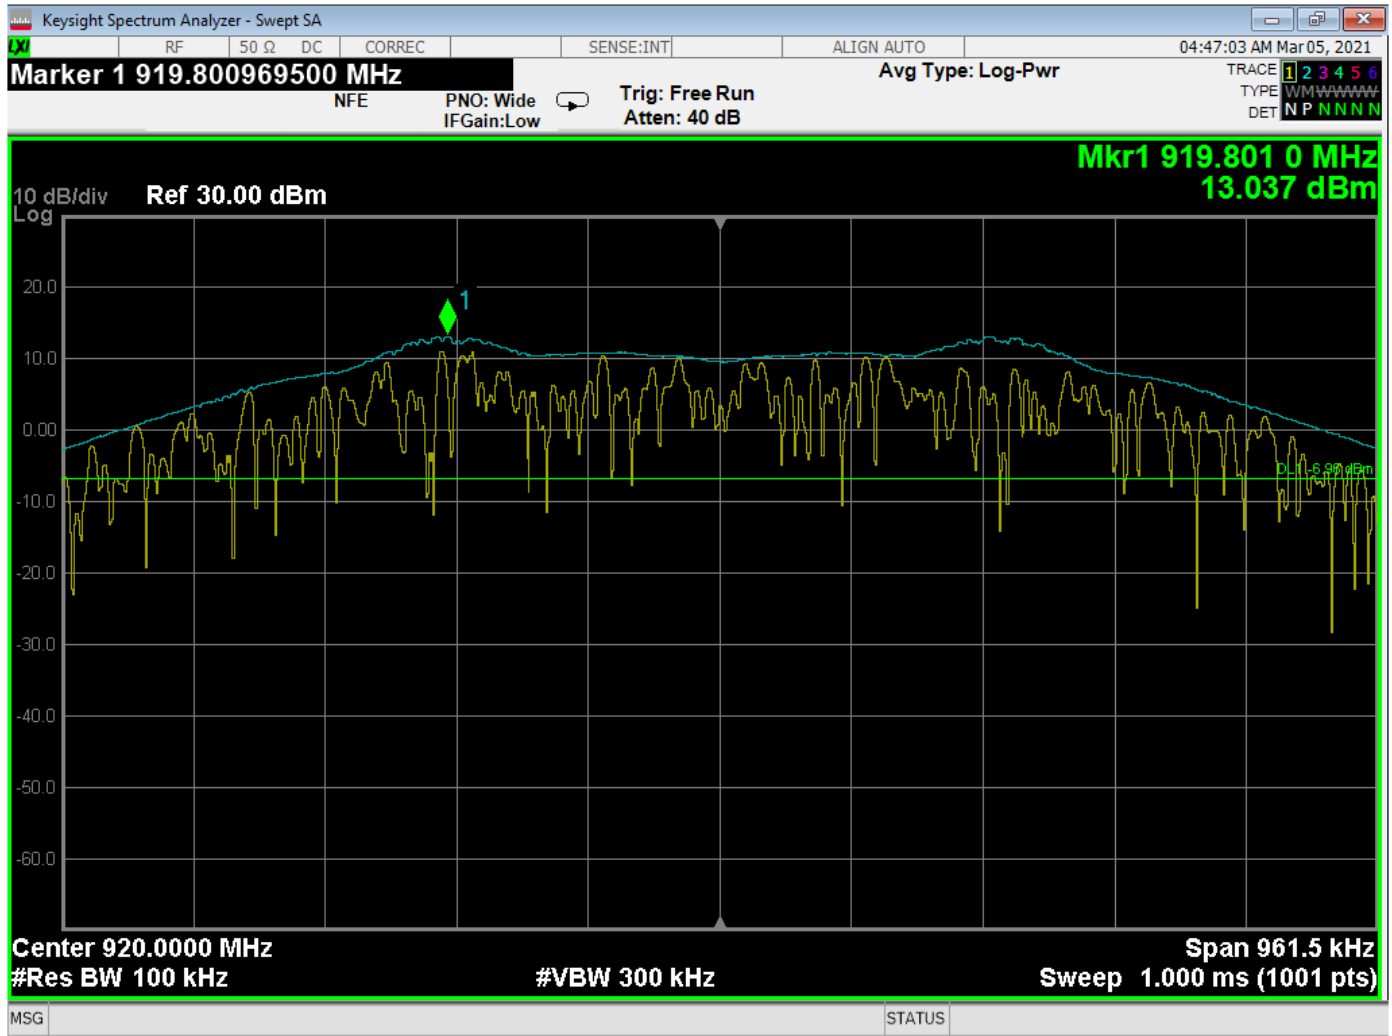

RF Antenna Conducted – High Channel – Reference Level

VIVINT, INC.

KEYPAD


MODEL: KP01

EMISSIONS IN NON-RESTRICTED BANDS


<b>FREQUENCY (MHz)</b>	<b>LEVEL (dBm)</b>	<b>Limit* (dBm)</b>	<b>Margin (dB)</b>
771.256	-51.096	-6.963	-44.133
930.008	-52.430	-6.963	-45.467
1824.00	-56.824	-7.988	-48.836



***PEAK POWER SPECTRAL DENSITY  
DATA SHEETS***

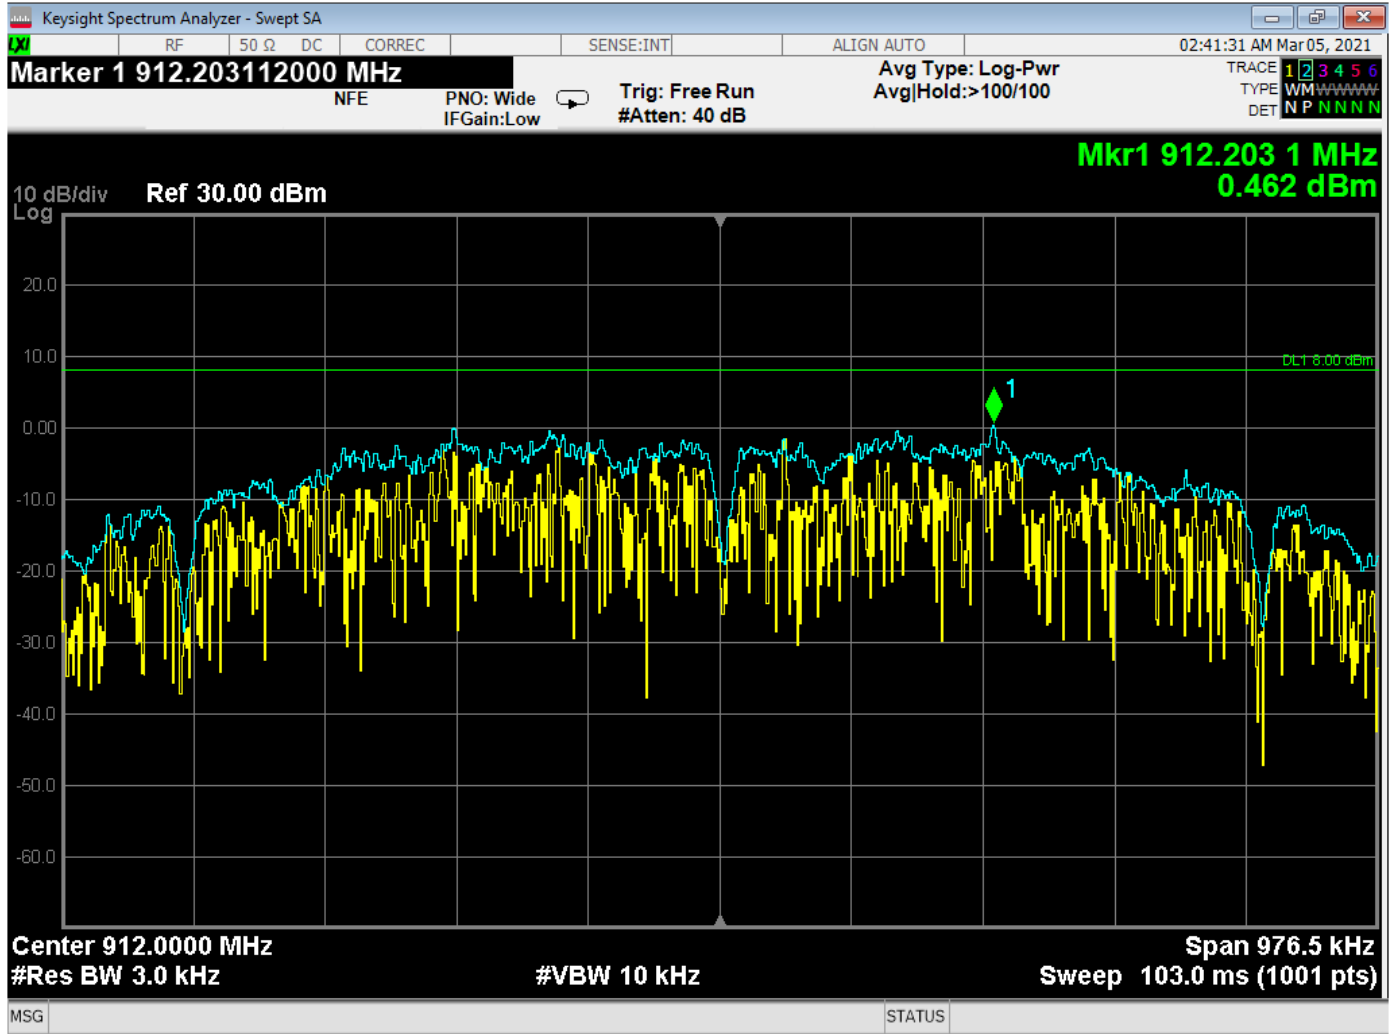


Peak Power Spectral Density – Low Channel

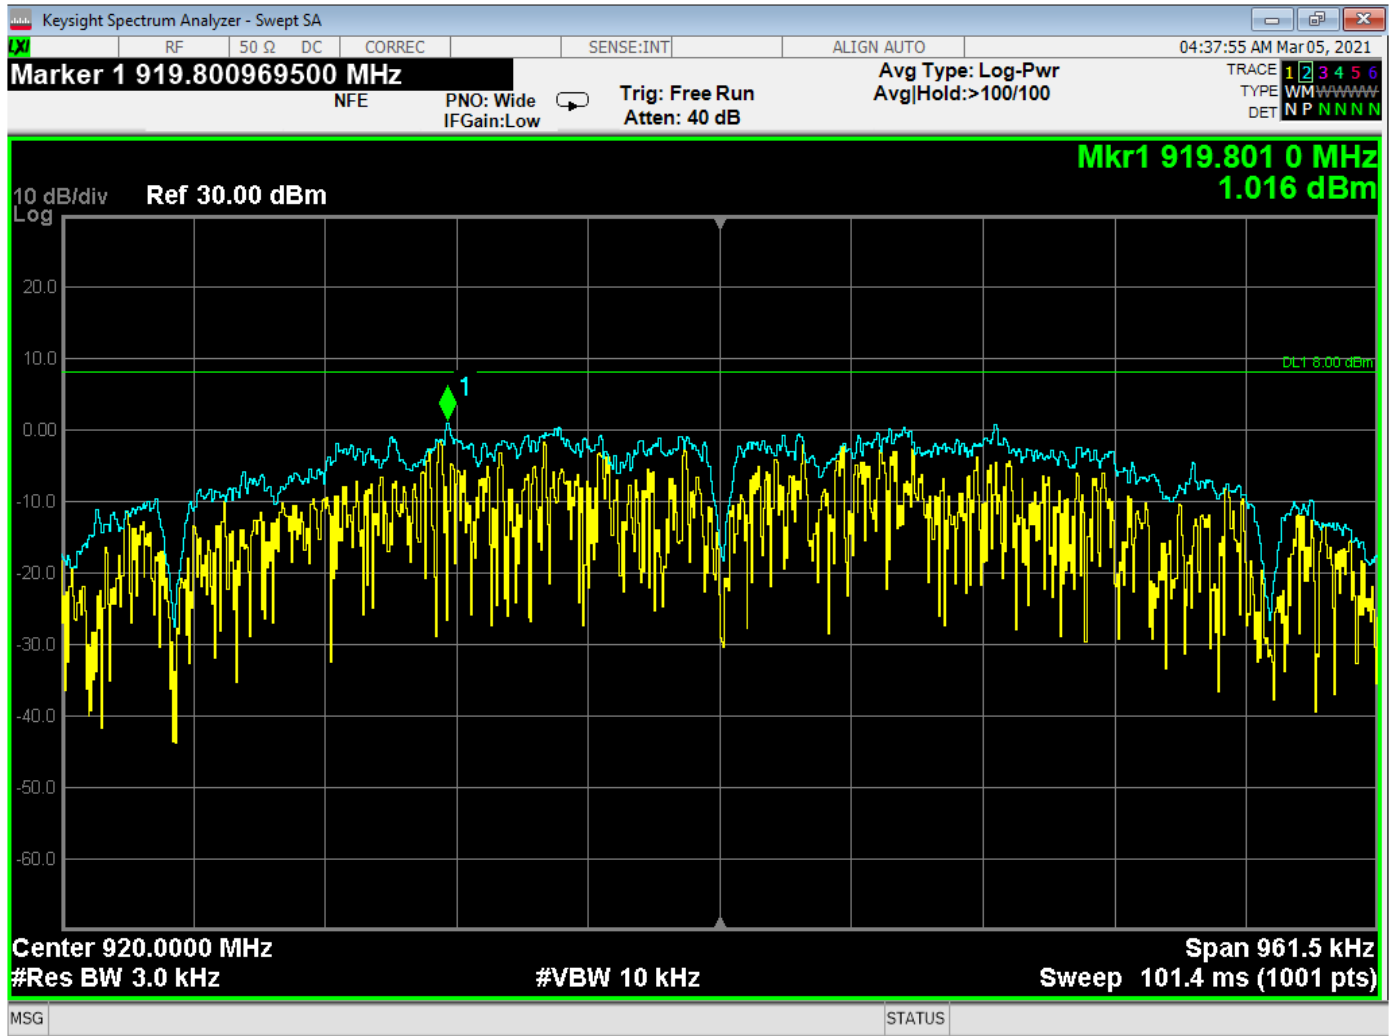


Peak Power Spectral Density – High Channel



***99% BANDWIDTH***  
***DATA SHEETS***

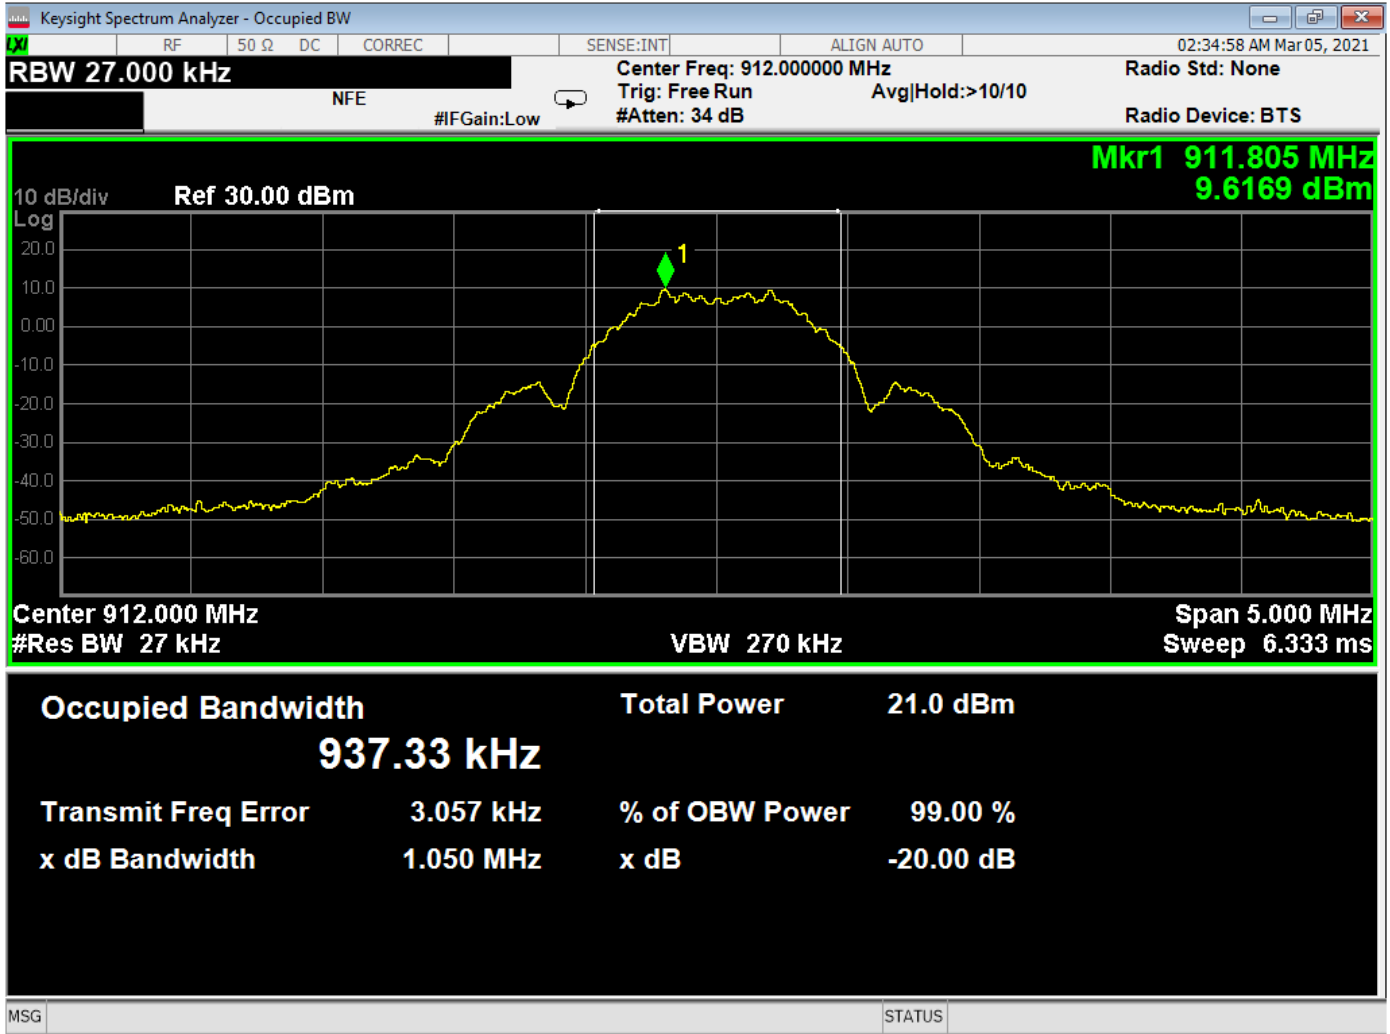

99% Bandwidth – Low Channel

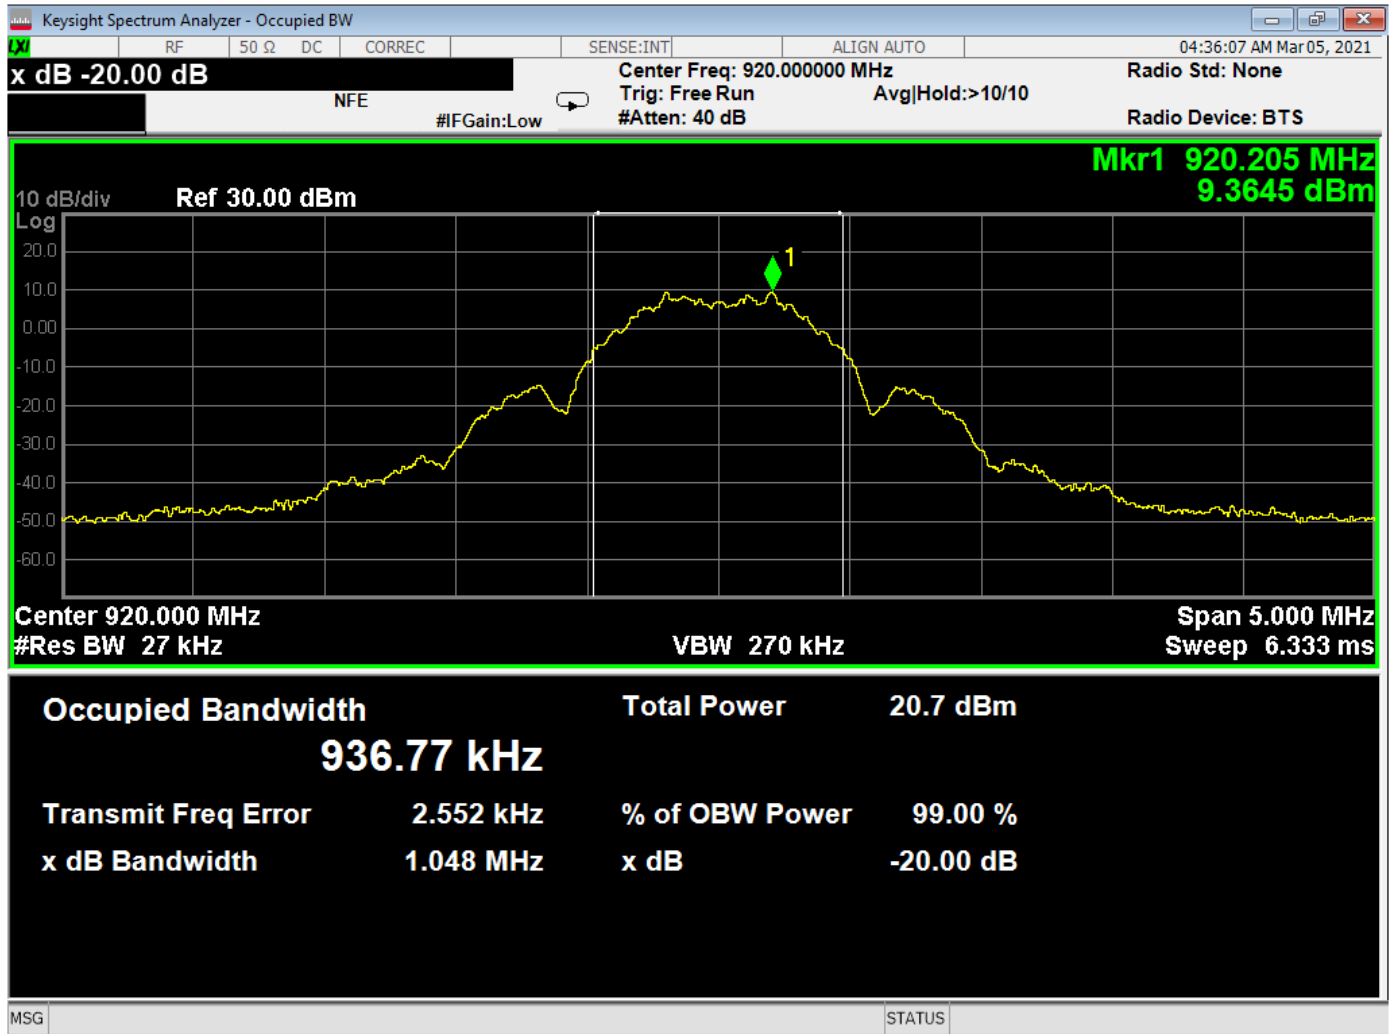

99% Bandwidth – High Channel