

# TEST REPORT

**Reference No.**..... : WTX22X03034709W-2  
**FCC ID** ..... : 2AABK-SKY002  
**Applicant** ..... : Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.  
**Address**..... : 4F & 6F, Overseas plant south, Skyworth Industrial Park, Shiyan Street,  
Bao'an District, Shenzhen, China  
**Manufacturer** ..... : Shenzhen Chuangwei Electronic Appliance Tech Co.,Ltd.  
**Address**..... : 4F & 6F, Overseas plant south, Skyworth Industrial Park, Shiyan Street,  
Bao'an District, Shenzhen, China  
**Product Name** ..... : 10 inch WIFI Digital Photo Frame, 10 inch WIFI Digital Photo Frame  
Calendar  
**Model No.**..... : SKY002  
**Standards** ..... : FCC Part 15.247  
**Date of Receipt sample** .... : 2022-03-04  
**Date of Test**..... : 2022-03-04 to 2022-03-17  
**Date of Issue** ..... : 2022-03-17  
**Test Report Form No.** ..... : WTX\_Part 15\_247W  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

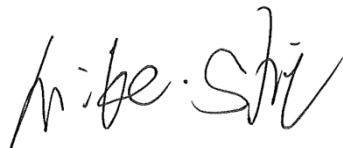

Mike Shi

Approved by:



Silin Chen

**TABLE OF CONTENTS7**

**1. GENERAL INFORMATION .....4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
1.2 TEST STANDARDS.....5  
1.3 TEST METHODOLOGY .....5  
1.4 TEST FACILITY .....5  
1.5 EUT SETUP AND TEST MODE.....6  
1.6 MEASUREMENT UNCERTAINTY .....7  
1.7 TEST EQUIPMENT LIST AND DETAILS .....8

**2. SUMMARY OF TEST RESULTS .....10**

**3. ANTENNA REQUIREMENT .....11**  
3.1 STANDARD APPLICABLE.....11  
3.2 EVALUATION INFORMATION.....11

**4. FIELD STRENGTH OF SPURIOUS EMISSIONS .....12**  
4.1 STANDARD APPLICABLE.....12  
4.2 TEST PROCEDURE.....12  
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....14  
4.4 SUMMARY OF TEST RESULTS/PLOTS .....14

**5. OUT OF BAND EMISSIONS.....22**  
5.1 STANDARD APPLICABLE.....22  
5.2 TEST PROCEDURE.....22  
5.3 SUMMARY OF TEST RESULTS/PLOTS .....23

**6. CONDUCTED EMISSIONS .....32**  
6.1 TEST PROCEDURE.....32  
6.2 BASIC TEST SETUP BLOCK DIAGRAM.....32  
6.3 TEST RECEIVER SETUP .....32  
6.4 SUMMARY OF TEST RESULTS/PLOTS .....32

**APPENDIX PHOTOGRAPHS.....37**

**Report version**

Version No.	Date of issue	Description
Rev.00	2022-03-17	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

<b>General Description of EUT</b>	
Product Name:	10 inch WIFI Digital Photo Frame, 10 inch WIFI Digital Photo Frame Calendar
Trade Name:	Skylight
Model No.:	SKY002
Adding Model(s):	/
Rated Voltage:	DC5V
Power Adapter Model:	MODEL: S005A22 INPUT: AC100-240V, 50/60Hz 0.3A OUTPUT: DC5V, 2.0A
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	/
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	FPC Antenna
Antenna Gain:	2dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

**1.6 Measurement Uncertainty**

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91705	2021-04-27	2023-04-26



				82		
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-1415 3	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY4545037 6	2021-03-27	2022-03-26
<input type="checkbox"/> Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
<input type="checkbox"/> Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2021-12-03	2022-12-02
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	N/A
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	N/A
§15.247(a)(2)	DTS Bandwidth	N/A
§15.247(b)(3)	RF Output Power	N/A
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Data refer to the original report CTL2105285011-WF01.

Note: Report is for C2PC only. The test data includes Radiated Spurious Emissions, Conducted Emission and Out of Band Emissions. Those not tested mark with N/A (not effected by the C2PC).

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has an FPC antenna, fulfill the requirement of this section.

## 4. Field Strength of Spurious Emissions

### 4.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

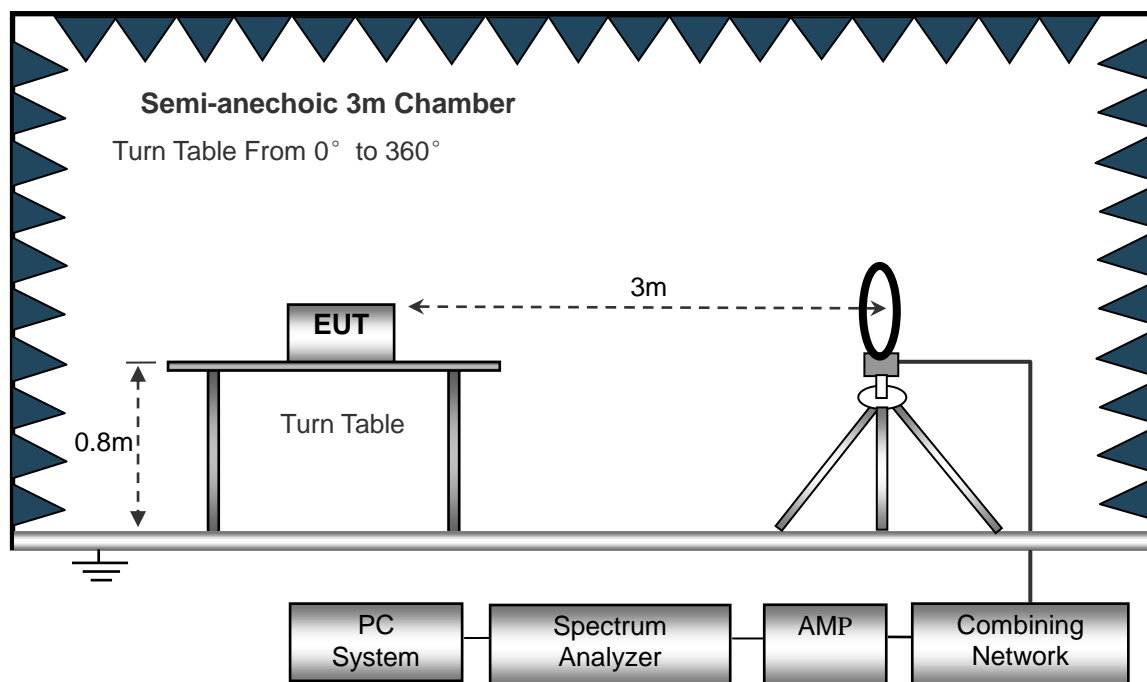

The test setup for emission measurement from 30MHz to 1GHz.

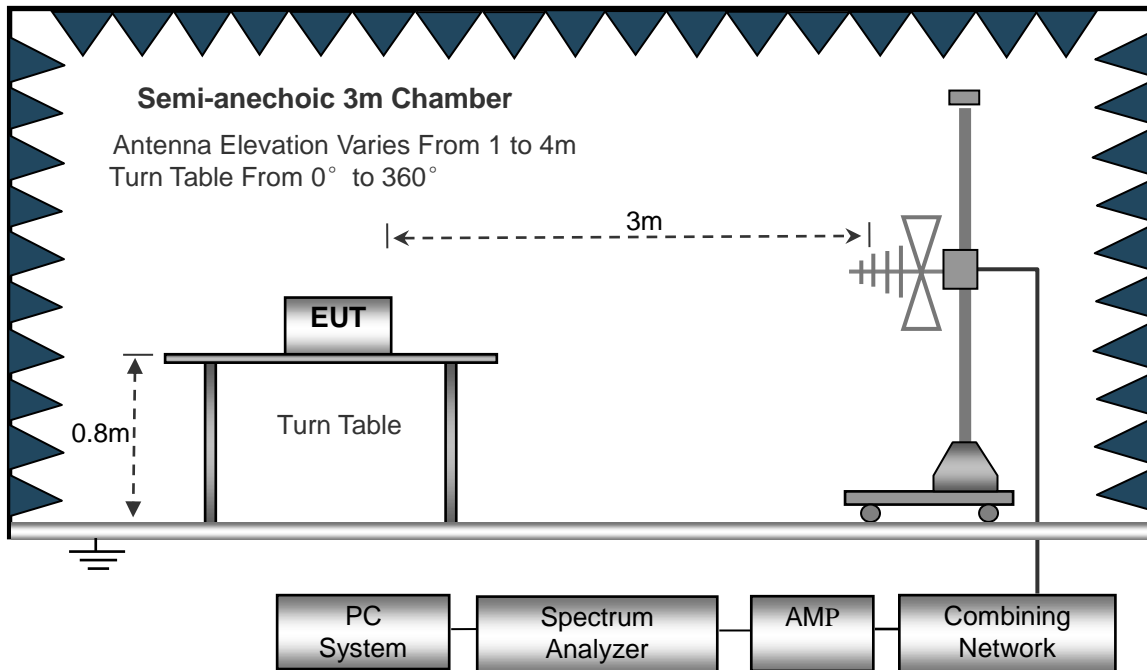

The test setup for emission measurement above 1GHz.

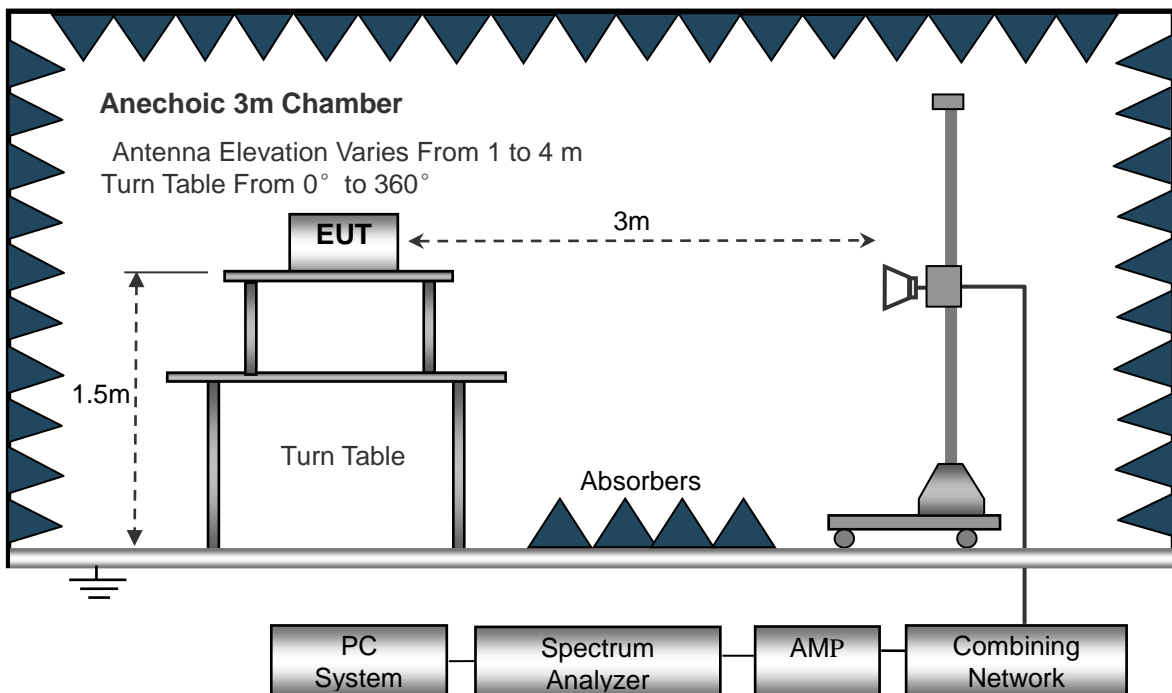

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 4.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b\_11Mbps) is recorded in this report.*


- K101-IM2QD02-C2
- Spurious Emissions Below 1GHz

802.11b			
Test Channel	Low	Polarity:	Horizontal

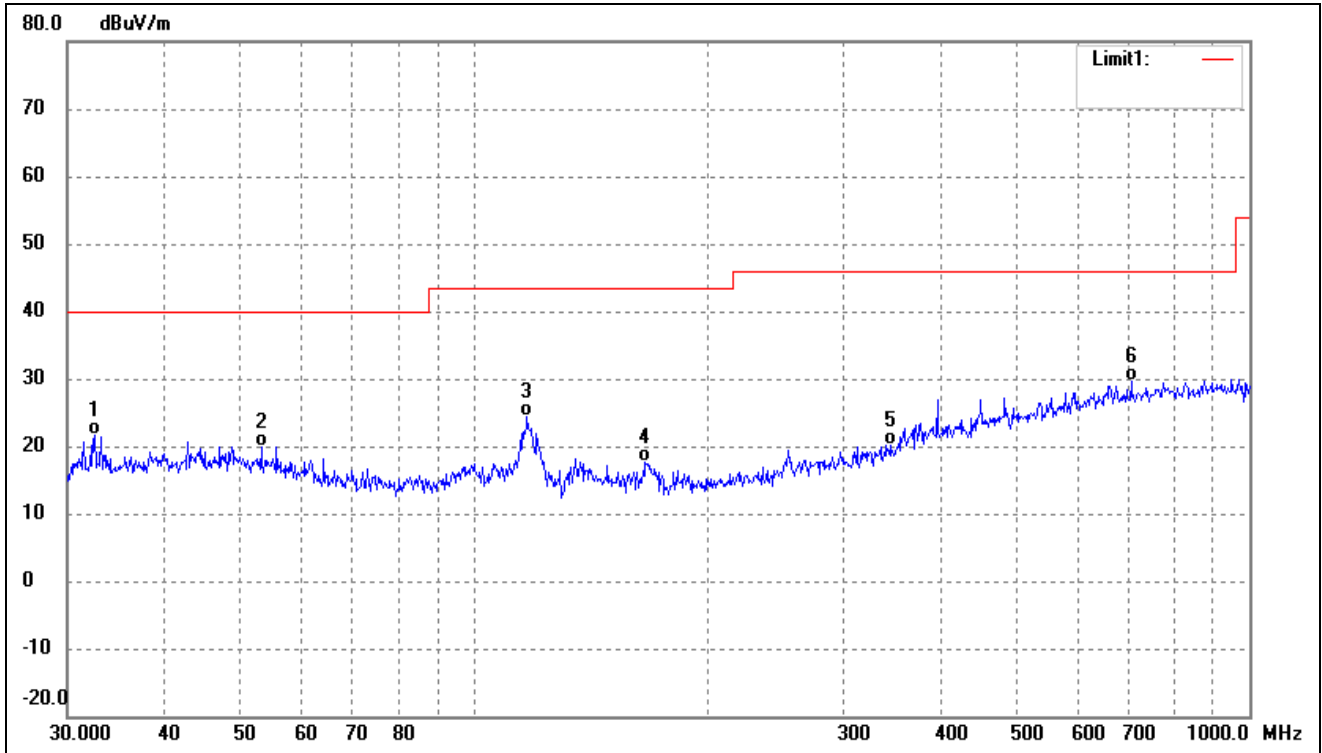

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.5198	30.47	-8.83	21.64	40.00	-18.36	-	-	QP
2	53.3179	27.35	-7.45	19.90	40.00	-20.10	-	-	QP
3	117.3603	33.79	-9.40	24.39	43.50	-19.11	-	-	QP
4	166.6514	29.38	-11.87	17.51	43.50	-25.99	-	-	QP
5	344.3855	25.64	-5.57	20.07	46.00	-25.93	-	-	QP
6	704.2261	28.16	1.46	29.62	46.00	-16.38	-	-	QP


802.11b			
Test Channel	Low	Polarity:	Vertical

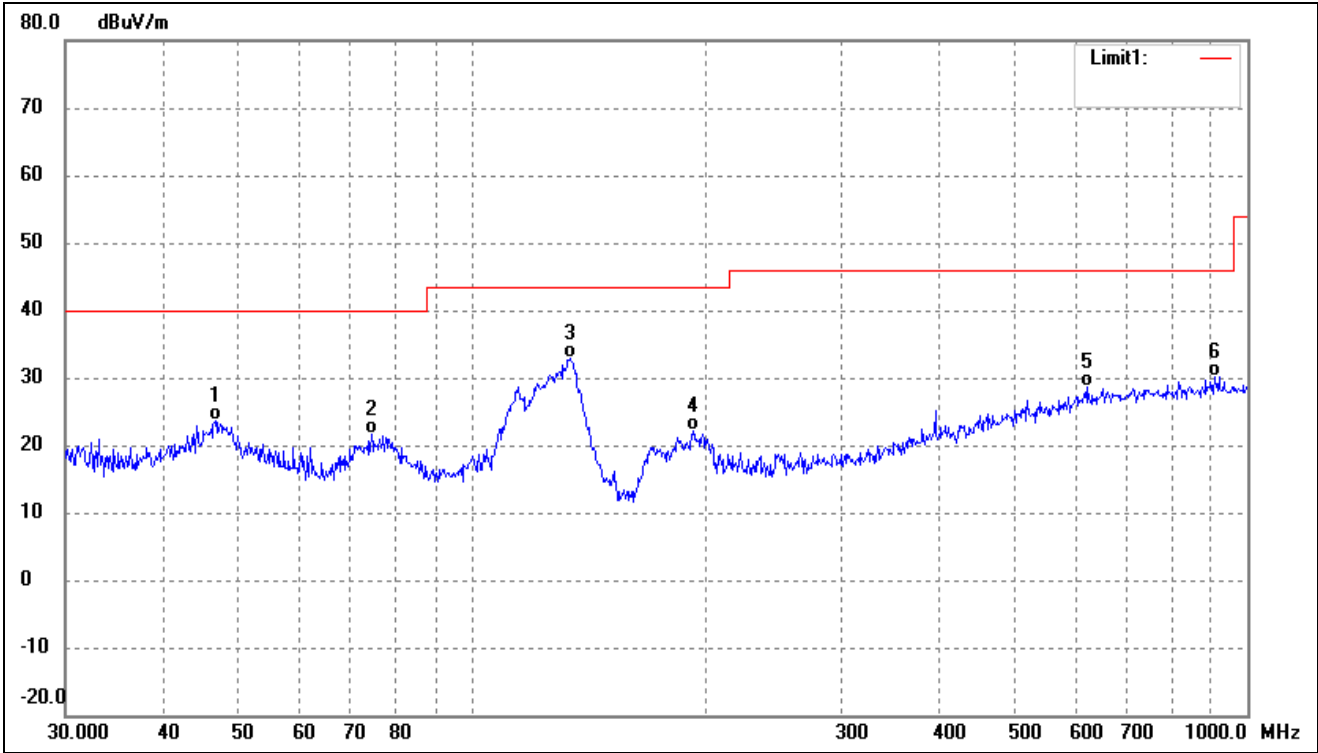

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	30.47	-6.96	23.51	40.00	-16.49	-	-	QP
2	74.3955	32.04	-10.42	21.62	40.00	-18.38	-	-	QP
3	134.0882	44.69	-11.78	32.91	43.50	-10.59	-	-	QP
4	193.0945	32.00	-9.93	22.07	43.50	-21.43	-	-	QP
5	622.8900	28.08	0.62	28.70	46.00	-17.30	-	-	QP
6	906.4824	27.49	2.74	30.23	46.00	-15.77	-	-	QP




802.11b			
Test Channel	Middle	Polarity:	Horizontal

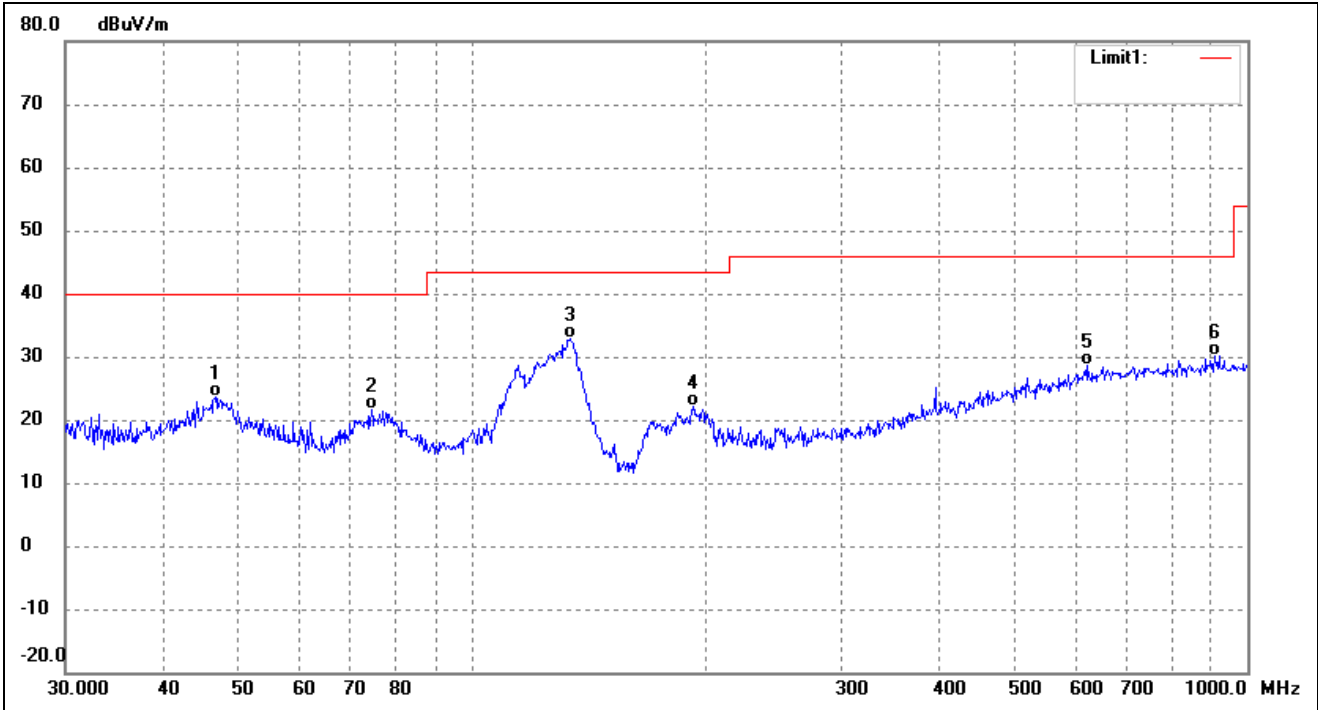


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	30.47	-6.96	23.51	40.00	-16.49	-	-	QP
2	74.3955	32.04	-10.42	21.62	40.00	-18.38	-	-	QP
3	134.0882	44.69	-11.78	32.91	43.50	-10.59	-	-	QP
4	193.0945	32.00	-9.93	22.07	43.50	-21.43	-	-	QP
5	622.8900	28.08	0.62	28.70	46.00	-17.30	-	-	QP
6	906.4824	27.49	2.74	30.23	46.00	-15.77	-	-	QP

802.11b			
Test Channel	Middle	Polarity:	Vertical

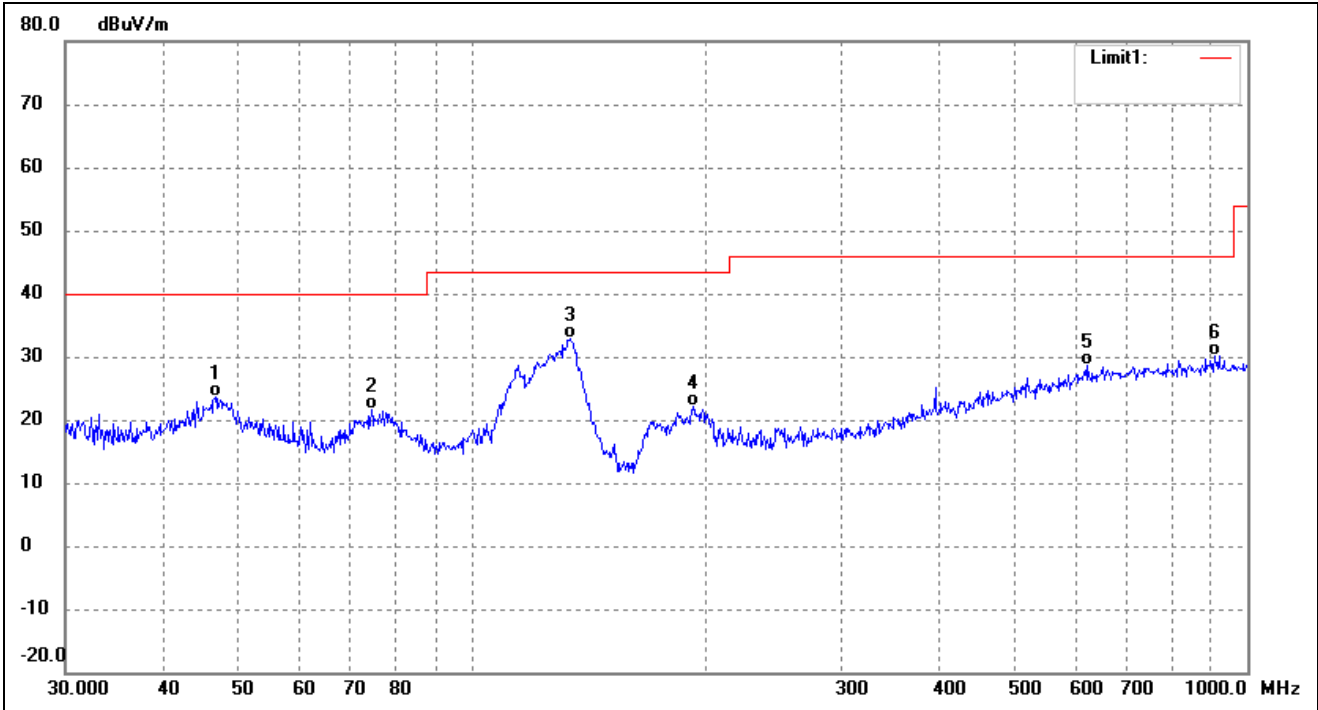


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	30.47	-6.96	23.51	40.00	-16.49	-	-	QP
2	74.3955	32.04	-10.42	21.62	40.00	-18.38	-	-	QP
3	134.0882	44.69	-11.78	32.91	43.50	-10.59	-	-	QP
4	193.0945	32.00	-9.93	22.07	43.50	-21.43	-	-	QP
5	622.8900	28.08	0.62	28.70	46.00	-17.30	-	-	QP
6	906.4824	27.49	2.74	30.23	46.00	-15.77	-	-	QP

802.11b			
Test Channel	High	Polarity:	Horizontal

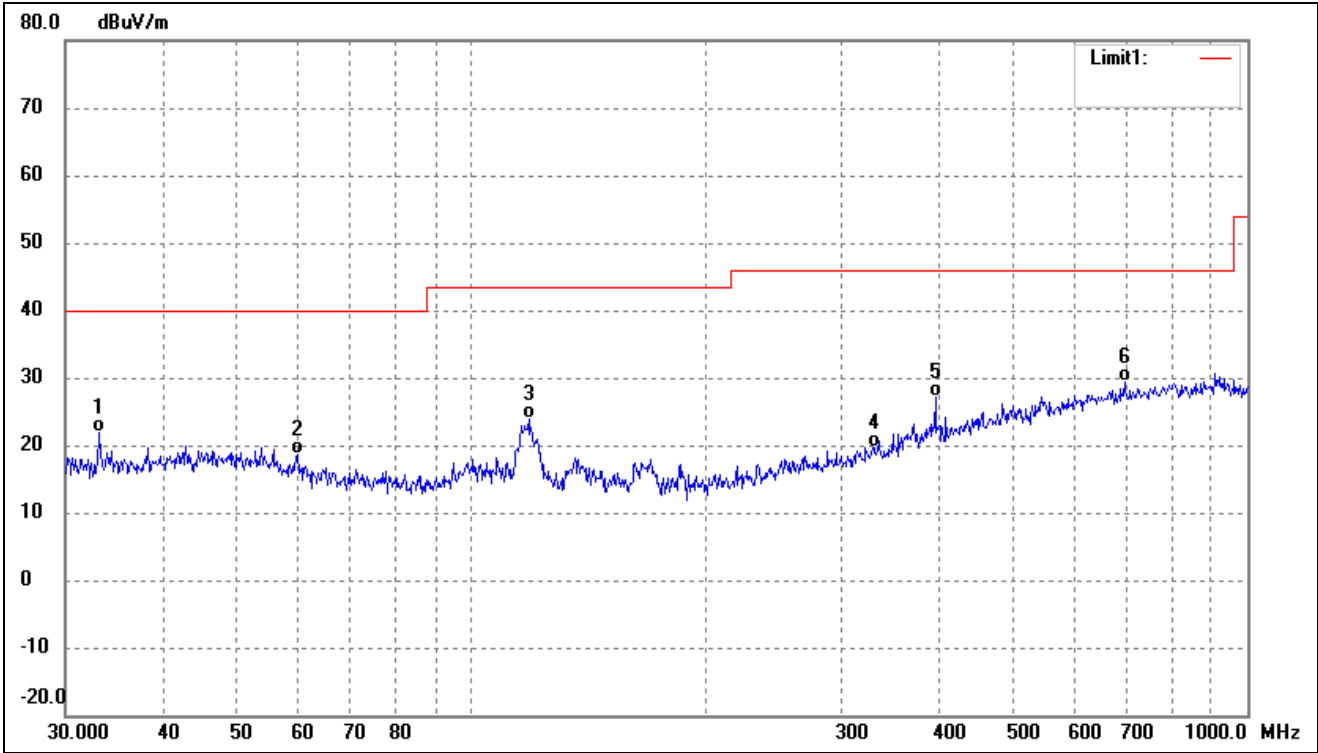

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	33.2112	30.50	-8.67	21.83	40.00	-18.17	-	-	QP
2	59.8588	27.12	-8.40	18.72	40.00	-21.28	-	-	QP
3	118.6014	33.31	-9.50	23.81	43.50	-19.69	-	-	QP
4	331.3547	25.67	-5.98	19.69	46.00	-26.31	-	-	QP
5	396.2415	31.07	-4.01	27.06	46.00	-18.94	-	-	QP
6	694.4174	27.94	1.37	29.31	46.00	-16.69	-	-	QP

802.11b			
Test Channel	High	Polarity:	Vertical

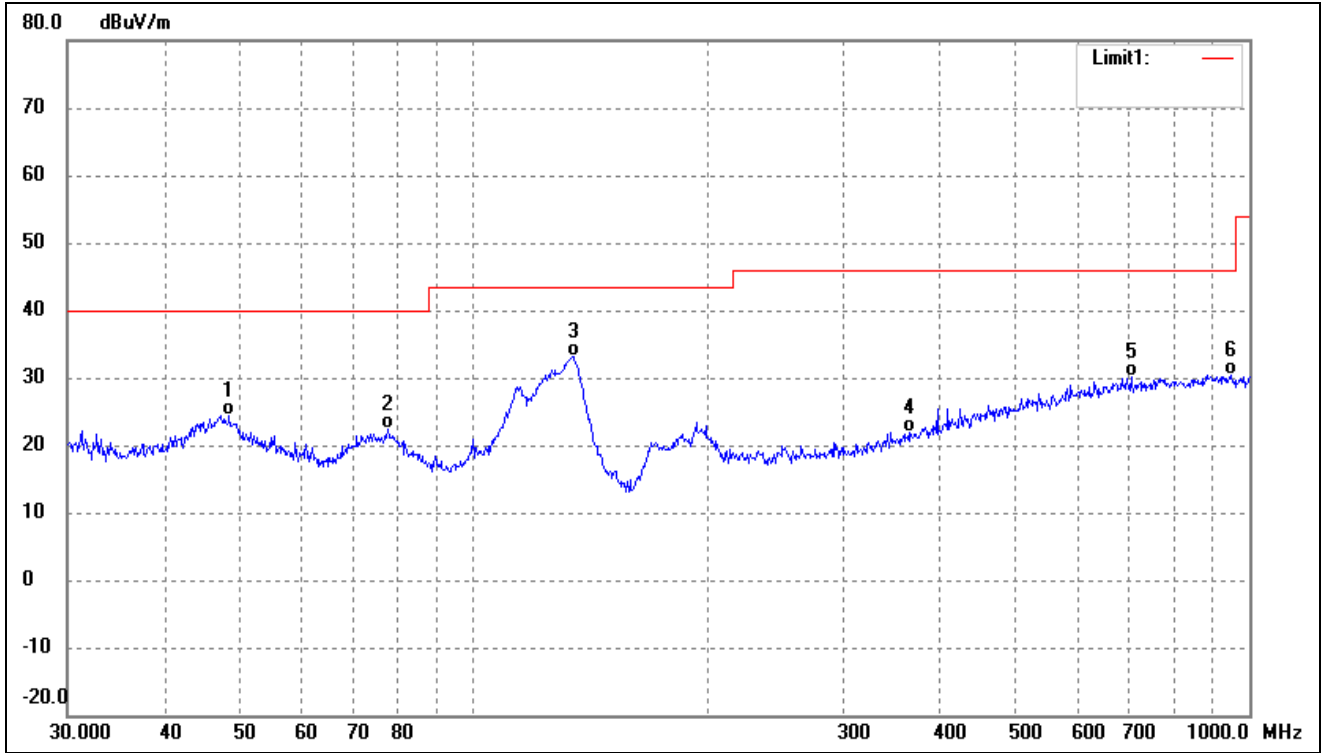

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.5016	31.41	-6.97	24.44	40.00	-15.56	-	-	QP
2	77.5928	33.09	-10.60	22.49	40.00	-17.51	-	-	QP
3	134.5592	45.01	-11.82	33.19	43.50	-10.31	-	-	QP
4	364.2595	26.83	-4.96	21.87	46.00	-24.13	-	-	QP
5	704.2261	28.62	1.46	30.08	46.00	-15.92	-	-	QP
6	945.4399	27.88	2.60	30.48	46.00	-15.52	-	-	QP

Remark: '- 'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.00	59.04	-4.50	54.54	74	-19.46	H	PK
4824.00	48.88	-4.50	44.38	54	-9.62	H	AV
7236.00	53.33	1.14	54.47	74	-19.53	H	PK
7236.00	45.07	1.14	46.21	54	-7.79	H	AV
4824.00	57.83	-4.50	53.33	74	-20.67	V	PK
4824.00	56.78	-4.50	52.28	54	-1.72	V	AV
7236.00	51.26	1.14	52.40	74	-21.60	V	PK
7236.00	43.24	1.14	44.38	54	-9.62	V	AV
Middle Channel-2437MHz							
4874.00	58.87	-4.47	54.40	74	-19.60	H	PK
4874.00	47.63	-4.47	43.16	54	-10.84	H	AV
7311.00	54.58	1.47	56.05	74	-17.95	H	PK
7311.00	43.92	1.47	45.39	54	-8.61	H	AV
4874.00	60.43	-4.47	55.96	74	-18.04	V	PK
4874.00	57.73	-4.47	53.26	54	-0.74	V	AV
7311.00	51.58	1.47	53.05	74	-20.95	V	PK
7311.00	42.71	1.47	44.18	54	-9.82	V	AV
High Channel-2462MHz							
4924.00	57.32	-4.44	52.88	74	-21.12	H	PK
4924.00	49.02	-4.44	44.58	54	-9.42	H	AV
7386.00	54.47	1.79	56.26	74	-17.74	H	PK
7386.00	44.60	1.79	46.39	54	-7.61	H	AV
4924.00	59.66	-4.44	55.22	74	-18.78	V	PK
4924.00	56.48	-4.44	52.04	54	-1.96	V	AV
7386.00	50.72	1.79	52.51	74	-21.49	V	PK
7386.00	43.27	1.79	45.06	54	-8.94	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 5. Out of Band Emissions

---

### 5.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 5.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

**5.3 Summary of Test Results/Plots**

- K101-IM2QD02-C2
- Radiated test


802.11b			
Test Channel	Low	Polarity:	Horizontal (worst case)

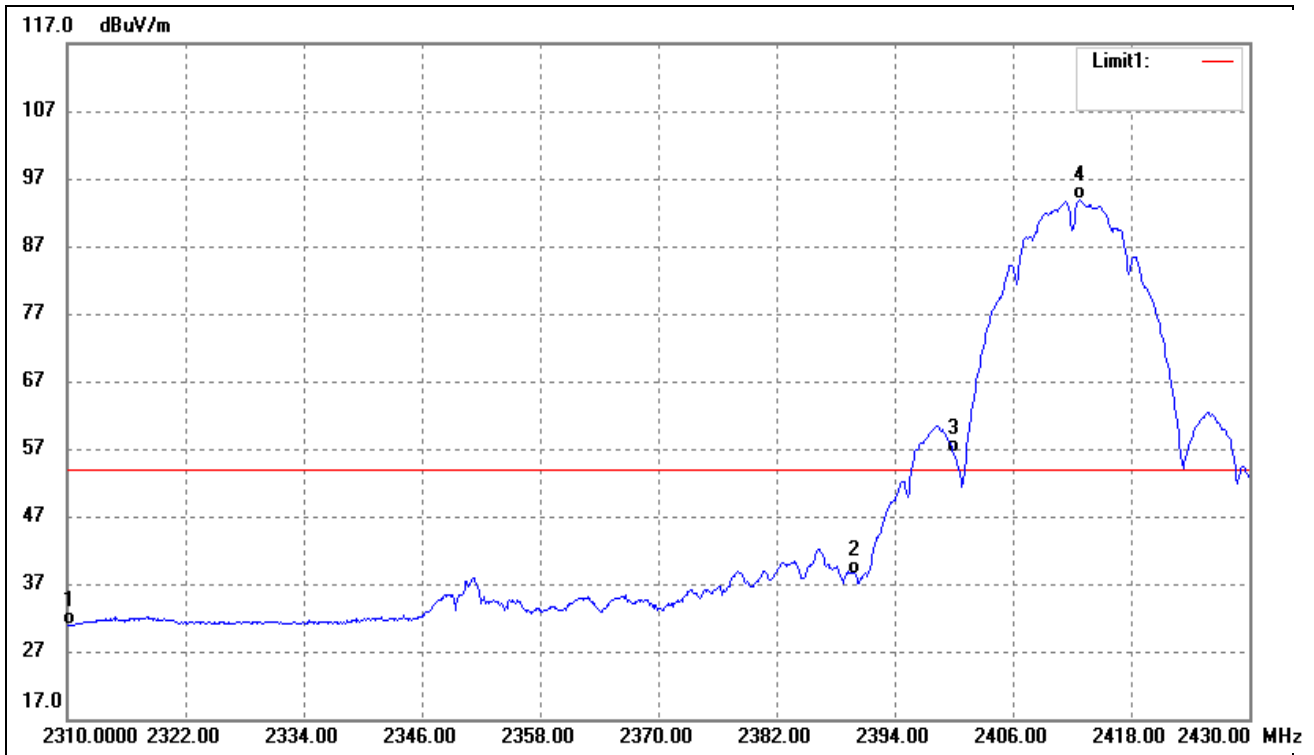

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.67	-10.82	30.85	54.00	-23.15	Average Detector
	2310.000	53.25	-10.82	42.43	74.00	-31.57	Peak Detector
2	2390.000	49.02	-10.70	38.32	54.00	-15.68	Average Detector
	2390.000	57.34	-10.70	46.64	74.00	-27.36	Peak Detector
3	2400.000	67.07	-10.69	56.38	Delta=37.43dBc		Average Detector
4	2412.840	104.48	-10.67	93.81			Average Detector




802.11b			
Test Channel	High	Polarity:	Horizontal (worst case)

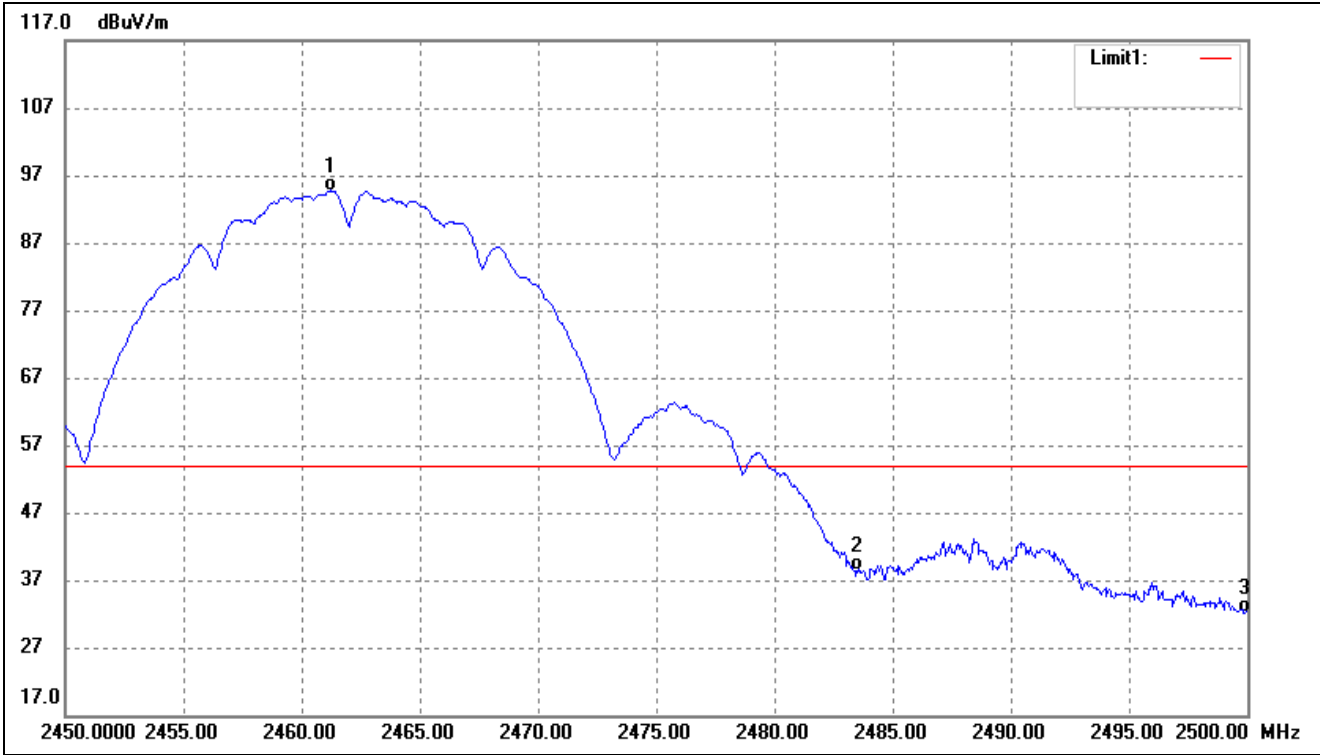


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	105.36	-10.61	94.75	/	/	Average Detector
	2460.550	109.83	-10.61	99.22	/	/	Peak Detector
2	2483.500	49.03	-10.58	38.45	54.00	-15.55	Average Detector
	2483.500	59.22	-10.58	48.64	74.00	-25.36	Peak Detector
3	2500.000	42.74	-10.55	32.19	54.00	-21.81	Average Detector
	2500.000	53.31	-10.55	42.76	74.00	-31.24	Peak Detector

802.11g			
Test Channel	Low	Polarity:	Horizontal (worst case)

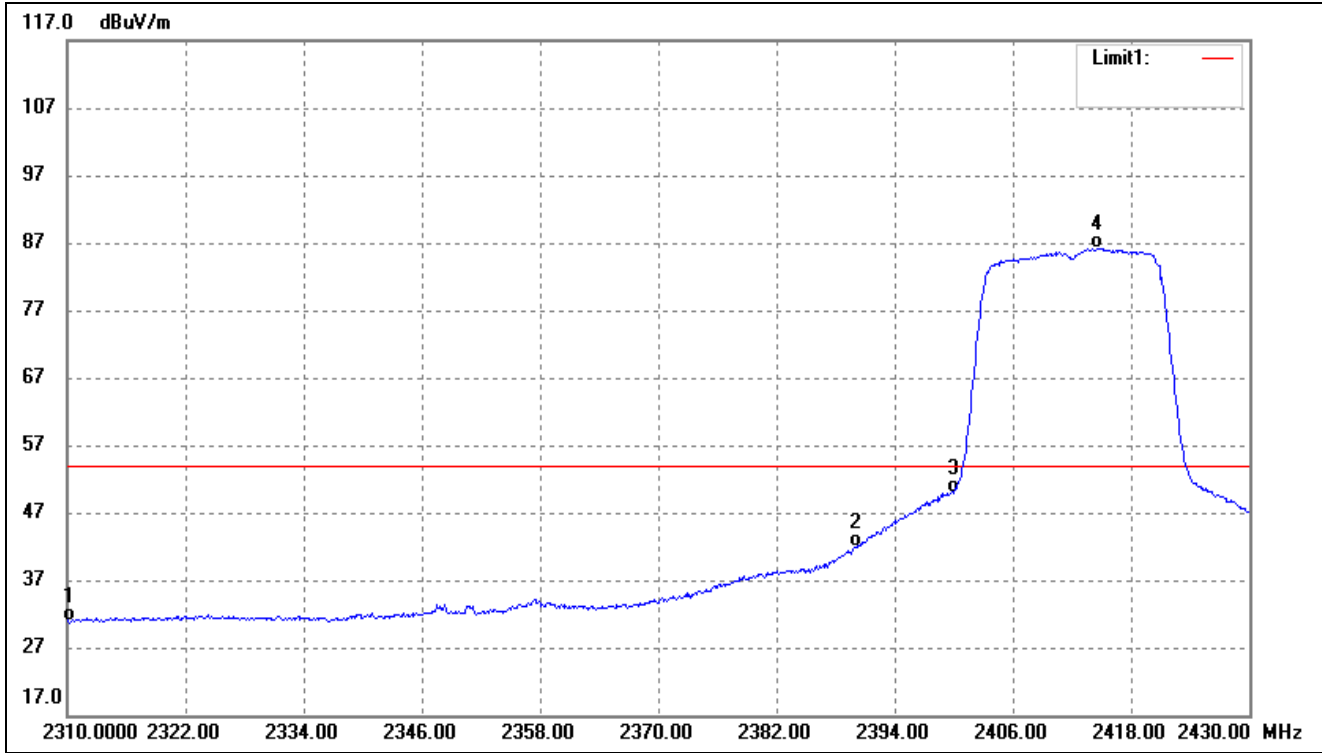


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.71	-10.82	30.89	54.00	-23.11	Average Detector
		53.96	-10.82	43.14	74.00	-30.86	Peak Detector
2	2390.000	52.67	-10.70	41.97	54.00	-12.03	Average Detector
		68.98	-10.70	58.28	74.00	-15.72	Peak Detector
3	2400.000	60.66	-10.69	49.97	Delta=36.16dBc		Average Detector
4	2414.520	96.79	-10.66	86.13			Average Detector

802.11g			
Test Channel	High	Polarity:	Horizontal (worst case)

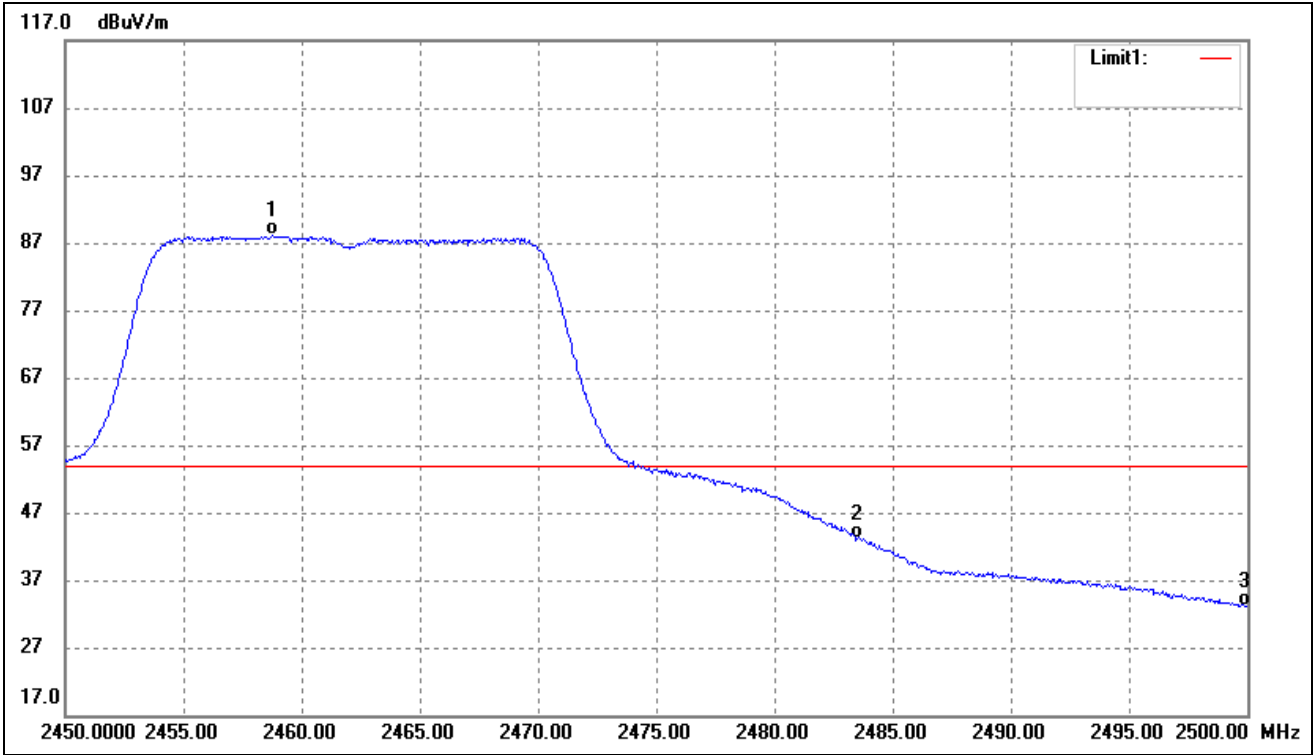


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.750	98.65	-10.61	88.04	/	/	Average Detector
	2457.300	110.28	-10.61	99.67	/	/	Peak Detector
2	2483.500	53.79	-10.58	43.21	54.00	-10.79	Average Detector
	2483.500	71.81	-10.58	61.23	74.00	-12.77	Peak Detector
3	2500.000	43.64	-10.55	33.09	54.00	-20.91	Average Detector
	2500.000	55.07	-10.55	44.52	74.00	-29.48	Peak Detector

802.11n-HT20			
Test Channel	Low	Polarity:	Horizontal (worst case)

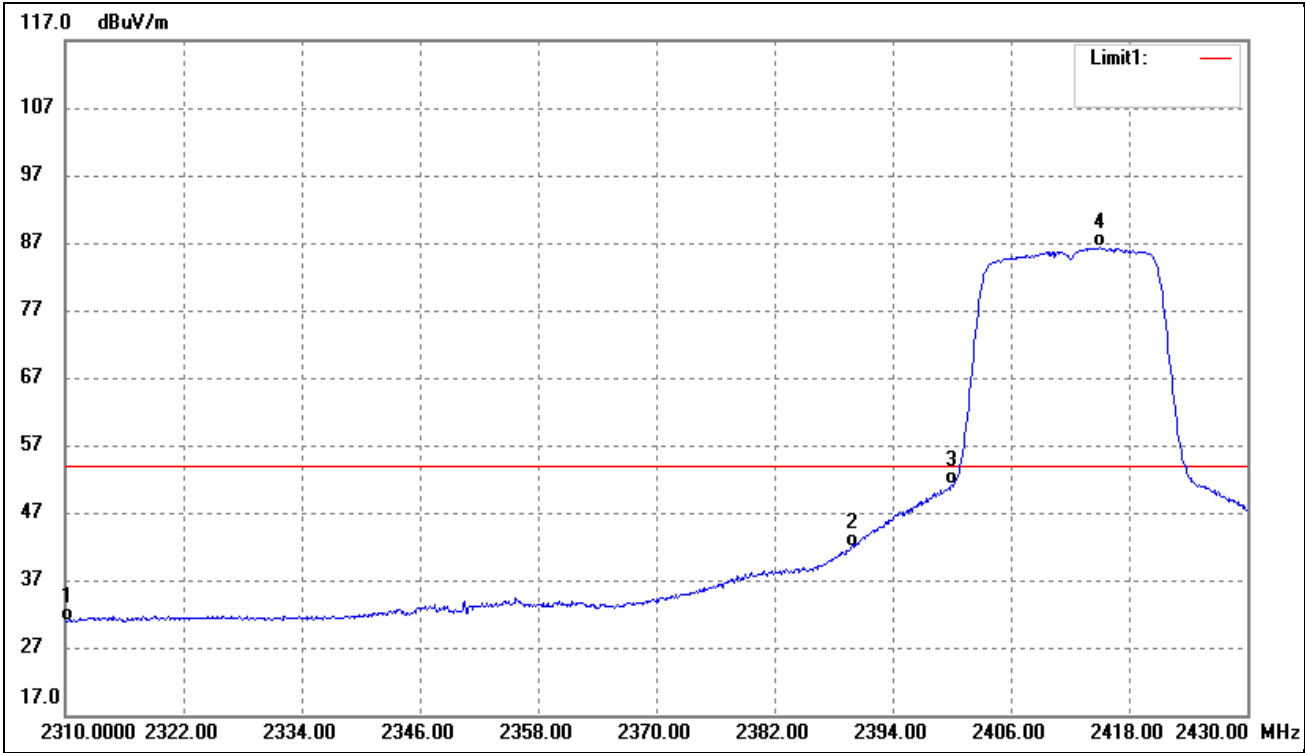


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.69	-10.82	30.87	54.00	-23.13	Average Detector
	2310.000	53.47	-10.82	42.65	74.00	-31.35	Peak Detector
2	2390.000	52.69	-10.70	41.99	54.00	-12.01	Average Detector
	2390.000	68.58	-10.70	57.88	74.00	-16.12	Peak Detector
3	2400.000	61.72	-10.69	51.03	Delta=35.04dBc		Average Detector
4	2415.000	97.09	-10.66	86.43			Average Detector

802.11n-HT20			
Test Channel	High	Polarity:	Horizontal (worst case)

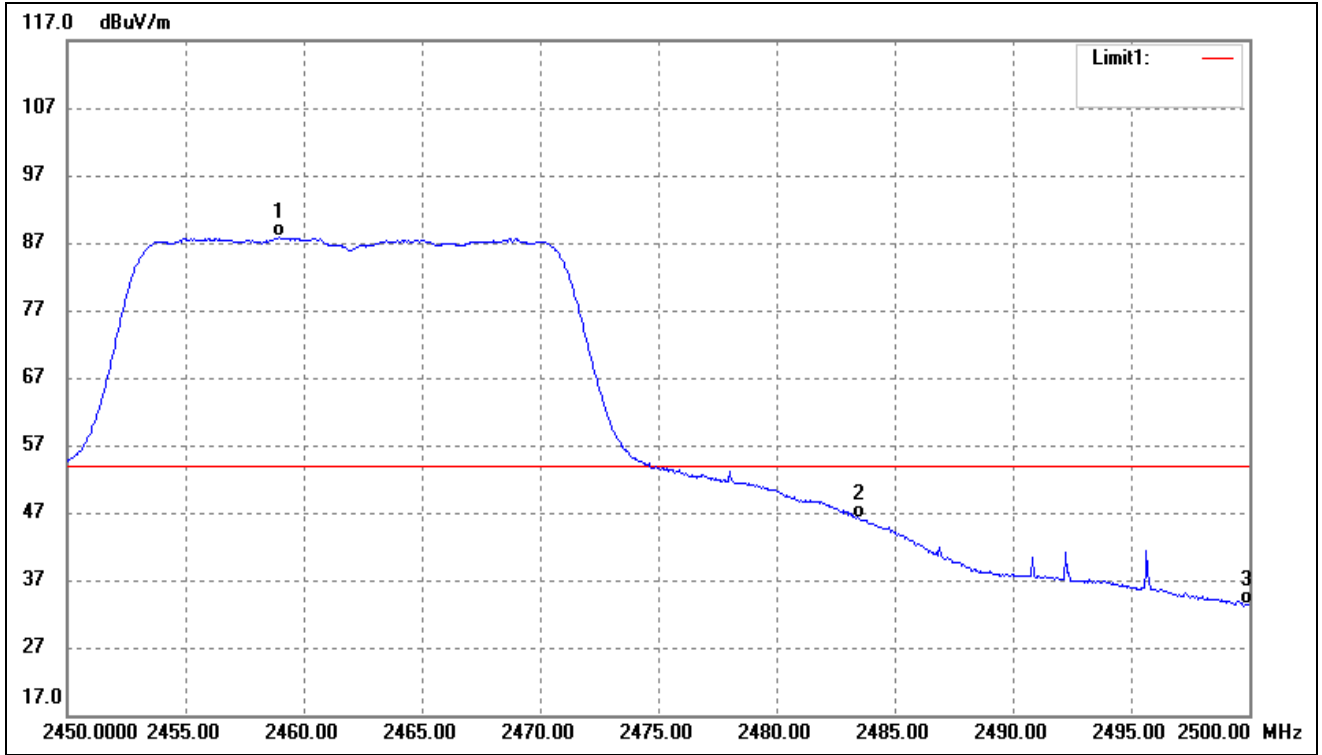


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.950	98.37	-10.61	87.76	/	/	Average Detector
	2456.950	108.75	-10.61	98.14	/	/	Peak Detector
2	2483.500	56.75	-10.58	46.17	54.00	-7.83	Average Detector
	2483.500	74.86	-10.58	64.28	74.00	-9.72	Peak Detector
3	2500.000	43.82	-10.55	33.27	54.00	-20.73	Average Detector
	2500.000	55.69	-10.55	45.14	74.00	-28.86	Peak Detector

802.11n-HT40			
Test Channel	Low	Polarity:	Horizontal (worst case)

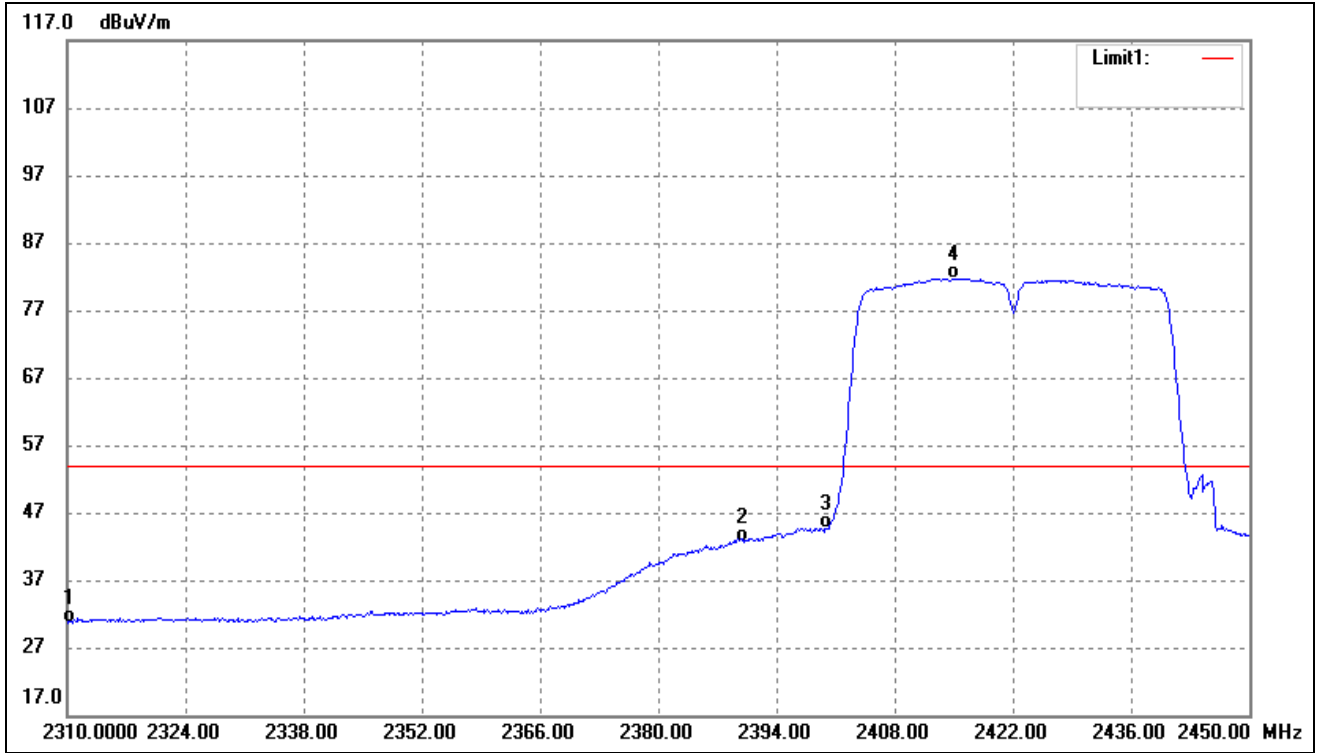

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.51	-10.82	30.69	54.00	-23.31	Average Detector
		53.97	-10.82	43.15	74.00	-30.85	Peak Detector
2	2390.000	53.42	-10.70	42.72	54.00	-11.28	Average Detector
		70.75	-10.70	60.05	74.00	-13.95	Peak Detector
3	2400.000	55.27	-10.69	44.58	Delta=37.15dBc		Average Detector
4	2415.000	92.39	-10.66	81.73		Average Detector	

802.11n-HT40			
Test Channel	High	Polarity:	Horizontal (worst case)

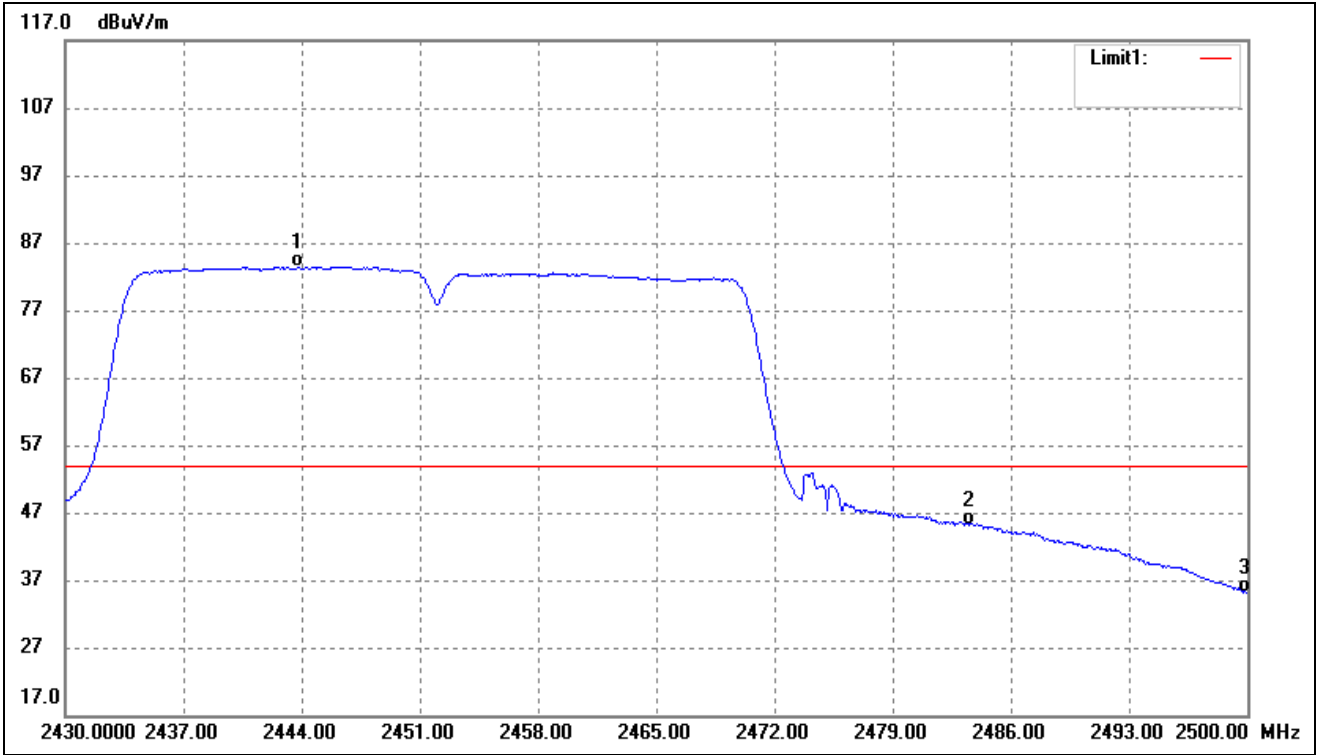

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2443.790	94.13	-10.63	83.50	/	/	Average Detector
	2445.190	104.80	-10.62	94.18	/	/	Peak Detector
2	2483.500	55.77	-10.58	45.19	54.00	-8.81	Average Detector
	2483.500	75.06	-10.58	64.48	74.00	-9.52	Peak Detector
3	2500.000	45.65	-10.55	35.10	54.00	-18.90	Average Detector
	2500.000	63.89	-10.55	53.34	74.00	-20.66	Peak Detector

## 6. Conducted Emissions


### 6.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

### 6.2 Basic Test Setup Block Diagram

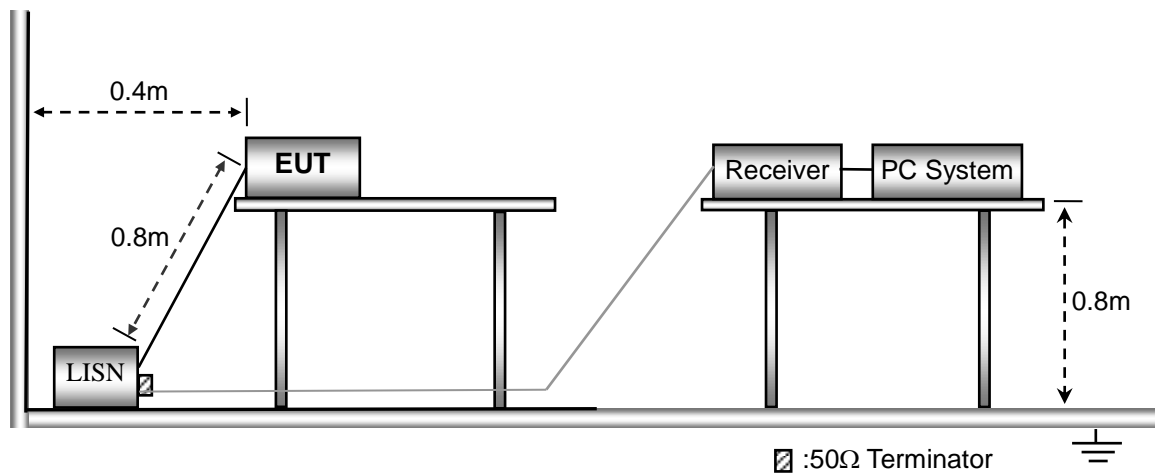

### 6.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:


Start Frequency .....	150kHz
Stop Frequency .....	30MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth .....	9kHz
Quasi-Peak Adapter Mode .....	Normal

### 6.4 Summary of Test Results/Plots




K101-IM2QD02-C2

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

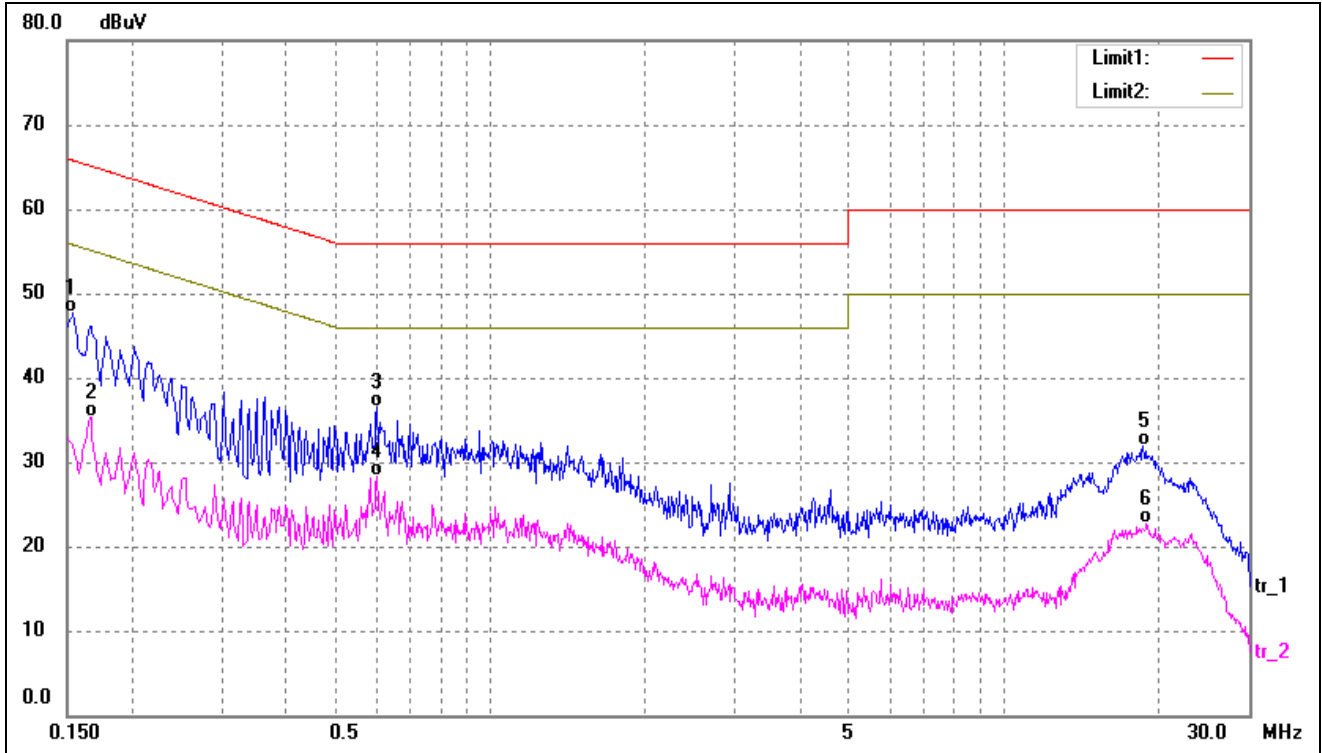

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	37.32	10.37	47.69	65.78	-18.09	QP
2	0.1660	24.96	10.37	35.33	55.16	-19.83	AVG
3	0.6020	26.13	10.32	36.45	56.00	-19.55	QP
4*	0.6020	17.95	10.32	28.27	46.00	-17.73	AVG
5	18.7180	21.68	10.22	31.90	60.00	-28.10	QP
6	18.9700	12.44	10.23	22.67	50.00	-27.33	AVG


Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

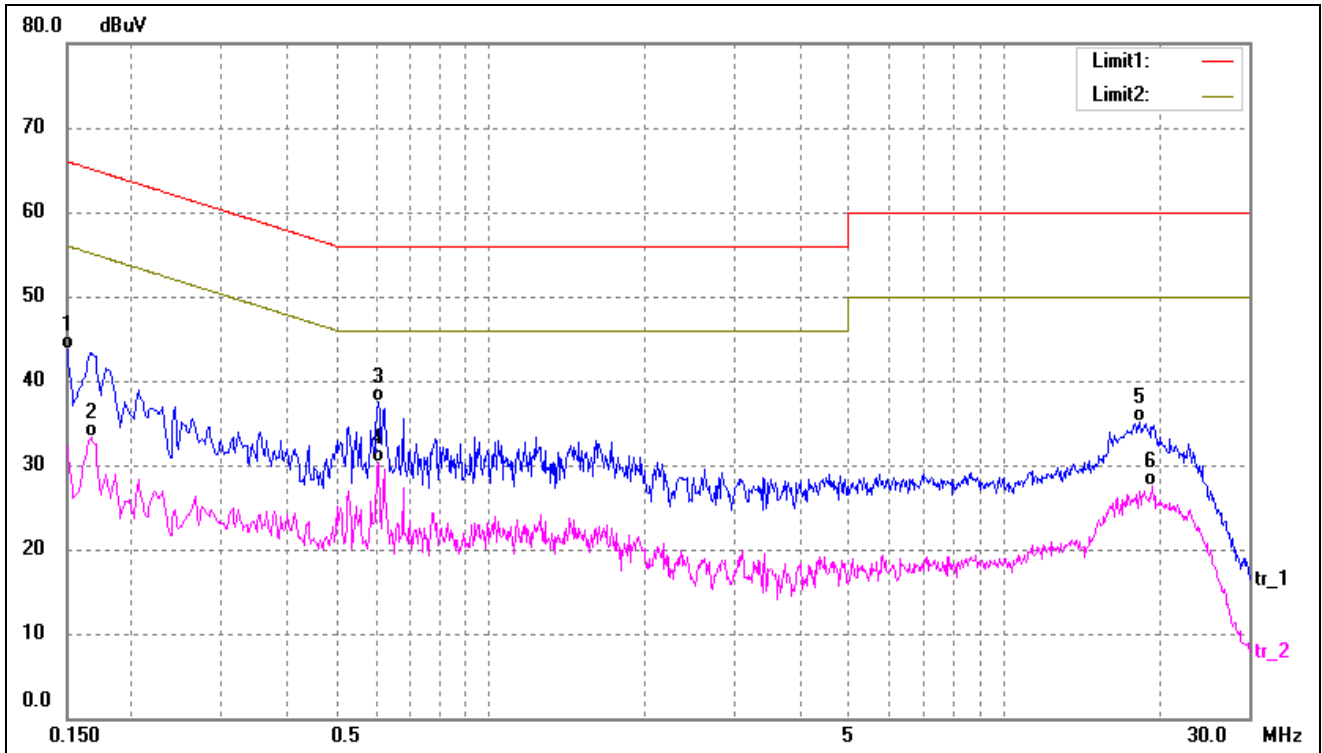

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	33.30	10.38	43.68	66.00	-22.32	QP
2	0.1660	22.88	10.37	33.25	55.16	-21.91	AVG
3	0.6060	27.16	10.32	37.48	56.00	-18.52	QP
4*	0.6060	20.08	10.32	30.40	46.00	-15.60	AVG
5	18.3900	24.94	10.22	35.16	60.00	-24.84	QP
6	19.4660	17.23	10.24	27.47	50.00	-22.53	AVG


SPEC-WJWX 101196A

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

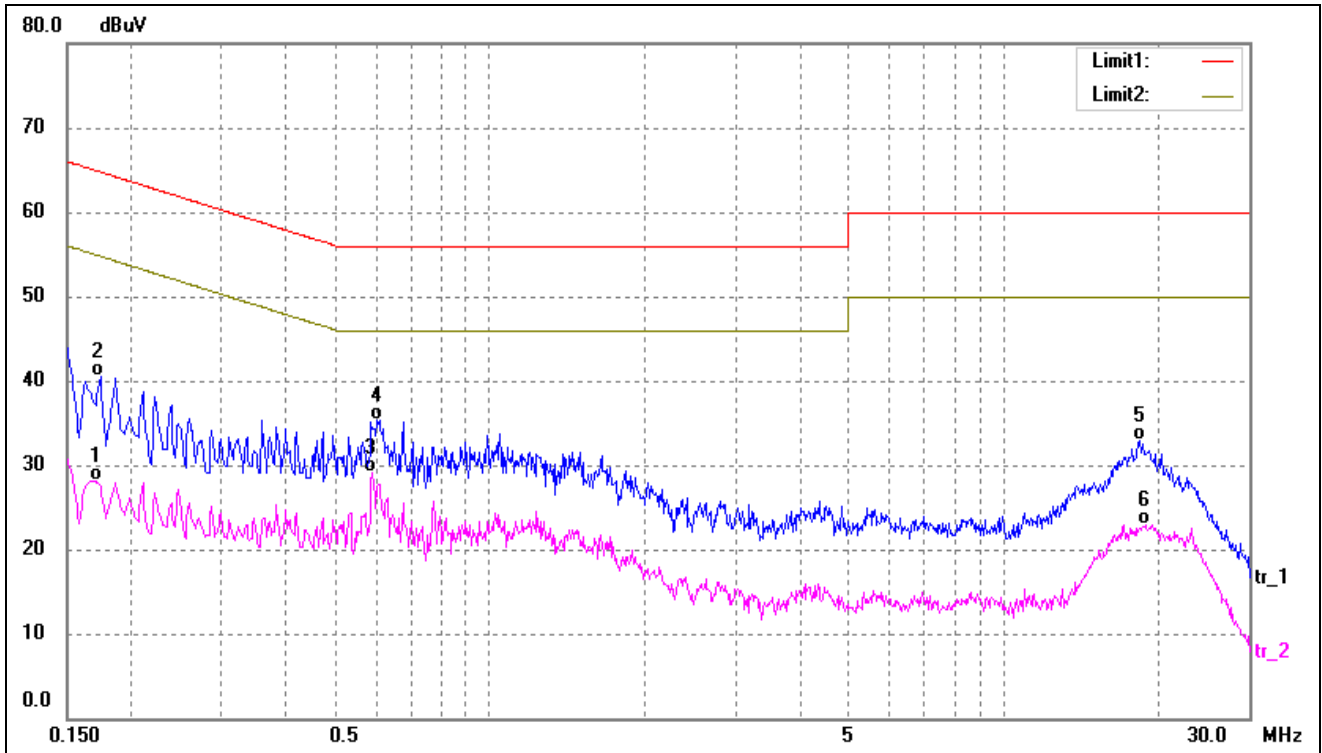

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	17.76	10.37	28.13	54.96	-26.83	AVG
2	0.1740	30.09	10.37	40.46	64.77	-24.31	QP
3*	0.5900	18.75	10.31	29.06	46.00	-16.94	AVG
4	0.6020	25.02	10.32	35.34	56.00	-20.66	QP
5	18.4140	22.66	10.22	32.88	60.00	-27.12	QP
6	18.8740	12.77	10.23	23.00	50.00	-27.00	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

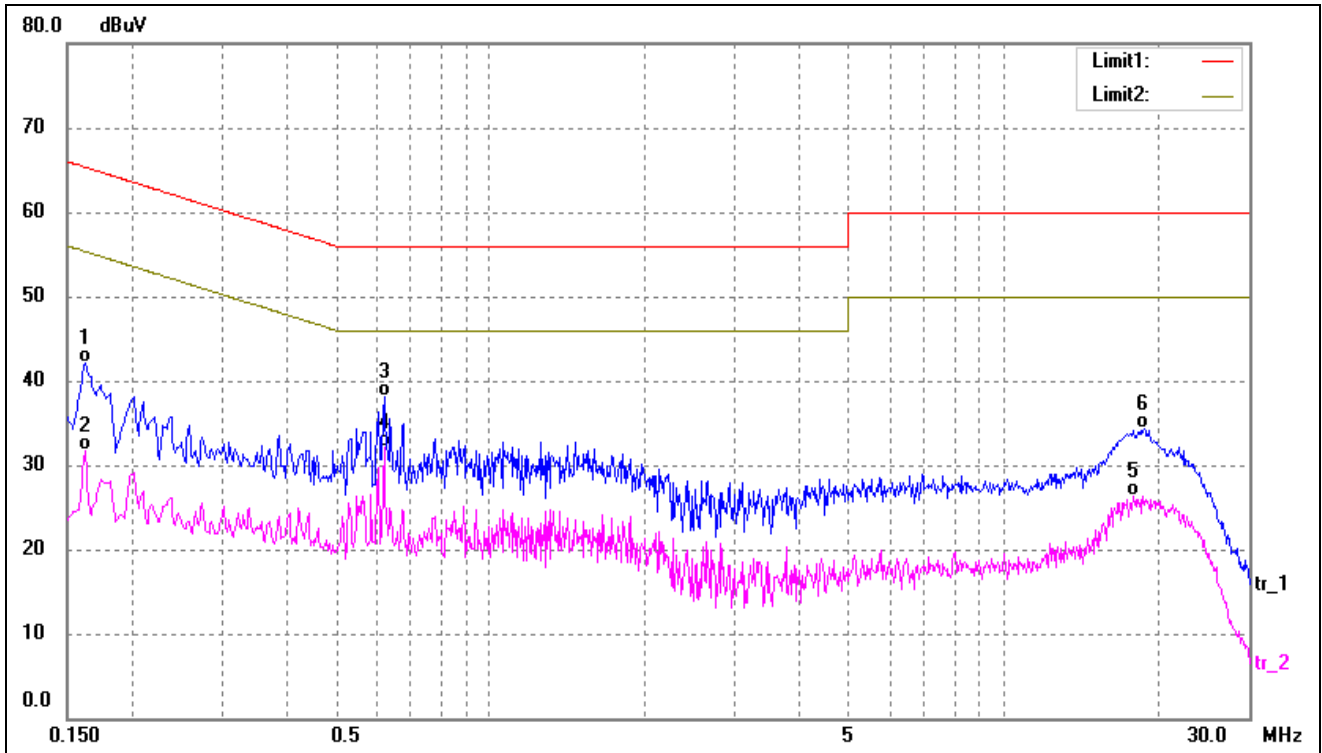

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	31.74	10.37	42.11	65.36	-23.25	QP
2	0.1620	21.26	10.37	31.63	55.36	-23.73	AVG
3	0.6220	27.68	10.33	38.01	56.00	-17.99	QP
4*	0.6220	21.82	10.33	32.15	46.00	-13.85	AVG
5	17.8580	16.13	10.21	26.34	50.00	-23.66	AVG
6	18.8060	24.09	10.23	34.32	60.00	-25.68	QP

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***