

FCC TEST REPORT

Client Name : Aputure Imaging Industries Co., Ltd
Address : 3rd Floor, Building 21, Longjun industrial estate,
Longhua, Bao'an, Shenzhen, P.R.China
Product Name : Pocket Wireless Mobile Kit
Date : May 08, 2021

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Maximum Peak Output Power Test.....	26
5.1. Test Standard and Limit.....	26
5.2. Test Setup.....	26
5.3. Test Procedure.....	26
5.4. Test Data.....	26
6. 20DB Occupy Bandwidth Test.....	29
6.1. Test Standard.....	29
6.2. Test Setup.....	29
6.3. Test Procedure.....	29
6.4. Test Data.....	29
7. Carrier Frequency Separation Test.....	32
7.1. Test Standard and Limit.....	32
7.2. Test Setup.....	32
7.3. Test Procedure.....	32
7.4. Test Data.....	32
8. Number of Hopping Channel Test.....	35
8.1. Test Standard and Limit.....	35

8.2. Test Setup..... 35

8.3. Test Procedure..... 35

8.4. Test Data..... 35

9. Dwell Time Test..... 37

9.1. Test Standard and Limit..... 37

9.2. Test Setup..... 37

9.3. Test Procedure..... 37

9.4. Test Data..... 37

10. 100kHz Bandwidth of Frequency Band Edge Requirement..... 39

10.1. Test Standard and Limit..... 39

10.2. Test Setup..... 39

10.3. Test Procedure..... 39

10.4. Test Data..... 39

11. Antenna Requirement..... 43

11.1. Test Standard and Requirement..... 43

11.2. Antenna Connected Construction..... 43

APPENDIX I -- TEST SETUP PHOTOGRAPH..... 44

APPENDIX II -- EXTERNAL PHOTOGRAPH..... 46

APPENDIX III -- INTERNAL PHOTOGRAPH..... 50

TEST REPORT

Applicant : Aputure Imaging Industries Co., Ltd
Manufacturer : Aputure Imaging Industries Co., Ltd
Product Name : Pocket Wireless Mobile Kit
Model No. : Pocket Wireless Mobile Kit, Pocket Wireless Black, Pocket Wireless White, Pocket Wireless Black Canada, Pocket Wireless White Canada, Pocket Wireless Mobile Black Canada, Pocket Wireless, Pocket Wireless RX, Pocket Wireless TX
Trade Mark : 
Rating(s) : Input: DC 5V 380mA 1.9W (with DC 3.7V, 400mAh battery inside)
Test Standard(s) : **FCC Part15 Subpart C, Section 15.247**
Test Method(s) : **ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of receipt : Nov. 27, 2020
Date of Test : Nov. 27, 2020~May 08, 2021

Prepared by : 

(Engineer / Ella Liang)

Reviewer : 

(Supervisor / Bibo Zhang)

Approved & Authorized Signer : 


(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Aputure Imaging Industries Co., Ltd
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China
Manufacturer	:	Aputure Imaging Industries Co., Ltd
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China
Factory	:	Aputure Imaging Industries Co., Ltd
Address	:	3rd Floor, Building 21, Longjun industrial estate, Longhua, Bao'an, Shenzhen, P.R.China

1.2. Description of Device (EUT)

Product Name	:	Pocket Wireless Mobile Kit	
Model No.	:	Pocket Wireless Mobile Kit, Pocket Wireless Black, Pocket Wireless White, Pocket Wireless Black Canada, Pocket Wireless White Canada, Pocket Wireless Mobile Black Canada, Pocket Wireless, Pocket Wireless RX, Pocket Wireless TX (Note: All samples are the same except the model number and appearance color, so we prepare "Pocket Wireless Mobile Kit" for test only.)	
Trade Mark	:		
Test Power Supply	:	AC 120V, 60Hz for adapter/ AC 240V, 60Hz for adapter/ DC 3.7V battery inside	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2406~2474MHZ
		Number of Channel:	18 Channels
		Modulation Type:	AFH2 (GFSK)
		Antenna Type:	LDS antenna
		Antenna Gain(Peak):	0 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE M/N: STC-A205011000USBA-C S/N: 201202102100876 Input: 100-240V~ 50/60Hz, 0.3A Output: DC 5V, 1000mA
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

TEST MODE:

Mode 1	AFH2 (GFSK)	CH01	TX Charging/ TX Only
Mode 2		CH09	
Mode 3		CH18	

Note: (1) The measurements are performed at the highest, middle, lowest available channels.



1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2406	05	2422	09	2438	13	2454	17	2470
02	2410	06	2426	10	2442	14	2458	18	2474
03	2414	07	2430	11	2446	15	2462		
04	2418	08	2434	12	2450	16	2466		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.6. Description Of Test Setup

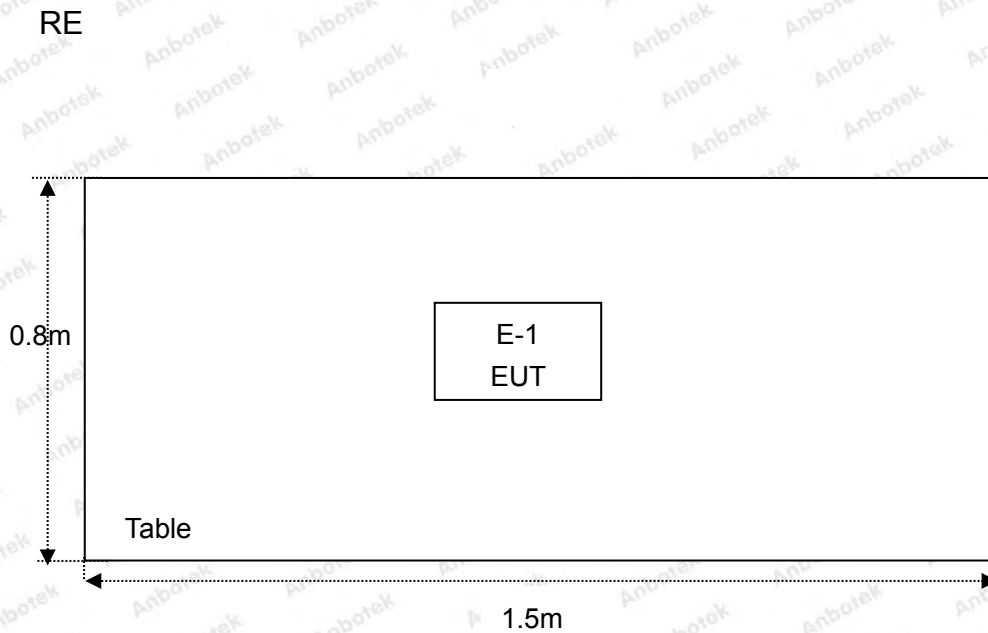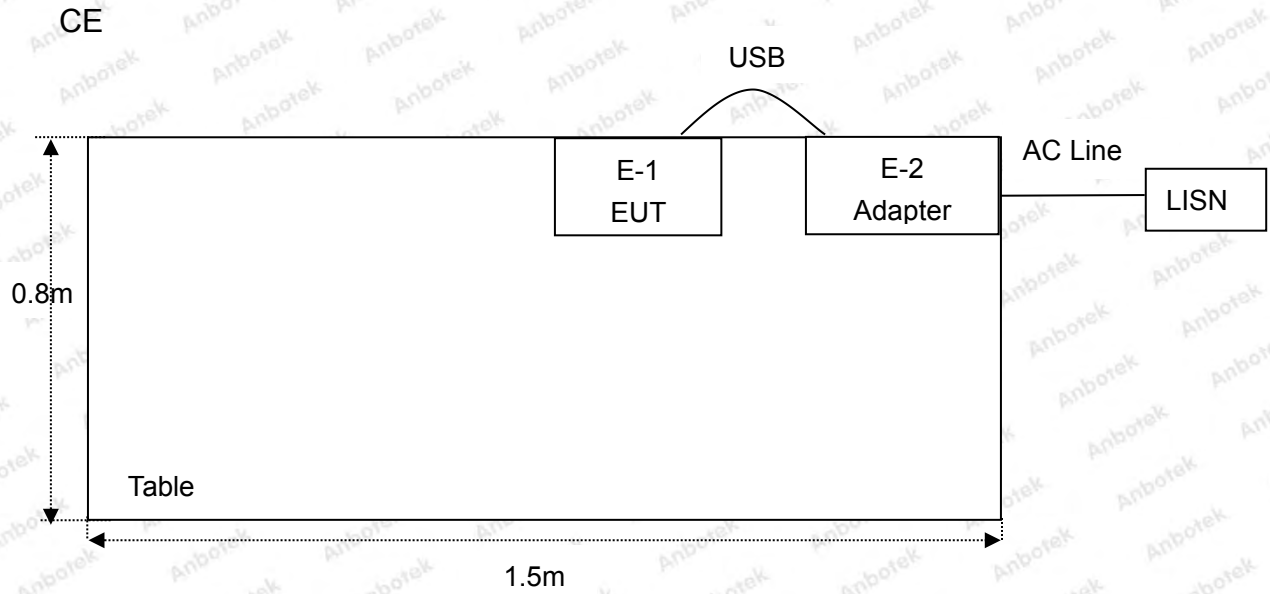

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results


Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

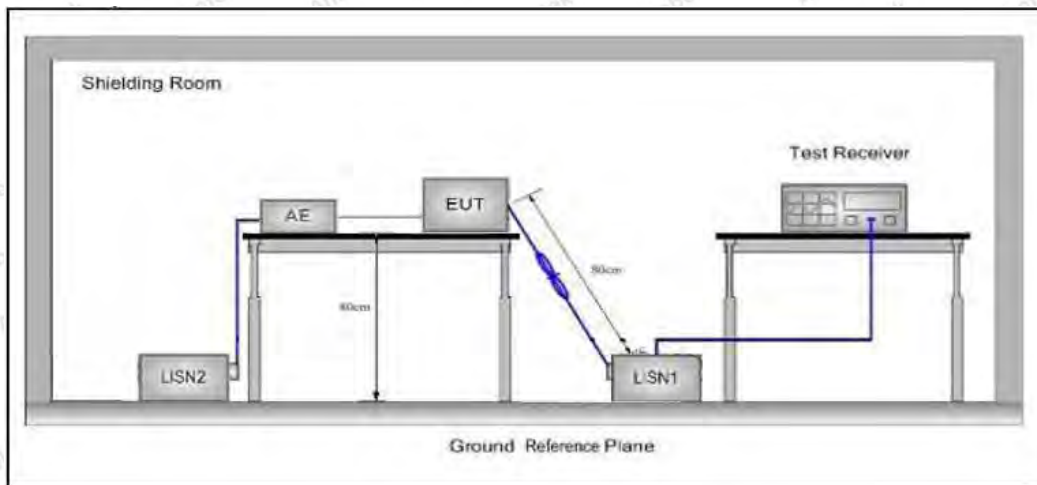

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, and found the CH01 which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.6°C Hum.: 52%

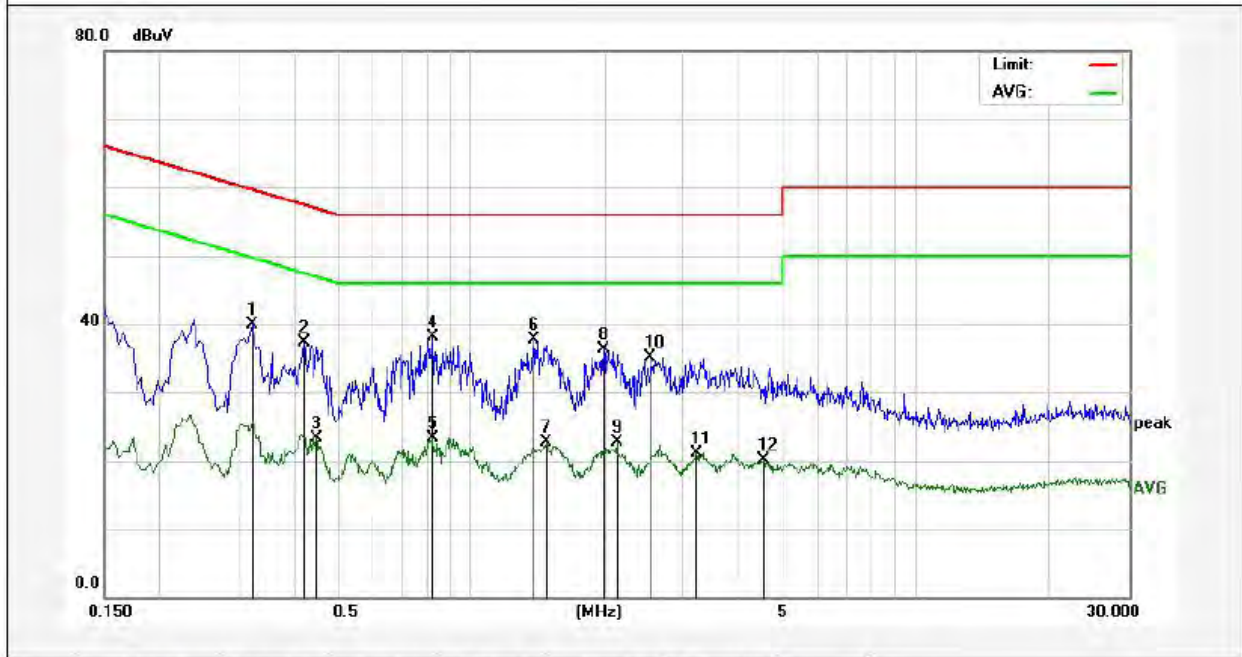

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3220	20.04	19.90	39.94	59.65	-19.71	QP	
2	0.4220	17.45	19.94	37.39	57.41	-20.02	QP	
3	0.4500	3.38	19.96	23.34	46.87	-23.53	AVG	
4	0.8260	17.98	20.07	38.05	56.00	-17.95	QP	
5	0.8260	3.32	20.07	23.39	46.00	-22.61	AVG	
6	1.3860	17.59	20.13	37.72	56.00	-18.28	QP	
7	1.4740	2.66	20.13	22.79	46.00	-23.21	AVG	
8	1.9900	16.26	20.14	36.40	56.00	-19.60	QP	
9	2.1220	2.61	20.14	22.75	46.00	-23.25	AVG	
10	2.5300	14.98	20.15	35.13	56.00	-20.87	QP	
11	3.2180	0.98	20.16	21.14	46.00	-24.86	AVG	
12	4.5420	-0.03	20.19	20.16	46.00	-25.84	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.6°C Hum.: 52%

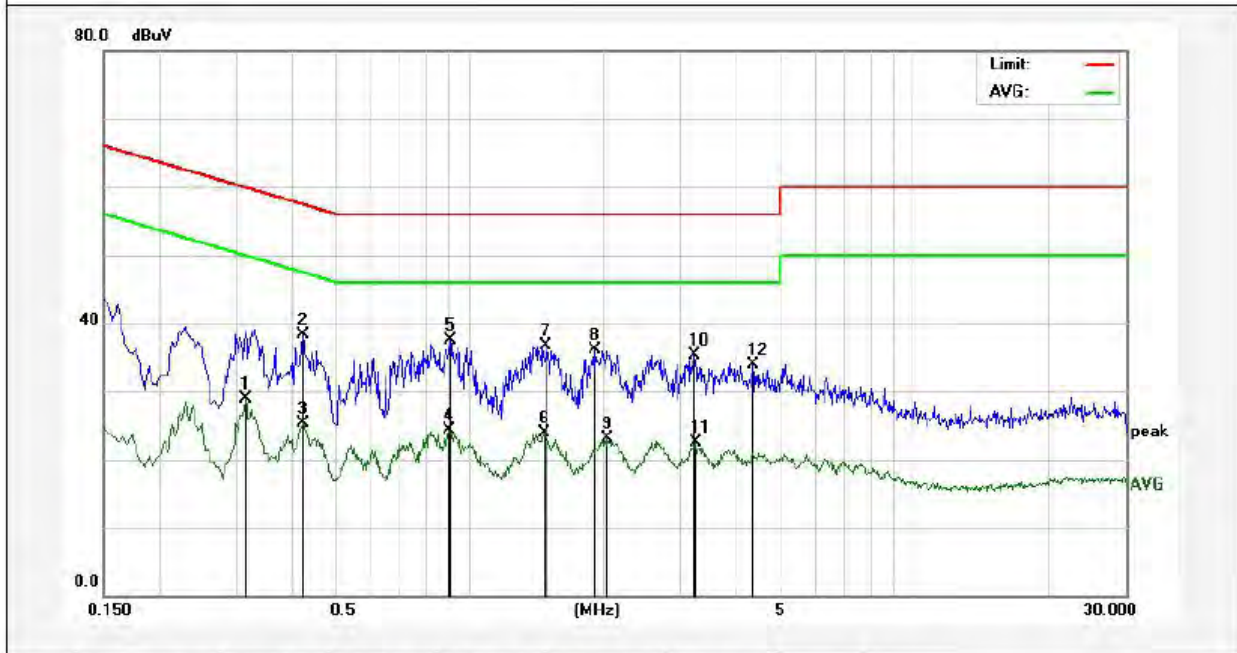

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3140	8.98	19.90	28.88	49.86	-20.98	AVG	
2	0.4220	18.31	19.94	38.25	57.41	-19.16	QP	
3	0.4220	5.36	19.94	25.30	47.41	-22.11	AVG	
4	0.9020	4.24	20.09	24.33	46.00	-21.67	AVG	
5	0.9060	17.46	20.09	37.55	56.00	-18.45	QP	
6	1.4780	3.85	20.13	23.98	46.00	-22.02	AVG	
7	1.4940	16.54	20.13	36.67	56.00	-19.33	QP	
8	1.9220	15.88	20.14	36.02	56.00	-19.98	QP	
9	2.0420	3.05	20.14	23.19	46.00	-22.81	AVG	
10	3.2100	15.20	20.16	35.36	56.00	-20.64	QP	
11	3.2260	2.25	20.16	22.41	46.00	-23.59	AVG	
12	4.3540	13.76	20.19	33.95	56.00	-22.05	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.6°C Hum.: 52%

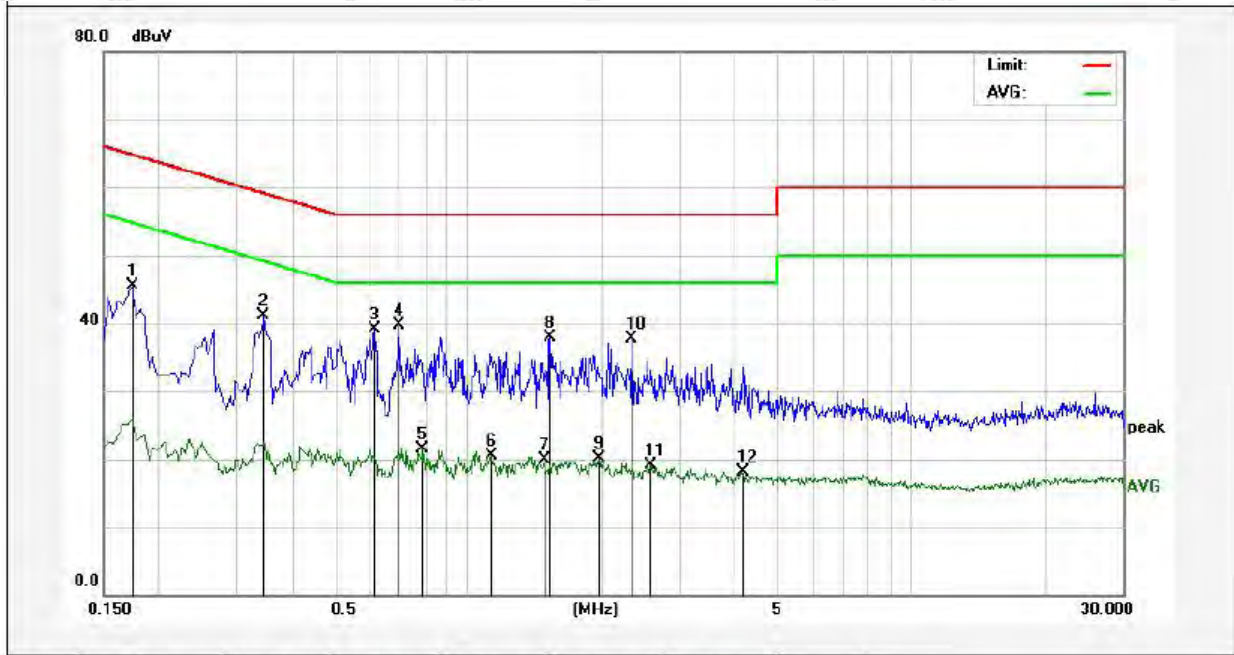

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	25.56	19.90	45.46	64.76	-19.30	QP	
2	0.3460	21.20	19.91	41.11	59.06	-17.95	QP	
3	0.6140	19.13	20.01	39.14	56.00	-16.86	QP	
4	0.6980	19.60	20.04	39.64	56.00	-16.36	QP	
5	0.7900	1.53	20.06	21.59	46.00	-24.41	AVG	
6	1.1340	0.40	20.12	20.52	46.00	-25.48	AVG	
7	1.4819	-0.32	20.13	19.81	46.00	-26.19	AVG	
8	1.5300	17.75	20.13	37.88	56.00	-18.12	QP	
9	1.9740	-0.10	20.14	20.04	46.00	-25.96	AVG	
10	2.3380	17.61	20.15	37.76	56.00	-18.24	QP	
11	2.5700	-0.96	20.15	19.19	46.00	-26.81	AVG	
12	4.1380	-2.02	20.18	18.16	46.00	-27.84	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.6°C Hum.: 52%

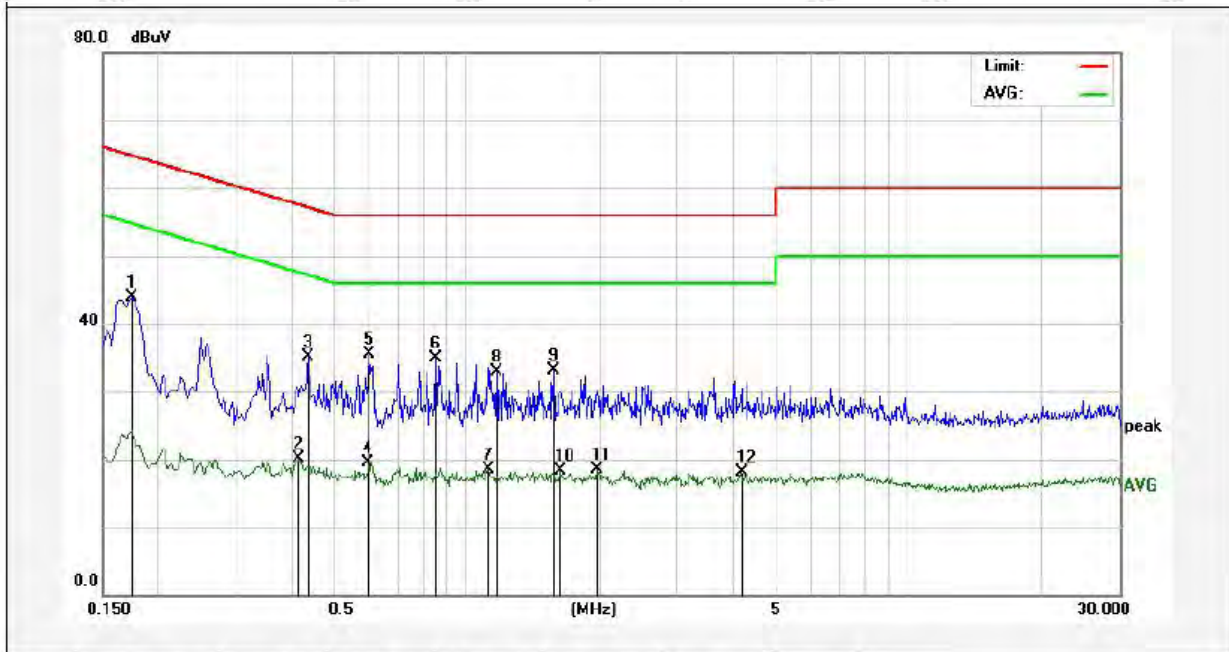

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	24.09	19.90	43.99	64.76	-20.77	QP	
2	0.4180	0.08	19.94	20.02	47.49	-27.47	AVG	
3	0.4380	15.12	19.95	35.07	57.10	-22.03	QP	
4	0.5980	-0.55	20.01	19.46	46.00	-26.54	AVG	
5	0.6020	15.57	20.01	35.58	56.00	-20.42	QP	
6	0.8500	14.77	20.08	34.85	56.00	-21.15	QP	
7	1.1220	-1.56	20.12	18.56	46.00	-27.44	AVG	
8	1.1700	12.86	20.12	32.98	56.00	-23.02	QP	
9	1.5700	13.00	20.13	33.13	56.00	-22.87	QP	
10	1.6340	-1.91	20.13	18.22	46.00	-27.78	AVG	
11	1.9780	-1.70	20.14	18.44	46.00	-27.56	AVG	
12	4.1620	-2.05	20.18	18.13	46.00	-27.87	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

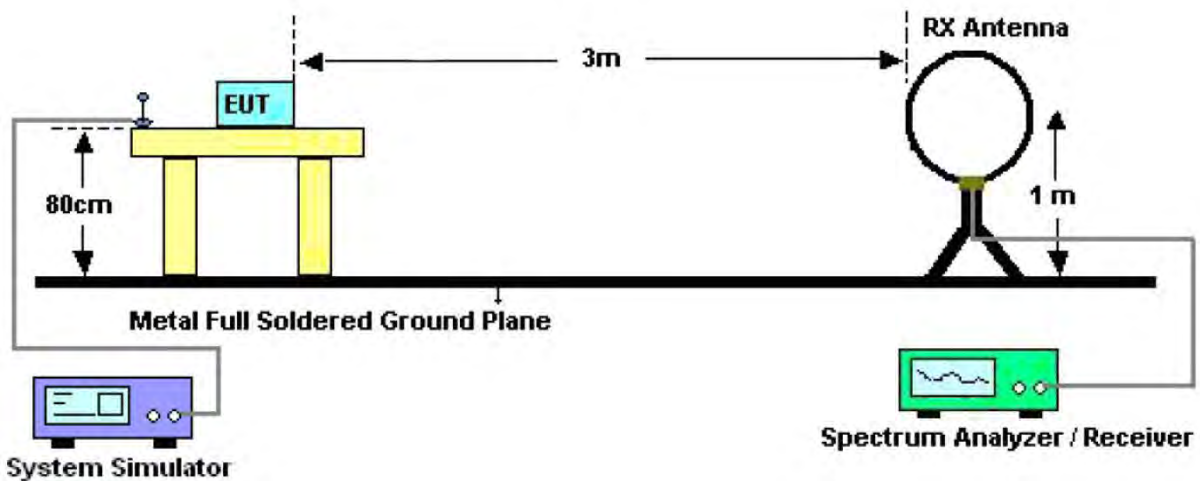


Figure 1. Below 30MHz

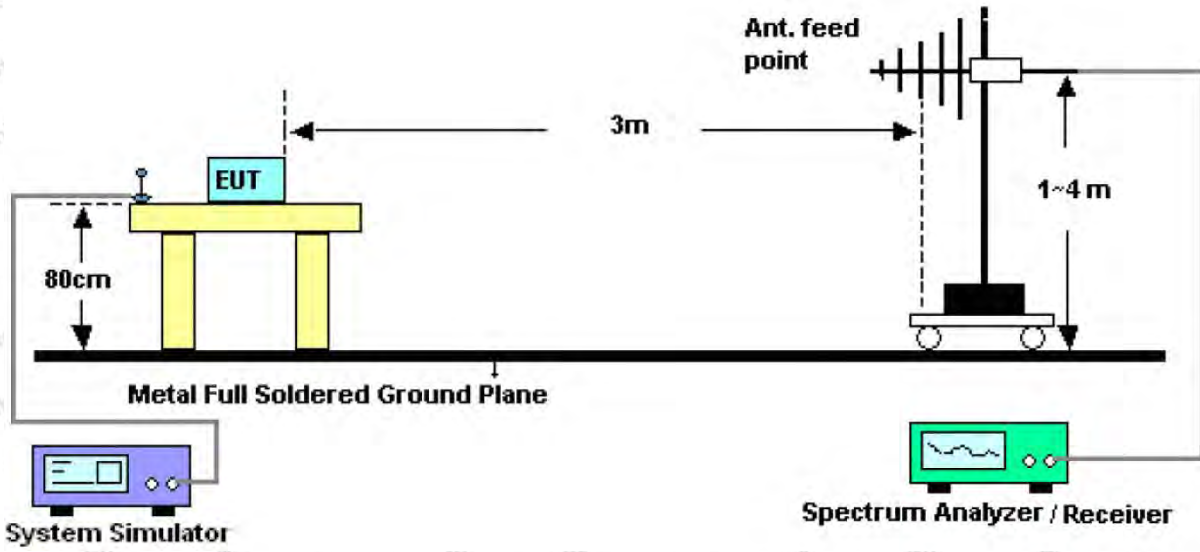


Figure 2. 30MHz to 1GHz

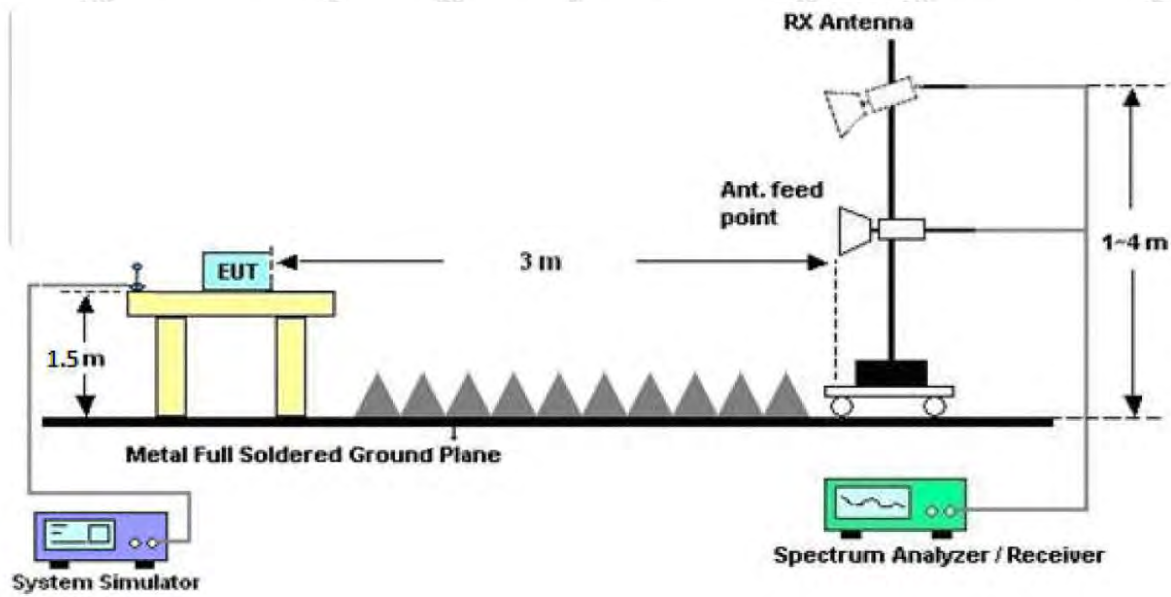


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, pre-scan all the Modes, and found CH01(TX Only) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Results (30~1000MHz)

Test Mode: Mode 1
 Power Source: DC 3.7V battery inside
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 22°C/45%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.2120	29.00	-14.54	14.46	40.00	-25.54	QP	100	0	
2	48.5016	29.88	-14.63	15.25	40.00	-24.75	QP	100	360	
3	81.2117	33.41	-17.48	15.93	40.00	-24.07	QP	100	0	
4	187.0958	31.72	-17.88	13.84	43.50	-29.66	QP	100	360	
5	627.2738	32.57	-6.79	25.78	46.00	-20.22	QP	100	0	
6	968.9338	31.42	-0.40	31.02	54.00	-22.98	QP	100	360	

Test Results (30~1000MHz)

Test Mode: Mode 1
 Power Source: DC 3.7V battery inside
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 22°C/45%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	49.5328	30.37	-14.79	15.58	40.00	-24.42	QP	100	360	
2	96.4362	35.64	-19.73	15.91	43.50	-27.59	QP	100	0	
3	208.5803	35.70	-19.70	16.00	43.50	-27.50	QP	100	360	
4	490.7447	32.81	-10.44	22.37	46.00	-23.63	QP	100	0	
5	609.9217	31.74	-6.75	24.99	46.00	-21.01	QP	100	360	
6	952.0937	31.94	-0.79	31.15	46.00	-14.85	QP	100	0	

Test Results (1GHz-25GHz)

Test Mode: CH01					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4812.00	42.14	34.04	6.58	34.09	48.67	74.00	-25.33	V
7218.00	35.04	37.11	7.73	34.50	45.38	74.00	-28.62	V
9624.00	34.33	39.31	9.23	34.79	48.08	74.00	-25.92	V
12030.00	*					74.00		V
14436.00	*					74.00		V
4812.00	47.42	34.04	6.58	34.09	53.95	74.00	-20.05	H
7218.00	37.22	37.11	7.73	34.50	47.56	74.00	-26.44	H
9624.00	34.21	39.31	9.23	34.79	47.96	74.00	-26.04	H
12030.00	*					74.00		H
14436.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4812.00	30.04	34.04	6.58	34.09	36.57	54.00	-17.43	V
7218.00	23.18	37.11	7.73	34.50	33.52	54.00	-20.48	V
9624.00	21.95	39.31	9.23	34.79	35.70	54.00	-18.30	V
12030.00	*					54.00		V
14436.00	*					54.00		V
4812.00	34.81	34.04	6.58	34.09	41.34	54.00	-12.66	H
7218.00	25.67	37.11	7.73	34.50	36.01	54.00	-17.99	H
9624.00	22.08	39.31	9.23	34.79	35.83	54.00	-18.17	H
12030.00	*					54.00		H
14436.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: CH09					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4876.00	42.73	34.38	6.69	34.09	49.71	74.00	-24.29	V
7314.00	35.43	37.22	7.78	34.53	45.90	74.00	-28.10	V
9752.00	34.67	39.46	9.35	34.80	48.68	74.00	-25.32	V
12190.00	*					74.00		V
14628.00	*					74.00		V
4876.00	48.12	34.38	6.69	34.09	55.10	74.00	-18.90	H
7314.00	37.66	37.22	7.78	34.53	48.13	74.00	-25.87	H
9752.00	34.61	39.46	9.35	34.80	48.62	74.00	-25.38	H
12190.00	*					74.00		H
14628.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4876.00	30.55	34.38	6.69	34.09	37.53	54.00	-16.47	V
7314.00	23.53	37.22	7.78	34.53	34.00	54.00	-20.00	V
9752.00	22.26	39.46	9.35	34.80	36.27	54.00	-17.73	V
12190.00	*					54.00		V
14628.00	*					54.00		V
4876.00	35.39	34.38	6.69	34.09	42.37	54.00	-11.63	H
7314.00	26.06	37.22	7.78	34.53	36.53	54.00	-17.47	H
9752.00	22.44	39.46	9.35	34.80	36.45	54.00	-17.55	H
12190.00	*					54.00		H
14628.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: CH18					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4948.00	41.18	34.72	6.79	34.09	48.60	74.00	-25.40	V
7422.00	34.40	37.34	7.82	34.57	44.99	74.00	-29.01	V
9896.00	33.76	39.62	9.46	34.81	48.03	74.00	-25.97	V
12370.00	*					74.00		V
14844.00	*					74.00		V
4948.00	46.25	34.72	6.79	34.09	53.67	74.00	-20.33	H
7422.00	36.50	37.34	7.82	34.57	47.09	74.00	-26.91	H
9896.00	33.54	39.62	9.46	34.81	47.81	74.00	-26.19	H
12370.00	*					74.00		H
14844.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4948.00	29.47	34.72	6.79	34.09	36.89	54.00	-17.11	V
7422.00	22.79	37.34	7.82	34.57	33.38	54.00	-20.62	V
9896.00	21.61	39.62	9.46	34.81	35.88	54.00	-18.12	V
12370.00	*					54.00		V
14844.00	*					54.00		V
4948.00	34.15	34.72	6.79	34.09	41.57	54.00	-12.43	H
7422.00	25.23	37.34	7.82	34.57	35.82	54.00	-18.18	H
9896.00	21.68	39.62	9.46	34.81	35.95	54.00	-18.05	H
12370.00	*					54.00		H
14844.00	*					54.00		H

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

Test Mode: CH01	Test channel: Lowest
Average Value(Vertical)	Average Value(Horizontal)
Peak Value(Vertical)	Peak Value(Horizontal)



Remark:


1. Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	125mW

5.2. Test Setup




5.3. Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
- Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold


5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V battery inside	Temperature	: 23.2°C
Test Result	: PASS	Humidity	: 55%RH


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results	Modulation
2406	7.473	20.96	PASS	AFH2 (GFSK)
2438	7.178	20.96	PASS	AFH2 (GFSK)
2474	7.875	20.96	PASS	AFH2 (GFSK)

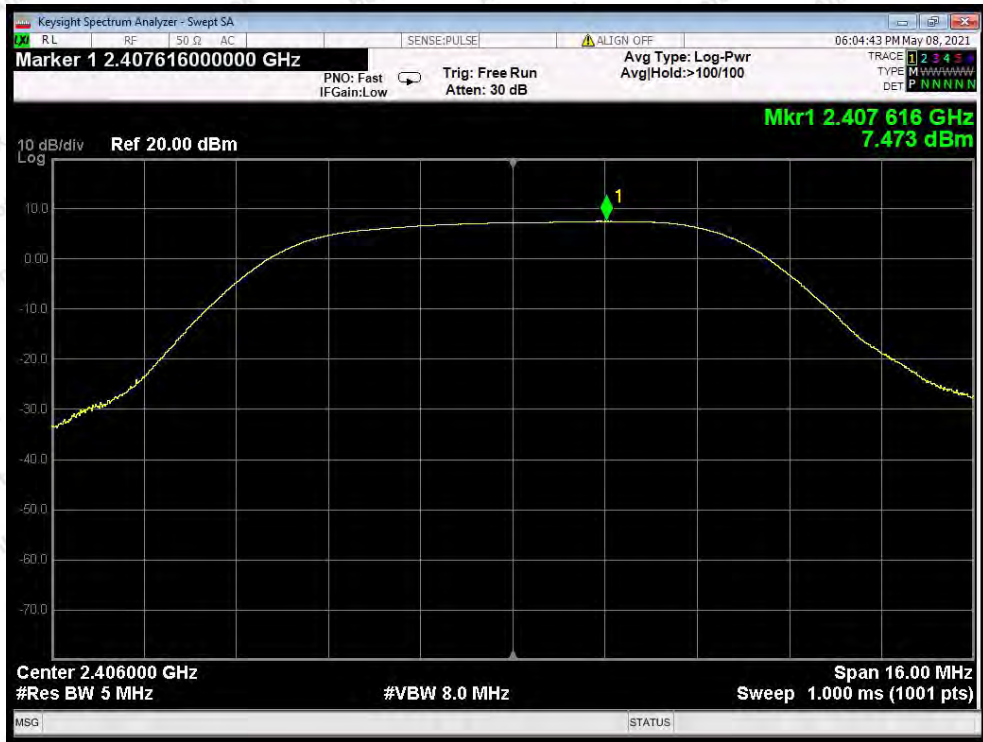

Test Mode: AFH2 (GFSK) ---Low

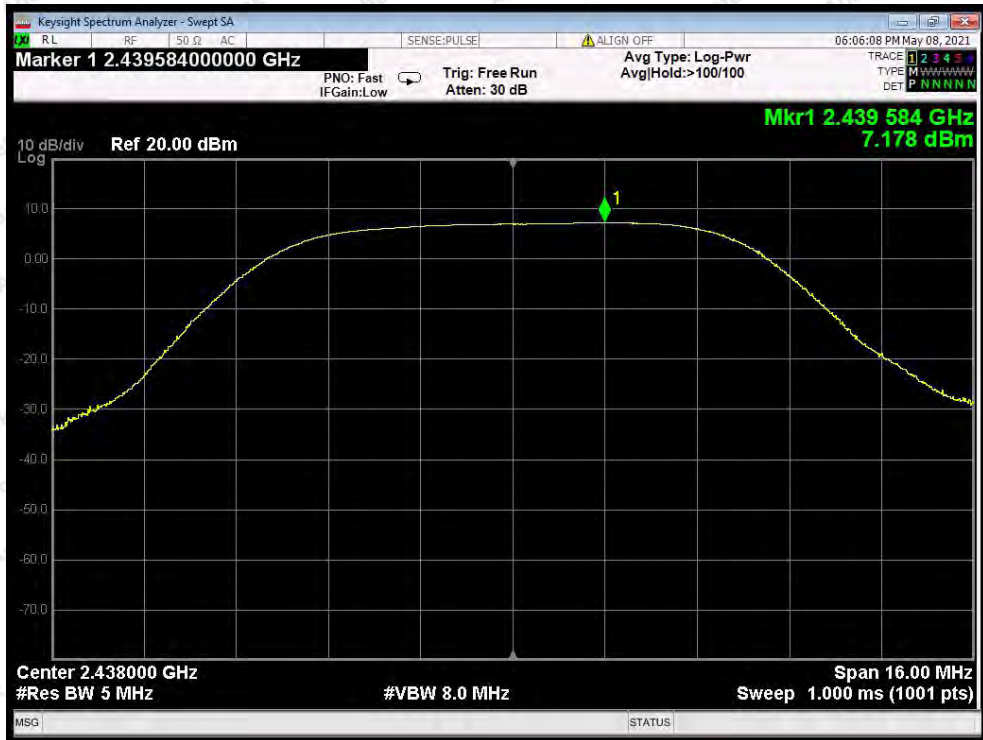

Test Mode: AFH2 (GFSK) ---Middle

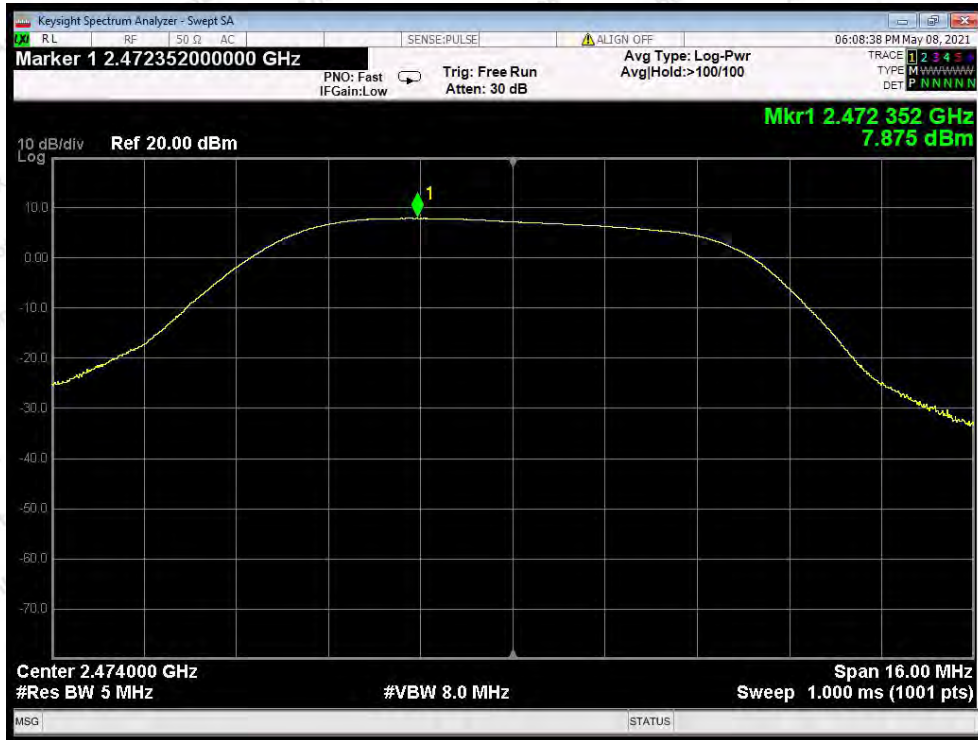


Test Mode: AFH2 (GFSK) ---High

6. 20DB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data


Test Item	: 20dB BW
Test Voltage	: DC 3.7V battery inside
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 23.2°C
Humidity	: 55%RH


Channel	Frequency(MHz)	20dB Down BW(MHz)	Modulation Mode
Low	2406	4.306	AFH2 (GFSK)
Middle	2438	4.306	AFH2 (GFSK)
High	2474	4.261	AFH2 (GFSK)

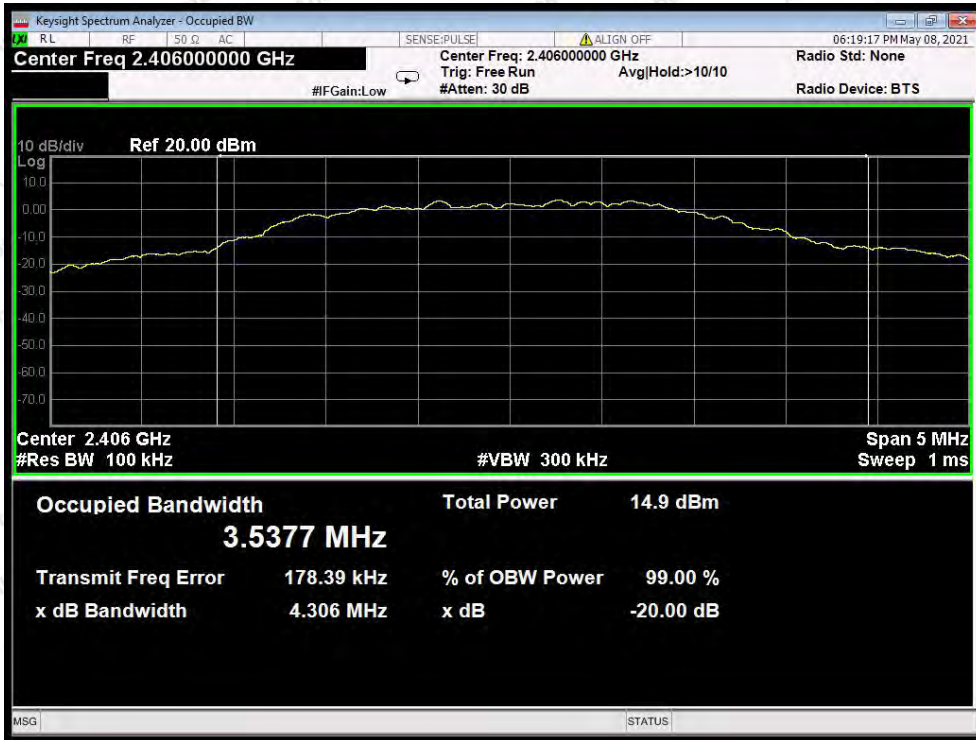

Test Mode: Low

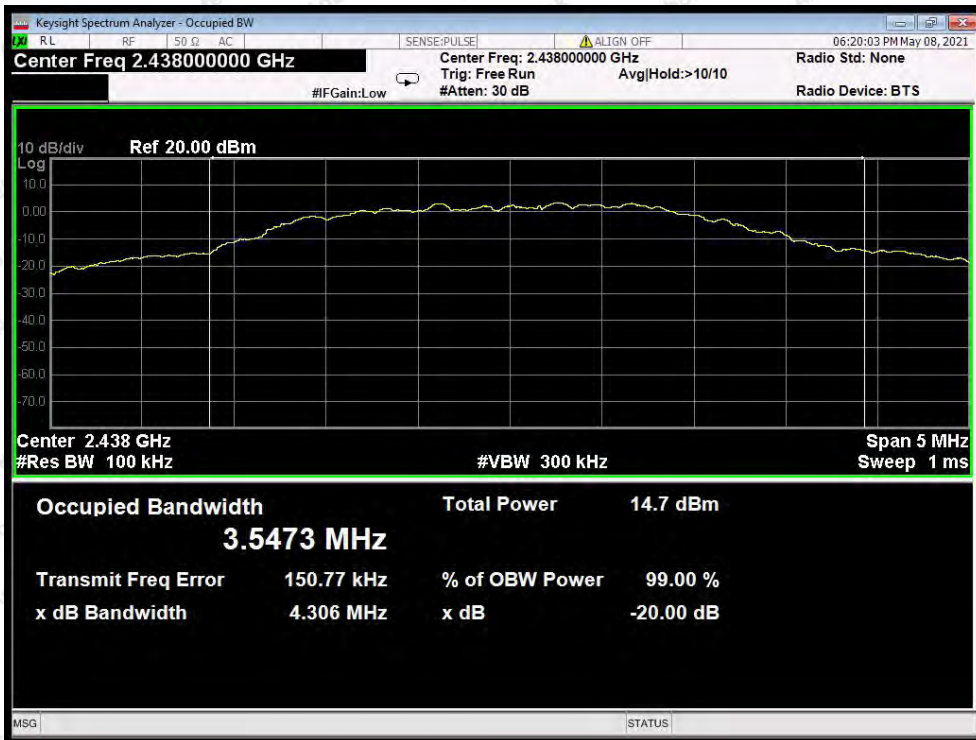

Test Mode: Middle

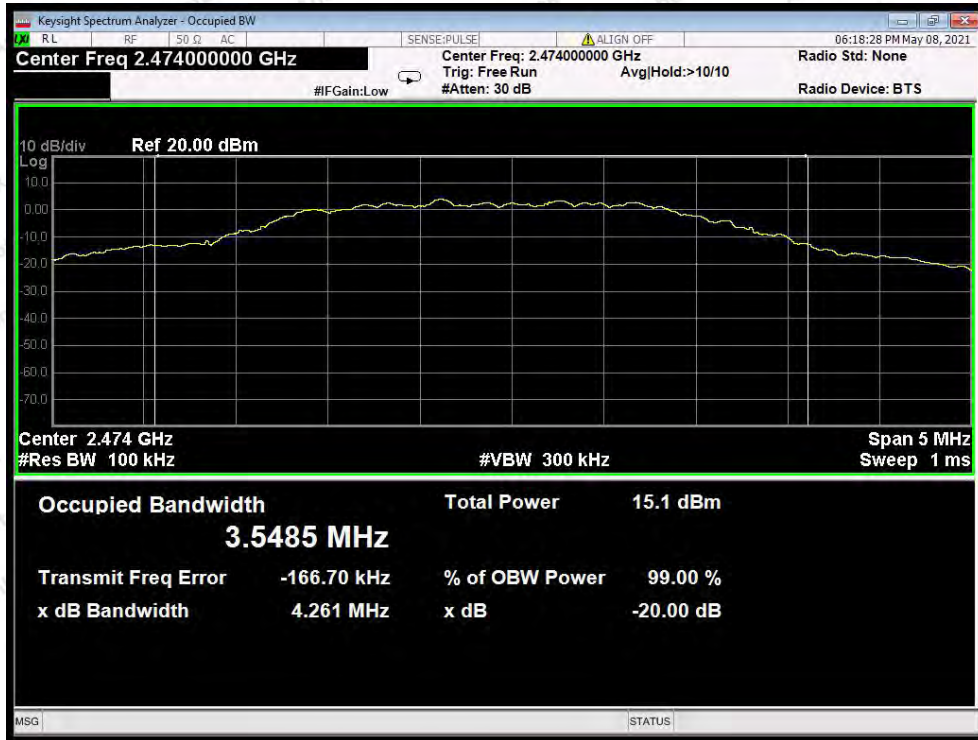


Test Mode: High

7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:


1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data


Test Item	: Frequency Separation	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V battery inside	Temperature	: 23.2°C
Test Result	: PASS	Humidity	: 55%RH

Channel	Frequency (MHz)	Separation Read Value (MHz)	Limit (kHz)
Low	2406	4	2870.667
Middle	2438	4	2870.667
High	2474	4	2840.667


Remark: The limit is 2/3 of 20dB BW.

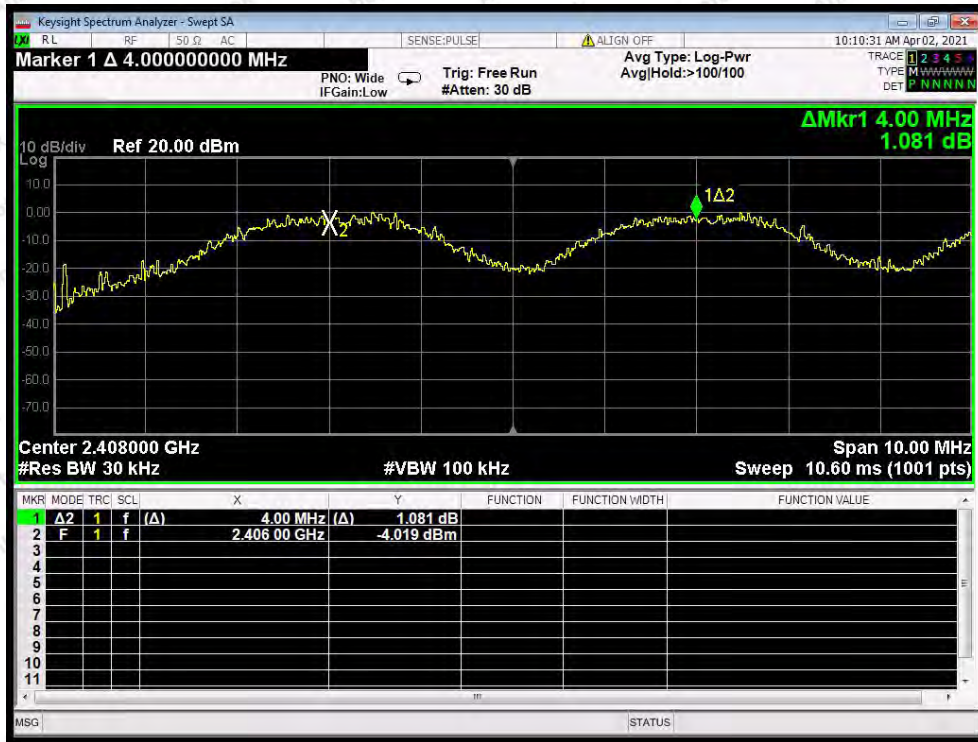

Test Mode: Low

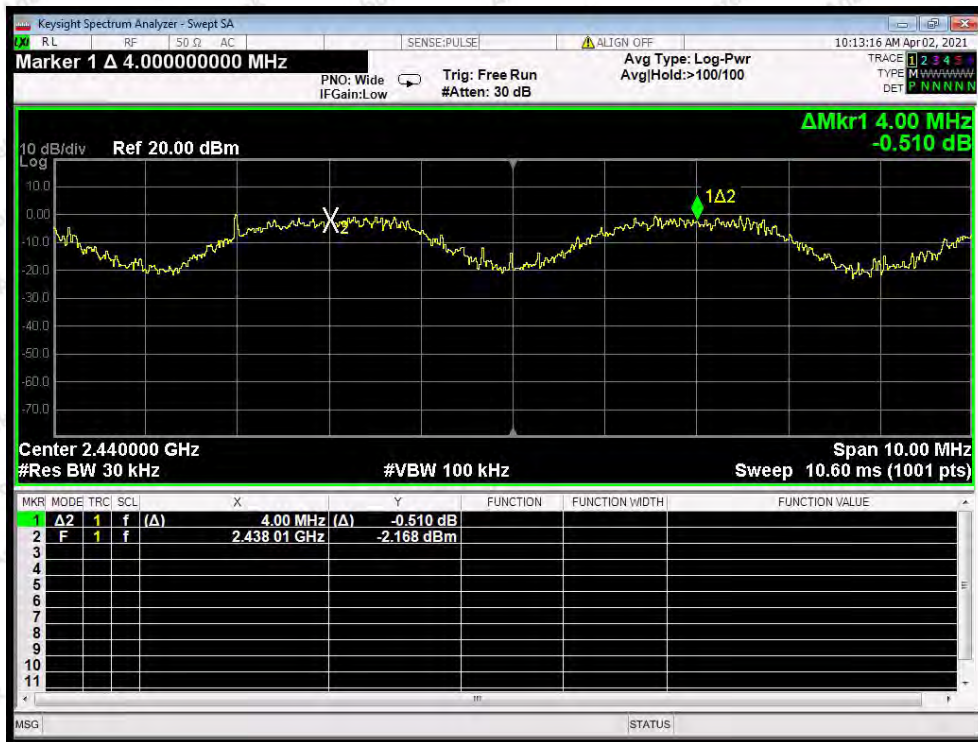

Test Mode: Middle

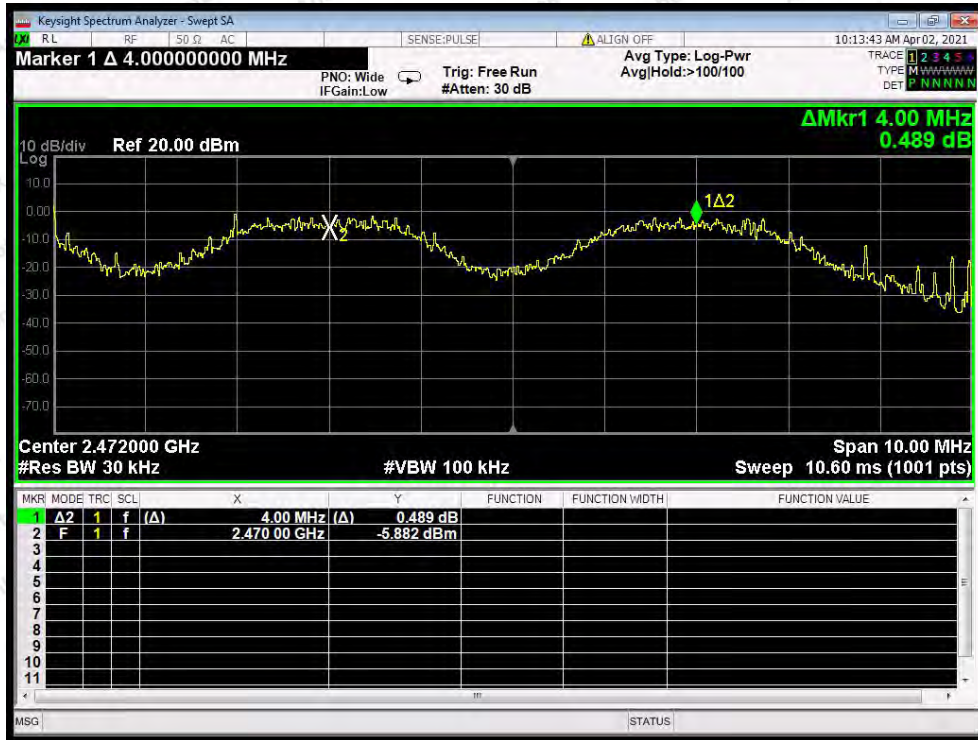


Test Mode: High

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure


The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V battery inside	Temperature	: 23.2°C
Test Result	: PASS	Humidity	: 55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2406-2474MHz	18	> 15

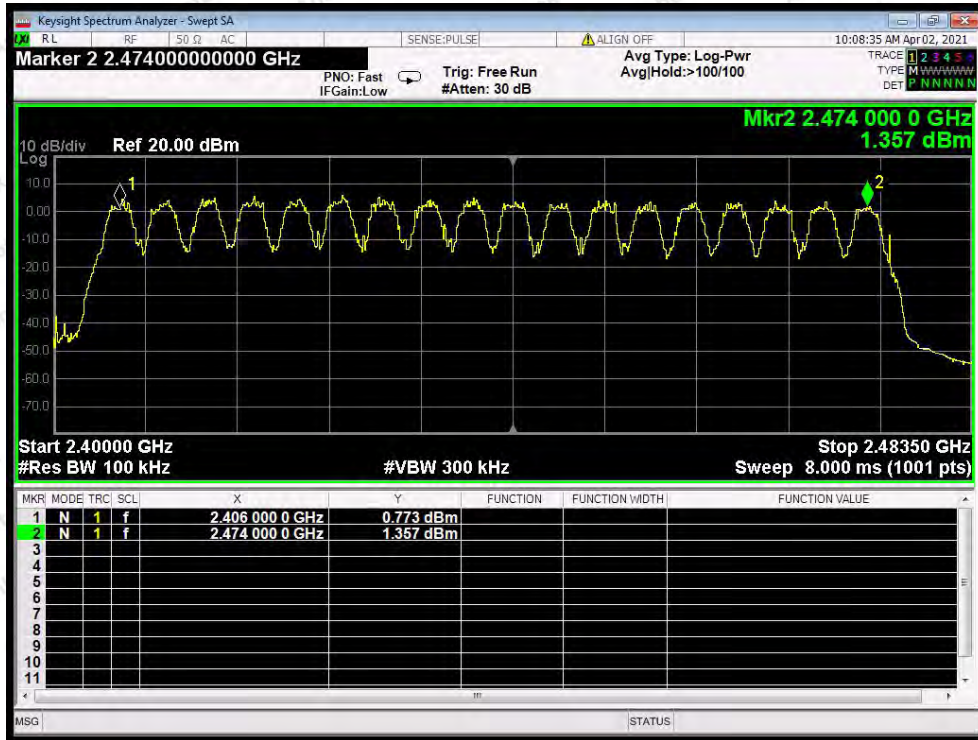


9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Data

Test Item	: Time of Occupancy	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V battery inside	Temperature	: 23.2°C
Test Result	: PASS	Humidity	: 55%RH

Channel	Burst width (ms)	Total hopping number in 7.2s	Total dwell time (s)	Limit (s)	Result
Hopping	12.75	28	0.357	≤0.4	Pass

Note:


- (1) Total dwell time=Burst width*Total hopping number
- (2)There are total 18 channels were active at any time. So the test period is 0.4s*18=7.2s.

10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure


The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


10.4. Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V battery inside	Temperature	: 23.2°C
Test Result	: PASS	Humidity	: 55%RH


For Hopping Mode

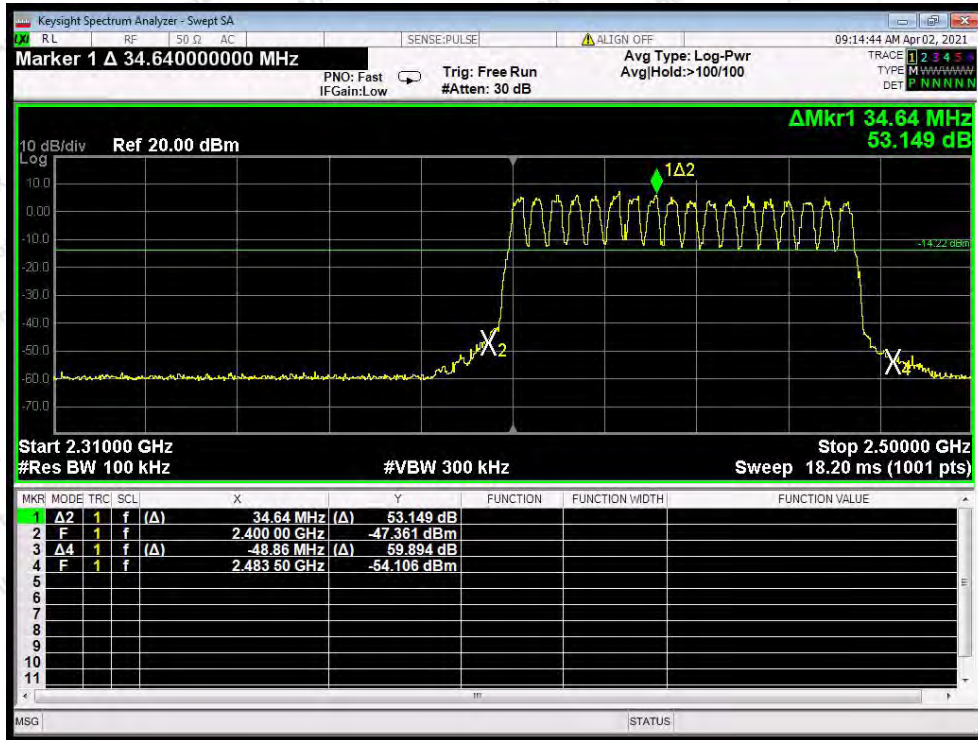


For Non-Hopping Mode

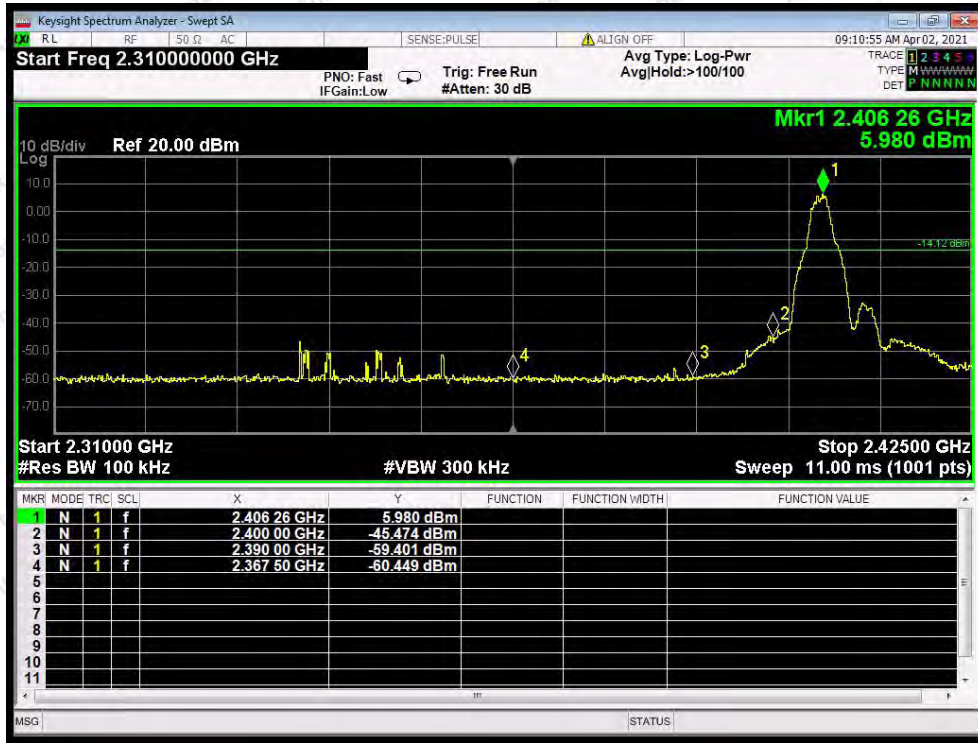


Lowest

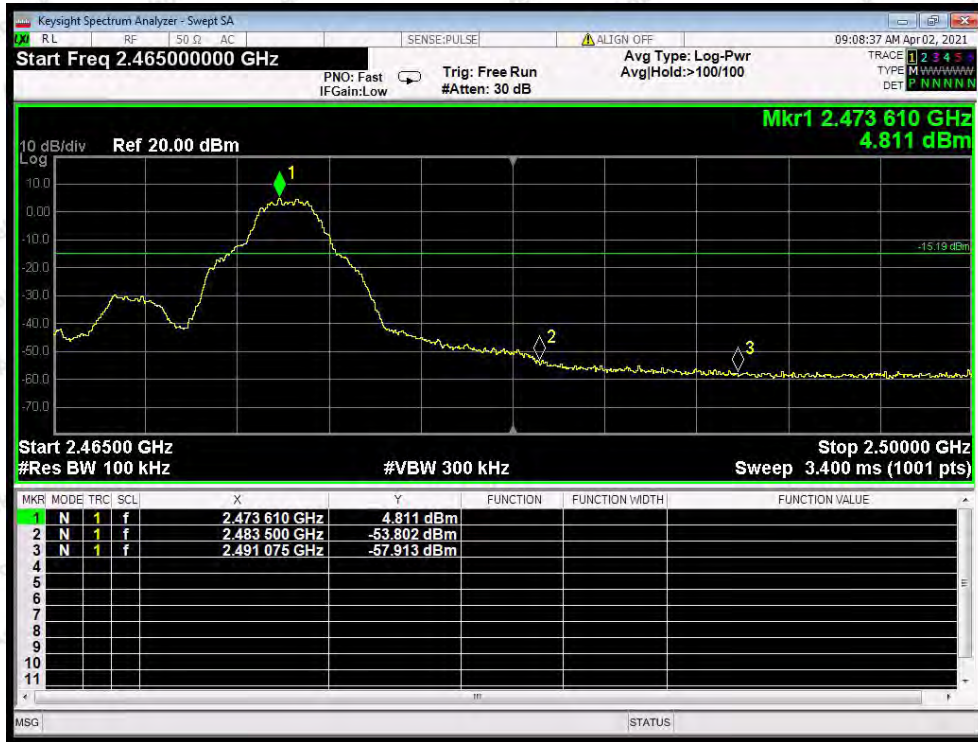


Highest

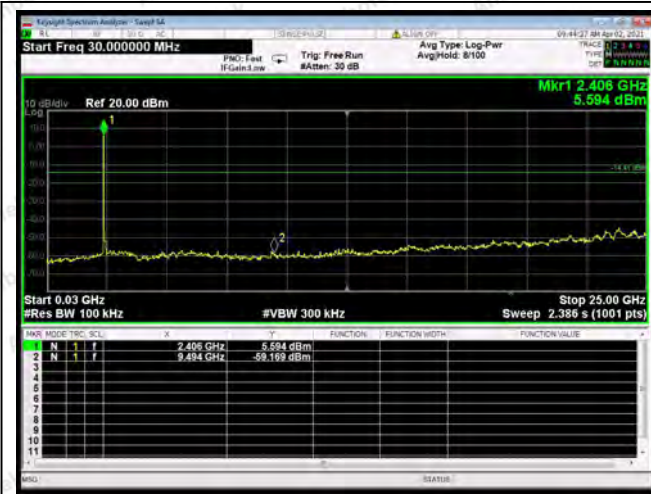

Test Mode: Low

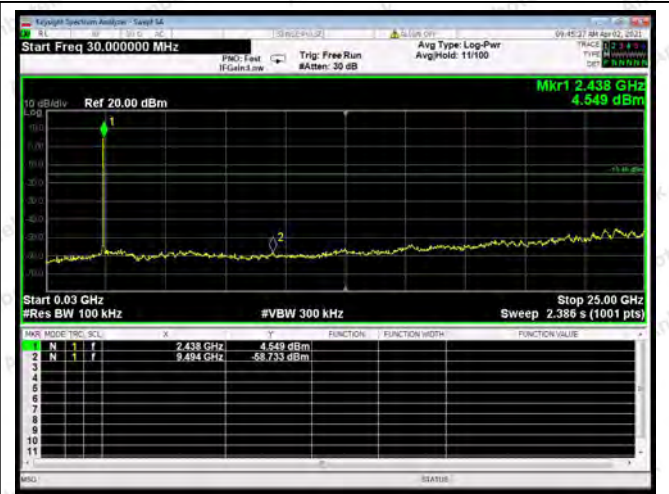

Test Mode: Mid

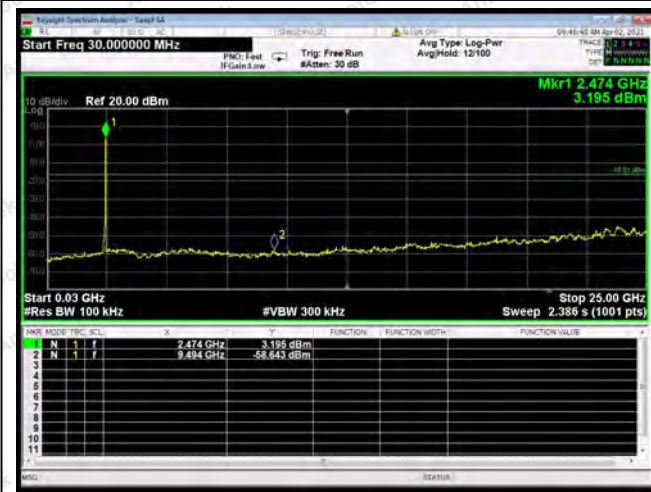

Test Mode: High



11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

11.2. Antenna Connected Construction

The antenna is LDS antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Test



Photo of Radiation Emission Test



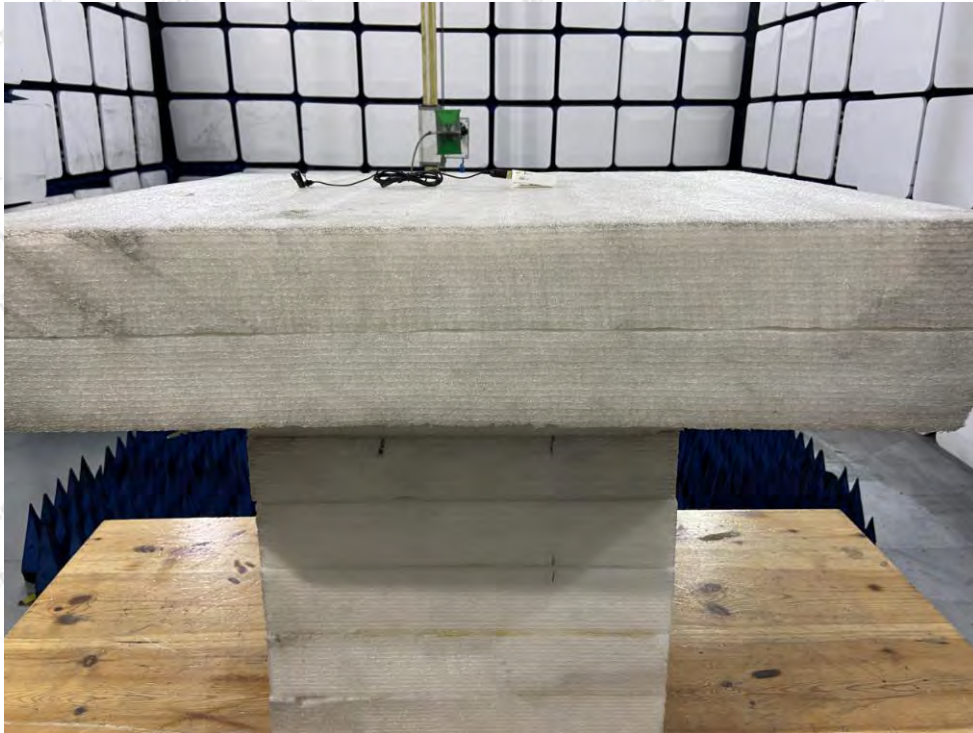

APPENDIX II -- EXTERNAL PHOTOGRAPH
















APPENDIX III -- INTERNAL PHOTOGRAPH

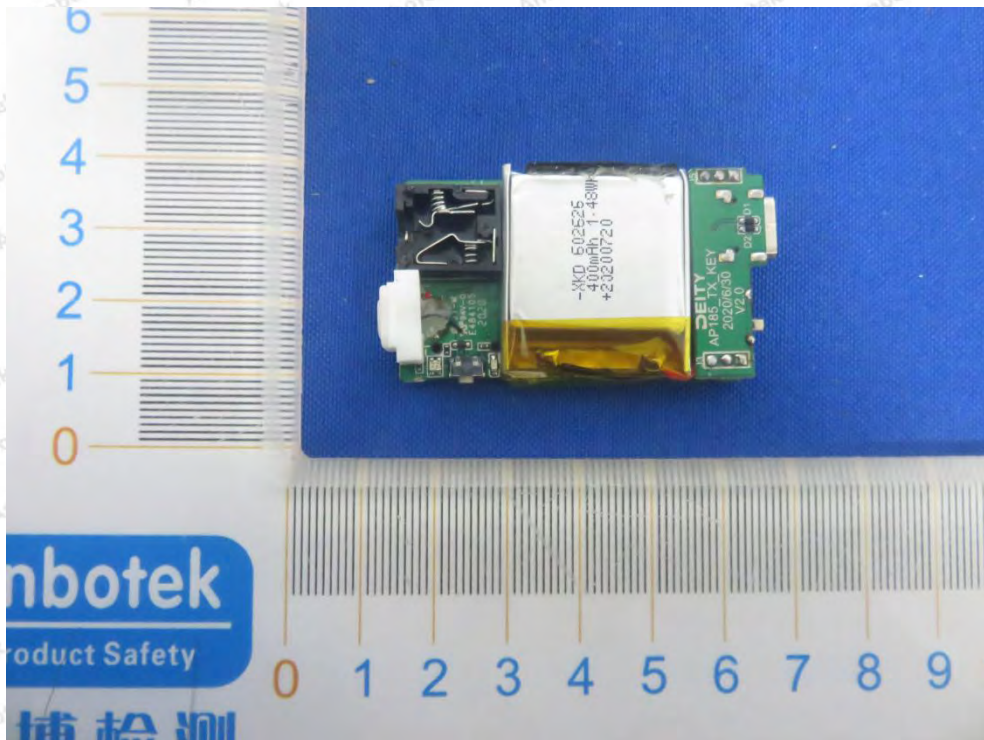

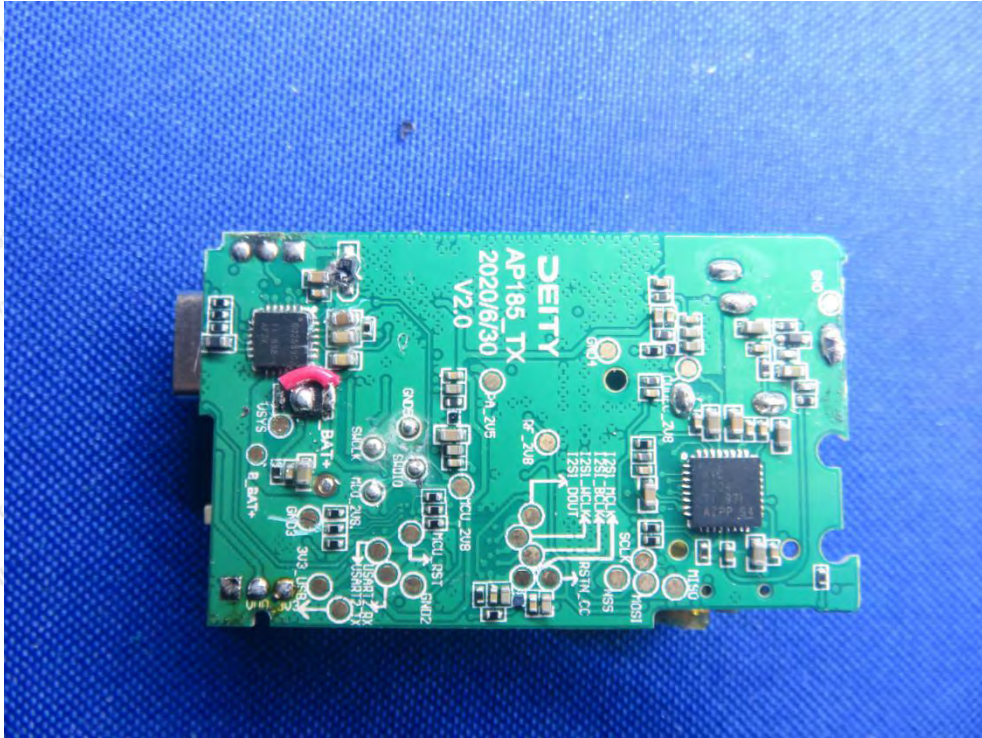

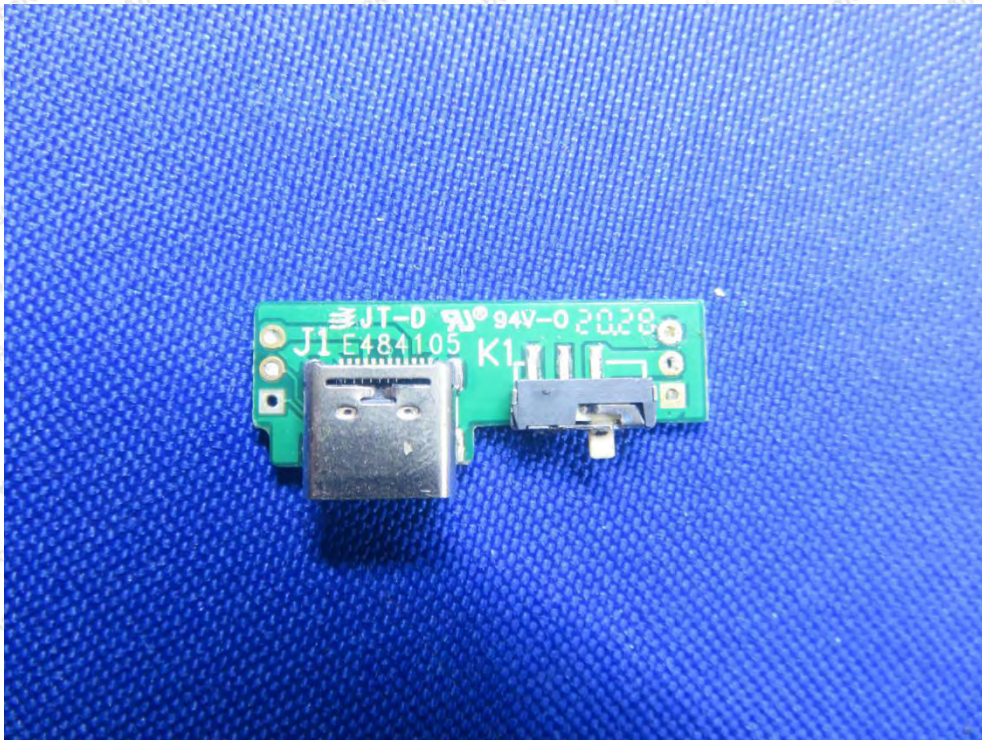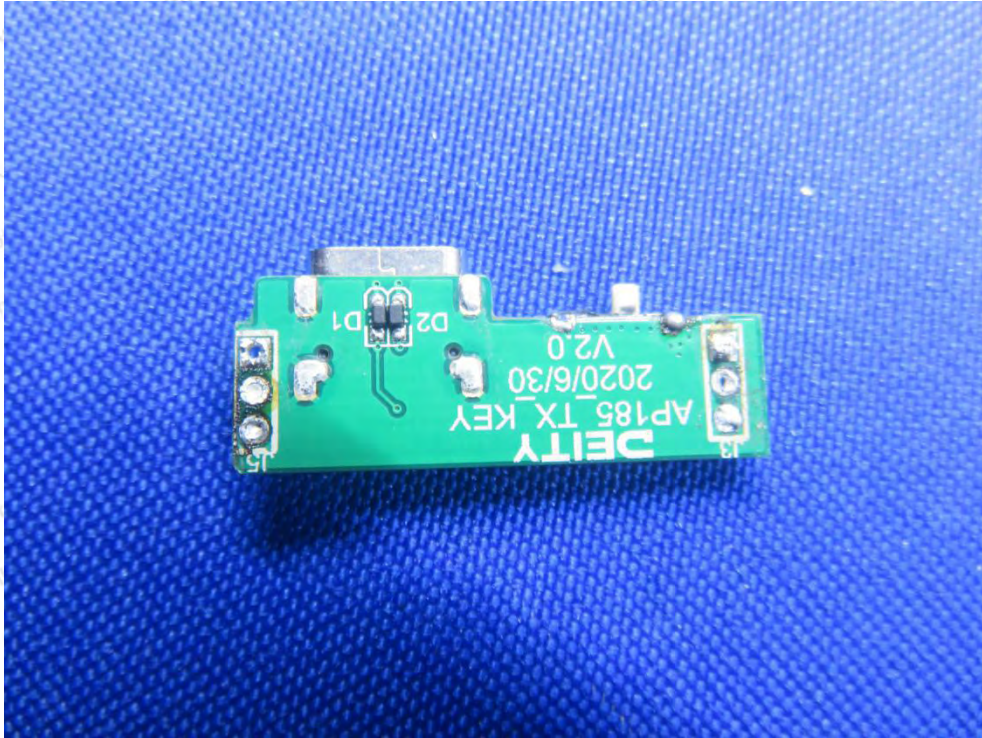

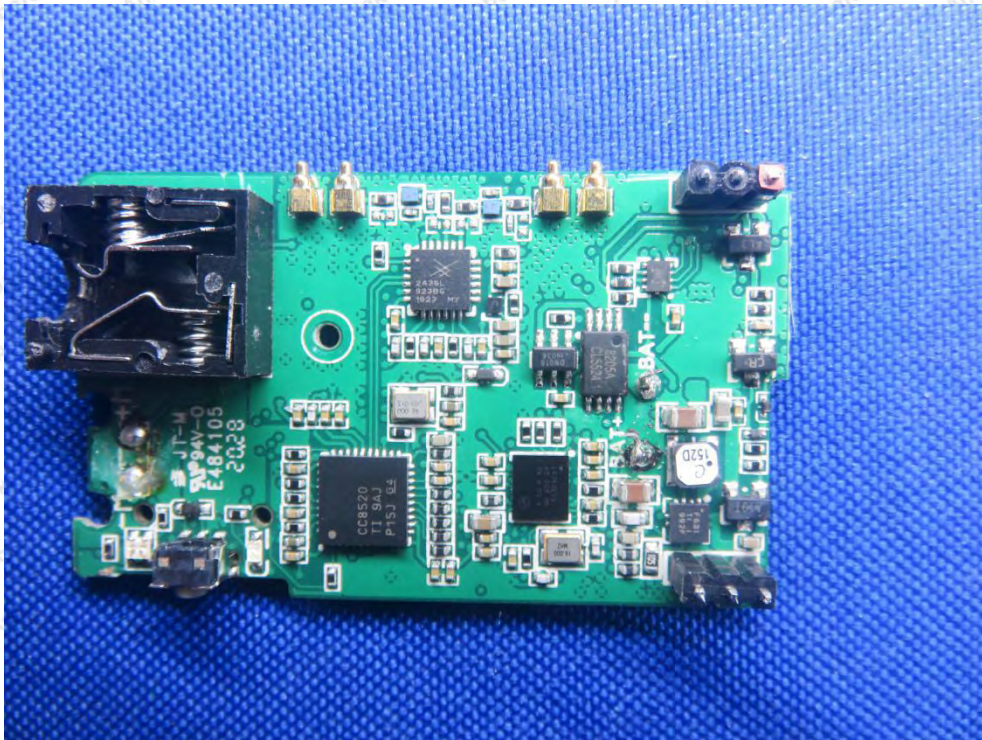

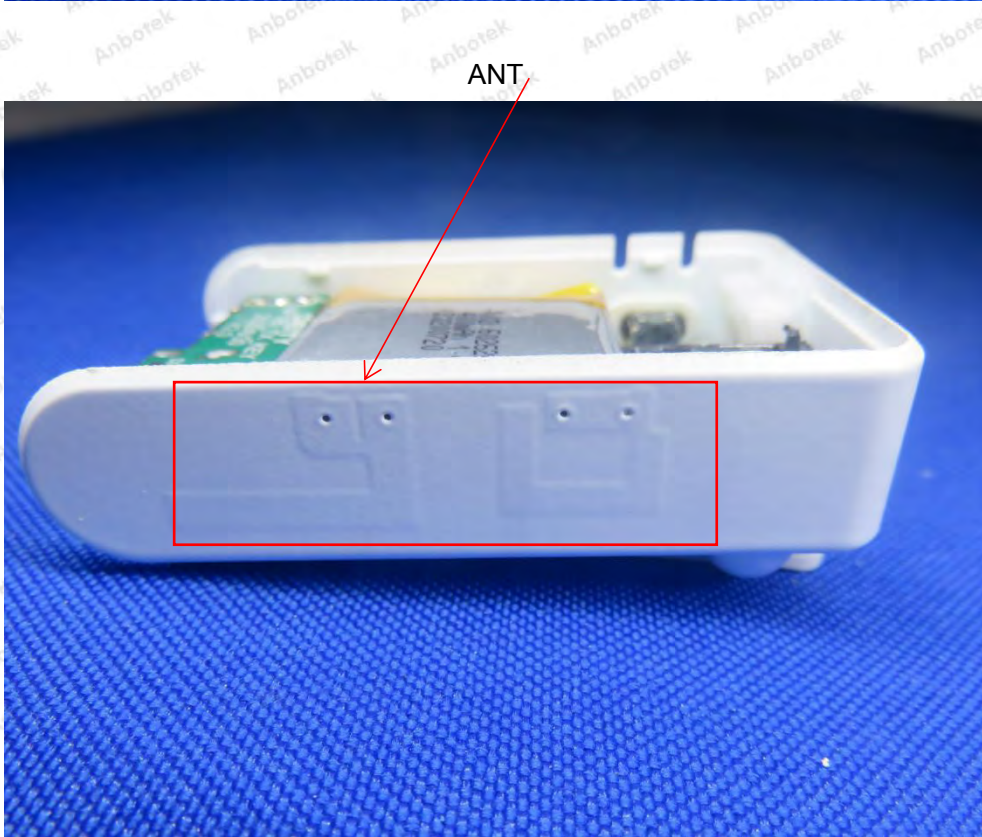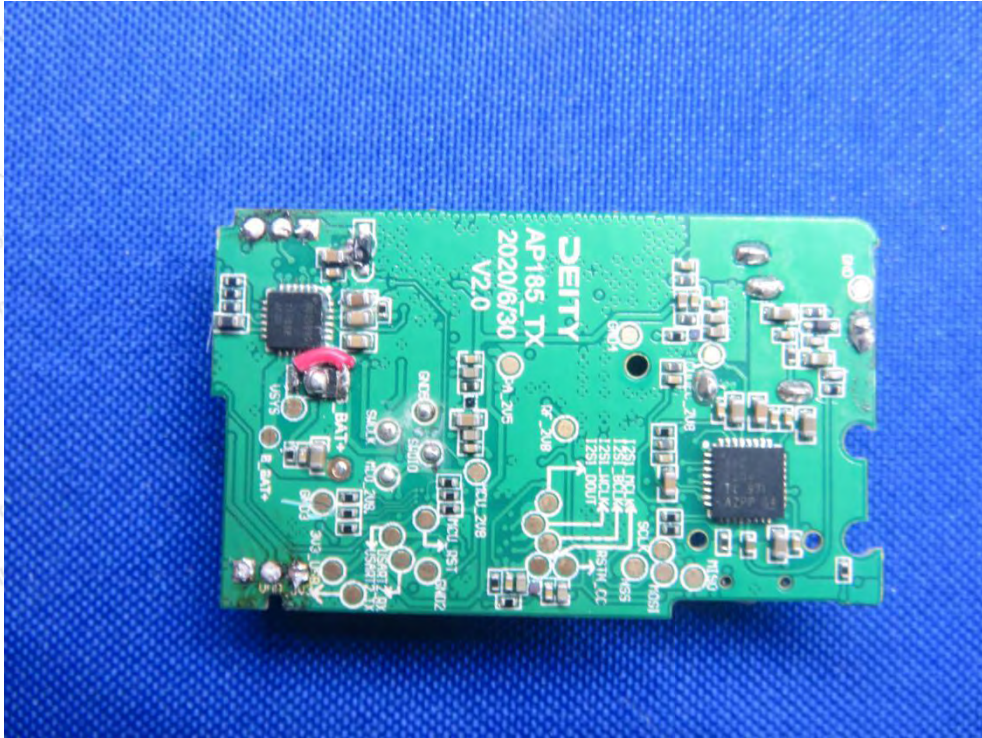

----- End of Report -----