

FCC Test Report

Report No.: RFBEMX-WTW-P21030214-1

FCC ID: 2AAFMRGP0111

Test Model: RGP0111

Received Date: Mar. 5, 2021

Test Date: Mar. 14 to 20, 2021

Issued Date: Apr. 1, 2021

Applicant: Corsair Memory, Inc.

Address: 47100 Bayside Pkwy, Fremont, CA 94538 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	7
3.2.1 Test Mode Applicability and Tested Channel Detail	8
3.3 Description of Support Units	9
3.3.1 Configuration of System under Test	10
3.4 General Description of Applied Standards	10
4 Test Types and Results	11
4.1 Radiated Emission and Bandedge Measurement	11
4.1.1 Limits of Radiated Emission and Bandedge Measurement	11
4.1.2 Test Instruments	12
4.1.3 Test Procedures	13
4.1.4 Deviation from Test Standard	13
4.1.5 Test Setup	14
4.1.6 EUT Operating Conditions	15
4.1.7 Test Results	16
4.2 Conducted Emission Measurement	22
4.2.1 Limits of Conducted Emission Measurement	22
4.2.2 Test Instruments	22
4.2.3 Test Procedures	23
4.2.4 Deviation From Test Standard	23
4.2.5 Test Setup	23
4.2.6 EUT Operating Condition	23
4.2.7 Test Results	24
4.3 Channel Bandwidth	28
4.3.1 Test Setup	28
4.3.2 Test Instruments	28
4.3.3 Test Procedure	28
4.3.4 Deviation from Test Standard	28
4.3.5 EUT Operating Condition	28
4.3.6 Test Results	29
5 Pictures of Test Arrangements	30
Appendix – Information of the Testing Laboratories	31

Release Control Record

Issue No.	Description	Date Issued
RFBEMX-WTW-P21030214-1	Original release.	Apr. 1, 2021

1 Certificate of Conformity

Product: Wireless Mouse

Brand: Corsair

Test Model: RGP0111

Sample Status: Engineering sample

Applicant: Corsair Memory, Inc.

Test Date: Mar. 14 to 20, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.249)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Jessica Cheng , **Date:** Apr. 1, 2021
Jessica Cheng / Senior Specialist

Approved by : Rex Lai , **Date:** Apr. 1, 2021
Rex Lai / Associate Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.249)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.44dB at 0.16564MHz.
15.215	Channel Bandwidth Measurement	-	-
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -6.26dB at 2480.00MHz.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Conducted Emissions	9kHz ~ 40GHz	2.63 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.61 dB
	30MHz ~ 1000MHz	5.43 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.42 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Mouse
Brand	Corsair
Test Model	RGP0111
Status of EUT	Engineering sample
Power Supply Rating	5Vdc (from USB port), 3.7Vdc (from battery)
Modulation Type	GFSK
Operating Frequency	2403MHz ~ 2480MHz
Number of Channel	78
Antenna Type	PIFA antenna with 2.16dBi gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	Shielded USB type A to C cable (1.8m)

Note:

1. Bluetooth & GFSK technologies can not transmit at same time.
2. The EUT was pre-tested with the following modes:
 - ✧ Operating Mode (EUT Stand-alone)
 - ✧ Charging Mode (Powered from Adapter)
 - ✧ Charging Mode (Powered from Notebook)

The worst emission level was found when the EUT tested under **Charging Mode (Powered from Notebook)** therefore, only its test data was recorded in this report.
3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

78 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2403	20	2423	40	2443	60	2463
1	2404	21	2424	41	2444	61	2464
2	2405	22	2425	42	2445	62	2465
3	2406	23	2426	43	2446	63	2466
4	2407	24	2427	44	2447	64	2467
5	2408	25	2428	45	2448	65	2468
6	2409	26	2429	46	2449	66	2469
7	2410	27	2430	47	2450	67	2470
8	2411	28	2431	48	2451	68	2471
9	2412	29	2432	49	2452	69	2472
10	2413	30	2433	50	2453	70	2473
11	2414	31	2434	51	2454	71	2474
12	2415	32	2435	52	2455	72	2475
13	2416	33	2436	53	2456	73	2476
14	2417	34	2437	54	2457	74	2477
15	2418	35	2438	55	2458	75	2478
16	2419	36	2439	56	2459	76	2479
17	2420	37	2440	57	2460	77	2480
18	2421	38	2441	58	2461		
19	2422	39	2442	59	2462		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A	√	-	-	√	Operating Mode(EUT + Battery)
B	-	√	√	-	Charging Mode (EUT + Notebook)
C	-	-	√	-	Charging Mode (EUT + Adapter)

Where **RE \geq 1G:** Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	0 to 77	0, 38, 77	GFSK

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	0 to 77	0	GFSK

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	-	-	-
C	-	-	-

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	0 to 77	0, 38, 77	GFSK

Test Condition:

Applicable To	EUT Configure Mode	Environmental Conditions	Input Power	Tested By
RE≥1G	A	20deg. C, 70%RH	3.7Vdc	Dalen Dai
RE<1G	B	20deg. C, 70%RH	120Vac, 60Hz (System)	Dalen Dai
PLC	B	25deg. C, 75%RH	120Vac, 60Hz (System)	Pirar Hsieh
	C	25deg. C, 75%RH	120Vac, 60Hz (Adapter)	Pirar Hsieh
APCM	A	25deg. C, 76%RH	3.7Vdc	Pirar Hsieh

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook PC	Lenove	81LG	PF1NF9V2	NA	Provided by Lab
B.	Adapter	Apple	A1385	N/A	N/A	Provided by Lab

Note: All power cords of the above support units are non-shielded (1.8m).


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB type A to C cable	1	1.8	Y	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test


Radiated Emissions Test (Above 1GHz):

Mode A: Operating Mode




Conducted Emissions Test & Radiated Emissions Test (Below 1GHz):

Mode B: Charging Mode

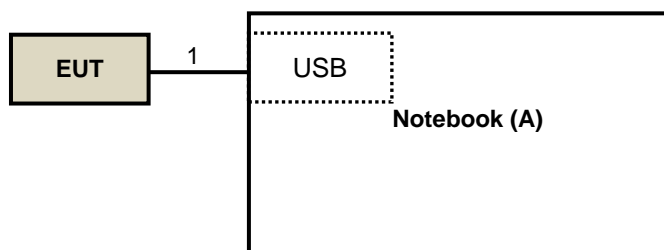

Conducted Emissions Test:

Mode C: Charging Mode

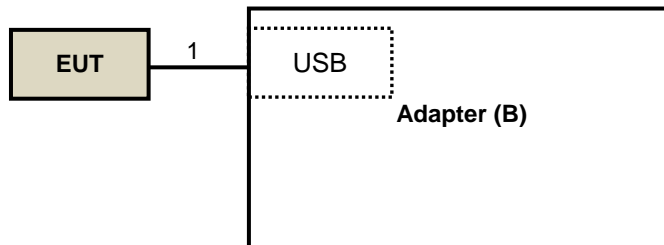

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.249)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 18, 2021	Feb. 17, 2022
HP Preamplifier	8449B	3008A01201	Feb. 19, 2021	Feb. 18, 2022
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 18, 2021	Feb. 17, 2022
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 12, 2021	Mar. 11, 2022
Schwarzbeck Antenna	VULB 9168	139	Nov. 6, 2020	Nov. 5, 2021
Schwarzbeck Antenna	VHBA 9123	480	Jun. 3, 2019	Jun. 2, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 22, 2020	Nov. 21, 2021
EMCO Horn Antenna	3115	00027024	Nov. 22, 2020	Nov.21, 2021
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 9, 2020	Jul. 8, 2021
EMEC RF cable With 3/4dB PAD	EM102-KMKM	01	Aug. 21, 2020	Aug. 20, 2021
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 16, 2020	Jun. 15, 2021
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 22, 2020	Jul. 21, 2021
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021
EMCO Horn Antenna	3115	00028257	Nov. 22, 2020	Nov. 21, 2021
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 8, 2020	Sep. 7, 2021
Anritsu Power Sensor	MA2411B	0738404	Apr. 13, 2020	Apr. 12, 2021
Anritsu Power Meter	ML2495A	0842014	Apr. 13, 2020	Apr. 12, 2021

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz. ((PK) RB=1MHz, VB=3MHz; (AV) 1M/3M detector RMS trace AV)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

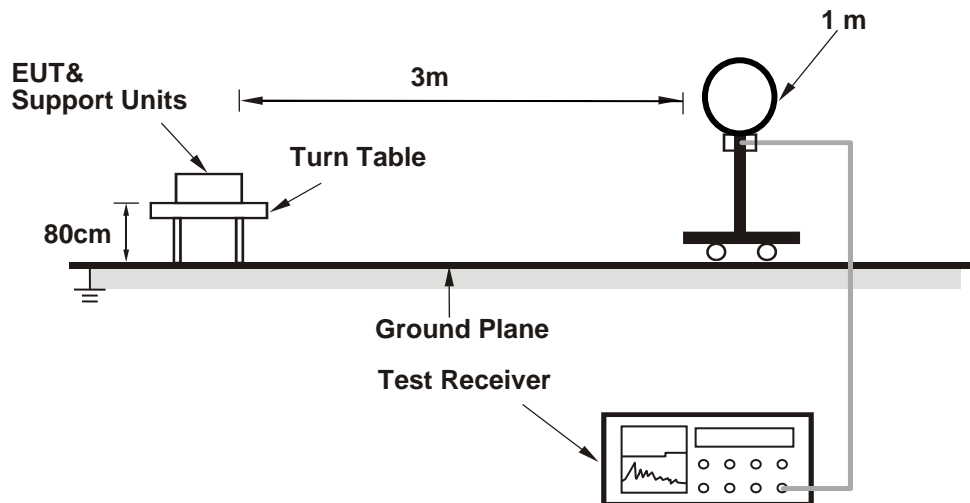

For Radiated emission 30MHz to 1GHz

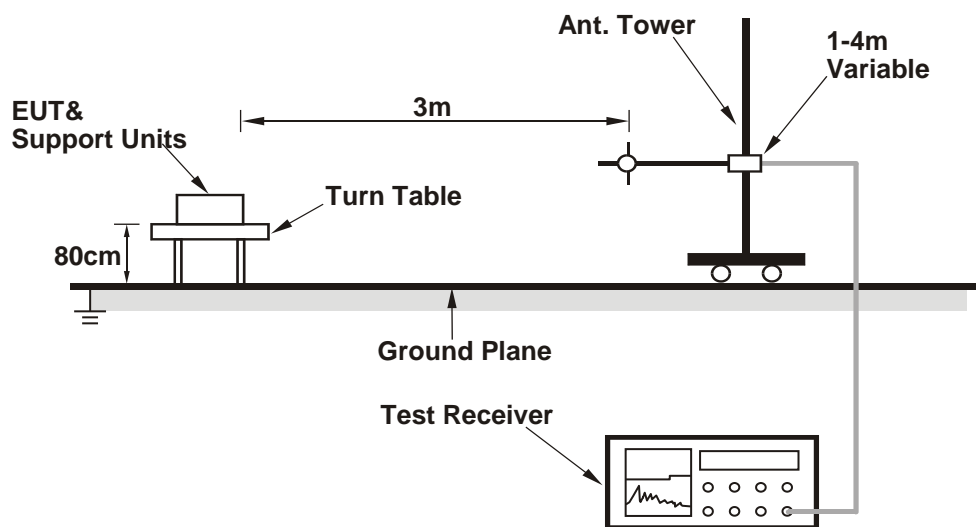

For Radiated emission above 1GHz

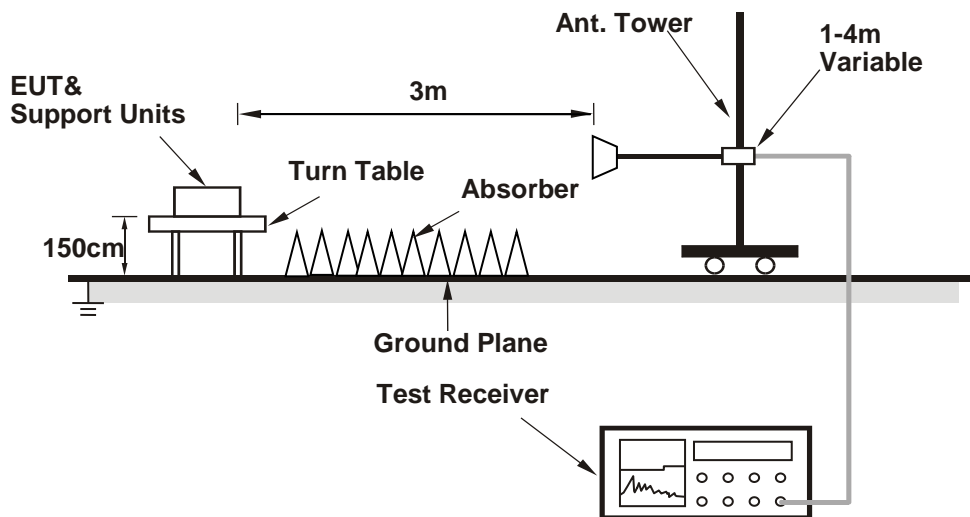

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Mode A

Set the EUT under transmission condition continuously at specific channel frequency continuously.

Mode B

- a. Connected the EUT to Notebook.
- b. Set the EUT under charging condition.

4.1.7 Test Results

Above 1GHz Data

RF Mode	TX GFSK	Channel	CH 0 : 2403 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	Mode A		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	46.81 PK	74.00	-27.19	1.19 H	62	45.85	0.96
2	2390.00	31.64 AV	54.00	-22.36	1.19 H	62	30.68	0.96
3	2400.00	58.45 PK	74.00	-15.55	1.19 H	62	57.43	1.02
4	2400.00	35.42 AV	54.00	-18.58	1.19 H	62	34.40	1.02
5	*2403.00	93.34 PK	114.00	-20.66	1.19 H	62	92.31	1.03
6	*2403.00	87.54 AV	94.00	-6.46	1.19 H	62	86.51	1.03
7	4806.00	51.04 PK	74.00	-22.96	1.34 H	148	42.06	8.98
8	4806.00	45.24 AV	54.00	-8.76	1.34 H	148	36.26	8.98

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	46.37 PK	74.00	-27.63	2.66 V	353	45.41	0.96
2	2390.00	31.35 AV	54.00	-22.65	2.66 V	353	30.39	0.96
3	2400.00	58.18 PK	74.00	-15.82	2.66 V	353	57.16	1.02
4	2400.00	35.23 AV	54.00	-18.77	2.66 V	353	34.21	1.02
5	*2403.00	90.75 PK	114.00	-23.25	2.66 V	353	89.72	1.03
6	*2403.00	84.95 AV	94.00	-9.05	2.66 V	353	83.92	1.03
7	4806.00	50.49 PK	74.00	-23.51	1.84 V	213	41.51	8.98
8	4806.00	44.69 AV	54.00	-9.31	1.84 V	213	35.71	8.98

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(0.116 \text{ ms} / 0.226 \text{ ms}) = -5.8 \text{ dB}$
 Please see page 19 for plotted duty.

RF Mode	TX GFSK	Channel	CH 38 : 2441 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	Mode A		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	92.86 PK	114.00	-21.14	1.23 H	58	91.70	1.16
2	*2441.00	87.06 AV	94.00	-6.94	1.23 H	58	85.90	1.16
3	4882.00	50.97 PK	74.00	-23.03	1.45 H	161	41.91	9.06
4	4882.00	45.17 AV	54.00	-8.83	1.45 H	161	36.11	9.06

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	89.19 PK	114.00	-24.81	2.78 V	346	88.03	1.16
2	*2441.00	83.39 AV	94.00	-10.61	2.78 V	346	82.23	1.16
3	4882.00	50.54 PK	74.00	-23.46	1.79 V	225	41.48	9.06
4	4882.00	44.74 AV	54.00	-9.26	1.79 V	225	35.68	9.06

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(0.116 \text{ ms} / 0.226 \text{ ms}) = -5.8 \text{ dB}$
Please see page 19 for plotted duty.

RF Mode	TX GFSK	Channel	CH 77 : 2480 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)
Test Mode	Mode A		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	93.54 PK	114.00	-20.46	1.64 H	65	92.13	1.41
2	*2480.00	87.74 AV	94.00	-6.26	1.64 H	65	86.33	1.41
3	2483.50	56.79 PK	74.00	-17.21	1.64 H	65	55.36	1.43
4	2483.50	34.28 AV	54.00	-19.72	1.64 H	65	32.85	1.43
5	4960.00	51.15 PK	74.00	-22.85	1.39 H	156	42.00	9.15
6	4960.00	45.35 AV	54.00	-8.65	1.39 H	156	36.20	9.15


Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	90.22 PK	114.00	-23.78	2.73 V	351	88.81	1.41
2	*2480.00	84.42 AV	94.00	-9.58	2.73 V	351	83.01	1.41
3	2483.50	55.58 PK	74.00	-18.42	2.73 V	351	54.15	1.43
4	2483.50	34.06 AV	54.00	-19.94	2.73 V	351	32.63	1.43
5	4960.00	50.59 PK	74.00	-23.41	1.77 V	227	41.44	9.15
6	4960.00	44.79 AV	54.00	-9.21	1.77 V	227	35.64	9.15

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(0.116 \text{ ms} / 0.226 \text{ ms}) = -5.8 \text{ dB}$
Please see page 19 for plotted duty.

Duty Cycle

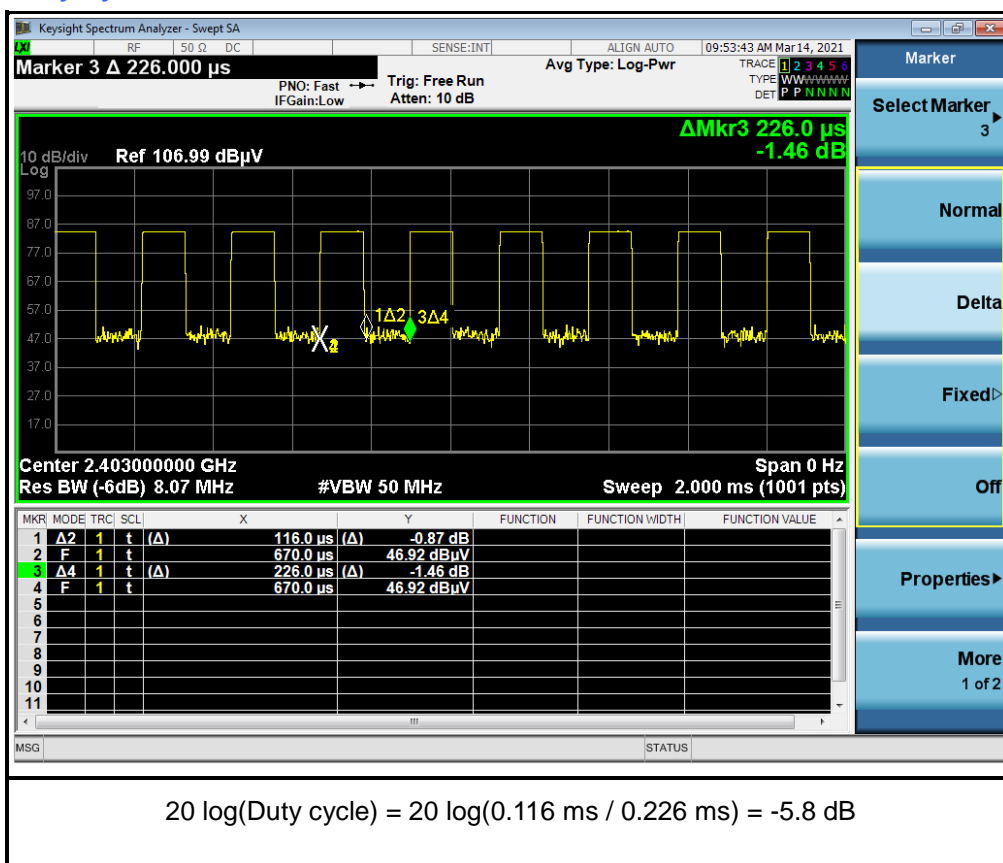


Below 1GHz Data:

RF Mode	TX GFSK	Channel	CH 0 : 2403 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	Mode B		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.54	20.56 QP	40.00	-19.44	1.82 H	192	28.00	-7.44
2	165.07	17.66 QP	43.50	-25.84	1.36 H	219	24.10	-6.44
3	343.65	20.00 QP	46.00	-26.00	1.93 H	320	23.34	-3.34
4	446.71	23.63 QP	46.00	-22.37	1.58 H	283	24.43	-0.80
5	540.27	26.02 QP	46.00	-19.98	2.17 H	192	25.28	0.74
6	669.08	27.40 QP	46.00	-18.60	1.18 H	320	23.95	3.45

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

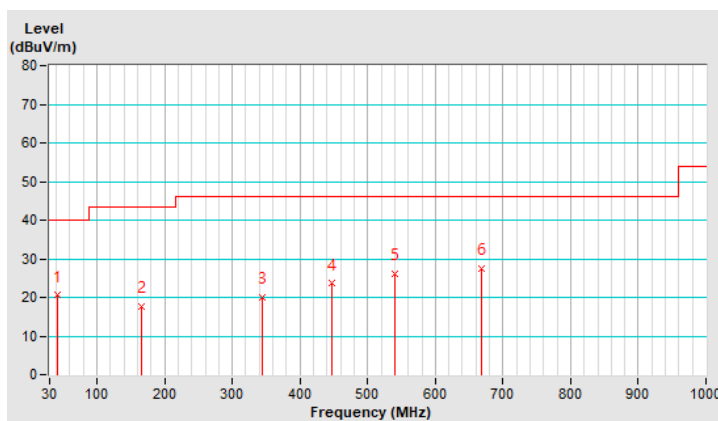


RF Mode	TX GFSK	Channel	CH 0 : 2403 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
Test Mode	Mode B		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.86	21.52 QP	40.00	-18.48	1.51 V	272	29.41	-7.89
2	157.80	17.45 QP	43.50	-26.05	1.34 V	84	23.78	-6.33
3	282.44	19.06 QP	46.00	-26.94	1.67 V	190	23.86	-4.80
4	395.69	22.00 QP	46.00	-24.00	1.79 V	86	24.20	-2.20
5	532.90	25.60 QP	46.00	-20.40	1.35 V	360	25.01	0.59
6	623.35	27.34 QP	46.00	-18.66	1.40 V	207	24.35	2.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

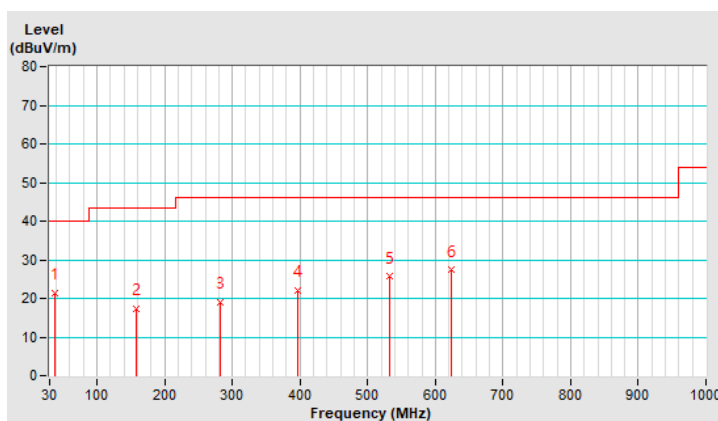

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESR3	102412	Jan. 29, 2021	Jan. 28, 2022
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ENV216	101197	Jun. 10, 2020	Jun. 9, 2021
LISN With Adapter (for EUT)	101197	NA	Jun. 10, 2020	Jun. 9, 2021
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Dec. 2, 2020	Dec. 1, 2021
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 14, 2020	May 13, 2021
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Apr. 10, 2020	Apr. 9, 2021
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C10.01	Feb. 10, 2021	Feb. 9, 2022
LYNICS Terminator (For ROHDE & SCHWARZ LISN)	0900510	E1-011484	May 26, 2020	May 25, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 10. (Conduction 10)

3. The VCCI Site Registration No. C-11852.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation From Test Standard

No deviation.

4.2.5 Test Setup

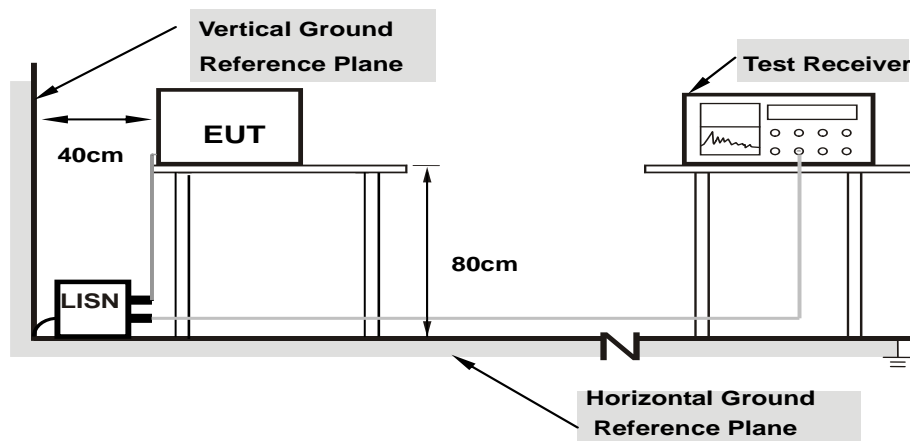

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

- Connected the EUT to Adapter or Notebook.
- Set the EUT under charging condition.

4.2.7 Test Results


Mode B

Frequency Range	150kHz ~ 30MHz	Detector Function	Quasi-Peak (QP) / Average (AV)
-----------------	----------------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	9.82	35.24	8.51	45.06	18.33	65.37	55.37	-20.31	-37.04
2	0.36902	9.85	27.22	17.51	37.07	27.36	58.52	48.52	-21.45	-21.16
3	2.53763	10.09	21.69	15.31	31.78	25.40	56.00	46.00	-24.22	-20.60
4	7.76117	10.26	19.95	10.94	30.21	21.20	60.00	50.00	-29.79	-28.80
5	10.00217	10.32	13.07	6.31	23.39	16.63	60.00	50.00	-36.61	-33.37
6	22.00503	10.56	6.55	0.50	17.11	11.06	60.00	50.00	-42.89	-38.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

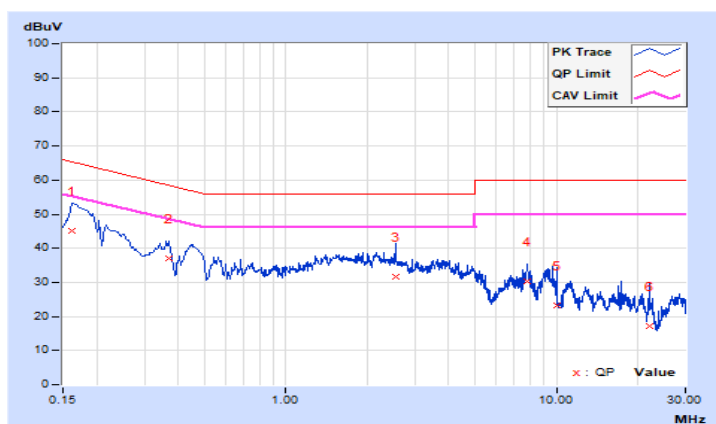


Frequency Range	150kHz ~ 30MHz	Detector Function	Quasi-Peak (QP) / Average (AV)
-----------------	----------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	9.82	38.92	20.37	48.74	30.19	65.18	55.18	-16.44	-24.99
2	0.40373	9.84	28.24	14.68	38.08	24.52	57.78	47.78	-19.70	-23.26
3	0.69164	9.89	21.25	11.17	31.14	21.06	56.00	46.00	-24.86	-24.94
4	3.85564	10.16	21.11	13.33	31.27	23.49	56.00	46.00	-24.73	-22.51
5	12.71249	10.38	19.29	14.32	29.67	24.70	60.00	50.00	-30.33	-25.30
6	19.22040	10.54	21.67	16.26	32.21	26.80	60.00	50.00	-27.79	-23.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

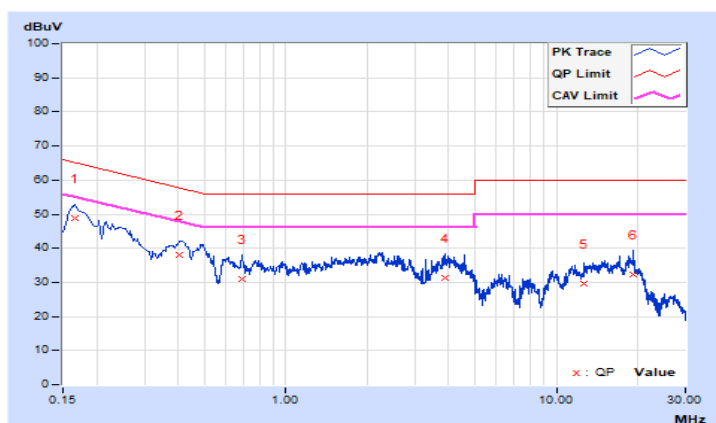


Mode C

Frequency Range	150kHz ~ 30MHz	Detector Function	Quasi-Peak (QP) / Average (AV)
-----------------	----------------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16096	9.82	22.86	5.13	32.68	14.95	65.41	55.41	-32.73	-40.46
2	0.24777	9.83	18.78	2.91	28.61	12.74	61.83	51.83	-33.22	-39.09
3	0.32991	9.85	14.03	0.30	23.88	10.15	59.45	49.45	-35.57	-39.30
4	0.80097	9.92	19.67	11.01	29.59	20.93	56.00	46.00	-26.41	-25.07
5	2.15435	10.07	9.11	4.01	19.18	14.08	56.00	46.00	-36.82	-31.92
6	26.70214	10.67	6.98	2.63	17.65	13.30	60.00	50.00	-42.35	-36.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

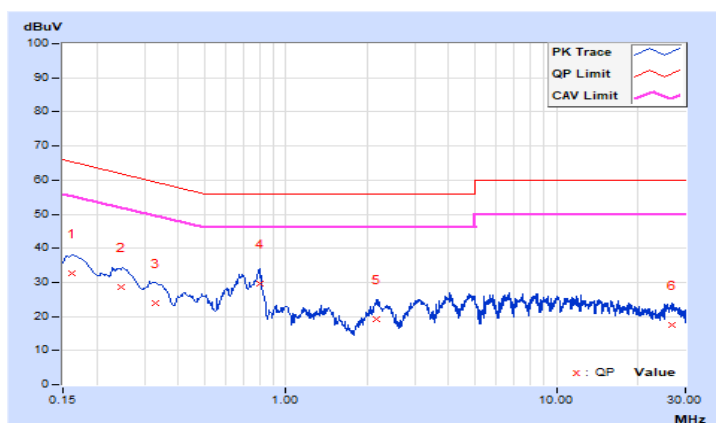


Frequency Range	150kHz ~ 30MHz	Detector Function	Quasi-Peak (QP) / Average (AV)
-----------------	----------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	9.82	23.09	8.07	32.91	17.89	65.18	55.18	-32.27	-37.29
2	0.24777	9.82	18.59	4.53	28.41	14.35	61.83	51.83	-33.42	-37.48
3	0.79724	9.91	20.45	12.32	30.36	22.23	56.00	46.00	-25.64	-23.77
4	1.45428	10.00	7.80	1.59	17.80	11.59	56.00	46.00	-38.20	-34.41
5	4.79037	10.19	9.68	4.13	19.87	14.32	56.00	46.00	-36.13	-31.68
6	19.36901	10.54	3.85	0.69	14.39	11.23	60.00	50.00	-45.61	-38.77


Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

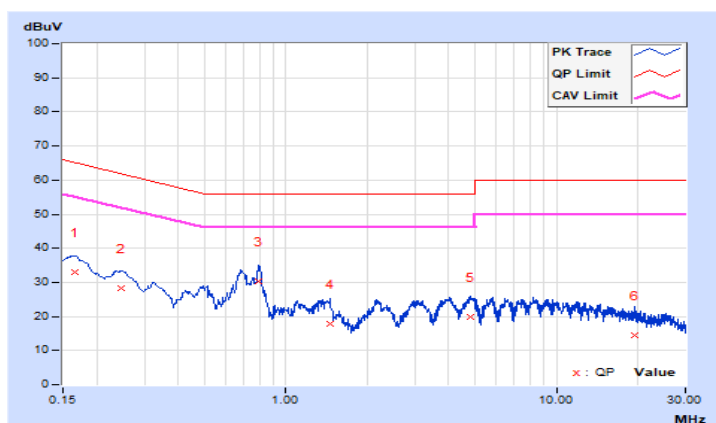

4.3 Channel Bandwidth

4.3.1 Test Setup

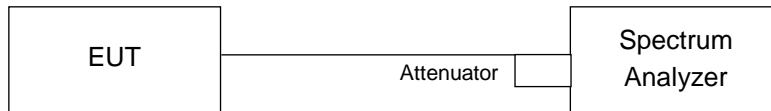

4.3.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.3 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.3.4 Deviation from Test Standard

No deviation.

4.3.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---