



Report No: FCC 1703025-01 File reference No: 2017-03-10

Applicant: FORM ELECTRONICS CO. LTD.

Product: BT Speaker/Device Charger

Model No: SSX17P113, FM0161

Trademark: 5120-211.

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: March 10, 2017

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1703025-01 Page 2 of 80

Date: 2017-03-10



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

Page 3 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	20dB Bandwidth	22
8.0	Maximum Output Power	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel.	41
11.0	Time of Occupancy (Dwell Time)	45
12.0	Out of Band Measurement	58
13.0	Antenna Requirement	71
14.0	IC Label	72
15.0	Photo of Test Setup and EUT View.	73

Report No.: FCC1703025-01 Page 4 of 80

Date: 2017-03-10



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 8999988 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: FORM ELECTRONICS CO. LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'an Dist, Shenzhen

Telephone: (0755)84196007

Fax: --

1.3 Description of EUT

Product: BT Speaker/Device Charger

Manufacturer: FORM ELECTRONICS CO. LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'an Dist, Shenzhen

Brand Name:

Snap-on.

Model Number: SSX17P113
Additional Model Number: FM0161

Type of Modulation GFSK, Л/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB Antenna and the maximum Gain of this antenna is 0dBi;

1.4 Submitted Sample: 1Samples

Report No.: FCC1703025-01 Page 5 of 80

Date: 2017-03-10



1.5 Test Duration 2017-03-06 to 2017-03-09

Test Uncertainty Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-22	2017-08-21
TWO	R&S	F7112 75	100204	2016 00 22	2017 00 21
Line-V-NETW		EZH3-Z5	100294	2016-08-22	2017-08-21
TWO	R&S	EZH3-Z5	100253	2016-08-22	2017-08-21
Line-V-NETW		EZN3-Z3	100233	2010-08-22	2017-08-21
	R&S				
Ultra Broadband		HL562	100157	2016-08-23	2017-08-22
ANT					
	R&S	ESDV	100008	2016-08-22	2017-08-21
ESDV Test Receiver		Loby	100000	2010 00 22	2017 00 21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-22	2017-08-21
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-22	2017-08-23
3m OATS		1	N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-22	2017-08-21
Power sensor	Anritsu	MA2491A	32263	2016-08-22	2017-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-23	2017-08-21
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-23	2017-08-22
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-22	2017-08-21
DE C-1-1-	SCHWARZBEC			2016 00 22	2017 09 22
RF Cable	K			2016-08-23	2017-08-22
Pre-Amplifier	НР	8447D	2727A05017	2016-08-05	2017-08-04
Pre-Amplifier	EM	EM30265		2016-08-05	2017-08-04

Page 7 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 80


Report No.: FCC1703025-01

Date: 2017-03-10



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Test Voltage: 120V~60Hz Block diagram of Test setup

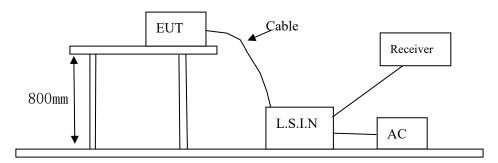

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1703025-01 Page 9 of 80

Date: 2017-03-10



A. EUT

Device	Manufacturer	Model	FCC
BT	FORM ELECTRONICS CO.	SSX17P113,	24 AL 7 CCV17D112
Speaker/Device Charger	LTD.	FM0161	2AAL7-SSX17P113

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power	DUNNS	JY05100	Input: 100-240V~, 50/60Hz, 0.2A;
Supply	Mobiles		Output: DC5V, 1A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107,15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1703025-01 Page 10 of 80

Date: 2017-03-10



Conducted Emission on Live Terminal (150kHz to 30MHz) A:

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

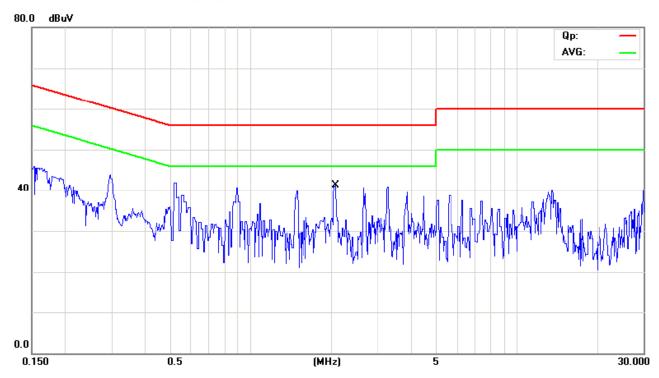

No. Mk	. Freq.	_	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	2.0768	14.50	10.88	25.38	56.00	-30.62	QP	
2	2.0768	3.00	10.88	13.88	46.00	-32.12	AVG	

Report No.: FCC1703025-01 Page 11 of 80

Date: 2017-03-10



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

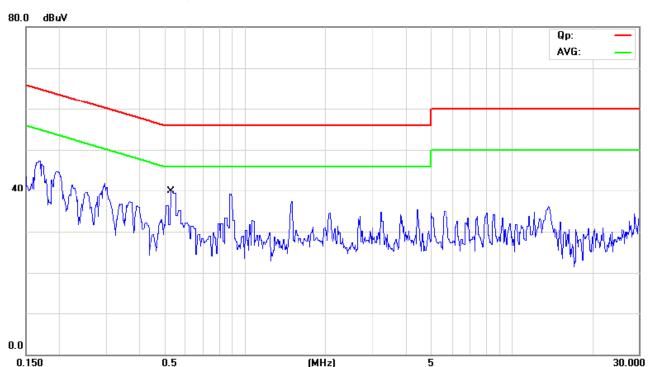

No. Mk.	Freq.	_	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.5278	27.50	10.31	37.81	56.00	-18.19	QP	
2	0.5278	16.60	10.31	26.91	46.00	-19.09	AVG	

Report No.: FCC1703025-01 Page 12 of 80


Date: 2017-03-10



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 8999988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

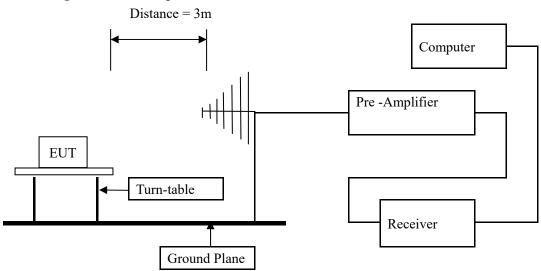

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1703025-01 Page 13 of 80

Date: 2017-03-10



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

		U 1
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. GFSK was the worse case because it has highest output power

Report No.: FCC1703025-01

Date: 2017-03-10



Page 14 of 80

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
943.760	40.86	Н	46.00
147.360	30.38	V	43.50

Page 15 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



Test Figure:

Н MARKER 1 RBW 120 kHz Marker 1 [T1] 40.86 dBμV/m 943.76 MHz 50 µs MТ Att 10 dB 943.760000000 MHz PREAMP ON dΒμV 100 MHz 1 PK MAXH -60 TDF 6DB Martheletter 30 MHz 1 GHz


Report No.: FCC1703025-01 Page 16 of 80

Date: 2017-03-10



Test Figure:

V

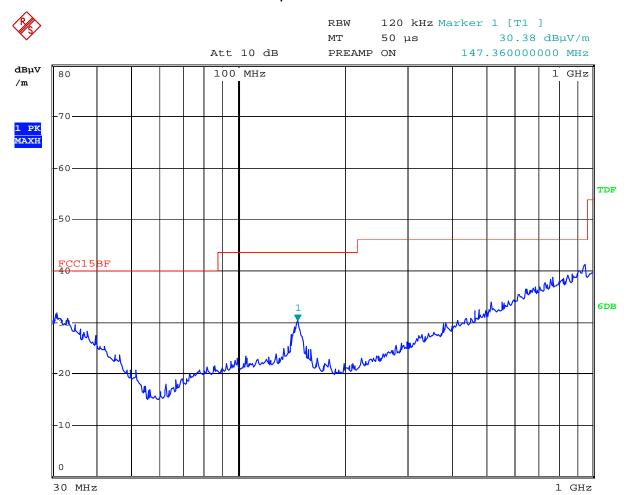

Report No.: FCC1703025-01 Page 17 of 80

Date: 2017-03-10



Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \text{V/m} \)
4804	ı	Н	74(Peak)/ 54(AV)
4804	1	V	74(Peak)/ 54(AV)
7206	1	H/V	74(Peak)/ 54(AV)
9608	1	H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814	1	H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618	1	H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882	-	Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1703025-01 Page 18 of 80

Date: 2017-03-10



Operation Mode: Transmitting under High Channel (2480MHz)

	8 8	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured


Report No.: FCC1703025-01

Date: 2017-03-10




Please refer to the following test plots for details:

Low Channel: Horizontal

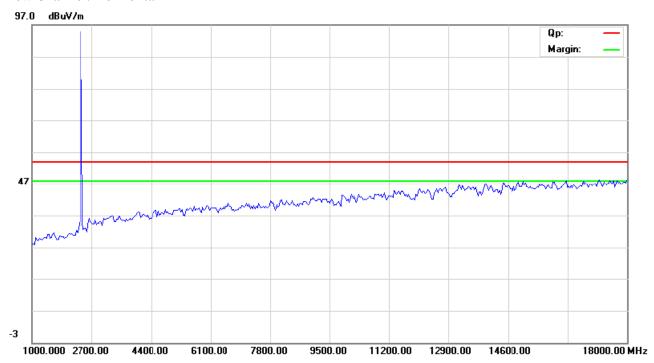

Low Channel: Vertical

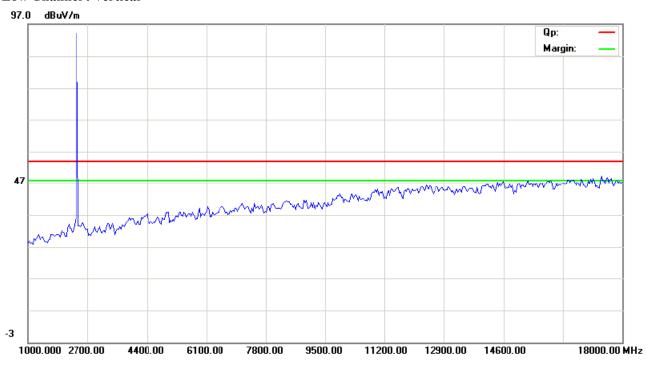

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 20 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Middle Channel: Horizontal

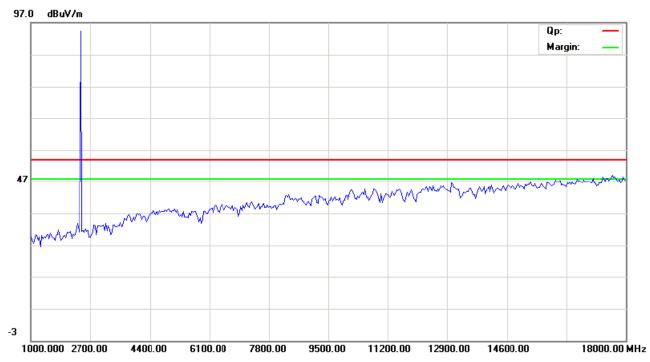

Middle Channel: Vertical

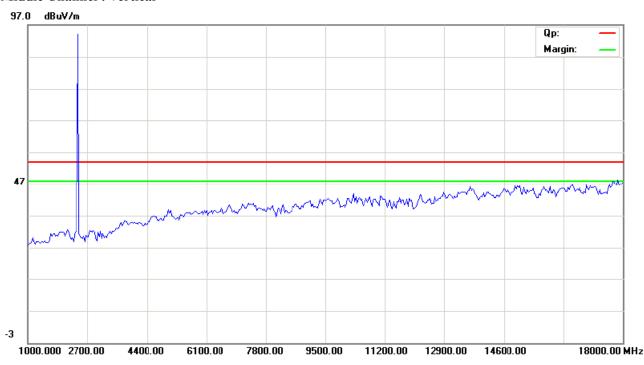

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 21 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



High Channel: Horizontal

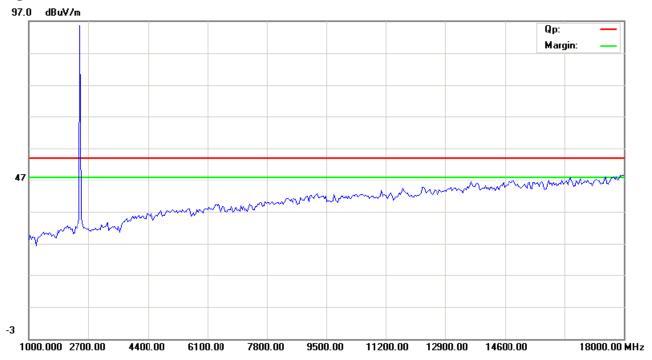

High Channel: Vertical

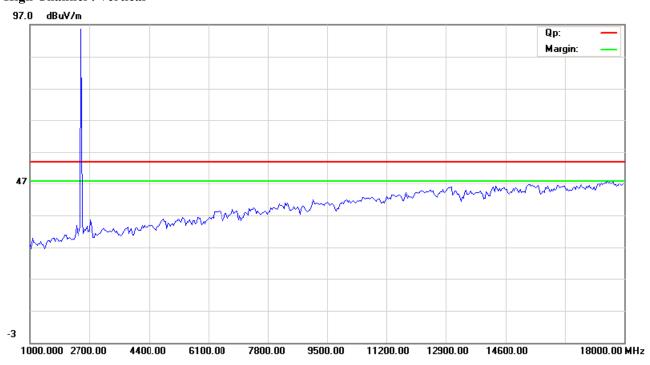

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1703025-01 Page 22 of 80

Date: 2017-03-10



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Modulation, G1811						
EUT	EUT BT Speaker/Device Charger		Model	SSX17P113		
Mode	Mode Keep Transmitting		Input Voltage	DC3.7V		
Temperat	ure	24 deg. C, Humidity		56% RH		
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail		
Low	2402	884		Pass		
Middle	2441	878		Pass		
High	2480	854		Pass		


Report No.: FCC1703025-01 Page 23 of 80

Date: 2017-03-10



Test Figure:

1. Condition: Low Channel

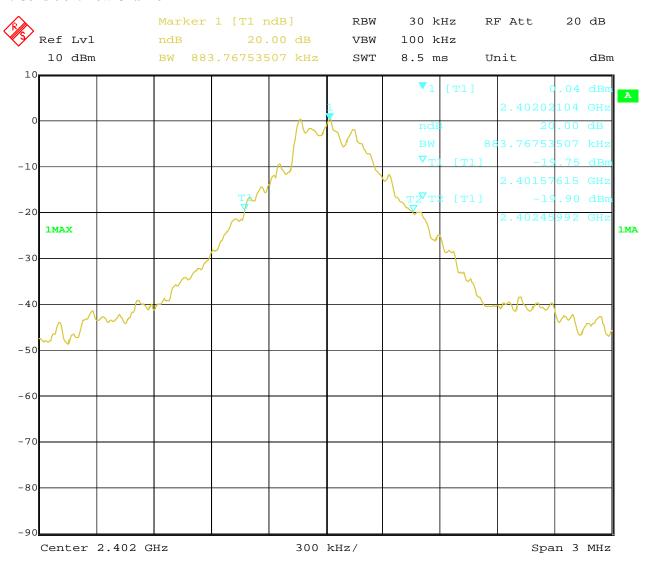


Report No.: FCC1703025-01 Page 24 of 80

Date: 2017-03-10



2. Condition: Middle Channel

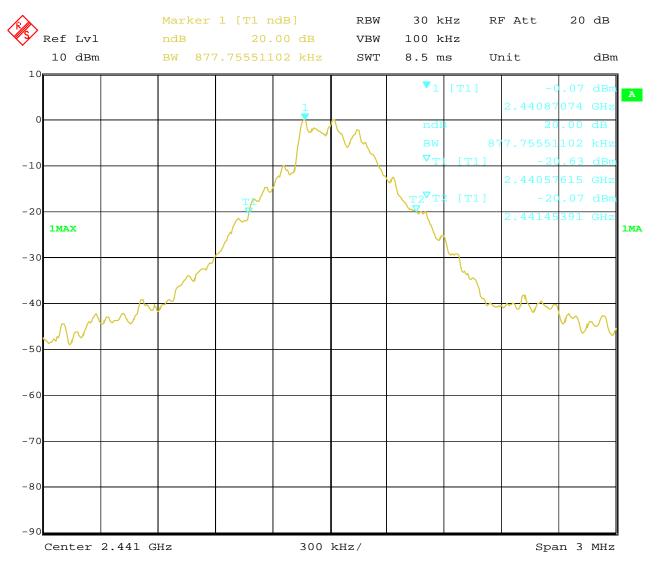


Page 25 of 80 Report No.: FCC1703025-01

Date: 2017-03-10



3. High Channel

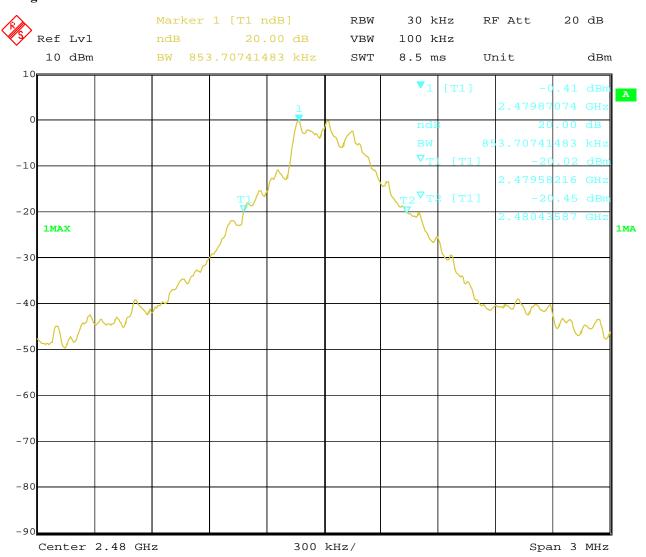

Page 26 of 80 Report No.: FCC1703025-01

Date: 2017-03-10



Test Result

Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT	BT Speake	BT Speaker/Device Charger		BT Speaker/Device Charger		SSX17P113
Mode	Keep Transmitting		Input Voltage	DC3.7V		
Temperat	Temperature 24 deg. C,		Humidity	56% RH		
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail		
Low	2402	1214		Pass		
Middle	2441	1214		Pass		
High	2480	1220		Pass		


Report No.: FCC1703025-01 Page 27 of 80

Date: 2017-03-10



Test Figure:

1. Condition: Low Channel

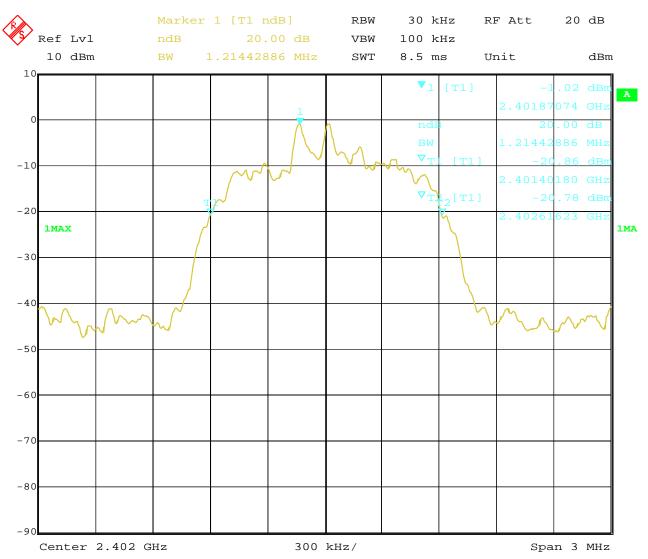


Report No.: FCC1703025-01 Page 28 of 80

Date: 2017-03-10



2. Condition: Middle Channel

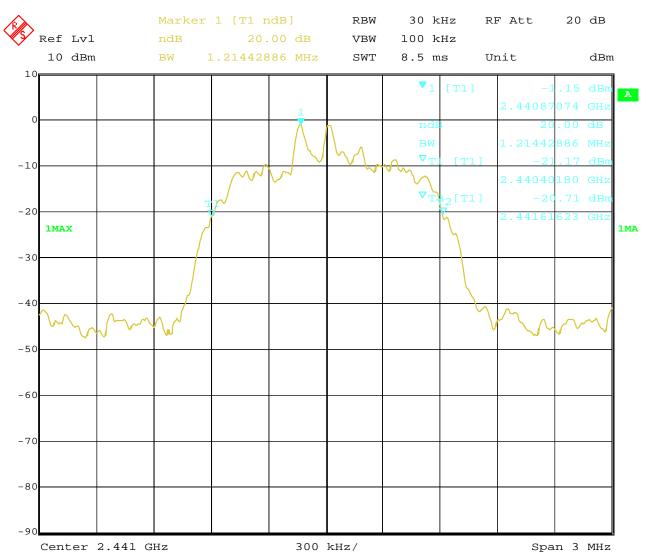


Report No.: FCC1703025-01 Page 29 of 80

Date: 2017-03-10



3. High Channel

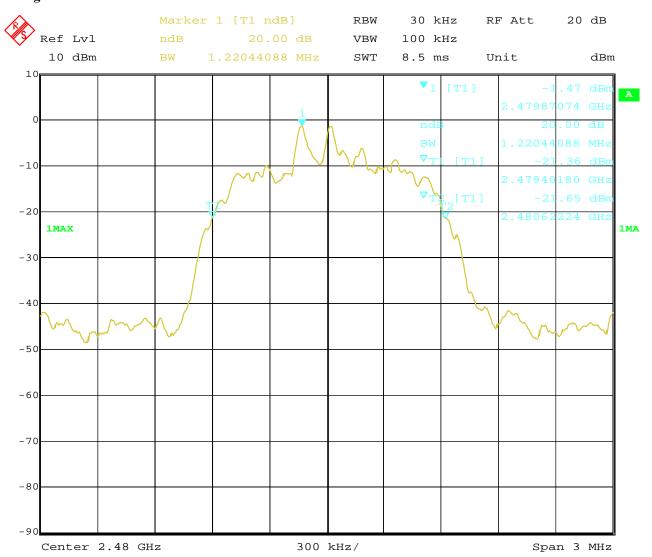

Page 30 of 80 Report No.: FCC1703025-01

Date: 2017-03-10



Test Result

Type of Modulation: 8DPSK

EUT	BT Speake	BT Speaker/Device Charger		BT Speaker/Device Charger Model		SSX17P113
Mode	Mode Keep Transmitting		Input Voltage	DC3.7V		
Temperate	perature 24 deg. C, l		Humidity	56% RH		
Channel	annel Channel Frequency (MHz) 20 dB Bandwidth (kHz)		Maximum Limit (kHz)	Pass/ Fail		
Low	2402	1220		Pass		
Middle	2441	1214		Pass		
High	2480	1214		Pass		


Report No.: FCC1703025-01 Page 31 of 80

Date: 2017-03-10



Test Figure:

1. Condition: Low Channel

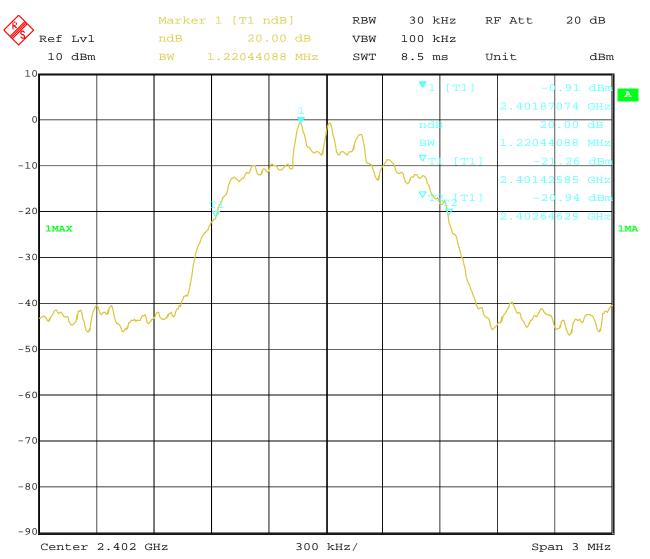


Report No.: FCC1703025-01 Page 32 of 80

Date: 2017-03-10



2. Condition: Middle Channel

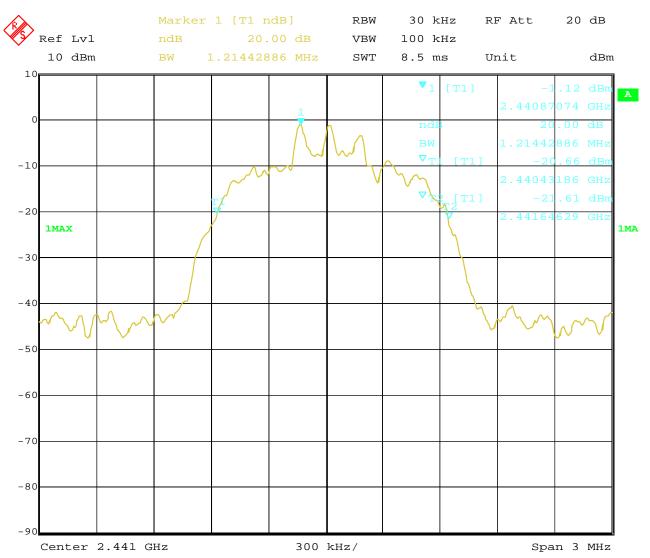


Page 33 of 80 Report No.: FCC1703025-01

Date: 2017-03-10



3. High Channel

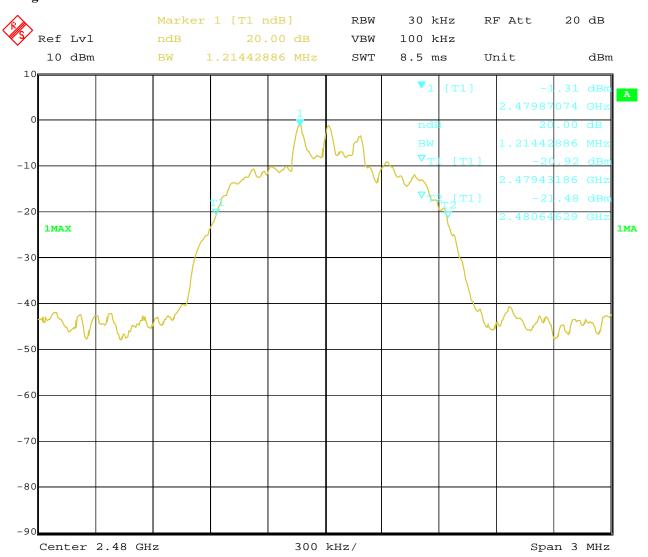

Report No.: FCC1703025-01

Date: 2017-03-10



Page 34 of 80

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = 10MHz
- RBW=3MHz; Sweep = auto; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1703025-01 Page 35 of 80

Date: 2017-03-10



8.4Test Results

Type of Modulation: GFSK

EUT	BT Speaker/Device Charger Mode		Model		SSX17P113
Mode	e Keep Transmitting Input		Input Voltage		DC3.7V
Temperature	е	24 deg. C, Humidity 56%		56% RH	
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
		Peak		(dBm)	
Low	2402	2.56		30	Pass
Middle	2441	2.33		30	Pass
High	2480	2.78		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Type of Modulation: Л/4DQPSK

EUT	EUT BT Speaker/Device Charger Mod		el	SSX17P113								
Mode		Keep Transmitting Input Voltage		Input Voltage		Input Voltage		Input Voltage		eep Transmitting Input Voltage		DC3.7V
Temperature	e		24 deg. C,	Humidity		56% RH						
Channel	Channel Frequency (MHz) Max. Power Output (dBm) Peak		Max. Power Output (dBm)	Peak Power	Pass/ Fail						
				Limit (dBm)								
Low		2402	1.51		30	Pass						
Middle		2441	1.51		30	Pass						
High		2480	2.06		30	Pass						

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1703025-01

Date: 2017-03-10



Page 36 of 80

Type of Modulation: 8DPSK

EUT	T BT Speaker/Device Charger		Model		SSX17P113
Mode	Iode Keep Transmitting Input		Input Voltage		DC3.7V
Temperature	e	24 deg. C,	Humidity		56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm Peak)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	1.68		30	Pass
Middle	2441	1.51		30	Pass
High	2480	1.25		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Report No.: FCC1703025-01

Date: 2017-03-10



Page 37 of 80

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 80

Report No.: FCC1703025-01

Date: 2017-03-10




9.4Test Result

Type of Modulation: GFSK

EUT	BT Speaker/Device Charger		Model	S	SX17P113
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

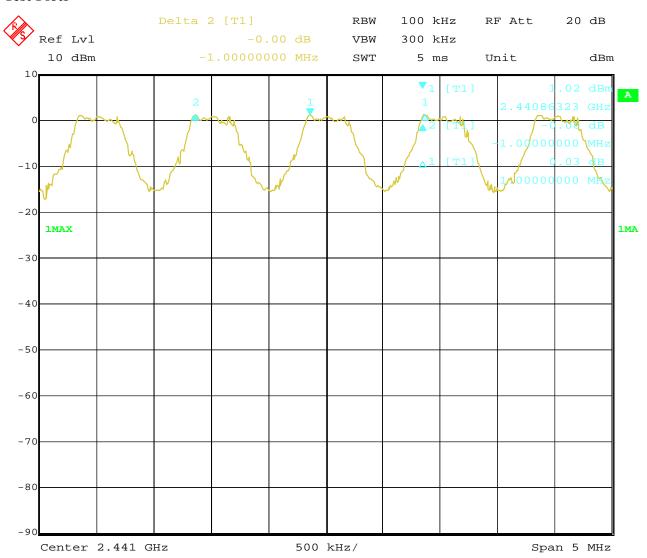

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1703025-01 Page 39 of 80


Date: 2017-03-10



Type of Modulation: Л/4DQPSK

EUT	BT Speaker/Device Charger		Model	S	SX17P113
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth		Pass	

Test Plots

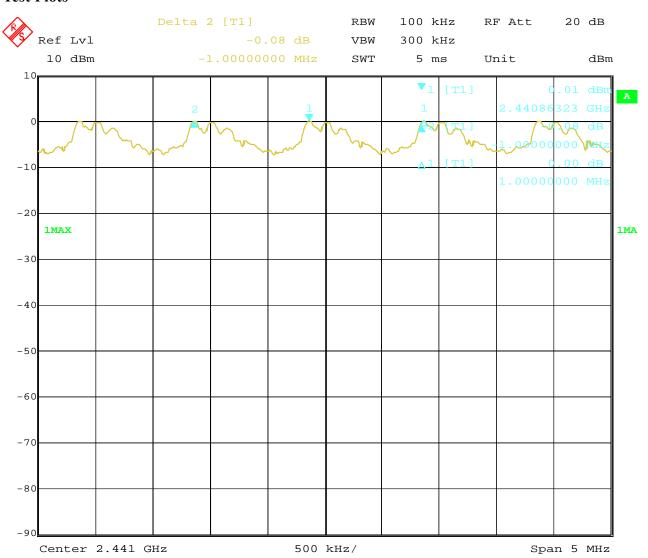

Report No.: FCC1703025-01 Page 40 of 80


Date: 2017-03-10



Type of Modulation: 8DPSK

EUT	BT Speaker/Device Charger		Model	S	SX17P113
Mode	Hopping O	Hopping On			DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation	Limit			Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

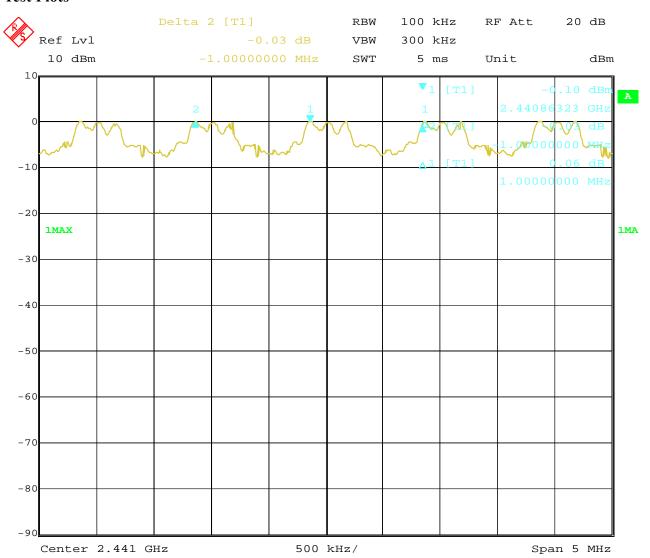

Report No.: FCC1703025-01

Date: 2017-03-10



Page 41 of 80

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 42 of 80

Report No.: FCC1703025-01

Date: 2017-03-10




10.4Test Result

Type of Modulation: GFSK

EUT	BT Speaker/Device Charger		Model		SSX17P113
Mode		Hopping On In			DC3.7V
Temperature		24 deg. C,			56% RH
Operating Frequen	Operating Frequency Number of hopping channels		Limit	t Pass/ Fail	
2402-2480MHz 79			≥ 15	Pass	

Test Plot

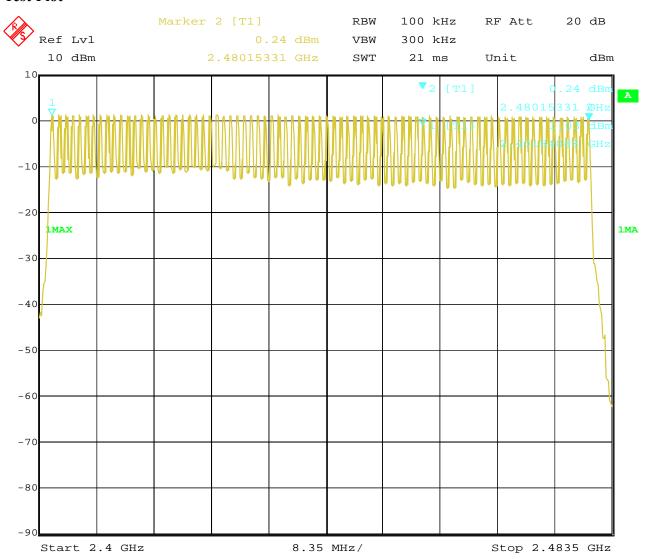

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1703025-01 Page 43 of 80


Date: 2017-03-10



Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	BT Speaker/Device Charger		M	Iodel		SSX17P113
Mode		Hopping On I		nput Voltage		DC3.7V
Temperature		24 deg. C,		Humidity		56% RH
Operating Frequen	ncy	Number of hopping channels		Limit		Pass/ Fail
2402-2480MHz 79 ≥ 15			Pass			

Test Plot

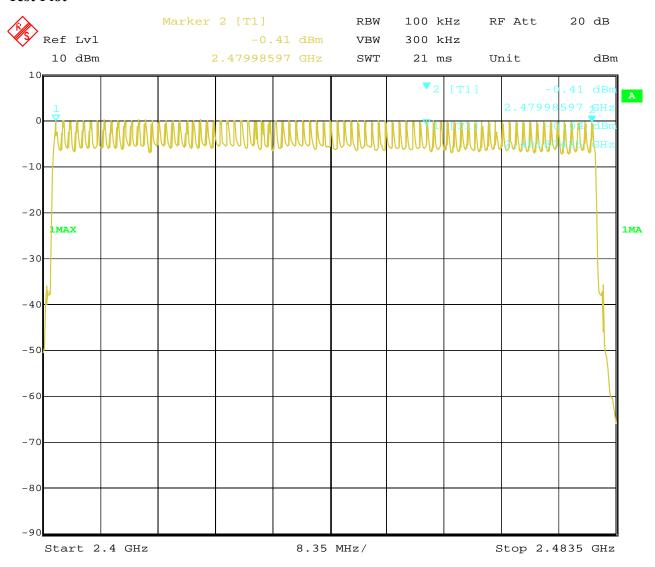

Report No.: FCC1703025-01 Page 44 of 80


Date: 2017-03-10



Type of Modulation: 8DPSK

EUT	BT Speaker/Device Charger		Model			SSX17P113
Mode		Hopping On		Input Voltage		DC3.7V
Temperature		24 deg. C,		Humidity		56% RH
Operating Frequen	ncy	Number of hopping chann	els	Limit Pass/		Pass/ Fail
2402-2480MHz 79		79		≥	15	Pass

Test Plot

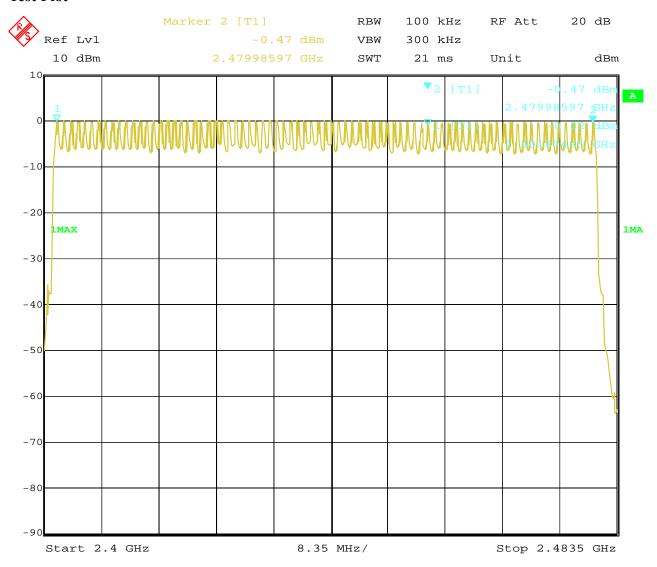

Report No.: FCC1703025-01

Date: 2017-03-10



Page 45 of 80

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1703025-01 Page 46 of 80

Date: 2017-03-10



11.4 Test Result

Type of Modulation: GFSK

EUT	BT Speaker/De	evice Charger	Model	SSX17P1	113			
Mode	Keep	Transmitting	Input Voltage	DC3.7	V			
Temperatu	re 24	deg. C, Humidity		4 deg. C, Humidity 56%		56% R	Н	
Channel	Reading	Hoping Rate		Actual	Limit			
	DH5							
High	2.97ms	266.667	266.667 hop/s		0.4s			
Middle	2.95ms	266.667 hop/s		0.315s	0.4s			
Low	2.97ms	266.667	hop/s	0.317s	0.4s			

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.


Page 47 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



Test Plots:

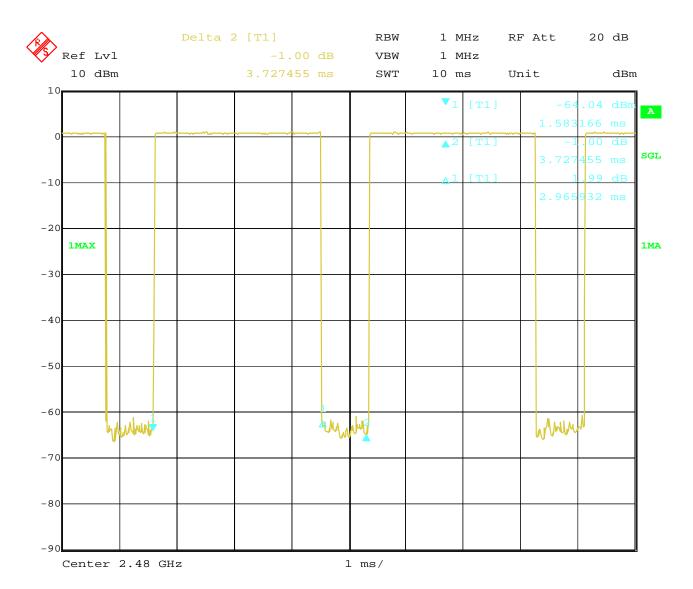


Page 48 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



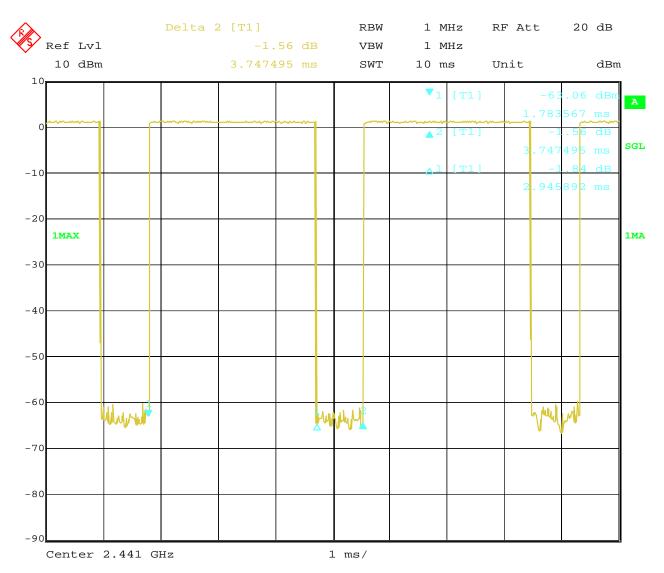


Page 49 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



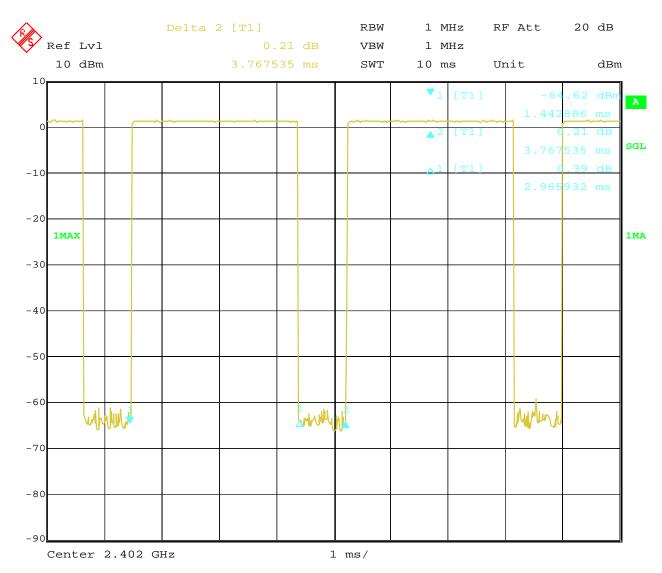

Report No.: FCC1703025-01 Page 50 of 80

Date: 2017-03-10



Test Result

Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	BT Speaker/D	evice Charger	Model	SSX17	P113
Mode	Keep	Transmitting	Input Voltage	DC3.	7V
Temperatu	re 24	deg. C, Humidity		Humidity 56% RI	
Channel	Reading	Hoping Rate		Actual	Limit
		DH5			
High	2.97ms	266.667 ho	266.667 hop/s		0.4s
Middle	2.95ms	266.667 hop/s		0.315s	0.4s
Low	2.99ms	266.667 ho	266.667 hop/s		0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.


Page 51 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



Test Plots:

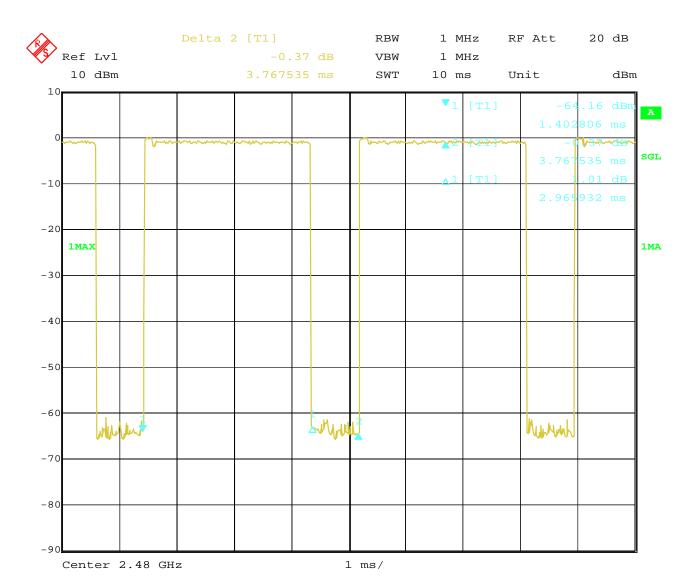


Page 52 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



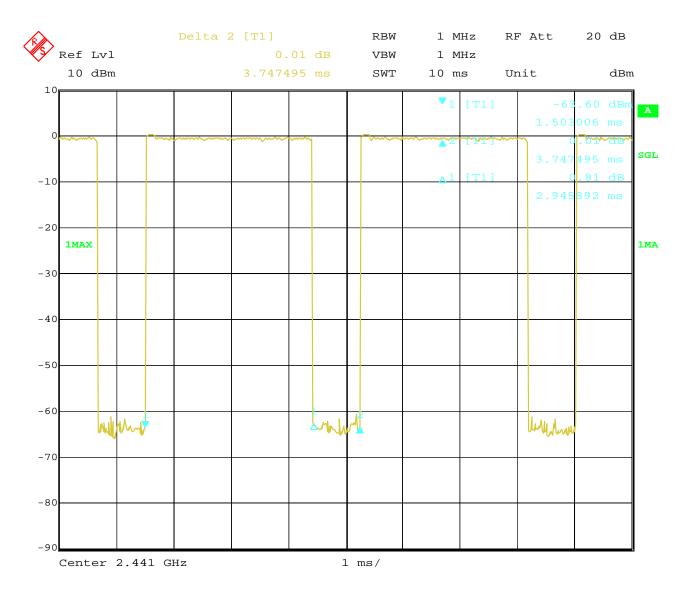


Page 53 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



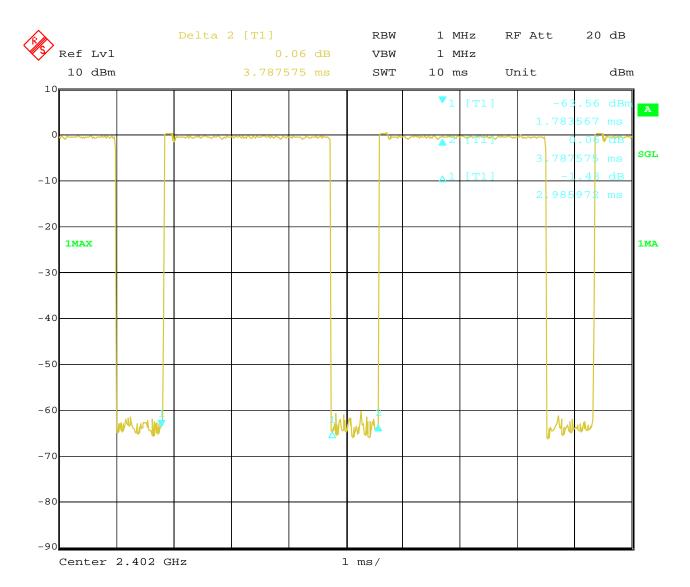

Report No.: FCC1703025-01 Page 54 of 80

Date: 2017-03-10



Type of Modulation: 8DPSK

EUT	BT Speaker/D	evice Charger	Model	SSX	17P113
Mode	Keep	Keep Transmitting		Input Voltage DC3.7	
Temperatur	re 24	deg. C,	deg. C, Humidity		% RH
Channel	Reading	Hoping Rate		Actual	Limit
		DH5			
High	2.99ms	266.667 ho	pp/s	0.319s	0.4s
Middle	2.97ms	266.667 hop/s		0.317s	0.4s
Low	2.97ms	266.667 ho	pp/s	0.317s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.


Page 55 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



Test Plots:

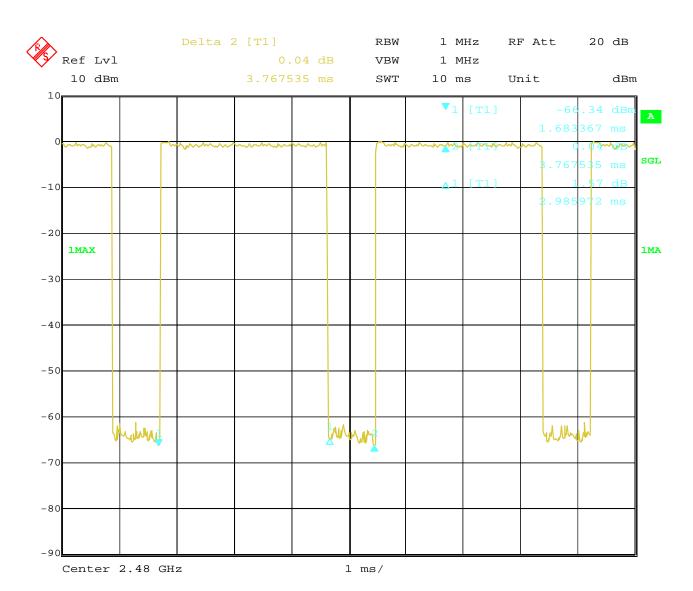


Page 56 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



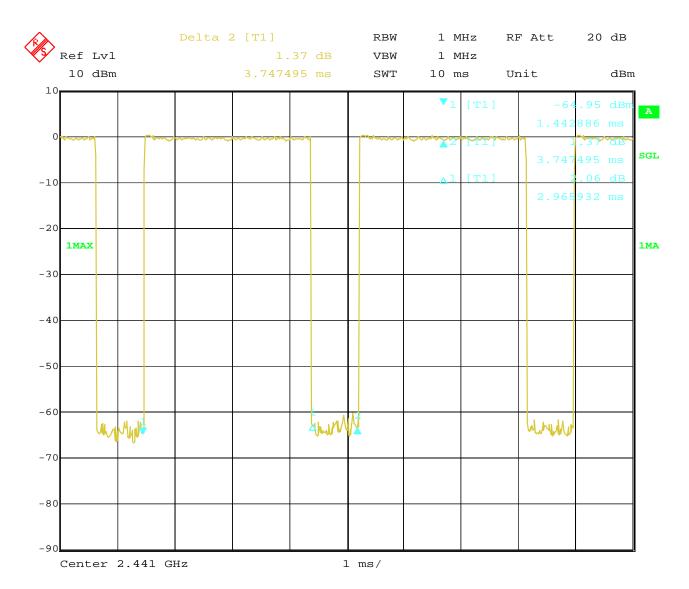


Page 57 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



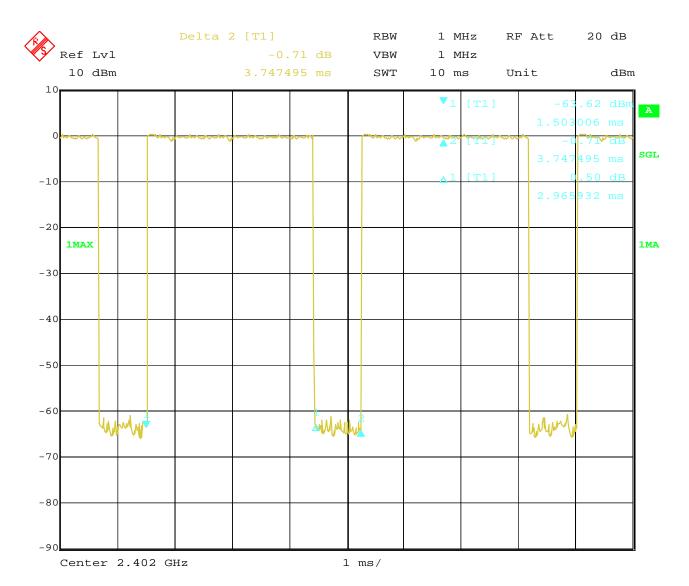

Report No.: FCC1703025-01


Date: 2017-03-10



Page 58 of 80

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 59 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: GFSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	47.7		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

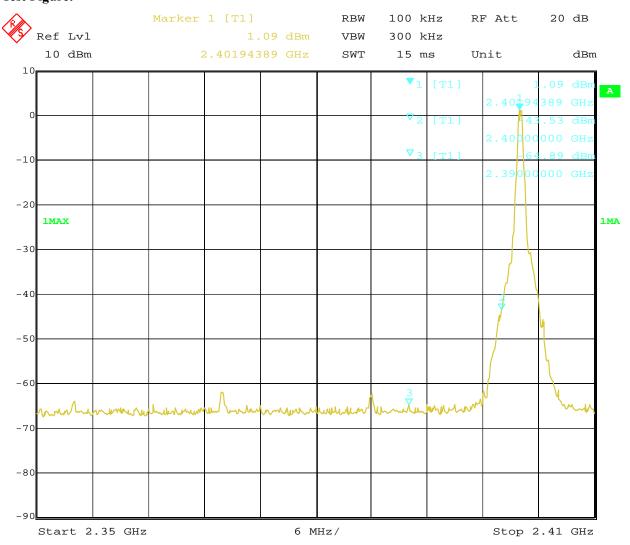

Page 60 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature		24 deg. C,		56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	45.3		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)	AV(dBμV/m)		54(dBμV/m)
2483.5MHz				

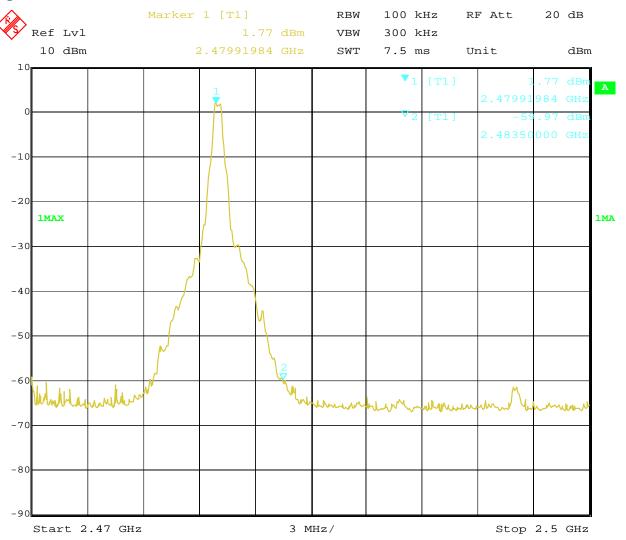

Page 61 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: GFSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Hopping mode
Mode		Hopping On		DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	44.5		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)	/(dBμV/m)		54(dBμV/m)
2390MHz				

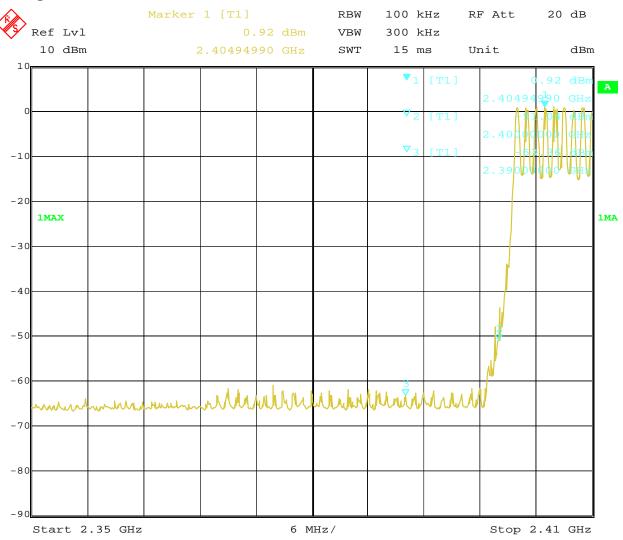

Page 62 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: GFSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.1			74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

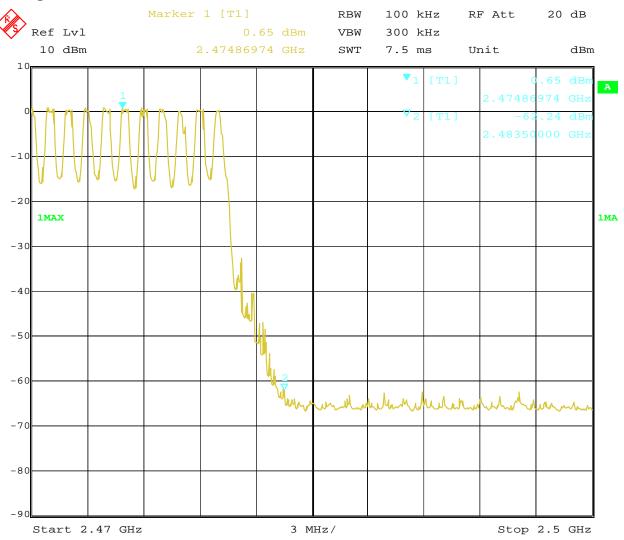

Page 63 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:	BT Speaker/Device Charger		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 46.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

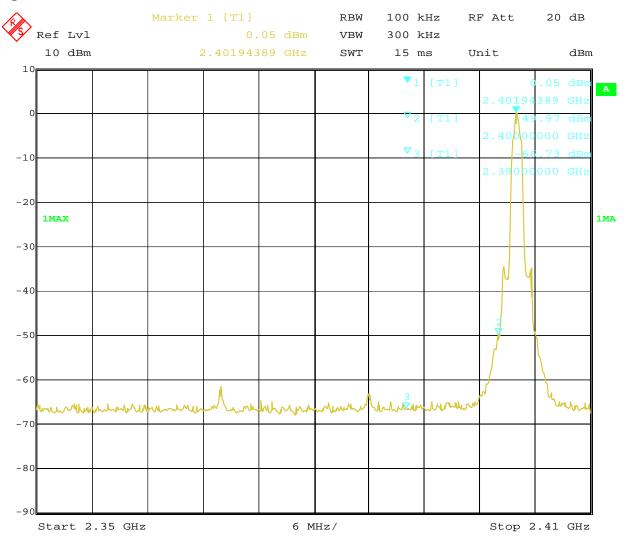

Page 64 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:	BT Speaker/Device Charger		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.2			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

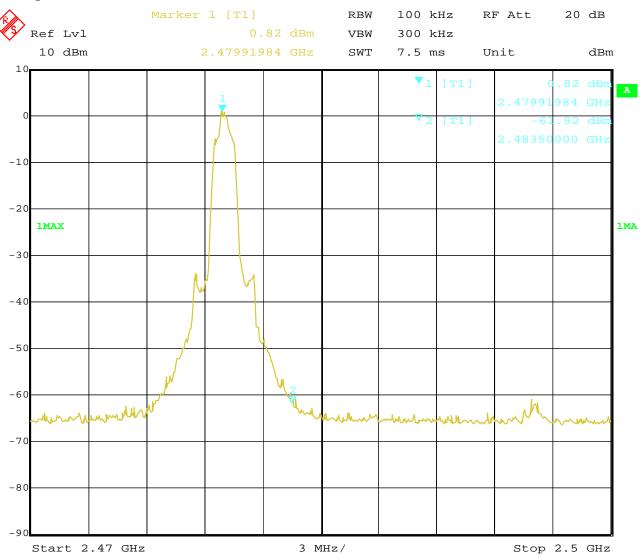

Page 65 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 45.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

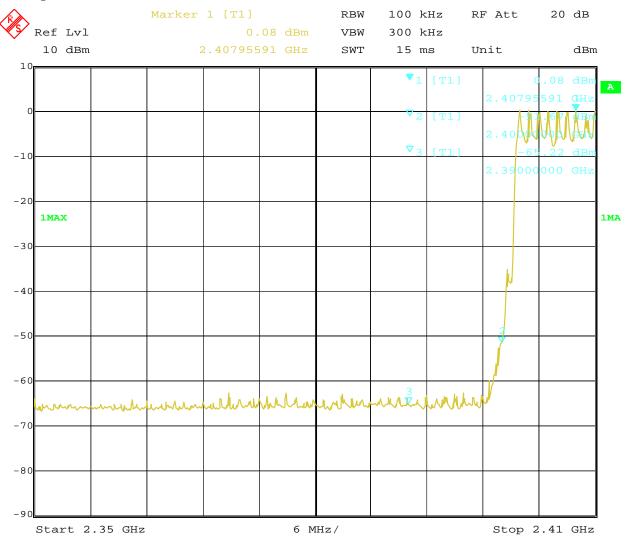

Page 66 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

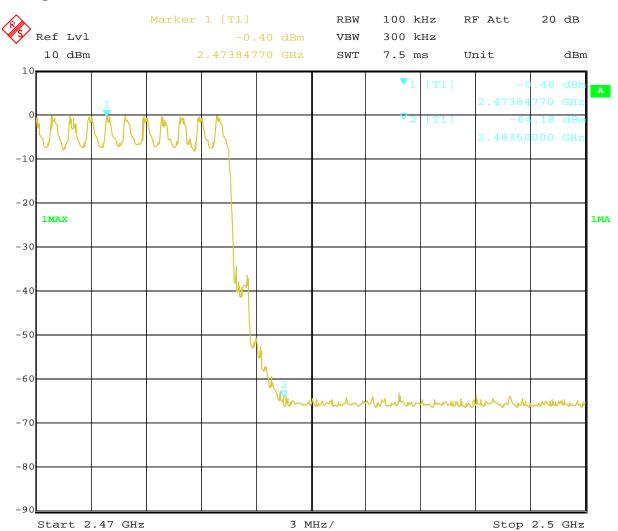

Page 67 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

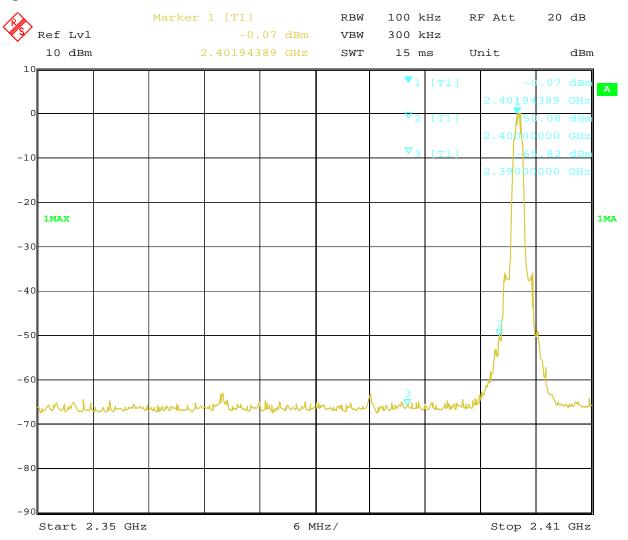

Page 68 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.2			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

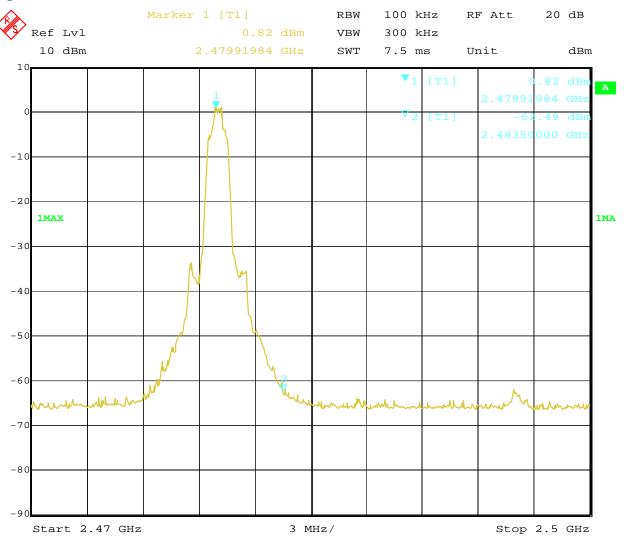

Page 69 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: 8DPSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

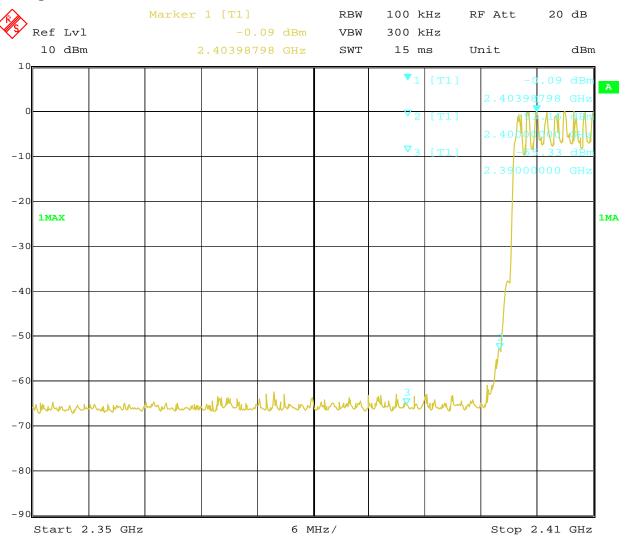

Page 70 of 80

Report No.: FCC1703025-01


Date: 2017-03-10



Type of Modulation: 8DPSK

Out of Band Test Result

Product:	BT Speaker/Device Charger		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 42.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

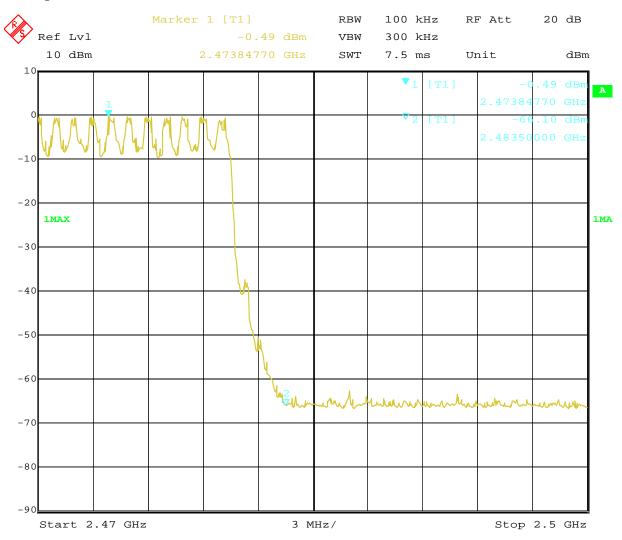

Report No.: FCC1703025-01

Date: 2017-03-10



Page 71 of 80

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The maximum Gain of the antennas is 0dBi.

Report No.: FCC1703025-01 Page 72 of 80

Date: 2017-03-10




14.0 FCC Label

FCC: 2AAL7-SSX17P113

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

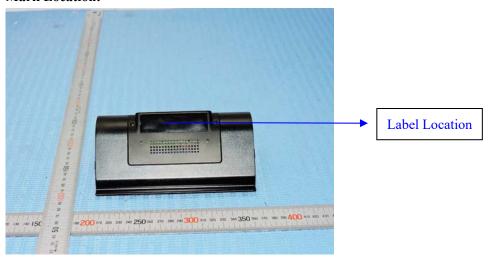


Report No.: FCC1703025-01 Page 73 of 80

Date: 2017-03-10



15.0 **Photo of testing**

Conducted Emission Test Setup:

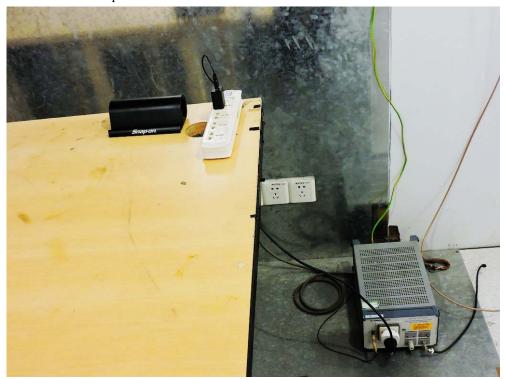


Report No.: FCC1703025-01

Date: 2017-03-10



Radiated Emission Test Setup:



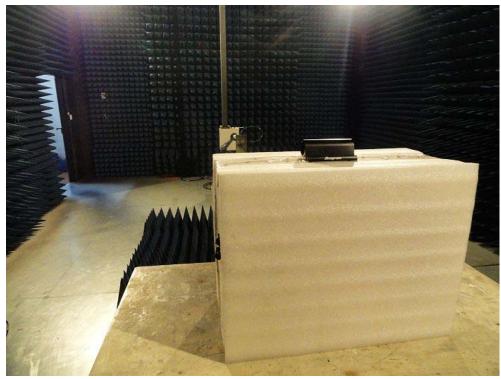

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: FCC1703025-01


Date: 2017-03-10



Photographs - EUT

Outside view

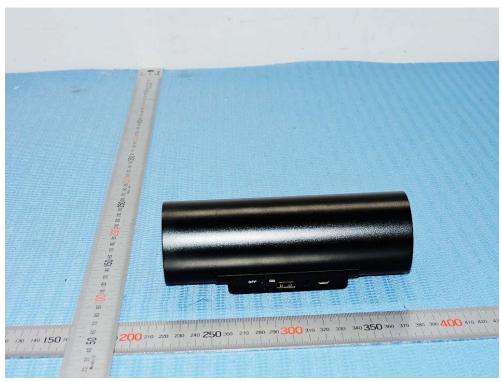

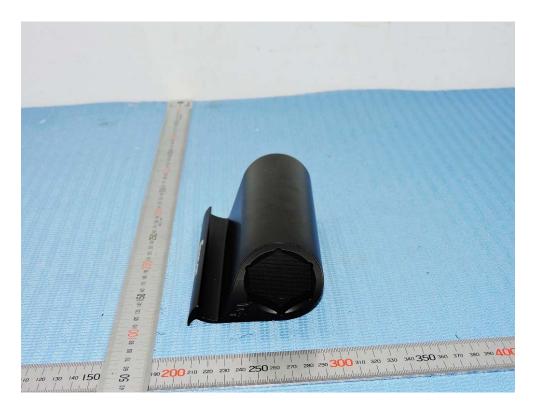

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 76 of 80


Report No.: FCC1703025-01

Date: 2017-03-10



Outside view



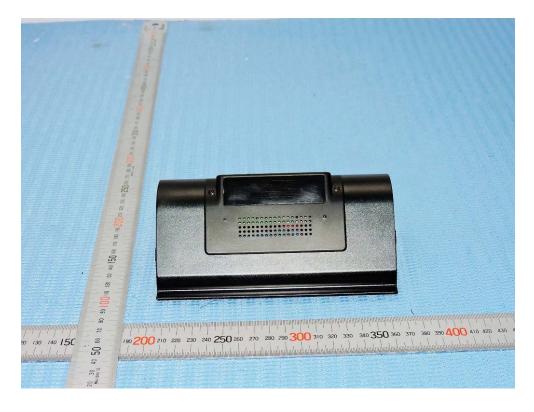

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 77 of 80


Report No.: FCC1703025-01

Date: 2017-03-10



Inside view



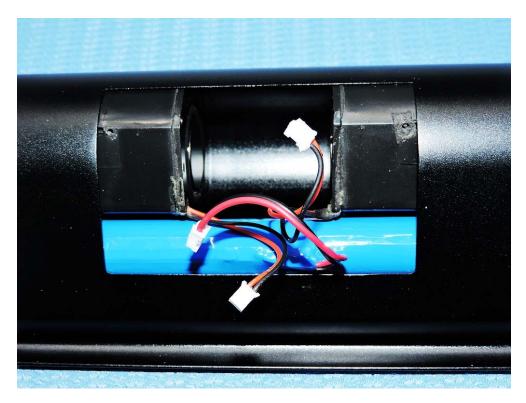

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 78 of 80

Report No.: FCC1703025-01

Date: 2017-03-10



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 79 of 80


Report No.: FCC1703025-01

Date: 2017-03-10



Inside view



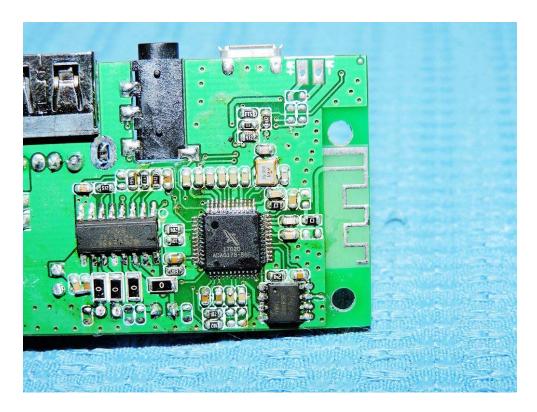

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1703025-01 Page 80 of 80

Date: 2017-03-10



Inside view

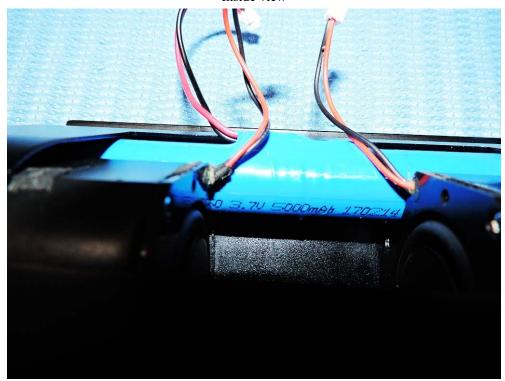

End of the report