

## CERTIFICATION OF COMPLIANCE

FCC ID

**2AALG-NWP-F100E**

APPLICANT

**NEOLAB CONVERGENCE**

<b>Equipment Class</b>	:	<b>Part 15 Spread Spectrum Transmitter (DSS)</b>
<b>Manufacturing Description</b>	:	<b>Bluetooth Pen</b>
<b>Manufacturer</b>	:	<b>NEOLAB CONVERGENCE</b>
<b>Model name</b>	:	<b>NWP-F100E</b>
<b>Test Device Serial No.:</b>	:	<b>Identical prototype</b>
<b>Rule Part(s)</b>	:	<b>FCC Part 15.247 Subpart C; ANSI C-63.4-2003</b>
<b>Frequency Range</b>	:	<b>2402 ~ 2480MHz (Bluetooth)</b>
<b>RF power</b>	:	<b>Max 2.45 dBm – Conducted (Bluetooth)</b>
<b>Data of issue</b>	:	<b>July 19, 2013</b>

This test report is issued under the authority of:



Jae-Ho Lee, Manager

The test was supervised by:



Young-Jin Lee, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

---

## TABLE OF CONTENTS

1. GENERAL INFORMATION'S .....	3
2. INFORMATION'S ABOUT TEST ITEM .....	4
3. TEST REPORT .....	5
3.1 SUMMARY OF TESTS .....	5
3.2 Frequency Hopping System Requirements .....	6
3.3 TECHNICAL CHARACTERISTICS TEST .....	8
3.3.1 CARRIER FREQUENCY SEPARATION .....	8
3.3.2 NUMBER OF HOPPING FREQUENCIES .....	10
3.3.3 20 dB BANDWIDTH .....	12
3.3.4 TIME OF OCCUPANCY (Dwell Time) .....	17
3.3.5 TRANSMITTER OUTPUT POWER .....	22
3.3.6 BAND – EDGE & SPURIOUS .....	26
3.3.7 FIELD STRENGTH OF HARMONICS .....	32
3.3.8 AC CONDUCTED EMISSIONS .....	37
<b>APPENDIX</b>	
APPENDIX TEST EQUIPMENT USED FOR TESTS .....	42

## 1. General information's

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2013-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	2015-03-06	EMC accredited Lab.
FCC	U.S.A	610755	2014-04-27	FCC filing
FCC	U.S.A	649054	Updating	FCC CAB
VCCI	JAPAN	R2133(10m), C2307	2014-06-21	VCCI registration
VCCI	JAPAN	T-2009	2013-12-23	VCCI registration
VCCI	JAPAN	G-563	2015-05-28	VCCI registration
IC	CANADA	5799A-1	2015-06-21	IC filing

## 2. Information's about test item

### 2-1 Client & Manufacturer

Company name : NEOLAB CONVERGENCE  
 Address : 4F Yyjung bldg., 1639-9 Seocho-dong, Seocho-gu, Seoul, Korea 137-070  
 Telephone / Facsimile : +82 70 4377 0740 / +82 2 3462 2983

### 2-2 Equipment Under Test (EUT)

Trade name : NEO.1  
 Model name : NWP-F100E  
 Serial number : Identical prototype  
 Date of receipt : June 17, 2013  
 EUT condition : Pre-production, not damaged  
 Antenna type : Chip antenna, Max Gain 1.99 dBi  
 Frequency Range : 2402 ~ 2480MHz  
 RF output power : Max. 1.76 dBm - Conducted  
 Number of channels : 79  
 Duty cycle : 79.81 %  
 Channel spacing : 1MHz  
 Channel Access Protocol : Frequency Hopping Spread Spectrum (FHSS)  
 Power Source : 3.7 Vdc from Internal Battery (Li-Ion Polymer Battery)  
 Firmware Version : V1.0.0

### 2-4 Tested frequency

Bluetooth	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

### 2-5 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		C
15.247(a)	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 250 mWatt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.109	Field Strength	-		C
15.207 / 15.107	AC Conducted Emissions	EN 55022	Line Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

#### Note 1: Antenna Requirement

→ The **NEOLAB CONVERGENCE FCC ID: 2AALG-NWP-F100E** unit complies with the requirement of §15.203.

The antenna type is Chip antenna.

**Note 2:** The sample was tested according to the following specification:  
FCC Parts 15.247; ANSI C-63.4-2003

#### Note3: TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “**Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems**” were used in the measurement of **NEOLAB CONVERGENCE FCC ID: 2AALG-NWP-F100E**

## 3.2 Frequency Hopping System Requirements

### 3.2.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 3.2.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

Longest sequence of zeros: 8 (non-inverted signal)

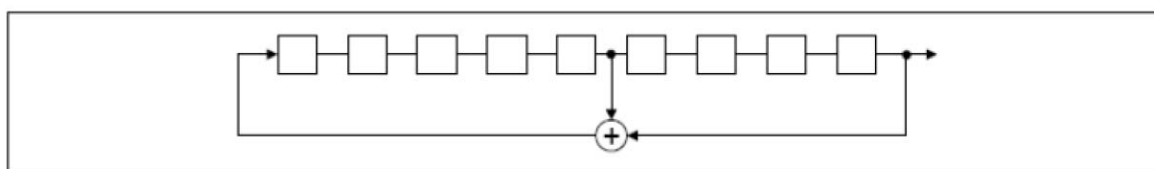

*Linear Feedback Shift Register for Generation of the PRBS sequence*

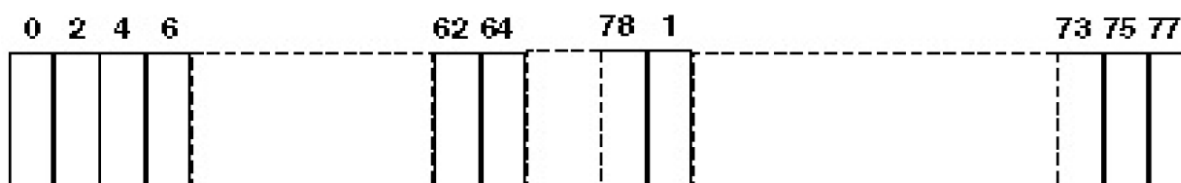

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 3.2.3 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

→example for a Bluetooth device using channel numbers would be: Chan 44, 35, 78, 03, 15, 21, 76, 40, 56, 13, 02, 19, 67, 39, 78, 20, 21, 64, 75, etc.

### 3.3 Transmitter requirements

#### 3.3.1 Carrier Frequency Separation

##### Procedure:

The test follows DA000705. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 2~ 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more)      Sweep = auto

VBW = 10 kHz      Detector function = peak

Trace = max hold

##### Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
0.9986	Complies

- See next pages for actual measured spectrum plots.

##### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

##### Measurement Setup


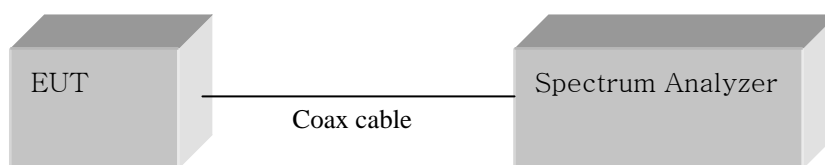


Figure 1: Measurement setup for the carrier frequency separation




## Carrier Frequency Separation

### Basic Mode

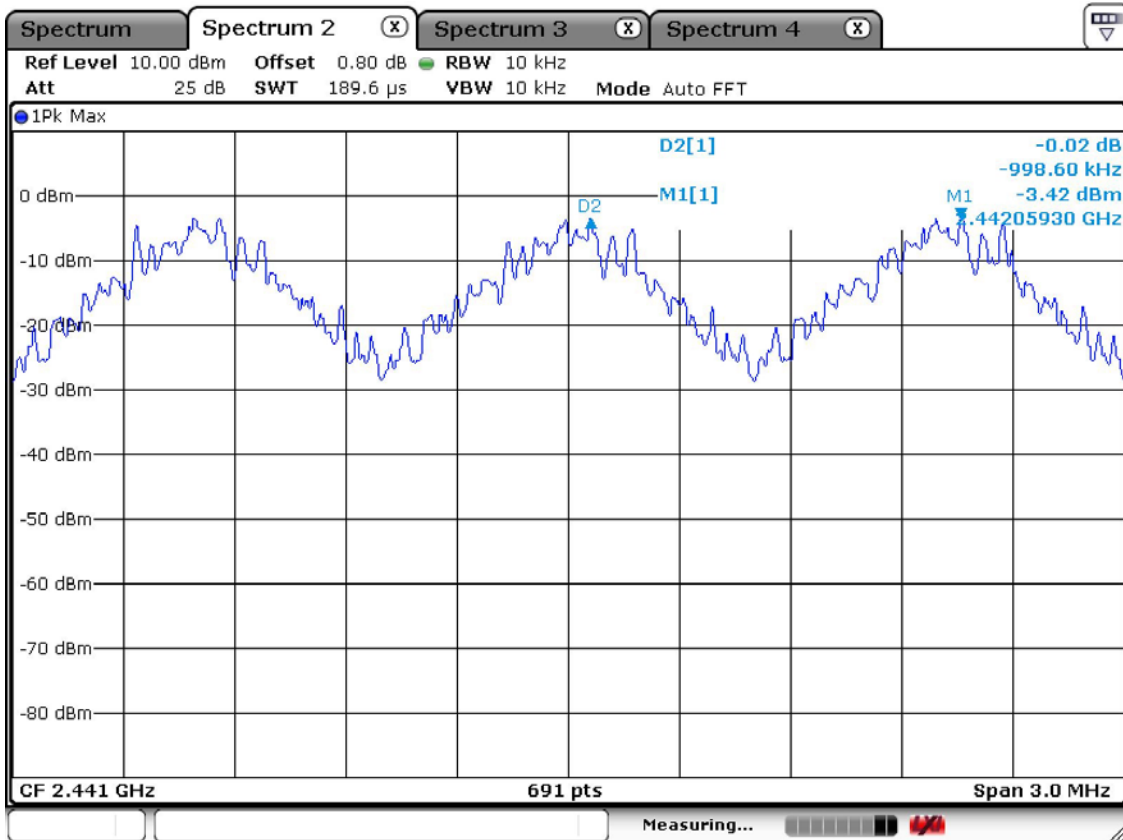

### EDR Mode

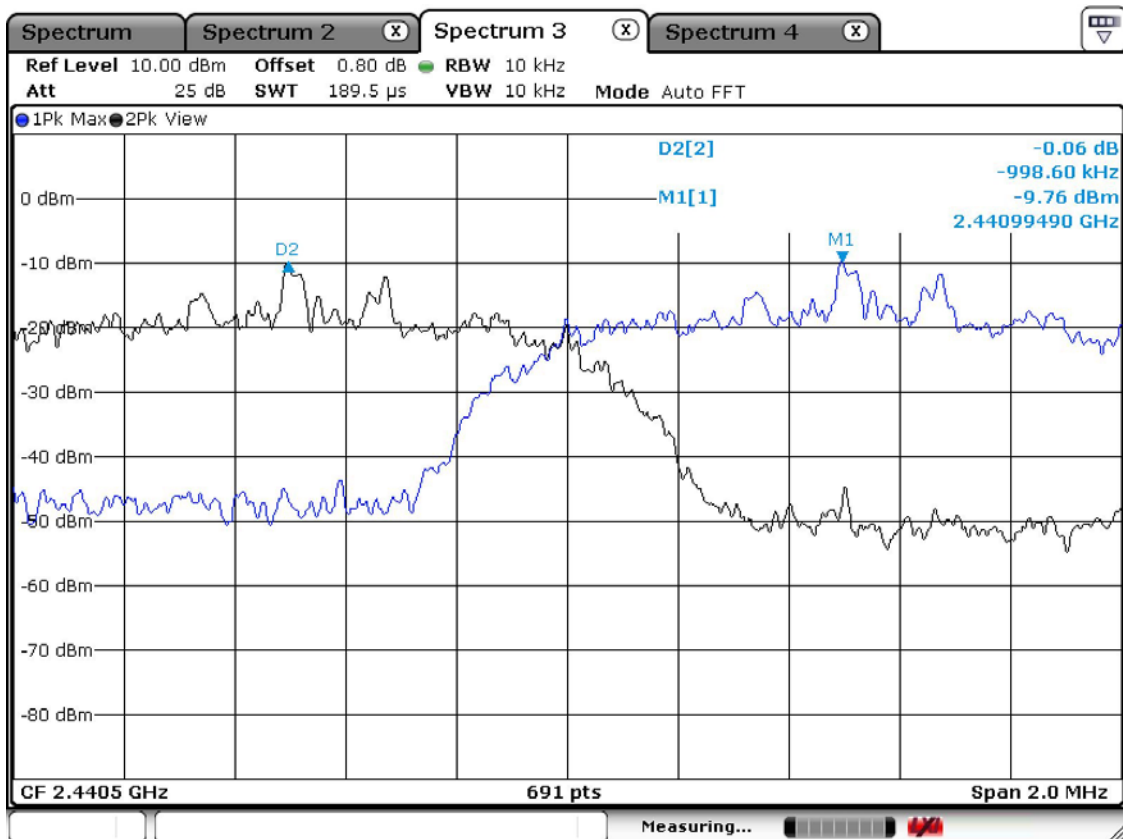

### 3.3.2 Number of Hopping Frequencies

#### Procedure:

The test follows DA000705. The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

#### The spectrum analyzer is set to (Bluetooth):

Frequency range    Start = 2400.0MHz,    Stop = 2483.5 MHz

RBW = 100 kHz (1% of the span or more)    Sweep = auto

VBW = 100 kHz (VBW  $\geq$  RBW)    Detector function = peak

Trace = max hold    Span > 40MHz

#### Measurement Data : **Complies**

<b>Total number of Hopping Channels</b>	79
---	----

- See next pages for actual measured spectrum plots.


#### Minimum Standard:

At least 15 hopes

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

### Number of Hopping Frequencies

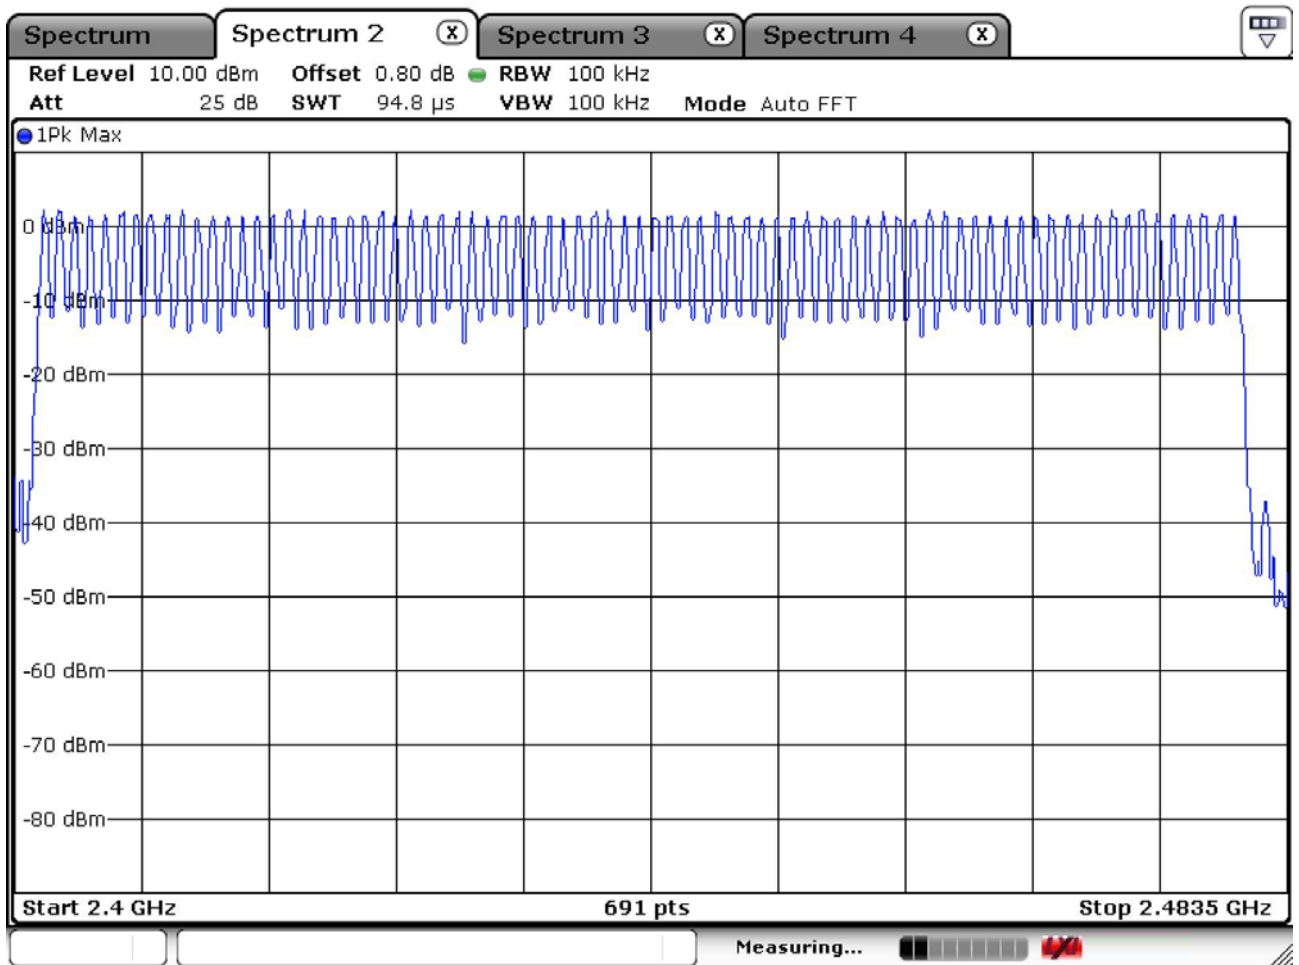

### 3.3.3 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to (Bluetooth):

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

#### Measurement Data : Basic Mode

Frequency (MHz)	Channel No.	Test Results(MHz)
		20dB Bandwidth
2402	0	0.899
2441	39	0.890
2480	78	0.877

#### Measurement Data : EDR Mode

Frequency (MHz)	Channel No.	Test Results(MHz)
		20dB Bandwidth
2402	0	1.272
2441	39	1.198
2480	78	1.268

- See next pages for actual measured spectrum plots.

#### Minimum Standard:


N/A

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


**Channel 1 of basic mode**

**20 dB Bandwidth**

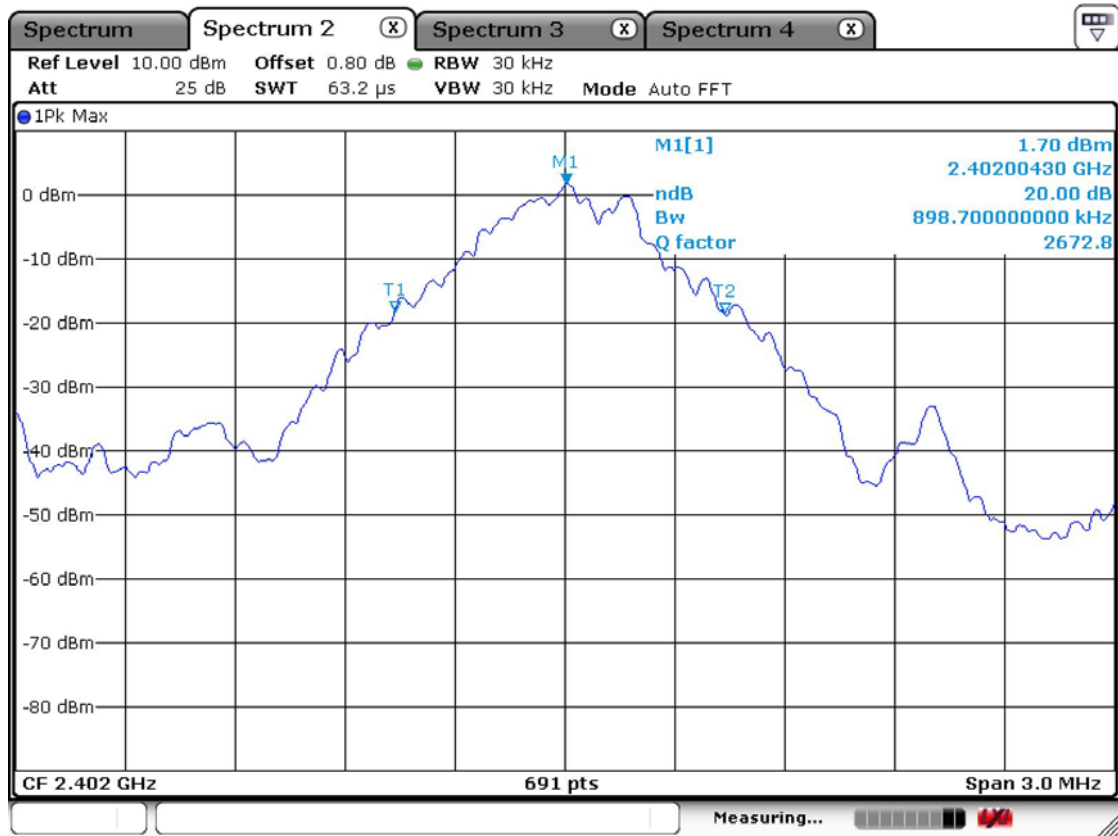


**Channel 2 of basic mode**

**20 dB Bandwidth**

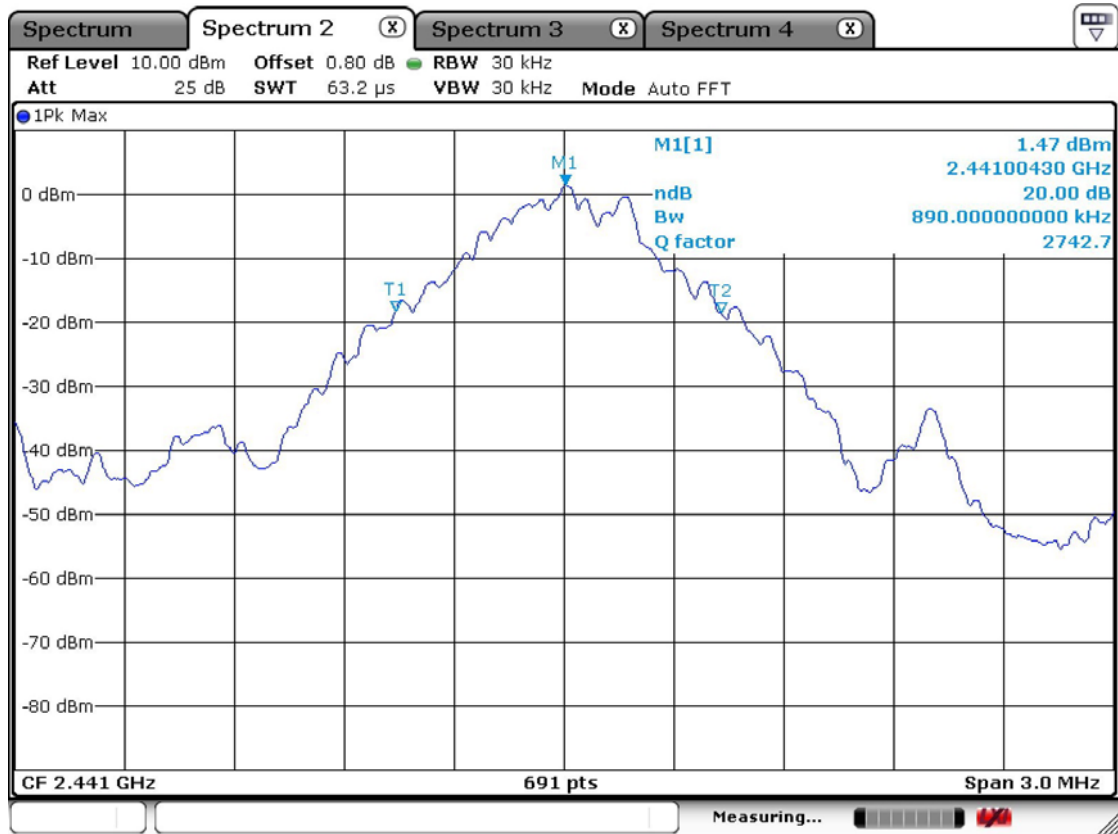


**Channel 3 of basic mode**

**20 dB Bandwidth**

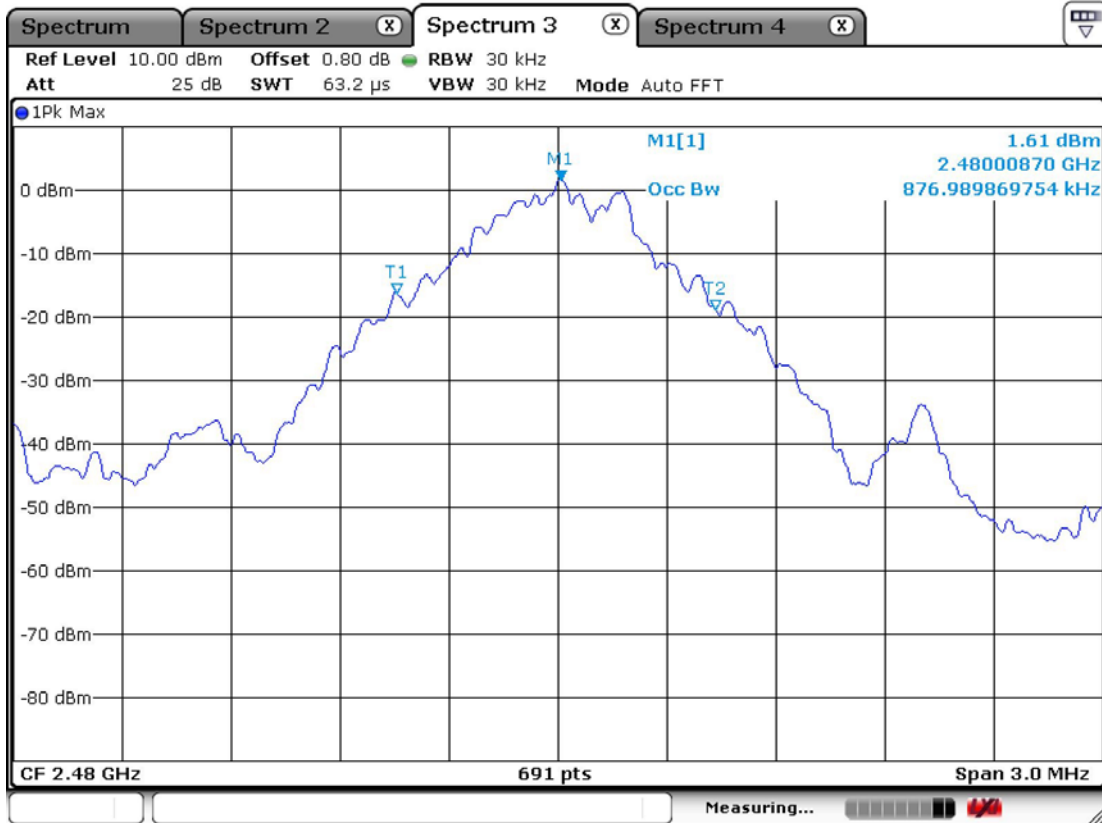


**Channel 1 at EDR mode**

**20 dB Bandwidth**

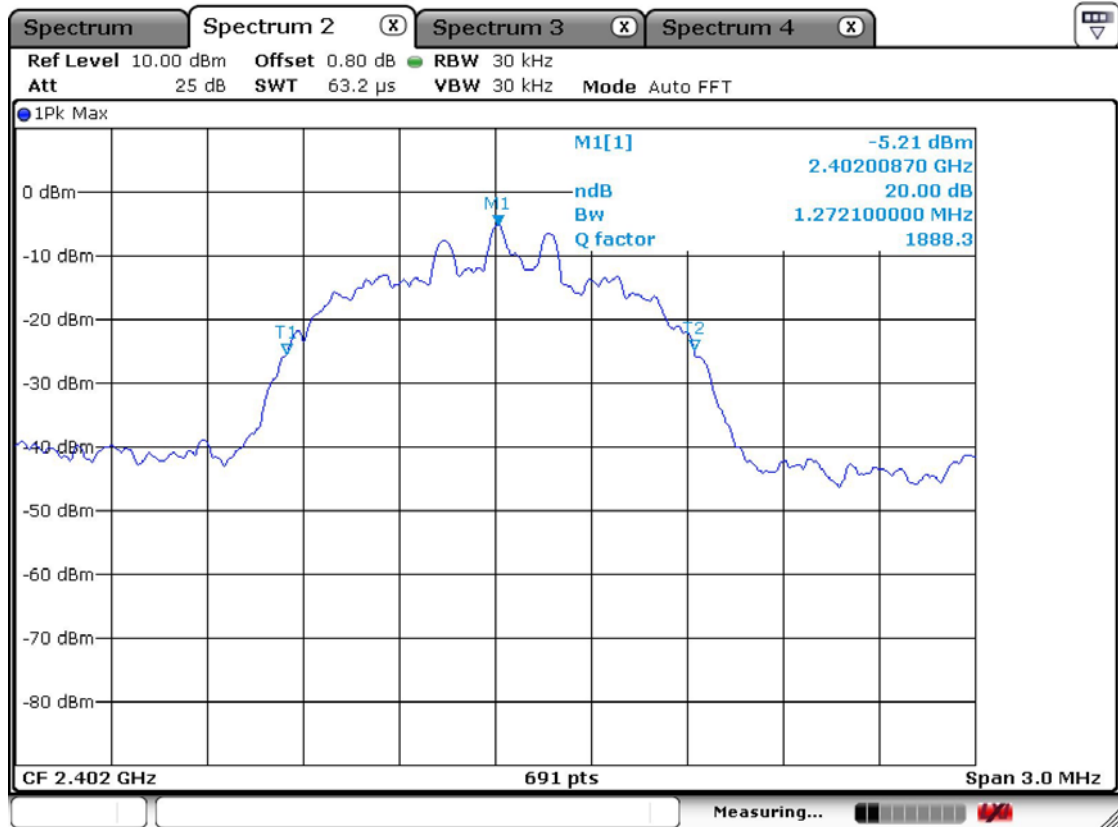


**Channel 2 at EDR mode**

**20 dB Bandwidth**

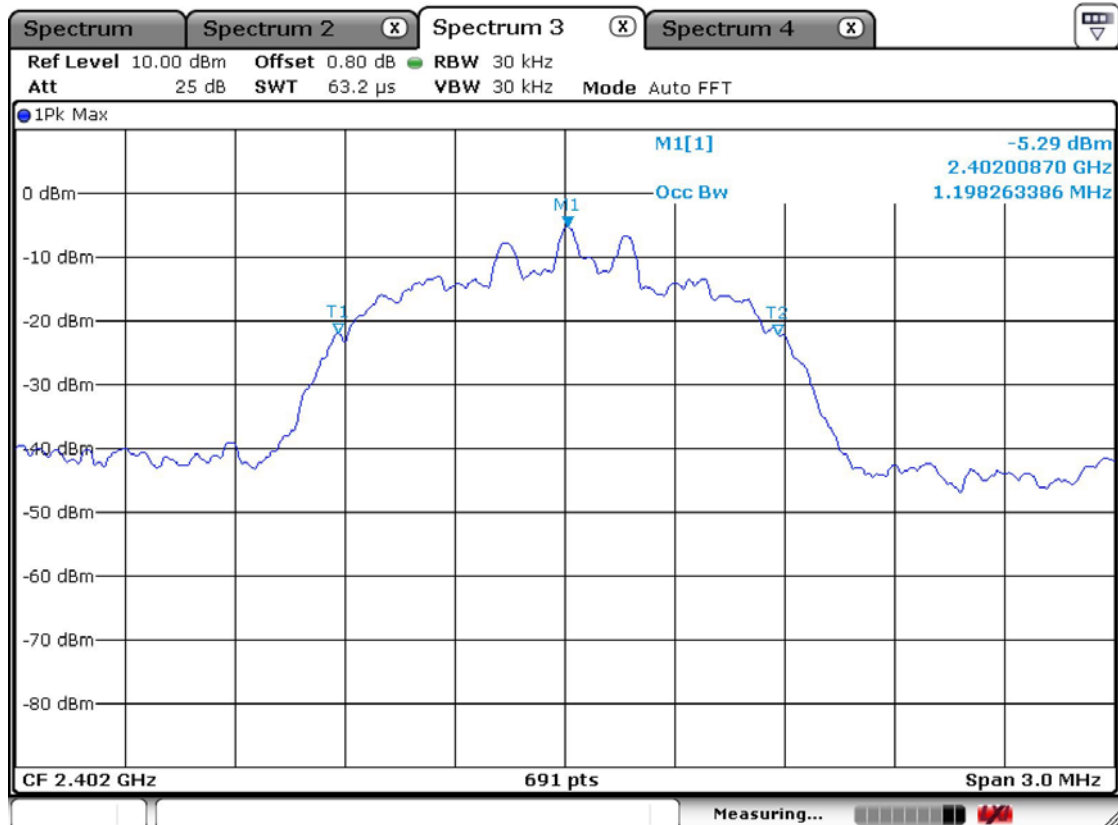

**Channel 3 at EDR mode**  
**20 dB Bandwidth**

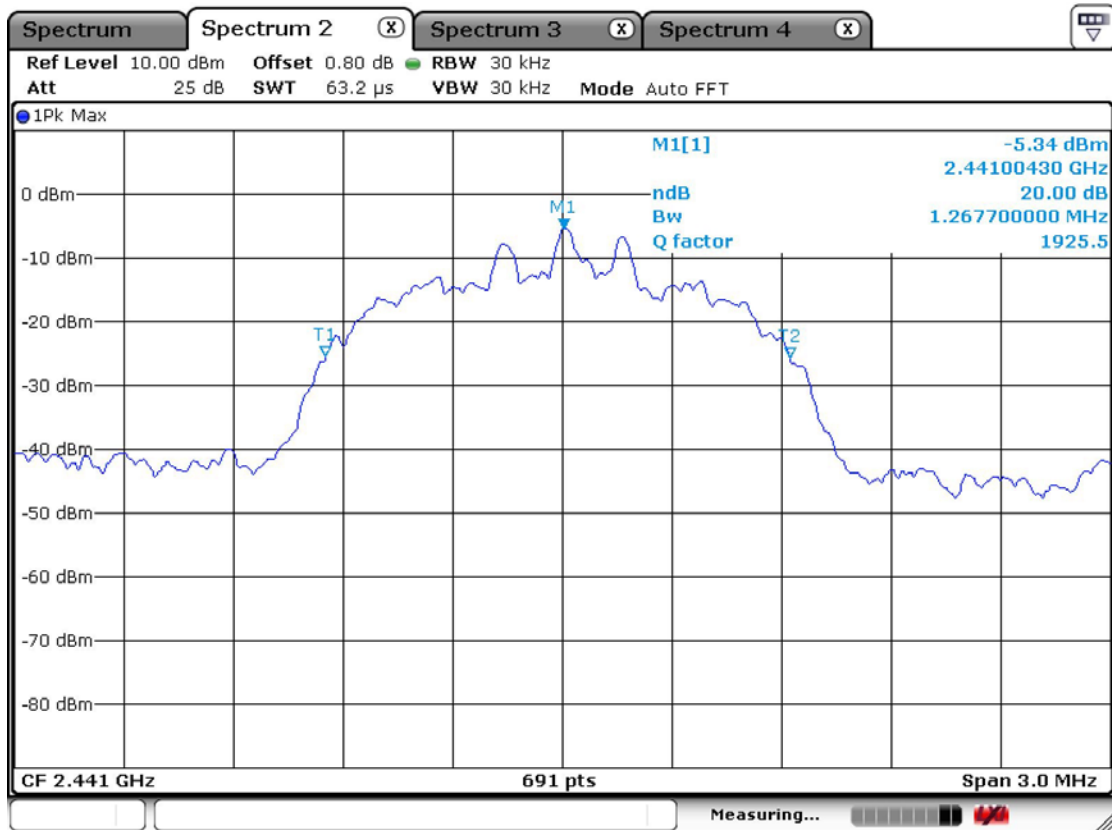



### 3.3.4 Time of Occupancy (Dwell Time)

#### Procedure:

The test follows DA000705. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW  $\geq$  RBW)

Trace = max hold

Detector function = peak

#### Measurement Data (Bluetooth):

Mode	Number of transmission in a 31.6s ( 79Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
DH1	30(Times / 3sec) *10.533 = 315.99	0.543	171.58	400
DH3	15(Times / 3sec) *10.533 = 158.00	1.819	287.40	400
DH5	10(Times / 3sec) *10.533 = 105.33	3.080	324.42	400
EDR 3Mbps DH5	10(Times / 3sec) *10.533 = 105.33	3.094	325.89	400

- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot ) x duration time per channel} x 0.4 ms



#### Minimum Standard:

0.4 seconds within a 30 second period per any frequency



#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)



### DH1 at basic mode

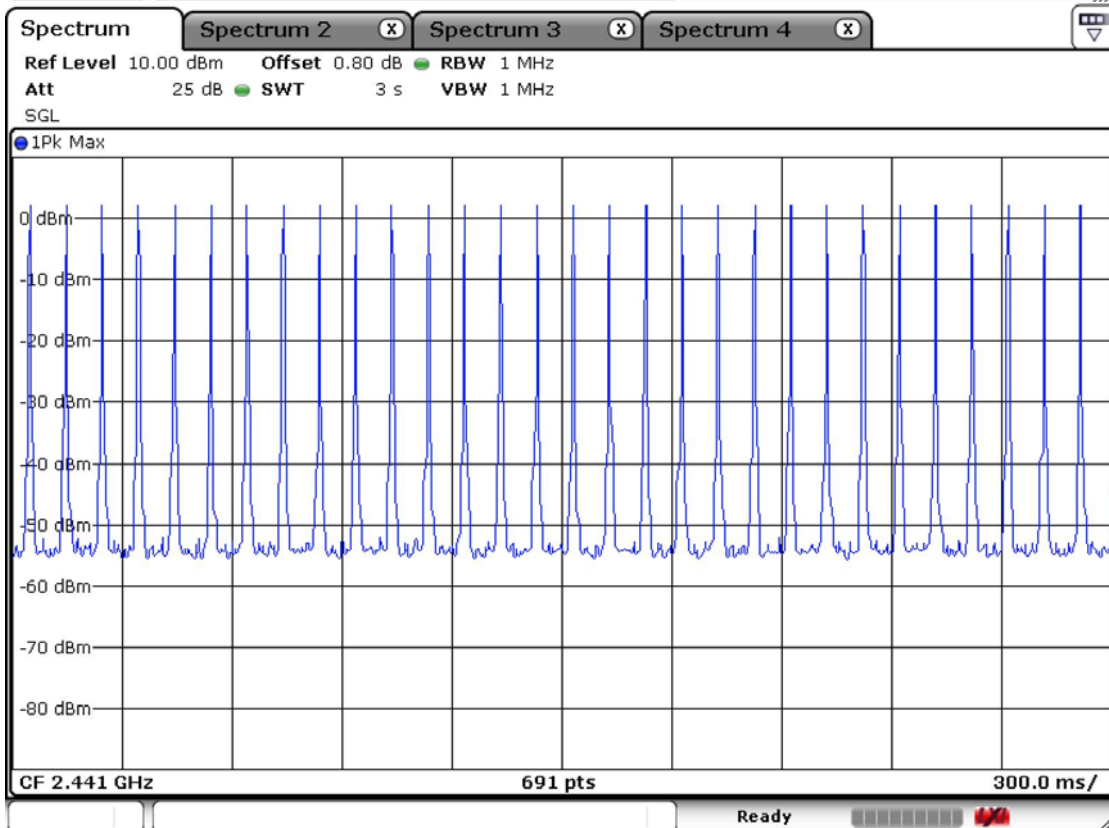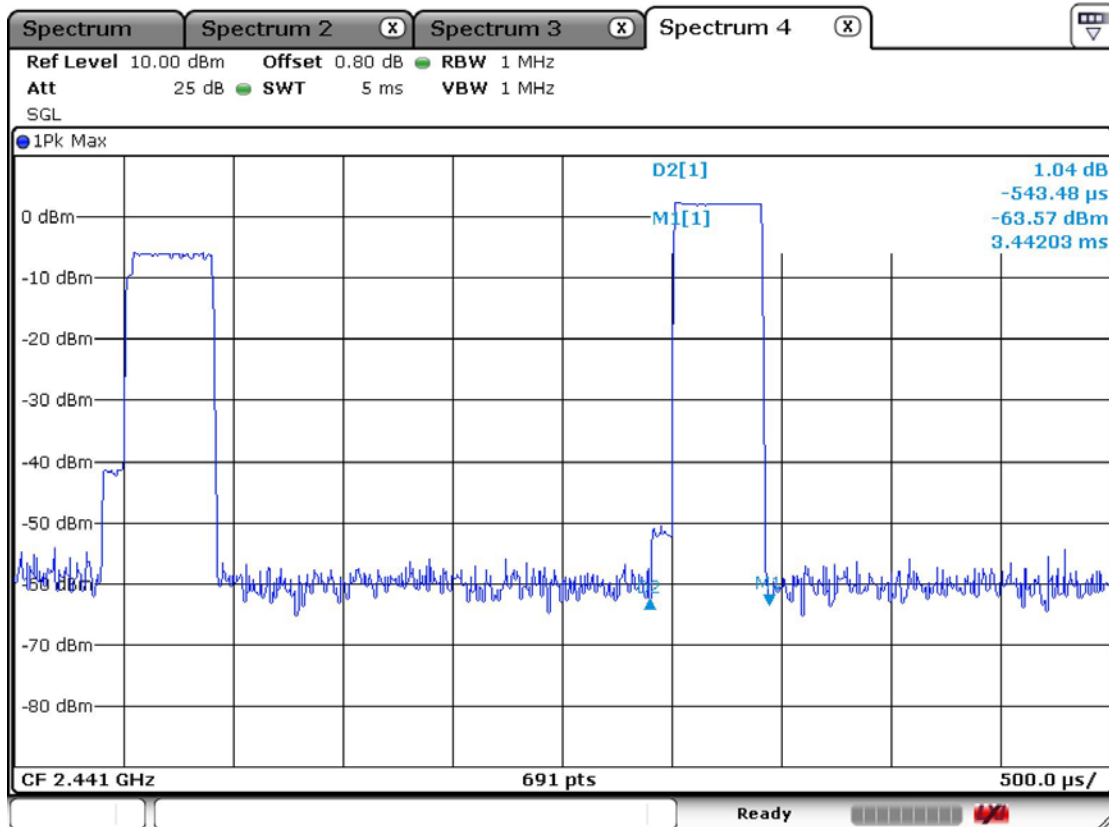



### DH3 at basic mode

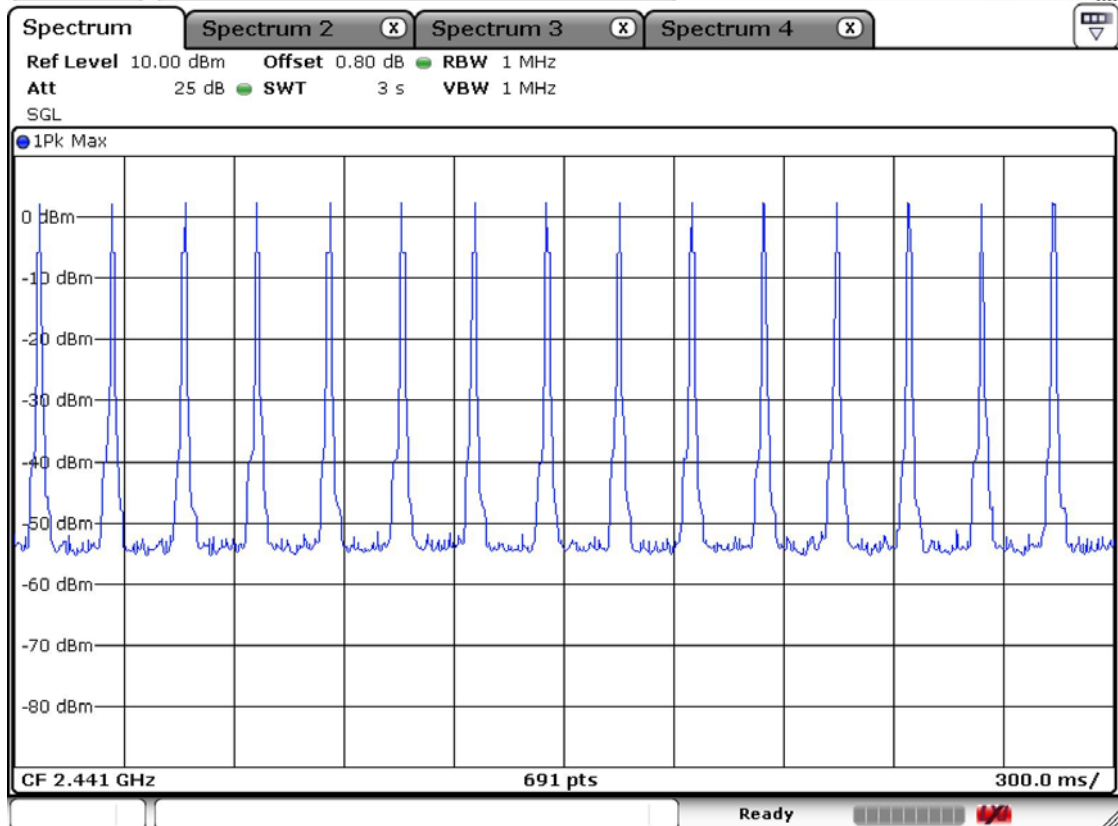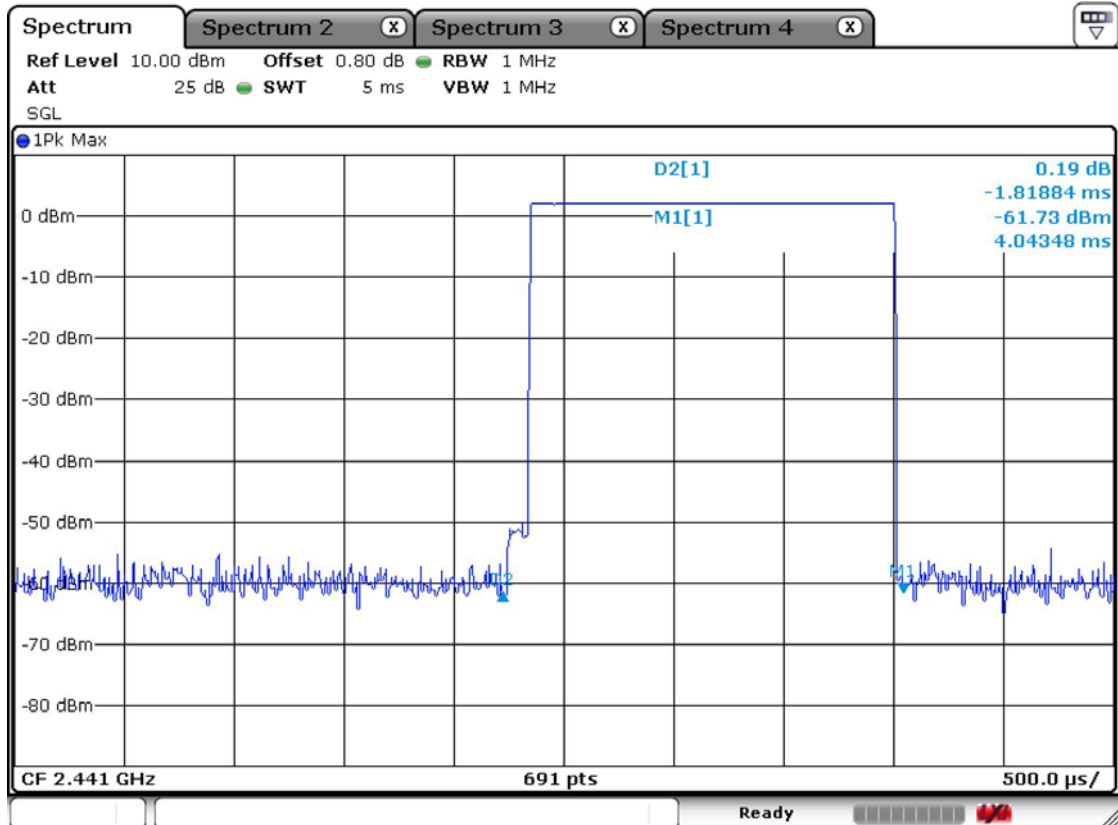

### DH5 at basic mode

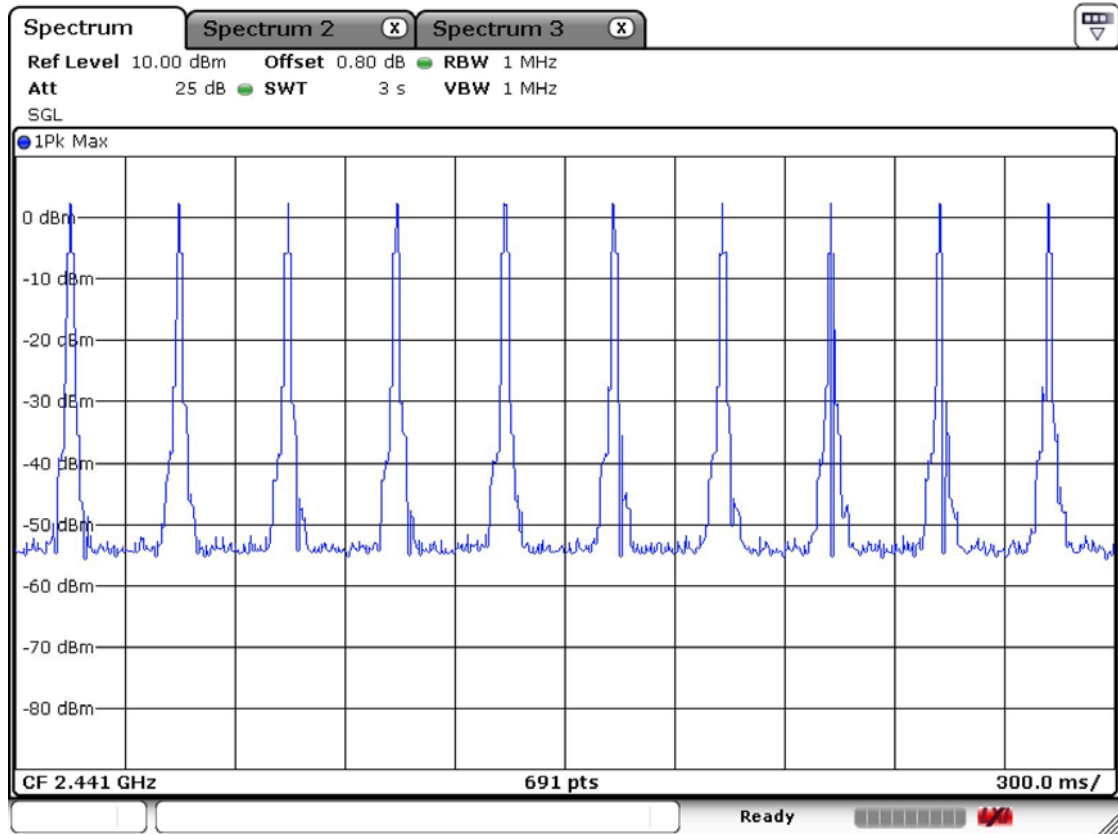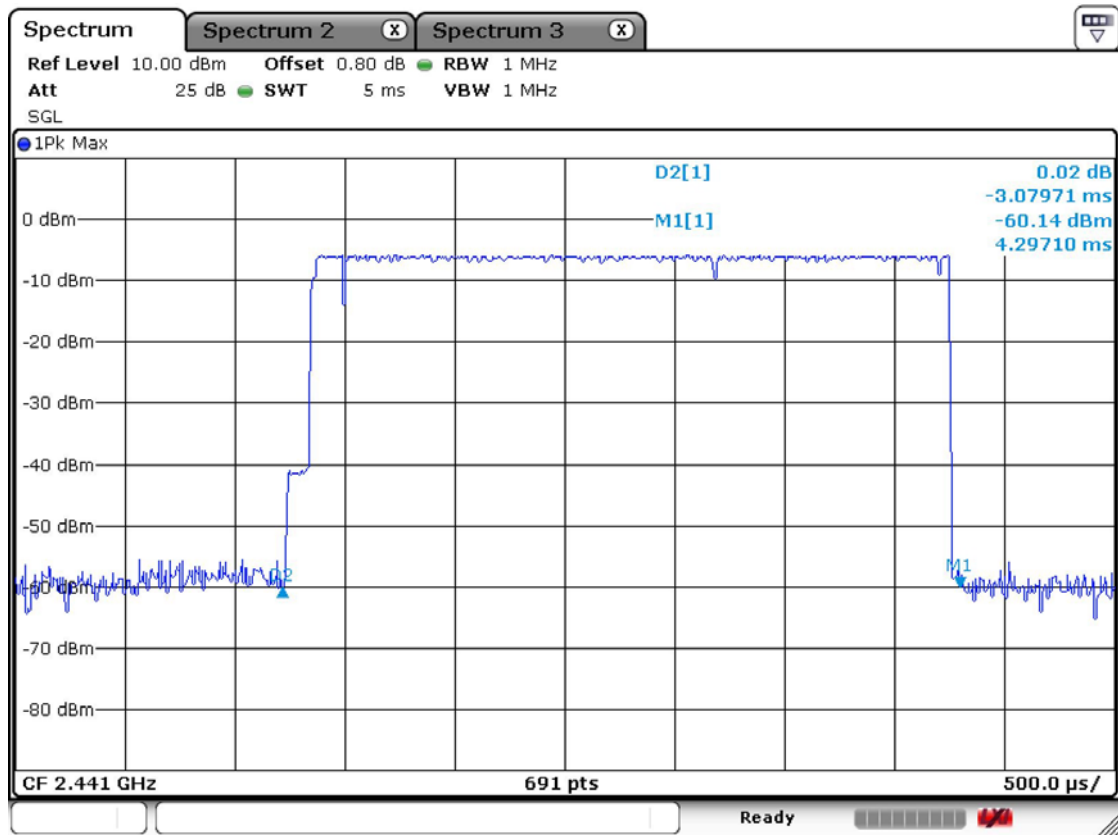

### DH5 at EDR mode with 3Mbps

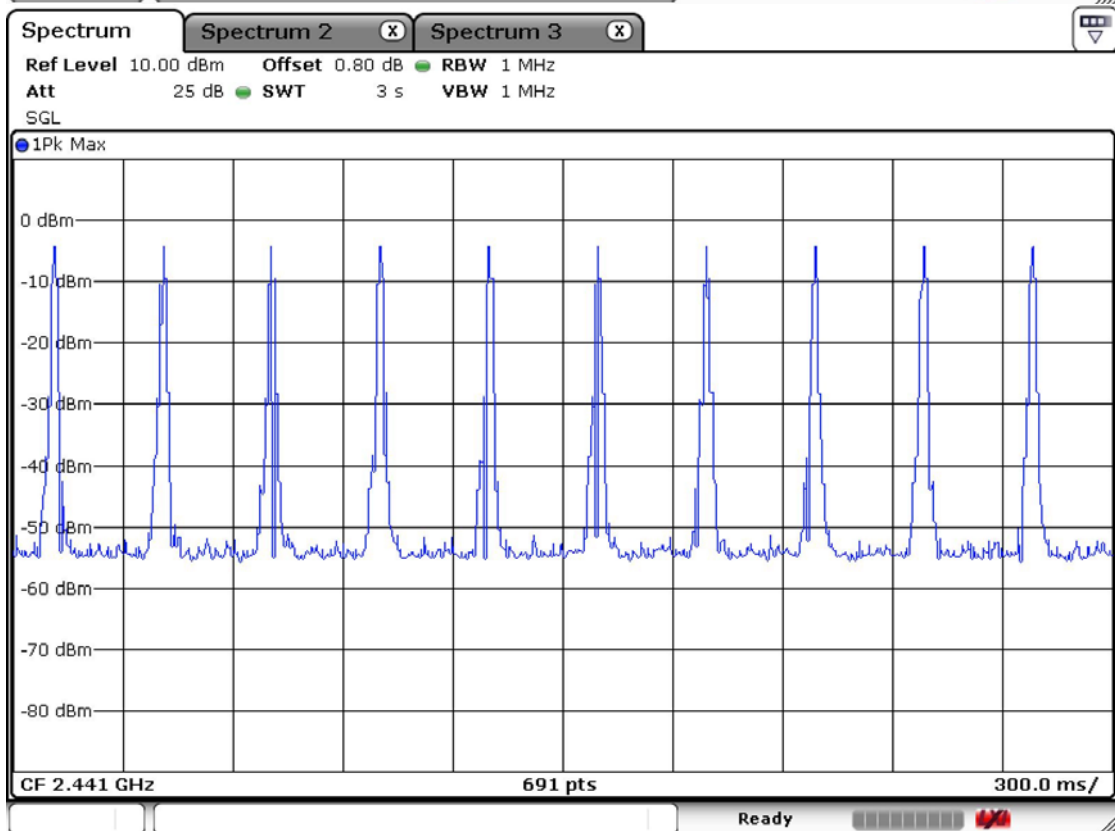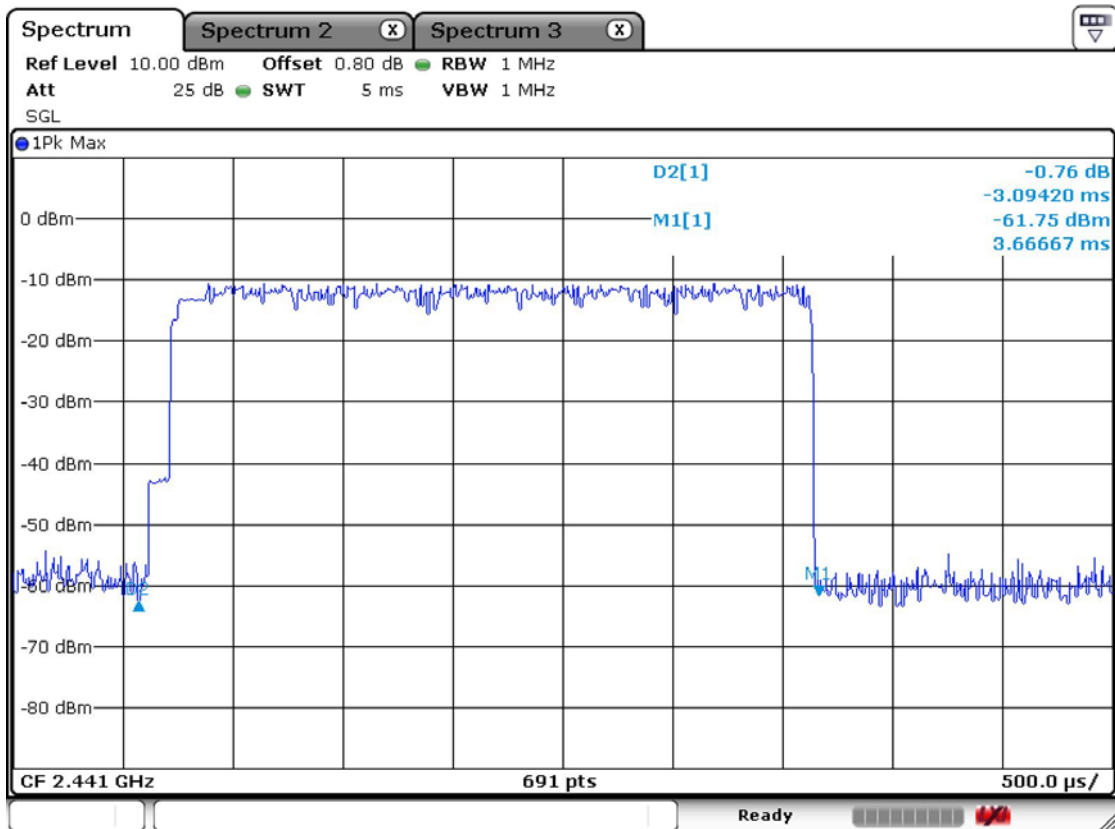

### 3.3.5 Transmitter Output Power

#### Procedure:

The test follows DA000705. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

#### The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto

#### Measurement Data : Basic Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	2.33	1.71	Complies
2441	39	2.31	1.70	Complies
2480	78	2.45	1.76	Complies

#### Measurement Data : EDR Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	-3.97	0.40	Complies
2441	39	-4.32	0.37	Complies
2480	78	-4.32	0.37	Complies


- See next pages for actual measured spectrum plots.

<b>Minimum Standard:</b>	< 250 mW
--------------------------	----------


#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


### Channel 1 Basic mode

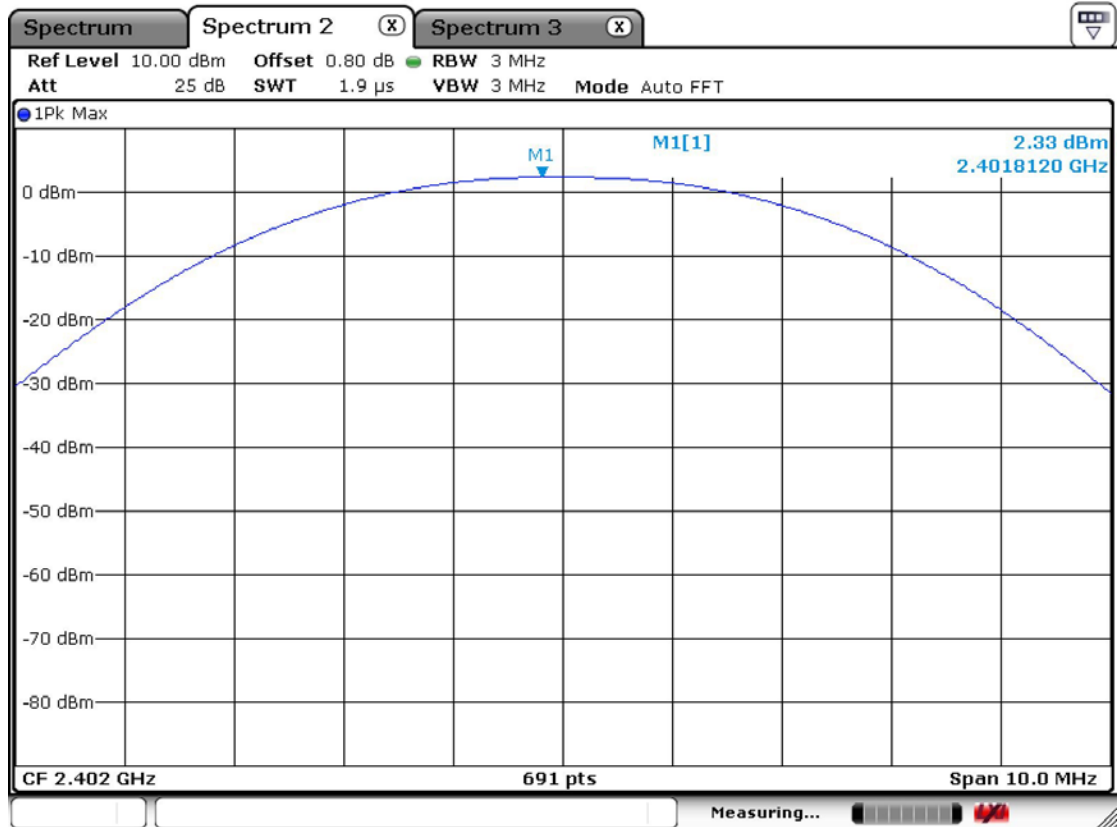


### EDR mode

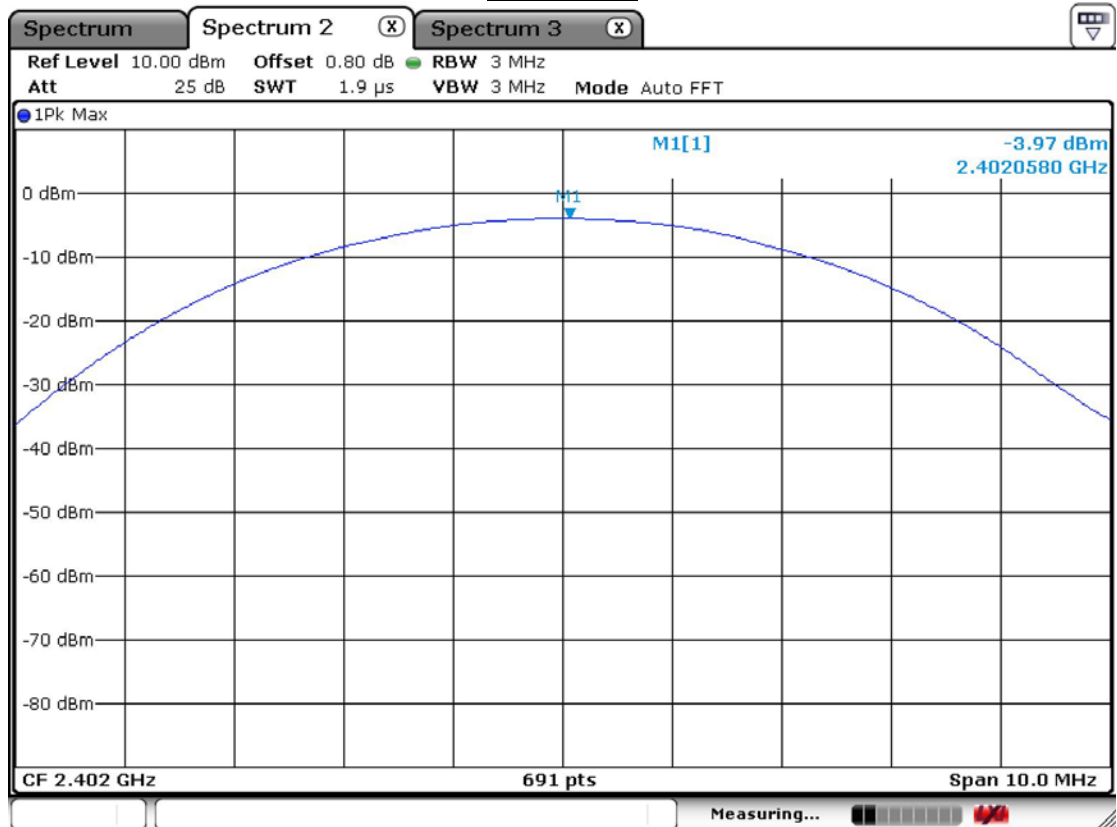

### Channel 2 Basic mode

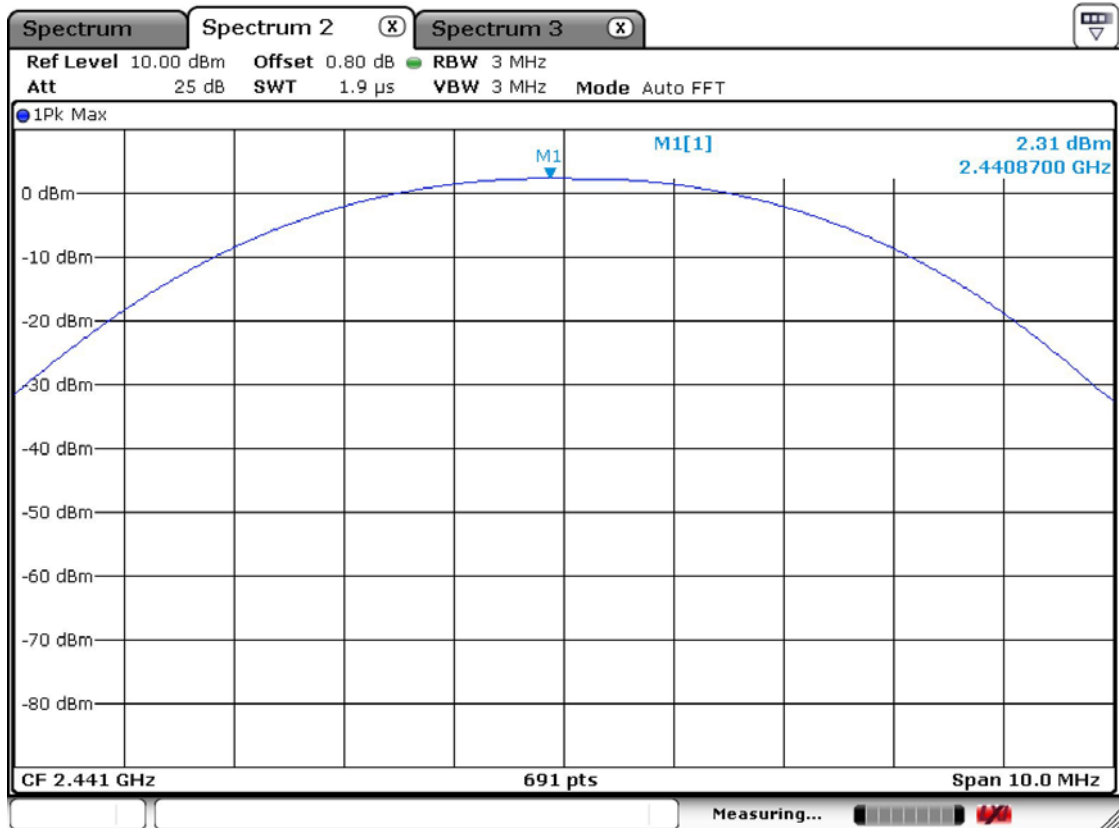


### EDR mode

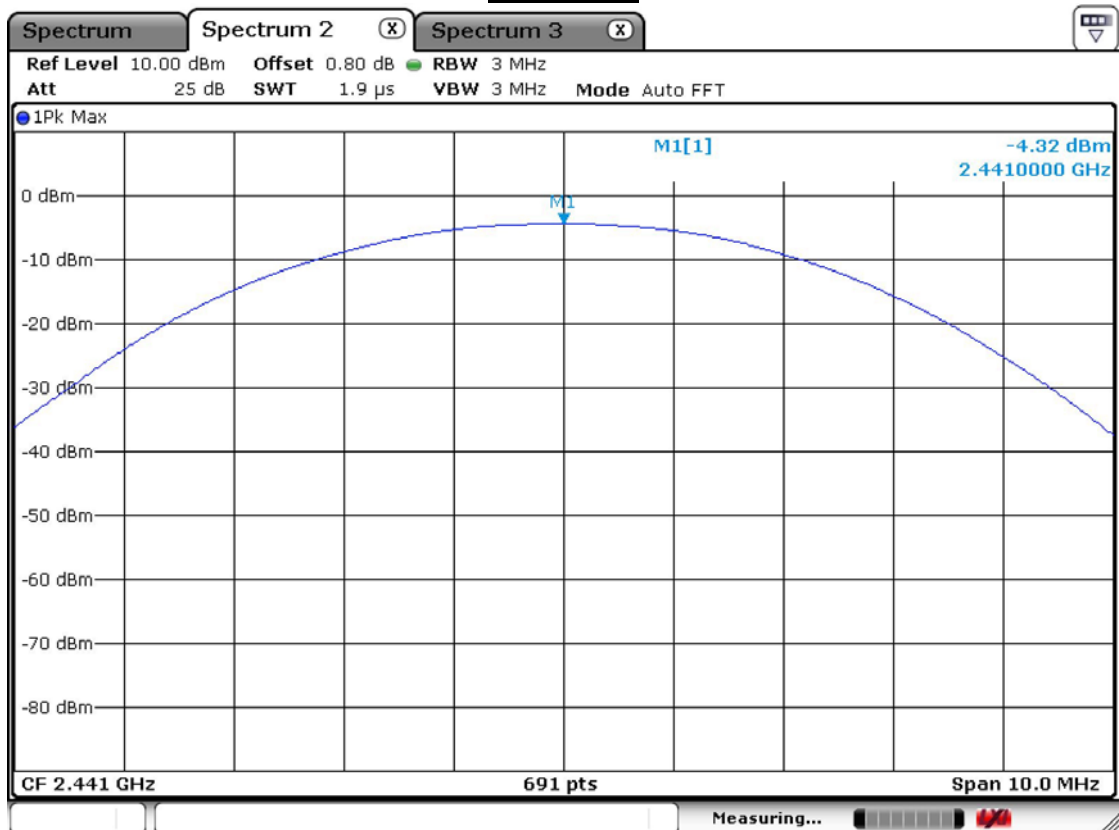




### Channel 3 Basic mode

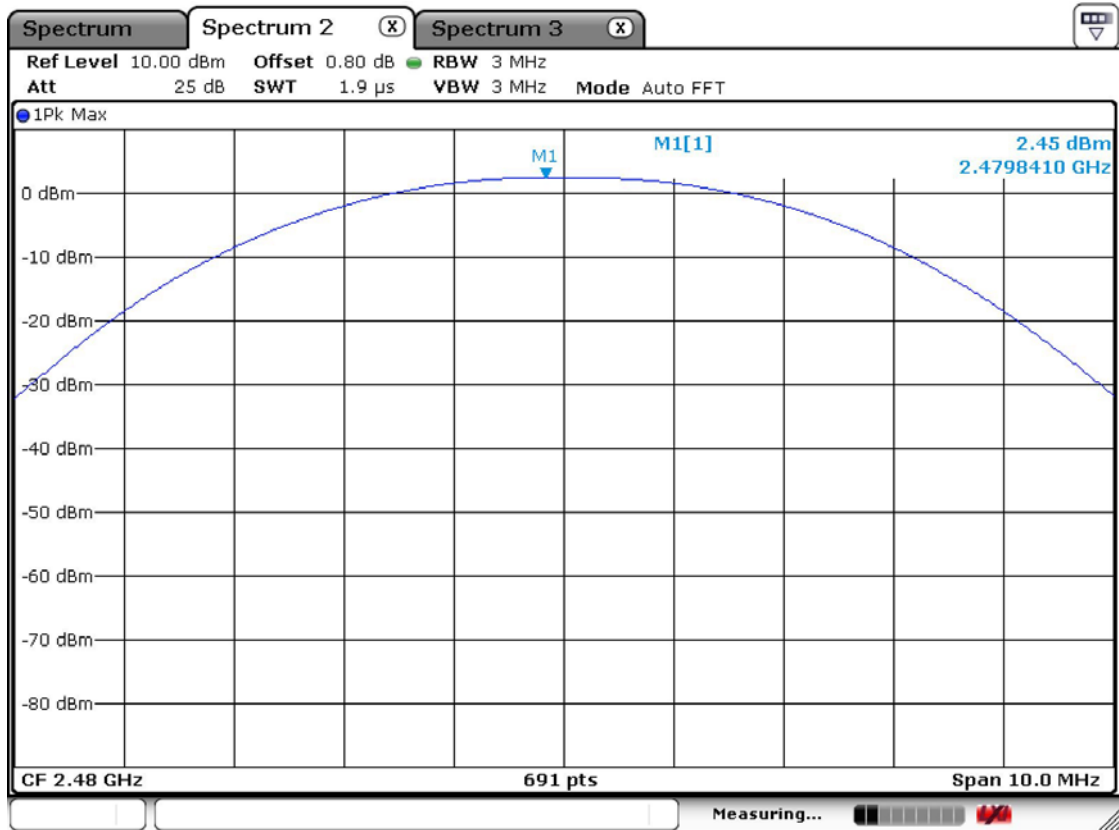

### EDR mode

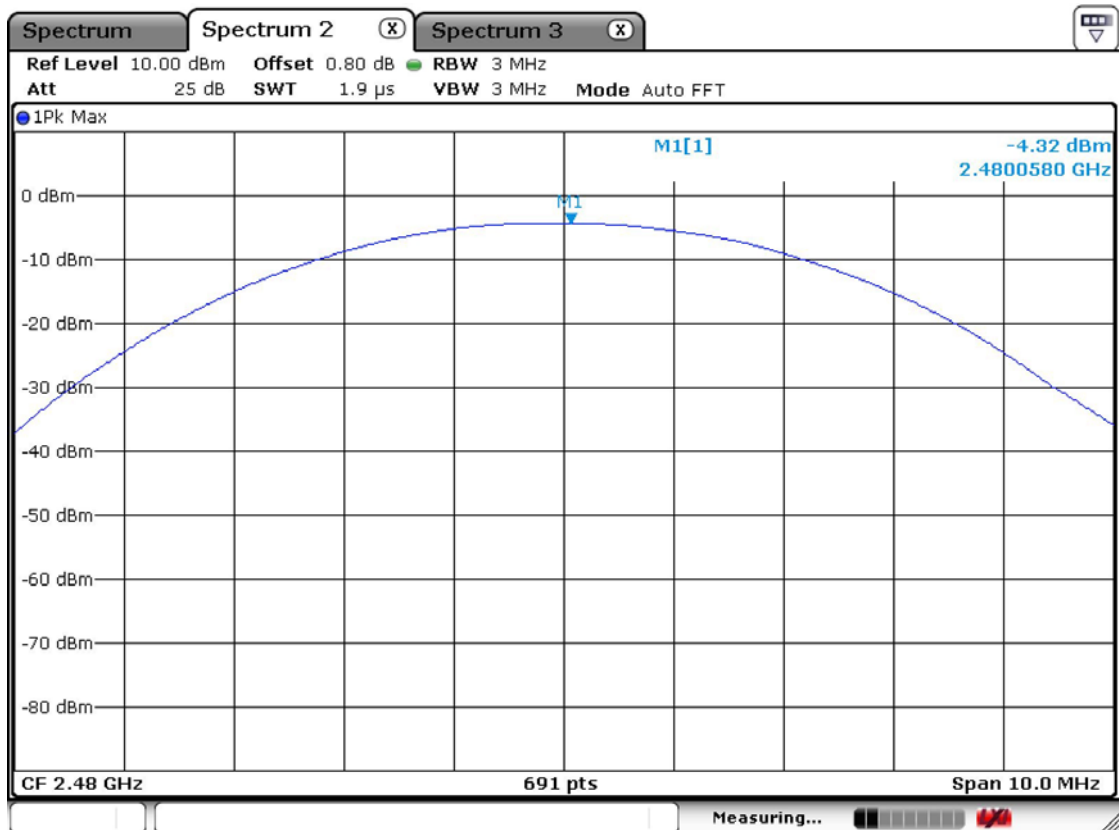

### 3.3.6 Band Edge

#### Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 10 ~ 30 MHz

Detector function = peak

Trace = max hold

Sweep = auto

#### Measurement Data: **Complies**

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------

#### Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

**Band – edge**

**Lower edge**

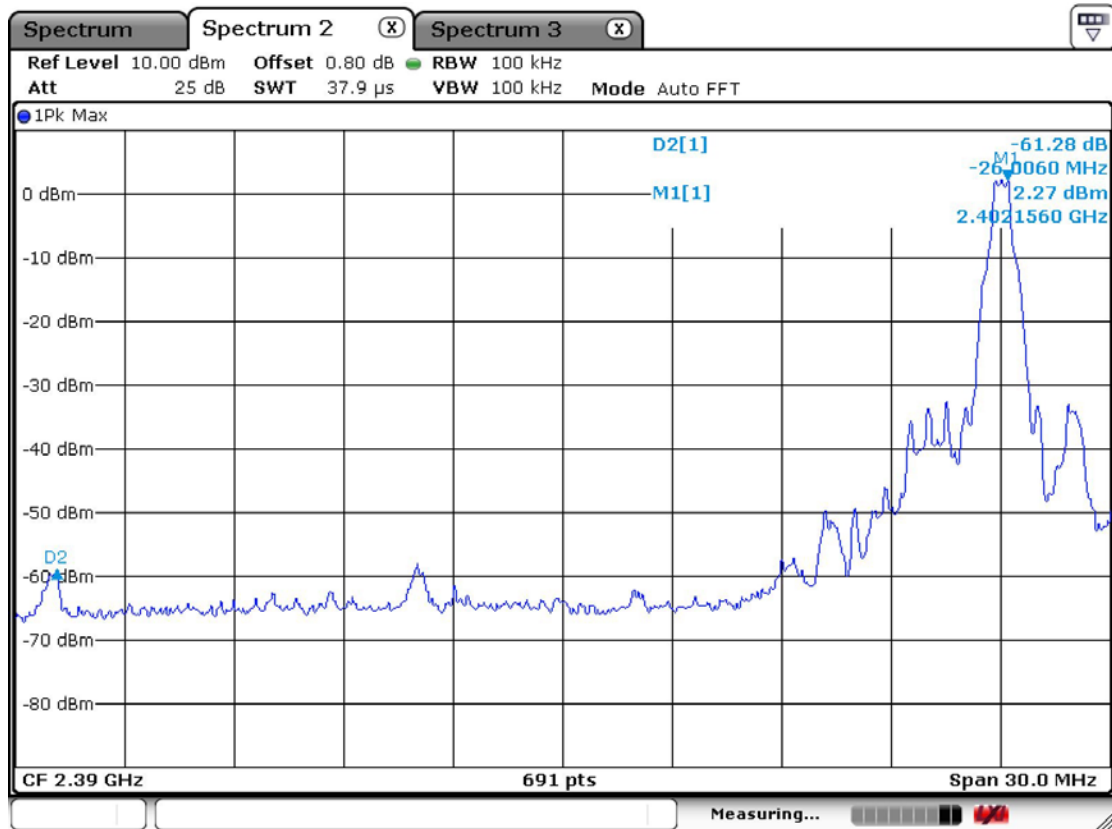

**Upper edge**

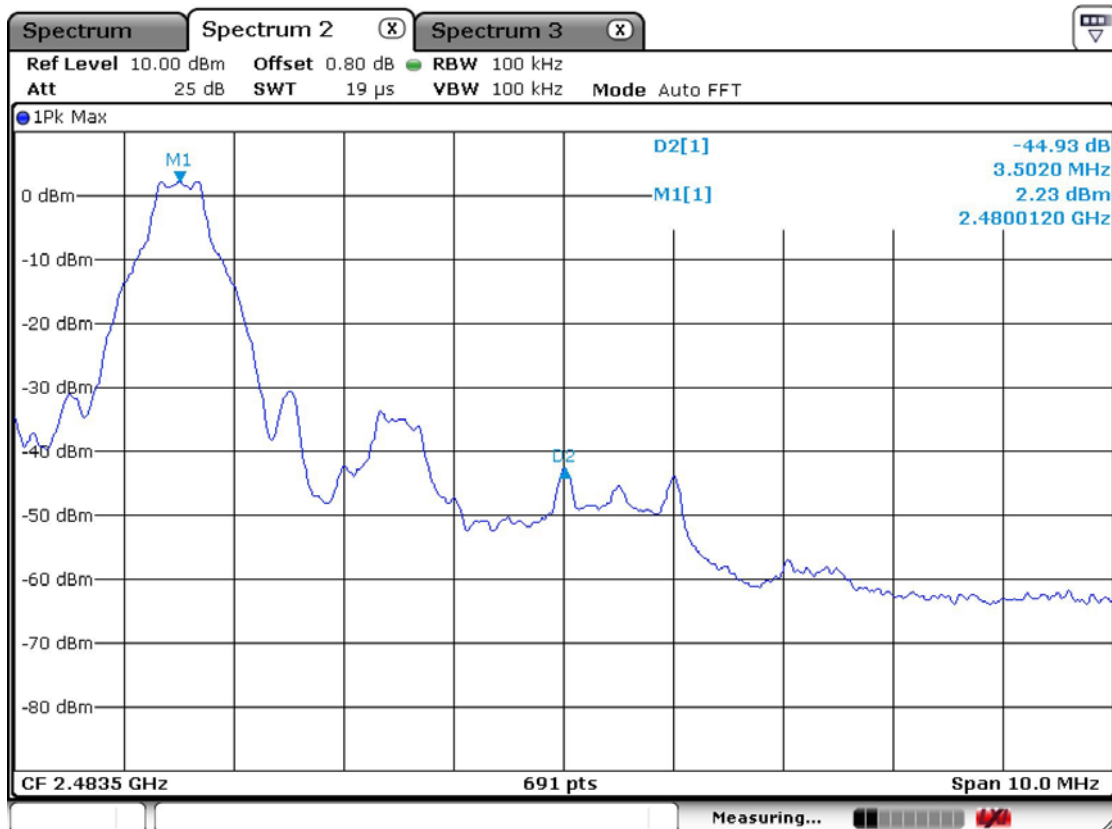

**Band-edges in the restricted band 2310-2390 MHz measurement**


Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna	Amp. Gain + Cable Loss		AV	Peak	AV	Peak	AV	Peak	AV	Peak
2319.2	33.2	51.3	H	28.2	27.2	54.0	74.0	34.2	52.3	19.8	21.7

**Band-edges in the restricted band 2483.5-2500 MHz measurement**


Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna	Amp. Gain + Cable Loss		AV	Peak	AV	Peak	AV	Peak	AV	Peak
2484.7	37.1	50.8	H	28.2	27.2	54.0	74.0	38.1	51.8	15.9	22.2

**Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.**


**Unwanted Emission – Low channel**  
**Frequency Range = 30 MHz ~ 26.5 GHz**

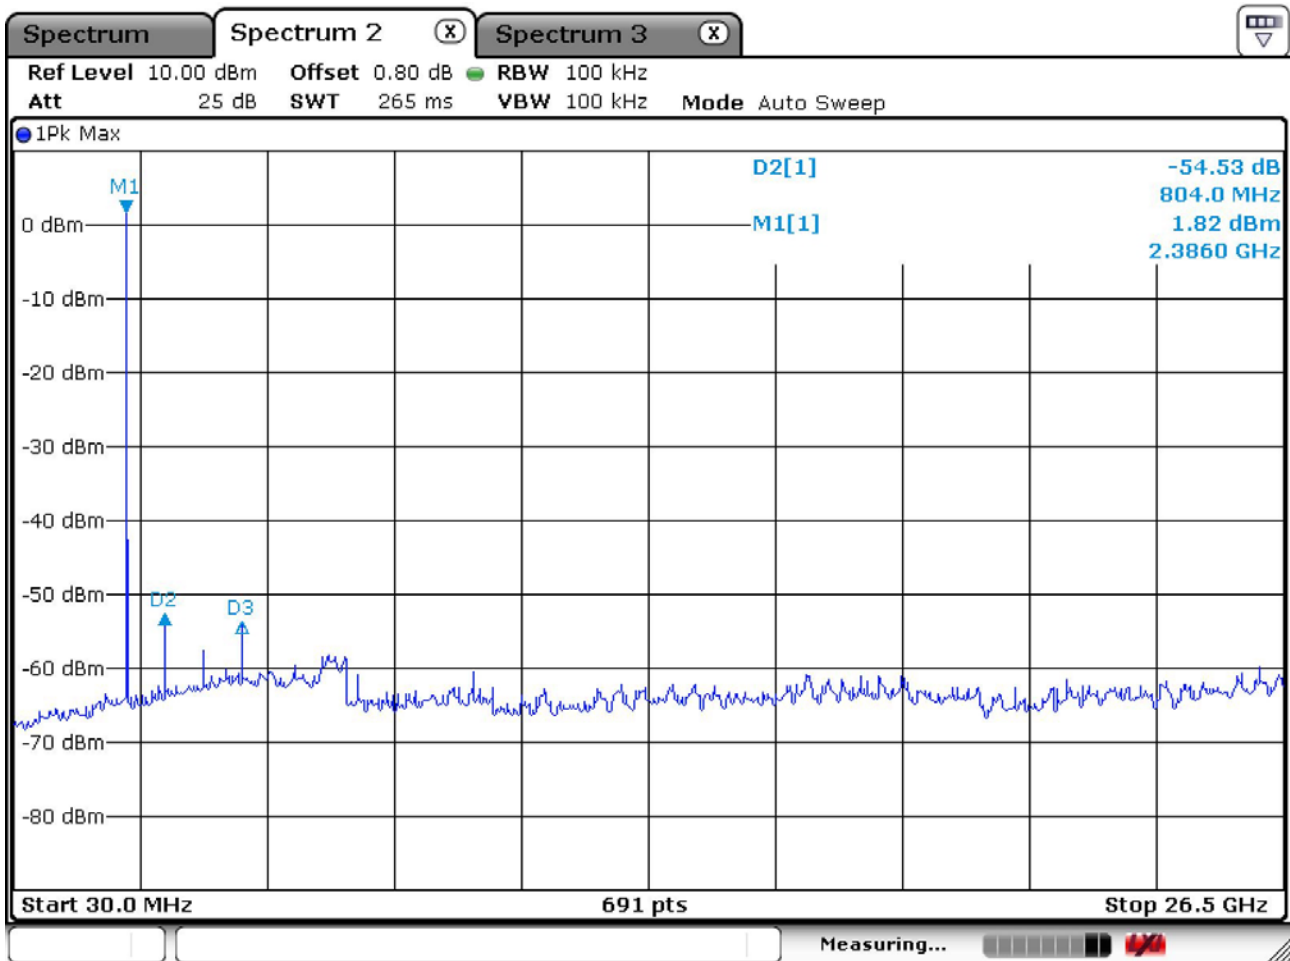

**Unwanted Emission – Middle channel**  
**Frequency Range = 30 MHz ~ 26.5 GHz**

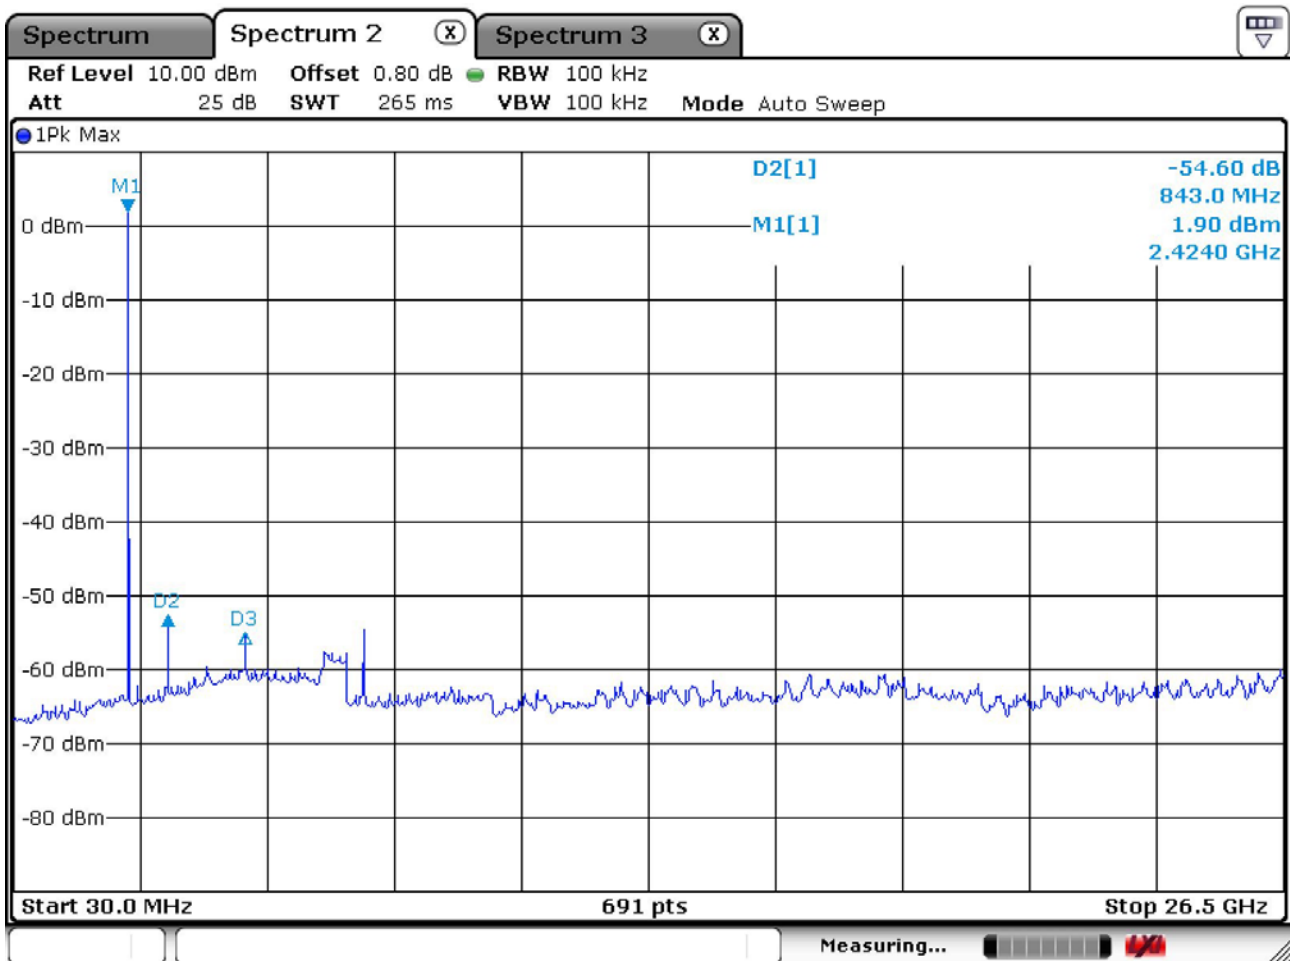

**Unwanted Emission – High channel**  
**Frequency Range = 30 MHz ~ 26.5 GHz**

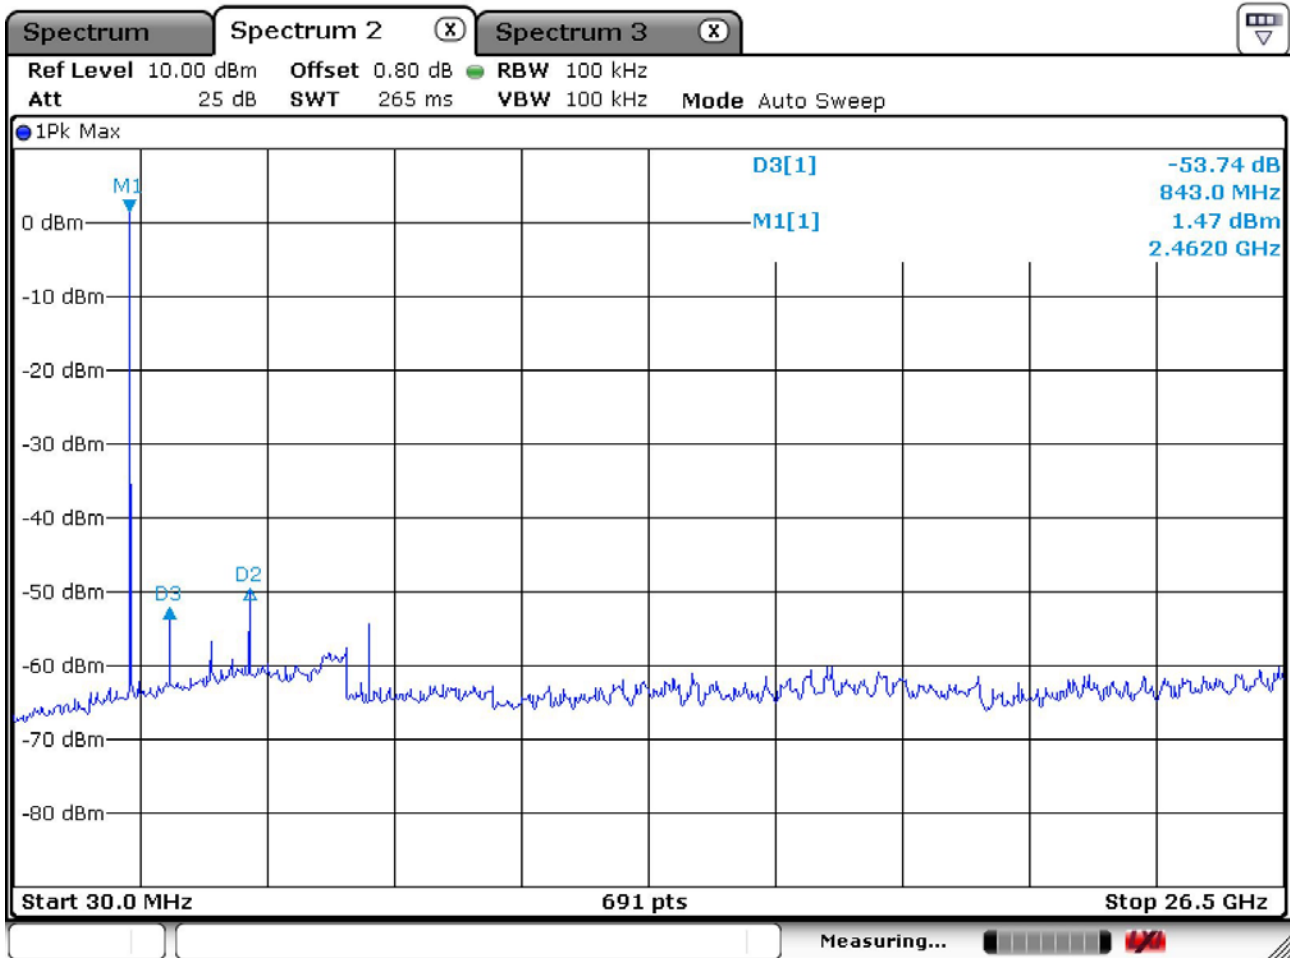

### 3.3.7 Field Strength of Harmonics

#### Procedure:

Radiated emissions from the EUT were measured according to the dictates of DA000705. The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30MHz ~ 1 GHz)

= 1 MHz ( 1 GHz ~ 10<sup>th</sup> harmonic )

Span = 100 MHz


Trace = max hold

VBW  $\geq$  RBW

Detector function = peak


Sweep = auto

**below 30MHz**

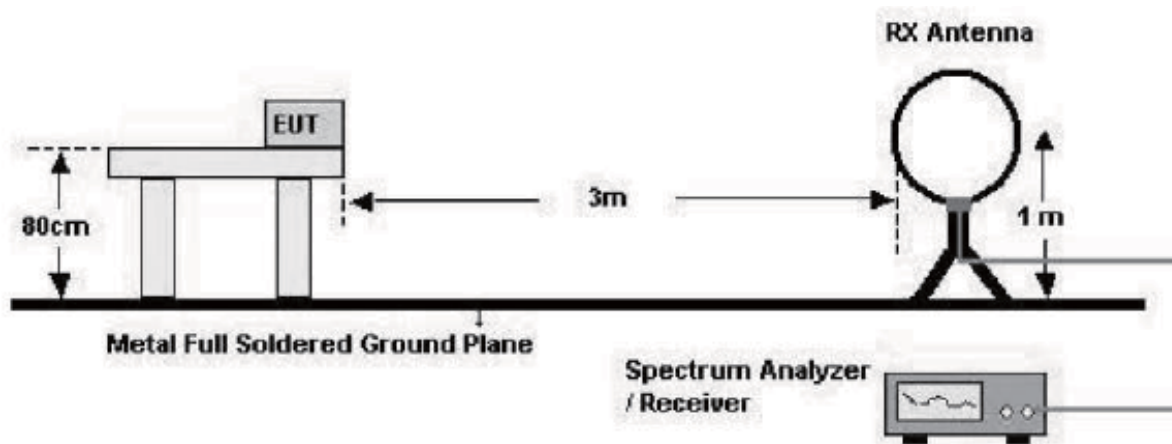




below 1GHz (30MHz to 1GHz)

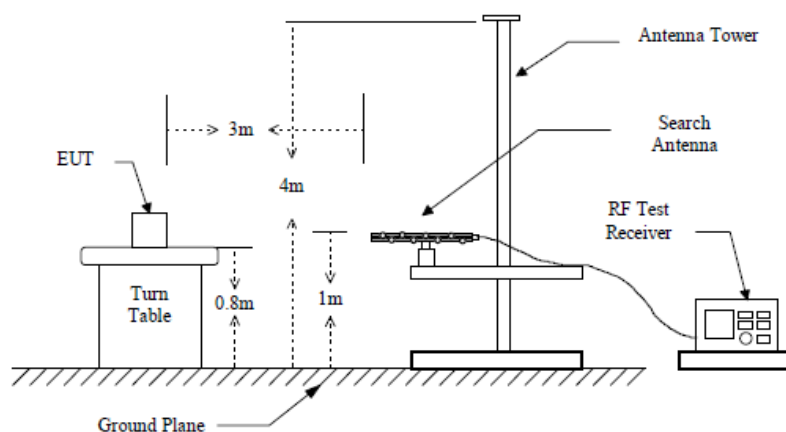

above 1GHz

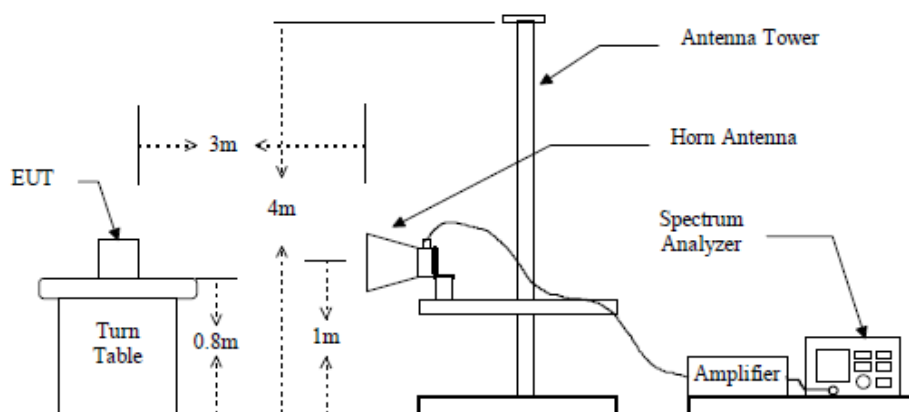

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20dB below limit include from 9KHz to 30MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F(kHz) (@ 300m)
0.490 ~ 1.705	24000/F(kHz) (@ 30m)
1.705 ~ 30	30(@ 30m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

## Measurement Data :

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable		AV/Peak		AV/Peak		AV / Peak	
4804.6	39.8	47.6	H	29.5	21.8	-30.31	54	74	17.3	25.1	36.7	48.9
4882.4	43.9	50.5	H	29.5	21.8	-30.31	54	74	21.4	28.0	32.6	46.0
4959.8	43.8	51.7	H	29.5	21.8	-30.31	54	74	21.3	29.2	32.7	44.8

- No other emissions were detected at a level greater than 20dB below limit.

- D.C.F ( Duty Cycle Correction Factor) =  $20\log(\text{The worst Case DWELL Time}/100\text{ms})$

$$= 20\log(3.094\text{ms}/100\text{ms}) = -30.31$$

**Radiated Emissions – Bluetooth+charging mode**




243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel :+82-31-3236008,9  
Fax:+82-31-3236010

EUT/Model No. : NWP-F100E

TEST MODE: Bluetooth+Charging mode

Temp Humi : 31 / 63

Tested by: Ko Gun

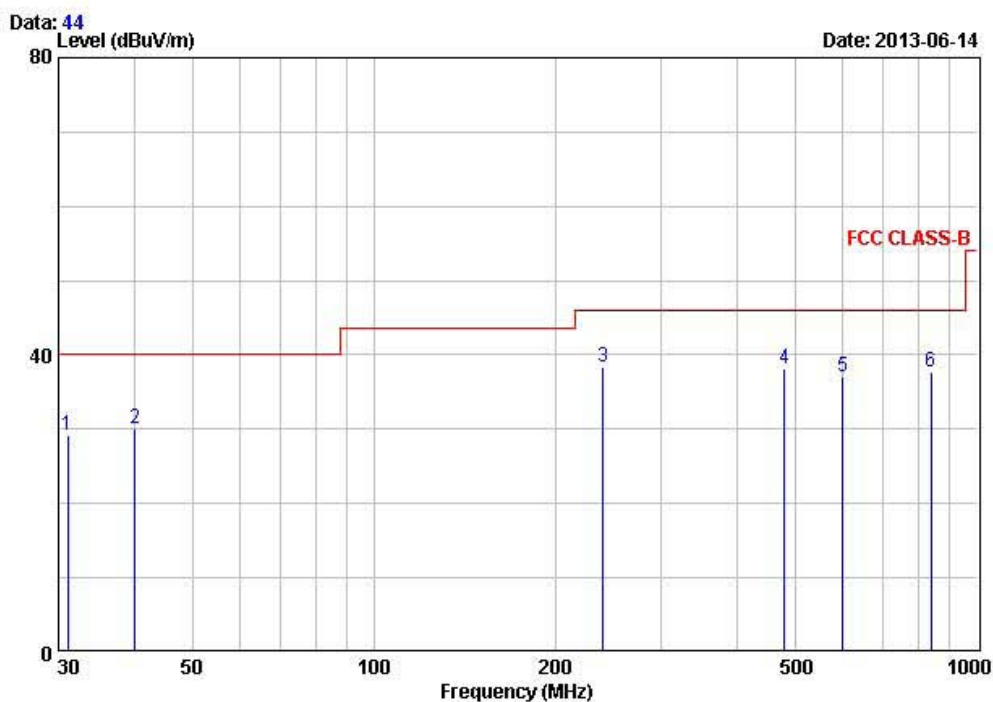

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	31.07	-16.83	29.17	40.00	10.83	100	214	VERTICAL
2	40.13	-15.82	30.08	40.00	9.92	100	113	VERTICAL
3	240.01	-12.54	38.46	46.00	7.54	386	144	HORIZONTAL
4	480.00	-2.54	38.16	46.00	7.84	254	164	HORIZONTAL
5	600.01	1.24	37.04	46.00	8.96	258	194	HORIZONTAL
6	840.01	7.21	37.71	46.00	8.29	376	224	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


**Radiated Emissions – File up/down mode**



243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel +82-31-3236008,9  
Fax:+82-31-3236010

EUT/Model No.: NWP-F100E TEST MODE: File Up/Down mode

Temp Humi : 31 / 63 Tested by: Ko Gun

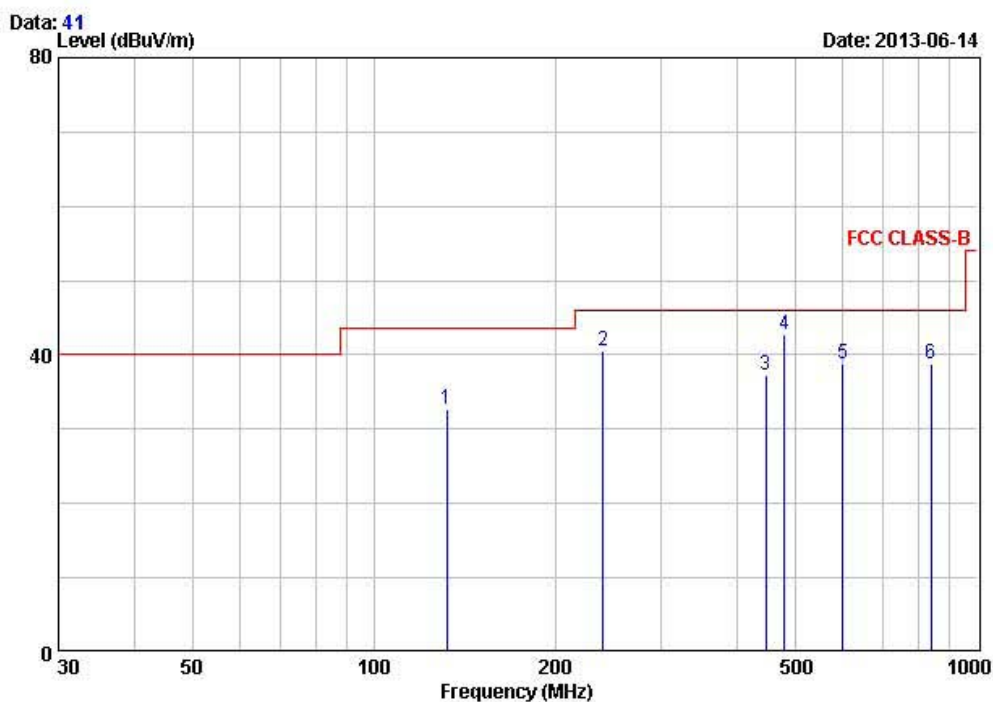

Peak	Freq MHz	Reading dBuV/m	C.F dB/m	Result dBuV/m	Limit QP dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1	132.16	46.40	-13.65	32.75	43.50	10.75	400	219	HORIZONTAL
2	240.01	53.00	-12.54	40.46	46.00	5.54	376	246	HORIZONTAL
3	446.59	40.80	-3.63	37.17	46.00	8.83	296	113	HORIZONTAL
4	480.00	45.30	-2.54	42.76	46.00	3.24	247	14	HORIZONTAL
5	600.01	37.50	1.24	38.74	46.00	7.26	246	119	HORIZONTAL
6	840.01	31.50	7.21	38.71	46.00	7.29	362	118	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.3.8 AC Conducted Emissions

**Procedure:**

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**Measurement Data: Complies**

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit
- It gave the worse case emissions

**Minimum Standard: FCC Part 15.207(a)/EN 55022**

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz


**Radiated Emissions – Bluetooth+Charging mode - LINE**



243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel +82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : NWP-F100E Phase : LINE  
 Test Mode : Bluetooth+Charging mode Test Power : 120 / 60  
 Temp./Humi. : 24 / 54 Test Engineer : PARK H W

Data: 334 File: C:\Conducted Data\2013\LTA\_Conduction\_1306-1.EMI (536) Date: 06-19-2013

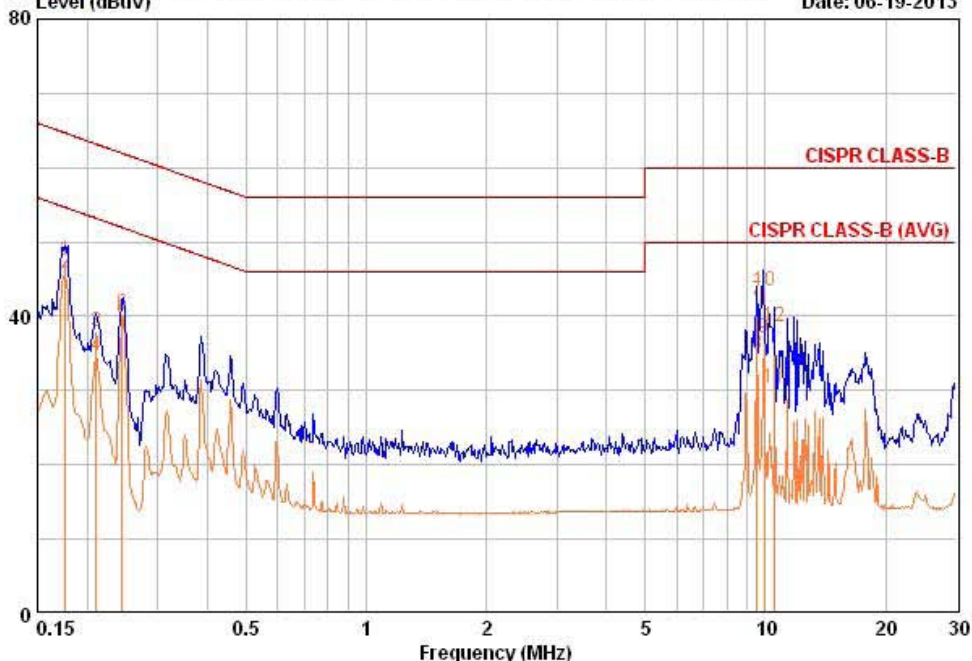

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.176	38.05	36.15	9.58	47.63	45.73	64.67	54.67	17.05	8.95
0.210	28.35	25.15	9.58	37.93	34.73	63.21	53.21	25.28	18.48
0.244	30.85	29.35	9.58	40.43	38.93	61.96	51.96	21.53	13.03
9.528	32.18	25.08	9.81	41.99	34.89	60.00	50.00	18.01	15.11
9.916	33.68	27.28	9.80	43.48	37.08	60.00	50.00	16.52	12.92
10.572	28.68	20.58	9.79	38.48	30.38	60.00	50.00	21.52	19.62

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


**Radiated Emissions – Bluetooth+Charging mode - NEUTRAL**



243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel +82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : NWP-F100E	Phase : NEUTRAL
Test Mode : Bluetooth+Charging mode	Test Power : 120 / 60
Temp./Humi. : 24 / 54	Test Engineer : PARK H W

Data: 336 File: C:\Conducted Data\2013\LTA\_Conduction\_1306-1.EMI (536) Date: 06-19-2013

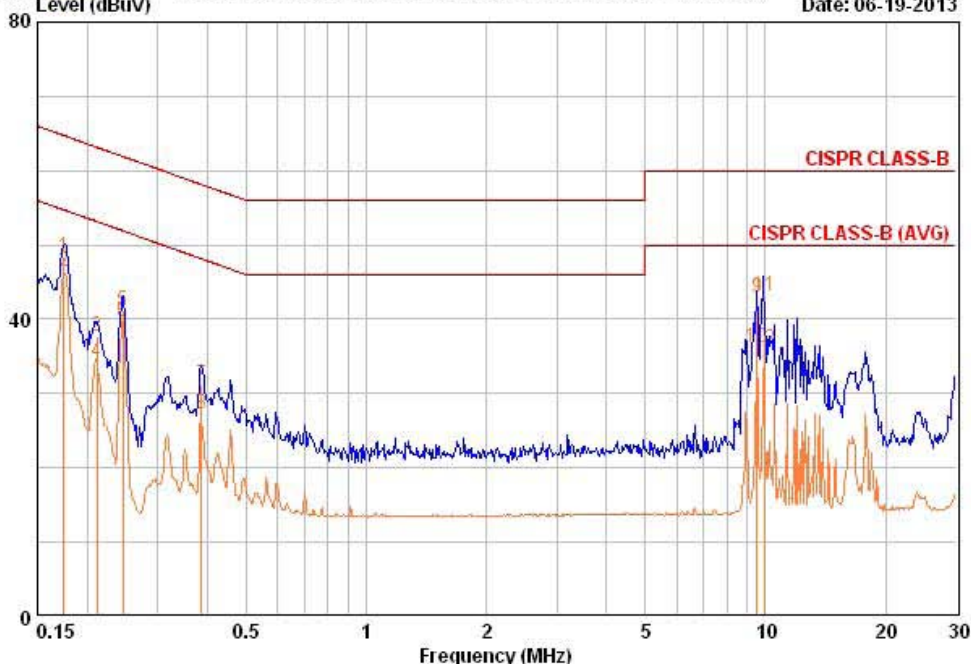

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.175	38.75	36.85	9.59	48.34	46.44	64.72	54.72	16.38	8.28
0.211	28.15	24.75	9.57	37.72	34.32	63.17	53.17	25.44	18.84
0.245	31.65	30.15	9.58	41.23	39.73	61.92	51.92	20.70	12.20
0.387	21.65	17.65	9.60	31.25	27.25	58.13	48.13	26.88	20.88
9.527	33.08	26.38	9.76	42.84	36.14	60.00	50.00	17.16	13.86
9.917	33.48	26.18	9.77	43.25	35.95	60.00	50.00	16.75	14.05

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


**Radiated Emissions – File up/down mode - LINE**



243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel +82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : NWP-F100E	Phase : LINE
Test Mode : File Up/Down mode	Test Power : 120 / 60
Temp./Humi. : 24 / 54	Test Engineer : PARK H W

Data: 340 Level (dBuV) File: C:\Conducted Data\2013\LTA\_Conduction\_1306-1.EMI (536) Date: 06-19-2013

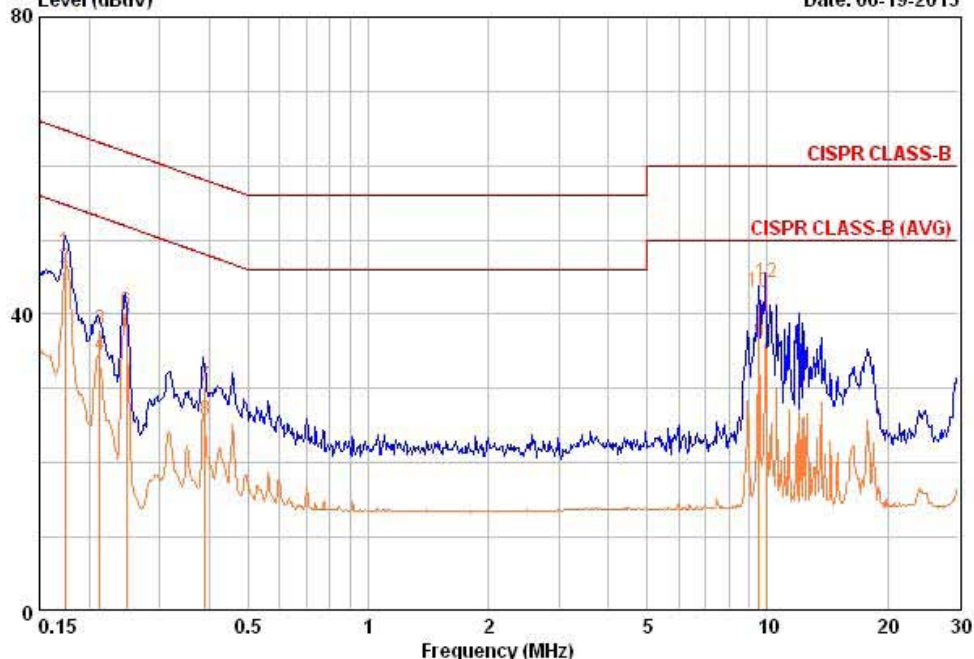

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.174	38.75	36.65	9.58	48.33	46.23	64.77	54.77	16.44	8.54
0.212	28.25	24.85	9.58	37.83	34.43	63.13	53.13	25.30	18.70
0.248	30.85	29.35	9.58	40.43	38.93	61.82	51.82	21.39	12.89
0.390	20.65	16.15	9.58	30.23	25.73	58.06	48.06	27.83	22.33
9.526	33.18	26.38	9.81	42.99	36.19	60.00	50.00	17.01	13.81
9.920	34.48	26.18	9.80	44.28	35.98	60.00	50.00	15.72	14.02

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss




**Radiated Emissions – – File up/down mode - NEUTRAL**



243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel +82-31-3236008,9  
Fax:+82-31-3236010

EUT / Model No. : NWP-F100E	Phase : NEUTRAL
Test Mode : File Up/Down mode	Test Power : 120 / 60
Temp./Humi. : 24 / 54	Test Engineer : PARK H W

Data: 338 File: C:\Conducted Data\2013\LTA\_Conduction\_1306-1.EMI (536) Date: 06-19-2013

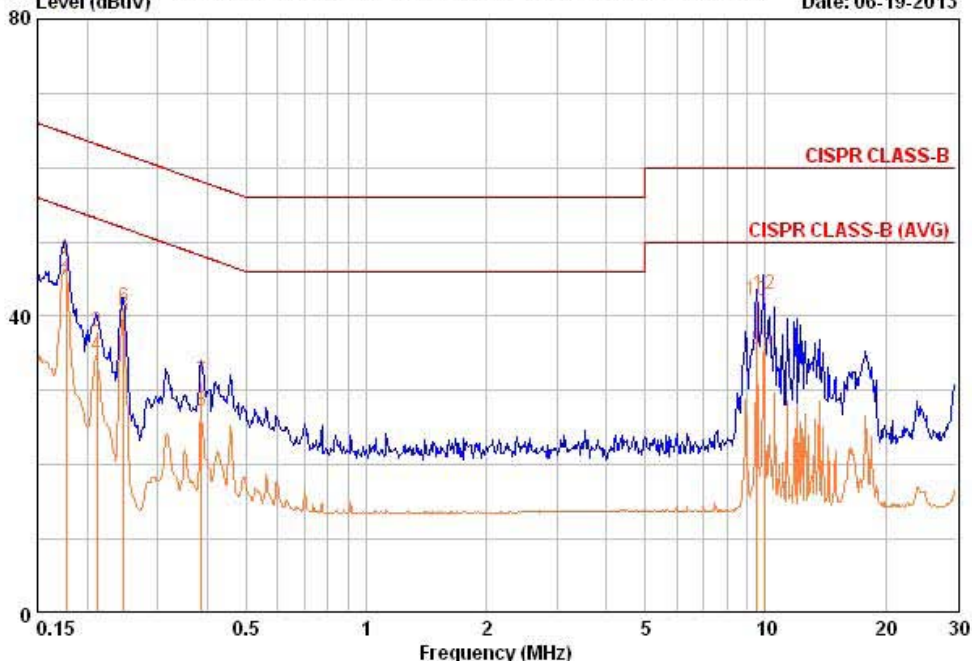

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.177	38.25	36.35	9.59	47.84	45.94	64.63	54.63	16.79	8.69
0.211	28.25	25.05	9.57	37.82	34.62	63.17	53.17	25.34	18.54
0.247	31.65	30.35	9.58	41.23	39.93	61.86	51.86	20.63	11.93
0.387	21.65	17.65	9.60	31.25	27.25	58.13	48.13	26.88	20.88
9.525	32.38	25.78	9.76	42.14	35.54	60.00	50.00	17.86	14.46
9.921	33.18	25.68	9.77	42.95	35.45	60.00	50.00	17.05	14.55

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

**TEST EQUIPMENT USED FOR TESTS**

	Description	Model No.	Serial No.	Manufacturer	Expiration date of Calibration
1	Spectrum Analyzer (~30GHz)	FSV-30	100757	R&S	2014-01-15
2	Spectrum Analyzer (~2.9GHz)	8594E	3649A03649	HP	2014-03-26
3	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	2014-03-25
4	Signal Generator (1~20GHz)	83711B	US34490456	HP	2014-03-25
5	Attenuator (3dB)	8491A	37822	HP	2014-09-22
6	Attenuator (10dB)	8491A	63196	HP	2014-09-22
7	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	2014-03-25
8	EMI Test Receiver (~7GHz)	ESCI7	100722	R&S	2013-09-22
9	RF Amplifier (~1.3GHz)	8447D	2439A09058	HP	2014-09-22
10	RF Amplifier (1~18GHz)	8449B	3008A02126	HP	2014-03-26
11	Horn Antenna (1~18GHz)	BBHA 9120D	9120D122	SCHWARZBECK	2014-12-21
12	Horn Antenna (18 ~ 40GHz)	SAS-574	154	SCHWARZBECK	2014-03-15
13	Horn Antenna (18 ~ 40GHz)	SAS-574	155	SCHWARZBECK	2014-03-15
14	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	2014-09-20
15	Hygro-Thermograph	THB-36	0041557-01	ISUZU	2013-09-26
16	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-
17	Power Divider	11636A	6243	HP	2014-09-22
18	DC Power Supply	6622A	3448A03079	HP	-
19	Frequency Counter	5342A	2826A12411	HP	2014-03-25
20	Power Meter	EPM-441A	GB32481702	HP	2014-03-25
21	Power Sensor	8481A	US41030291	HP	2013-09-22
22	Audio Analyzer	8903B	3729A18901	HP	2013-09-22
23	Modulation Analyzer	8901B	3749A05878	HP	2013-09-22
24	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	2013-09-22
25	Stop Watch	HS-3	601Q09R	CASIO	2014-03-26
26	LISN	ENV216	100408	R&S	2013-09-22
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	2014-06-27
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-
30	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2014-12-14