

FCC Part 15C


Measurement and Test Report

For

Bulltech Electronic Products S.L

Gran Via, 64, 2-1, 28013 Madrid, Spain.

FCC ID: 2AAM3SYRENI500

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>Mobile phone</u>
Tested Model:	<u>Syreni 500</u>
Report No.:	<u>STR13128307I-1</u>
Tested Date:	<u>2014-01-02 to 2014-01-04</u>
Issued Date:	<u>2014-01-10</u>
Tested By:	<u>Silin Chen / Engineer</u> 
Reviewed By:	<u>Lahm Peng / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> 
Prepared By:	Shenzhen SEM.Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE.....	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE.....	10
4.2 EVALUATION INFORMATION	10
5. FREQUENCY HOPPING SYSTEM REQUIREMENTS	11
5.1 STANDARD APPLICABLE.....	11
5.2 FREQUENCY HOPPING SYSTEM.....	11
5.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	12
6. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION	13
6.1 STANDARD APPLICABLE.....	13
6.2 TEST EQUIPMENT LIST AND DETAILS	13
6.3 TEST PROCEDURE.....	13
6.4 ENVIRONMENTAL CONDITIONS	13
6.5 SUMMARY OF TEST RESULTS/PLOTS	14
7. DWELL TIME OF HOPPING CHANNEL.....	18
7.1 STANDARD APPLICABLE.....	18
7.2 TEST EQUIPMENT LIST AND DETAILS	18
7.3 TEST PROCEDURE.....	18
7.4 ENVIRONMENTAL CONDITIONS	18
7.5 SUMMARY OF TEST RESULTS/PLOTS	19
8. 20DB BANDWIDTH	29
8.1 STANDARD APPLICABLE.....	29
8.2 TEST EQUIPMENT LIST AND DETAILS	29
8.3 TEST PROCEDURE.....	29
8.4 ENVIRONMENTAL CONDITIONS	29
8.5 SUMMARY OF TEST RESULTS/PLOTS	29
9. POWER SPECTRAL DENSITY	33
9.1 STANDARD APPLICABLE.....	33
9.2 TEST EQUIPMENT LIST AND DETAILS	33
9.3 TEST PROCEDURE.....	33
9.4 ENVIRONMENTAL CONDITIONS	33
9.5 SUMMARY OF TEST RESULTS/PLOTS	34
10. 6DB BANDWIDTH	35
10.1 STANDARD APPLICABLE.....	35
10.2 TEST EQUIPMENT LIST AND DETAILS	35
10.3 TEST PROCEDURE.....	35
10.4 ENVIRONMENTAL CONDITIONS	35
10.5 SUMMARY OF TEST RESULTS/PLOTS	36
11. RF OUTPUT POWER	39
11.1 STANDARD APPLICABLE.....	39
11.2 TEST EQUIPMENT LIST AND DETAILS	39
11.3 TEST PROCEDURE.....	39
11.4 ENVIRONMENTAL CONDITIONS	39
11.5 SUMMARY OF TEST RESULTS/PLOTS	40

12. FIELD STRENGTH OF SPURIOUS EMISSIONS	41
12.1 MEASUREMENT UNCERTAINTY	41
12.2 STANDARD APPLICABLE.....	41
12.3 TEST EQUIPMENT LIST AND DETAILS	41
12.4 TEST PROCEDURE.....	42
12.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	42
12.6 ENVIRONMENTAL CONDITIONS	43
12.7 SUMMARY OF TEST RESULTS/PLOTS	43
13. OUT OF BAND EMISSIONS.....	51
13.1 STANDARD APPLICABLE.....	51
13.2 TEST EQUIPMENT LIST AND DETAILS	51
13.3 TEST PROCEDURE.....	51
13.4 ENVIRONMENTAL CONDITIONS	52
13.5 SUMMARY OF TEST RESULTS/PLOTS	52
14. CONDUCTED EMISSIONS	55
14.1 MEASUREMENT UNCERTAINTY	55
14.2 TEST EQUIPMENT LIST AND DETAILS	55
14.3 TEST PROCEDURE.....	55
14.4 BASIC TEST SETUP BLOCK DIAGRAM.....	55
14.5 ENVIRONMENTAL CONDITIONS	56
14.6 TEST RECEIVER SETUP	56
14.7 SUMMARY OF TEST RESULTS/PLOTS	56
14.8 CONDUCTED EMISSIONS TEST DATA.....	56

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Bulltech Electronic Products S.L
Address of applicant: Gran Via, 64, 2-1, 28013 Madrid, Spain.

Manufacturer: Gipo Holdings Limited
Address of manufacturer: East 1201, Phase II, Tian'an Hi-tech Plaza, Futian District, Shenzhen, China

General Description of EUT	
Product Name:	Mobile phone
Brand Name:	SZENIO, GIPO, AKAI, XION, Everaj
Model No.:	Syreni 500
Adding Mode:	PHA-5880, XI-CE600, U5, U6, Syreni 550
Software Version:	Hugiga HWA860 20131214-190427
Hardware Version:	A25_MB_V2.0
Rated Voltage:	DC 3.7V
Battery:	1900mAh
Power Adaptor:	Input 100-240V, 50/60Hz, Output DC 5V
Device Category:	Portable Device
<i>The EUT is GSM850/900/PCS1800/1900, WCDMA Band I, Band V network mobile phone. the mobile phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850 and GSM1900 and Bluetooth, Wi-Fi, and camera functions. The EUT has two SIM sockets while with the same RF circuit and function controlled by the firmware software. For more information see the following datasheet</i>	
<i>The test data is gathered from a production sample, provided by the manufacturer. The other model listed in the report has different appearance only of Syreni 500 without circuit and electronic construction changed, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.0
Frequency Range:	2402-2480MHz
RF Output Power:	4.47dBm (Conducted)
Data Rate:	GFSK, Pi/4 DQPSK, 8DPSK
Modulation:	1Mbps, 2Mbps, 3Mbps
Quantity of Channels:	79/39
Channel Separation:	1MHz/2MHz
Type of Antenna:	Internal Antenna
Antenna Gain:	0.3dBi
Lowest Internal Frequency of EUT:	32.768kHz

1.2 Test Standards

The following report is prepared on behalf of the Bulltech Electronic Products S.L in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice DA 00-705 for frequency hopping spread spectrum systems shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	
TM1	Low Channel	2402MHz	
TM2	Middle Channel	2441MHz	
TM3	High Channel	2480MHz	
TM4	Hopping	2402-2480MHz	

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	679
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021
Normal mode: the Bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case.			

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.2	Shielded	Without Ferrite
Earphone	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)	Channel Separation	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§ 15.247(a)	20dB Bandwidth	Compliant
§ 15.247(b)(1)	Power Output	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§ 15.247(a)(1)	Frequency Hopping Sequence	Compliant
§ 15.247(g), (h)	Frequency Hopping System	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Frequency Hopping System Requirements

5.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

5.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

5.3 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6. Quantity of Hopping Channels and Channel Separation

6.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

6.3 Test Procedure

According to the DA 00-705, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

RBW = 100kHz, VBW = 100kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels

Other setting as above


Allow the trace to stabilize, Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


6.5 Summary of Test Results/Plots

No. of Channel = 79

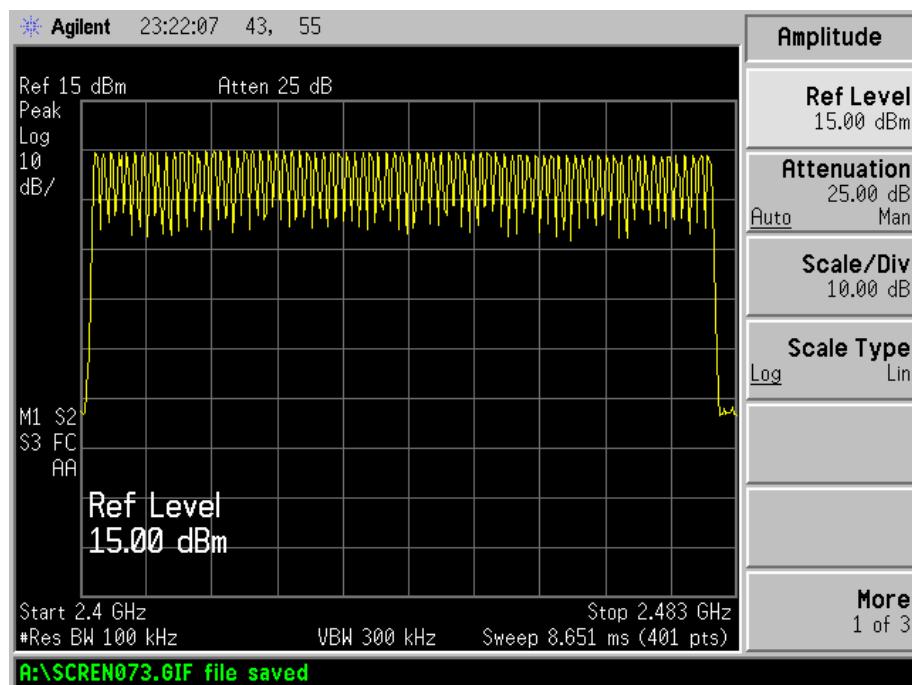


For GFSK mode


Channel Spacing (Low CH=1MHz)

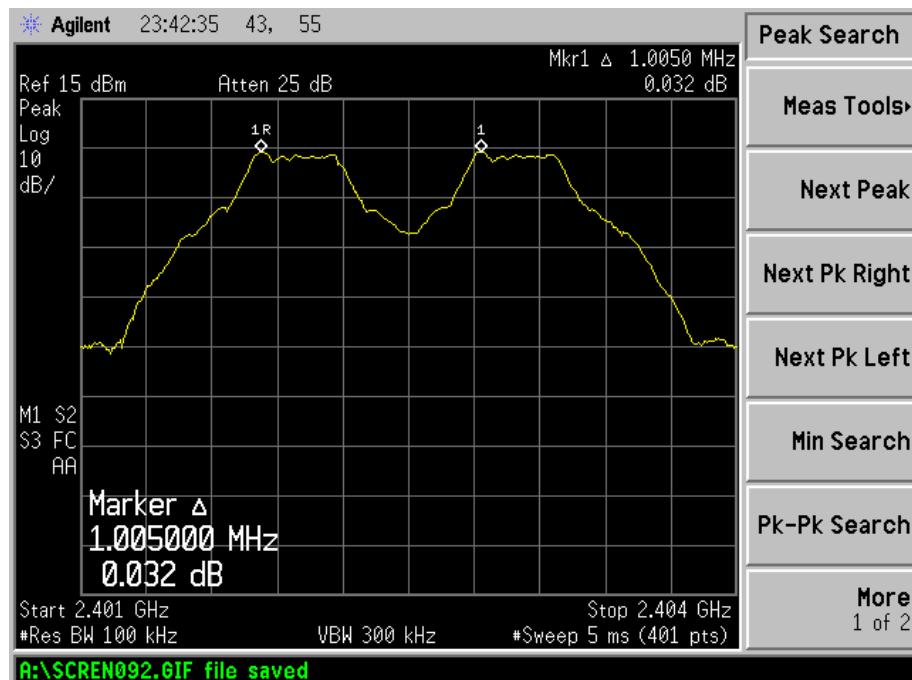

Channel Spacing (Middle CH=1MHz)

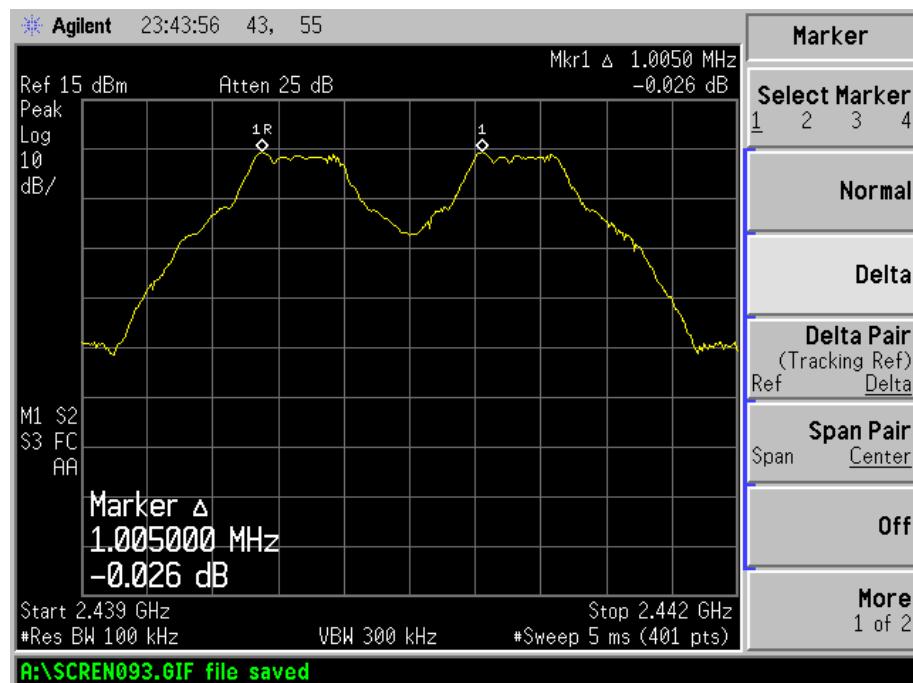


Channel Spacing (High CH=1MHz)

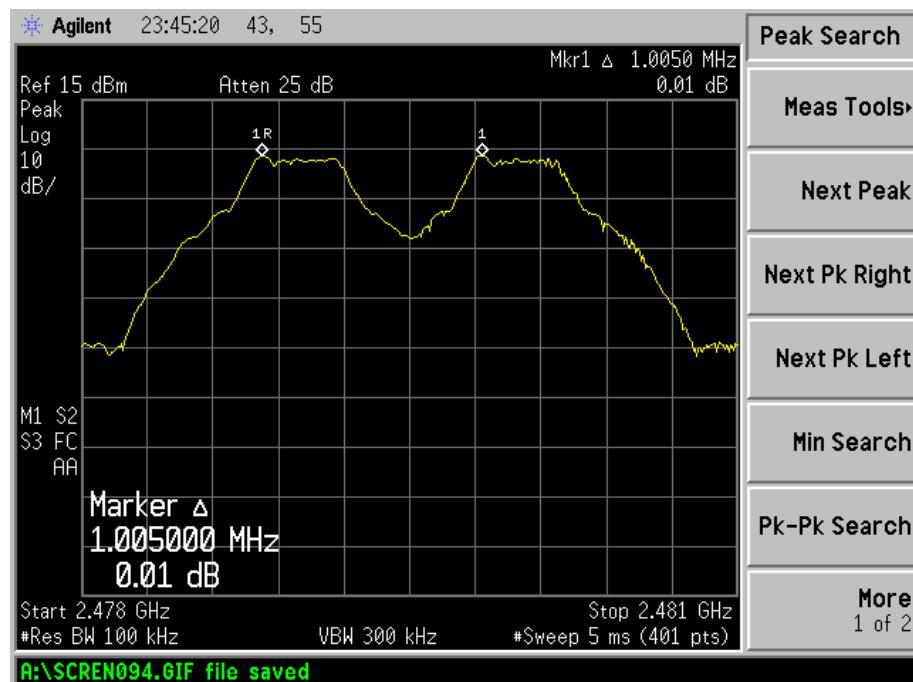


For 8DPSK mode


Channel Spacing (Low CH=1MHz)

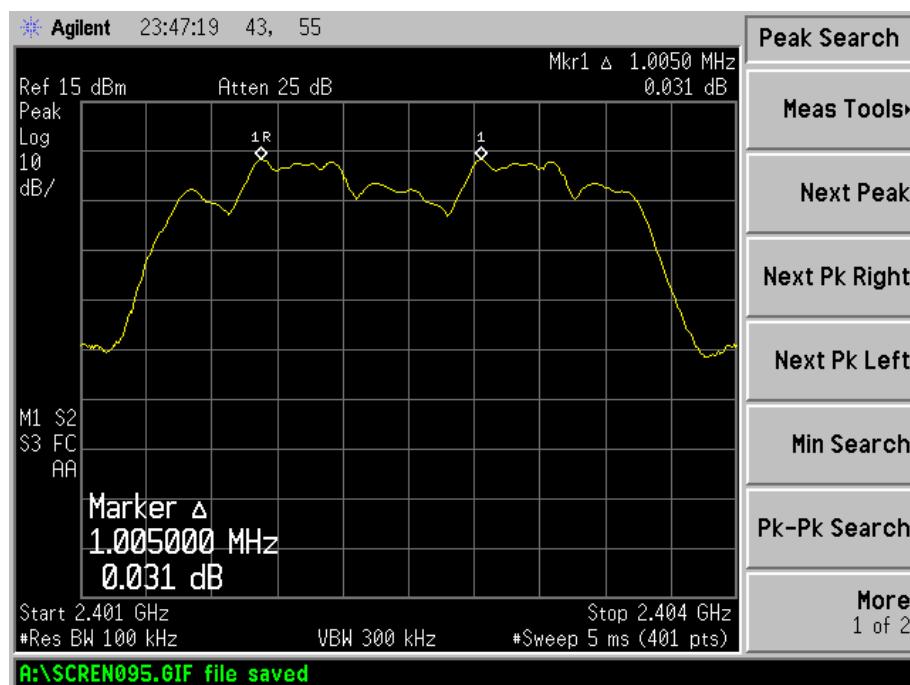

Channel Spacing (Middle CH=1MHz)

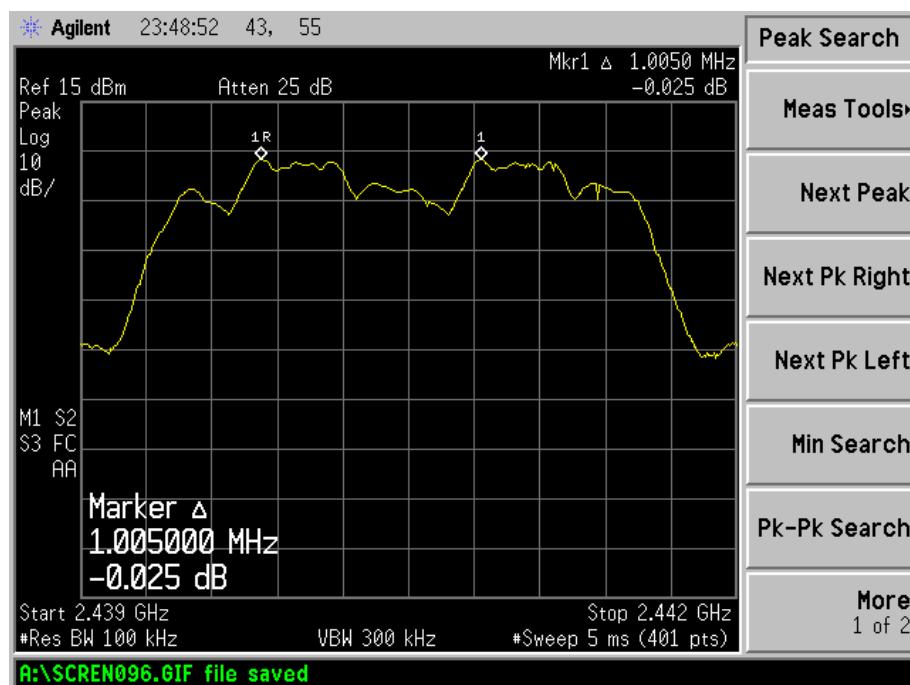

Channel Spacing (High CH=1MHz)

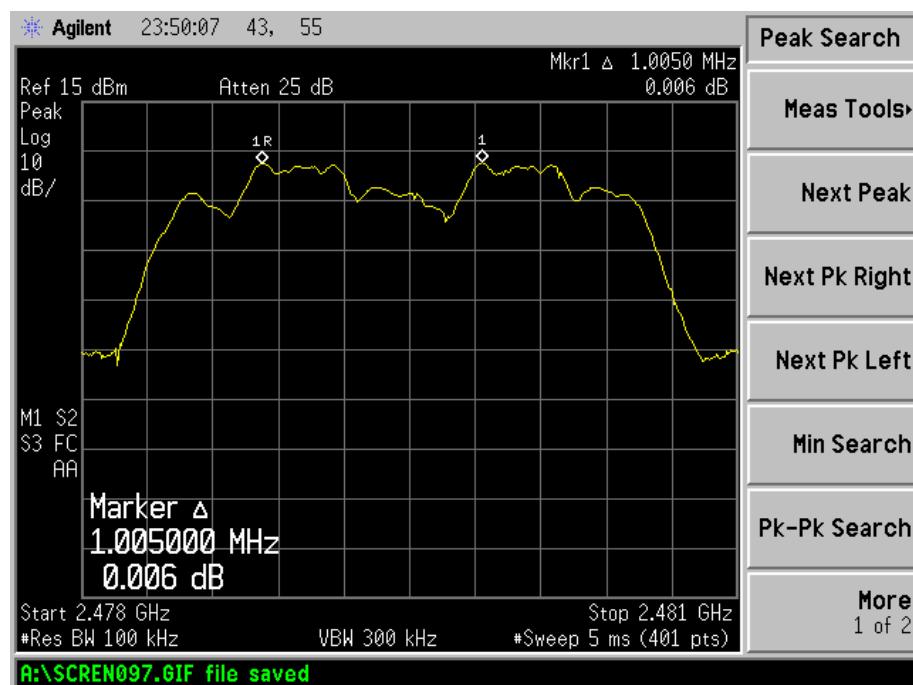

7. Dwell Time of Hopping Channel

7.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

7.3 Test Procedure

According to the DA 00-705, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = zero span, centered on a hopping channel

RBW = 1MHz, VBW = 1MHz

Sweep = auto

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time

7.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).
Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.

The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$


Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period

Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	2402MHz	DH1	0.370	118.40	400
		DH3	1.620	259.20	400
		DH5	2.870	306.13	400
	2441MHz	DH1	0.370	118.40	400
		DH3	1.620	259.20	400
		DH5	2.870	306.13	400
	2480MHz	DH1	0.370	118.40	400
		DH3	1.620	259.20	400
		DH5	2.880	307.20	400
8DPSK	2402MHz	3DH1	0.380	115.20	400
		3DH3	1.630	260.80	400
		3DH5	2.870	306.13	400
	2441MHz	3DH1	0.380	115.20	400
		3DH3	1.630	260.80	400
		3DH5	2.870	306.13	400
	2480MHz	3DH1	0.380	115.20	400
		3DH3	1.620	259.20	400
		3DH5	2.870	306.13	400


Please refer to the test plots as below:

GFSK DH1


Low channel

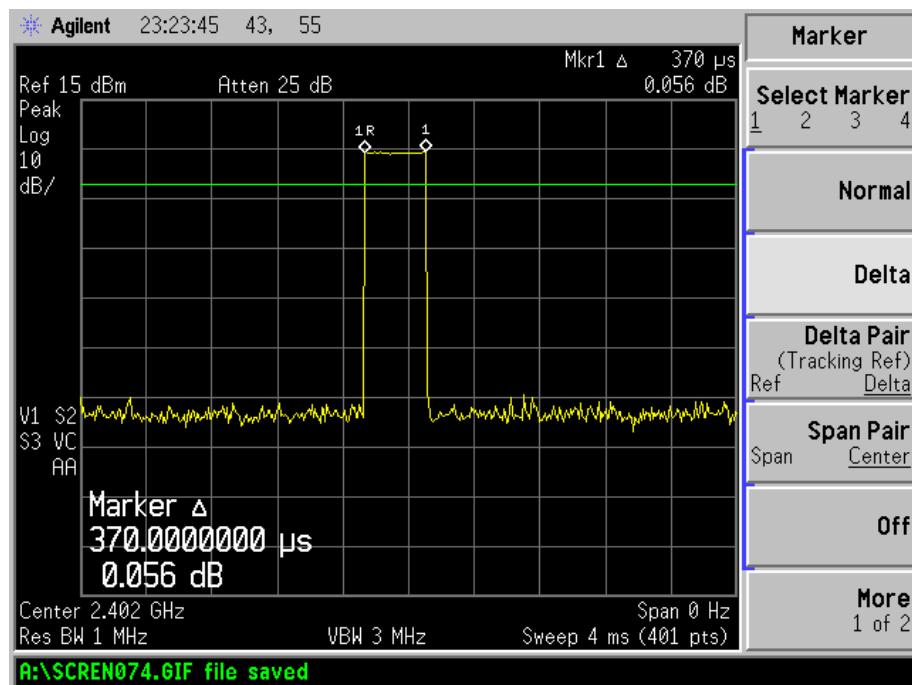

Middle Channel

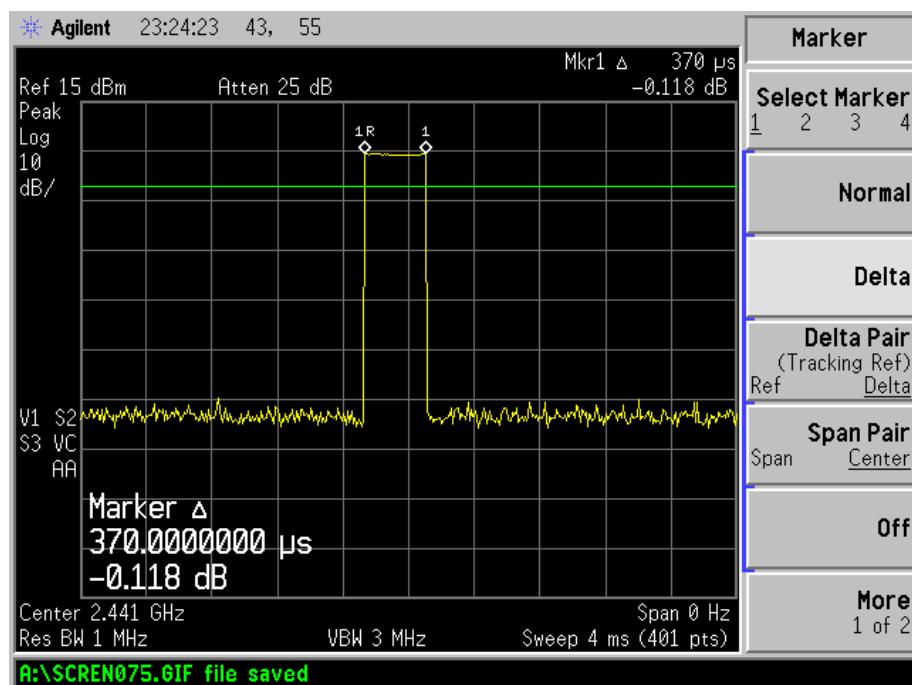


High Channel

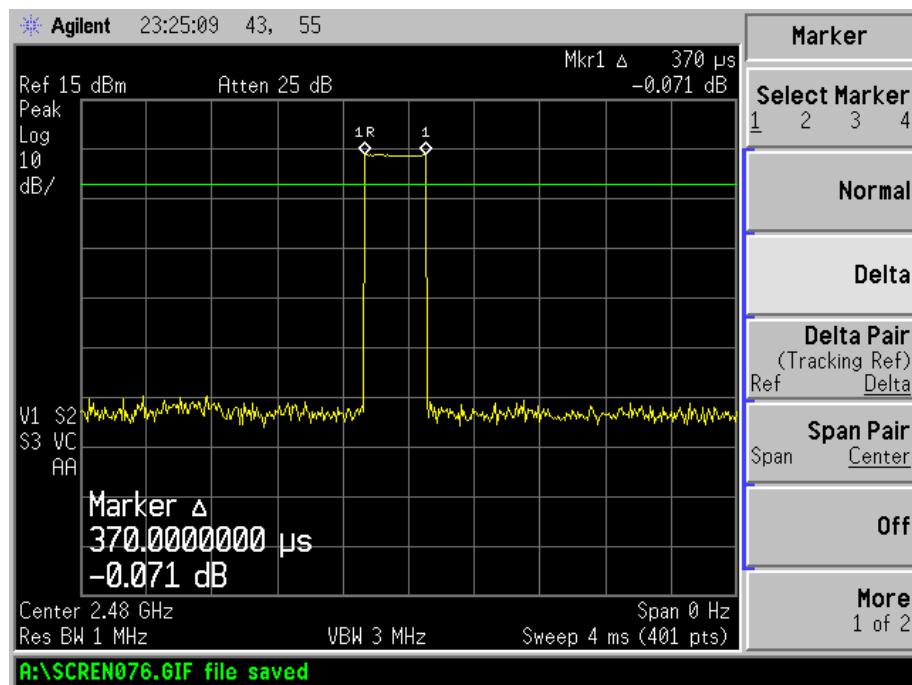


GFSK DH3

Low channel

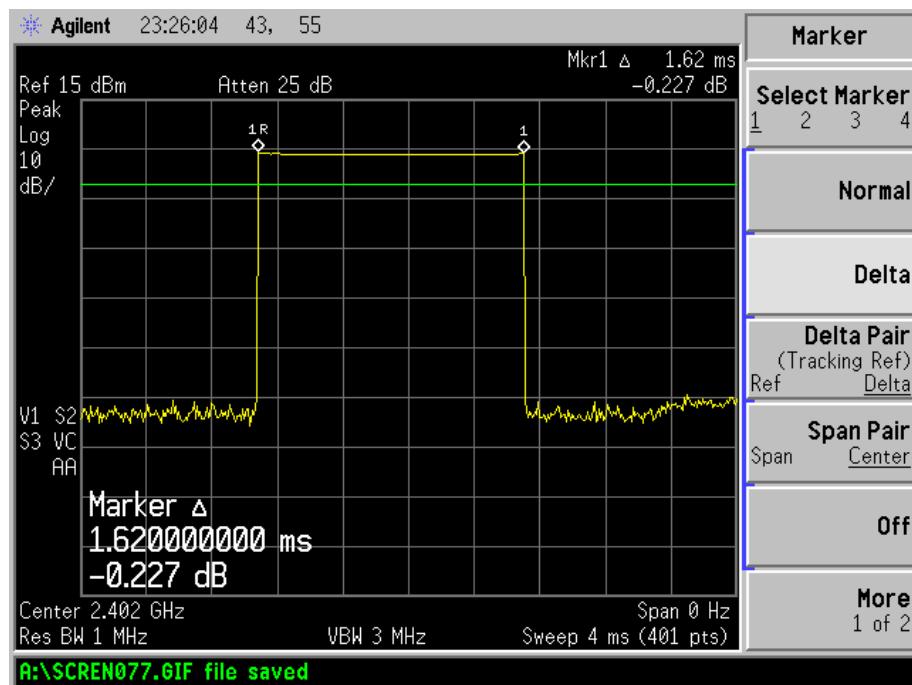


Middle Channel

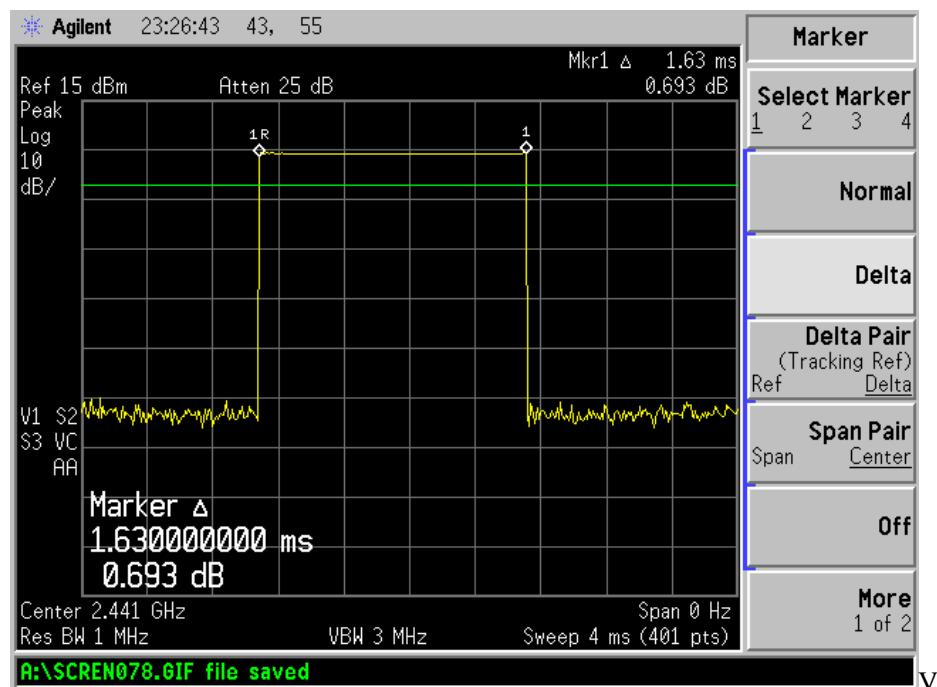


V

High Channel

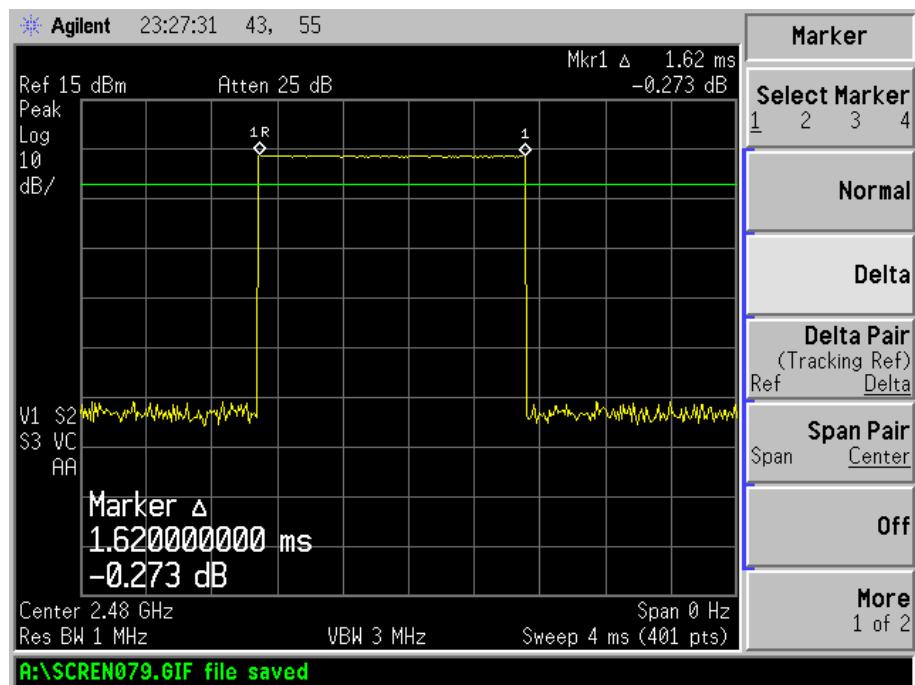


GFSK DH5


Low channel

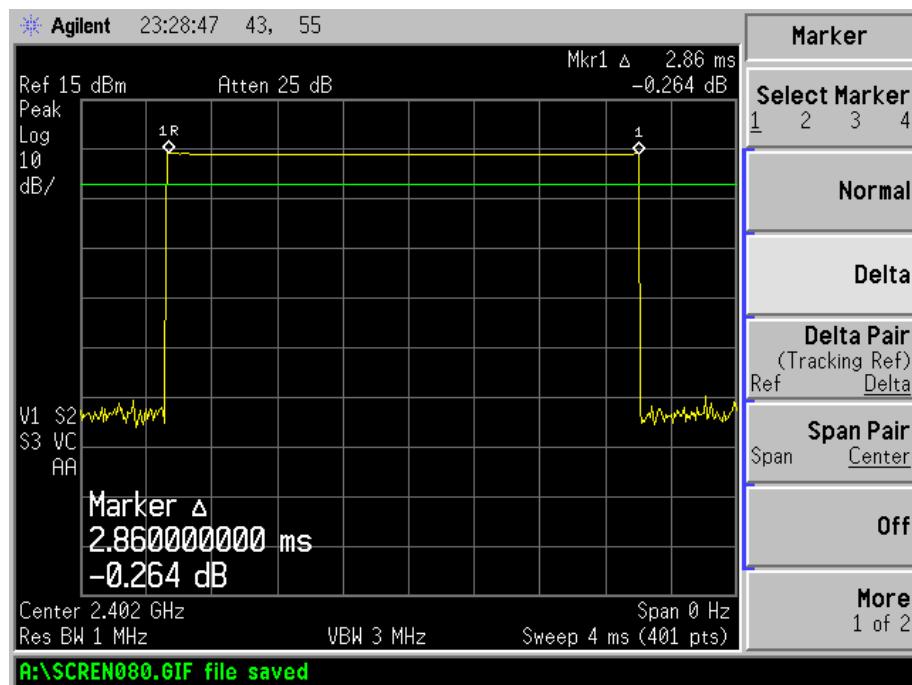

Middle Channel

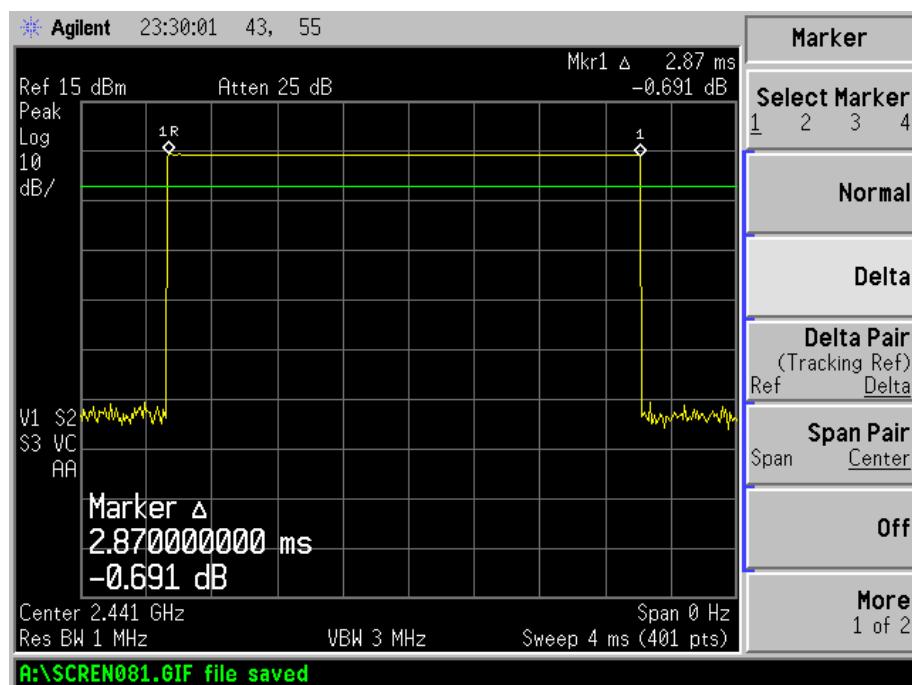


High Channel

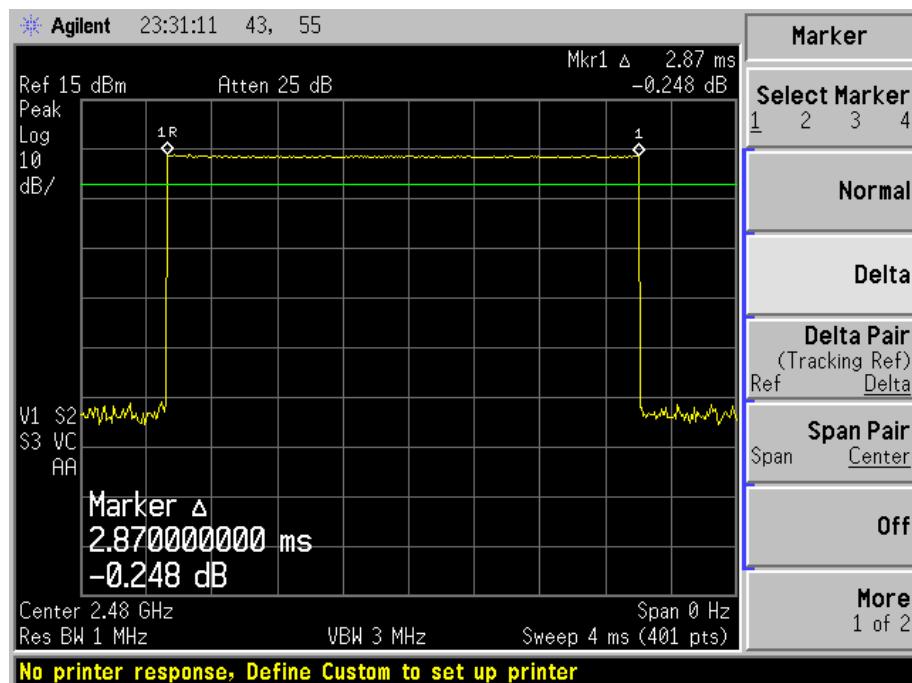


8DPSK 3DH1


Low channel

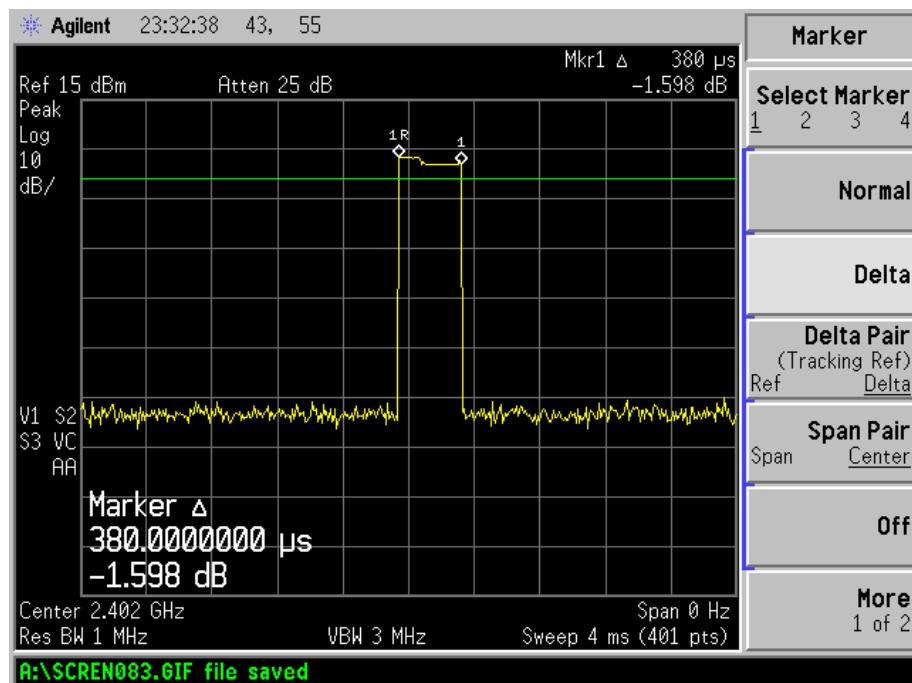

Middle Channel

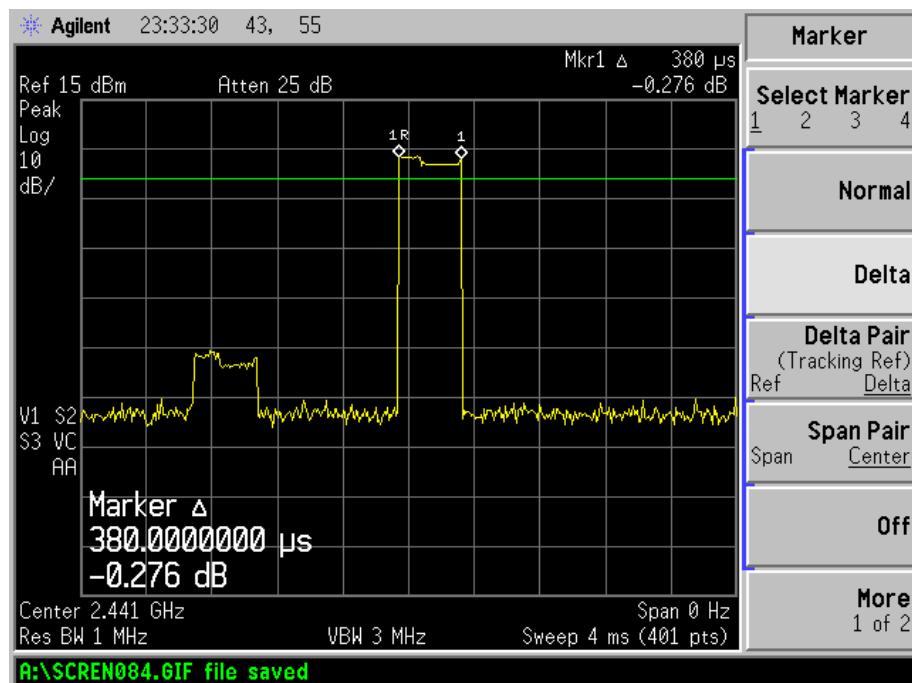


High Channel

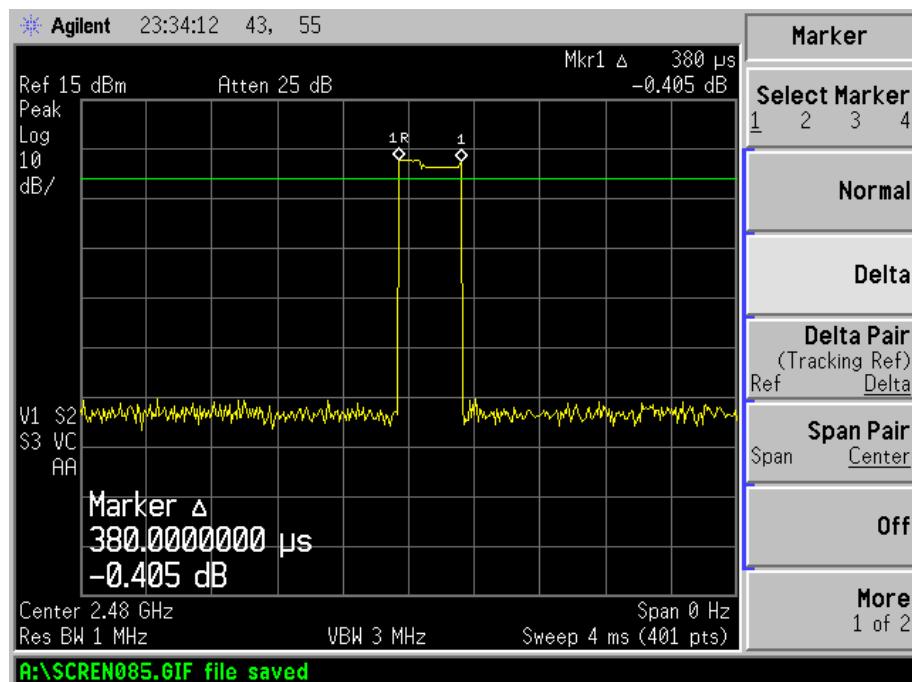


8DPSK 3DH3


Low channel

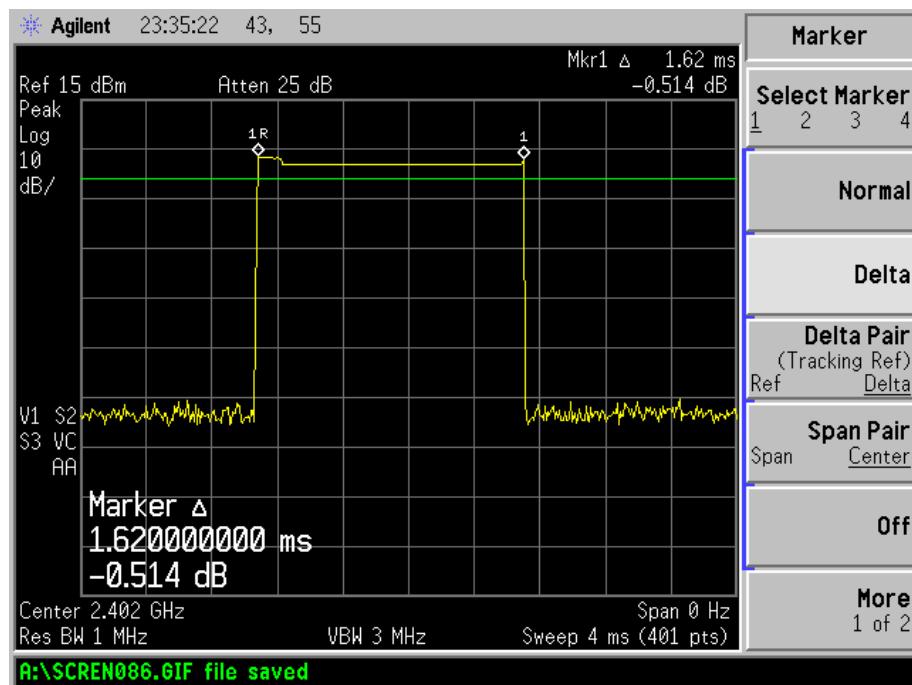

Middle Channel

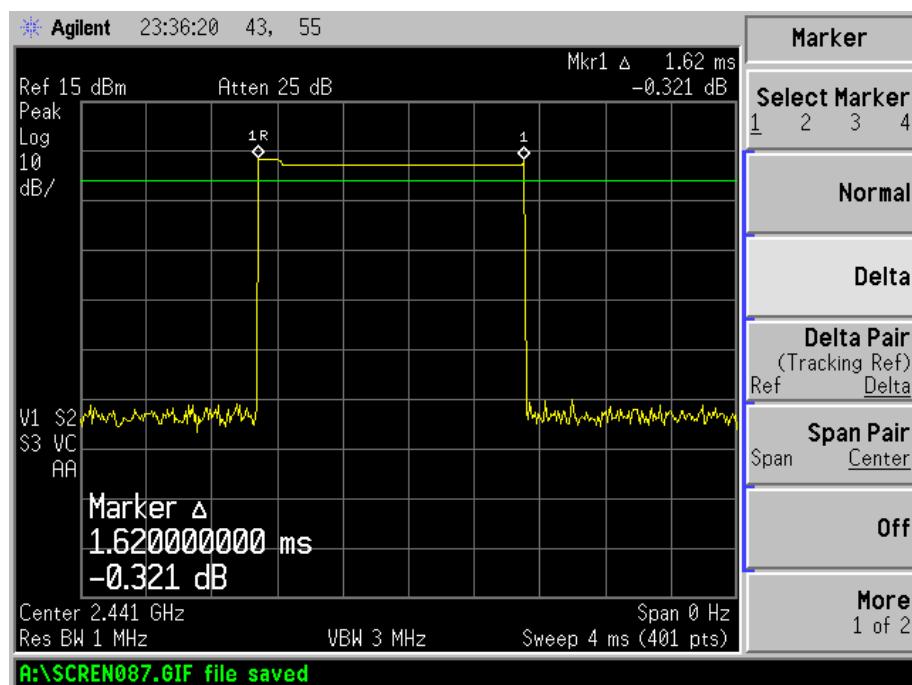


High Channel

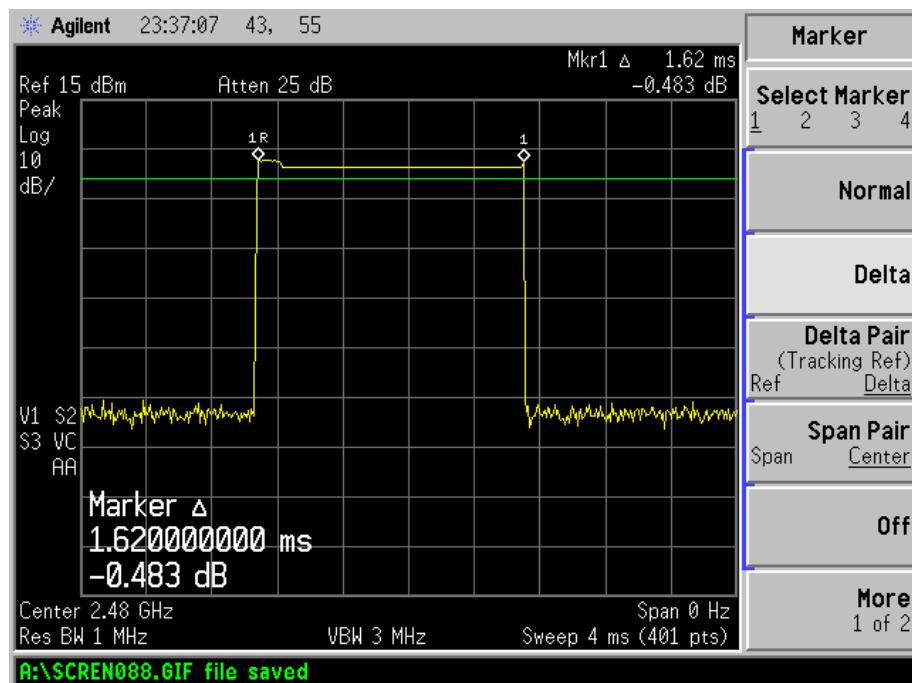


8DPSK 3DH5


Low channel

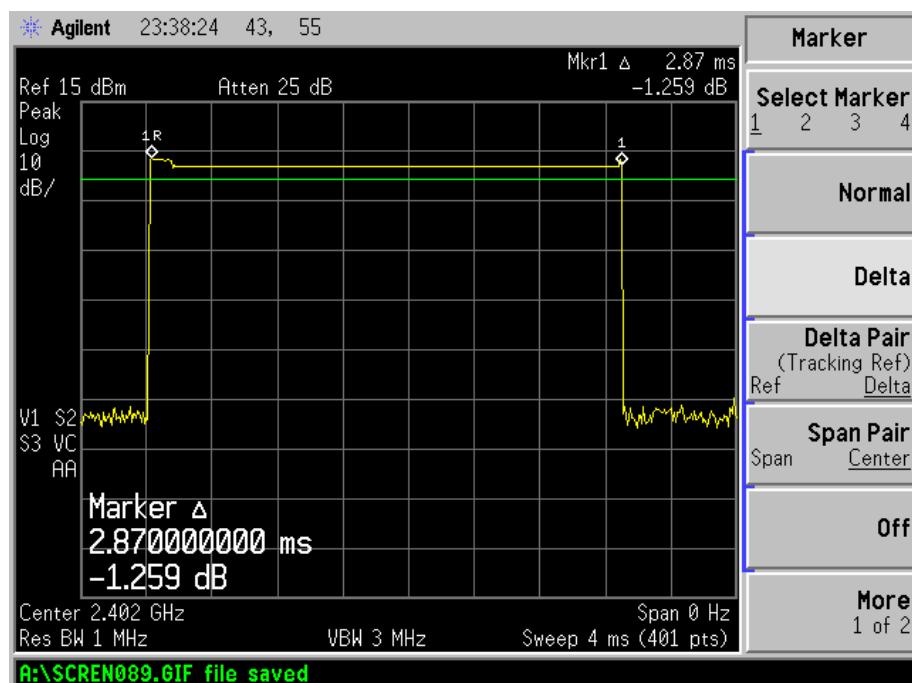

Middle Channel

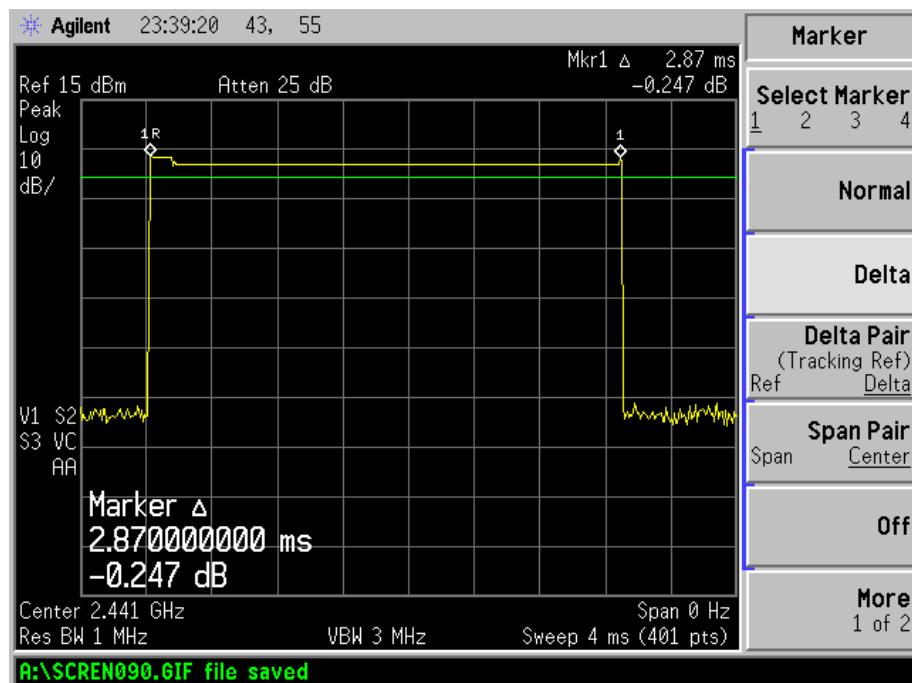

High Channel

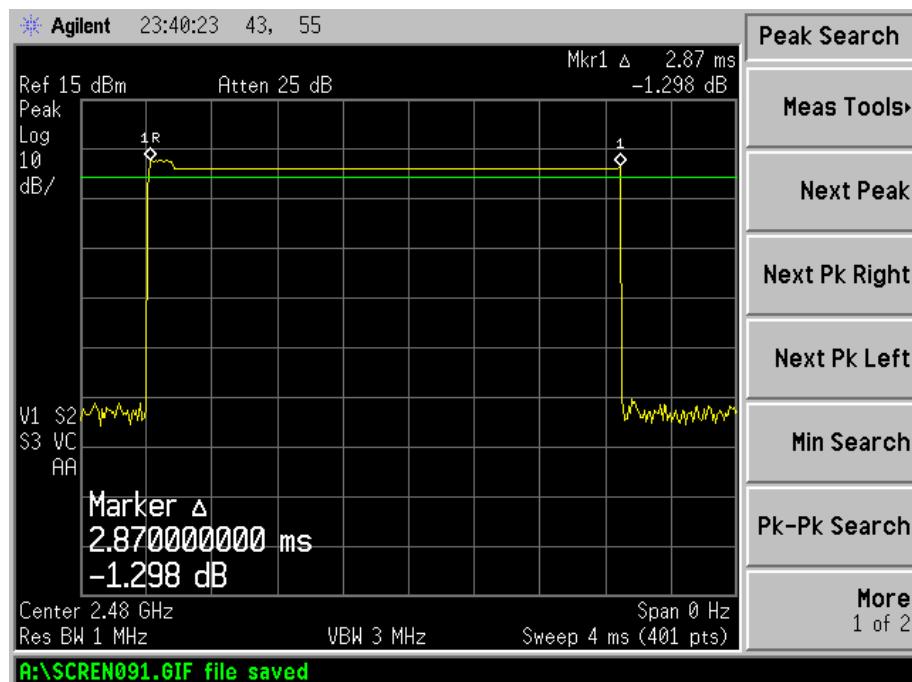

8. 20dB Bandwidth

8.1 Standard Applicable

According to 15.247(a)(1)(iii). For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

8.3 Test Procedure

According to the DA 00-705, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 2MHz, centered on a hopping channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

8.4 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

8.5 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth (GFSK) kHz	20dB Bandwidth (8DPSK) kHz
Low Channel	2402	841	1171
Middle Channel	2441	842	1155
High Channel	2480	847	1167

GFSK Mode


Low Channel:

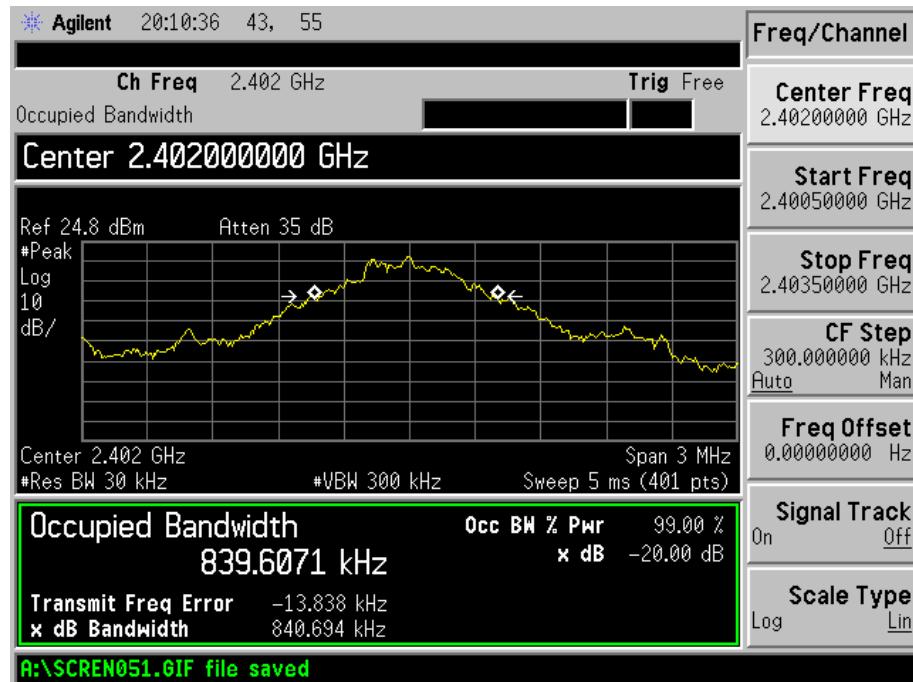

Middle Channel:

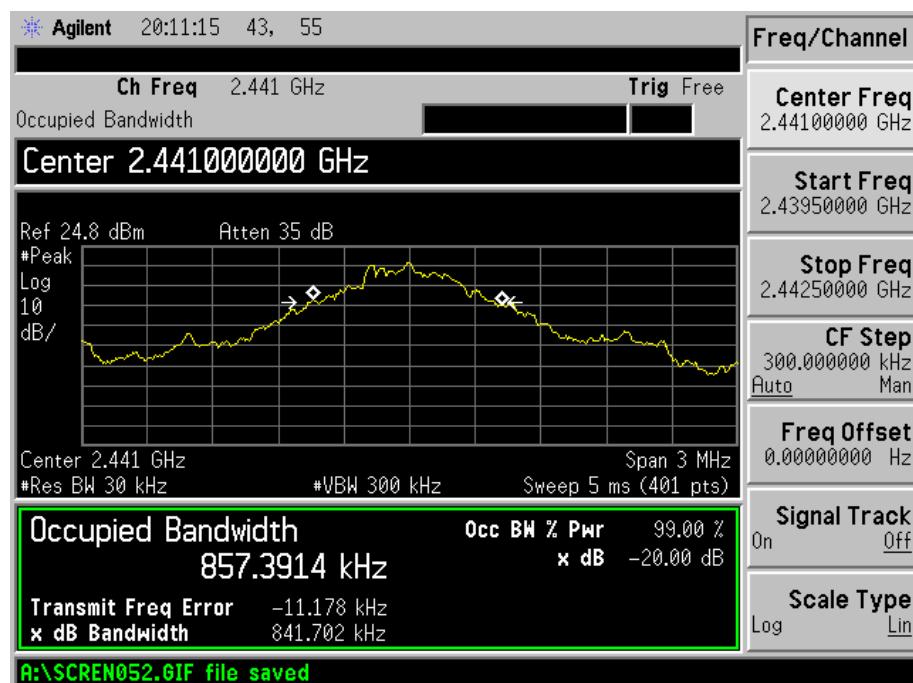


High Channel:

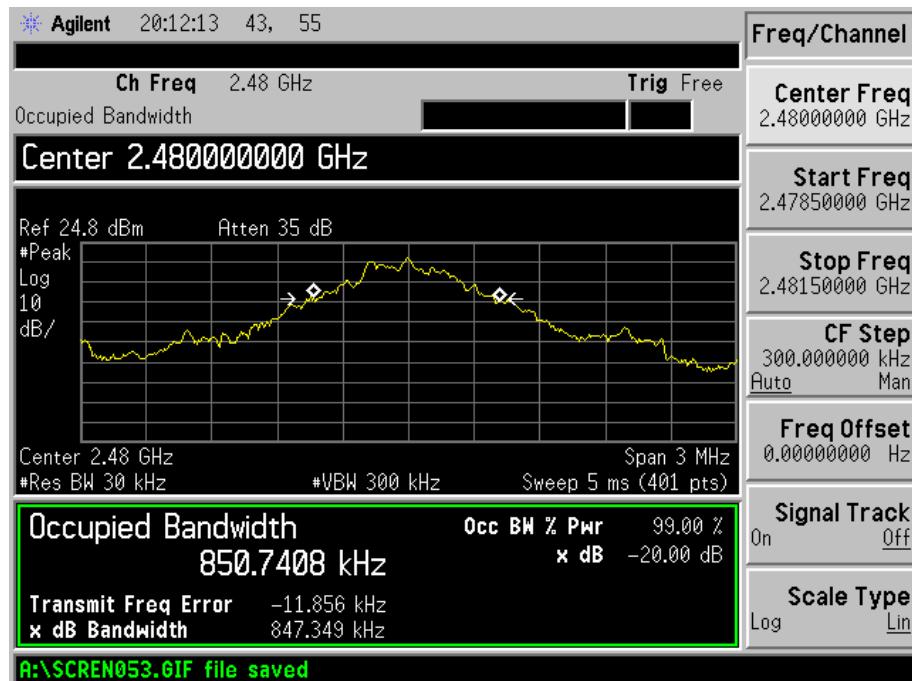


8DPSK Mode


Low Channel:

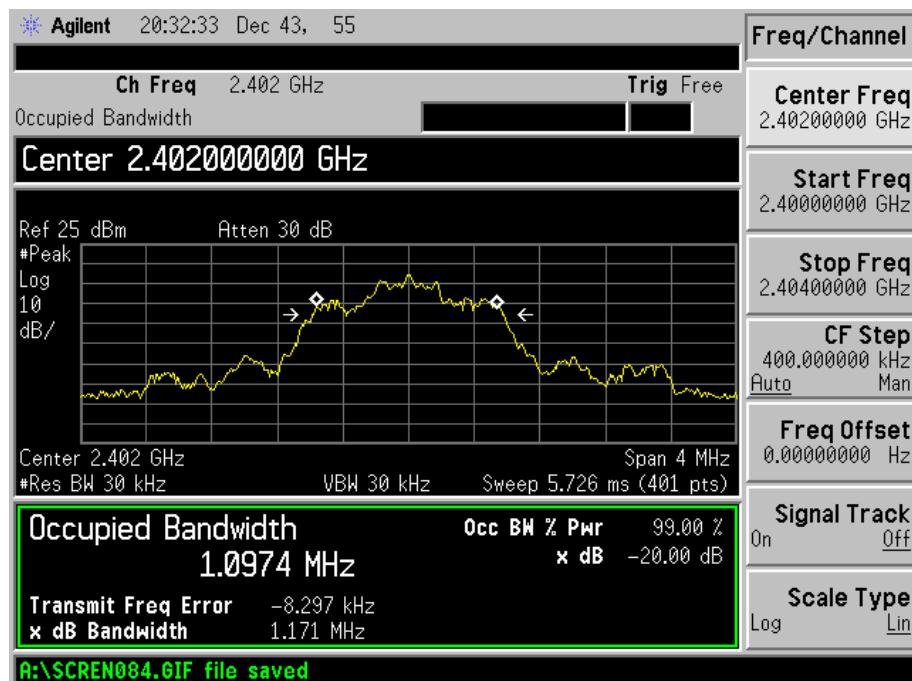

Middle Channel:

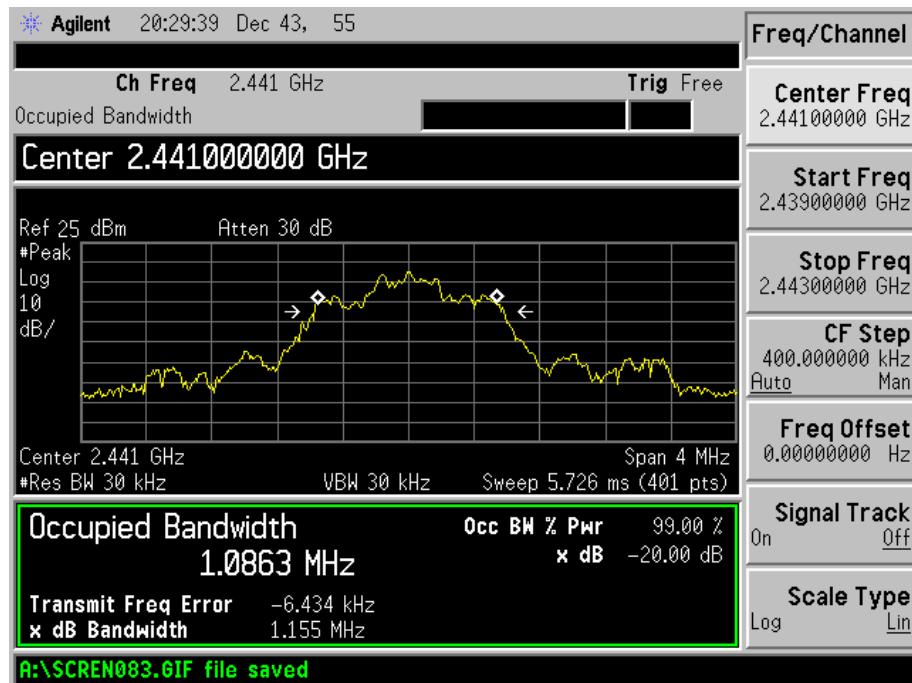

High Channel:

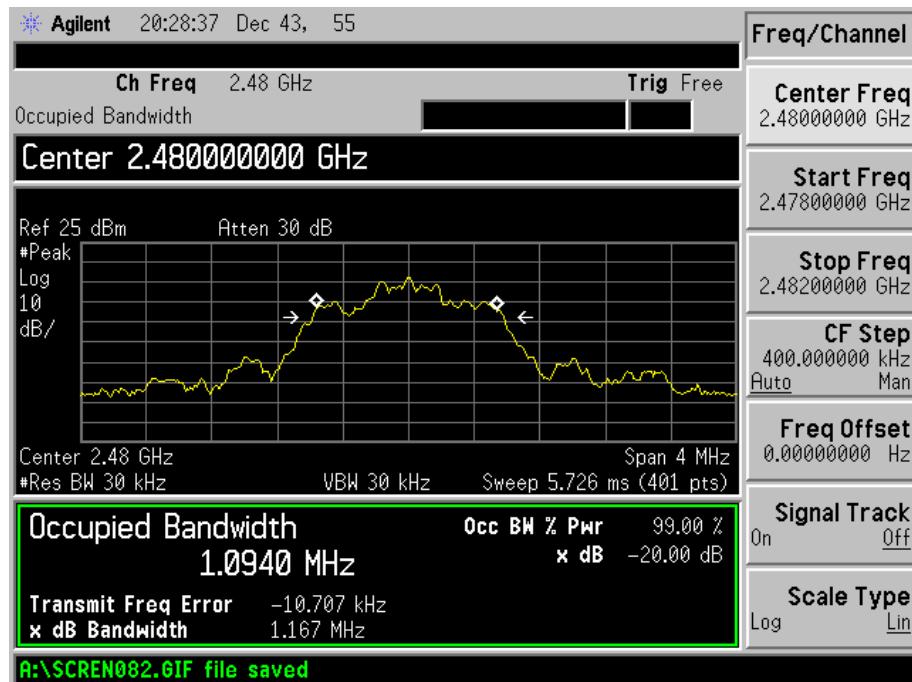

9. Power Spectral Density

9.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

9.3 Test Procedure

According to the KDB 558074 D01 v03r01, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \text{ RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE	2402	-6.324	8
	2441	-7.366	8
	2480	-7.631	8

Please refer to the following test plots:

10. 6dB Bandwidth

10.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

10.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

10.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
BLE	2402	659.955	1019.3	500
	2441	660.559	1017.3	500
	2480	671.018	1023.1	500

Please refer to the following test plots:


BLE-Low Channel

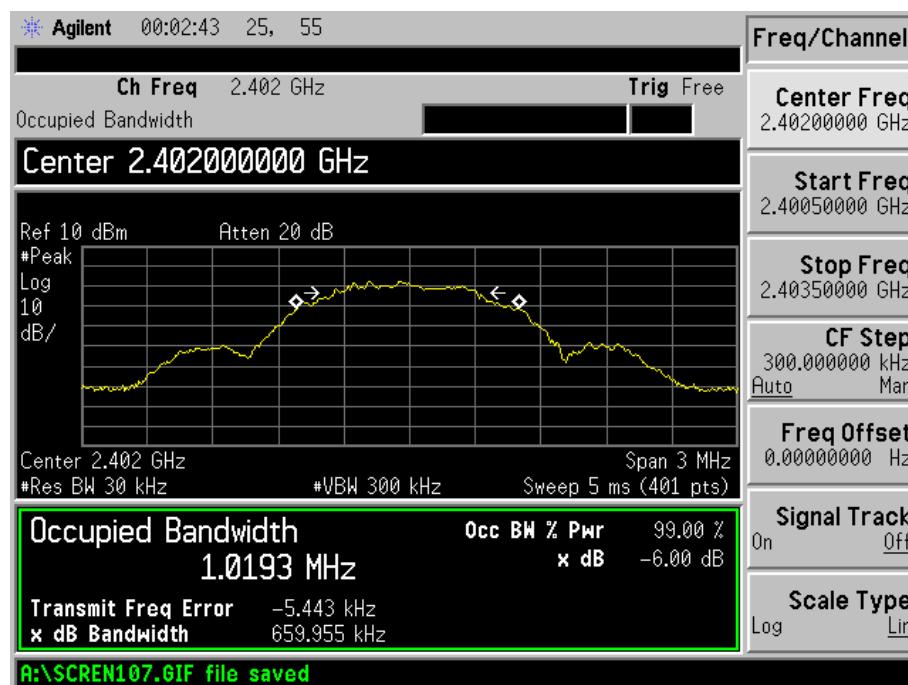

BLE-Middle Channel

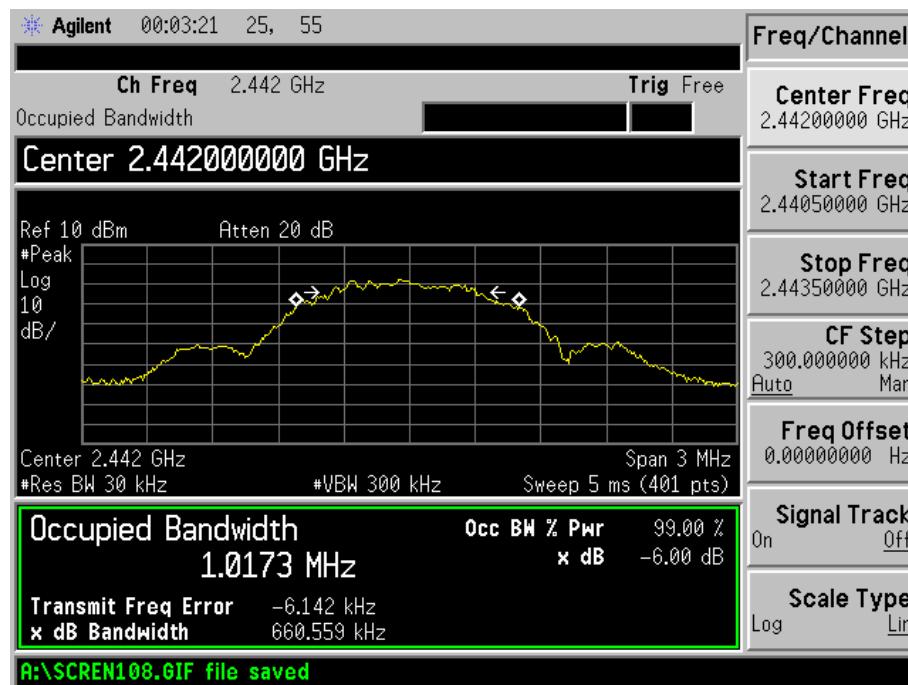

BLE-High Channel

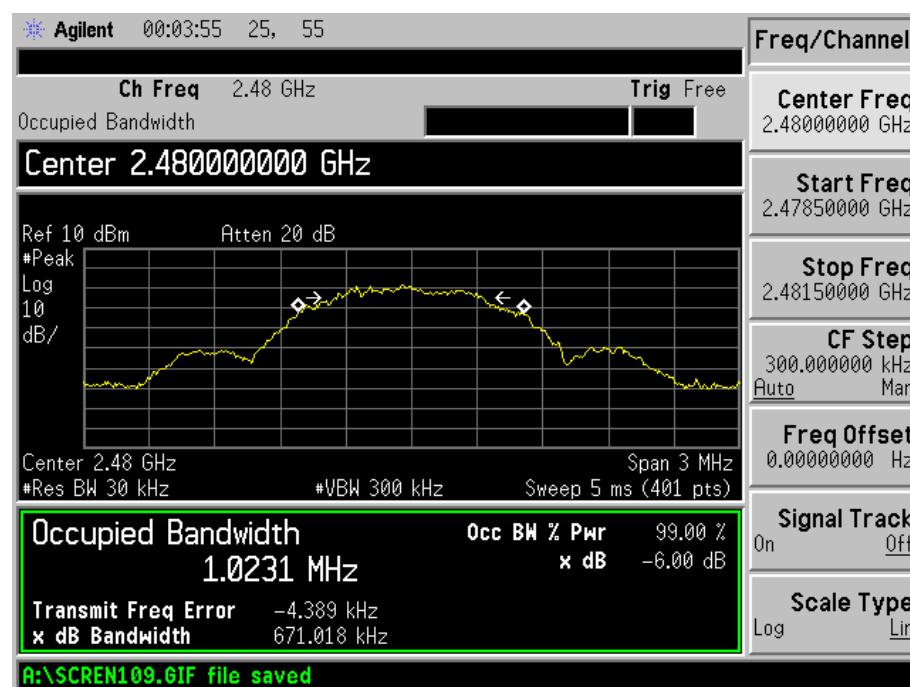

11. RF Output Power

11.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

11.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

11.3 Test Procedure

According to the DA 00-705, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 5MHz, centered on a hopping channel

RBW = 1/3MHz, VBW = 1/3MHz

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

11.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

11.5 Summary of Test Results/Plots

For GFSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	4.465	2.796	1000
Middle Channel	2441	4.458	2.791	1000
High Channel	2480	3.815	2.407	1000

For Pi/4 QDPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	3.912	2.462	1000
Middle Channel	2441	4.023	2.525	1000
High Channel	2480	3.569	2.275	1000

For 8DPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	3.818	2.409	1000
Middle Channel	2441	3.906	2.458	1000
High Channel	2480	3.178	2.079	1000

For BLE

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-3.416	0.455	1000
Middle Channel	2441	-3.491	0.448	1000
High Channel	2480	-4.220	0.378	1000

Note: the antenna gain of 0.3dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

12. Field Strength of Spurious Emissions

12.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

12.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

12.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Horn Antenna	ETS	3116B	00088203	2013-04-20	2014-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2013-04-20	2014-04-19

12.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

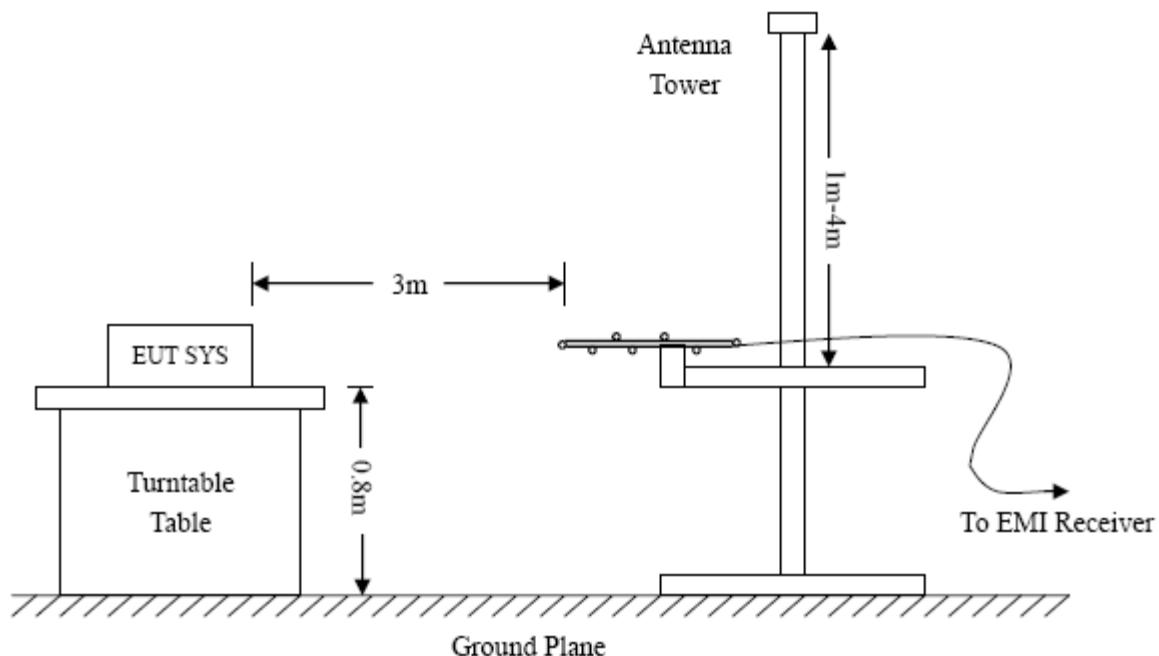

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

12.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

12.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

12.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile phone

Tested Model: Syreni 500

Operating Condition: Transmitting Low Channel (2402MHz)


Comment: DC 3.7V

Test Specification: Horizontal

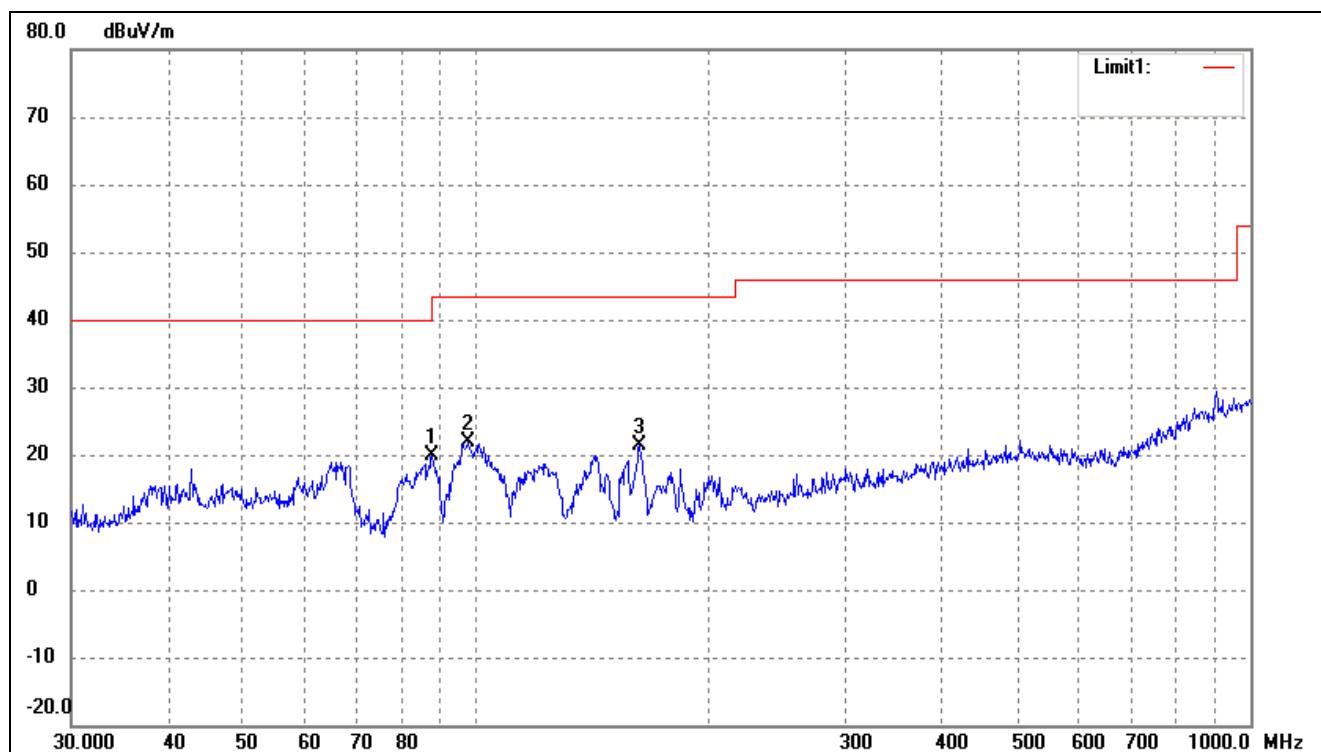

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1*	87.7248	31.61	-11.81	19.80	40.00	-20.20	0	100	peak
2	97.4560	31.69	-9.87	21.82	43.50	-21.68	0	100	peak
3	162.6106	33.67	-12.22	21.45	43.50	-22.05	0	100	peak


Test Specification: Vertical

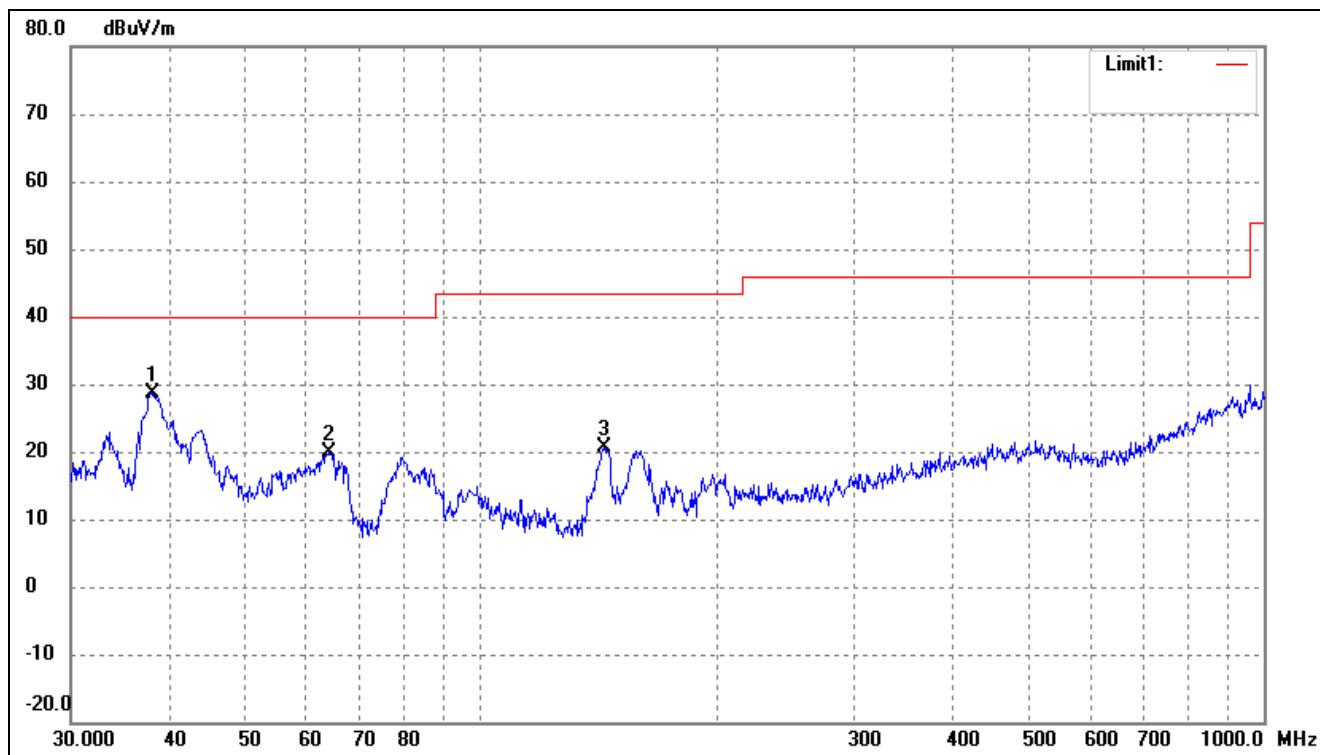

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1*	38.0783	37.36	-8.83	28.53	40.00	-11.47	0	100	peak
2	63.9828	29.57	-9.67	19.90	40.00	-20.10	0	100	peak
3	143.8295	33.59	-13.08	20.51	43.50	-22.99	0	100	peak


Operating Condition: Transmitting Middle Channel (2441MHz)
Comment: DC 3.7V

Test Specification: Horizontal

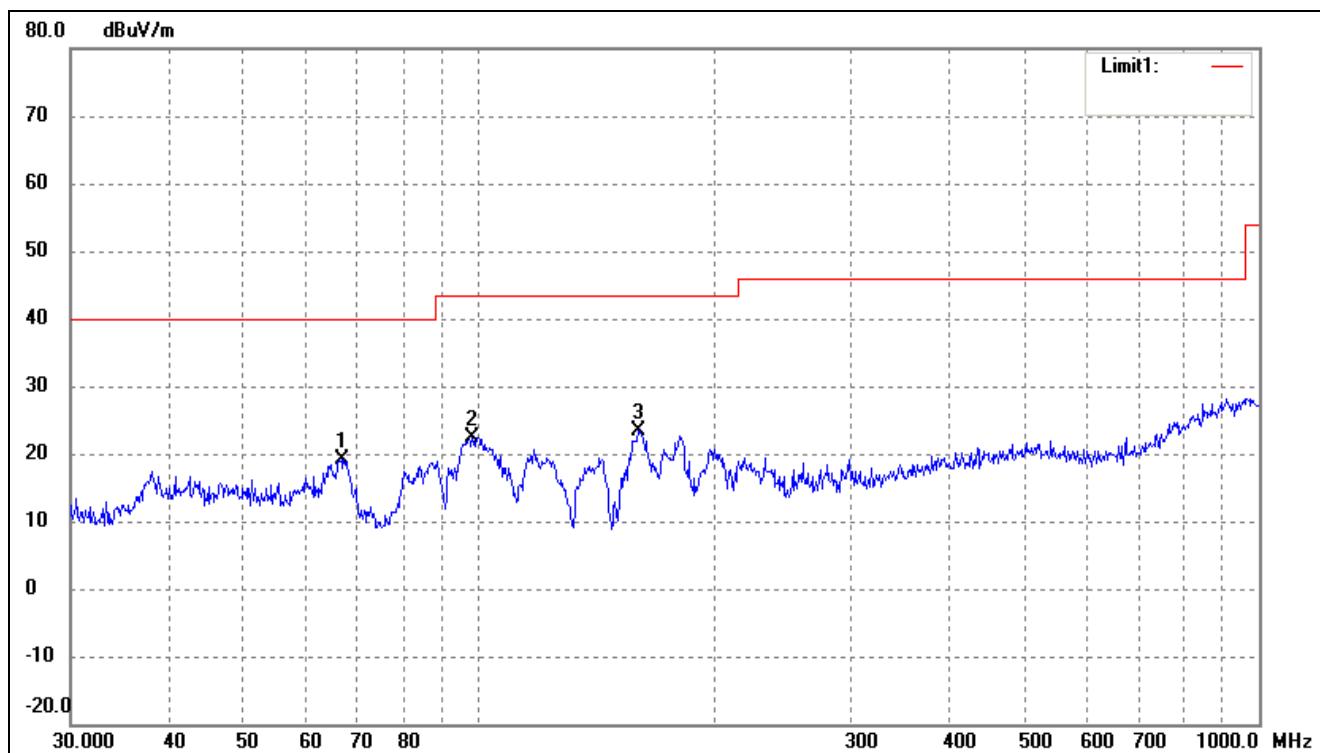

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	66.7325	29.31	-10.30	19.01	40.00	-20.99	0	100	peak
2	98.1419	32.25	-9.79	22.46	43.50	-21.04	0	100	peak
3*	160.3457	35.66	-12.32	23.34	43.50	-20.16	0	100	peak


Test Specification: Vertical

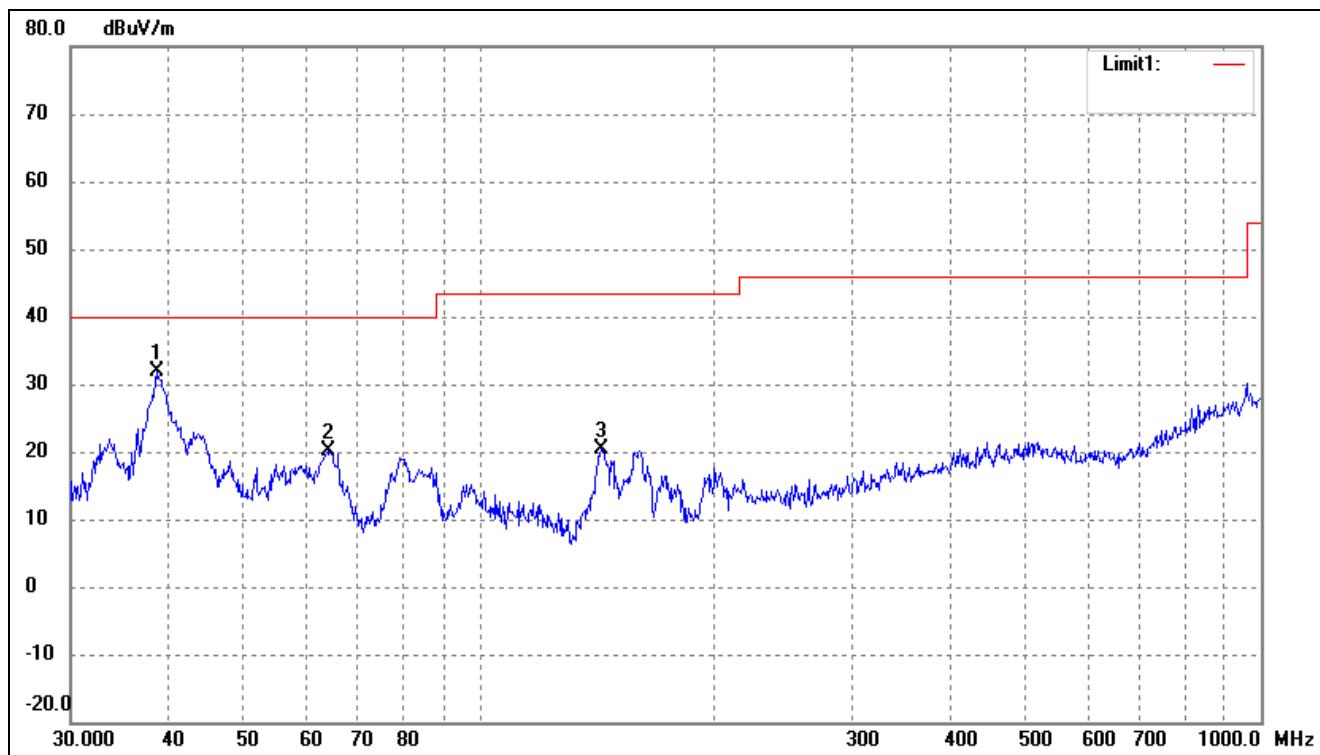

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (.)	Height (cm)	Remark
1*	38.6161	40.68	-8.72	31.96	40.00	-8.04	0	100	peak
2	64.2075	29.73	-9.72	20.01	40.00	-19.99	0	100	peak
3	143.3261	33.54	-13.09	20.45	43.50	-23.05	0	100	peak


Operating Condition: Transmitting High Channel (2480MHz)
Comment: DC 3.7V

Test Specification: Horizontal

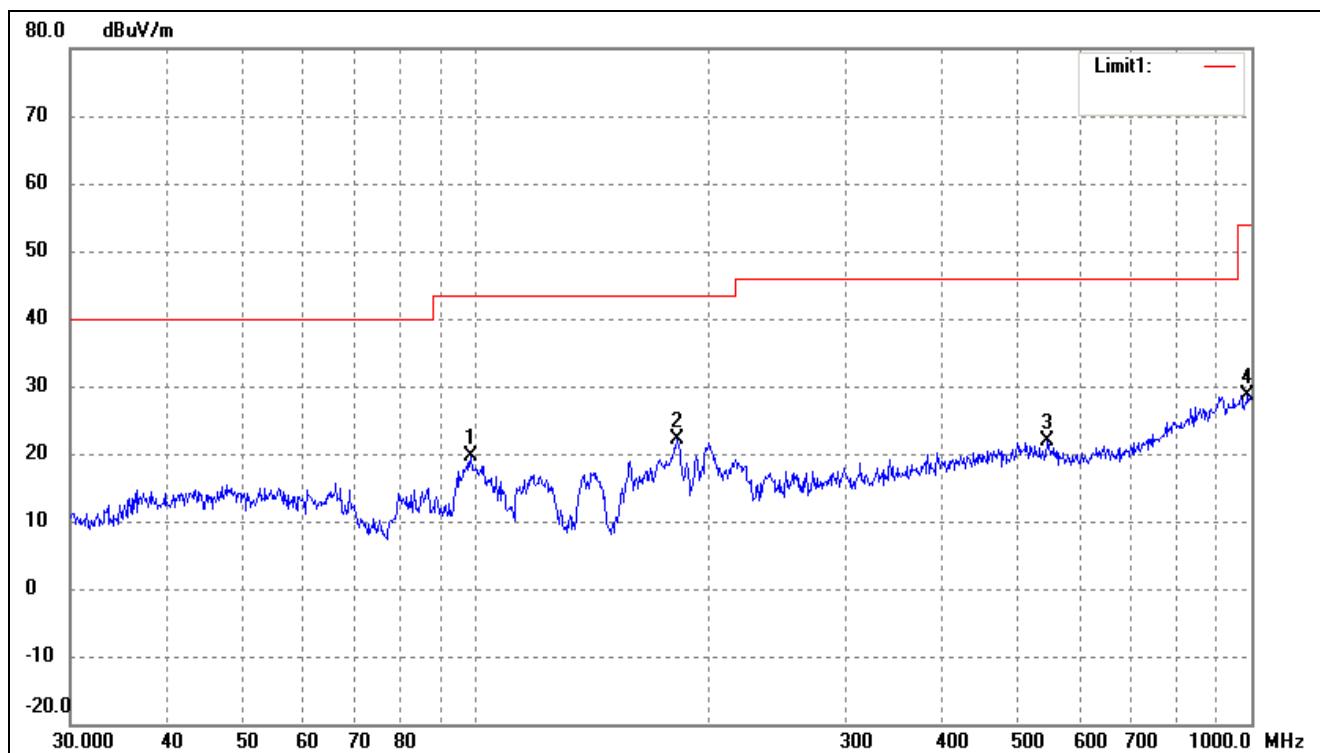

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (.)	Height (cm)	Remark
1	98.4866	29.43	-9.75	19.68	43.50	-23.82	0	100	peak
2*	181.9202	33.01	-10.93	22.08	43.50	-21.42	0	100	peak
3	545.1826	23.29	-1.34	21.95	46.00	-24.05	0	100	peak
4	989.5355	22.23	6.52	28.75	54.00	-25.25	0	100	peak

Test Specification: Vertical

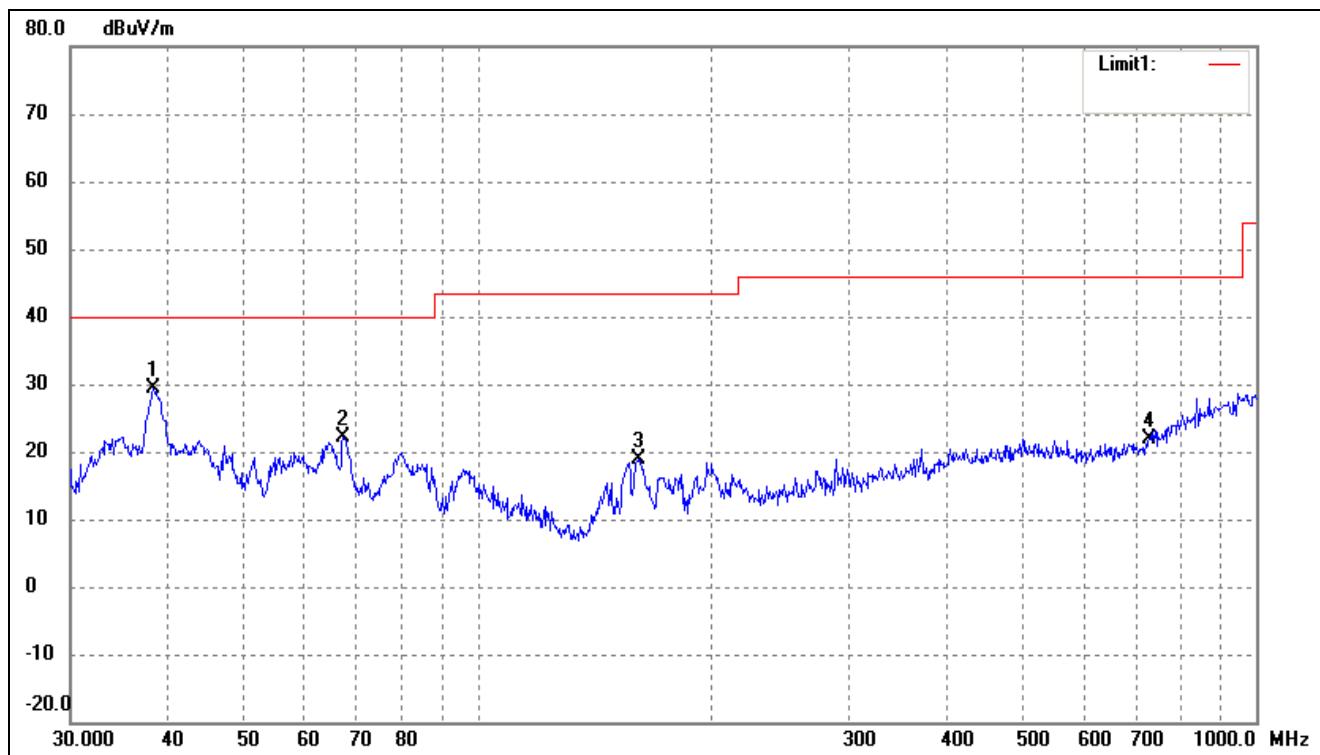

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1*	38.3462	38.08	-8.77	29.31	40.00	-10.69	0	100	peak
2	67.2022	32.70	-10.51	22.19	40.00	-17.81	0	100	peak
3	160.9089	31.25	-12.29	18.96	43.50	-24.54	0	100	peak
4	729.3583	19.31	2.68	21.99	46.00	-24.01	0	100	peak

Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	61.34	-3.59	57.75	74	-16.25	H	PK
4804	41.71	-3.59	38.12	54	-15.88	H	AV
7206	60.19	-0.52	59.67	74	-14.33	H	PK
7206	43.12	-0.52	42.60	54	-11.40	H	AV
4804	60.87	-3.59	57.28	74	-16.72	V	PK
4804	47.61	-3.59	44.02	54	-9.98	V	AV
7206	60.53	-0.52	60.01	74	-13.99	V	PK
7206	42.64	-0.52	42.12	54	-11.88	V	AV
Middle Channel-2441MHz							
4882	57.61	-3.49	54.12	74	-19.88	H	PK
4882	47.49	-3.49	44.00	54	-10.00	H	AV
7323	58.14	-0.47	57.67	74	-16.33	H	PK
7323	42.67	-0.47	42.20	54	-11.80	H	AV
4882	61.91	-3.49	58.42	74	-15.58	V	PK
4882	50.73	-3.49	47.24	54	-6.76	V	AV
7323	58.59	-0.47	58.12	74	-15.88	V	PK
7323	40.80	-0.47	40.33	54	-13.67	V	AV
High Channel-2480MHz							
4960	65.53	-3.41	62.12	74	-11.88	H	PK
4960	40.41	-3.41	37.00	54	-17.00	H	AV
7440	53.56	-0.42	53.14	74	-20.86	H	PK
7440	43.66	-0.42	43.24	54	-10.76	H	AV
4960	54.64	-3.41	51.23	74	-22.77	V	PK
4960	43.93	-3.41	40.52	54	-13.48	V	AV
7440	58.42	-0.42	58.00	74	-16.00	V	PK
7440	33.53	-0.42	33.11	54	-20.89	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

13. Out of Band Emissions

13.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

13.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

13.3 Test Procedure

According to the DA 00-705, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the DA 00-705, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

13.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


13.5 Summary of Test Results/Plots

Please refer to the test plots as below.

Bandedge (Radiated)

Lowest Bandedge


Vertical (Worst case)

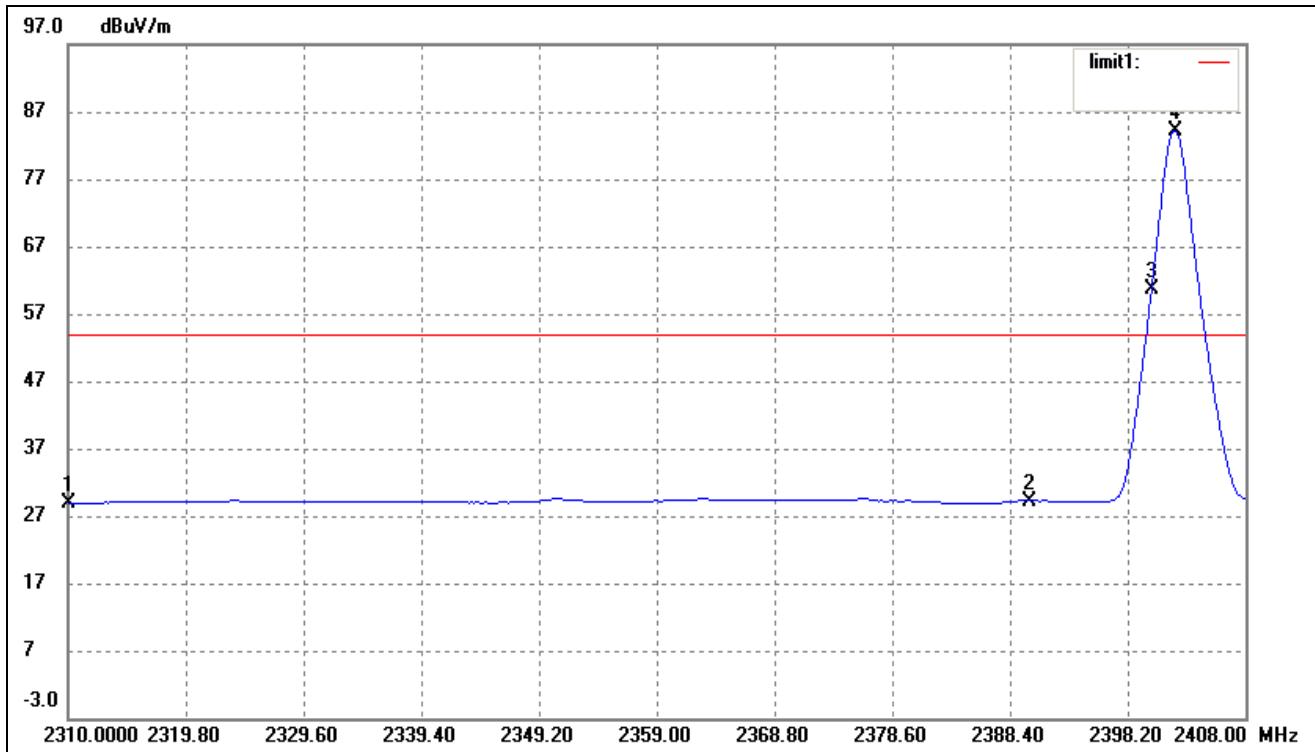

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.35	-3.69	29.66	54.00	-24.34	Average Detector
	2310.000	45.73	-3.69	42.04			Peak Detector
2	2390.000	33.91	-3.49	30.42	54.00	-23.58	Average Detector
	2390.000	46.78	-3.49	43.29			Peak Detector
3	2400.000	78.52	-3.46	75.06	74.00	-30.71	Average Detector
4	2402.150	104.69	-3.46	101.23			Average Detector

Highest Bandedge

Vertical (Worst case)

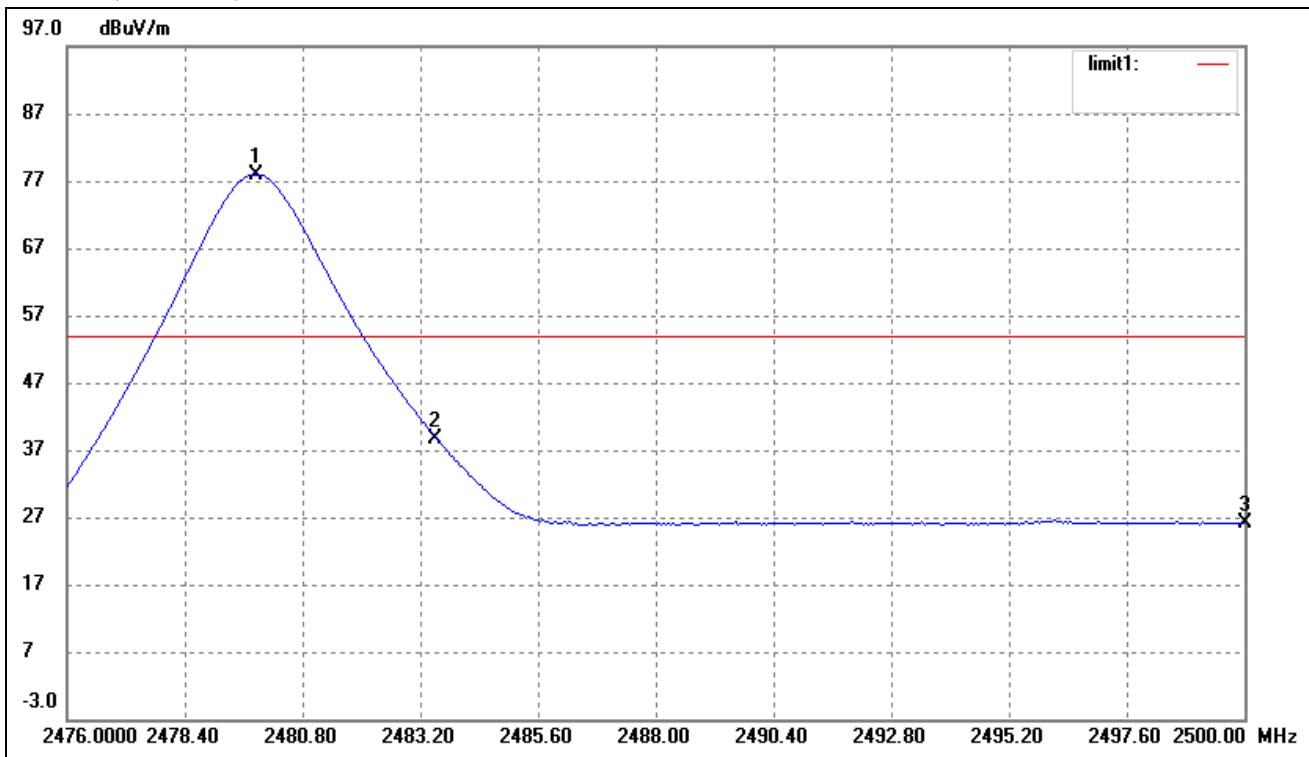

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.020	93.81	-3.25	90.56	/	/	Average Detector
	2480.020	95.88	-3.25	92.63	/	/	Peak Detector
2	2483.500	Delta = 61.56 dBc		29.00	54.00	-25.00	Average Detector
	2483.500			31.07	74.00	-42.93	Peak Detector
3	2500.000	33.51	-3.20	30.31	54.00	-23.69	Average Detector
	2500.000	46.91	-3.20	43.71	74.00	-30.29	Peak Detector

14. Conducted Emissions

14.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

14.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2013-05-07	2014-05-06
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2013-05-07	2014-05-06
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2013-05-07	2014-05-06

14.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

14.4 Basic Test Setup Block Diagram

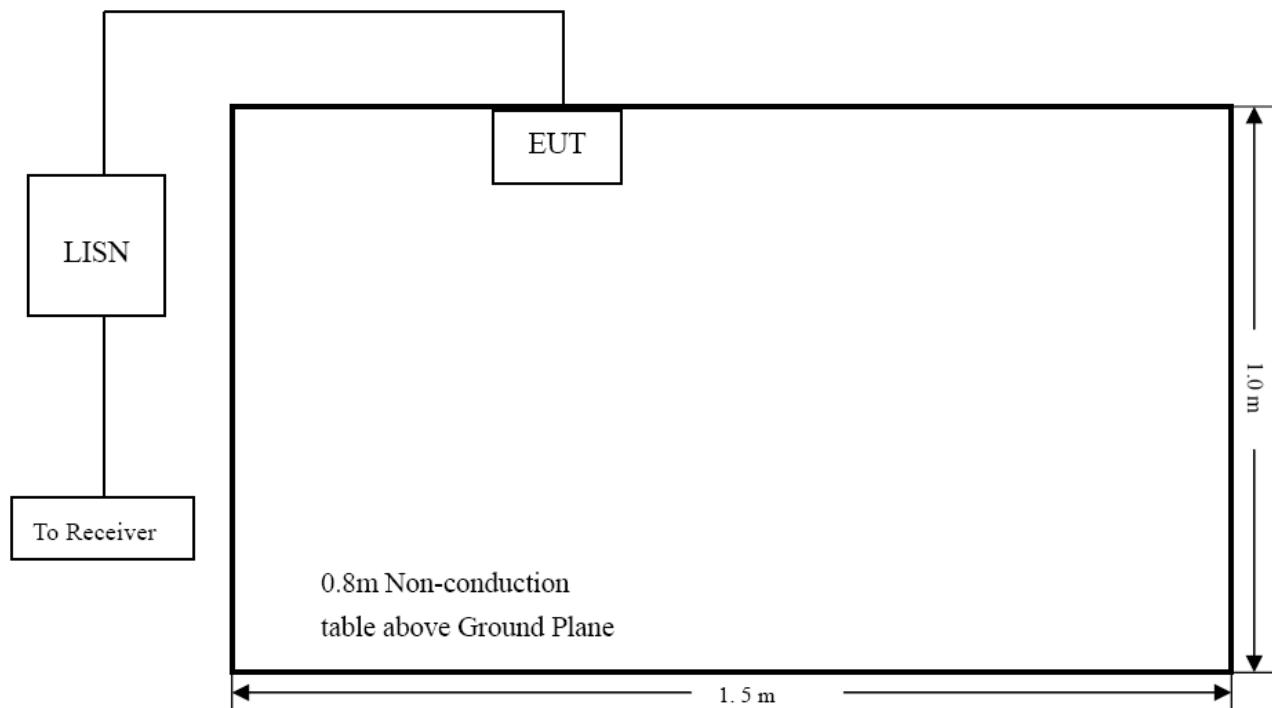

14.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

14.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

14.7 Summary of Test Results/Plots

According to the data in section 12.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-17.24 dB at 0.546 MHz in the Line mode, Average detector, 0.15-30MHz

14.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Mobile phone
Tested Model: Syreni 500
Operating Condition: Transmitting(Wi-Fi)
Comment: AC 120V/60Hz; Adapter DC 5V

Test Specification: Line

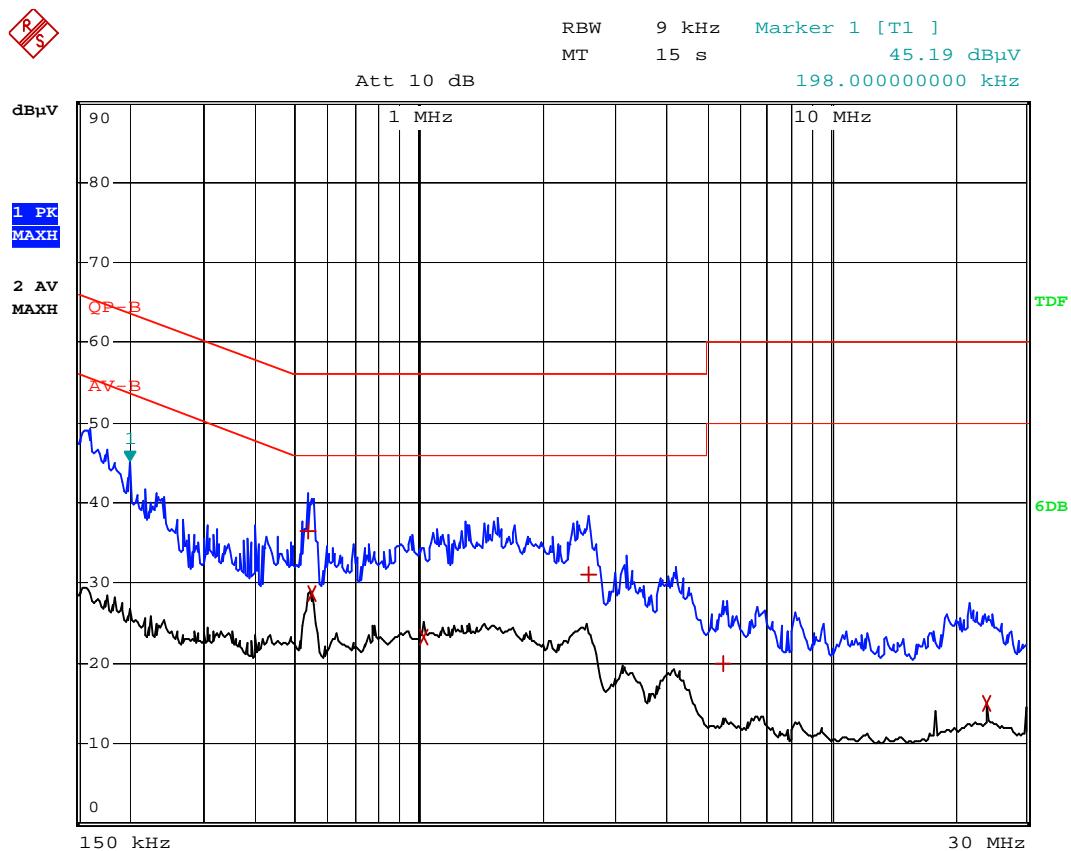

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	QP-B			
Trace2:	AV-B			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV	DELTA	LIMIT dB
1 Quasi Peak	538 kHz	36.45	-19.55	
2 Average	546 kHz	28.75	-17.24	
2 Average	1.03 MHz	23.18	-22.82	
1 Quasi Peak	2.598 MHz	31.02	-24.97	
1 Quasi Peak	5.526 MHz	19.97	-40.02	
2 Average	23.99 MHz	15.05	-34.94	

Test Specification: Neutral

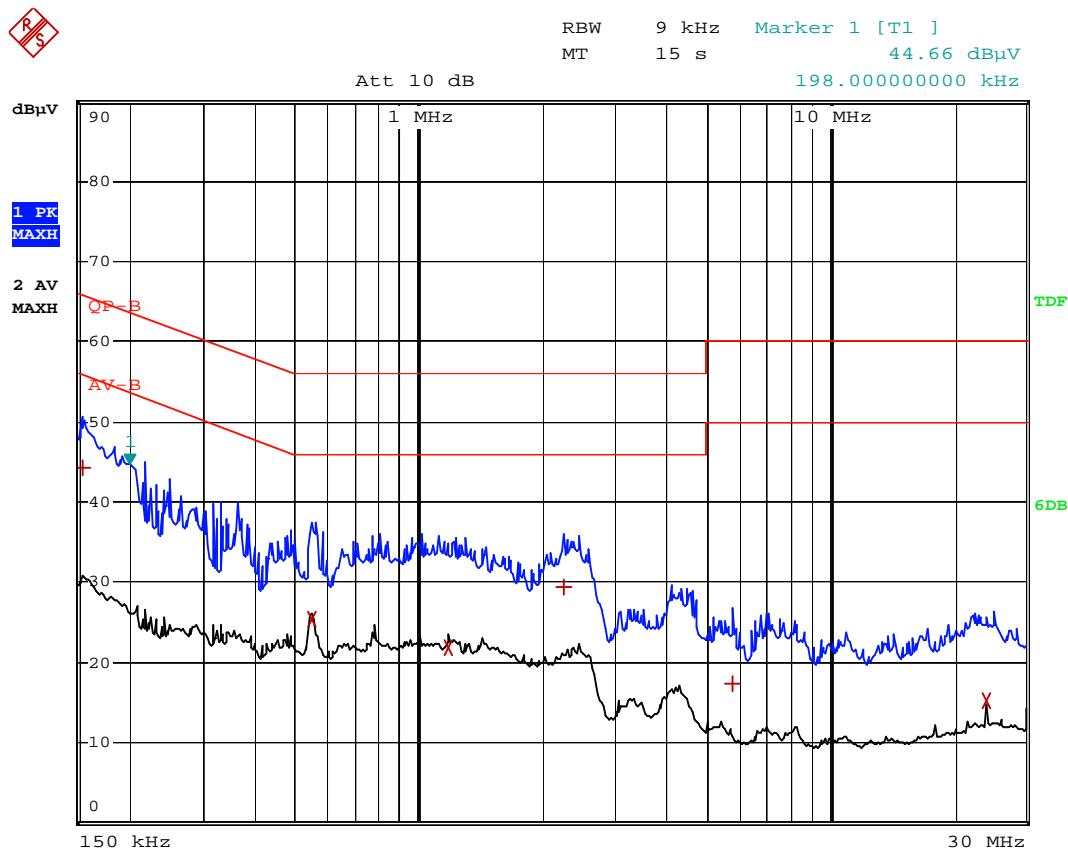

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	QP-B			
Trace2:	AV-B			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1 Quasi Peak	154 kHz	44.38	-21.39	
2 Average	546 kHz	25.44	-20.55	
2 Average	1.186 MHz	21.89	-24.10	
1 Quasi Peak	2.254 MHz	29.34	-26.66	
1 Quasi Peak	5.79 MHz	17.36	-42.63	
2 Average	23.99 MHz	15.32	-34.67	

***** END OF REPORT *****