

# Shenzhen Yishengbang Technology Co., LTD

## Sample acceptance letter

### SPECIFICATION FOR APPROVAL

Company name (to be filled in by customer): Shenzhen Nasda Industry and Trade Co., LTD

Material code (filled in by customer): NJ10220

Gauge type number (filled in by customer): \_\_\_\_\_

Acceptance date (for customer): \_\_\_\_\_

Name of supplier (SLK): Shenzhen Yishengbang Technology Co., LTD

For quotient gauge type number (fill in SLK): WIFI+GPS:SLK-NSD-4419-R-170111-B

### Acknowledge the signature


Acceptance by supplier (SLK field)			Shenzhen Nasda Industry and Trade Co., LTD		
engineer	audit	approval	engineer	audit	approval
Chen Shilian	Huangzhne	Lin Meicai			
Seal and sign			Seal and sign		
day	2023-3-30		day		
written instructions or comments: <input type="checkbox"/> take in <input type="checkbox"/> conditional acceptance					
Remarks (filled by customer) :					

Supplier :Shenzhen Yishengbang Technology Co., LTD Supplier Address:  
Workshop 2 / F, No. 5 Yinyuan Street, Jiaoyitang, Tangxia Town, Dongguan  
City

Telephone: 0769-82553115 Real: 0769-82553116

# WIFI 1

## 1. Explanation of Product number :

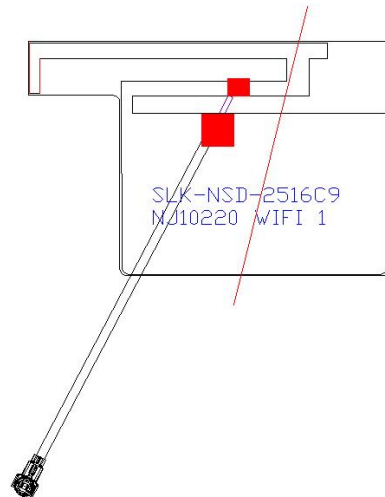

Product Code:

- (1) Customer: 纳斯达
- (2) Antenna Name: WIFI 天线 (WIFI Antenna)
- (3) Connector: 1.13380mm,

## 2. Features

- \*Stable and reliable in performances
- \*Compact size
- \*RoHS compliance

## 3. Applications

- \* IEEE802.11 (b/g/n/a)
- \* Hand-held devices when WIFI (802.11b/g/n/a) functions are needed

## 4. Description

Holy bond's FPC antenna series are specially designed for WIFI (802.11b/g/n/a) applications. Based on Holy bond's proprietary design and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

## 5. Electrical Specifications


### 5-1

Characteristics	Specifications	Unit
Outline Dimensions	25.43x16.19x0.12	mm
Center Frequency	2.4-2.5+5.15-5.85	GHz
Bandwidth(under-10dB return loss)	130min	MHz
VSWR	3max	

### 5-2.

VSWR


S11

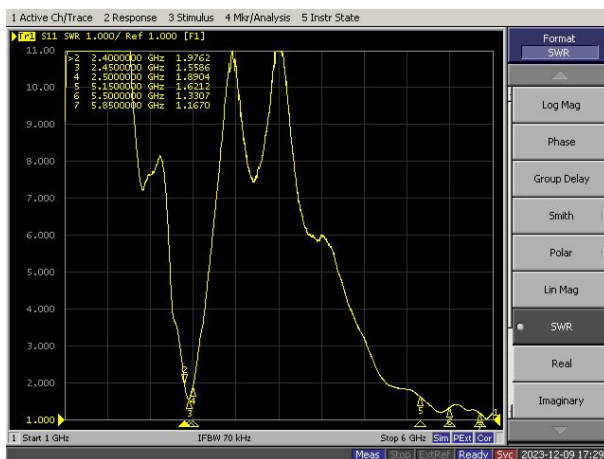


### 5-3.WIFI +BT Antenna Gain/Efficiency/Radiation Pattern of 3D

Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500	5150	5350	5500	5650	5850
Efficiency (dBi)	-2.89	-2.73	-2.78	-2.70	-3.03	-3.15	-3.16	-3.42	-3.20	-3.39	-3.72	-3.44	-3.44	-3.59	-3.82	-3.32
Gain (dBi)	2.75	2.80	2.66	2.56	2.21	1.97	2.41	1.90	2.53	2.25	1.92	2.25	2.50	2.50	2.89	2.77
Efficiency (%)	51.37	53.33	52.67	53.72	49.73	48.41	48.31	45.51	47.81	45.80	42.47	45.27	45.29	43.72	41.48	46.60


2450.0MHz H+V, Eff: 48.4%

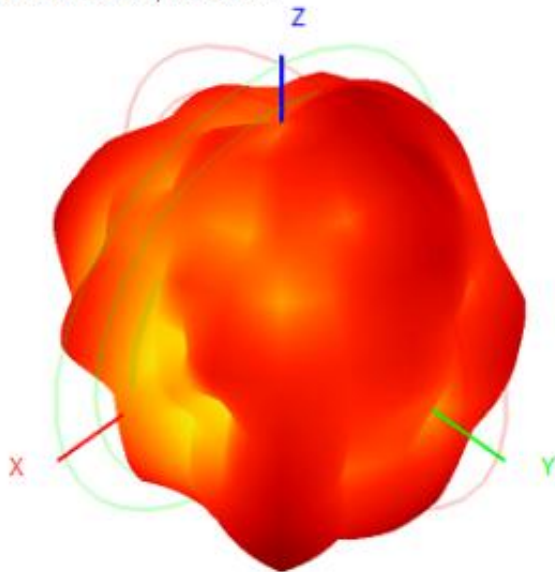


Back View

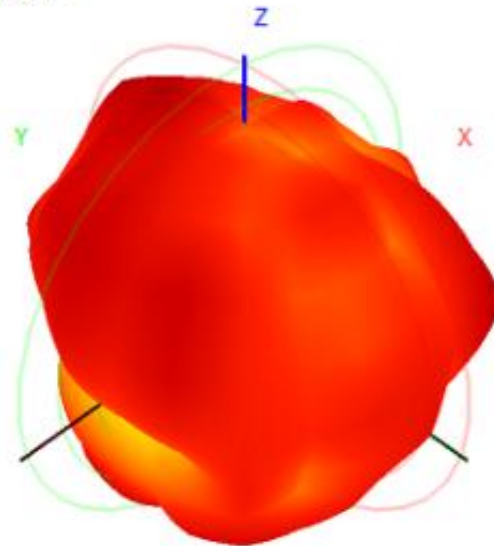


5850.0MHz H+V, Eff: 46.6%

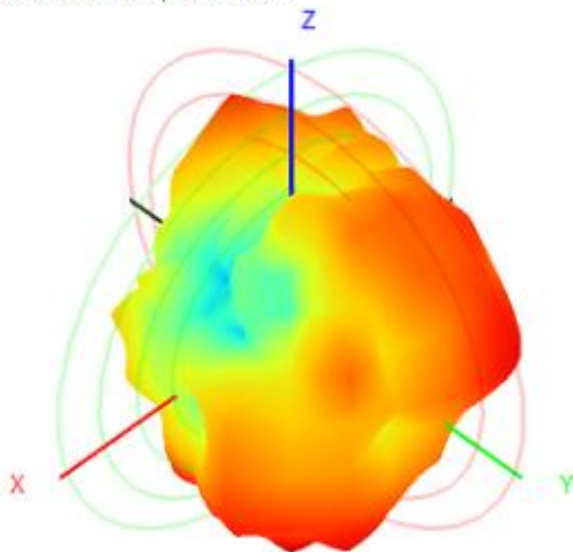

Back View

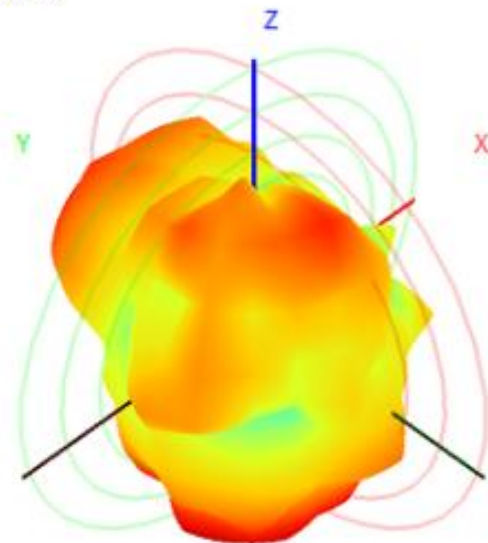

## 6. Antenna Dimensions (unit: mm)

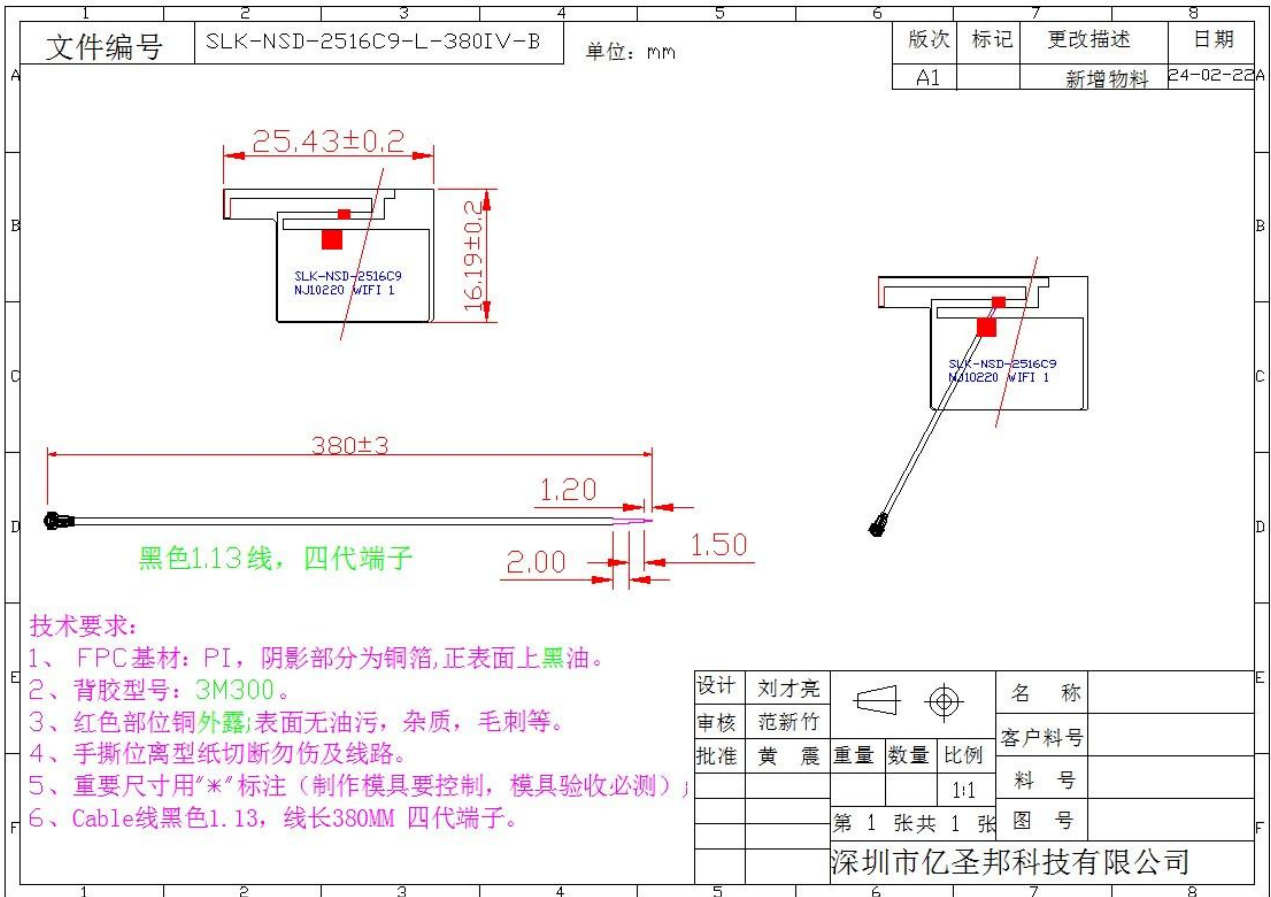


绿色: PI基材, 厚度25 μm

红色: 3M300胶, 厚度50 μm

黄色: 覆铜, 厚度35 μm

蓝色: 离型纸, 厚度100 μm


紫红色: 黑油, 厚度15 μm

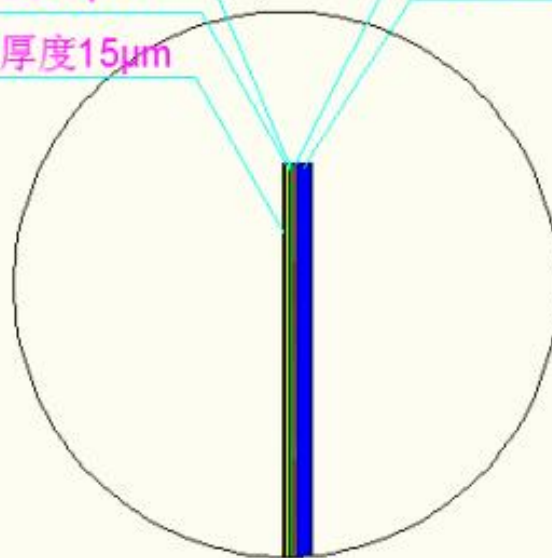

详细A 5/1

# WIFI 2

## 1. Explanation of Product number :

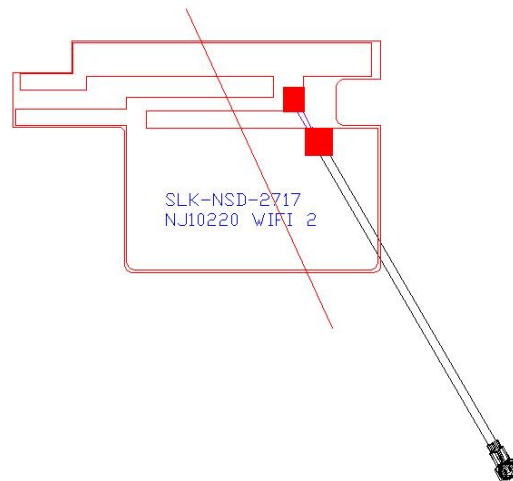

Product Code:

- (1) Customer: 纳斯达
- (2) Antenna Name: WIFI 天线 (WIFI Antenna)
- (3) Connector: 1.13, 总长200mm

## 2. Features

- \*Stable and reliable in performances
- \*Compact size
- \*RoHS compliance

## 3. Applications

- \* IEEE802.11 (b/g/n/a)
- \* Hand-held devices when WIFI (802.11b/g/n/a) functions are needed

## 4. Description

Holy bond's FPC antenna series are specially designed for WIFI (802.11b/g/n/a) applications. Based on Holy bond's proprietary design and processes, this FPC antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

## 5. Electrical Specifications


### 5-1

Characteristics	Specifications	Unit
Outline Dimensions	27x17x0.12	mm
Center Frequency	2.4-2.5+5.15-5.85	GHz
Bandwidth(under-10dB return loss)	130min	MHz
VSWR	3max	

### 5-2.

VSWR


S11

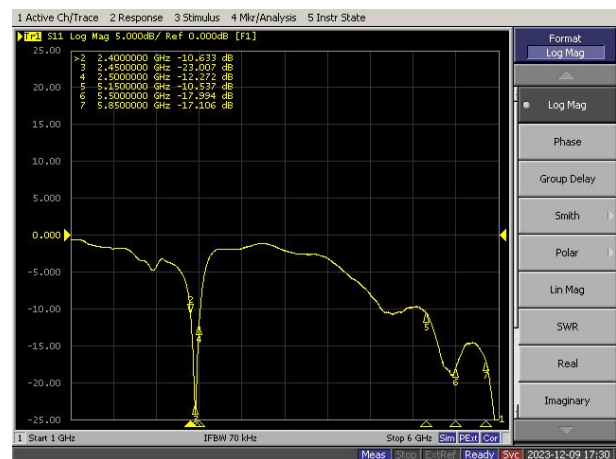


### 5-3.WIFI +BT Antenna Gain/Efficiency/Radiation Pattern of 3D

Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500	5150	5350	5500	5650	5850
Efficiency (dBi)	-3.31	-3.13	-3.20	-3.01	-3.27	-3.30	-3.24	-3.53	-3.37	-3.65	-3.82	-3.89	-3.86	-3.80	-3.93	-3.80
Gain (dBi)	1.98	2.37	2.45	2.84	2.49	2.33	2.22	1.56	1.76	1.38	1.72	2.02	2.28	2.72	2.95	2.05
Efficiency (%)	46.70	48.62	47.84	50.00	47.06	46.83	47.40	44.40	46.07	43.16	41.47	40.85	41.10	41.66	40.39	41.67


2450.0MHz H+V, Eff: 46.8%

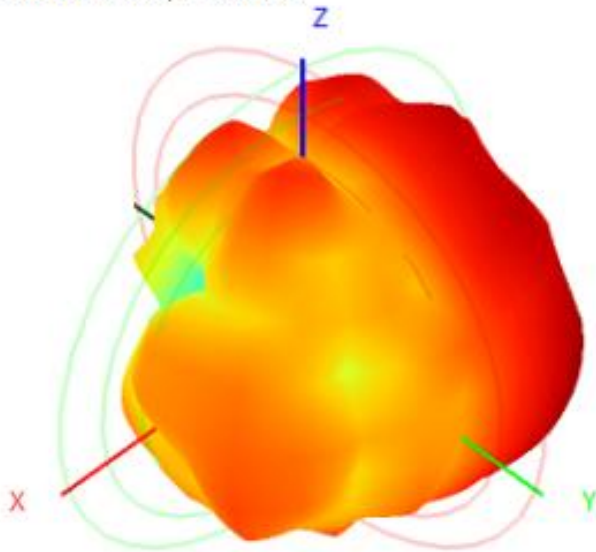


Back View

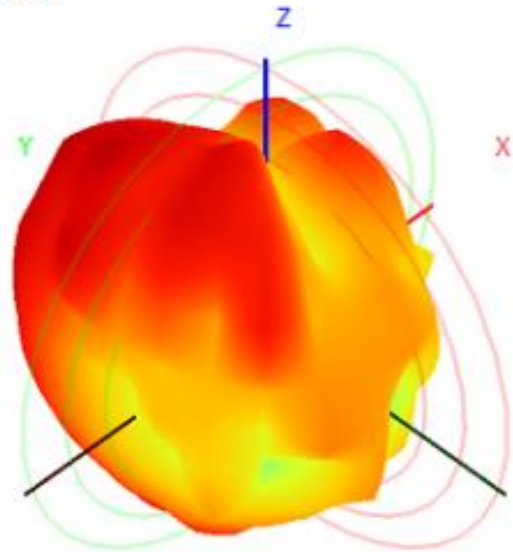

5850.0MHz H+V, Eff: 41.7%

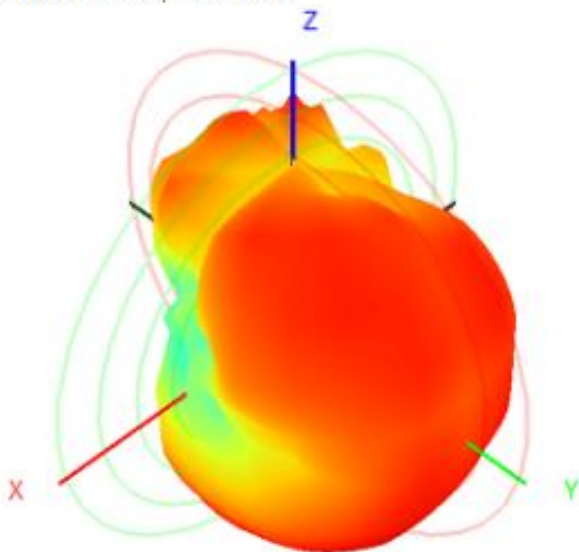


Back View

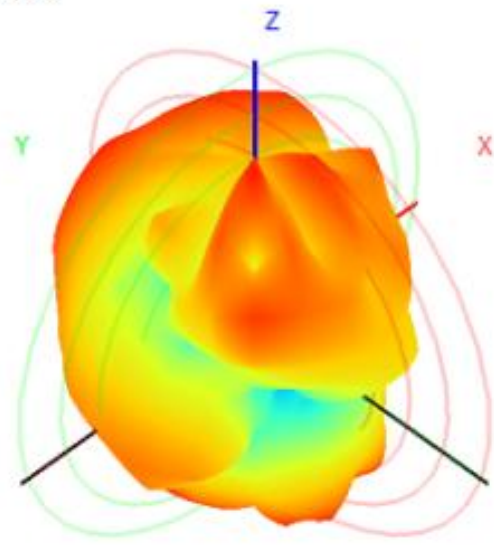



## 6. Antenna Dimensions (unit: mm)

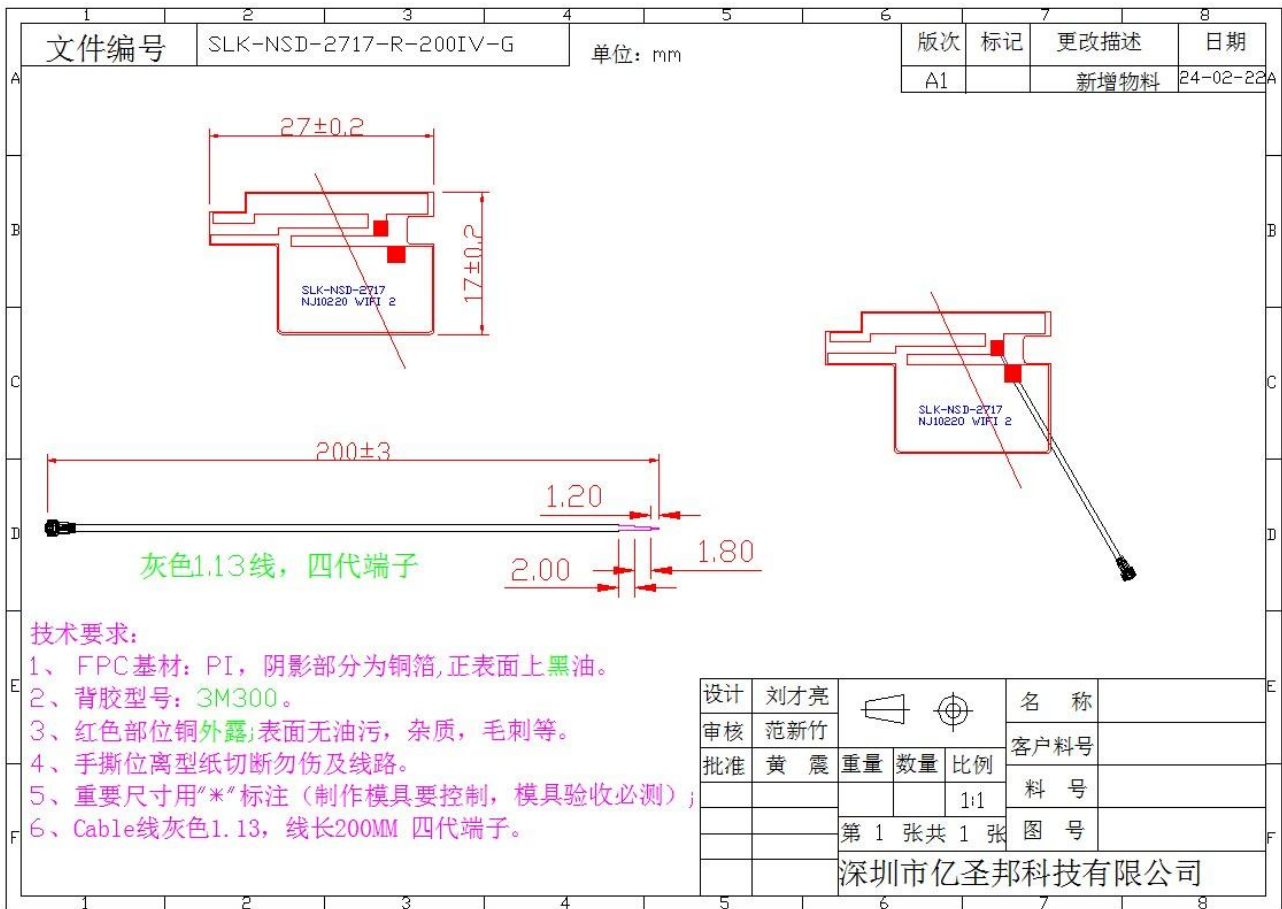


绿色: PI基材, 厚度25 μm

红色: 3M300胶, 厚度50 μm

黄色: 覆铜, 厚度35 μm

蓝色: 离型纸, 厚度100 μm

紫红色: 黑油, 厚度15 μm

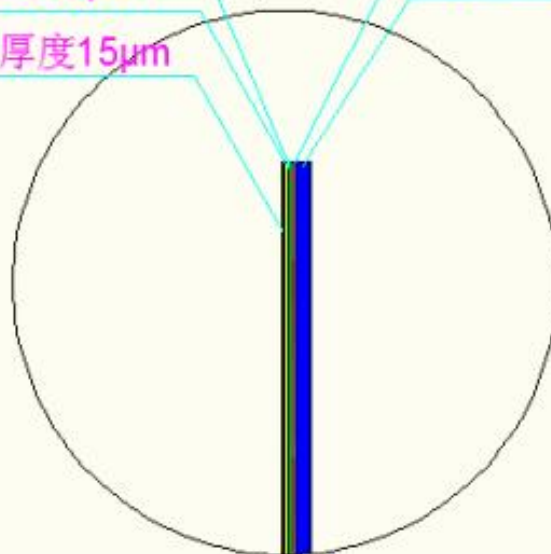

详细A 5/1