

Report No.: SZEM150200069201

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 49

FCC REPORT

Application No: SZEM1502000692CR(GZEM1501000535CR)

Applicant: WOOX Innovations Ltd.

Manufacturer: WOOX Innovations Ltd.

Factory: Arts Electronics Co., Ltd.

Product Name: Smart Home Temperature/Humidity Sensor

Model No.(EUT): AEH2130/37

Add Model No.: AEH2130/zz, where zz = 00 - 99 (different exported countries.)

Trade Mark: PHILIPS

FCC ID: 2AANUAEH2130

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2015-02-09

Date of Test: 2015-02-11 to 2015-03-05

Date of Issue: 2015-03-10

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM150200069201

Page: 2 of 49

2 Version

	Revision Record					
Version Chapter Date Modifier Remark						
00		2015-03-10		Original		

Authorized for issue by:		
Tested By	Chros Thong	2015-03-05
	(Chris Zhong) /Project Engineer	Date
Prepared By	Vivi Zhou	2015-03-10
	(Vivi Zhou) /Clerk	Date
Checked By	Emen-Li	2015-03-12
	(Emen Li) /Reviewer	Date



Report No.: SZEM150200069201

Page: 3 of 49

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: AEH2130/zz, where zz = 00 - 99 (different exported countries.)

Only the Model AEH2130/37 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on model No. and exported countries.





Report No.: SZEM150200069201

Page: 4 of 49

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3	TF	EST SUMMARY	3
		ONTENTS	
4			
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3 5.4	TEST ENVIRONMENT	
	5.4 5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	8
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9 5.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TE	EST RESULTS AND MEASUREMENT DATA	11
	6.1	Antenna Requirement	
	6.2	CONDUCTED PEAK OUTPUT POWER	
	6.3 6.4	6DB OCCUPY BANDWIDTHPower Spectral Density	
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.6	Spurious RF Conducted Emissions	
	6.7	RADIATED SPURIOUS EMISSION	31
	-	7.1 Spurious Emissions	
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	HOTOGRAPHS - EUT TEST SETUP	48
	7.1	RADIATED EMISSION	48
	7.2	RADIATED SPURIOUS EMISSION	
8	Pŀ	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	49



Report No.: SZEM150200069201

Page: 5 of 49

5 General Information

5.1 Client Information

Applicant:	WOOX Innovations Ltd.	
Address of Applicant:	5/F., Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong	
Manufacturer:	WOOX Innovations Ltd.	
Address of Manufacturer:	5/F., Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong	
Factory:	Arts Electronics Co., Ltd.	
Address of Factory:	No. 1, SHANGXING LU, SHANGJIAO COMMUNITY, CHANGAN TOWN, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA	

5.2 General Description of EUT

Product Name:	Smart Home Temperature/Humidity Sensor
Model No.:	AEH2130/37
Trade Mark:	PHILIPS
Wireless technology	Zigbee
Operating Frequency:	2405~2475MHz
Modulation Type:	DSSS(O-QPSK)
Number of Channel:	15
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	0.5dBi
Test power grade	ClassII (manufacturer declare)
Test software of EUT	Hyperterminal
EUT Function:	Smart Home Temperature/Humidity Sensor
Battery:	DC 3.0V (2*1.5V "AAA" Size battery)



Report No.: SZEM150200069201

Page: 6 of 49

Operation I	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2405MHz
The Middle channel	2440MHz
The Highest channel	2475MHz



Report No.: SZEM150200069201

Page: 7 of 49

5.3 Test Environment

Operating Environment:		
Temperature:	20.0 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1020mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM150200069201

Page: 8 of 49

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150200069201

Page: 9 of 49

5.10 Equipment List

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10	
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	Coaxial cable	SGS	N/A	SEL0028	2015-05-29	
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	2015-10-24	
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16	
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24	
9	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24	
10	Band filter	Amindeon	Asi 3314	SEL0094	2015-05-16	
11	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2015-10-24	



Report No.: SZEM150200069201

Page: 10 of 49

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM150200069201

Page: 11 of 49

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

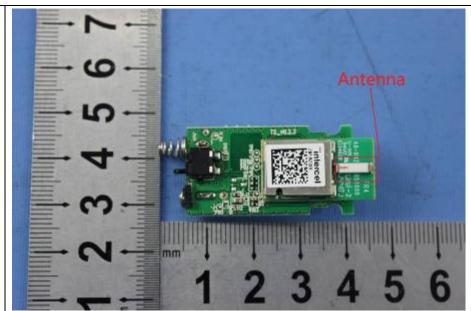


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.5dBi.



Report No.: SZEM150200069201

Page: 12 of 49

6.2 Conducted Peak Output Power

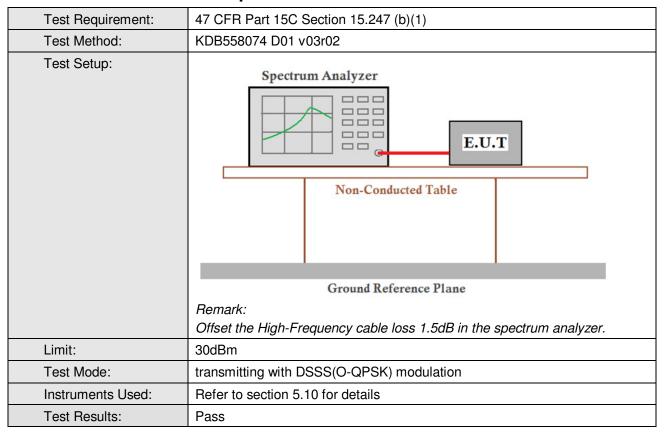

Measurement Data

DSSS(O-QPSK) mode					
Test channel Peak Output Power (dBm) Limit (dBm) Result					
Lowest	-1.28	30.00	Pass		
Middle	-2.25	30.00	Pass		
Highest	-1.41	30.00	Pass		




Report No.: SZEM150200069201


Page: 13 of 49

Test plot as follows:

Test mode: DSSS(O-QPSK) Test channel: Lowest

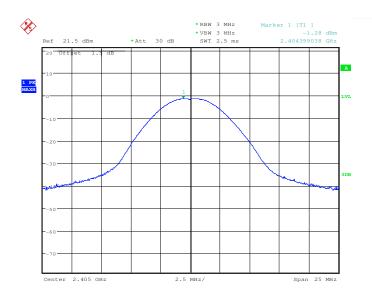

Test mode: DSSS(O-QPSK) Test channel: Middle

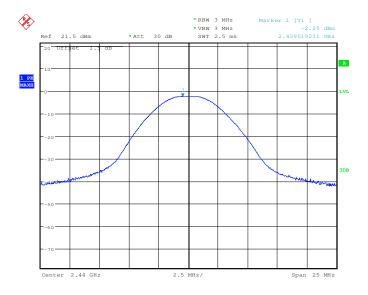






Report No.: SZEM150200069201

Page: 14 of 49

Test mode: DSSS(O-QPSK) Test channel: Highest

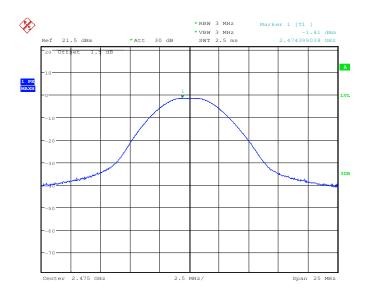




Report No.: SZEM150200069201

Page: 15 of 49

6.3 6dB Occupy Bandwidth

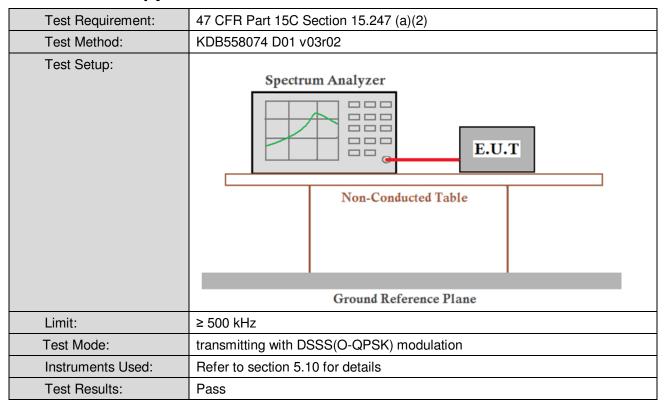

Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	1.490	≥500	Pass
Middle	1.643	≥500	Pass
Highest	1.506	≥500	Pass




Report No.: SZEM150200069201


Page: 16 of 49

Test plot as follows:

Test mode: DSSS(O-QPSK) Test channel: Lowest

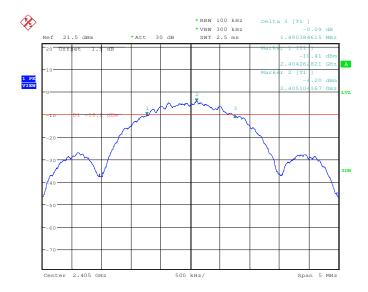

Test mode: DSSS(O-QPSK) Test channel: Middle

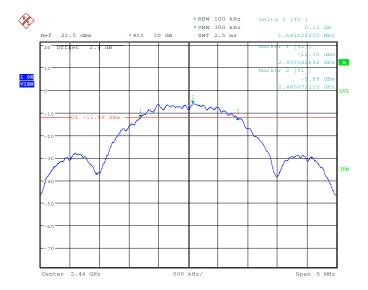




Report No.: SZEM150200069201

Page: 17 of 49

Test mode: DSSS(O-QPSK) Test channel: Highest

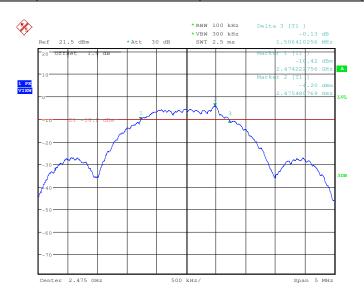




Report No.: SZEM150200069201

Page: 18 of 49

6.4 Power Spectral Density

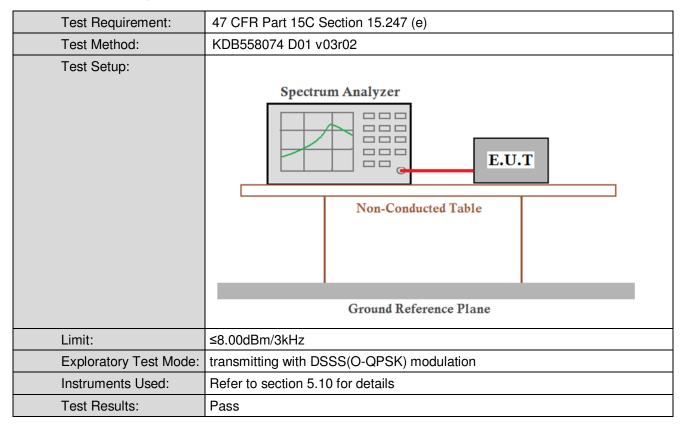

Measurement Data

DSSS(O-QPSK) mode									
Test channel	Power Spectral Density (dBm/3kHz)	Limit (8dBm/3kHz)	Result						
Lowest	-4.25	≤8.00	Pass						
Middle	-5.85	≤8.00	Pass						
Highest	-4.26	≤8.00	Pass						




Report No.: SZEM150200069201


Page: 19 of 49

Test plot as follows:

Test mode: DSSS(O-QPSK) Test channel: Lowest

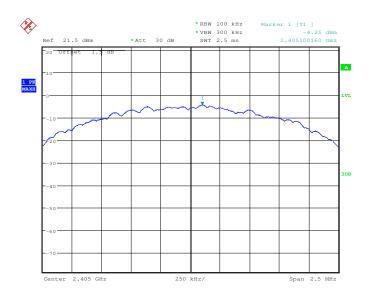

Test mode: DSSS(O-QPSK) Test channel: Middle

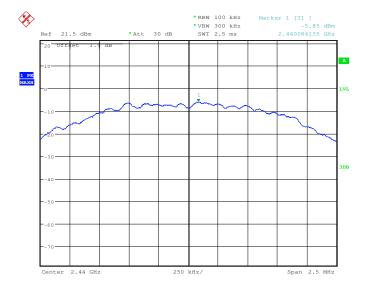




Report No.: SZEM150200069201

Page: 20 of 49

Test mode: DSSS(O-QPSK) Test channel: Highest

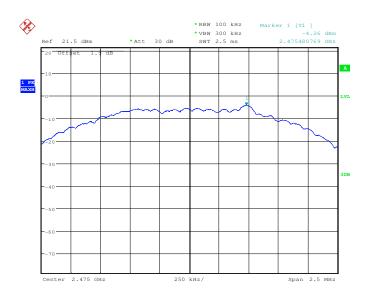




Report No.: SZEM150200069201

Page: 21 of 49

6.5 Band-edge for RF Conducted Emissions

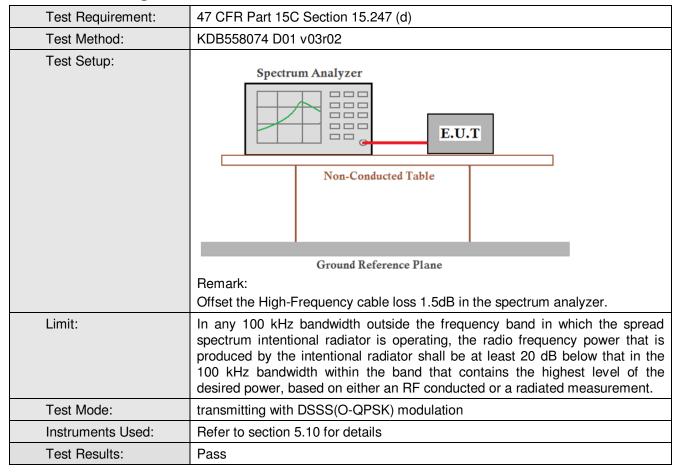




Report No.: SZEM150200069201


Page: 22 of 49

Test plot as follows:

Test mode: DSSS(O-QPSK) Test channel: Lowest

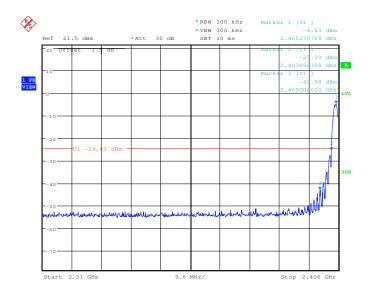

Test mode: DSSS(O-QPSK) Test channel: Highest

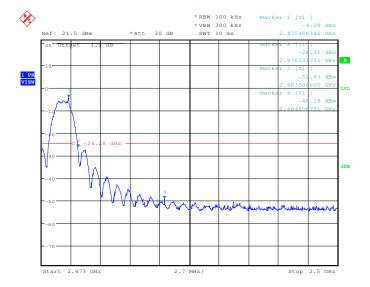



Report No.: SZEM150200069201

Page: 23 of 49

6.6 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01 v03r02					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
Limit:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated					
	measurement.					
Test Mode:	transmitting with DSSS(O-QPSK) modulation					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					







Report No.: SZEM150200069201

Page: 24 of 49

Test mode: DSSS(O-QPSK) Test channel: Lowest

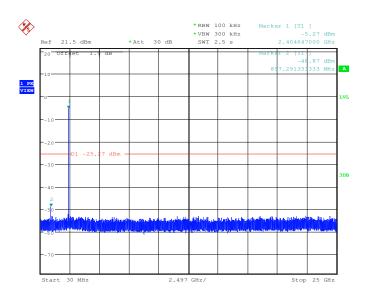


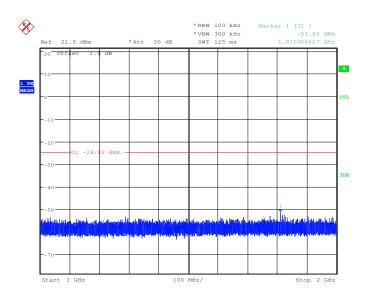




Report No.: SZEM150200069201

Page: 25 of 49

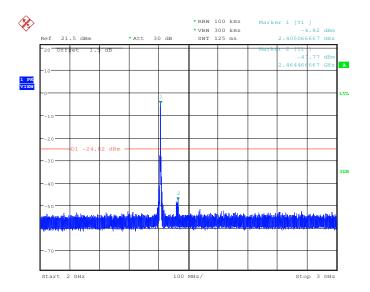

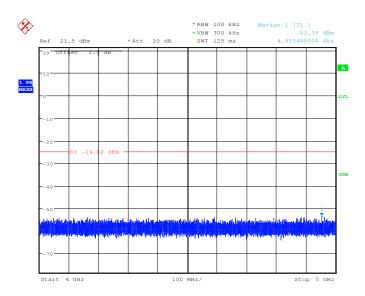





Report No.: SZEM150200069201

Page: 26 of 49

Test mode: DSSS(O-QPSK) Test channel: Middle

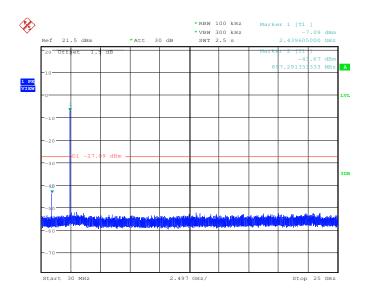


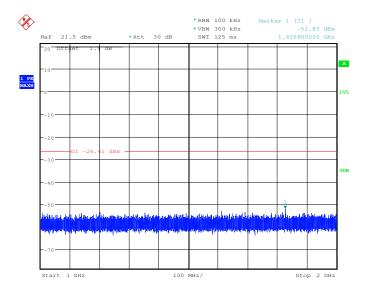




Report No.: SZEM150200069201

Page: 27 of 49

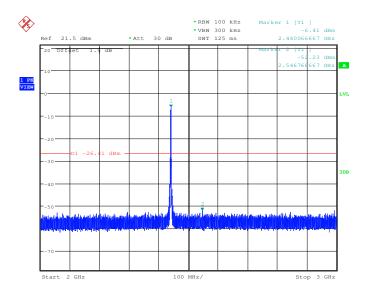

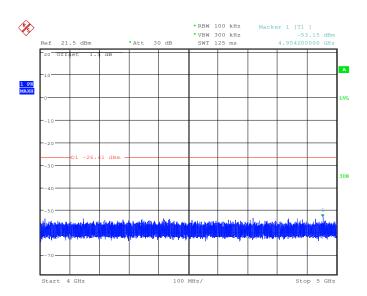





Report No.: SZEM150200069201

Page: 28 of 49

Test mode: DSSS(O-QPSK) Test channel: Highest

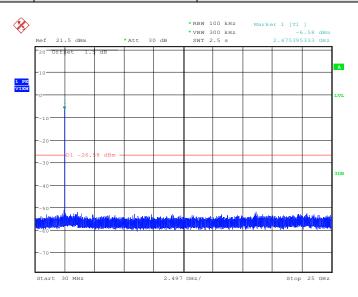


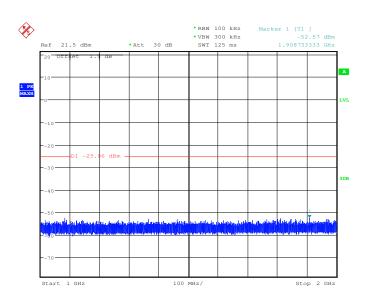




Report No.: SZEM150200069201

Page: 29 of 49

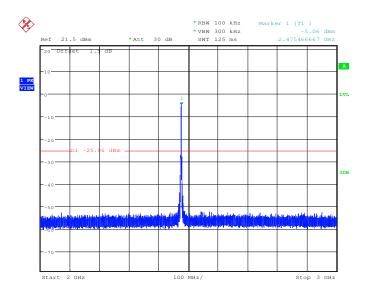


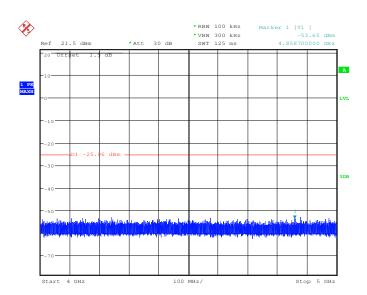



Report No.: SZEM150200069201

Page: 30 of 49

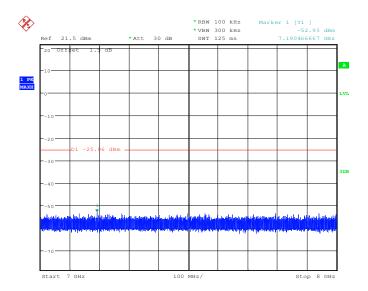

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150200069201

Page: 31 of 49


6.7 Radiated Spurious Emission

Test Requirement:	uirement: 47 CFR Part 15C Section 15.209 and 15.205										
Test Method:	ANSI C63.10 2009										
Test Site:	Measurement Distance	. 3m	. (Semi-Anech	noic Cham	her)					
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark	1			
·	0.009MHz-0.090MH	 Z	Peak	10kHz		30kHz	Peak				
	0.009MHz-0.090MH		Average	10kHz		30kHz	Average				
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	<u>z</u>	30kHz	Quasi-peak				
	0.110MHz-0.490MH	Z	Peak	10kHz	<u>z</u>	30kHz	Peak				
	0.110MHz-0.490MH	Z	Average	10kHz	<u>z</u>	30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	<u>z</u>	30kHz	Quasi-peak				
	30MHz-1GHz	Quasi-peak	100 kH	lz	300kHz	Quasi-peak					
	Above 1GHz	Peak	1MHz	<u>,</u>	3MHz	Peak					
	Above IGHZ		Peak	1MHz	<u>.</u>	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	ı	Remark	Measureme distance (n				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-		300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-		30				
	1.705MHz-30MHz		30	-		-	30				
	30MHz-88MHz		100	40.0	Qι	uasi-peak	3				
	88MHz-216MHz		150	43.5	Qι	uasi-peak	3				
	216MHz-960MHz		200	46.0	Qι	uasi-peak	3				
	960MHz-1GHz		500	54.0	Qι	uasi-peak	3				
	Above 1GHz 50		500	54.0	ļ	Average	3				
Note: 15.35(b), Unless otherwise specified, the limit on frequency emissions is 20dB above the maximum permitted averal limit applicable to the equipment under test. This peak limit applies peak emission level radiated by the device.											
	•							_			



Report No.: SZEM150200069201

Page: 32 of 49

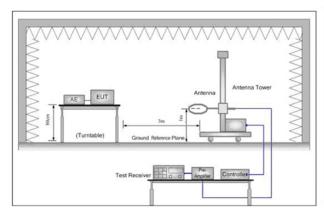

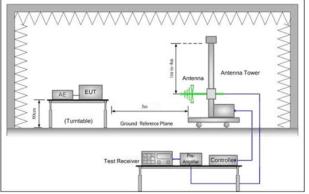


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

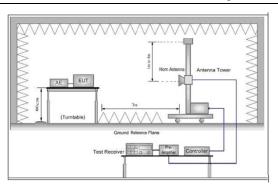


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2405MHz),the middle channel (2440MHz),the Highest channel (2475MHz)
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse



Report No.: SZEM150200069201

Page: 33 of 49

	case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting with DSSS(O-QPSK) modulation Transmitting mode For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






Report No.: SZEM150200069201

Page: 34 of 49

Radiated Emission below 1GHz					
30MHz~1GHz (QP)					
Test mode: Transmitting Vertical					

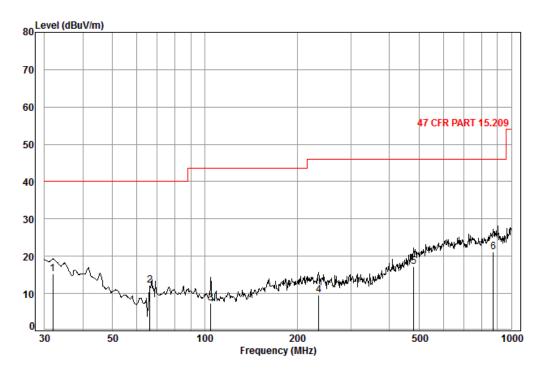

Condition: 47 CFR PART 15.209 3m 3142C Vertical

Job No. : 0692CR Test mode: TX mode


	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	24.46	15.32	40.00	-24.68
2	66.27	0.80	7.01	27.25	31.64	12.20	40.00	-27.80
3	104.54	1.21	8.87	27.17	24.58	7.49	43.50	-36.01
4	234.99	1.60	11.82	26.58	22.80	9.64	46.00	-36.36
5	480.53	2.53	17.80	27.60	24.59	17.32	46.00	-28.68
6	872.18	3.49	22.93	26.92	21.71	21.21	46.00	-24.79



Report No.: SZEM150200069201

Page: 35 of 49

Test mode:	Transmitting	Horizontal
------------	--------------	------------

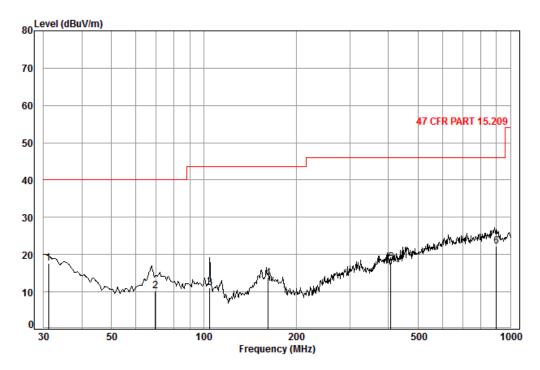

Condition: 47 CFR PART 15.209 3m 3142C Horizontal

Job No. : 0692CR Test mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.18	0.60	18.04	27.35	26.42	17.71	40.00	-22.29
2	69.60	0.80	6.91	27.25	29.84	10.30	40.00	-29.70
3	104.54	1.21	8.87	27.17	28.30	11.21	43.50	-32.29
4	162.04	1.34	9.58	26.85	29.64	13.71	43.50	-29.79
5	407.51	2.23	16.33	27.17	26.44	17.83	46.00	-28.17
6	900.15	3.60	23.20	26.78	22.20	22.22	46.00	-23.78



Report No.: SZEM150200069201

Page: 36 of 49

Transmitter Emission above 1GHz										
Test mode:		Transmitting	itting Test channel: Lowest Remark:		Peak					
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Fa	amp ctor (B)	Read Level (dBuV)	Level (dBuV/m)		t Line ıV/m)	Over Limit (dB)	Polarization
3653.574	6.88	33.04	38	3.81	49.03	50.14	7	' 4	-23.86	Vertical
4810.000	6.43	34.71	39	.24	51.23	53.13	7	' 4	-20.87	Vertical
7215.000	8.93	35.62	39	.07	47.77	53.25	7	' 4	-20.75	Vertical
9620.000	9.98	37.36	37	'.93	44.20	53.61	7	' 4	-20.39	Vertical
12157.870	10.85	38.90	38	.83	42.41	53.33	7	' 4	-20.67	Vertical
16078.630	14.40	40.25	41	.34	40.38	53.69	7	' 4	-20.31	Vertical
3706.322	6.85	33.08	38	.83	47.42	48.52	7	'4	-25.48	Horizontal
4810.000	6.43	34.71	39	.24	48.74	50.64	7	' 4	-23.36	Horizontal
7215.000	8.93	35.62	39	.07	47.58	53.06	7	' 4	-20.94	Horizontal
9620.000	9.98	37.36	37	'.93	44.23	53.64	7	'4	-20.36	Horizontal
12511.450	11.31	39.23	39	.13	42.12	53.53	7	'4	-20.47	Horizontal
17119.230	16.53	41.05	41	.65	37.72	53.65	7	' 4	-20.35	Horizontal

Test mode:		Transmitting	g Tes	st channel:	Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3766.574	6.82	33.13	38.86	47.49	48.58	74	-25.42	Vertical
4880.000	6.58	34.78	39.26	49.61	51.71	74	-22.29	Vertical
7320.000	9.07	35.51	39.06	48.07	53.59	74	-20.41	Vertical
9760.000	9.90	37.80	37.84	43.70	53.56	74	-20.44	Vertical
12669.370	10.65	39.27	39.26	42.50	53.16	74	-20.84	Vertical
17242.370	16.30	41.00	41.69	37.98	53.59	74	-20.41	Vertical
3780.095	6.81	33.14	38.86	47.77	48.86	74	-25.14	Horizontal
4880.000	6.58	34.78	39.26	50.23	52.33	74	-21.67	Horizontal
7320.000	9.07	35.51	39.06	47.67	53.19	74	-20.81	Horizontal
9760.000	9.90	37.80	37.84	43.13	52.99	74	-21.01	Horizontal
12201.510	10.92	38.95	38.87	42.43	53.43	74	-20.57	Horizontal
17211.500	16.35	41.01	41.68	37.57	53.25	74	-20.75	Horizontal



Report No.: SZEM150200069201

Page: 37 of 49

Test mode:		Transmitting	g Tes	st channel:	Highest	Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3910.999	6.74	33.35	38.92	47.28	48.45	74	-25.55	Vertical
4950.000	6.76	34.86	39.29	47.69	50.02	74	-23.98	Vertical
7425.000	9.23	35.43	39.05	47.54	53.15	74	-20.85	Vertical
9900.000	9.81	38.27	37.75	43.47	53.80	74	-20.20	Vertical
13178.750	10.89	39.22	39.67	42.94	53.38	74	-20.62	Vertical
17149.930	16.47	41.04	41.66	37.45	53.30	74	-20.70	Vertical
3848.436	6.77	33.24	38.89	47.11	48.23	74	-25.77	Horizontal
4950.000	6.76	34.86	39.29	48.11	50.44	74	-23.56	Horizontal
7425.000	9.23	35.43	39.05	47.93	53.54	74	-20.46	Horizontal
9900.000	9.81	38.27	37.75	42.90	53.23	74	-20.77	Horizontal
13037.830	10.70	39.25	39.55	42.81	53.21	74	-20.79	Horizontal
17273.290	16.24	40.99	41.70	37.58	53.11	74	-20.89	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM150200069201

Page: 38 of 49

6.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
	Above IGHZ	74.0	Peak Value						
			•						
Test Setup:									

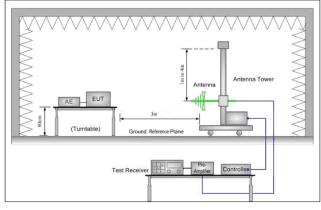

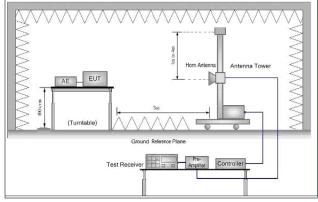


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel



Report No.: SZEM150200069201

Page: 39 of 49

	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting with DSSS(O-QPSK) modulation Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM150200069201

Page: 40 of 49

Test plot as follows:

Restricted bands	around fundan	nental frequenc	у			
Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical

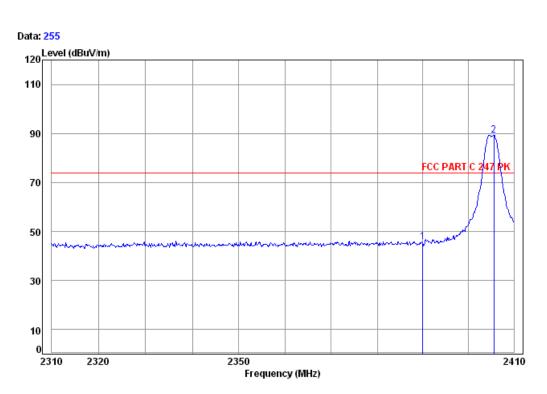

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 0692CR

Mode: : 2405 Band edge

Ant Preamp Cable Read limit Over Loss Factor Factor Level Limit Level Line MHz dΒ dB/m dBuV dBuV/m dBuV/m dΒ 2390.00 4.90 32.35 38.46 47.09 45.88 74.00 -28.12 2 pp 2405.61 4.92 32.41 38.46 90.55 89.42 74.00 15.42




Report No.: SZEM150200069201

Page: 41 of 49

Test mode: Transmitting Test channel: Lowest Remark: Peak Horizon



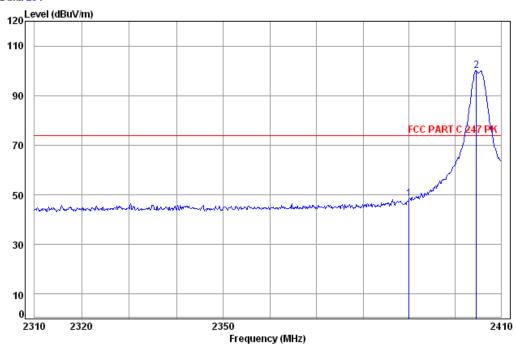

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 0692CR

Mode: : 2405 Band edge

		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			,			,		
1	2390.00	4 00	22.25	28 46	10 66	10 15	74 00	25 55
1	2390.00	4.50	32.33	30.40	49.00	40.45	74.00	-23.33
2 pp	2404.59	4.92	32.41	38.46	101.13	100.00	74.00	26.00



Report No.: SZEM150200069201

Page: 42 of 49

		Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Vertical
--	--	------------	--------------	---------------	--------	---------	---------	----------



Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 0692CR

Mode: : 2405 Band edge

	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	2390.00 2405.21							

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150200069201

Page: 43 of 49

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Horizontal
------------	--------------	---------------	--------	---------	---------	------------



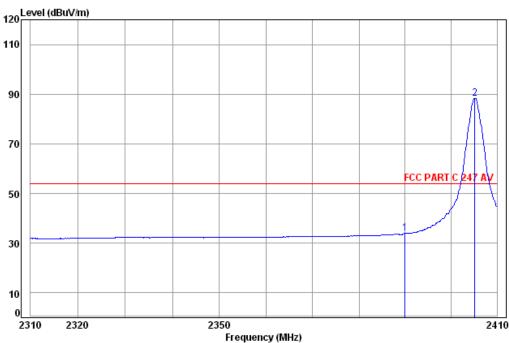

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 0692CR

Mode: : 2405 Band edge

	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2390.00							






Report No.: SZEM150200069201

Page: 44 of 49

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------



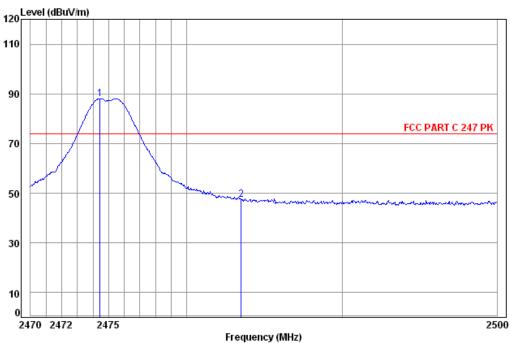

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 0692CR

Mode: : 2475 Band edge

		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	_							
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2474.45	5.02	32.44	38.46	89.03	88.03	74.00	14.03
2	2483.50	5.03	32.44	38.47	48.48	47.48	74.00	-26.52




Report No.: SZEM150200069201

Page: 45 of 49

Test mode: Transmitting Test channel: Highest Remark: Peak Horizontal

Data: 117

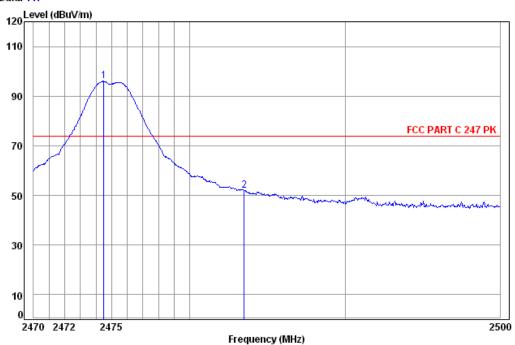

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 0692CR

Mode: : 2475 Band edge

Freq			Preamp Factor				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
 2474.51 2483.50							



Report No.: SZEM150200069201

Page: 46 of 49

Test mode: Transmitting Test channel: Highest Remark: Average



Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 0692CR

1 pp

Mode: : 2475 Band edge


Cable Ant Preamp Read Limit 0∨er Freq Loss Factor Factor Level Level Line Limit MHz dΒ dBuV dBuV/m dBuV/m dB/m dB 2475.34 5.02 32.44 38.47 92.88 91.87 54.00 37.87 2483.50 5.03 32.44 38.47 42.30 41.30 54.00 -12.70



Report No.: SZEM150200069201

47 of 49 Page:

Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Vertical
------------	--------------	---------------	---------	---------	---------	----------

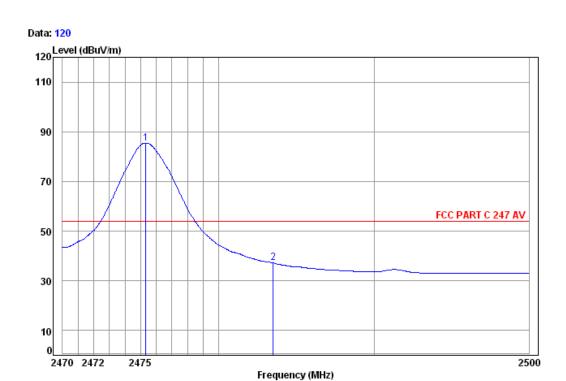

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 0692CR

Mode: : 2475 Band edge

				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	_
							2475.34 2483.50	

Note:

2

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: SZEM150200069201

Page: 48 of 49

7 Photographs - EUT Test Setup

Test model No.: AEH2130/37

7.1 Radiated Emission





Report No.: SZEM150200069201

Page: 49 of 49

7.2 Radiated Spurious Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1502000692CR.