

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM140600290801

Email: ee.shenzhen@sgs.com Page: 1 of 95

# **FCC REPORT**

Application No: SZEM1406002908RF

**Applicant:** WOOX Innovations Limited WOOX Innovations Limited

Factory: Yusan Technology(Shenzhen) Limited

**Product Name:** Wireless Portable Speaker

Model No.(EUT): BT2500B

Add Model No.:

BT2500X ("X" can be letter A to Z or nil, indicate different the

colour of enclose) except BT2500B

Trade mark: PHILIPS

FCC ID: 2AANUBT2500

Standards: 47 CFR Part 15, Subpart C (2013)

**Date of Receipt:** 2014-06-11

**Date of Test:** 2014-06-20 to 2014-08-07

**Date of Issue:** 2014-08-19

Test Result: PASS \*

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM140600290801

Page: 2 of 95

# 2 Version

| Revision Record |         |            |          |          |  |
|-----------------|---------|------------|----------|----------|--|
| Version         | Chapter | Date       | Modifier | Remark   |  |
| 00              |         | 2014-08-19 |          | Original |  |
|                 |         |            |          |          |  |
|                 |         |            |          |          |  |

| Authorized for issue by: |                               |                  |
|--------------------------|-------------------------------|------------------|
| Tested By                | Owen Zhon                     | 2014-08-07       |
|                          | (Owen Zhou) /Project Engineer | Date             |
| Prepared By              | Sade Luo .  (Sade Luo) /Clerk | 2014-08-19  Date |
| Checked By               | Emen _ L <sub>1</sub>         | 2014-08-21  Date |



Report No.: SZEM140600290801

Page: 3 of 95

# 3 Test Summary

| Test Item   | Test Requirement  | Test method        | Result |
|---|---|--------------------|--------|
| Antenna Requirement   | 47 CFR Part 15, Subpart C Section<br>15.203/15.247 (c)                                | ANSI C63.10 (2009) | PASS   |
| AC Power Line Conducted<br>Emission                               | 47 CFR Part 15, Subpart C Section<br>15.207   | ANSI C63.10 (2009) | PASS   |
| Conducted Peak Output<br>Power                                    | 47 CFR Part 15, Subpart C Section<br>15.247 (b)(1)                                    | ANSI C63.10 (2009) | PASS   |
| 20dB Occupied Bandwidth   | 47 CFR Part 15, Subpart C Section<br>15.247 (a)(1)                                    | ANSI C63.10 (2009) | PASS   |
| Carrier Frequencies<br>Separation                                 | 47 CFR Part 15, Subpart C Section<br>15.247 (a)(1)                                    | ANSI C63.10 (2009) | PASS   |
| Hopping Channel Number  | 47 CFR Part 15, Subpart C Section 15.247 (b)  | ANSI C63.10 (2009) | PASS   |
| Dwell Time  | 47 CFR Part 15, Subpart C Section<br>15.247 (a)(1)                                    | ANSI C63.10 (2009) | PASS   |
| Pseudorandom Frequency<br>Hopping Sequence                        | 47 CFR Part 15, Subpart C Section<br>15.247(b)(4)&TCB Exclusion List<br>(7 July 2002) | ANSI C63.10 (2009) | PASS   |
| Band-edge for RF<br>Conducted Emissions                           | 47 CFR Part 15, Subpart C Section 15.247(d)   | ANSI C63.10 (2009) | PASS   |
| RF Conducted Spurious<br>Emissions                                | 47 CFR Part 15, Subpart C Section 15.247(d)   | ANSI C63.10 (2009) | PASS   |
| Radiated Spurious emissions                                       | 47 CFR Part 15, Subpart C Section<br>15.205/15.209                                    | ANSI C63.10 (2009) | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section<br>15.205/15.209                                    | ANSI C63.10 (2009) | PASS   |

Remark:

Model No.: BT2500X("X" can be letter A to Z or nil, indicate different the colour of enclose)

Only the model BT2500B was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, only the color is different.



Report No.: SZEM140600290801

Page: 4 of 95

# 4 Contents

|   |              |  | Page |
|---|--------------|--|------|
| 1 | CC           | OVER PAGE                                      | 1    |
| 2 | VE           | ERSION   | 2    |
|   |              | EST SUMMARY                                    |      |
| 3 |              |  |      |
| 4 | CC           | ONTENTS  | 4    |
| 5 | GE           | ENERAL INFORMATION                             | 5    |
|   | 5.1          | CLIENT INFORMATION                             | 5    |
|   | 5.2          | GENERAL DESCRIPTION OF EUT                     |      |
|   | 5.3          | TEST ENVIRONMENT                               |      |
|   | 5.4          | DESCRIPTION OF SUPPORT UNITS                   | 7    |
|   | 5.5          | TEST LOCATION                                  |      |
|   | 5.6          | TEST FACILITY                                  |      |
|   | 5.7          | DEVIATION FROM STANDARDS                       |      |
|   | 5.8          | ABNORMALITIES FROM STANDARD CONDITIONS         |      |
|   | 5.9          | OTHER INFORMATION REQUESTED BY THE CUSTOMER    |      |
|   | 5.10         |  |      |
| 6 | TE           | EST RESULTS AND MEASUREMENT DATA               | 12   |
|   | 6.1          | Antenna Requirement                            | 12   |
|   | 6.2          | CONDUCTED EMISSIONS                            | 13   |
|   | 6.3          | CONDUCTED PEAK OUTPUT POWER                    |      |
|   | 6.4          | 20DB OCCUPY BANDWIDTH                          |      |
|   | 6.5          | CARRIER FREQUENCIES SEPARATION                 |      |
|   | 6.6          | HOPPING CHANNEL NUMBER                         |      |
|   | 6.7          | DWELL TIME                                     |      |
|   | 6.8          | BAND-EDGE FOR RF CONDUCTED EMISSIONS           |      |
|   | 6.9          | SPURIOUS RF CONDUCTED EMISSIONS                |      |
|   | 6.10<br>6.11 | PSEUDORANDOM FREQUENCY HOPPING SEQUENCE        |      |
|   | •            | 11.1 Radiated Emission below 1GHz              |      |
|   |              | 11.2 Transmitter Emission above 1GHz           |      |
|   |              | RESTRICTED BANDS AROLIND FUNDAMENTAL FREQUENCY |      |



Report No.: SZEM140600290801

Page: 5 of 95

# 5 General Information

# 5.1 Client Information

| Applicant:               | WOOX Innovations Limited  |  |  |  |
|--------------------------|---|--|--|--|
| Address of Applicant:    | 5/F-6/F, Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park Shatin, New Territories Hong Kong |  |  |  |
| Manufacturer:            | WOOX Innovations Limited  |  |  |  |
| Address of Manufacturer: | 5/F-6/F, Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park Shatin, New Territories Hong Kong |  |  |  |
| Factory:                 | Yusan Technology(Shenzhen) Limited  |  |  |  |
| Address of Factory:      | Haoyi Technology Park, Nan Huan Road, Shajing West, Baoan Shenzhen, Guang Dong P.R. China                                   |  |  |  |

# 5.2 General Description of EUT

| Product Name:          | Wireless Portable Speaker  |
|------------------------|--|
| Model No.:             | BT2500X("X" can be letter A to Z or nil, indicate different the colour of enclose) |
| Trade Mark:            | PHILIPS  |
| Operation Frequency:   | 2402MHz~2480MHz  |
| Bluetooth Version:     | V3.0( with EDR)  |
| Modulation Technique:  | Frequency Hopping Spread Spectrum(FHSS)  |
| Modulation Type:       | GFSK, π/4DQPSK, 8DPSK  |
| Number of Channel:     | 79   |
| Hopping Channel Type:  | Adaptive Frequency Hopping systems   |
| Sample Type:           | Portable production  |
| Test Software of EUT:  | CSR blue suite (manufacturer declare )   |
| Antenna Type and Gain: | Type :Integral Gain :0.54dBi   |
| Power Supply:          | USB charge   |
| Battery:               | DC3.7V 750 mAh (Li-ion Rechargeable Battery )                                      |
| Test Voltage:          | AC 120V 60Hz<br>DC 3.7V battery fully charged                                      |
| USB Charging Cable:    | 35cm(Unshielded)   |



Report No.: SZEM140600290801

Page: 6 of 95

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 21      | 2422MHz   | 41      | 2442MHz   | 61      | 2462MHz   |
| 2                                   | 2403MHz   | 22      | 2423MHz   | 42      | 2443MHz   | 62      | 2463MHz   |
| 3                                   | 2404MHz   | 23      | 2424MHz   | 43      | 2444MHz   | 63      | 2464MHz   |
| 4                                   | 2405MHz   | 24      | 2425MHz   | 44      | 2445MHz   | 64      | 2465MHz   |
| 5                                   | 2406MHz   | 25      | 2426MHz   | 45      | 2446MHz   | 65      | 2466MHz   |
| 6                                   | 2407MHz   | 26      | 2427MHz   | 46      | 2447MHz   | 66      | 2467MHz   |
| 7                                   | 2408MHz   | 27      | 2428MHz   | 47      | 2448MHz   | 67      | 2468MHz   |
| 8                                   | 2409MHz   | 28      | 2429MHz   | 48      | 2449MHz   | 68      | 2469MHz   |
| 9                                   | 2410MHz   | 29      | 2430MHz   | 49      | 2450MHz   | 69      | 2470MHz   |
| 10                                  | 2411MHz   | 30      | 2431MHz   | 50      | 2451MHz   | 70      | 2471MHz   |
| 11                                  | 2412MHz   | 31      | 2432MHz   | 51      | 2452MHz   | 71      | 2472MHz   |
| 12                                  | 2413MHz   | 32      | 2433MHz   | 52      | 2453MHz   | 72      | 2473MHz   |
| 13                                  | 2414MHz   | 33      | 2434MHz   | 53      | 2454MHz   | 73      | 2474MHz   |
| 14                                  | 2415MHz   | 34      | 2435MHz   | 54      | 2455MHz   | 74      | 2475MHz   |
| 15                                  | 2416MHz   | 35      | 2436MHz   | 55      | 2456MHz   | 75      | 2476MHz   |
| 16                                  | 2417MHz   | 36      | 2437MHz   | 56      | 2457MHz   | 76      | 2477MHz   |
| 17                                  | 2418MHz   | 37      | 2438MHz   | 57      | 2458MHz   | 77      | 2478MHz   |
| 18                                  | 2419MHz   | 38      | 2439MHz   | 58      | 2459MHz   | 78      | 2479MHz   |
| 19                                  | 2420MHz   | 39      | 2440MHz   | 59      | 2460MHz   | 79      | 2480MHz   |
| 20                                  | 2421MHz   | 40      | 2441MHz   | 60      | 2461MHz   |         |           |

#### Note

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2402MHz   |
| The Middle channel  | 2441MHz   |
| The Highest channel | 2480MHz   |



Report No.: SZEM140600290801

Page: 7 of 95

#### 5.3 Test Environment

| Operating Environment: | Operating Environment: |  |  |
|------------------------|------------------------|--|--|
| Temperature:           | 20.0 °C                |  |  |
| Humidity:              | 55 % RH                |  |  |
| Atmospheric Pressure:  | 1005 mbar              |  |  |

# 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer  | Model No.   |
|-------------|---------------|-------------|
| Adapter     | Supply by SGS | SKP0500500P |

# 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM140600290801

Page: 8 of 95

# 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 5.7 Deviation from Standards

None.

# 5.8 Abnormalities from Standard Conditions

None.

### 5.9 Other Information Requested by the Customer

None.





Report No.: SZEM140600290801

Page: 9 of 95

# 5.10 Equipment List

|      | Conducted Emission                    |  |                     |                  |                           |  |  |
|------|---------------------------------------|--|---------------------|------------------|---------------------------|--|--|
| Item | Test Equipment                        | Manufacturer                             | Model No.           | Inventory<br>No. | Cal.Due date (yyyy-mm-dd) |  |  |
| 1    | Shielding Room                        | ZhongYu Electron                         | GB-88               | SEL0042          | 2015-06-10                |  |  |
| 2    | LISN                                  | Rohde & Schwarz                          | ENV216              | SEL0152          | 2014-10-24                |  |  |
| 3    | LISN                                  | ETS-LINDGREN                             | 3816/2              | SEL0021          | 2015-05-16                |  |  |
| 4    | 8 Line ISN                            | Fischer Custom<br>Communications<br>Inc. | FCC-TLISN-<br>T8-02 | SEL0162          | 2014-11-10                |  |  |
| 5    | 4 Line ISN                            | Fischer Custom<br>Communications<br>Inc. | FCC-TLISN-<br>T4-02 | SEL0163          | 2014-11-10                |  |  |
| 6    | 2 Line ISN                            | Fischer Custom<br>Communications<br>Inc. | FCC-TLISN-<br>T2-02 | SEL0164          | 2014-11-10                |  |  |
| 7    | EMI Test Receiver                     | Rohde & Schwarz                          | ESCI                | SEL0022          | 2015-05-16                |  |  |
| 8    | Coaxial Cable                         | SGS                                      | N/A                 | SEL0025          | 2015-05-29                |  |  |
| 9    | DC Power Supply                       | Zhao Xin                                 | RXN-305D            | SEL0117          | 2014-10-24                |  |  |
| 10   | Humidity/<br>Temperature<br>Indicator | Shanhai Qixiang                          | ZJ1-2B              | SEL0103          | 2014-10-24                |  |  |
| 11   | Barometer                             | Chang Chun                               | DYM3                | SEL0088          | 2015-05-16                |  |  |



Report No.: SZEM140600290801

Page: 10 of 95

|      | RE in Chamber                      |                                    |           |                  |                           |  |
|------|------------------------------------|------------------------------------|-----------|------------------|---------------------------|--|
| Item | Test Equipment                     | Manufacturer                       | Model No. | Inventory<br>No. | Cal.Due date (yyyy-mm-dd) |  |
| 1    | 3m Semi-Anechoic<br>Chamber        | ETS-LINDGREN                       | N/A       | SEL0017          | 2015-06-10                |  |
| 2    | EMI Test Receiver                  | Rohde & Schwarz                    | ESIB26    | SEL0023          | 2015-05-16                |  |
| 3    | EMI Test software                  | AUDIX                              | E3        | SEL0050          | N/A                       |  |
| 4    | BiConiLog Antenna<br>(26-3000MHz)  | ETS-LINDGREN                       | 3142C     | SEL0015          | 2014-10-24                |  |
| 5    | Double-ridged horn<br>(1-18GHz)    | ETS-LINDGREN                       | 3117      | SEL0006          | 2014-10-24                |  |
| 6    | Horn Antenna<br>(18-26GHz)         | ETS-LINDGREN                       | 3160      | SEL0076          | 2014-10-24                |  |
| 7    | Pre-amplifier<br>(0.1-1300MHz)     | Agilent<br>Technologies            | 8447D     | SEL0053          | 2015-05-16                |  |
| 8    | Pre-Amplifier<br>(0.1-26.5GHz)     | Compliance Directions Systems Inc. | PAP-0126  | SEL0168          | 2014-10-24                |  |
| 9    | Coaxial cable                      | SGS                                | N/A       | SEL0027          | 2015-05-29                |  |
| 10   | Coaxial cable                      | SGS                                | N/A       | SEL0189          | 2015-05-29                |  |
| 11   | Coaxial cable                      | SGS                                | N/A       | SEL0121          | 2015-05-29                |  |
| 12   | Coaxial cable                      | SGS                                | N/A       | SEL0178          | 2015-05-29                |  |
| 13   | Band filter                        | Amindeon                           | 82346     | SEL0094          | 2015-05-16                |  |
| 14   | Barometer                          | Chang Chun                         | DYM3      | SEL0088          | 2015-05-16                |  |
| 15   | DC Power Supply                    | Zhao Xin                           | RXN-305D  | SEL0117          | 2014-10-24                |  |
| 16   | Humidity/<br>Temperature Indicator | Shanhai Qixiang                    | ZJ1-2B    | SEL0103          | 2014-10-24                |  |
| 17   | Signal Generator<br>(10M-27GHz)    | Rohde & Schwarz                    | SMR27     | SEL0067          | 2015-05-16                |  |
| 18   | Signal Generator                   | Rohde & Schwarz                    | SMY01     | SEL0155          | 2014-10-24                |  |
| 19   | Loop Antenna                       | Beijing Daze                       | ZN30401   | SEL0203          | 2015-06-04                |  |



Report No.: SZEM140600290801

Page: 11 of 95

|      | RF connected test                     |                         |           |                  |                           |  |  |  |
|------|---------------------------------------|-------------------------|-----------|------------------|---------------------------|--|--|--|
| Item | Test Equipment                        | Manufacturer            | Model No. | Inventory<br>No. | Cal.Due date (yyyy-mm-dd) |  |  |  |
| 1    | DC Power Supply                       | Zhao Xin                | RXN-305D  | SEL0117          | 2014-10-24                |  |  |  |
| 2    | Humidity/<br>Temperature<br>Indicator | HYGRO                   | ZJ1-2B    | SEL0033          | 2014-10-24                |  |  |  |
| 3    | Spectrum Analyzer                     | Rohde & Schwarz         | FSP       | SEL0154          | 2014-10-24                |  |  |  |
| 4    | Coaxial cable                         | SGS                     | N/A       | SEL0178          | 2015-05-29                |  |  |  |
| 5    | Coaxial cable                         | SGS                     | N/A       | SEL0179          | 2015-05-29                |  |  |  |
| 6    | Barometer                             | ChangChun               | DYM3      | SEL0088          | 2015-05-16                |  |  |  |
| 7    | Signal Generator                      | Rohde & Schwarz         | SML03     | SEL0068          | 2015-05-16                |  |  |  |
| 8    | Band filter                           | amideon                 | 82346     | SEL0094          | 2015-05-16                |  |  |  |
| 9    | POWER METER                           | R & S                   | NRVS      | SEL0144          | 2014-10-24                |  |  |  |
| 10   | Attenuator                            | Beijin feihang taida    | TST-2-6dB | SEL0205          | 2015-05-16                |  |  |  |
| 11   | Power<br>Divider(splitter)            | Agilent<br>Technologies | 11636B    | SEL0130          | 2014-10-24                |  |  |  |

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140600290801

Page: 12 of 95

# 6 Test results and Measurement Data

# 6.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.54dBi.



Report No.: SZEM140600290801

Page: 13 of 95


#### 6.2 Conducted Emissions

| Test Requirement:     | 47 CFR Part 15C Section 15.207   |                        |                       |       |  |
|-----------------------|--|------------------------|-----------------------|-------|--|
| Test Method:          | ANSI C63.10: 2009  |                        |                       |       |  |
| Test Frequency Range: | 150kHz to 30MHz  |                        |                       |       |  |
| Limit:                | Francisco de (MILE)  | Limit (d               | BuV)                  |       |  |
|                       | Frequency range (MHz)  | Quasi-peak             | Average               |       |  |
|                       | 0.15-0.5   | 66 to 56*              | 56 to 46*             |       |  |
|                       | 0.5-5  | 56                     | 46                    |       |  |
|                       | 5-30   | 60                     | 50                    |       |  |
|                       | * Decreases with the logarithm   | n of the frequency.    |                       | 7     |  |
| Test Procedure:       | <ol> <li>The mains terminal disturb<br/>room.</li> </ol>   | bance voltage test was | s conducted in a ship | elded |  |
|                       | <ul> <li>room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to</li> </ul> |                        |                       |       |  |



Report No.: SZEM140600290801

Page: 14 of 95

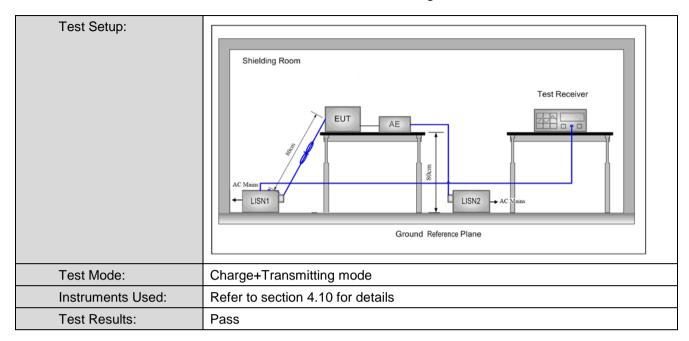

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM140600290801

Page: 15 of 95

#### Live line:

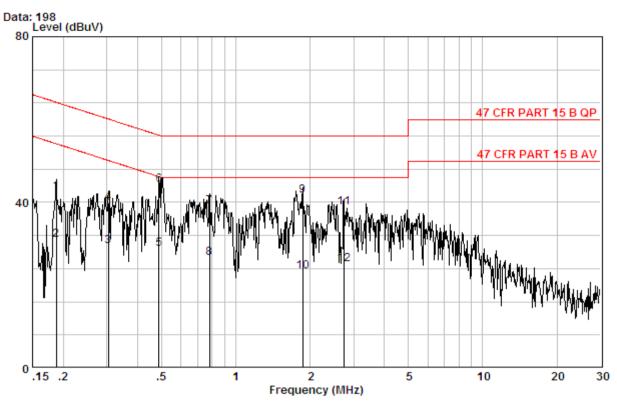

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 2908RF

Test mode : Charge+TX mode


|     | Freq    | Cable<br>Loss | LISN<br>Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|-----|---------|---------------|----------------|---------------|-------|---------------|---------------|---------|
|     | MHz     | dB            | dB             | dBuV          | dBuV  | dBuV          | dB            |         |
| 1   | 0.18738 | 0.02          | 9.70           | 32.83         | 42.55 | 64.15         | -21.61        | QP      |
| 2   | 0.18738 | 0.02          | 9.70           | 21.25         | 30.97 | 54.15         | -23.18        | Average |
| 3   | 0.30509 | 0.01          | 9.71           | 19.69         | 29.41 | 50.10         | -20.69        | Average |
| 4   | 0.30509 | 0.01          | 9.71           | 30.07         | 39.79 | 60.10         | -20.32        | QP      |
| 5   | 0.48890 | 0.01          | 9.80           | 19.00         | 28.81 | 46.19         | -17.38        | Average |
| 6 @ | 0.48890 | 0.01          | 9.80           | 34.40         | 44.21 | 56.19         | -11.98        | QP      |
| 7   | 0.78345 | 0.02          | 9.80           | 29.17         | 38.99 | 56.00         | -17.01        | QP      |
| 8   | 0.78345 | 0.02          | 9.80           | 16.74         | 26.56 | 46.00         | -19.44        | Average |
| 9   | 1.868   | 0.02          | 9.80           | 31.74         | 41.56 | 56.00         | -14.44        | QP      |
| 10  | 1.868   | 0.02          | 9.80           | 13.43         | 23.25 | 46.00         | -22.75        | Average |
| 11  | 2.736   | 0.02          | 9.83           | 28.92         | 38.77 | 56.00         | -17.23        | QP      |
| 12  | 2.736   | 0.02          | 9.83           | 15.20         | 25.05 | 46.00         | -20.95        | Average |



Report No.: SZEM140600290801

Page: 16 of 95

#### Neutral line:

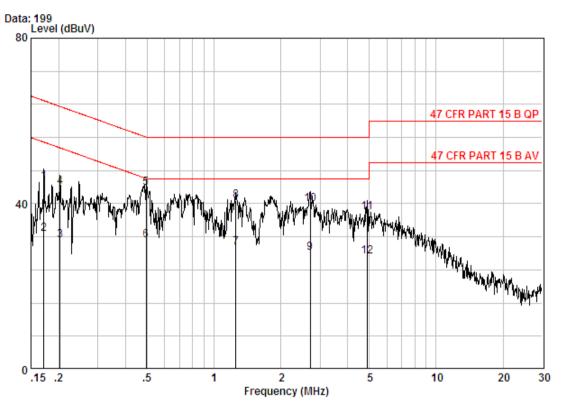

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 2908RF

Test mode : Charge+TX mode

|     | Freq    | Cable<br>Loss | LISN<br>Factor | Read<br>Level | Level | Limit<br>Line | Over<br>Limit | Remark  |
|-----|---------|---------------|----------------|---------------|-------|---------------|---------------|---------|
|     | MHz     | dB            | dB             | dBuV          | dBuV  | dBuV          | dB            |         |
| 1   | 0.17124 | 0.02          | 9.70           | 35.70         | 45.42 | 64.90         | -19.48        | QP      |
| 2   | 0.17124 | 0.02          | 9.70           | 22.97         | 32.69 | 54.90         | -22.21        | Average |
| 3   | 0.20289 | 0.02          | 9.70           | 21.47         | 31.19 | 53.49         | -22.30        | Average |
| 4   | 0.20289 | 0.02          | 9.70           | 34.25         | 43.97 | 63.49         | -19.52        | QP      |
| 5 @ | 0.49411 | 0.01          | 9.80           | 33.93         | 43.74 | 56.10         | -12.36        | QP      |
| 6   | 0.49411 | 0.01          | 9.80           | 21.31         | 31.12 | 46.10         | -14.97        | Average |
| 7   | 1.255   | 0.02          | 9.80           | 19.52         | 29.34 | 46.00         | -16.66        | Average |
| 8   | 1.255   | 0.02          | 9.80           | 30.85         | 40.67 | 56.00         | -15.33        | QP      |
| 9   | 2.707   | 0.02          | 9.83           | 18.33         | 28.18 | 46.00         | -17.82        | Average |
| 10  | 2.707   | 0.02          | 9.83           | 30.03         | 39.89 | 56.00         | -16.11        | QP      |
| 11  | 4.874   | 0.01          | 9.90           | 27.94         | 37.85 | 56.00         | -18.15        | QP      |
| 12  | 4.874   | 0.01          | 9.90           | 17.42         | 27.33 | 46.00         | -18.67        | Average |

#### Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140600290801

Page: 17 of 95

# **6.3** Conducted Peak Output Power

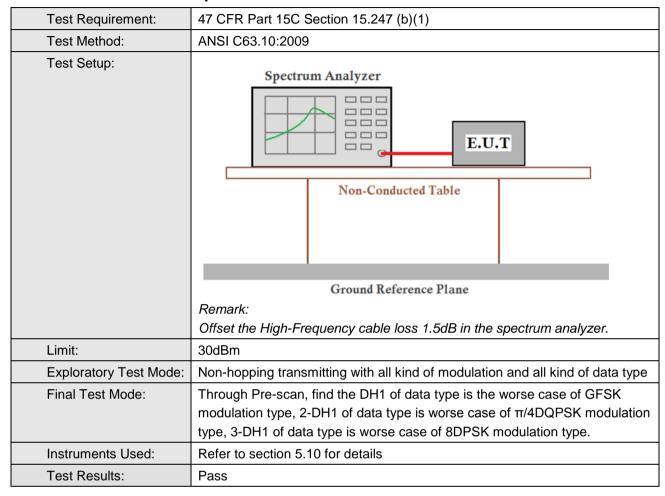



Report No.: SZEM140600290801

Page: 18 of 95

#### **Measurement Data**

| GFSK mode    |                                      |             |        |  |  |  |  |
|--------------|--------------------------------------|-------------|--------|--|--|--|--|
| Test channel | Peak Output Power (dBm)              | Limit (dBm) | Result |  |  |  |  |
| Lowest       | -3.19                                | 20.00       | Pass   |  |  |  |  |
| Middle       | 0.93                                 | 20.00       | Pass   |  |  |  |  |
| Highest      | 2.75                                 | 20.00       | Pass   |  |  |  |  |
|              | π/4DQPSK m                           | ode         |        |  |  |  |  |
| Test channel | Peak Output Power (dBm)              | Limit (dBm) | Result |  |  |  |  |
| Lowest       | -5.32                                | 20.00       | Pass   |  |  |  |  |
| Middle       | -1.30                                | 20.00       | Pass   |  |  |  |  |
| Highest      | 0.60                                 | 20.00       | Pass   |  |  |  |  |
|              | 8DPSK mode                           |             |        |  |  |  |  |
| Test channel | Test channel Peak Output Power (dBm) |             | Result |  |  |  |  |
| Lowest       | -4.83                                | 20.00       | Pass   |  |  |  |  |
| Middle       | -0.62                                | 20.00       | Pass   |  |  |  |  |
| Highest 1.21 |                                      | 20.00       | Pass   |  |  |  |  |






Report No.: SZEM140600290801


Page: 19 of 95

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

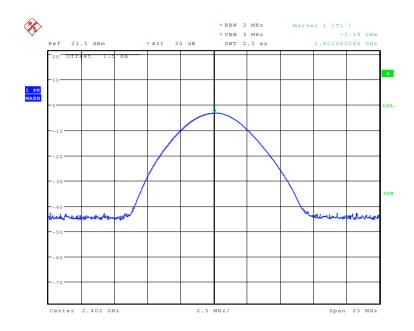

Test mode: GFSK Test channel: Middle

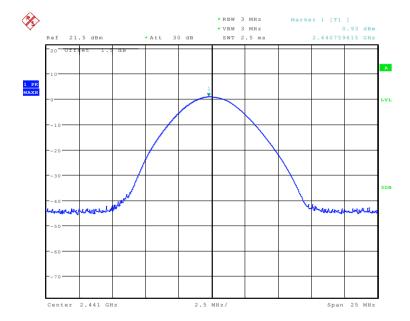





Report No.: SZEM140600290801

Page: 20 of 95

Test mode: GFSK Test channel: Highest

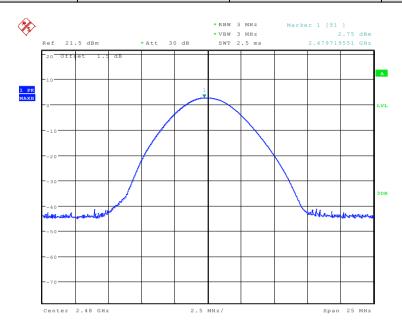

Test mode: π/4DQPSK Test channel: Lowest

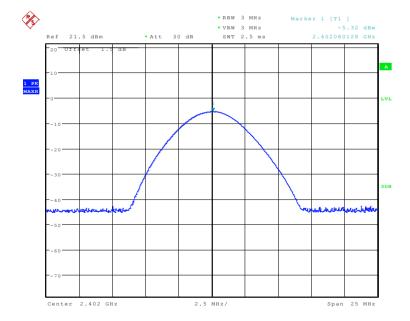





Report No.: SZEM140600290801

Page: 21 of 95

Test mode: π/4DQPSK Test channel: Middle

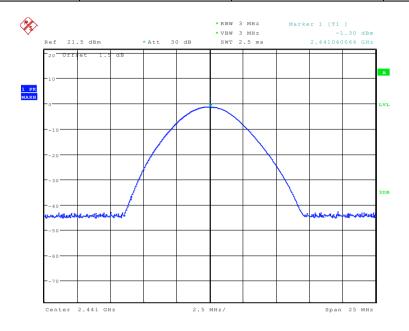

Test mode: π/4DQPSK Test channel: Highest

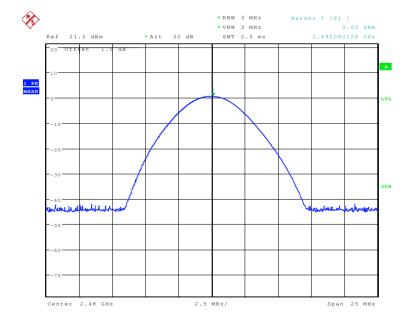





Report No.: SZEM140600290801

Page: 22 of 95

Test mode: 8DPSK Test channel: Lowest

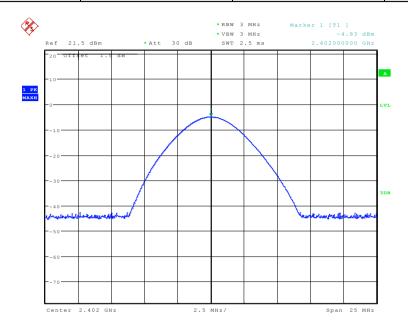

Test mode: 8DPSK Test channel: Middle

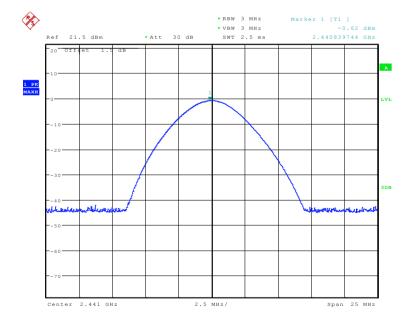




Report No.: SZEM140600290801

Page: 23 of 95

Test mode: 8DPSK Test channel: Highest

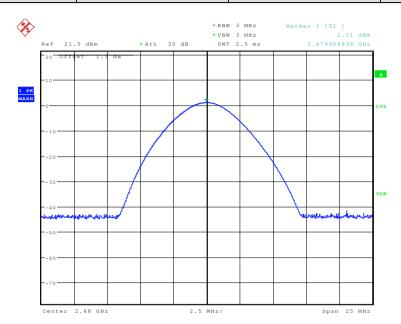




Report No.: SZEM140600290801

Page: 24 of 95

# 6.4 20dB Occupy Bandwidth

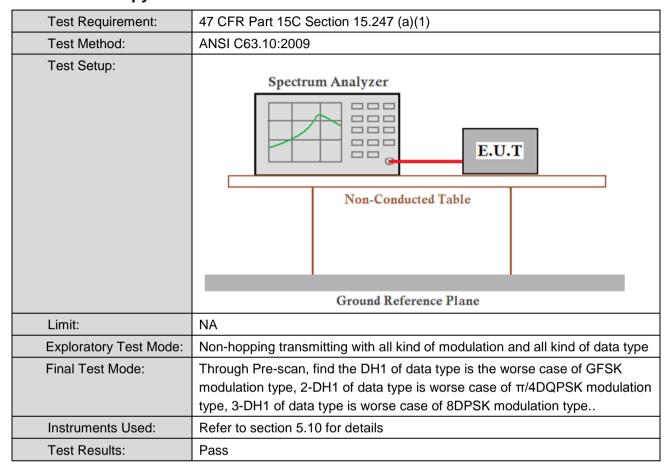

#### **Measurement Data**

| Test channel | 2             | 20dB Occupy Bandwidth (kHz) |             |  |  |
|--------------|---------------|-----------------------------|-------------|--|--|
| rest channel | GFSK          | π/4DQPSK                    | 8DPSK       |  |  |
| Lowest       | 884.615384615 | 1206.730769                 | 1211.538462 |  |  |
| Middle       | 894.230769231 | 1216.346154                 | 1216.346154 |  |  |
| Highest      | 894.230769231 | 1221.153846                 | 1216.346154 |  |  |




Report No.: SZEM140600290801


Page: 25 of 95

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

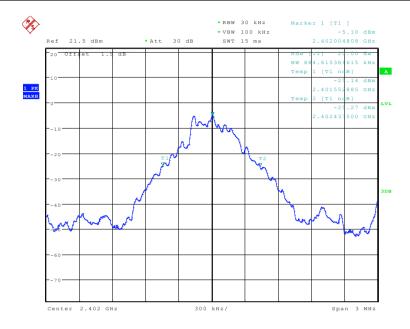

Test mode: GFSK Test channel: Middle

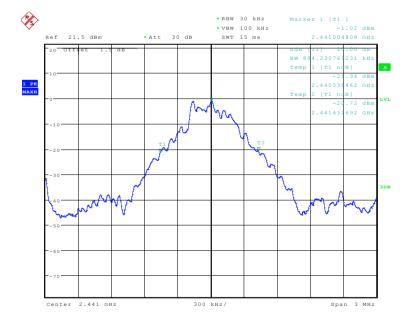





Report No.: SZEM140600290801

Page: 26 of 95

Test mode: GFSK Test channel: Highest

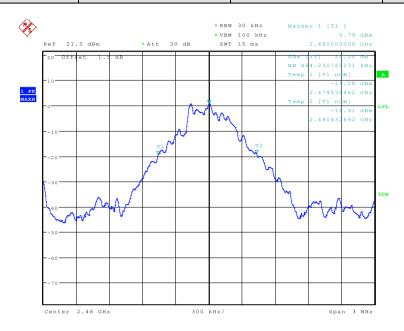

Test mode: π/4DQPSK Test channel: Lowest

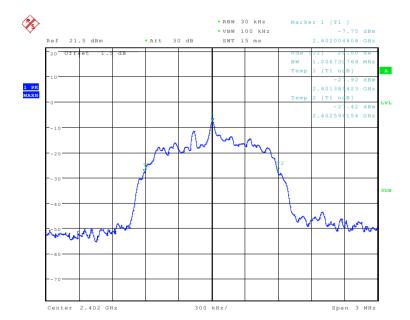





Report No.: SZEM140600290801

Page: 27 of 95

Test mode: π/4DQPSK Test channel: Middle

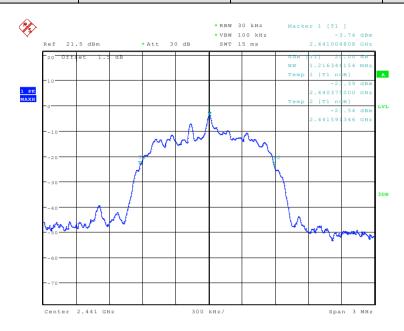

Test mode: π/4DQPSK Test channel: Highest

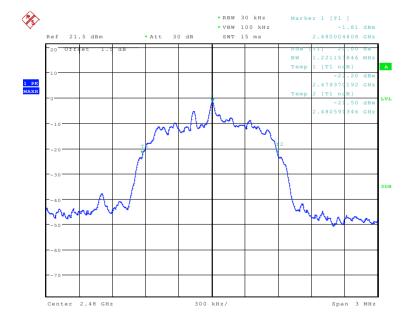





Report No.: SZEM140600290801

Page: 28 of 95

Test mode: 8DPSK Test channel: Lowest

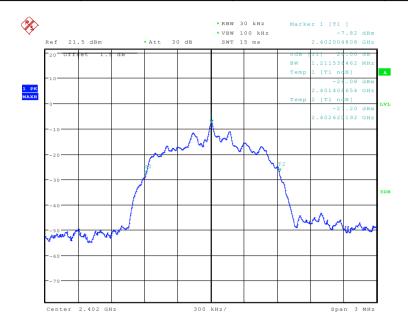

Test mode: 8DPSK Test channel: Middle

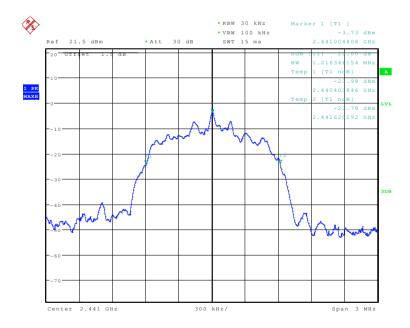





Report No.: SZEM140600290801

Page: 29 of 95

Test mode: 8DPSK Test channel: Highest





Report No.: SZEM140600290801

Page: 30 of 95

# 6.5 Carrier Frequencies Separation

| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(1)  |  |  |
|------------------------|--|--|--|
| Test Method:           | ANSI C63.10:2009   |  |  |
| Test Setup:            | Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  |  |  |
| Limit:                 | 2/3 of the 20dB bandwidth  |  |  |
|                        | Remark: the transmission power is less than 0.125W.  |  |  |
| Exploratory Test Mode: | Hopping transmitting with all kind of modulation and all kind of data type   |  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type. |  |  |
| Instruments Used:      | Refer to section 5.10 for details  |  |  |
| Test Results:          | Pass   |  |  |



Report No.: SZEM140600290801

Page: 31 of 95

#### **Measurement Data**

| GFSK mode    |                                      |             |        |  |  |
|--------------|--------------------------------------|-------------|--------|--|--|
| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |  |  |
| Lowest       | 1002                                 | ≥596        | Pass   |  |  |
| Middle       | 1002                                 | ≥596        | Pass   |  |  |
| Highest      | 1002                                 | ≥596        | Pass   |  |  |
|              | π/4DQPSK m                           | node        |        |  |  |
| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |  |  |
| Lowest       | 1002                                 | ≥814        | Pass   |  |  |
| Middle       | 1002                                 | ≥814        | Pass   |  |  |
| Highest      | Highest 1002                         |             | Pass   |  |  |
|              | 8DPSK mo                             | de          |        |  |  |
| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |  |  |
| Lowest       | 1002                                 | ≥811        | Pass   |  |  |
| Middle       | 1002                                 | ≥811        | Pass   |  |  |
| Highest 1002 |                                      | ≥811        | Pass   |  |  |

Note: According to section 6.4,

| Mode     | 20dB bandwidth (kHz) | Limit (kHz)                      |
|----------|----------------------|----------------------------------|
| Wede     | (worse case)         | (Carrier Frequencies Separation) |
| GFSK     | 894.230769231        | 596                              |
| π/4DQPSK | 1221.153846          | 814                              |
| 8DPSK    | 1216.346154          | 811                              |



Report No.: SZEM140600290801


Page: 32 of 95

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest



Test mode: GFSK Test channel: Middle

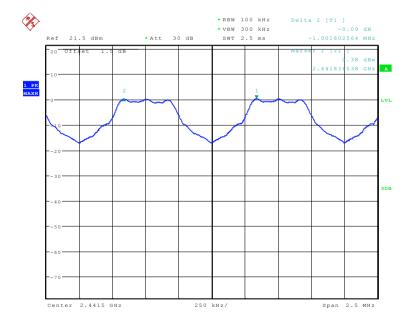





Report No.: SZEM140600290801

Page: 33 of 95

Test mode: GFSK Test channel: Highest

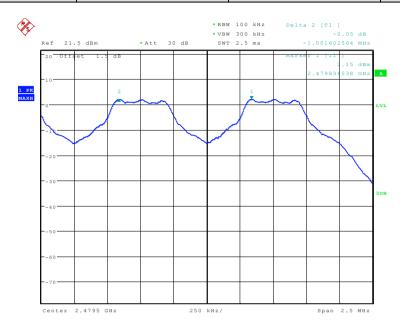

Test mode: π/4DQPSK Test channel: Lowest

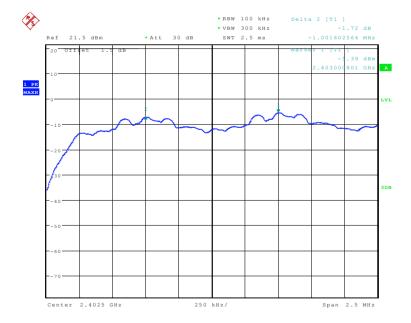





Report No.: SZEM140600290801

Page: 34 of 95

Test mode: π/4DQPSK Test channel: Middle

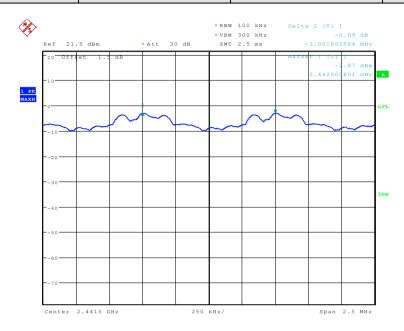

Test mode: π/4DQPSK Test channel: Highest

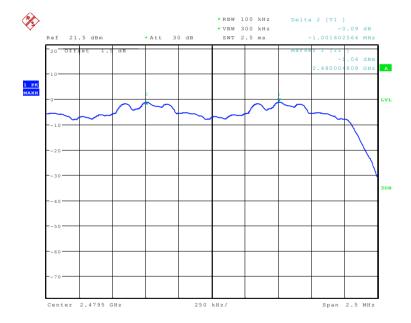





Report No.: SZEM140600290801

Page: 35 of 95

Test mode: 8DPSK Test channel: Lowest

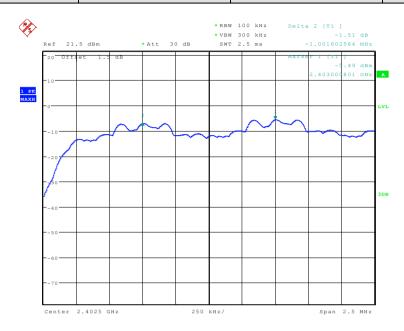

Test mode: 8DPSK Test channel: Middle

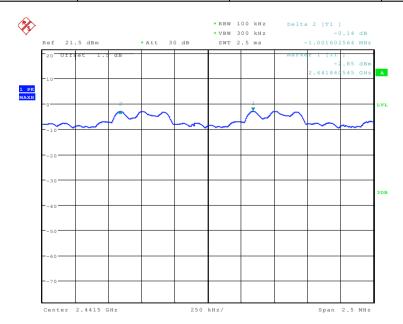



Report No.: SZEM140600290801

Page: 36 of 95

Test mode: 8DPSK Test channel: Highest






Report No.: SZEM140600290801

Page: 37 of 95

## 6.6 Hopping Channel Number

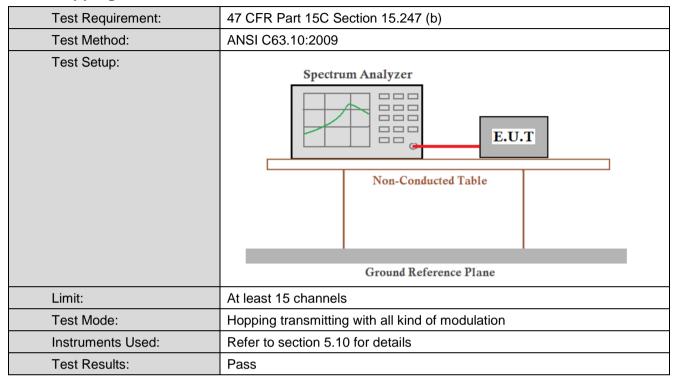

#### **Measurement Data**


| Mode     | Hopping channel numbers | Limit |
|----------|-------------------------|-------|
| GFSK     | 79                      | ≥15   |
| π/4DQPSK | 79                      | ≥15   |
| 8DPSK    | 79                      | ≥15   |




Report No.: SZEM140600290801


Page: 38 of 95

Test plot as follows



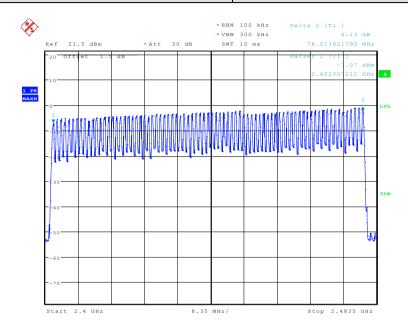

Test mode: π/4DQPSK

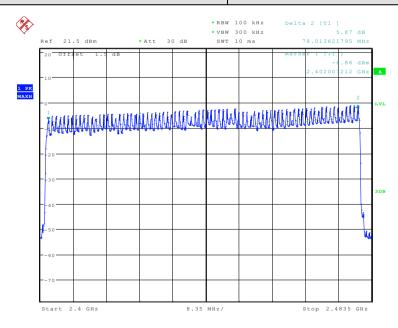






Report No.: SZEM140600290801

Page: 39 of 95

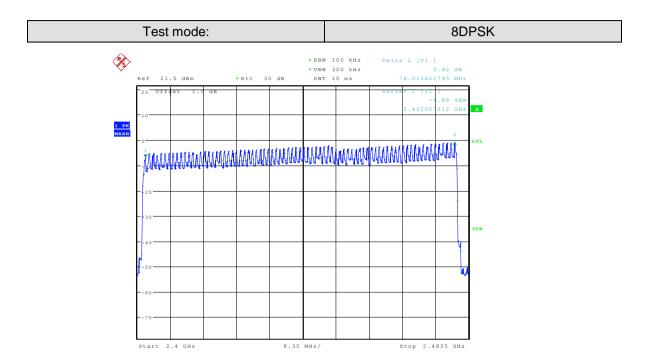




Report No.: SZEM140600290801

Page: 40 of 95

#### 6.7 Dwell Time

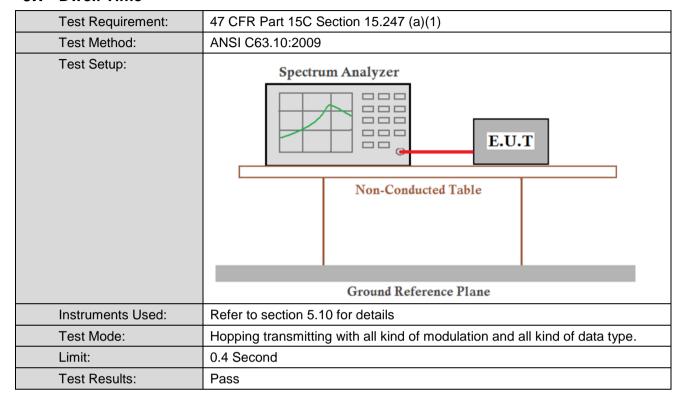

#### **Measurement Data**

| Mode     | Packet | Dwell time (second) | Limit (second) |
|----------|--------|---------------------|----------------|
| GFSK     | DH1    | 0.12704             | 0.4            |
|          | DH3    | 0.26608             | 0.4            |
|          | DH5    | 0.31911             | 0.4            |
| π/4DQPSK | 2-DH1  | 0.13216             | 0.4            |
|          | 2-DH3  | 0.26608             | 0.4            |
|          | 2-DH5  | 0.27376             | 0.4            |
| 8DPSK    | 3-DH1  | 0.12803             | 0.4            |
|          | 3-DH3  | 0.26608             | 0.4            |
|          | 3-DH5  | 0.32043             | 0.4            |



Report No.: SZEM140600290801

Page: 41 of 95

#### **Test Result:**

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)\*total number=dwell time (ms)

The lowest channel (2402MHz), as below:

DH1 time slot=0.397 (ms)\*total number=127.04 (ms)

DH3 time slot=1.663 (ms)\* total number =266.08 (ms)

DH5 time slot=2.901 (ms)\* total number =319.11 (ms)

2-DH1 time slot=0.413 (ms)\*total number=132.16 (ms)

2-DH3 time slot=1.663 (ms)\* total number =266.08 (ms)

2-DH5 time slot=1.711 (ms)\* total number =273.76 (ms)

3-DH1 time slot=0.413 (ms)\*total number=128.03 (ms)

3-DH3 time slot=1.663 (ms)\* total number =266.08 (ms)


3-DH5 time slot=2.913 (ms)\* total number =320.43 (ms)





Report No.: SZEM140600290801

Page: 42 of 95

#### Test plot as follows:



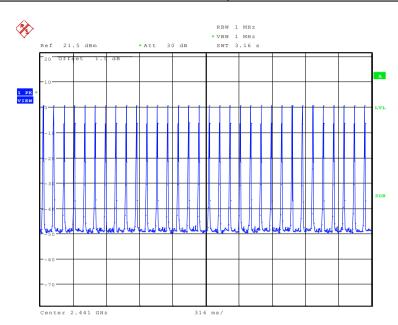

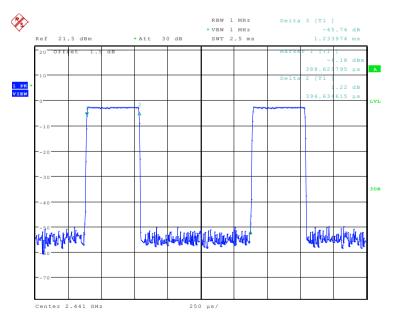





Report No.: SZEM140600290801

Page: 43 of 95



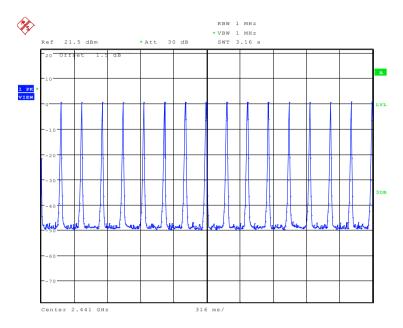


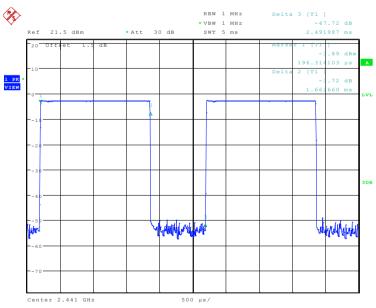





Report No.: SZEM140600290801

Page: 44 of 95



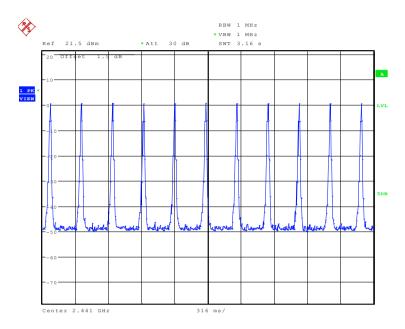


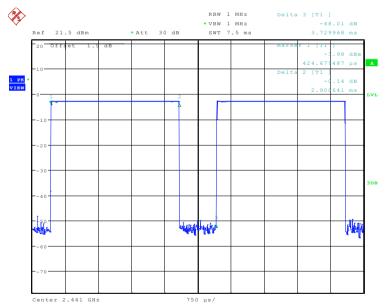





Report No.: SZEM140600290801

Page: 45 of 95



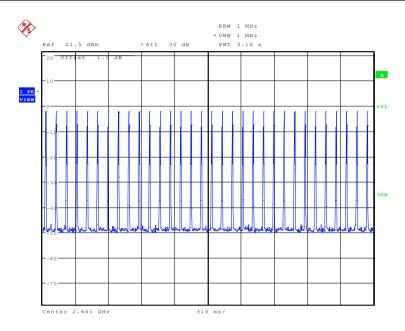

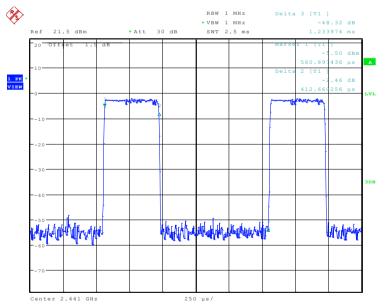





Report No.: SZEM140600290801

Page: 46 of 95



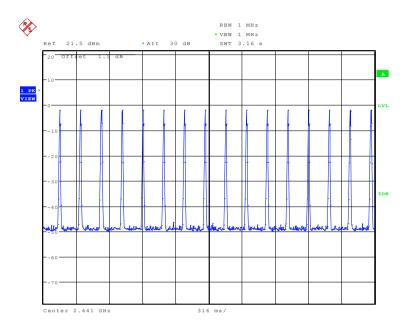


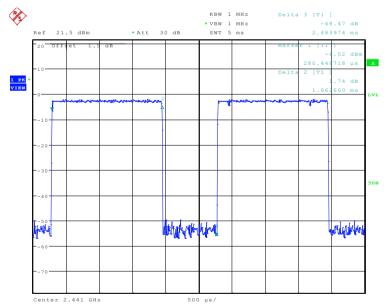





Report No.: SZEM140600290801

Page: 47 of 95



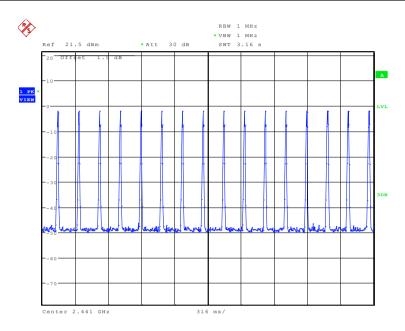

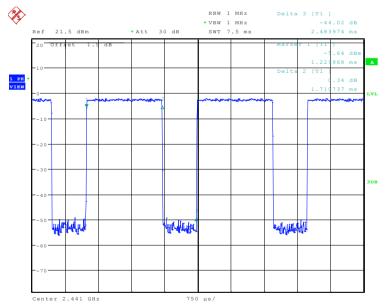





Report No.: SZEM140600290801

Page: 48 of 95



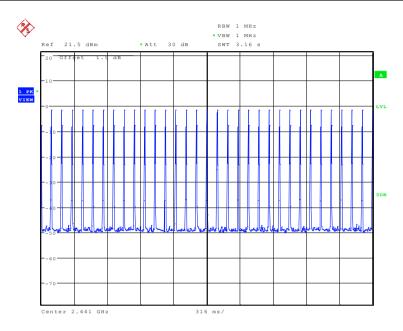

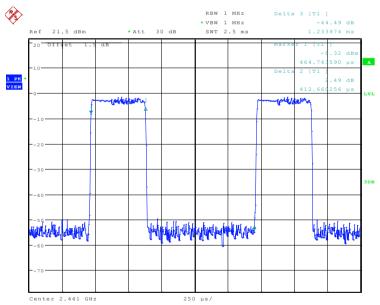







Report No.: SZEM140600290801

Page: 49 of 95



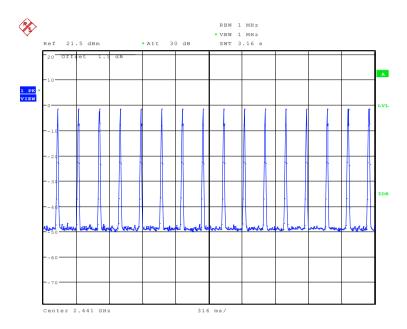

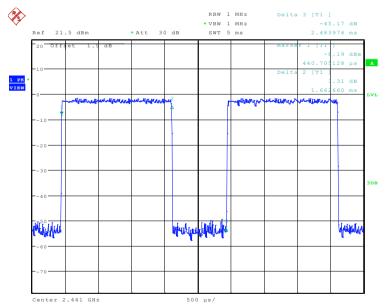





Report No.: SZEM140600290801

Page: 50 of 95



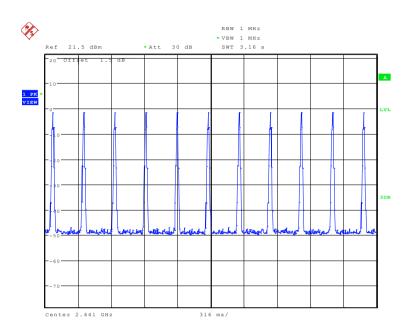

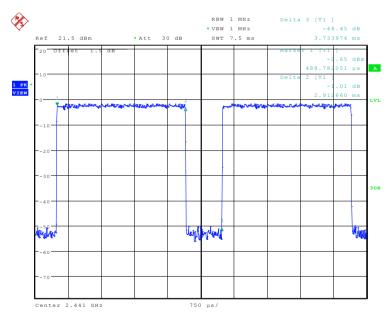




Report No.: SZEM140600290801

Page: 51 of 95

# 6.8 Band-edge for RF Conducted Emissions

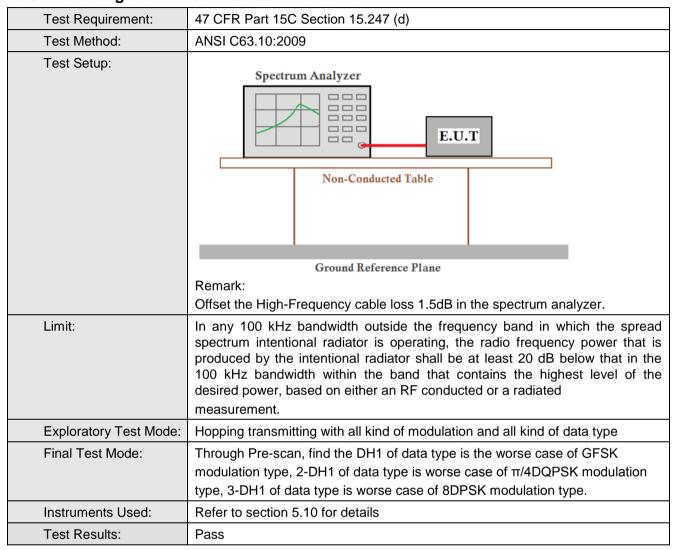





Report No.: SZEM140600290801

Page: 52 of 95

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

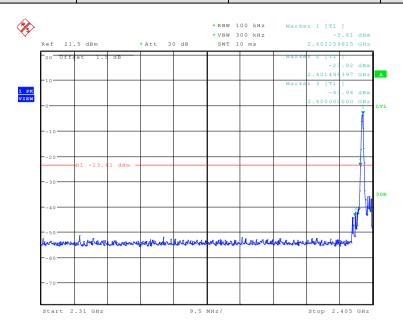

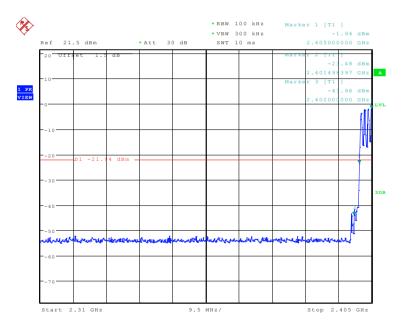





Report No.: SZEM140600290801

Page: 53 of 95

Test mode: GFSK Test channel: Highest

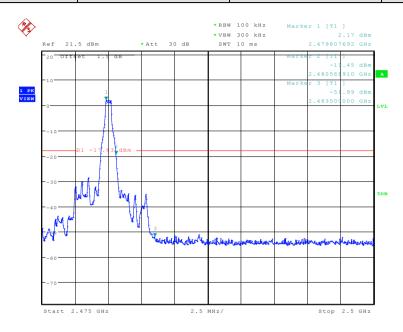

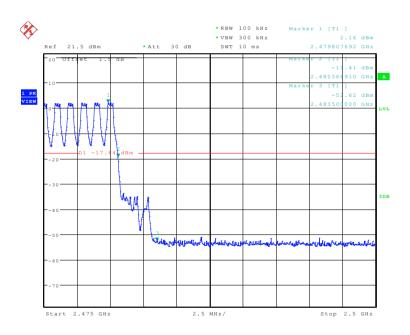





Report No.: SZEM140600290801

Page: 54 of 95

Test mode: π/4DQPSK Test channel: Lowest

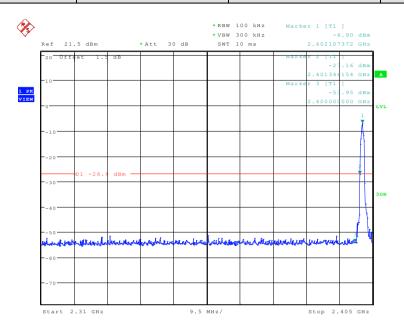

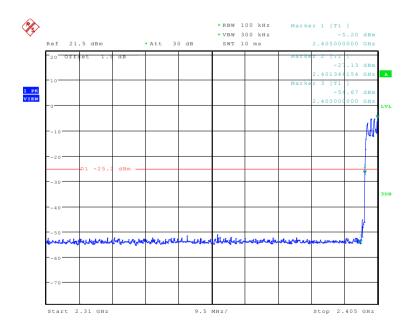





Report No.: SZEM140600290801

Page: 55 of 95

Test mode: π/4DQPSK Test channel: Highest

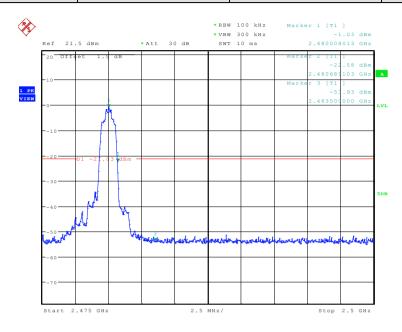

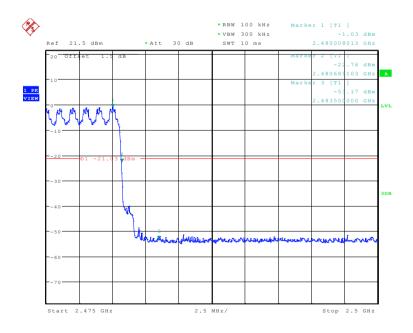





Report No.: SZEM140600290801

Page: 56 of 95

Test mode: 8DPSK Test channel: Lowest

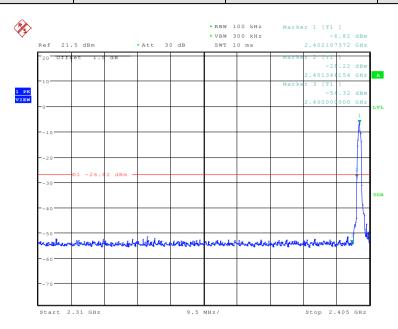

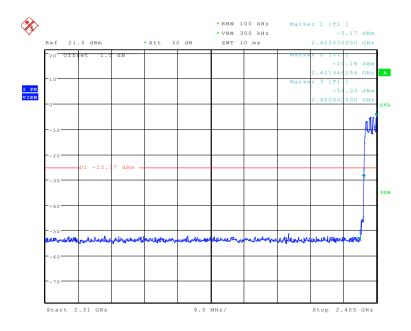





Report No.: SZEM140600290801

Page: 57 of 95

Test mode: 8DPSK Test channel: Highest

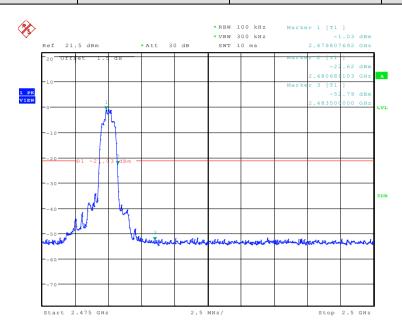

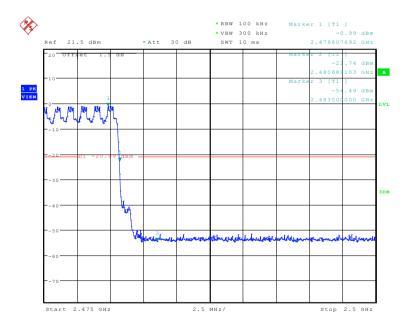



Report No.: SZEM140600290801

Page: 58 of 95

# 6.9 Spurious RF Conducted Emissions

| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)  |  |
|------------------------|---|--|
| Test Method:           | ANSI C63.10:2009  |  |
| Test Setup:            | Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane   |  |
|                        | Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.  |  |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |  |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.  |  |
| Instruments Used:      | Refer to section 5.10 for details   |  |
| Test Results:          | Pass  |  |







Report No.: SZEM140600290801

Page: 59 of 95

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

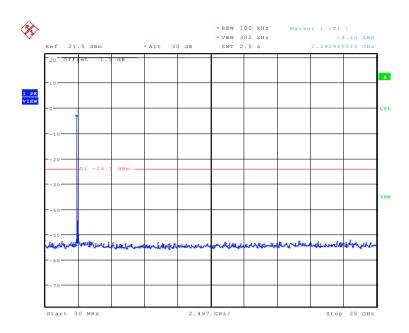


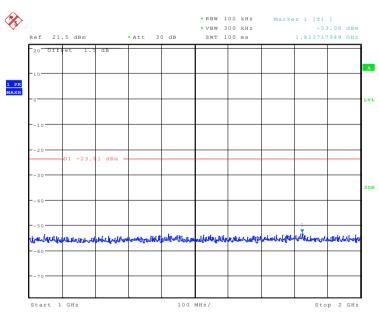




Report No.: SZEM140600290801

Page: 60 of 95

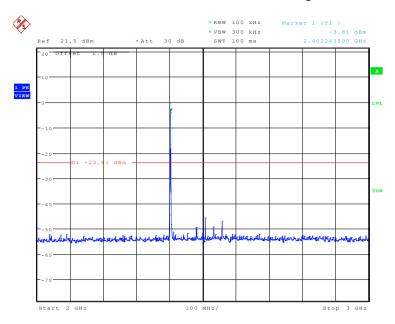

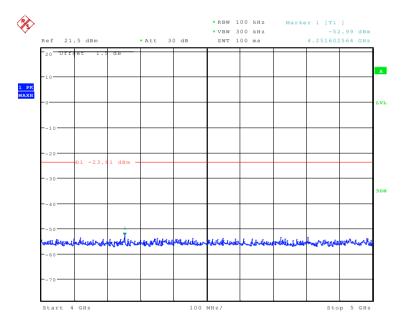





Report No.: SZEM140600290801

Page: 61 of 95

Test mode: GFSK Test channel: Middle

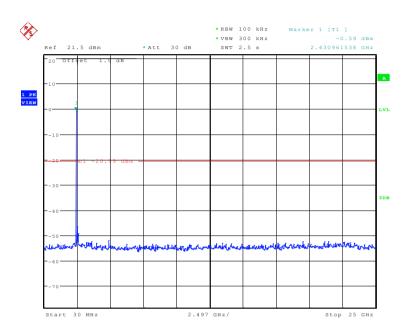


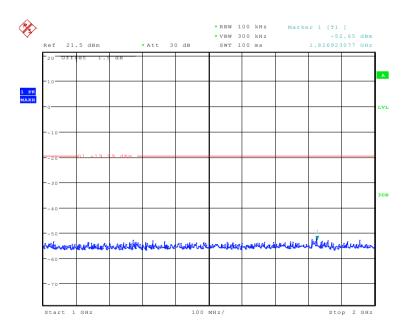




Report No.: SZEM140600290801

Page: 62 of 95

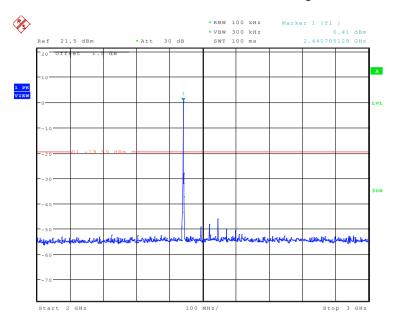

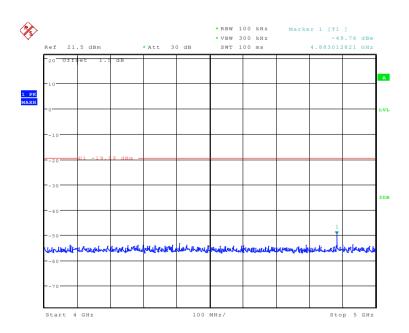





Report No.: SZEM140600290801

Page: 63 of 95

Test mode: GFSK Test channel: Highest

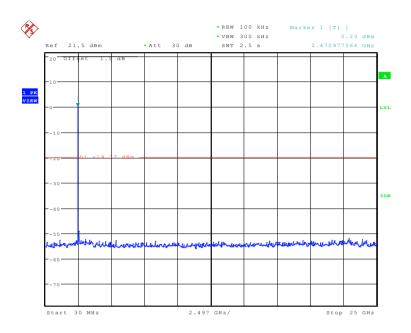


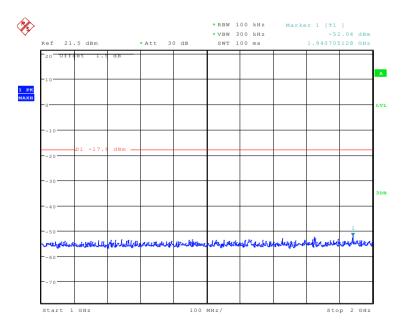




Report No.: SZEM140600290801

Page: 64 of 95

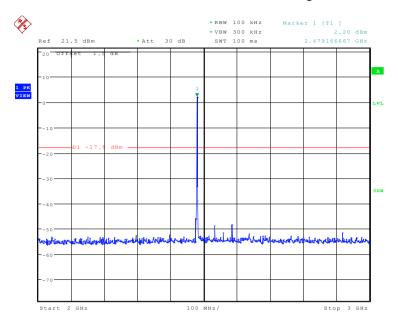

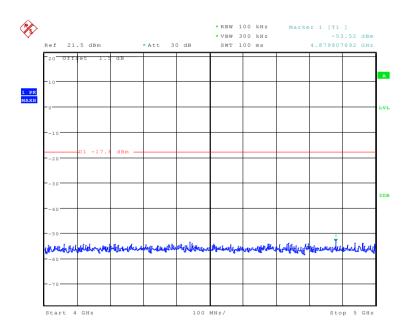





Report No.: SZEM140600290801

Page: 65 of 95

Test mode: π/4DQPSK Test channel: Lowest

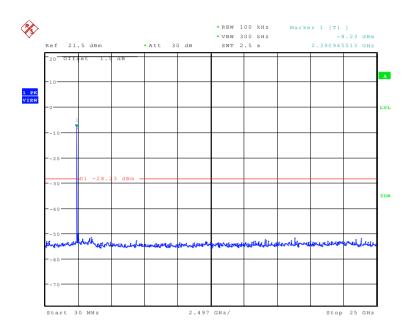


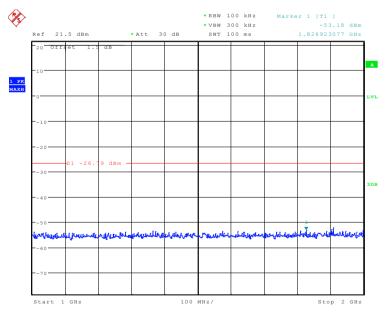




Report No.: SZEM140600290801

Page: 66 of 95

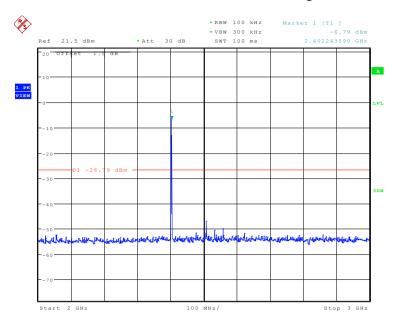

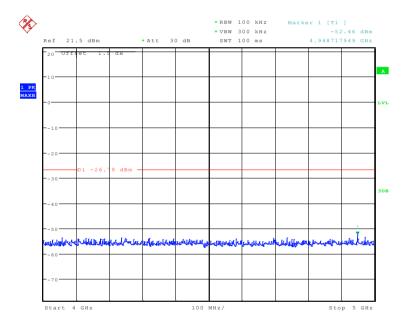





Report No.: SZEM140600290801

Page: 67 of 95

Test mode: π/4DQPSK Test channel: Middle

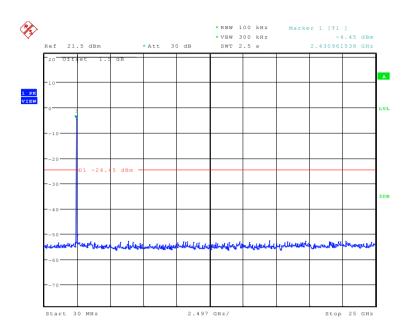


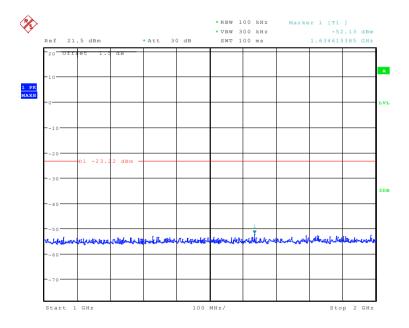




Report No.: SZEM140600290801

Page: 68 of 95

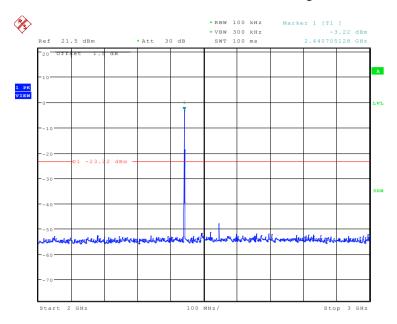

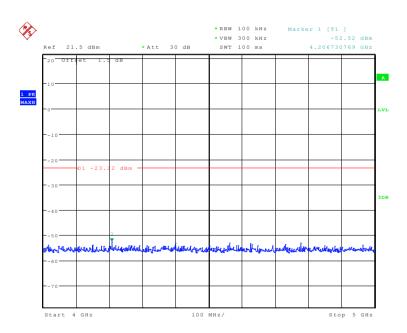







Report No.: SZEM140600290801

Page: 69 of 95

Test mode: π/4DQPSK Test channel: Highest

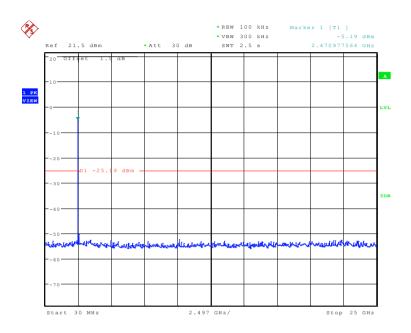


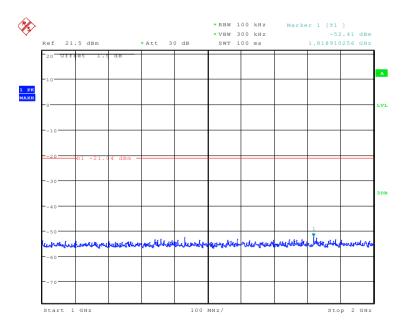




Report No.: SZEM140600290801

Page: 70 of 95

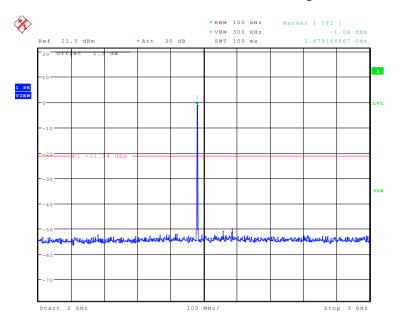

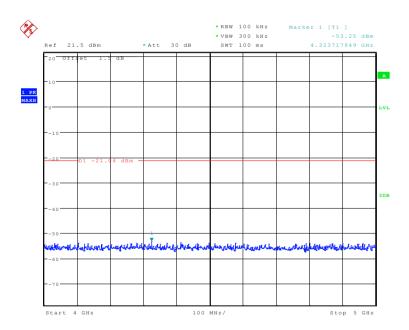





Report No.: SZEM140600290801

Page: 71 of 95

Test mode: 8DPSK Test channel: Lowest

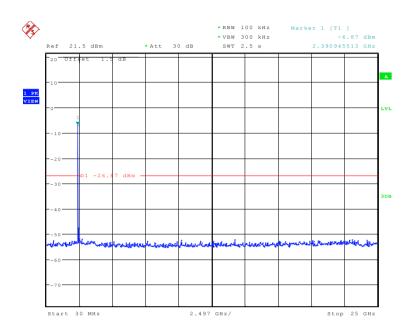


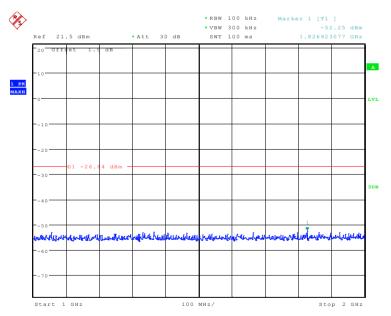




Report No.: SZEM140600290801

Page: 72 of 95

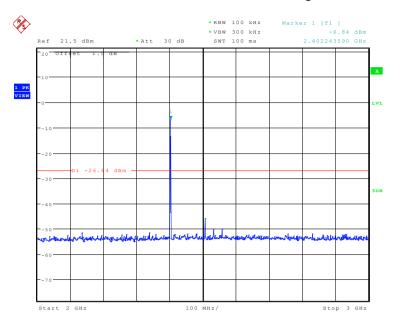

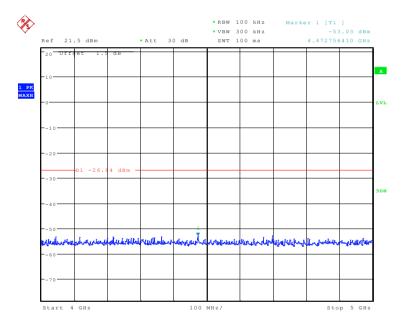





Report No.: SZEM140600290801

Page: 73 of 95

Test mode: 8DPSK Test channel: Middle

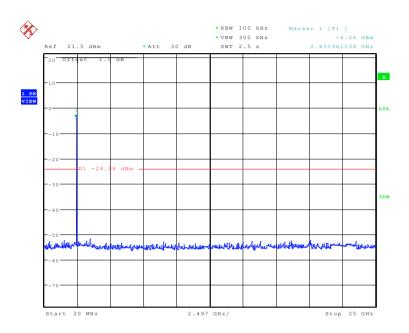


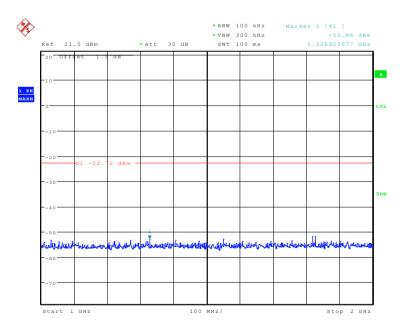




Report No.: SZEM140600290801

Page: 74 of 95

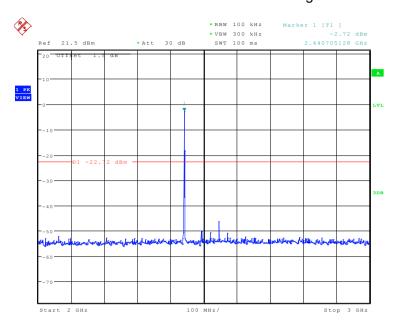

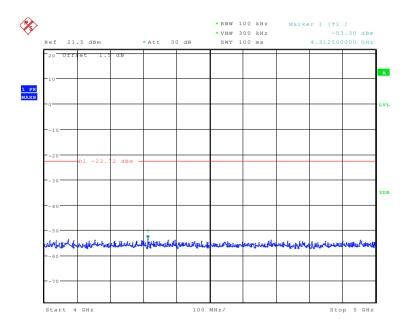





Report No.: SZEM140600290801

Page: 75 of 95

Test mode: 8DPSK Test channel: Highest

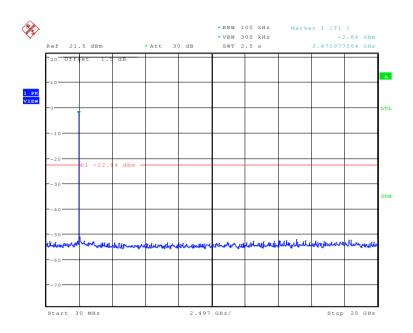


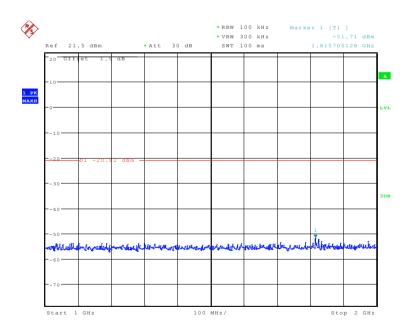




Report No.: SZEM140600290801

Page: 76 of 95

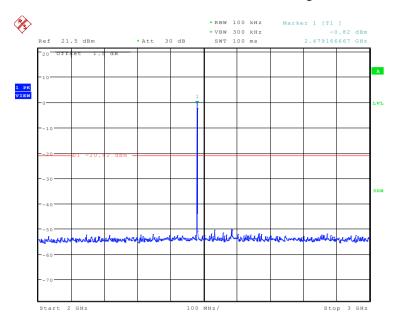

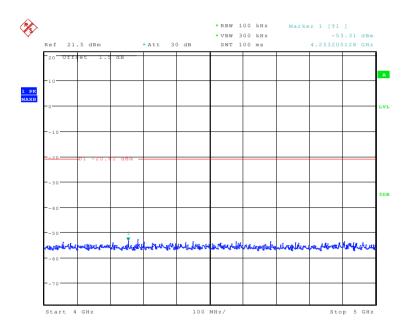

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.



Report No.: SZEM140600290801

Page: 77 of 95

# 6.10 Pseudorandom Frequency Hopping Sequence

#### Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage

outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM140600290801

Page: 78 of 95

### Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

#### Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.





Report No.: SZEM140600290801

Page: 79 of 95

# **6.11** Radiated Spurious Emission


| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205  |          |                                |                   |            |                          |   |  |  |
|-------------------|--|----------|--------------------------------|-------------------|------------|--------------------------|---|--|--|
| Test Method:      | ANSI C63.10: 2009  |          |                                |                   |            |                          |   |  |  |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)   |          |                                |                   |            |                          |   |  |  |
| Receiver Setup:   | Frequency  | Detector | RBW                            | VBW               | Remark     |                          |   |  |  |
|                   | 0.009MHz-0.090MH   | Z        | Peak                           | 10kHz             | z 30kHz    | Peak                     | • |  |  |
|                   | 0.009MHz-0.090MH   | z        | Average                        | 10kHz             | z 30kHz    | Average                  |   |  |  |
|                   | 0.090MHz-0.110MH   | z        | Quasi-peak                     | 10kHz             | z 30kHz    | Quasi-peak               |   |  |  |
|                   | 0.110MHz-0.490MH   | z        | Peak                           | 10kHz             | z 30kHz    | Peak                     |   |  |  |
|                   | 0.110MHz-0.490MH   | Z        | Average                        | 10kHz             | z 30kHz    | Average                  |   |  |  |
|                   | 0.490MHz -30MHz  |          | Quasi-peak                     | 10kHz             | 30kHz      | Quasi-peak               | _ |  |  |
|                   | 30MHz-1GHz   |          | Quasi-peak                     | 100 kH            | lz 300kHz  | Quasi-peak               |   |  |  |
|                   | Above 1GHz   | Peak     | 1MHz                           | 3MHz              | Peak       | _                        |   |  |  |
|                   | Above 1G112  |          | Peak                           | 1MHz              | 10Hz       | Average                  |   |  |  |
| Limit:            | Frequency  |          | eld strength<br>crovolt/meter) | Limit<br>(dBuV/m) | Remark     | Measureme<br>distance (n |   |  |  |
|                   | 0.009MHz-0.490MHz  | 2        | 400/F(kHz)                     | -                 | -          | 300                      |   |  |  |
|                   | 0.490MHz-1.705MHz  | 24       | 1000/F(kHz)                    | -                 | -          | 30                       |   |  |  |
|                   | 1.705MHz-30MHz   |          | 30                             | -                 | -          | 30                       |   |  |  |
|                   | 30MHz-88MHz  |          | 100                            | 40.0              | Quasi-peak | 3                        |   |  |  |
|                   | 88MHz-216MHz   |          | 150                            | 43.5              | Quasi-peak | 3                        |   |  |  |
|                   | 216MHz-960MHz  |          | 200                            | 46.0              | Quasi-peak | 3                        |   |  |  |
|                   | 960MHz-1GHz  |          | 500                            | 54.0              | Quasi-peak | 3                        |   |  |  |
|                   | Above 1GHz 500 54.0 Average 3  |          |                                |                   |            |                          |   |  |  |
|                   | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the tota peak emission level radiated by the device. |          |                                |                   |            |                          |   |  |  |



Report No.: SZEM140600290801

Page: 80 of 95

#### Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

#### Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or



Report No.: SZEM140600290801

Page: 81 of 95

| average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel                       |
|---|
| (2441MHz), the Highest channel (2480MHz)  |
| h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. |
| i. Repeat above procedures until all frequencies measured was complete.   |
| Non-hopping transmitting mode with all kind of modulation and all kind of   |
| data type   |
| Transmitting mode, Charge + Transmitting mode.  |
| Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type.  |
| Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case                        |
| Only the worst case is recorded in the report.  |
| Refer to section 5.10 for details   |
| Pass  |
|   |




Report No.: SZEM140600290801

Page: 82 of 95

#### 6.11.1 Radiated Emission below 1GHz

| 30MHz~1GHz (QP) |                       |          |
|-----------------|-----------------------|----------|
| Test mode:      | Charge + Transmitting | Vertical |

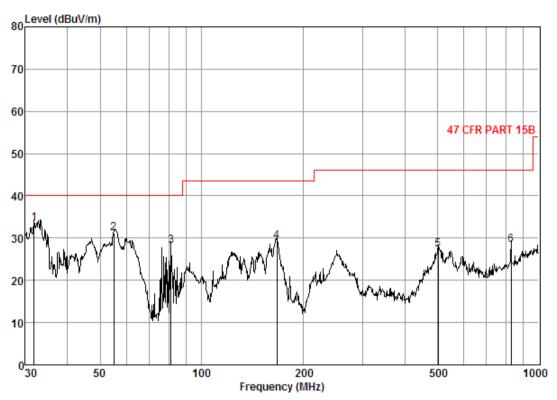

Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 2908RF

Mode : Charge + TX mode


|                            | Freq  |  |   | Preamp<br>Factor   |  |  | Limit<br>Line              | Over<br>Limit |
|----------------------------|---|--|---|--|--|--|----------------------------|---------------|
|                            | MHz   | dB   | dB/m  | dB   | dBuV   | $\overline{\text{dBuV/m}}$                               | $\overline{\text{dBuV/m}}$ | dB            |
| 1<br>2<br>3<br>4<br>5<br>6 | 31.84<br>54.83<br>81.21<br>167.24<br>502.94<br>827.49 | 0.67<br>0.99<br>1.29<br>1.94<br>3.77<br>5.18 | 17. 93<br>8. 08<br>7. 92<br>9. 56<br>17. 69<br>22. 21 | 25. 69<br>25. 75<br>25. 34<br>25. 06<br>26. 23<br>26. 32 | 40.50<br>47.81<br>44.29<br>42.70<br>32.05<br>27.29 | 33. 41<br>31. 13<br>28. 16<br>29. 14<br>27. 28<br>28. 36 |                            | -11.84        |



Report No.: SZEM140600290801

Page: 83 of 95

| Test mode:    | Charge + Transmitting | Horizontal |
|---------------|-----------------------|------------|
| 1 CSt 1110UC. | Charge + Hansimung    | Honzontai  |

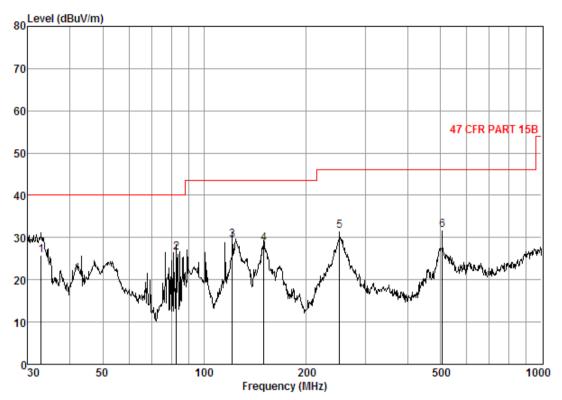

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 2908RF

Mode : Charge + TX mode

|                            | Freq   |  |   | Preamp<br>Factor   |                         |  | Limit<br>Line                    | Over<br>Limit  |
|----------------------------|--|--|---|--|-------------------------|--|----------------------------------|--|
|                            | MHz  | d₿   | dB/m  | dB   | dBuV                    | dBuV/m   | dBuV/m                           | dB   |
| 1<br>2<br>3<br>4<br>5<br>6 | 32. 86<br>82. 65<br>121. 12<br>150. 01<br>252. 06<br>508. 26 | 0.69<br>1.29<br>1.57<br>1.81<br>2.51<br>3.75 | 17. 34<br>8. 06<br>8. 08<br>9. 30<br>12. 24<br>17. 86 | 25. 71<br>25. 38<br>25. 93<br>25. 00<br>24. 87<br>25. 87 | 45.67<br>42.40<br>41.72 | 25. 88<br>26. 43<br>29. 39<br>28. 51<br>31. 60<br>31. 73 | 40.00<br>43.50<br>43.50<br>46.00 | -14.12<br>-13.57<br>-14.11<br>-14.99<br>-14.40<br>-14.27 |



Report No.: SZEM140600290801

Page: 84 of 95

#### 6.11.2 Transmitter Emission above 1GHz

| Worse case i       | mode:                 | GFSK(DH1)                   | Test                     | channel:                | Lowest            | Rema                   | ırk:                  | Peak         |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Preamp<br>Factor<br>(dB) | Read<br>Level<br>(dBuV) | Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Polarization |
| 1659.574           | 2.74                  | 29.48                       | 38.39                    | 52.32                   | 46.15             | 74                     | -27.85                | Vertical     |
| 4804.000           | 4.29                  | 34.70                       | 39.24                    | 52.53                   | 52.28             | 74                     | -21.72                | Vertical     |
| 6331.329           | 5.19                  | 35.91                       | 39.15                    | 46.30                   | 48.25             | 74                     | -25.75                | Vertical     |
| 7206.000           | 5.30                  | 35.63                       | 39.07                    | 46.12                   | 47.98             | 74                     | -26.02                | Vertical     |
| 9608.000           | 6.52                  | 37.33                       | 37.93                    | 43.98                   | 49.90             | 74                     | -24.10                | Vertical     |
| 11515.680          | 7.62                  | 38.24                       | 38.47                    | 44.20                   | 51.59             | 74                     | -22.41                | Vertical     |
| 1663.803           | 2.75                  | 29.50                       | 38.39                    | 49.90                   | 43.76             | 74                     | -30.24                | Horizontal   |
| 4804.000           | 4.29                  | 34.70                       | 39.24                    | 51.05                   | 50.80             | 74                     | -23.20                | Horizontal   |
| 6125.242           | 5.07                  | 36.16                       | 39.17                    | 46.67                   | 48.73             | 74                     | -25.27                | Horizontal   |
| 7206.000           | 5.30                  | 35.63                       | 39.07                    | 46.66                   | 48.52             | 74                     | -25.48                | Horizontal   |
| 9608.000           | 6.52                  | 37.33                       | 37.93                    | 43.67                   | 49.59             | 74                     | -24.41                | Horizontal   |
| 12024.960          | 7.17                  | 38.73                       | 38.72                    | 45.00                   | 52.18             | 74                     | -21.82                | Horizontal   |

| Worse case         | mode:                 | GFSK(DH1)                   | ) Tes                    | t channel:              | Middle            | Rem                    | ark:                  | Peak         |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Preamp<br>Factor<br>(dB) | Read<br>Level<br>(dBuV) | Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Polarization |
| 1663.803           | 2.75                  | 29.50                       | 38.39                    | 52.72                   | 46.58             | 74                     | -27.42                | Vertical     |
| 4882.000           | 4.36                  | 34.78                       | 39.26                    | 51.40                   | 51.28             | 74                     | -22.72                | Vertical     |
| 6032.401           | 5.31                  | 36.26                       | 39.18                    | 46.62                   | 49.01             | 74                     | -24.99                | Vertical     |
| 7323.000           | 5.20                  | 35.50                       | 39.06                    | 50.49                   | 52.13             | 74                     | -21.87                | Vertical     |
| 9764.000           | 6.49                  | 37.81                       | 37.84                    | 44.55                   | 51.01             | 74                     | -22.99                | Vertical     |
| 11112.520          | 7.35                  | 38.11                       | 38.28                    | 44.78                   | 51.96             | 74                     | -22.04                | Vertical     |
| 1663.803           | 2.75                  | 29.50                       | 38.39                    | 50.53                   | 44.39             | 74                     | -29.61                | Horizontal   |
| 4882.000           | 4.36                  | 34.78                       | 39.26                    | 51.50                   | 51.38             | 74                     | -22.62                | Horizontal   |
| 6047.776           | 5.27                  | 36.25                       | 39.18                    | 46.65                   | 48.99             | 74                     | -25.01                | Horizontal   |
| 7323.000           | 5.20                  | 35.50                       | 39.06                    | 51.73                   | 53.37             | 74                     | -20.63                | Horizontal   |
| 9764.000           | 6.49                  | 37.81                       | 37.84                    | 43.70                   | 50.16             | 74                     | -23.84                | Horizontal   |
| 11574.460          | 7.50                  | 38.28                       | 38.50                    | 44.76                   | 52.04             | 74                     | -21.96                | Horizontal   |



Report No.: SZEM140600290801

Page: 85 of 95

| Worse case         | mode:                 | GFSK(DH1)                   | Te                       | est channel:            | Highest           | Rer                    | nark:                 | Peak         |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Preamp<br>Factor<br>(dB) | Read<br>Level<br>(dBuV) | Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Polarization |
| 1663.803           | 2.75                  | 29.50                       | 38.39                    | 51.69                   | 45.55             | 74                     | -28.45                | Vertical     |
| 4960.000           | 4.43                  | 34.86                       | 39.29                    | 49.75                   | 49.75             | 74                     | -24.25                | Vertical     |
| 5895.771           | 4.84                  | 36.10                       | 39.19                    | 47.21                   | 48.96             | 74                     | -25.04                | Vertical     |
| 7440.000           | 5.15                  | 35.43                       | 39.05                    | 51.88                   | 53.41             | 74                     | -20.59                | Vertical     |
| 9920.000           | 6.83                  | 38.27                       | 37.75                    | 43.39                   | 50.74             | 74                     | -23.26                | Vertical     |
| 11603.960          | 7.45                  | 38.30                       | 38.52                    | 44.47                   | 51.70             | 74                     | -22.3                 | Vertical     |
| 1659.574           | 2.74                  | 29.48                       | 38.39                    | 50.34                   | 44.17             | 74                     | -29.83                | Horizontal   |
| 4960.000           | 4.43                  | 34.86                       | 39.29                    | 49.64                   | 49.64             | 74                     | -24.36                | Horizontal   |
| 5865.832           | 4.68                  | 36.04                       | 39.20                    | 47.04                   | 48.56             | 74                     | -25.44                | Horizontal   |
| 7440.000           | 5.15                  | 35.43                       | 39.05                    | 52.29                   | 53.82             | 74                     | -20.18                | Horizontal   |
| 9920.000           | 6.83                  | 38.27                       | 37.75                    | 42.67                   | 50.02             | 74                     | -23.98                | Horizontal   |
| 12086.330          | 7.07                  | 38.81                       | 38.77                    | 44.53                   | 51.64             | 74                     | -22.36                | Horizontal   |

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM140600290801

Page: 86 of 95

# 6.12Restricted bands around fundamental frequency

| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 |                       |                  |  |  |  |  |  |
|-------------------|---|-----------------------|------------------|--|--|--|--|--|
| Test Method:      | ANSI C63.10: 2009                         | ANSI C63.10: 2009     |                  |  |  |  |  |  |
| Test Site:        | Measurement Distance: 3m                  | (Semi-Anechoic Chambe | r)               |  |  |  |  |  |
| Limit:            | Frequency                                 | Limit (dBuV/m @3m)    | Remark           |  |  |  |  |  |
|                   | 30MHz-88MHz                               | 40.0                  | Quasi-peak Value |  |  |  |  |  |
|                   | 88MHz-216MHz                              | 43.5                  | Quasi-peak Value |  |  |  |  |  |
|                   | 216MHz-960MHz                             | 46.0                  | Quasi-peak Value |  |  |  |  |  |
|                   | 960MHz-1GHz                               | 54.0                  | Quasi-peak Value |  |  |  |  |  |
|                   | Above 1GHz                                | 54.0                  | Average Value    |  |  |  |  |  |
|                   | Above IGHZ                                | 74.0                  | Peak Value       |  |  |  |  |  |
|                   |   |                       |                  |  |  |  |  |  |
| Test Setup:       |   |                       |                  |  |  |  |  |  |






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM140600290801

Page: 87 of 95

| Test Procedure:        | a. The EUT was placed on the top of a rotating table 0.8 meters above<br>the ground at a 3 meter semi-anechoic camber. The table was<br>rotated 360 degrees to determine the position of the highest<br>radiation.  |
|------------------------|---|
|                        | b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.  |
|                        | <ul> <li>The antenna height is varied from one meter to four meters above<br/>the ground to determine the maximum value of the field strength.</li> <li>Both horizontal and vertical polarizations of the antenna are set to<br/>make the measurement.</li> </ul> |
|                        | d. For each suspected emission, the EUT was arranged to its worst<br>case and then the antenna was tuned to heights from 1 meter to 4<br>meters and the rotatable table was turned from 0 degrees to 360<br>degrees to find the maximum reading.                  |
|                        | e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.   |
|                        | f. Place a marker at the end of the restricted band closest to the  |
|                        | transmit frequency to show compliance. Also measure any   |
|                        | emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel   |
|                        | g. Test the EUT in the lowest channel, the Highest channel  |
|                        | h. The radiation measurements are performed in X, Y, Z axis   |
|                        | positioning for Transmitting mode, and found the X axis positioning which it is worse case.   |
|                        | Repeat above procedures until all frequencies measured was complete.  |
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type   |
|                        | Transmitting mode, Charge + Transmitting mode.  |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type is the worse case of  |
| i iliai i ost wodo.    | GFSK modulation type.   |
|                        | Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case  |
|                        | Only the worst case is recorded in the report.  |
| Instruments Used:      | Refer to section 5.10 for details   |
| Test Results:          | Pass  |
|                        |   |




Report No.: SZEM140600290801

Page: 88 of 95

#### Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical

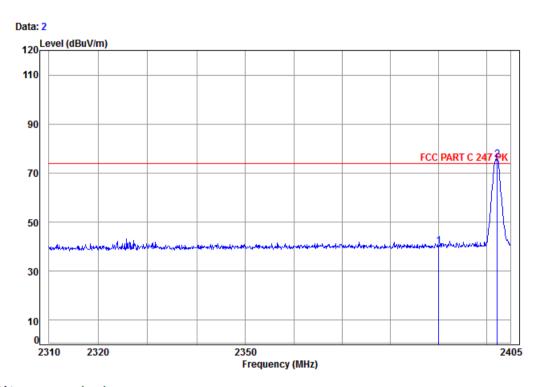

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 2908RF

Mode: : 2402 Bandedge

Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level dBuV dBuV/m dBuV/m MHz dB dB/m dB 3.36 32.35 38.46 42.90 40.15 74.00 -33.85 2390.00 2 pp 2402.29 3.37 32.41 38.46 78.35 75.67 74.00






Report No.: SZEM140600290801

Page: 89 of 95

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

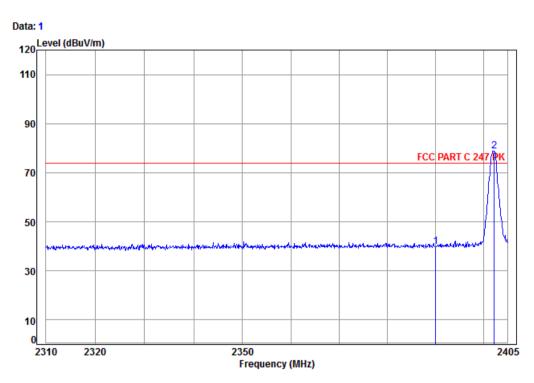

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 2908RF

Mode: : 2402 Bandedge


Cable Ant Preamp Read Limit Over Frea Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.00 3.36 32.35 38.46 42.60 39.85 74.00 -34.15 2402.29 3.37 32.41 38.46 81.47 78.79 74.00



Report No.: SZEM140600290801

Page: 90 of 95

| Worse case mode: | GESK (DH5)    | Test channel:   | Lowest | Remark:    | Average | Vertical   |
|------------------|---------------|-----------------|--------|------------|---------|------------|
| Worse case mode. | Of Or (Dirio) | i cot charinoi. | LOWCSI | rtciliant. | Average | v Ci ticai |

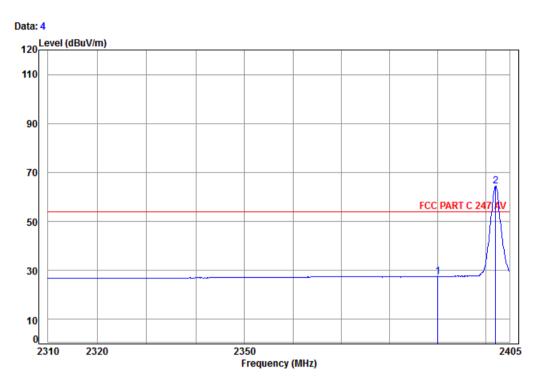

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 2908RF

Mode: : 2402 Bandedge


Ant Preamp Cable Read limit Over Loss Factor Factor Level Level Limit Freq Line MHz dB dBuV dBuV/m dBuV/m 2390.00 3.36 32.35 38.46 30.24 27.49 54.00 -26.51 2 pp 2402.09 3.37 32.41 38.46 67.07 64.39 54.00 10.39



Report No.: SZEM140600290801

91 of 95 Page:

GFSK (DH5) Test channel: Worse case mode: Lowest Remark: Average Horizontal

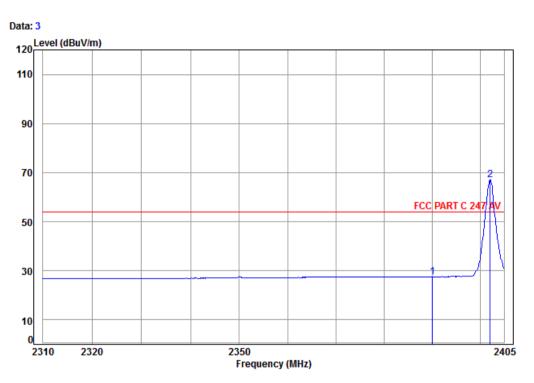

: chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 2908RF

Mode: : 2402 Bandedge


|           | Freq               | Cable Ant P<br>Freq Loss Factor F |      |    |      |        |        |    |  |
|-----------|--------------------|-----------------------------------|------|----|------|--------|--------|----|--|
| -         | MHz                | dB                                | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |  |
| 1<br>2 pp | 2390.00<br>2402.09 |                                   |      |    |      |        |        |    |  |



Report No.: SZEM140600290801

Page: 92 of 95

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Vertical

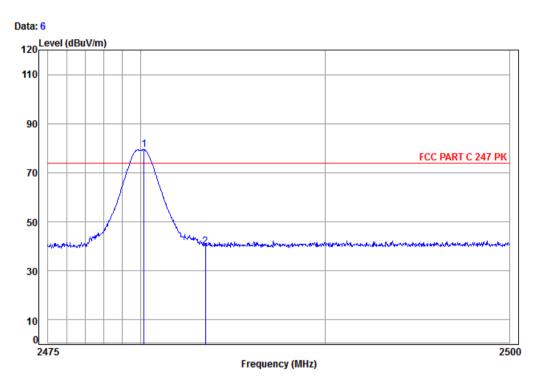

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 2908RF

Mode: : 2480 Bandedge


Cable Ant Preamp Read Limit Over Frea Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 3.46 32.44 38.47 81.99 79.42 74.00 2480.18 2483.50 3.47 32.44 38.47 42.54 39.98 74.00 -34.02



Report No.: SZEM140600290801

Page: 93 of 95

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Horizontal

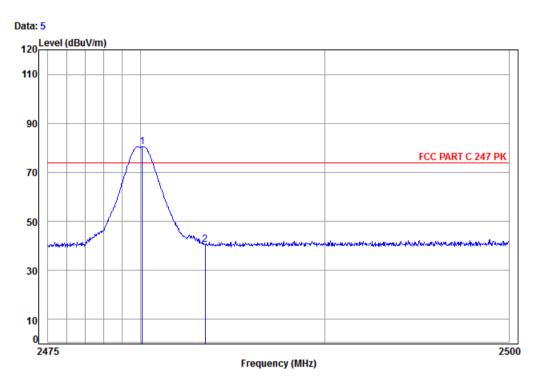

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 2908RF

Mode: : 2480 Bandedge


Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 1 pp 2480.10 3.46 32.44 38.47 83.13 80.56 74.00 3.47 32.44 38.47 43.00 40.44 74.00 -33.56



Report No.: SZEM140600290801

Page: 94 of 95

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Vertical

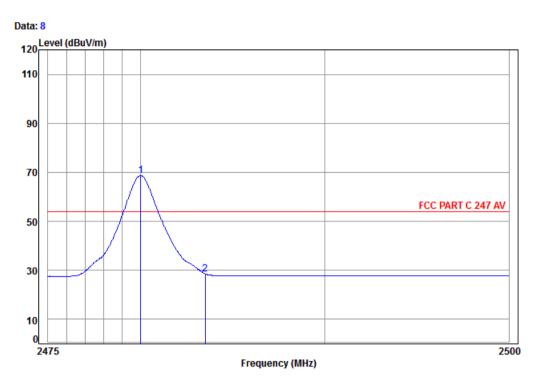

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 2908RF

Mode: : 2480 Bandedge


Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 1 pp 2480.01 3.46 32.44 38.47 71.27 68.70 54.00 14.70 3.47 32.44 38.47 31.13 28.57 54.00 -25.43



Report No.: SZEM140600290801

Page: 95 of 95

| Worse case mode:   GFSK (DH5)   Test channel:   Highest   Remark:   Average   Horizontal | Worse case mode: | GFSK (DH5) | Test channel: | Highest | Remark: | Average | Horizontal |
|--|------------------|------------|---------------|---------|---------|---------|------------|
|--|------------------|------------|---------------|---------|---------|---------|------------|

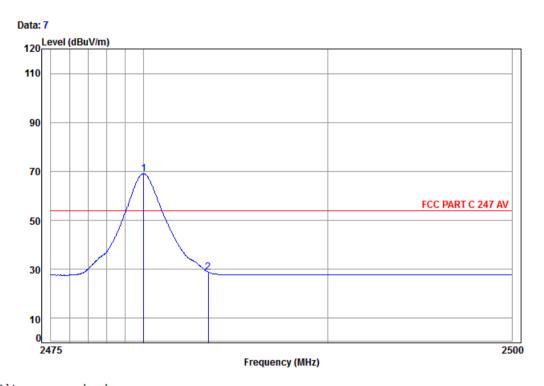

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 2908RF

Mode: : 2480 Bandedge

|   |                    |      |        | Preamp |       |        |        |       |
|---|--------------------|------|--------|--------|-------|--------|--------|-------|
|   | Freq               | Loss | Factor | Factor | Level | Level  | Line   | Limit |
| _ | MHz                | dB   | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |
|   | 2480.01<br>2483.50 |      |        |        |       |        |        |       |

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor