

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
Email:	ee.shenzhen@sgs.com

Report No.: SZEM150400164002 Page: 1 of 103

FCC REPORT

Application No:	SZEM1504001640CR
Applicant:	Gibson Innovations Limited
Manufacturer:	Gibson Innovations Limited
Factory:	Arts Electronics Co., Ltd.
Product Name:	Wireless portable speaker
Model No.(EUT):	SB365B/37
Add Model No.:	SB365BX/zz, where $X=A - Z$ or Nil (different cabinet colour) and $zz= 00 - 98$ (different plug portion and exported countries.)
Trade Mark:	PHILIPS
FCC ID:	2AANUSB365V2
Standards:	47 CFR Part 15, Subpart C (2014)
Date of Receipt:	2015-04-08
Date of Test:	2015-04-22 to 2015-04-23
Date of Issue:	2015-05-13
Test Result:	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150400164002 Page: 2 of 103

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-05-13		Original

Authorized for issue by:		
Tested By	Eric Fu (Eric Fu) /Project Engineer	2015-04-23
Prepared By	Jade Chen	2015-05-13
	(Jade Chen) /Clerk	Date
Checked By	Emen-Li	2015-05-13
	(Emen Li) /Reviewer	Date

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 3 of 103

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Remark:

Model No.: SB365B/37, SB365BX/zz, where X=A - Z or Nil (different cabinet colour) and zz= 00 – 98 (different plug portion and exported countries.)

Only the Model SB365B/37 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only difference of plug portion, exported countries and model number.



Report No.: SZEM150400164002 Page: 4 of 103

4 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	TEST SUMMARY	3
4	CONTENTS	4
5	GENERAL INFORMATION	5
	 5.1 CLIENT INFORMATION	
6		
	 6.1 ANTENNA REQUIREMENT 6.2 CONDUCTED EMISSIONS 6.3 CONDUCTED PEAK OUTPUT POWER	13 17 24 30 37 40 51 58 86 88 91 93
7	PHOTOGRAPHS - EUT TEST SETUP	
	 7.1 CONDUCTED EMISSION	102 103
8	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	103



Report No.: SZEM150400164002 Page: 5 of 103

5 General Information

5.1 Client Information

Applicant:	Gibson Innovations Limited
Address of Applicant:	5/F,Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Manufacturer:	Gibson Innovations Limited
Address of Manufacturer:	5/F,Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Factory:	Arts Electronics Co.,Ltd.
Address of Factory:	NO.1, SHANGXING LU, SHANGJIAO COMMUNITY, CHANGAN TOWN, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA

5.2 General Description of EUT

-		
Product Name:	Wireless portable speaker	
Model No.:	SB365B/37	
Trade Mark:	PHILIPS	
Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	BT4.0 Dual mode	
	This report is for Classic mode	
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)	
Modulation Type:	GFSK, π/4DQPSK, 8DPSK	
Number of Channel:	79	
Hopping Channel Type:	Adaptive Frequency Hopping systems	
Sample Type:	Portable production	
Test Power Grade:	150,35 (manufacturer declare)	
Test Software of EUT:	Blue test 3 (manufacturer declare)	
Antenna Type:	Integral	
Antenna Gain:	0dBi	
Power Supply:	Adapter Model:TPA103B-15090-US INPUT:AC100-240V~50/60Hz 1.1A MAX OUTPUT:DC 9.0V 1.66A	
	Battery : DC 7.4V 2200mAh	
Test Voltage:	AC 120V 60Hz	
	Second Second	



Report No.: SZEM150400164002 Page: 6 of 103

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 7 of 103

5.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1015mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM150400164002 Page: 8 of 103

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150400164002 Page: 9 of 103

5.10Equipment List

	Conducted Emission				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2016-05-13
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2016-05-13
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2016-05-13
8	Coaxial Cable	SGS	N/A	SEL0025	2016-05-13
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 10 of 103

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 11 of 103

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 12 of 103

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



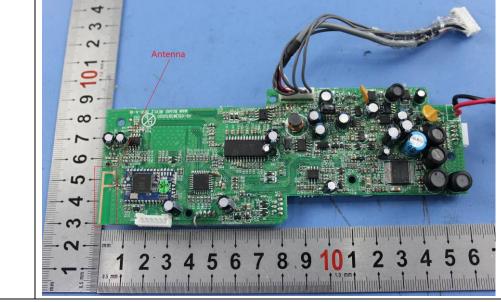

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Report No.: SZEM150400164002 Page: 13 of 103

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:		Limit (c	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		
Test Procedure:			near Ne was ar e ne	

6.2 Conducted Emissions



Report No.: SZEM150400164002 Page: 14 of 103

Test Setup:	Shielding Room Image: Comparison of the second se	
Exploratory Test Mode:	bry Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Charge + Transmitting mode.	
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.	
Instruments Used:	Refer to section 5.10 for details	
Test Results: Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 15 of 103

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

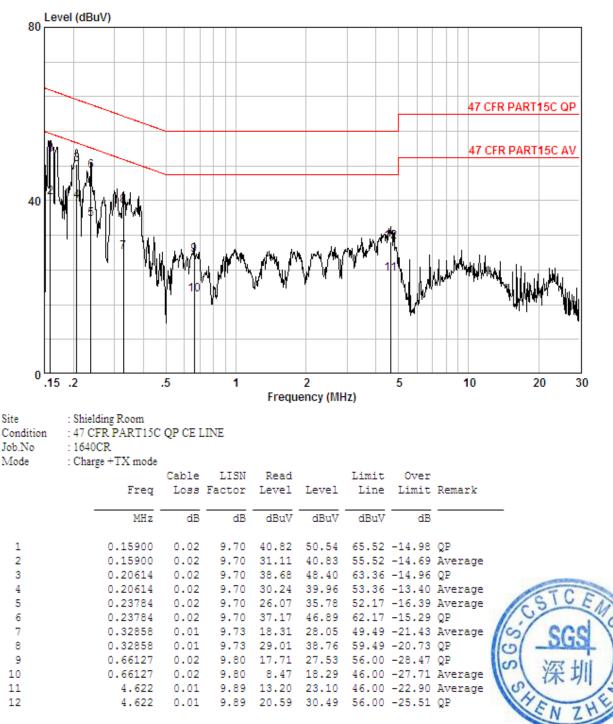



Neutral line:

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM150400164002 Page: 16 of 103

Level (dBuV) 80 47 CFR PART15C QP 47 CFR PART15C AV 40 0 .15 .2 .5 1 2 5 10 20 30 Frequency (MHz) Site : Shielding Room Condition : 47 CFR PART15C QP CE NEUTRAL Job.No : 1640CR Mode : Charge +TX mode Cable LISN Read Limit Over Loss Factor Level Level Line Limit Remark Freq MHz dB dB dBuV dBuV dBuV dB 1 0.19344 0.02 9.70 39.04 48.76 63.89 -15.13 QP 2 53.89 -15.70 Average 0.19344 0.02 9.70 28.46 38.18 9.70 3 63.14 -17.24 QP 0.21167 0.02 36.18 45.90 9.70 26.87 36.59 53.14 -16.55 Average 4 0.02 0.21167 9.74 19.66 49.18 -19.77 Average 5 0.34100 0.01 29.41 6 0.34100 0.01 9.74 29.91 39.66 59.18 -19.52 QP 7 0.97871 0.02 9.80 16.09 25.91 56.00 -30.09 QP 8 0.97871 0.02 9.80 7.09 16.91 46.00 -29.09 Average 9.80 9 1.858 0.02 7.68 17.50 46.00 -28.50 Average 10 1.858 0.02 9.80 17.44 27.26 56.00 -28.74 QP 0.01 11 4.338 9.88 21.03 30.93 56.00 -25.07 QP 12 4.338 0.01 9.88 12.88 22.78 46.00 -23.22 Average

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150400164002 Page: 17 of 103

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	ANSI C63.10:2009 Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	30dBm	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 18 of 103

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.05	30.00	Pass
Middle	2.44	30.00	Pass
Highest	2.10	30.00	Pass
	π/4DQPSK m	node	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.84	30.00	Pass
Middle	-0.39	30.00	Pass
Highest	-0.75	30.00	Pass
	8DPSK mo	de	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.26	30.00	Pass
Middle	0.16	30.00	Pass
Highest	-0.19	30.00	Pass




Report No.: SZEM150400164002 Page: 19 of 103

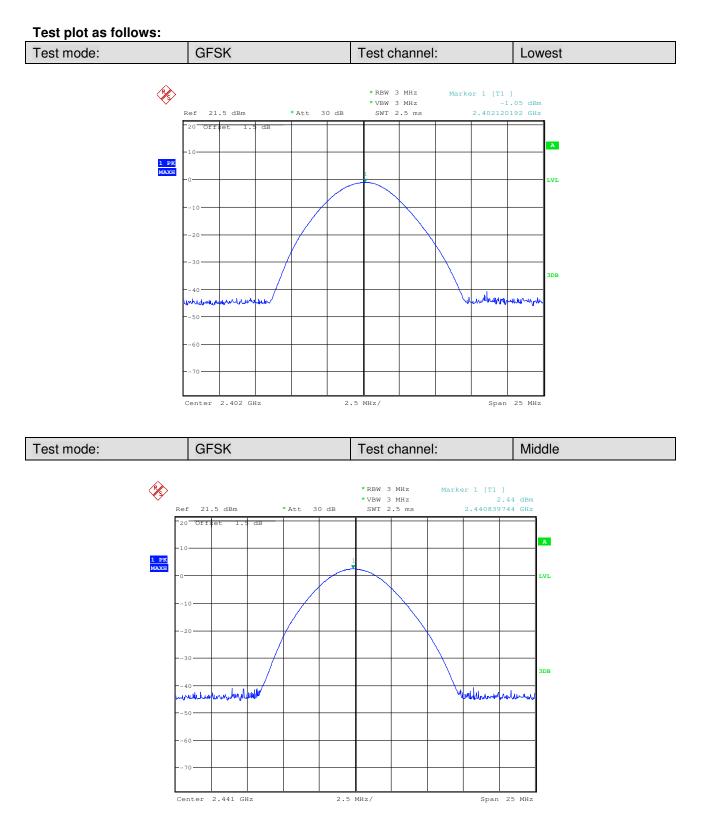




Report No.: SZEM150400164002 Page: 20 of 103

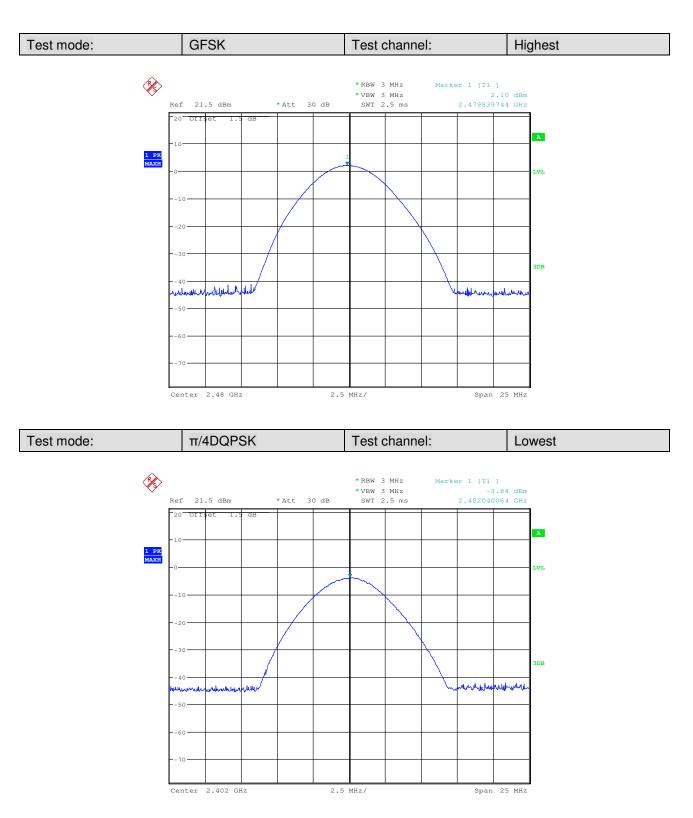

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 21 of 103

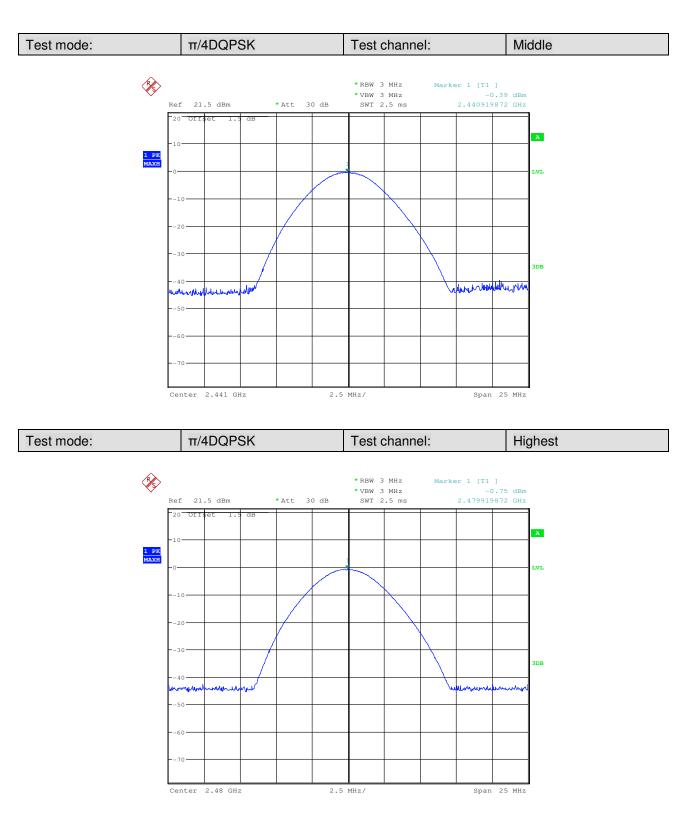




Report No.: SZEM150400164002 Page: 22 of 103

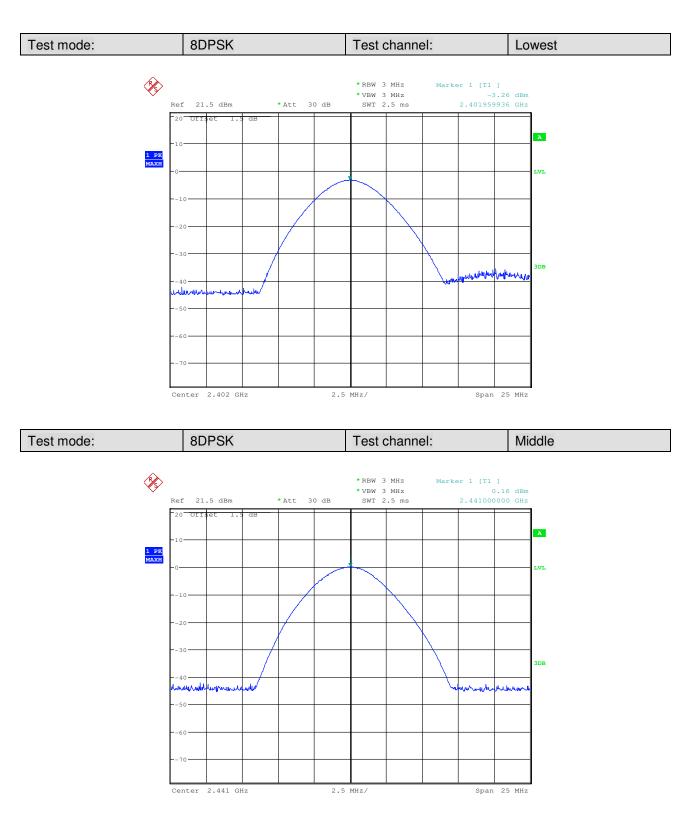



Report No.: SZEM150400164002 Page: 23 of 103

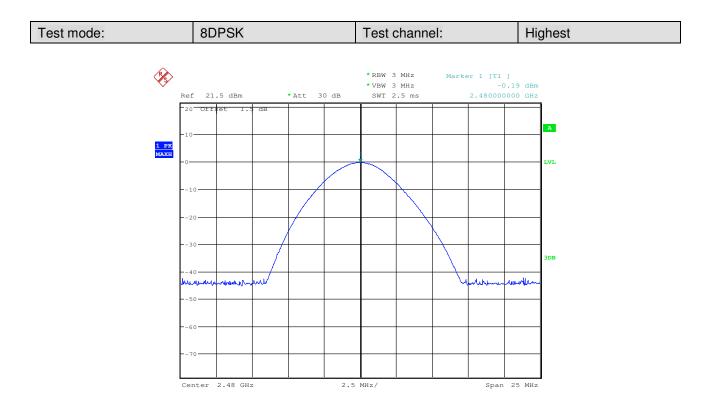



Report No.: SZEM150400164002 Page: 24 of 103

6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	ANSI C63.10:2009	
Limit:	NA	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

Measurement Data

Test sharped	2	20dB Occupy Bandwidth (kHz)		
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	942.31	1216.35	1221.15	
Middle	899.04	1225.96	1230.77	
Highest	899.04	1221.12	1235.58	




Report No.: SZEM150400164002 Page: 25 of 103

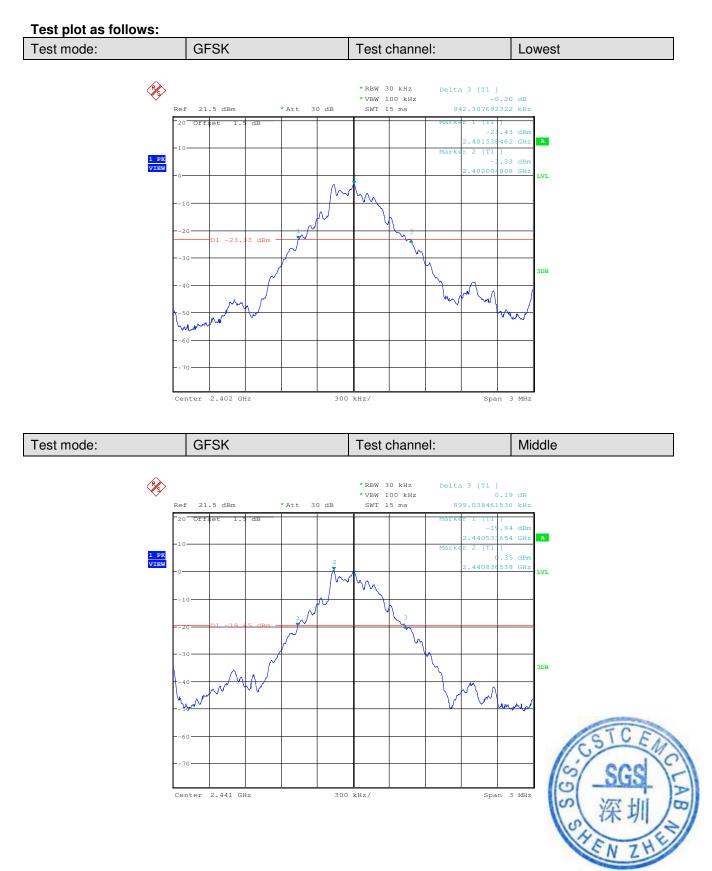




Report No.: SZEM150400164002 Page: 26 of 103

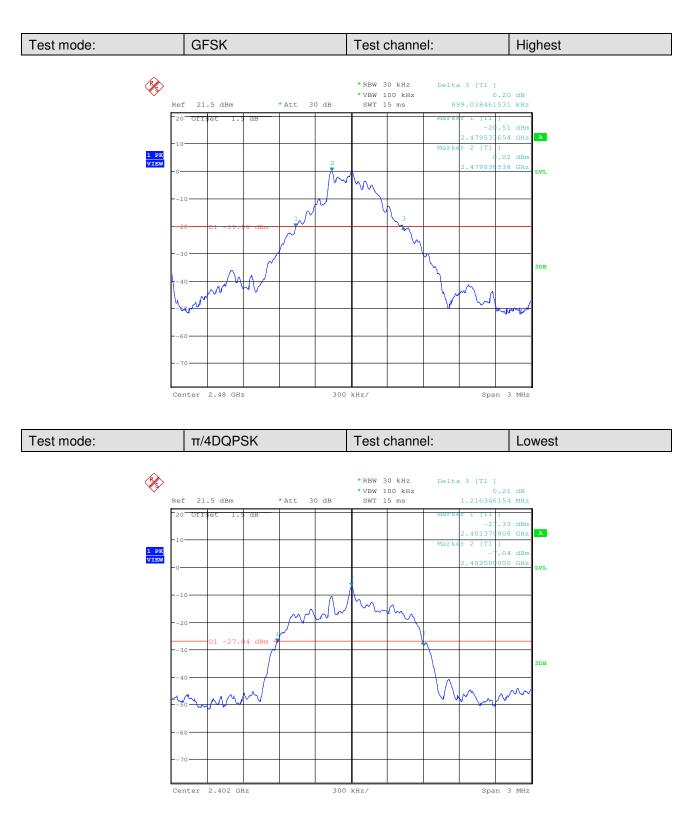




Report No.: SZEM150400164002 Page: 27 of 103

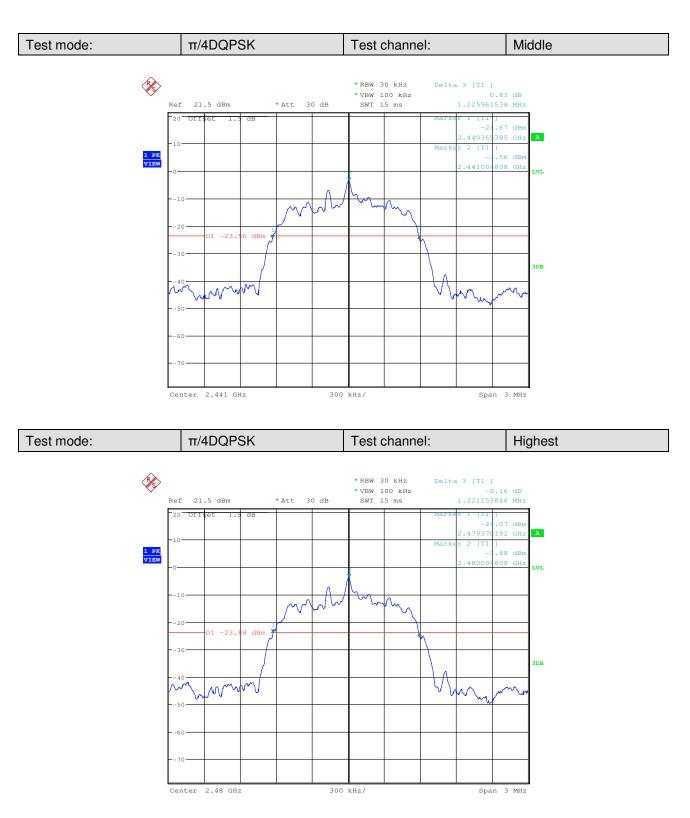




Report No.: SZEM150400164002 Page: 28 of 103

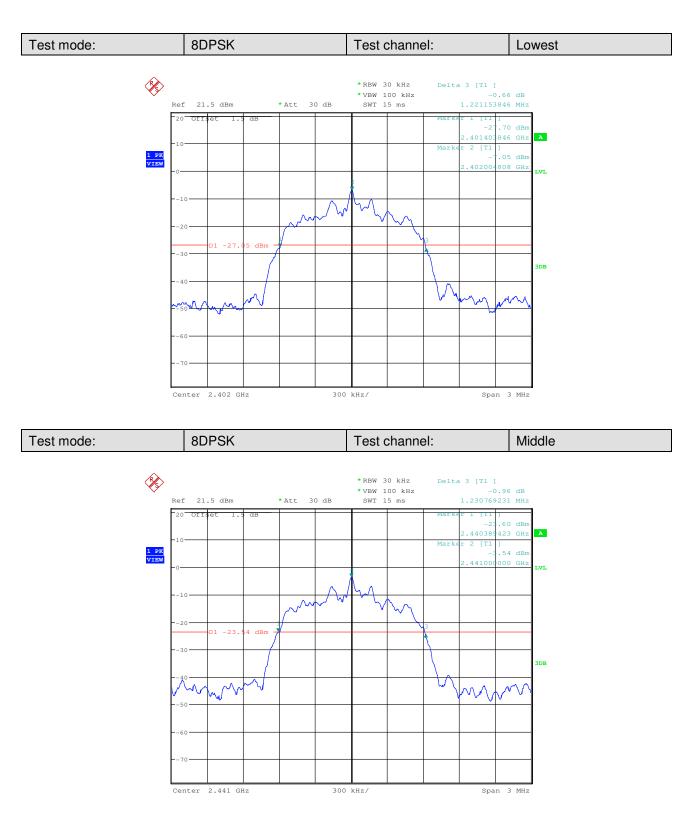



Report No.: SZEM150400164002 Page: 29 of 103

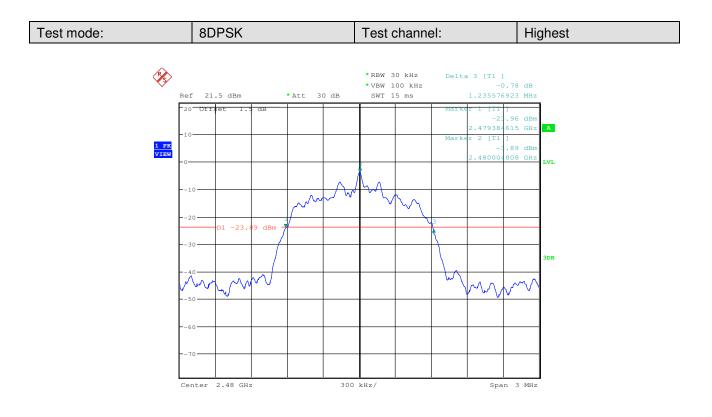



Report No.: SZEM150400164002 Page: 30 of 103

6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 31 of 103

Measurement Data


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥628	Pass
Middle	1002	≥628	Pass
Highest	1002	≥628	Pass
	π/4DQPSK m	ode	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥817	Pass
Middle	1002	≥817	Pass
Highest	1002	≥817	Pass
	8DPSK mo	de	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥824	Pass
Middle	1002	≥824	Pass
Highest	1002	≥824	Pass

Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
	(worse case)	(Damer requencies Separation)
GFSK	942.31	628
π/4DQPSK	1225.96	817
8DPSK	1235.58	824




Report No.: SZEM150400164002 Page: 32 of 103

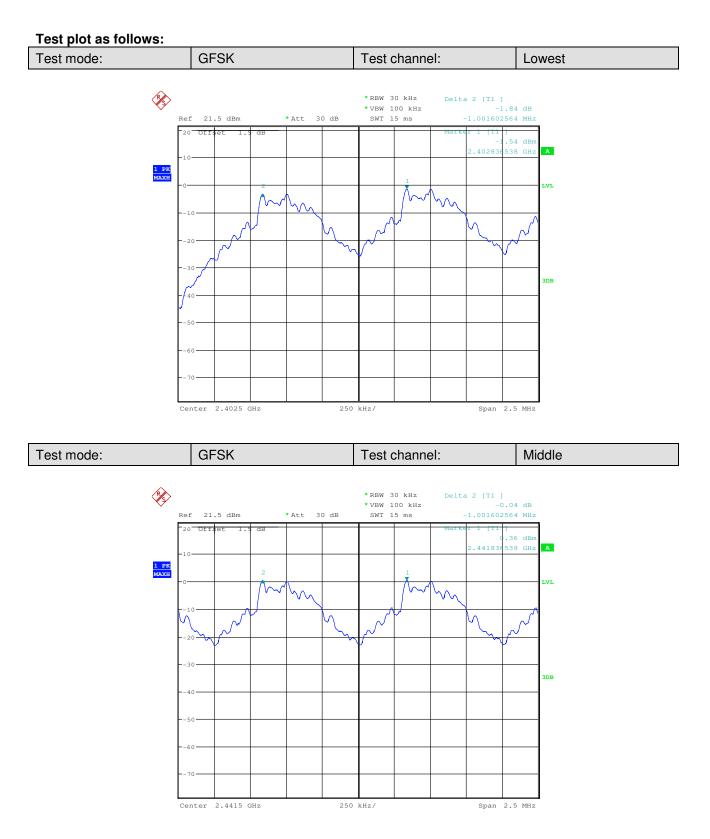




Report No.: SZEM150400164002 Page: 33 of 103

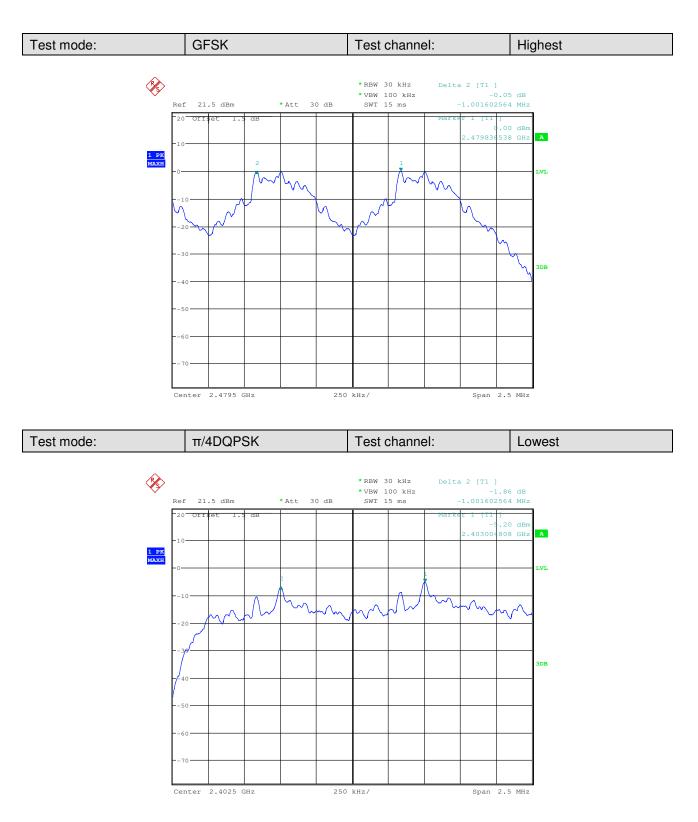




Report No.: SZEM150400164002 Page: 34 of 103

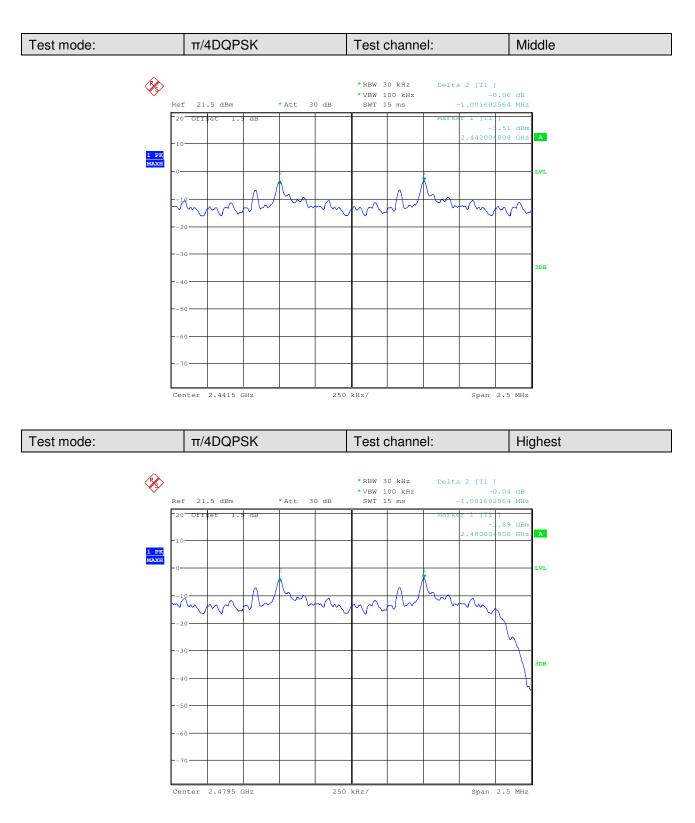




Report No.: SZEM150400164002 Page: 35 of 103

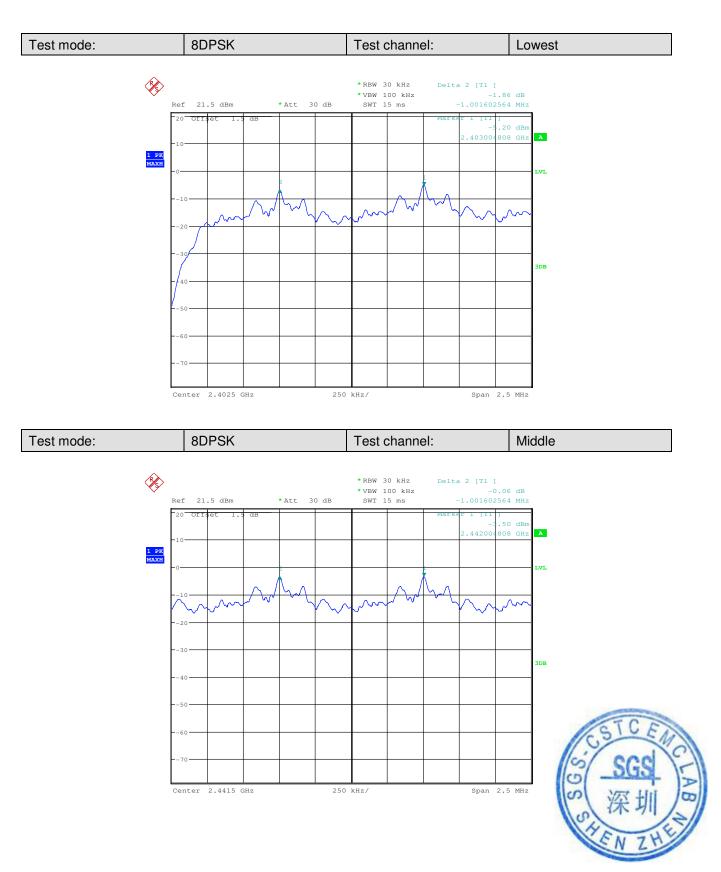



Report No.: SZEM150400164002 Page: 36 of 103

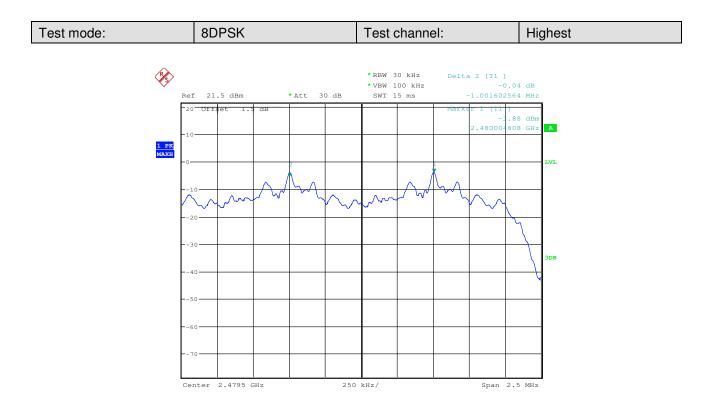



Report No.: SZEM150400164002 Page: 37 of 103

6.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 38 of 103

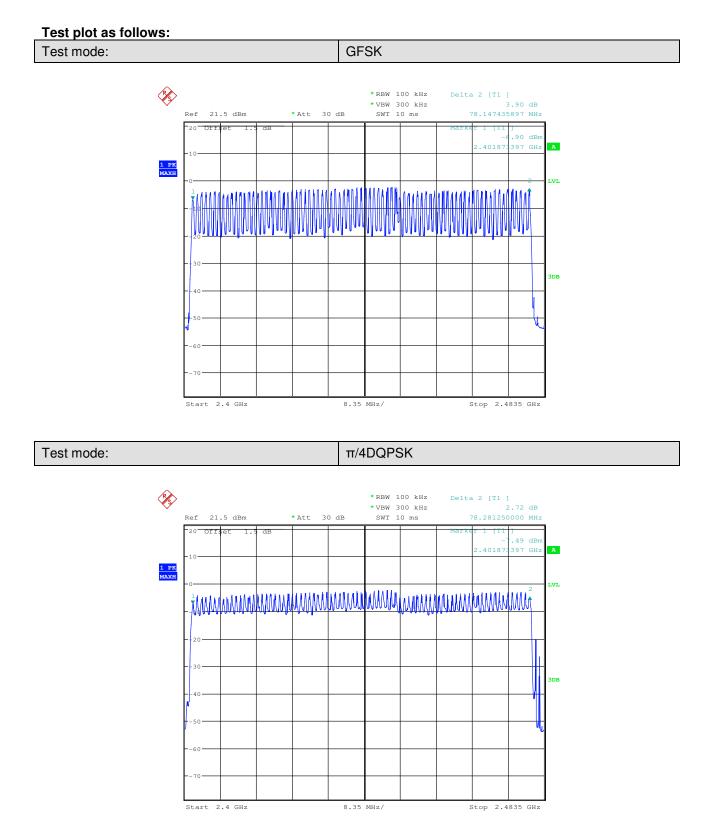



Report No.: SZEM150400164002 Page: 39 of 103

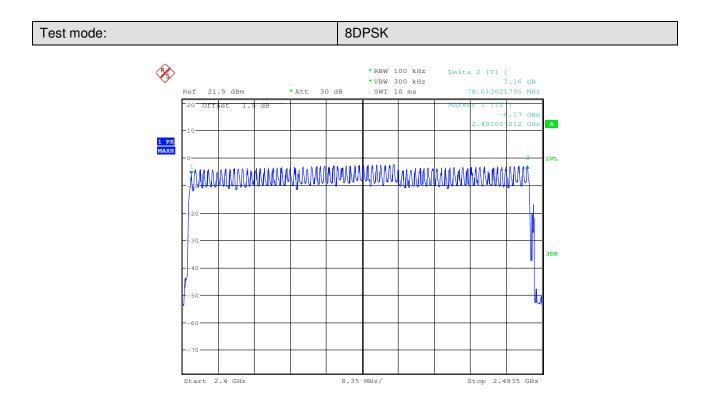



Report No.: SZEM150400164002 Page: 40 of 103

6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Instruments Used:	Refer to section 5.10 for details		
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.		
Limit:	0.4 Second		
Test Results:	Pass		

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.140	0.4
	DH3	0.264	0.4
	DH5	0.319	0.4
π/4DQPSK	2-DH1	0.130	0.4
	2-DH3	0.264	0.4
	2-DH5	0.320	0.4
8DPSK	3-DH1	0.130	0.4
	3-DH3	0.216	0.4
	3-DH5	0.320	0.4




Report No.: SZEM150400164002 Page: 41 of 103

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s On (ms)*total number=dwell time (ms) The middle channel (2441MHz), as below: DH1 time slot=0.389 (ms)*total number=140.04 (ms) DH3 time slot=1.647 (ms)* total number = 263.52 (ms) DH5 time slot=2.897(ms)* total number = 318.67(ms) 2-DH1 time slot=0.405 (ms)*total number=129.6(ms) 2-DH3 time slot=1.647(ms)* total number = 263.52 (ms) 2-DH5 time slot=2.909 (ms)* total number = 319.99 (ms) 3-DH1 time slot=0.405(ms)*total number=129.6 (ms) 3-DH3 time slot=1.655 (ms)* total number = 215.15 (ms) 3-DH5 time slot=2.905 (ms)* total number = 319.55 (ms)




Report No.: SZEM150400164002 Page: 42 of 103

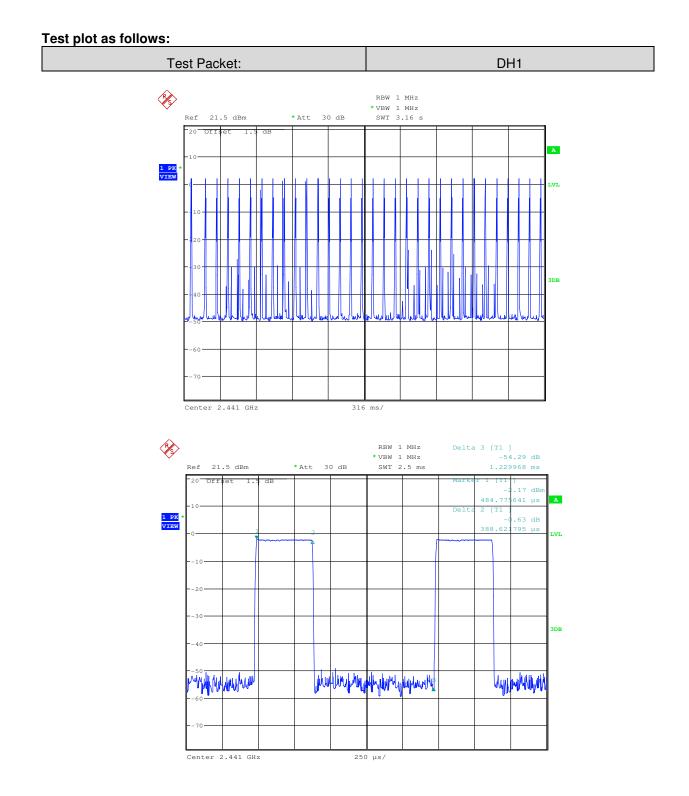

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 43 of 103

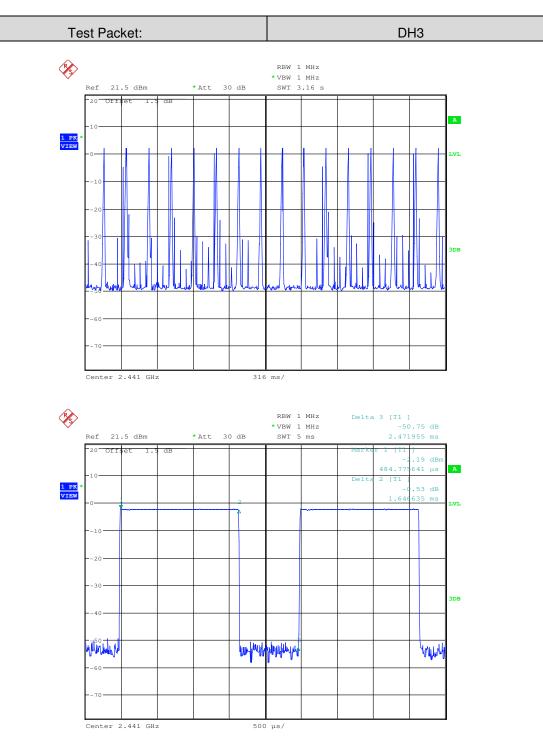




Report No.: SZEM150400164002 Page: 44 of 103

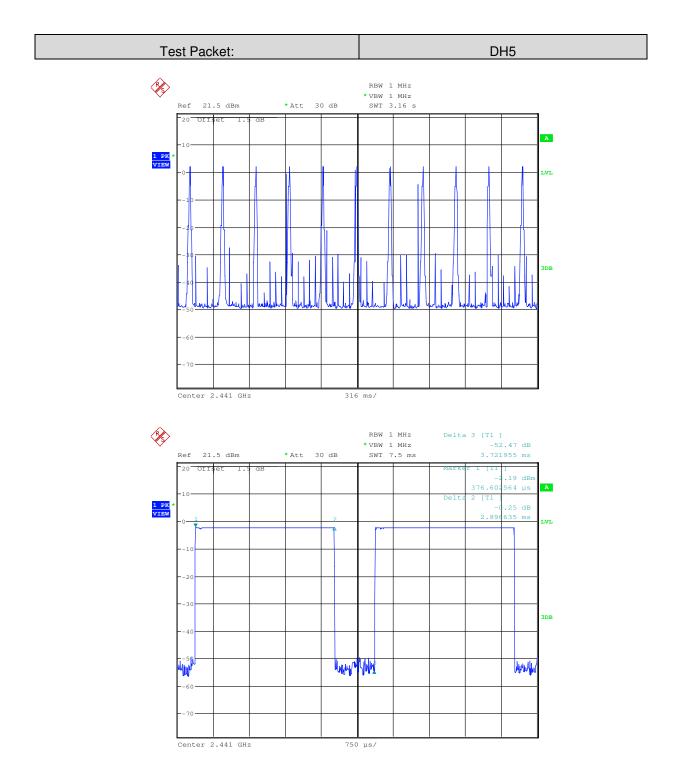




Report No.: SZEM150400164002 Page: 45 of 103

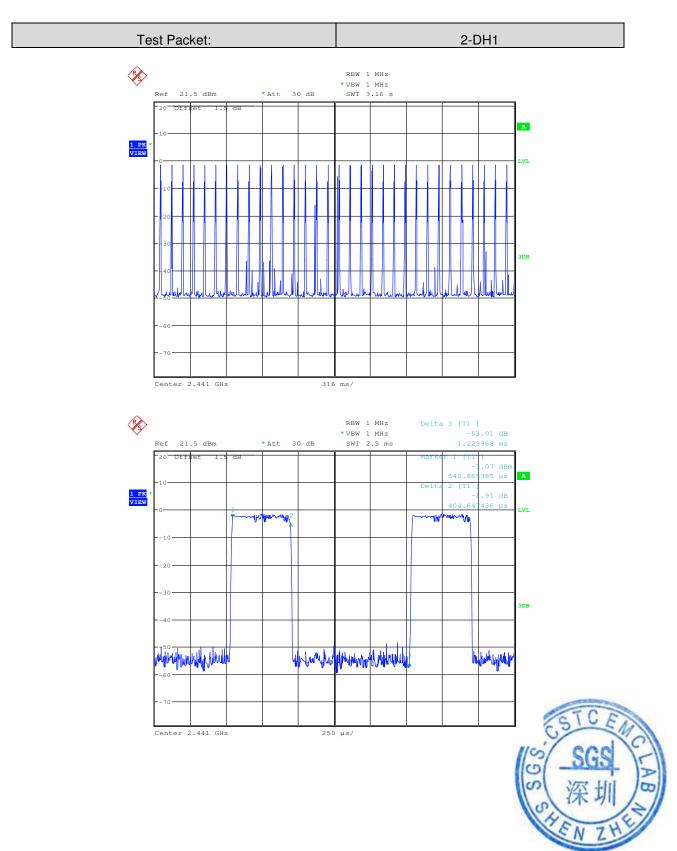




Report No.: SZEM150400164002 Page: 46 of 103

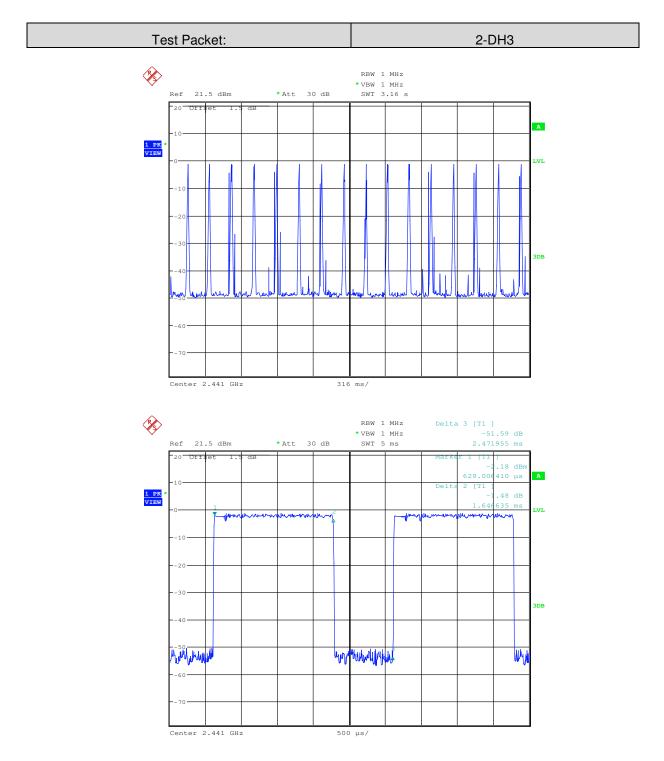




Report No.: SZEM150400164002 Page: 47 of 103

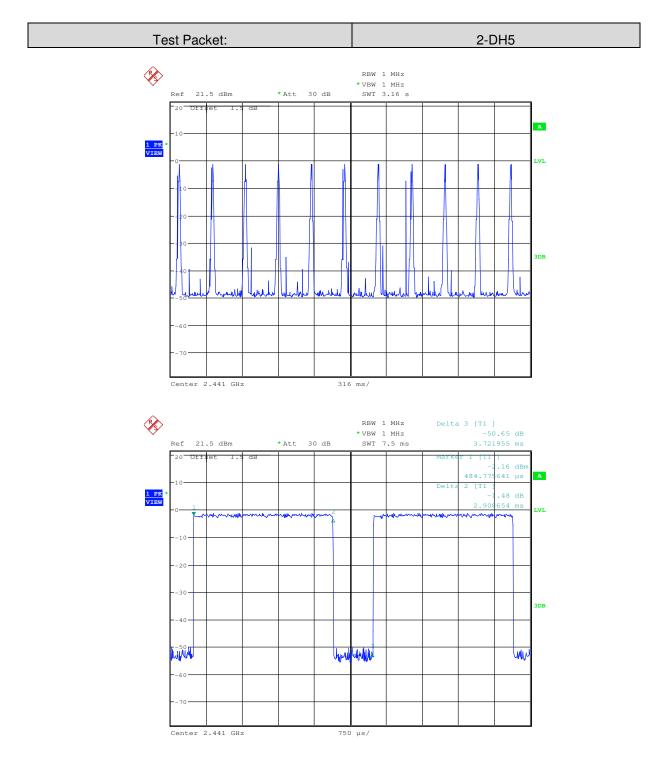




Report No.: SZEM150400164002 Page: 48 of 103

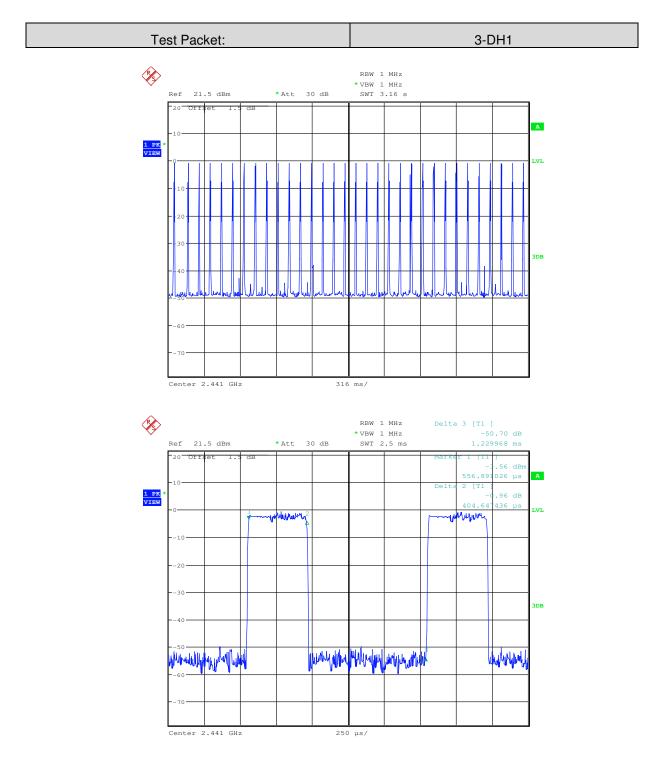




Report No.: SZEM150400164002 Page: 49 of 103

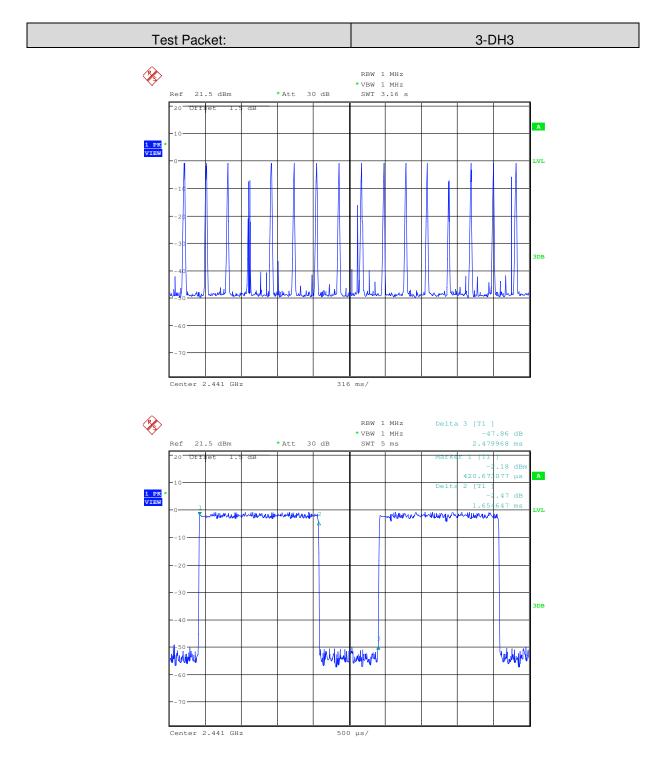



Report No.: SZEM150400164002 Page: 50 of 103

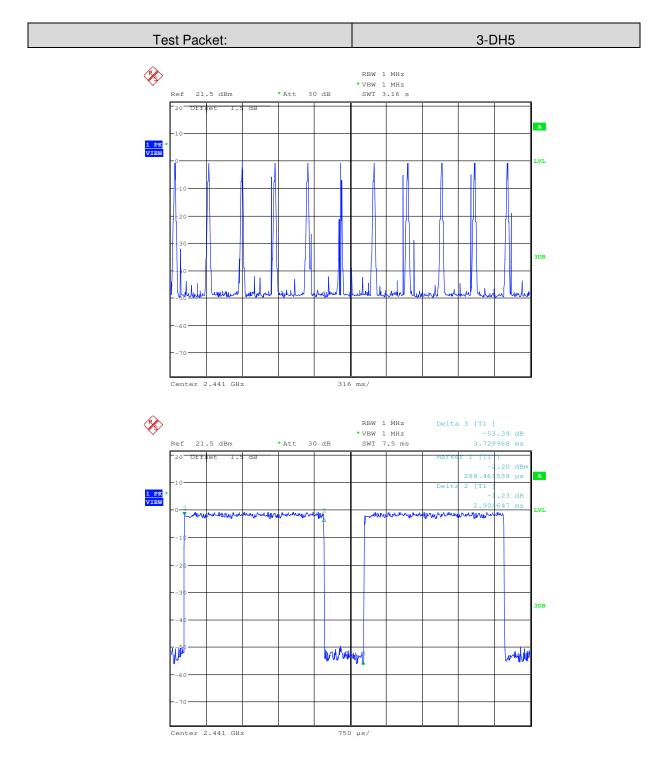



Report No.: SZEM150400164002 Page: 51 of 103


Test Requirement: 47 CFR Part 15C Section 15.247 (d) Test Method: ANSI C63.10:2009 Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type Through Pre-scan, find the DH1 of data type is the worst case of GFSK Final Test Mode: modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type. Instruments Used: Refer to section 5.10 for details Pass Test Results:

6.8 Band-edge for RF Conducted Emissions

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 52 of 103

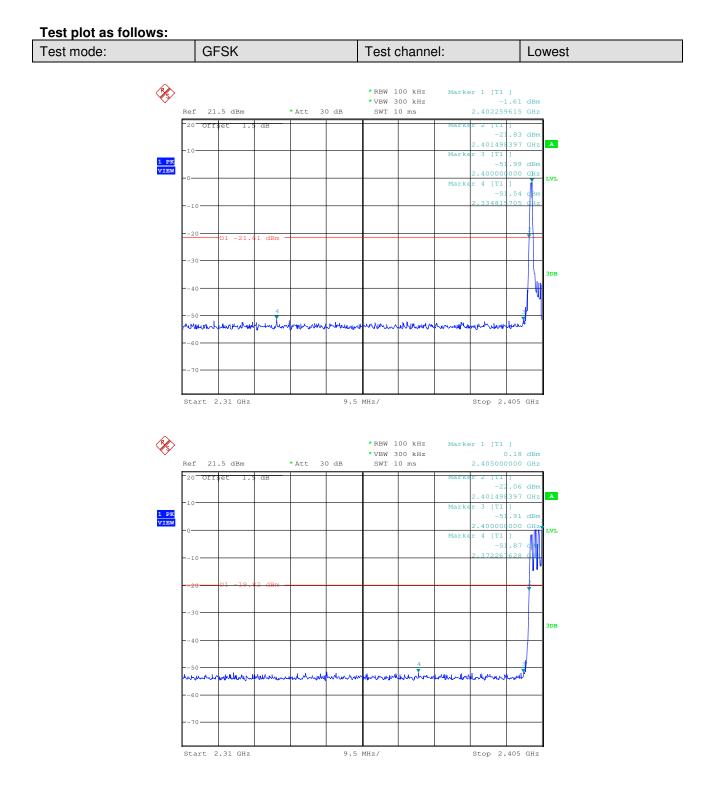




Report No.: SZEM150400164002 Page: 53 of 103

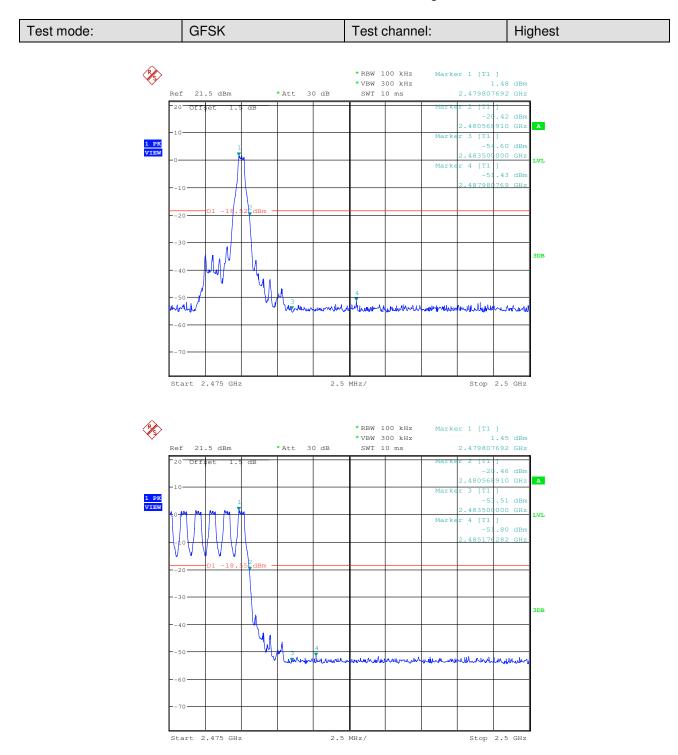




Report No.: SZEM150400164002 Page: 54 of 103

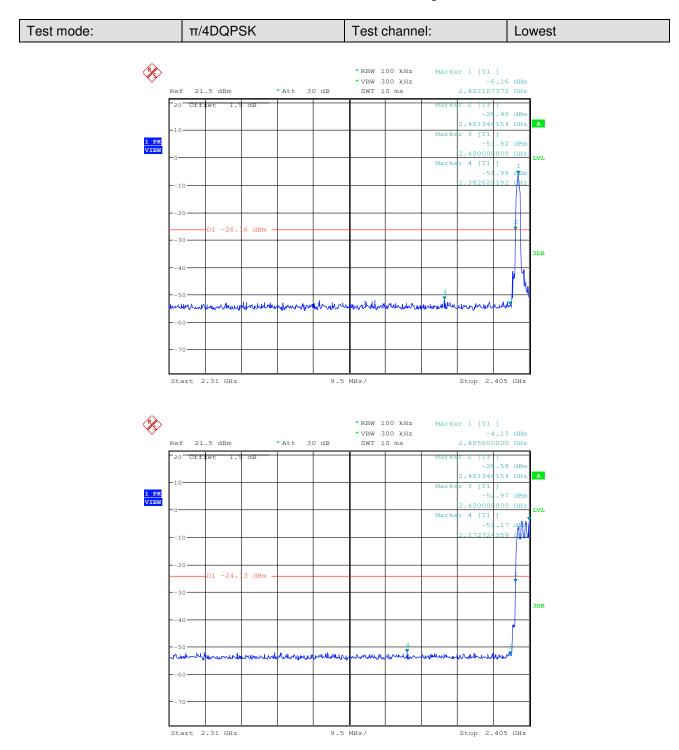




Report No.: SZEM150400164002 Page: 55 of 103

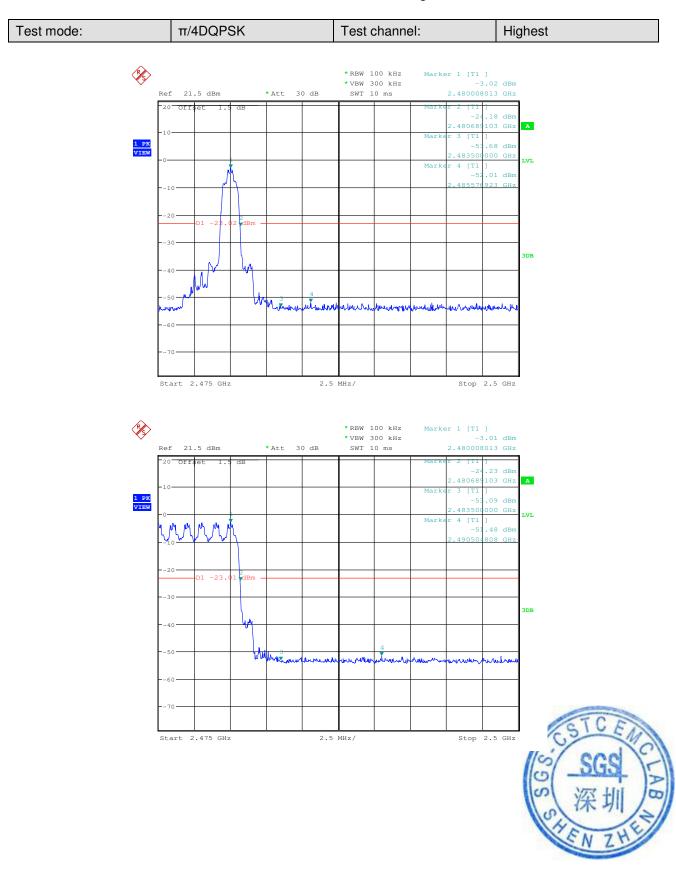




Report No.: SZEM150400164002 Page: 56 of 103

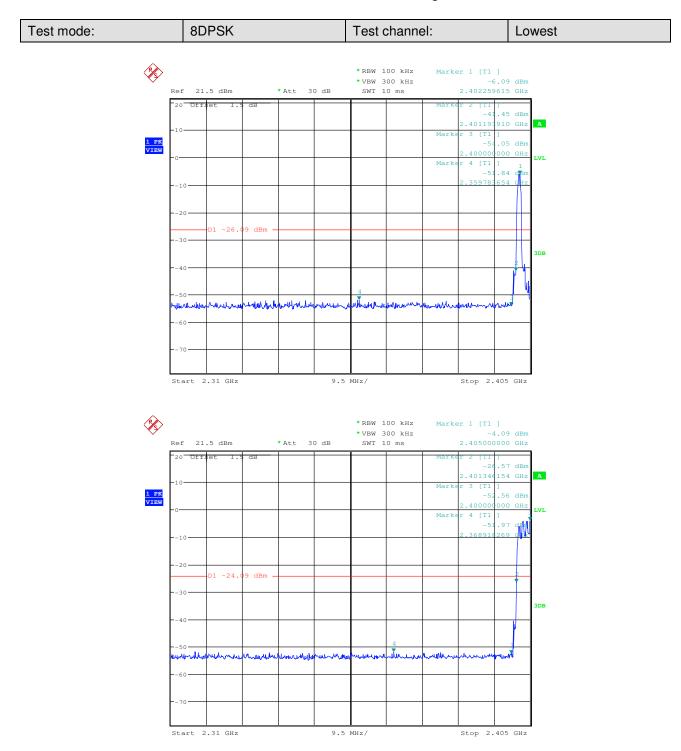



Report No.: SZEM150400164002 Page: 57 of 103

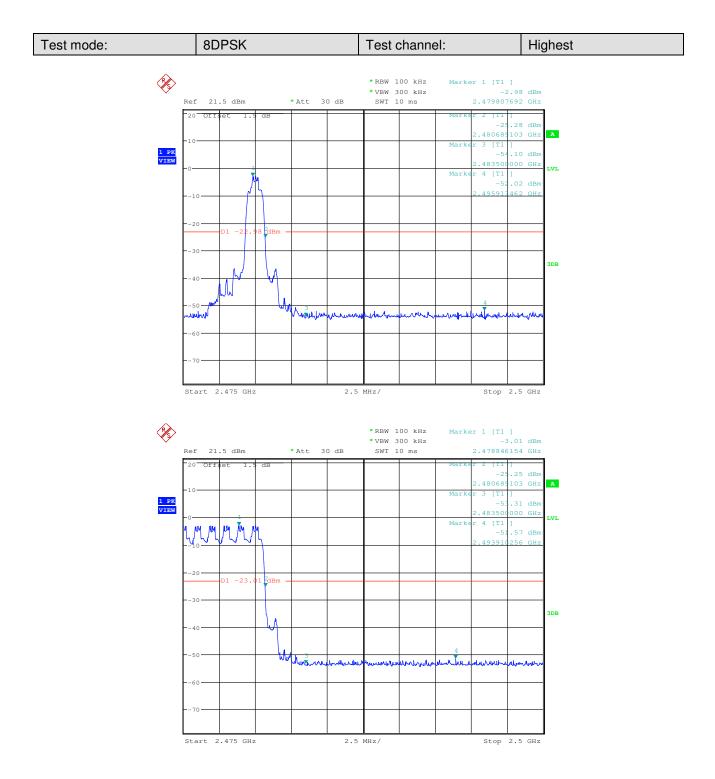



Report No.: SZEM150400164002 Page: 58 of 103


6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 59 of 103

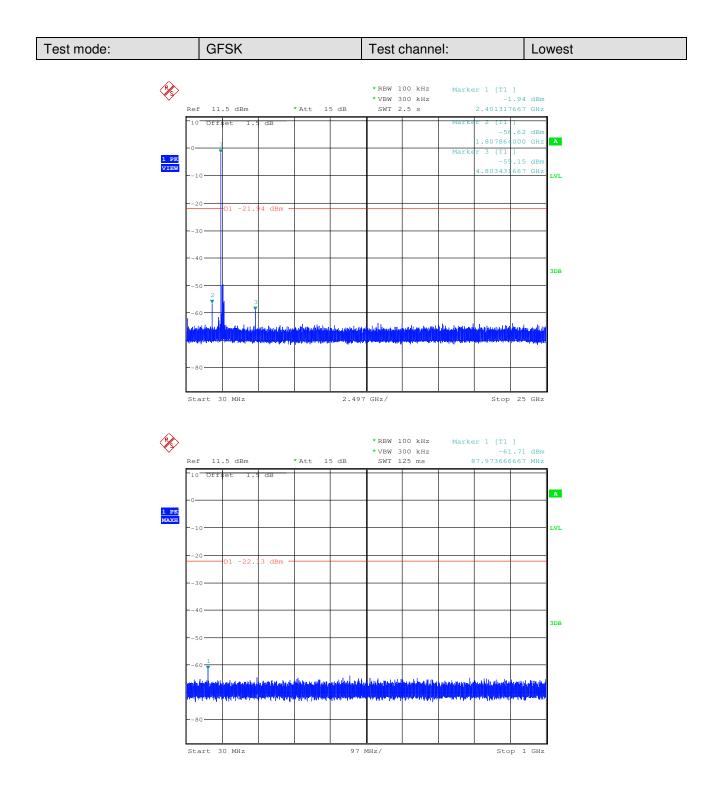




Report No.: SZEM150400164002 Page: 60 of 103

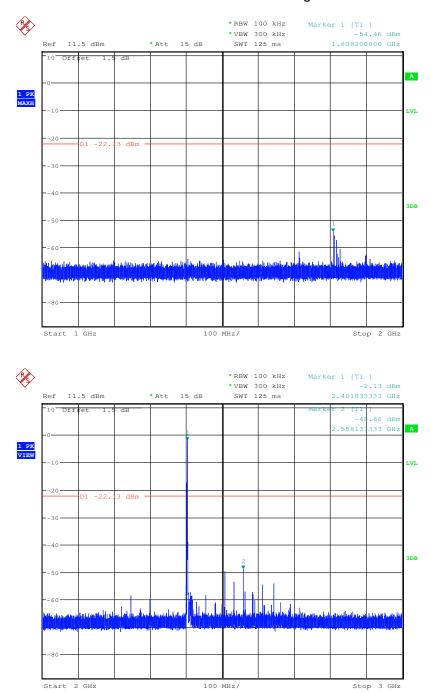




Report No.: SZEM150400164002 Page: 61 of 103

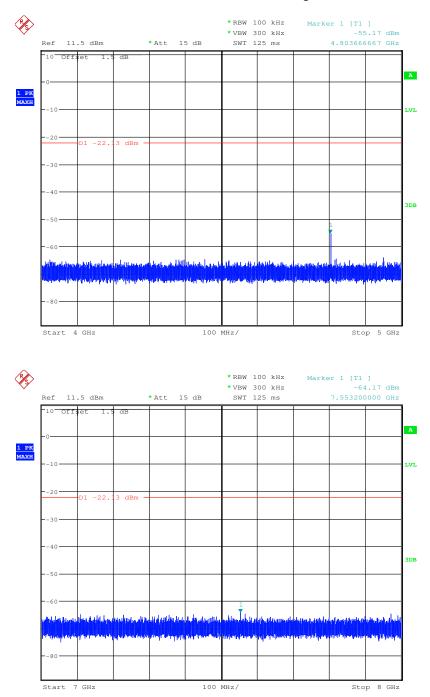




Report No.: SZEM150400164002 Page: 62 of 103

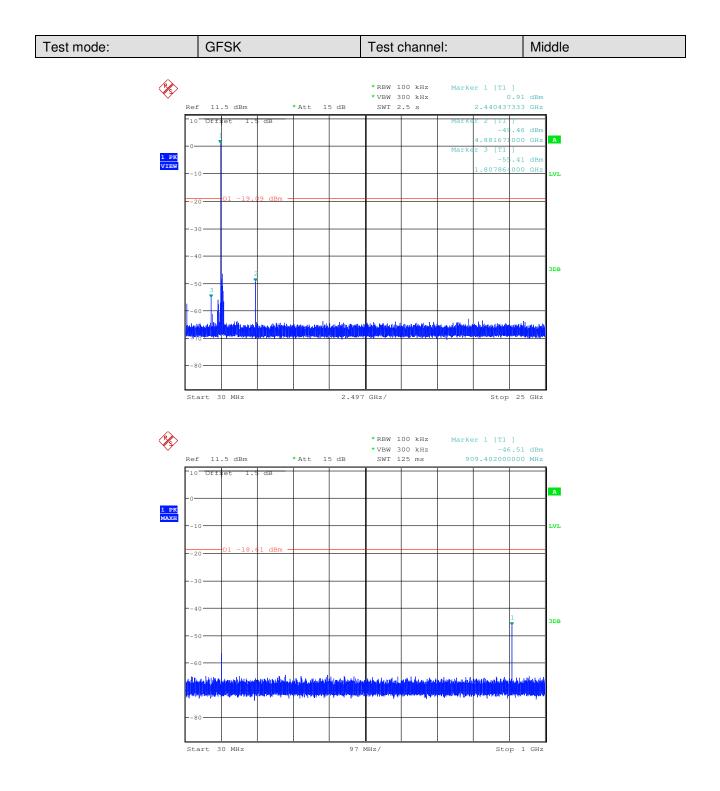

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150400164002 Page: 63 of 103

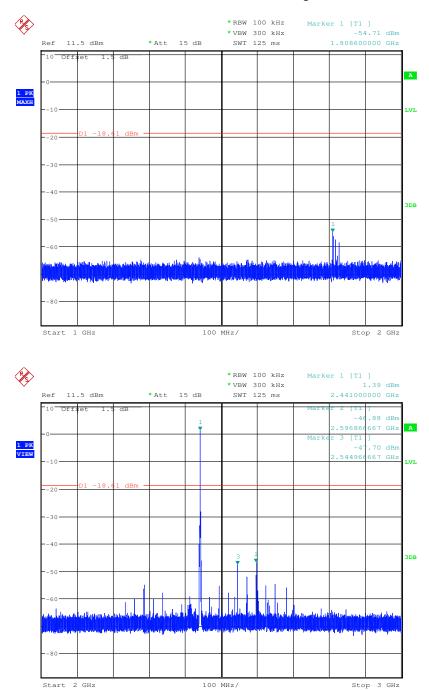




Report No.: SZEM150400164002 Page: 64 of 103

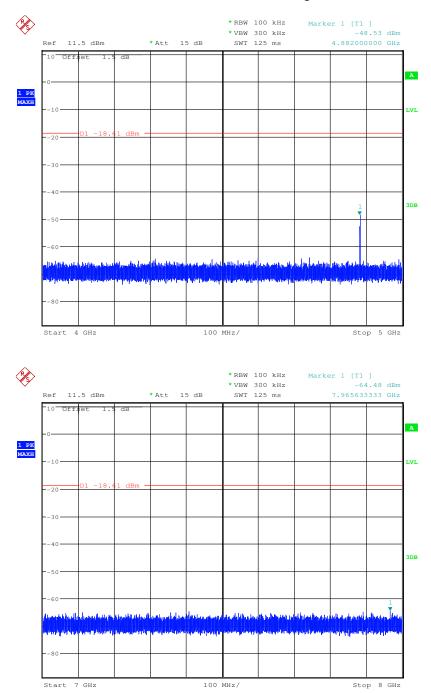




Report No.: SZEM150400164002 Page: 65 of 103

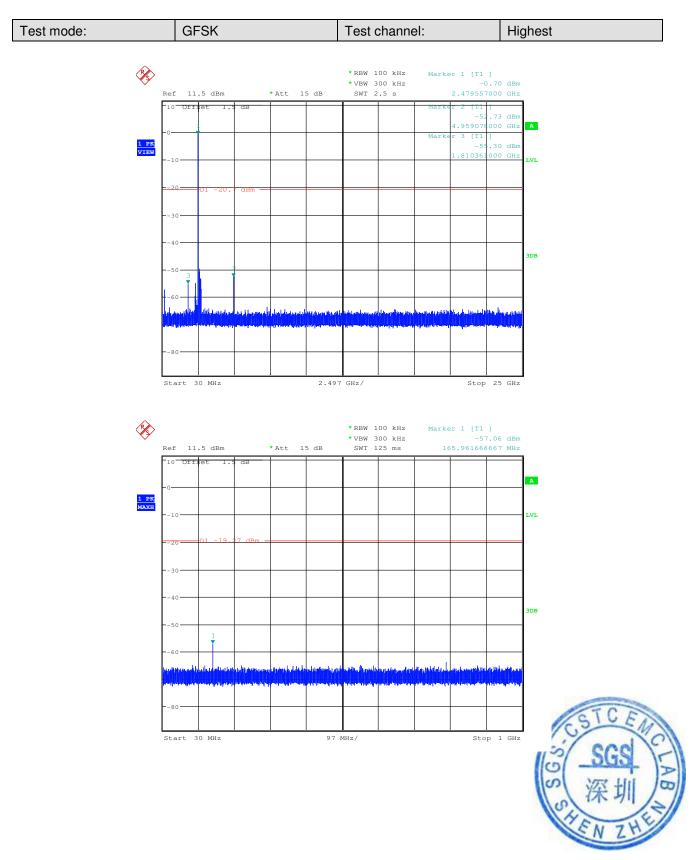





Report No.: SZEM150400164002 Page: 66 of 103

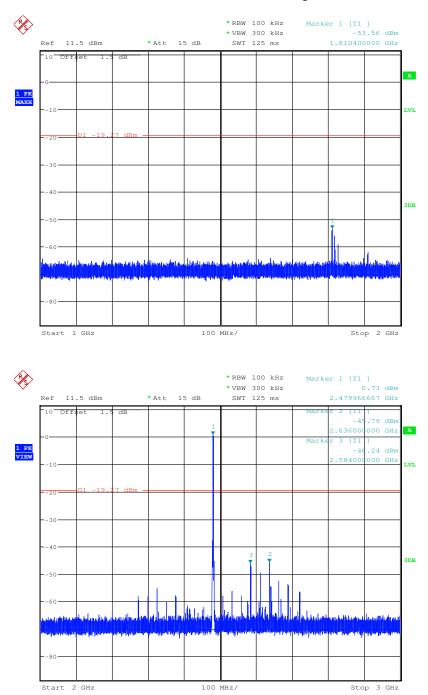




Report No.: SZEM150400164002 Page: 67 of 103

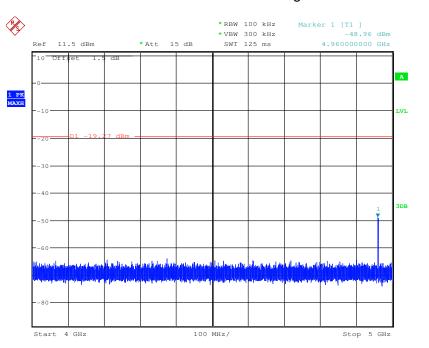

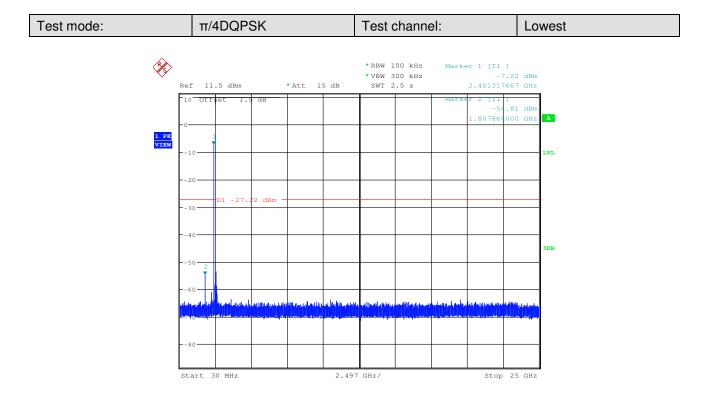




Report No.: SZEM150400164002 Page: 68 of 103

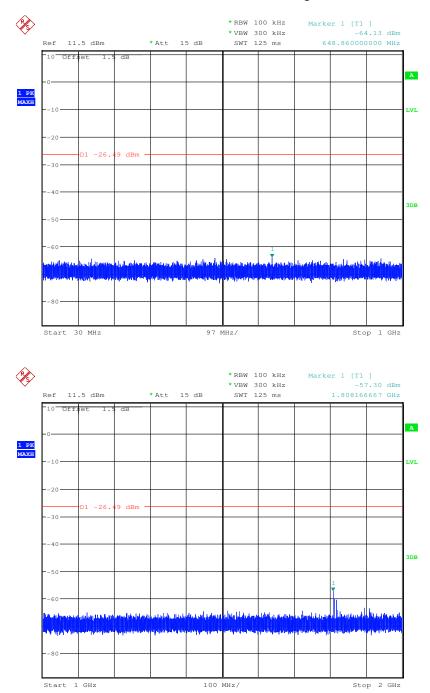





Report No.: SZEM150400164002 Page: 69 of 103

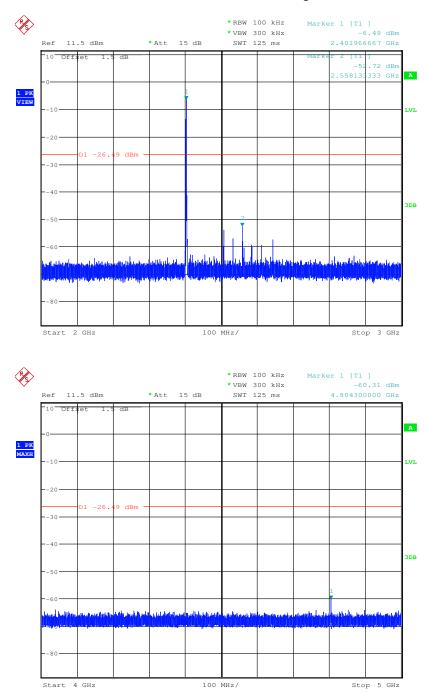




Report No.: SZEM150400164002 Page: 70 of 103

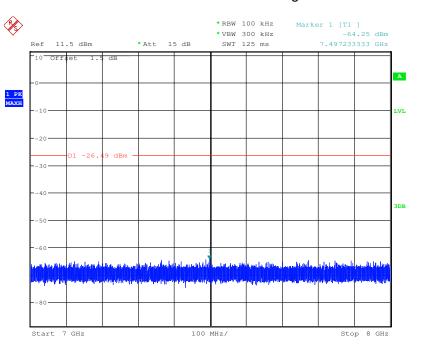

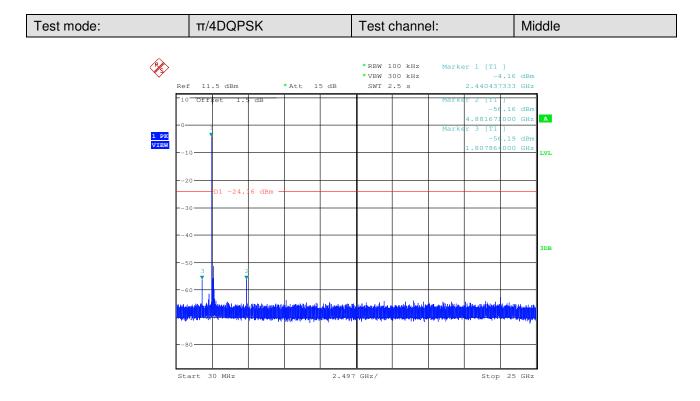




Report No.: SZEM150400164002 Page: 71 of 103

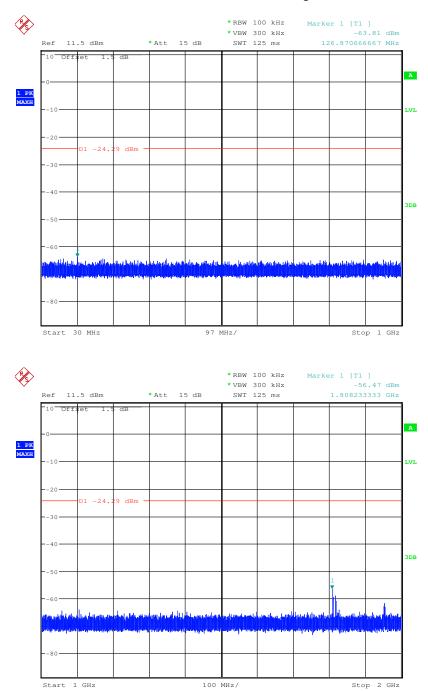





Report No.: SZEM150400164002 Page: 72 of 103

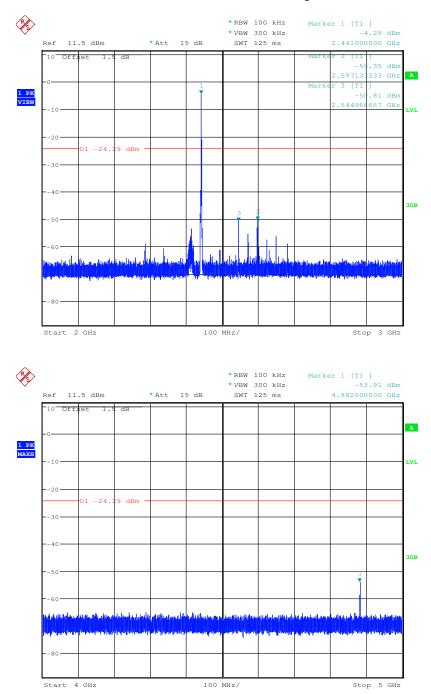




Report No.: SZEM150400164002 Page: 73 of 103

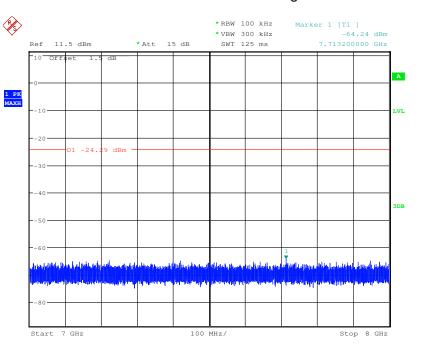

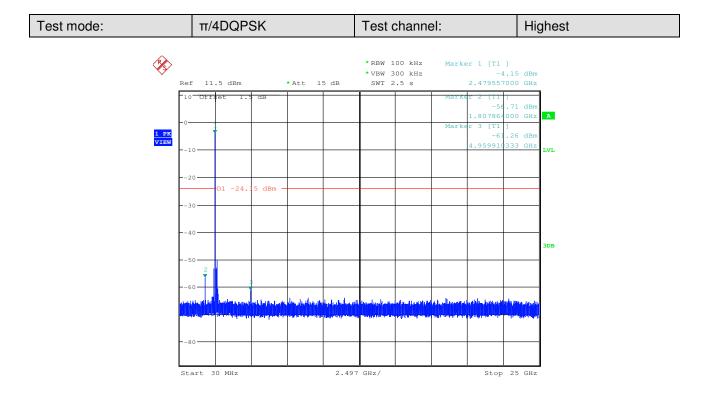




Report No.: SZEM150400164002 Page: 74 of 103

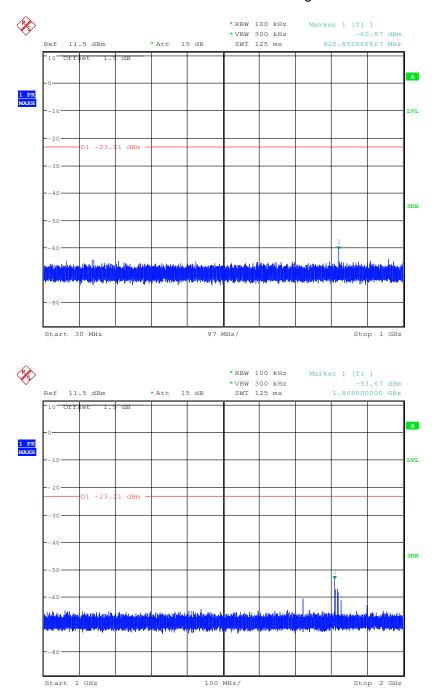




Report No.: SZEM150400164002 Page: 75 of 103

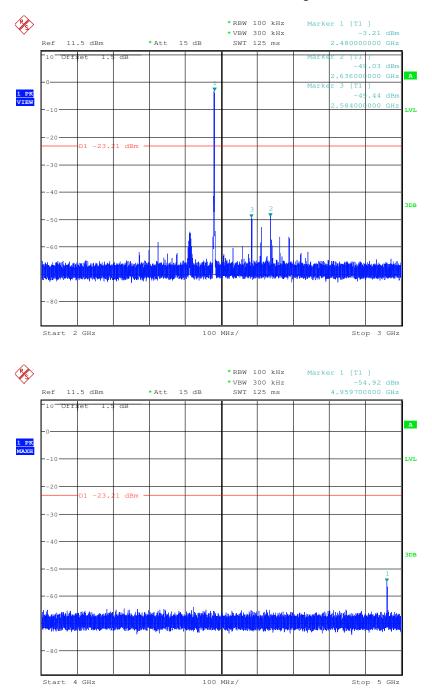






Report No.: SZEM150400164002 Page: 76 of 103

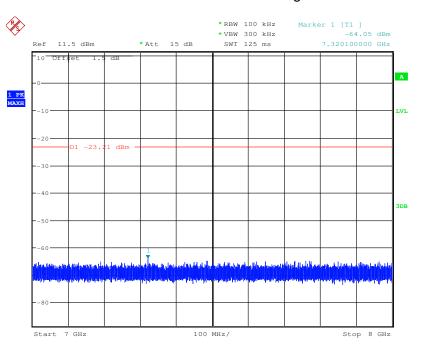


Test mode: 8DPSK Test channel: Lowest	
---------------------------------------	--

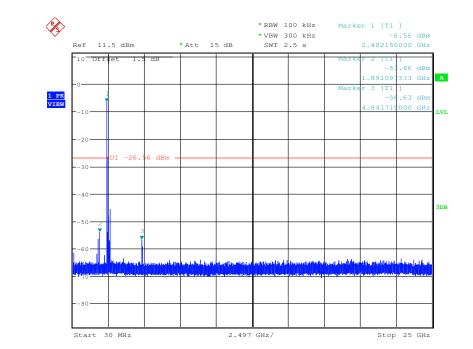




Report No.: SZEM150400164002 Page: 77 of 103

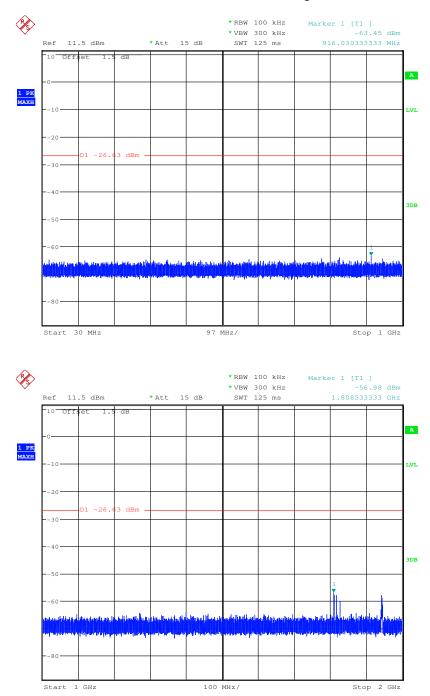





Report No.: SZEM150400164002 Page: 78 of 103

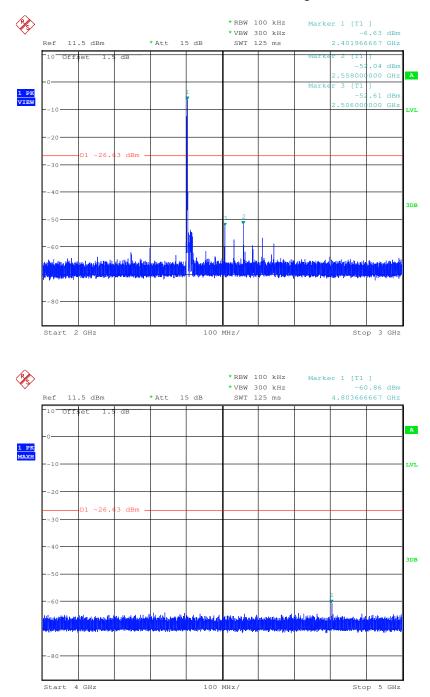



Report No.: SZEM150400164002 Page: 79 of 103

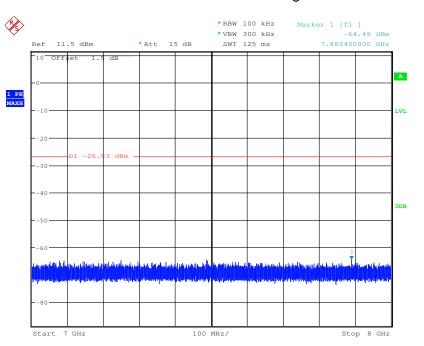

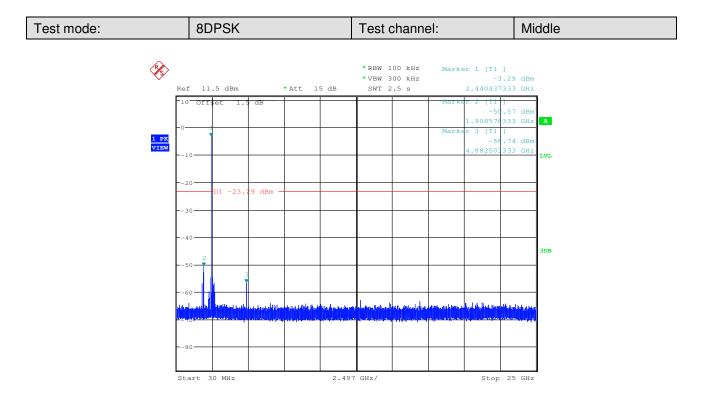



×

Ref

10

11 5 dBm

1.5

dB

Offset

***** ∆++

SGS-CSTC Standards Technical Services Ltd.

 Report No.: SZEM150400164002

 Page:
 80 of 103

 * RBW 100 kHz
 Marker 1 [T1]


 * VBW 300 kHz
 -64.48 dBm

 15 dB
 SWT 125 ms

 SWT 125 ms
 819.32133333 MHz


 Image:
 Image:

 Image:

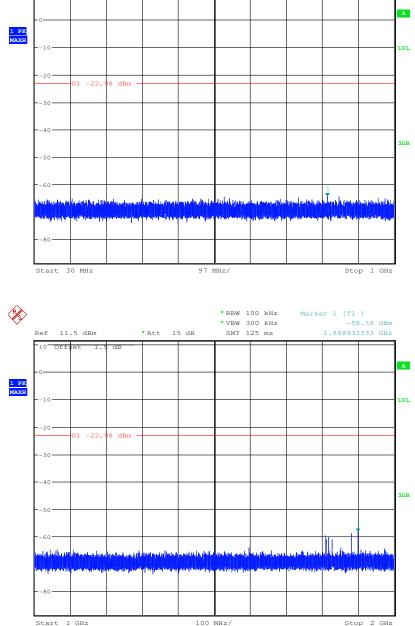





Report No.: SZEM150400164002 Page: 81 of 103

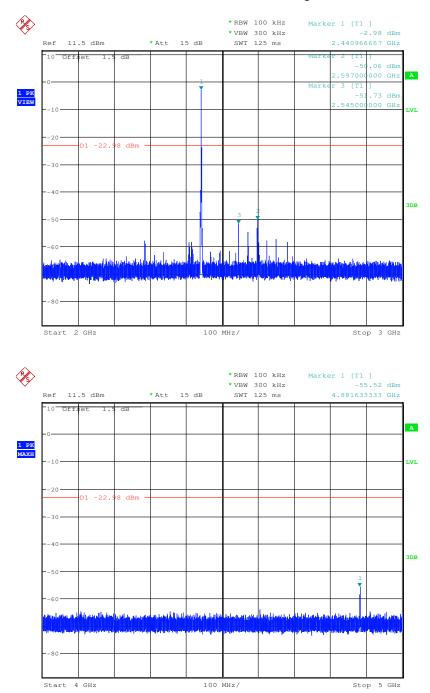




Report No.: SZEM150400164002 Page: 82 of 103

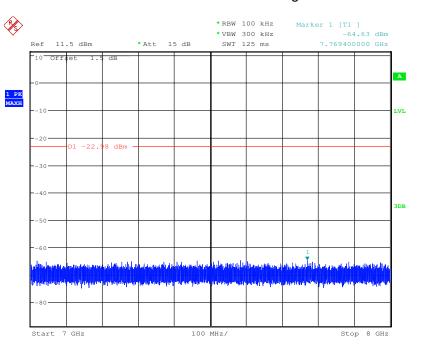

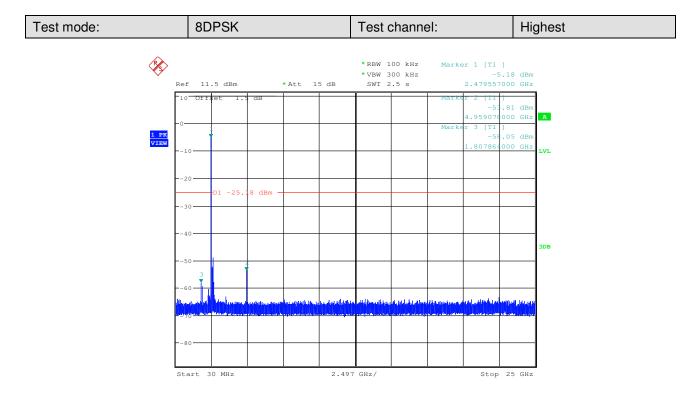




Report No.: SZEM150400164002 Page: 83 of 103

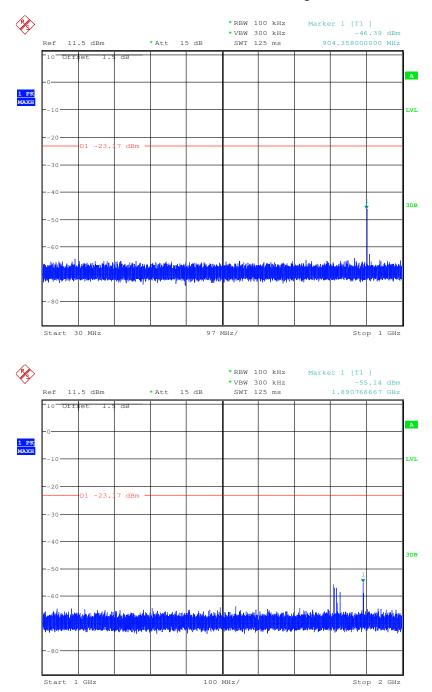




Report No.: SZEM150400164002 Page: 84 of 103

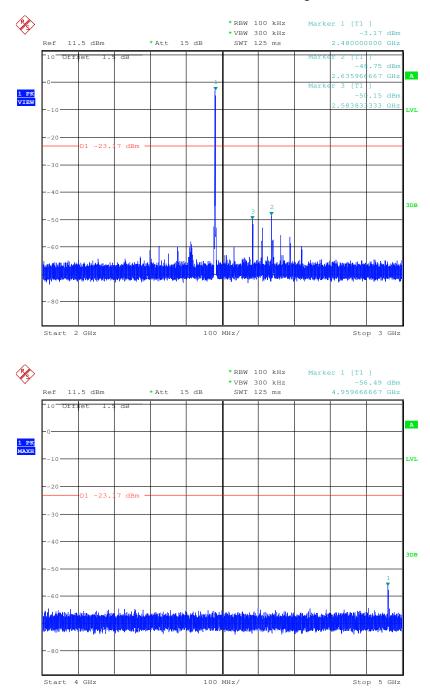



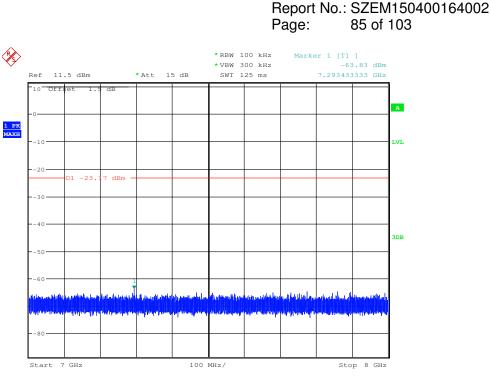

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.





Report No.: SZEM150400164002 Page: 86 of 103

6.10Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
rate from a Pseudorandom on the average by each tran	nnel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally smitter. The system receivers shall have input bandwidths that match the s of their corresponding transmitters and shall shift frequencies in asmitted signals.
channels during each transr receiver, must be designed transmitter be presented wit employing short transmissio	spectrum systems are not required to employ all available hopping nission. However, the system, consisting of both the transmitter and the to comply with all of the regulations in this section should the h a continuous data (or information) stream. In addition, a system n bursts must comply with the definition of a frequency hopping system missions over the minimum number of hopping channels specified in
the system to recognize othe independently chooses and The coordination of frequence	ence within a frequency hopping spread spectrum system that permits er users within the spectrum band so that it individually and adapts its hopsets to avoid hopping on occupied channels is permitted. cy hopping systems in any other manner for the express purpose of ccupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 15	.247(a)(1)
stage shift register whose 5t outputs are added in a modu	alo-two addition stage. And the result is fed back to the input of the first with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized ages: 9 sequence: $2^9 - 1 = 511$ bits
Linear Feedback S	hift Register for Generation of the PRBS sequence
	m Frequency Hopping Sequence as follow:
According to Bluetooth Cor bandwidths that match the	y on the average by each transmitter. e Specification, Bluetooth receivers are designed to have input and IF hopping channel bandwidths of any Bluetooth transmitters and shift on with the transmitted signals.



Report No.: SZEM150400164002 Page: 87 of 103

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 88 of 103


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark			
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak			
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MH	0.110MHz-0.490MHz Aver				Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	z 3MHz	Peak			
	Above TGH2		Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz		500	54.0	Quasi-peak	3			
	Above 1GHz		500	54.0	Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								

6.11 Radiated Spurious Emission

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 89 of 103

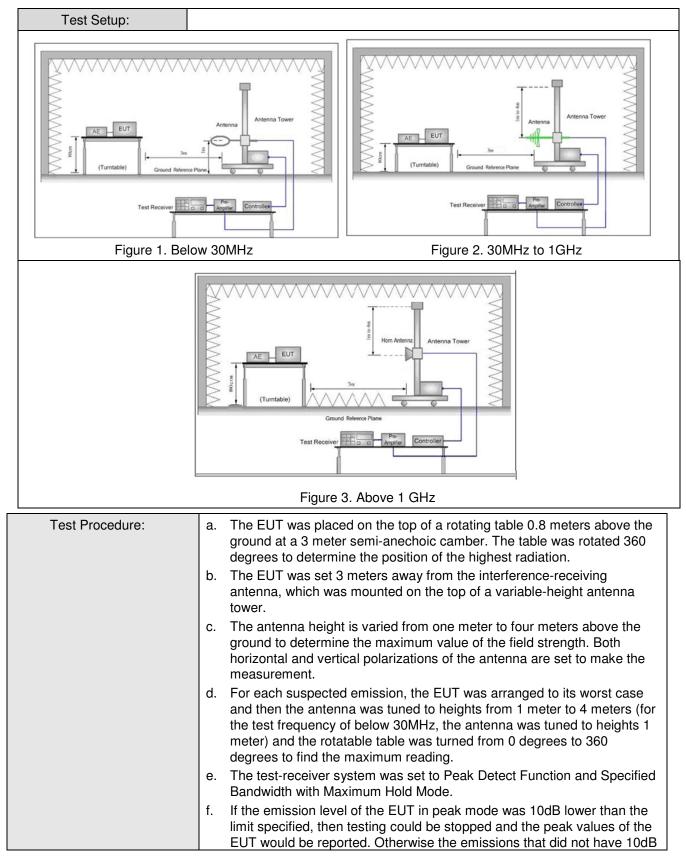



Report No.: SZEM150400164002 Page: 90 of 103


	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	o i i
	 g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
	 The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.
	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM150400164002 Page: 91 of 103

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge+Transmitting	Vertical

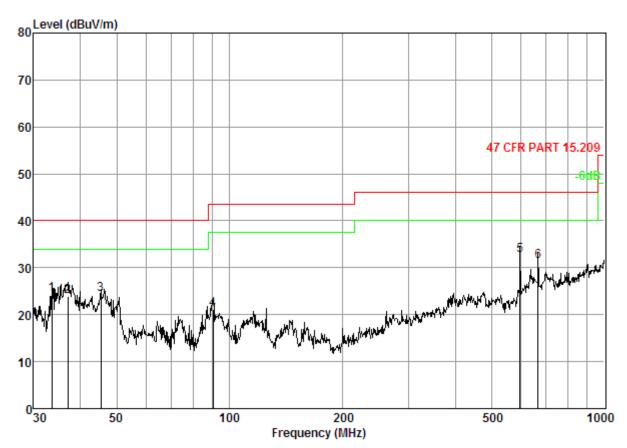


Condition: 47 CFR PART 15.209 3m VERTICAL Job No. : 1640CR Test Mode: TX mode

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	33.56 37.02 45.38 90.22 595.13 665.80	0.72 0.73 0.85 1.35 4.15 4.44	16.71 14.77 10.73 8.81 19.56 20.97	25.73 25.70 25.64 24.91 26.90 26.78	32.69 34.13 38.44 35.96 35.79 32.76	24.39 23.93 24.38 21.21 32.60 31.39	40.00 40.00 43.50 46.00	-15.61 -16.07 -15.62 -22.29 -13.40 -14.61



Report No.: SZEM150400164002 Page: 92 of 103



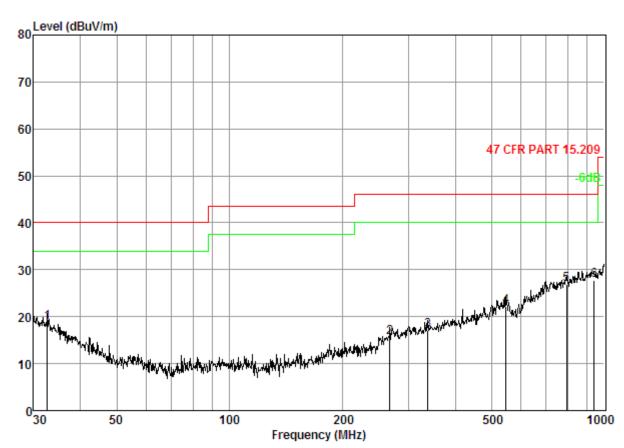

Condition: 47 CFR PART 15.209 3m HORIZONTAL Job No. : 1640CR Test Mode: TX mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	32.63 267.55 338.40 547.10 793.40 938.83	0.69 2.56 2.97 4.00 4.84 5.40	17.22 12.55 15.18 18.93 21.97 23.29	25.71 24.61 24.50 26.70 25.91 25.65	26.54 25.13 23.51 26.03 25.93 24.70	18.74 15.63 17.16 22.26 26.83 27.74	46.00 46.00 46.00 46.00	-21.26 -30.37 -28.84 -23.74 -19.17 -18.26



Report No.: SZEM150400164002 Page: 93 of 103

Worse case	mode:	GFSK(DH1)	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3885.241	7.60	33.30	35.30	40.90	46.50	74	-27.50	Vertical
4804.000	9.40	34.30	34.80	41.90	50.80	74	-23.20	Vertical
6195.247	12.60	34.90	34.90	41.70	54.30	74	-19.70	Vertical
7206.000	12.80	35.80	34.90	38.60	52.30	74	-21.70	Vertical
9608.000	14.80	37.20	35.10	37.70	54.60	74	-19.40	Vertical
11700.241	15.80	37.70	35.10	39.70	58.10	74	-15.90	Vertical
3825.217	7.50	33.20	35.30	41.50	46.90	74	-27.10	Horizontal
4804.000	9.40	34.30	34.80	41.20	50.10	74	-23.90	Horizontal
6000.242	12.80	34.90	35.10	42.00	54.60	74	-19.40	Horizontal
7206.000	12.80	35.80	34.90	38.30	52.00	74	-22.00	Horizontal
9608.000	14.80	37.20	35.10	39.00	55.90	74	-18.10	Horizontal
12180.227	16.10	37.90	34.90	38.70	57.80	74	-16.20	Horizontal

6.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1)	Τe	st channel:	Lowest	R	emark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	 Reading Level (dBµV) 	Emission Level (dBµV/m)	Limit (dBµV/m	Over Limit (dB)	Polarization
3885.241	7.60	33.30	35.30	28.20	33.80	54	-20.20	Vertical
4804.000	9.40	34.30	34.80	33.70	42.60	54	-11.40	Vertical
6195.247	12.60	34.90	34.90	29.10	41.70	54	-12.30	Vertical
7206.000	12.80	35.80	34.90	27.50	41.20	54	-12.80	Vertical
9608.000	14.80	37.20	35.10	25.10	42.00	54	-12.00	Vertical
11700.241	15.80	37.70	35.10	26.00	44.40	54	-9.60	Vertical
3825.217	7.50	33.20	35.30	28.10	33.50	54	-20.50	Horizontal
4804.000	9.40	34.30	34.80	31.60	40.50	54	-13.50	Horizontal
6000.242	12.80	34.90	35.10	29.10	41.70	54	12.30	Horizontal
7206.000	12.80	35.80	34.90	26.40	40.10	54	-13.90	Horizontal
9608.000	14.80	37.20	35.10	25.00	41.90	54	-12.10	Horizontal
12180.227	16.10	37.90	34.90	25.10	44.20	54	-9.80	Horizontal



Report No.: SZEM150400164002 Page: 94 of 103

Worse case	mode:	GFSK(DH1)	Tes	t channel:	Middle	R	lemark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Lir (dBuV/n	· I limit	Polarization
3780.225	7.40	33.00	35.30	40.80	45.90	74	-28.10	Vertical
4882.000	9.50	34.50	34.80	45.00	54.20	74	-19.80	Vertical
5895.242	12.40	34.50	35.00	42.50	54.40	74	-19.60	Vertical
7323.000	12.80	35.70	35.10	39.50	52.90	74	-21.10	Vertical
9764.000	14.70	37.30	34.50	39.20	56.70	74	-17.30	Vertical
11820.220	15.80	37.70	35.10	39.10	57.50	74	-16.50	Vertical
3647.033	7.10	32.50	35.40	40.40	44.60	74	-29.40	Horizontal
4882.000	9.50	34.50	34.80	44.30	53.50	74	-20.50	Horizontal
5970.242	12.70	34.80	35.10	42.50	54.90	74	-19.10	Horizontal
7323.000	12.80	35.70	35.10	40.00	53.40	74	-20.60	Horizontal
9764.000	14.70	37.30	34.50	38.80	56.30	74	-17.70	Horizontal
12105.218	15.80	37.90	34.90	39.20	58.00	74	-16.00	Horizontal

Worse case	mode:	GFSK(DH1)	Tes	t channel:	Middle	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3780.225	7.40	33.00	35.30	28.10	33.20	54	-20.80	Vertical
4882.000	9.50	34.50	34.80	38.60	47.80	54	-6.20	Vertical
5895.242	12.40	34.50	35.00	29.10	41.00	54	-13.00	Vertical
7323.000	12.80	35.70	35.10	29.90	43.30	54	-10.70	Vertical
9764.000	14.70	37.30	34.50	25.10	42.60	54	-11.40	Vertical
11820.220	15.80	37.70	35.10	25.50	43.90	54	-10.10	Vertical
3647.033	7.10	32.50	35.40	27.80	32.00	54	-22.00	Horizontal
4882.000	9.50	34.50	34.80	37.70	46.90	54	-7.10	Horizontal
5970.242	12.70	34.80	35.10	29.20	41.60	54	-12.40	Horizontal
7323.000	12.80	35.70	35.10	26.90	40.30	54	-13.70	Horizontal
9764.000	14.70	37.30	34.50	25.00	42.50	54	-11.50	Horizontal
12105.218	15.80	37.90	34.90	25.90	44.70	54	-9.30	Horizontal



Report No.: SZEM150400164002 Page: 95 of 103

Worse case	mode:	GFSK(DH1)) Te	st channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3705.228	7.20	32.80	35.30	42.90	47.60	74	-26.40	Vertical
4960.000	9.60	34.60	34.70	47.80	57.30	74	-16.70	Vertical
5775.245	11.90	34.20	35.00	44.70	55.80	74	-18.20	Vertical
7440.000	12.90	35.80	35.20	40.40	53.90	74	-20.10	Vertical
9920.000	14.60	37.30	34.50	38.90	56.30	74	-17.70	Vertical
12270.232	16.40	37.90	35.00	38.80	58.10	74	-15.90	Vertical
3900.208	7.70	33.20	35.20	42.50	48.20	74	-25.80	Horizontal
4960.000	9.60	34.60	34.70	46.90	56.40	74	-17.60	Horizontal
6105.243	12.70	35.00	35.00	41.80	54.50	74	-19.50	Horizontal
7440.000	12.90	35.80	35.20	39.40	52.90	74	-21.10	Horizontal
9920.000	14.60	37.30	34.50	37.80	55.20	74	-18.80	Horizontal
12015.225	15.50	37.80	34.80	39.10	57.60	74	-16.40	Horizontal

Worse case	mode:	GFSK(DH1)	Tes	t channel:	Highest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Prear factor (dB)		Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV	//m)	Over Limit (dB)	Polarization
3705.228	7.20	32.80	35.3	30	28.20	32.90	54	1	-21.10	Vertical
4960.000	9.60	34.60	34.7	70	41.40	50.90	54	1	-3.10	Vertical
5775.245	11.90	34.20	35.0	00	31.00	42.10	54	1	-11.90	Vertical
7440.000	12.90	35.80	35.2	20	29.90	43.40	54	1	-10.60	Vertical
9920.000	14.60	37.30	34.5	50	25.60	43.00	54	1	-11.00	Vertical
12270.232	16.40	37.90	35.0	00	26.40	45.70	54	1	-8.30	Vertical
3900.208	7.70	33.20	35.2	20	28.00	33.70	54	1	-20.30	Horizontal
4960.000	9.60	34.60	34.7	70	40.30	49.80	54	1	-4.20	Horizontal
6105.243	12.70	35.00	35.0	00	28.40	41.10	54	1	-12.90	Horizontal
7440.000	12.90	35.80	35.2	20	28.90	42.40	54	1	-11.60	Horizontal
9920.000	14.60	37.30	34.5	50	24.60	42.00	54	1	-12.00	Horizontal
12015.225	15.50	37.80	34.8	30	25.40	43.90	54	1	-10.10	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Report No.: SZEM150400164002 Page: 96 of 103

6.12Restricted bands around fundamental frequency

Test Requirement:	Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance: 3n	n (Semi-Anechoic Chambe	r)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
		74.0	Peak Value						
T O .									
Test Setup:									
Antenna Tower Horn Antenna Tower Horn Antenna Tower Test Receiver Plane Test Receiver Plane Test Receiver Controller									
Figure 1. 30MHz to 1GHz Figure 2. Above 1 GHz									



Report No.: SZEM150400164002 Page: 97 of 103


Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was turned to heights from 1 meters adol degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning tor Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Final Test Mode: Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode which it is worse case Only the worst case is recorded in the report. <t< th=""><th></th><th></th></t<>		
Exploratory Test Mode:Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.Final Test Mode:Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details	Test Procedure:	 the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was
Transmitting mode, Charge + Transmitting mode. Final Test Mode: Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Exploratory Test Mode:	
Final Test Mode: Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Final Test Mode:	the worst case.
Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
		• •
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150400164002 Page: 98 of 103

Test plot as follows:

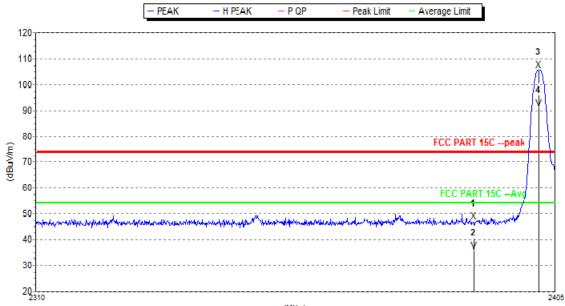


(M	IH	z	

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	47.1	74.0	26.9	28.7	34.0	6.3	Н
2 F	2402	105.7	74.0	-31.7	28.8	34.0	6.3	Н
Avg								
1	2390	35.7	54.0	18.3	28.7	34.0	6.3	Н
2 F	2402	91.0	54.0	-37.0	28.8	34.0	6.3	Н




Report No.: SZEM150400164002 Page: 99 of 103

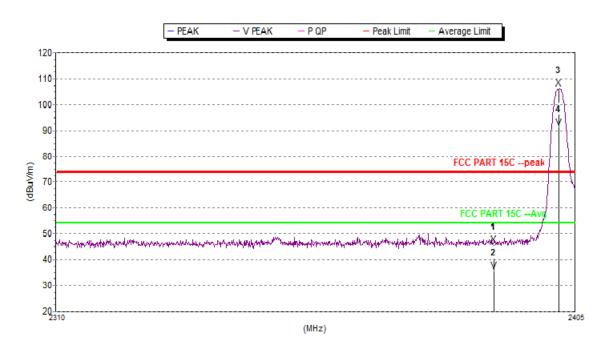

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	45.8	74.0	28.2	28.7	34.0	6.3	V
2 F	2402	106.2	74.0	-32.2	28.8	34.0	6.3	V
Avg								
1	2390	35.8	54.0	18.2	28.7	34.0	6.3	V
2 F	2402	91.4	54.0	-37.4	28.8	34.0	6.3	V




Report No.: SZEM150400164002 Page: 100 of 103

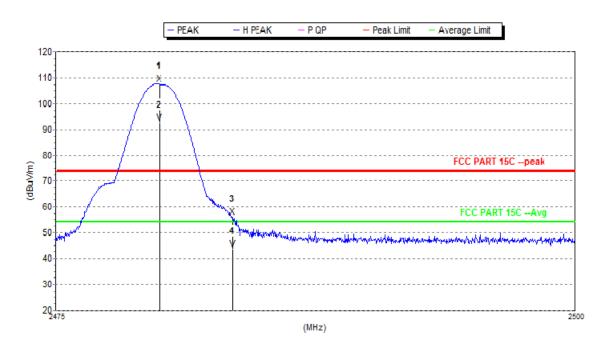

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2480	107.6	74.0	-33.6	29.3	34.0	6.3	Н
2	2483.5	56.2	74.0	17.8	29.3	34.0	6.3	Н
Avg								
1 F	2480	92.6	54.0	-38.6	29.3	34.0	6.3	Н
2	2483.5	43.7	54.0	10.3	29.3	34.0	6.3	Н



Report No.: SZEM150400164002 Page: 101 of 103

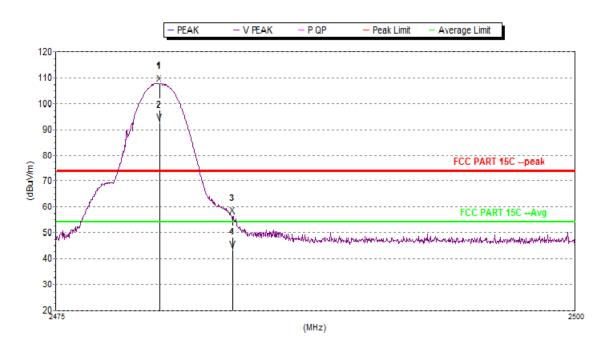

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2480	107.6	74.0	-33.6	29.3	34.0	6.3	V
2	2483.5	56.3	74.0	17.7	29.3	34.0	6.3	V
Avg								
1 F	2480	92.6	54.0	-38.6	29.3	34.0	6.3	V
2	2483.5	43.5	54.0	10.5	29.3	34.0	6.3	V

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150400164002 Page: 102 of 103

7 Photographs - EUT Test Setup

Test model No.: SB365B/37

7.1 Conducted Emission



7.2 Radiated Emission





Report No.: SZEM150400164002 Page: 103 of 103

7.3 Radiated Spurious Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1504001640CR.