

FCC Test Report

Report No.: AGC15705240544FR01

FCC ID	:	2AANZBHPH
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Active Noise Cancelling Wireless Headphones
BRAND NAME	:	VIBE
MODEL NAME	:	DG-BHPH, DG-BHPH-BLK, DG-BHPH-HOL24, DG-BHPH-XXX
APPLICANT	:	DGL Group LTD.
DATE OF ISSUE	:	May 28, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 28, 2024	Valid	Initial Release



Table of Contents

1	. General Information	5
2	Product Information	6
	2.1 Product Technical Description	6
	2.2 Test Frequency List	6
	2.3 Related Submittal(S) / Grant (S)	7
	2.4 Test Methodology	7
	2.5 Special Accessories	7
	2.6 Equipment Modifications	7
	2.7 Antenna Requirement	7
3	. Test Environment	8
	3.1 Address of the Test Laboratory	8
	3.2 Test Facility	8
	3.3 Environmental Conditions	9
	3.4 Measurement Uncertainty	9
	3.5 List of Equipment Use	10
4	System Test Configuration	
	4.1 EUT Configuration	12
	4.2 EUT Exercise	12
	4.3 Configuration of Tested System	12
	4.4 Equipment Used In Tested System	
	4.5 Summary of Test Results	13
5	. Description of Test Modes	14
6	. Duty Cycle Measurement	15
7	. RF Output Power Measurement	16
	7.1 Provisions Applicable	16
	7.2 Measurement Procedure	16
	7.3 Measurement Setup (Block Diagram of Configuration)	16
	7.4 Measurement Result	17
8	. 6dB Bandwidth Measurement	21
	8.1 Provisions Applicable	21
	8.2 Measurement Procedure	21
	8.3 Measurement Setup (Block Diagram of Configuration)	21
	8.4 Measurement Results	22
9	. Power Spectral Density Measurement	29
	9.1 Provisions Applicable	
	9.2 Measurement Procedure	29
	9.3 Measurement Setup (Block Diagram of Configuration)	
	9.4 Measurement Results	
1	0. Conducted Band Edge and Out-of-Band Emissions	34



10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	67
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	70
Appendix II: Photographs of Test EUT	70



1. General Information

Applicant	DGL Group LTD.
Address	2045 Lincoln Highway, 3rd Floor, Edison, NJ 08817, United States
Manufacturer	DGL Group LTD.
Address	2045 Lincoln Highway, 3rd Floor, Edison, NJ 08817, United States
Factory	N/A
Address	N/A
Product Designation	Active Noise Cancelling Wireless Headphones
Brand Name	VIBE
Test Model	DG-BHPH
Series Model(s)	DG-BHPH-BLK, DG-BHPH-HOL24, DG-BHPH-XXX
Difference Description	All the same except for the model name and color.
Date of receipt of test item	May 22, 2024
Date of Test	May 22, 2024 to May 28, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jank Gai

Jack Gui (Project Engineer)

May 28, 2024

Reviewed By

Calvin Liu (Reviewer)

May 28, 2024

Approved By

Zhan

Max Zhang Authorized Officer

May 28, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	BLE GFSK 1Mbps: -1.222dBm BLE GFSK 2Mbps: -1.129dBm
Hardware Version	V1.2
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	-0.68dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter
Adapter Information	N/A

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
	:	:		
2400~2483.5MHz	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: $f = 2402 + 2^{k}$ MHz, $k = 0,, 39$ f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AANZBHPH**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -0.68dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31		
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
\square	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\square	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

• A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)					
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02			
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08			
\square	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02			



Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
\square	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
	AGC-EM-S003	RE-Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0		
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
\square	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

I Test Accessories Come From The Laboratory

No	Equipmen t	Manufacture r	Model No.	Specification Information	Cabl e
1	Adapter	Huawei	HW-200440 C00	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3A;20V4. 4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Active Noise Cancelling Wireless Headphones	DGL Group LTD.	DG-BHPH		



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

Summary Table of Test Cases					
	Data Rate / Modulation				
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK				
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)				
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)				
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)				
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered or AC/DC adapter)				
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered or AC/DC adapter)				
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered or AC/DC adapter)				
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)				

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- The battery is full-charged during the test.
 For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- For Conducted Test method, a temporary antenna connector is provided by the manufacture. 4.

Software Setting Diagram




6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2134	85.36	0.69	0.47
BLE_2Mbps	1083	43.32	3.63	0.92

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

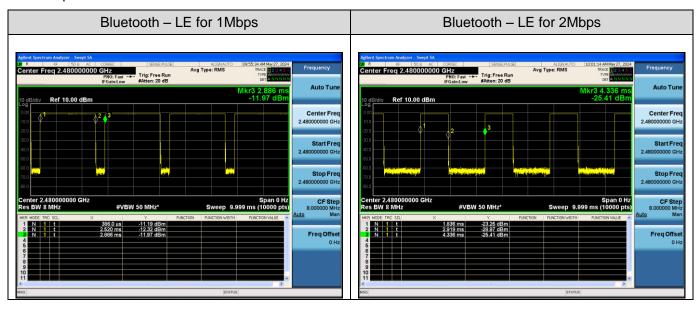

The test plots as follows:

^{1.} Duty Cycle factor = 10 * log (1/ Duty cycle)



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW \geq [3 × RBW].
- 4. Span≥[3 × RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.3 Measurement Setup (Block Diagram of Configuration)

For peak power test setup

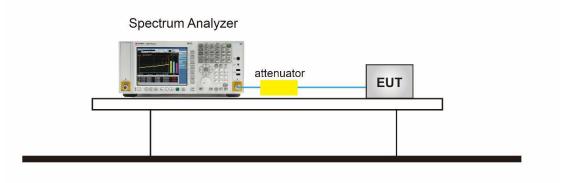




7.4 Measurement Result


Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)Peak Power (dBm)Limits (dBm)			Pass or Fail			
	2402	-2.481	≤30	Pass			
GFSK_1Mbps	2440	-1.638	≤30	Pass			
	2480	-1.222	≤30	Pass			
	2402	-2.366	≤30	Pass			
GFSK_2Mbps	2440	-1.533	≤30	Pass			
	2480	-1.129	≤30	Pass			



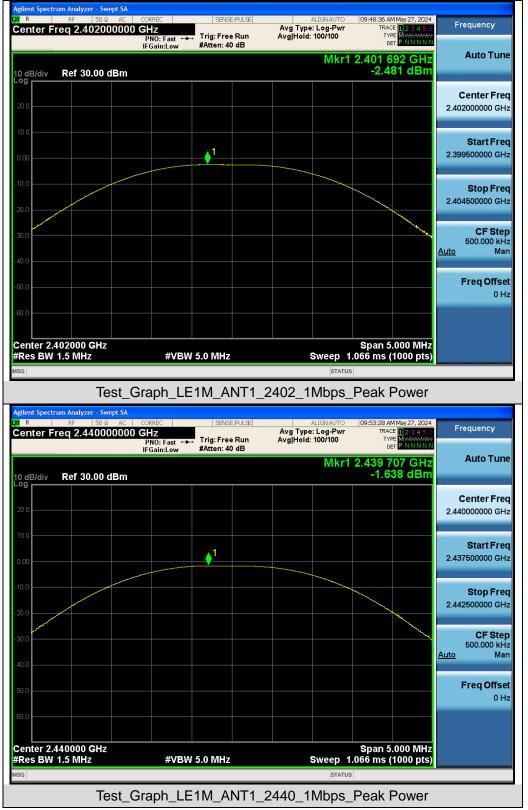


Test Graphs of Conducted Output Power



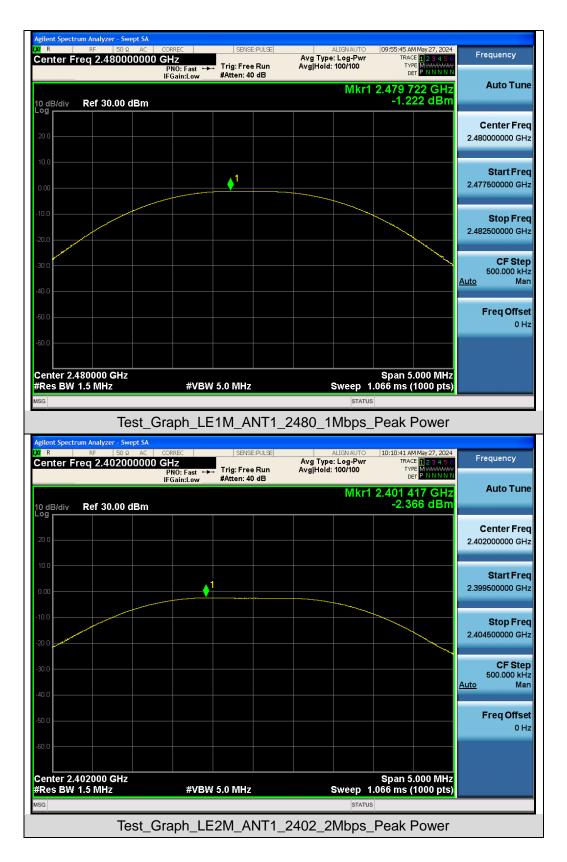



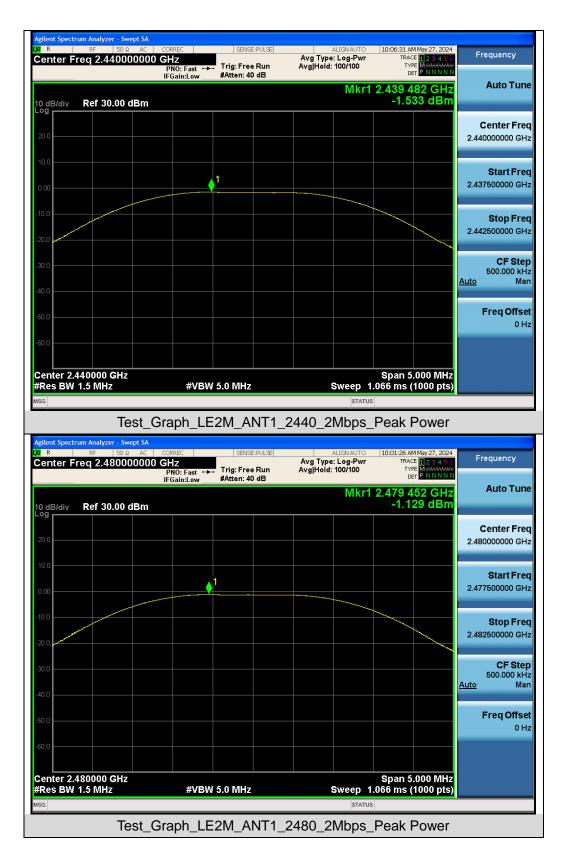



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

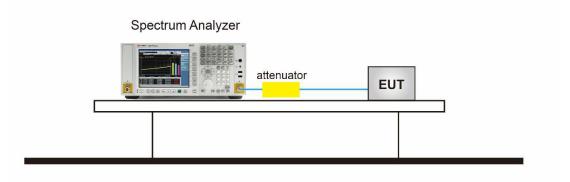




8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth									
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail				
	2402	1.028	0.667	≥0.5	Pass				
GFSK_1Mbps	2440	1.028	0.666	≥0.5	Pass				
	2480	1.028	0.667	≥0.5	Pass				
	2402	2.055	1.169	≥0.5	Pass				
GFSK_2Mbps	2440	2.053	1.165	≥0.5	Pass				
	2480	2.057	1.168	≥0.5	Pass				


Test Graphs of Occupied Bandwidth

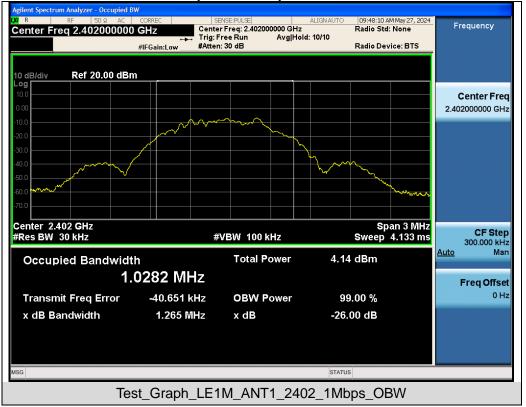







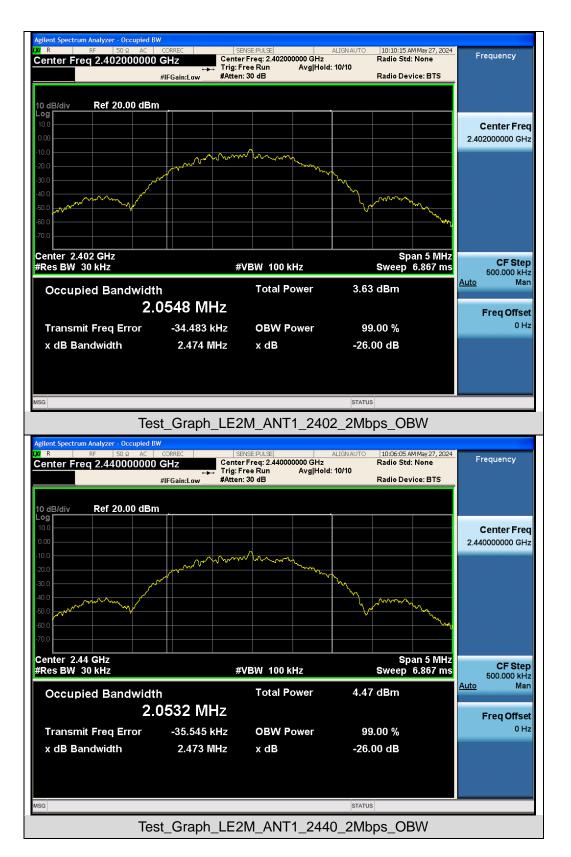











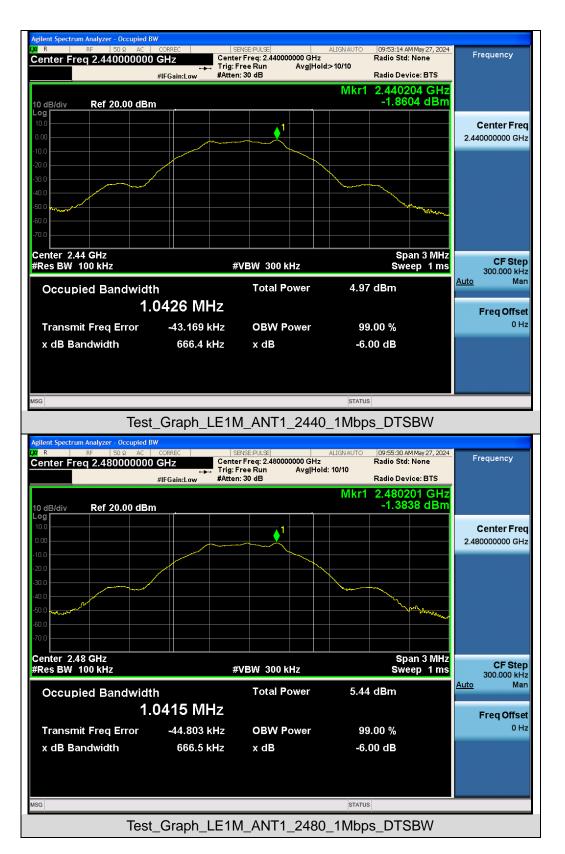







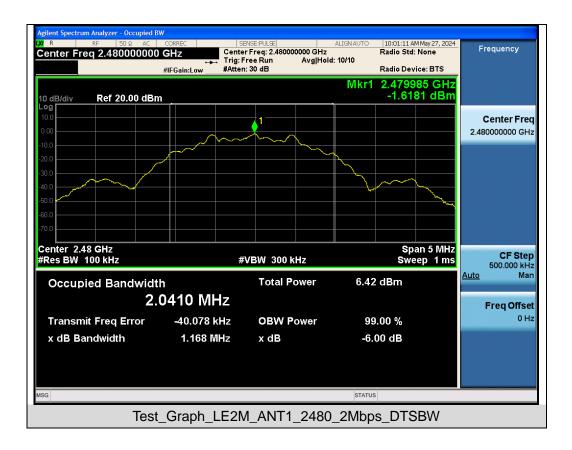



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

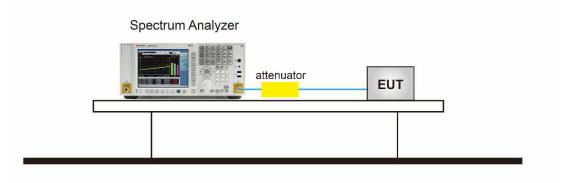



9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Frequency (MHz)			Pass or Fail			
	2402	-18.796	≤8	Pass			
GFSK_1Mbps	2440	-17.815	≤8	Pass			
	2480	-17.307	≤8	Pass			
	2402	-20.965	≤8	Pass			
GFSK_2Mbps	2440	-20.188	≤8	Pass			
	2480	-19.710	≤8	Pass			


Test Graphs of Conducted Output Power Spectral Density









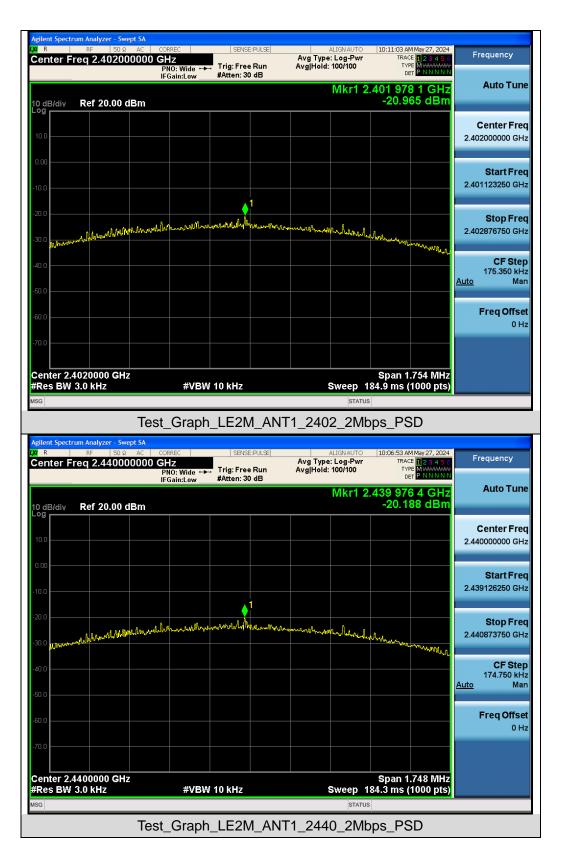



	um Analyzer - Swep									
Center F	RF 50 Ω req 2.480000		(ide ↔ Trig	SENSE:PULSE		ALIGNAUTO :: Log-Pwr 100/100	TRAC	May 27, 2024 E 123456 PE M	Fi	requency
10 dB/div	Ref 20.00 dE	IFGain:		en: 30 dB		Mkr1 2	.479 97			Auto Tune
10.0										Center Freq 0000000 GHz
-10.0				<u> </u>					2.47	Start Freq 9124000 GHz
-20.0 -30.0 <mark>wharenee</mark>	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	lannel hann	en Mariana	ully hone mon	mminnhing	mulaspectra	Martunnamp	WWWWWWWW	2.48	Stop Freq 0876000 GHz
-40.0									<u>Auto</u>	CF Step 175.200 kHz Man
-60.0										Freq Offset 0 Hz
Center 2.4 #Res BW	4800000 GHz 3.0 kHz		#VBW 10 k	Hz		Sweep 1	84.7 ms (.752 MHz 1000 pts)		
MSG		Test G	raph_LE	2M AN	T1 248			D		



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

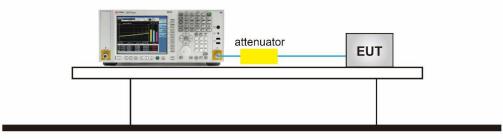




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



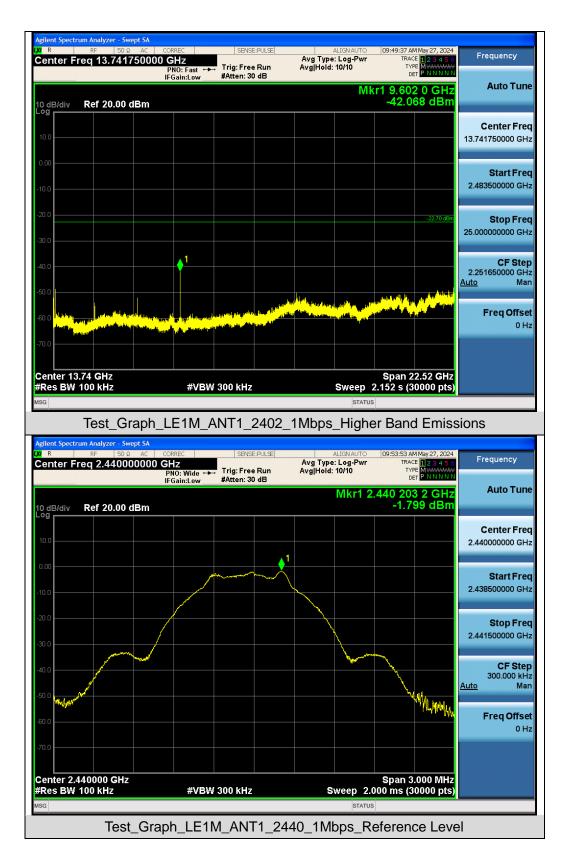




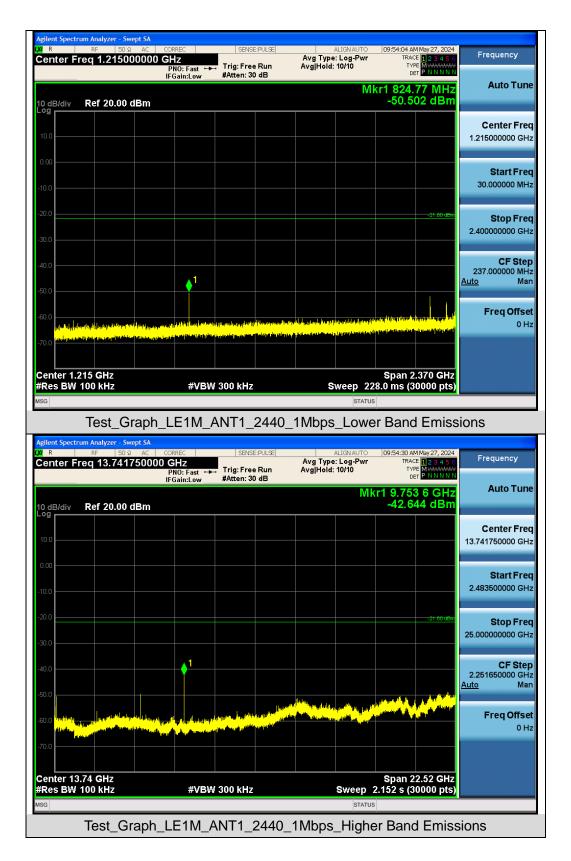








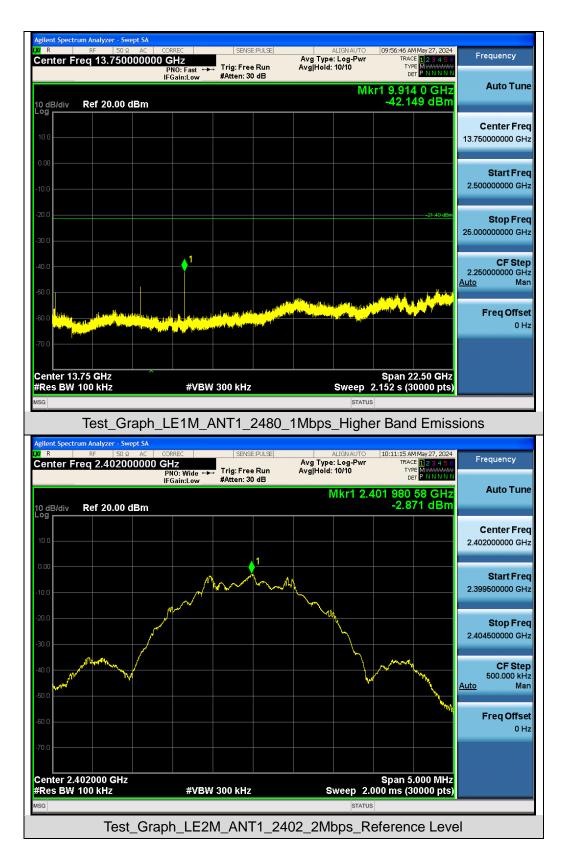




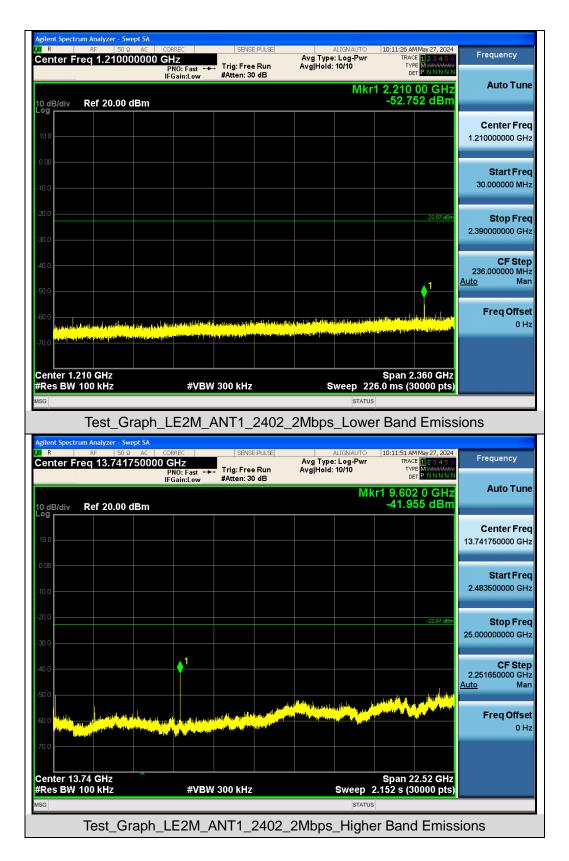









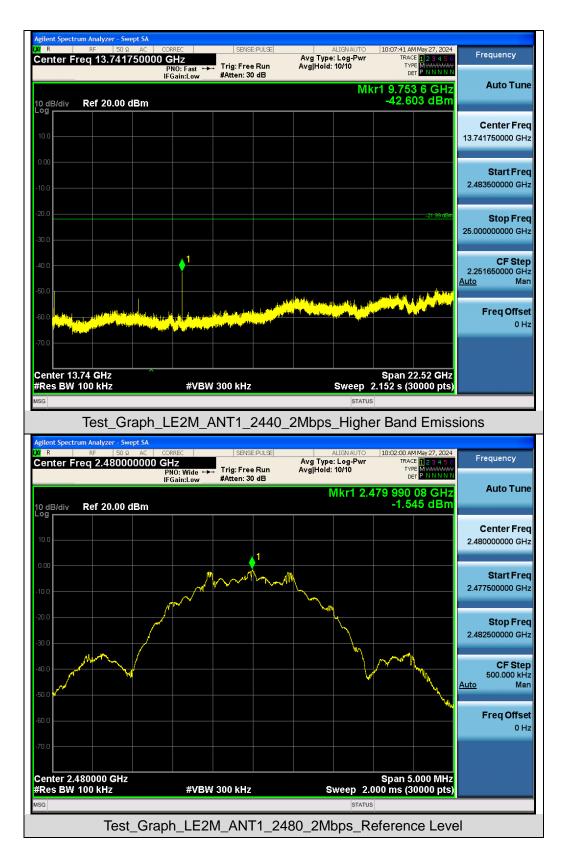



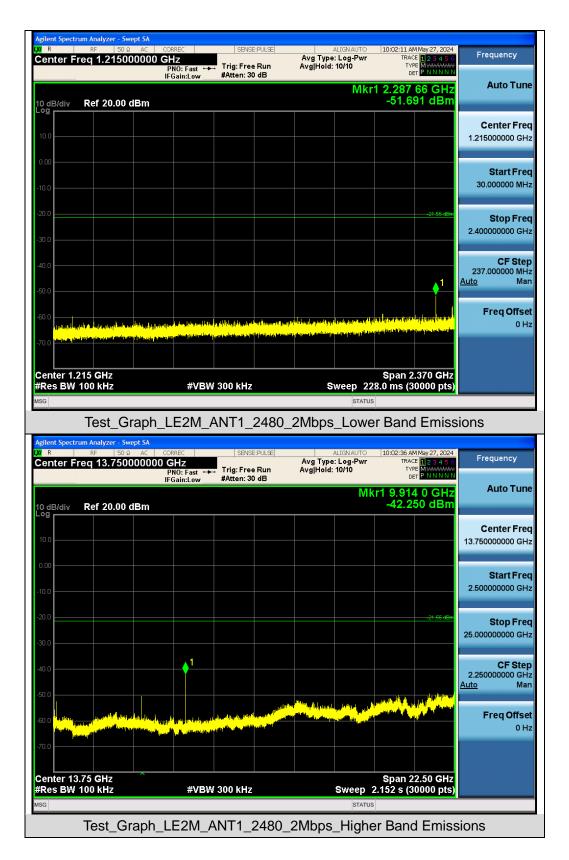



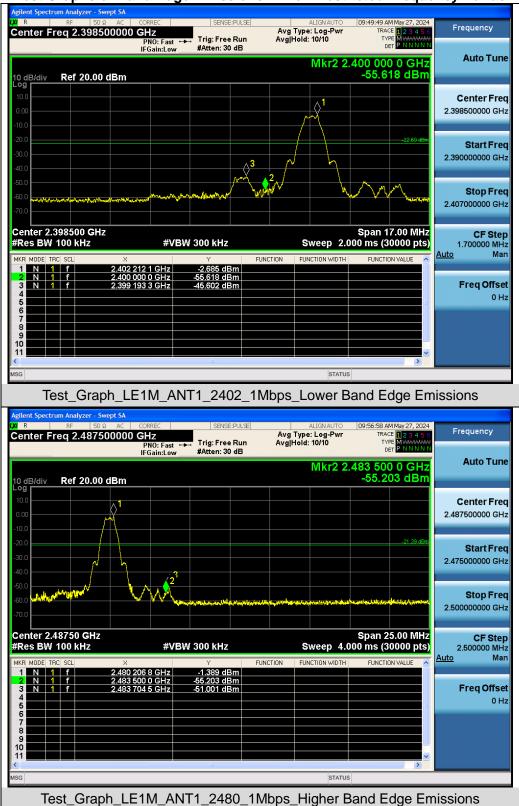

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any rep Ashang alternative by provided ther transmitter aloperates a forrial orgen than on the seconds) e Orbin cases in where is the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



1GHz~26.5GHz

1MHz/3MHz for Peak, 1MHz/3MHz for Average

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

 Spectrum Parameter
 Setting

 Start ~Stop Frequency
 9kHz~150kHz/RB 200Hz for QP

 Start ~Stop Frequency
 150kHz~30MHz/RB 9kHz for QP

 Start ~Stop Frequency
 30MHz~1000MHz/RB 120kHz for QP

The following table is the setting of spectrum analyzer and receiver.

Start ~Stop Frequency

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. the applicable correction factor is [10 log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)




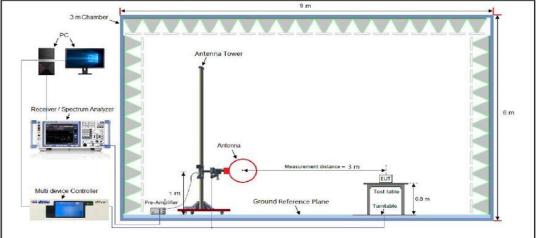

Radiated Emission Test Setup 30MHz-1000MHz

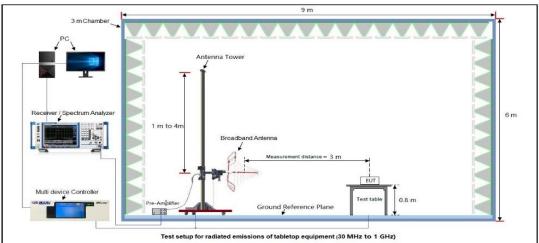

Radiated Emission Test Setup Above 1000MHz

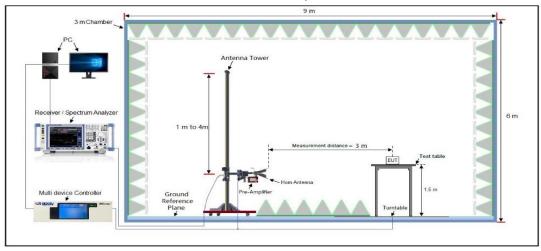

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ted Emiss	ion Test Res	ults at 30MHz	z-1GHz			
	Name		ve Noise Canco dphones	elling Wireless		Model Na	ime	DG-BHPH		
Temp	erature	22.3	°C			Relative H	Relative Humidity		59.5%	
Press	ure	960ł	nPa			Test Volta	Test Voltage Norma			
Test M	lode	Mod	e 6			Antenna	Polarity	Horizonta		
	130				FCC Part 15C					
	120 110									
	110									
	90									
	80									
	E 70									
	[씨/ 70 60 50									
	40						* 4	5	* ⁶	
	30	* ¹	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	m Mu	m. Ammy #	1 Low MA	My Martin Martin Martin	police and a second second	~	
	10	~~-		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		- Amarka marka				
	0									
	-10									
	30M			100M						
					Frequency[Hz]	I			1G	
Final	Data List	— QP Limit QP Detec			Frequency[Hz				16	
	Data List	QP Detec	tor	Factor			Height	Angle		
Final NO.	Frec	QP Detec	Level	Factor [dB]	Limit	Margin	Height [cm]	Angle	Polarity	
		QP Detect	tor	Factor [dB] 12.12			Height [cm] 100			
NO.	Frec [MHz	• QP Detect	Level [dBµV/m]	[dB]	Limit [dBµV/m]	Margin [dB]	[cm]	[°]	Polarity	
NO. 1	Frec [MHz 33.8	QP Detec [. [. Z] [8 31	Level [dBµV/m] 22.29	[dB] 12.12	Limit [dBµV/m] 40.00	Margin [dB] 17.71	[cm] 100	[°] 359	Polarity Horizontal	
NO. 1 2	Frec [MHz 33.8 100.8	QP Detect [. Z] 8 31 99	Level [dBµV/m] 22.29 26.83	[dB] 12.12 17.03	Limit [dBµV/m] 40.00 43.50	Margin [dB] 17.71 16.67	[cm] 100 100	[°] 359 0	Polarity Horizontal Horizontal	
NO. 1 2 3	Frec [MHz 33.8 100.8 191.9	QP Detec [. [. [. [.] [. [.] [. [.] [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [.] [. [. [. [.] [.].].].].].].	Level [dBµV/m] 22.29 26.83 24.97	[dB] 12.12 17.03 11.38	Limit [dBµV/m] 40.00 43.50 43.50	Margin [dB] 17.71 16.67 18.53	[cm] 100 100 100	[°] 359 0 3	Polarity Horizontal Horizontal Horizontal	



			Radia	ted Emiss	ion Test Resu	ilts at 30MH	z-1GHz			
EUT Na	ame		e Noise Canco dphones	elling Wirel	ess	Model Na	ame	DG-BHPH		
Temper	emperature22.3°CRelative Humidity59.5				59.5%	59.5%				
Pressu	re	960h	ıPa			Test Volta	age	Normal Voltage Vertical		
Test Mo	ode	Mod	e 6			Antenna	Polarity			
	130 120 110 90 80 70 60 50 40 30 20 10 0 -10 30M	OP Limit OP Detect	- Vertical PK	100M	FCC Part 15C				16	
Final Da	ata List									
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	

NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	33.88	25.55	12.12	40.00	14.45	100	343	Vertical
2	101.78	31.24	16.98	43.50	12.26	100	343	Vertical
3	240.49	20.36	15.92	46.00	25.64	100	53	Vertical
4	460.68	29.01	24.60	46.00	16.99	100	82	Vertical
5	614.91	30.97	25.36	46.00	15.03	100	107	Vertical
6	886.51	36.47	29.65	46.00	9.53	100	315	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.



UT Name	Active Nois Headphone	se Cancelling	Wireless	Mode	el Name	DG-BHP	Ч
emperature	22.3 ℃			Relat	ive Humidity	59.5%	
ressure	960hPa			Test Voltage		Normal V	/oltage
est Mode	Mode 1			Anter	nna Polarity	Horizont	al
	1						
Frequency	Meter Reading	Factor	Emissio		Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµ∖	,	(dBµV/m)	(dB)	
4804.000	46.87	0.08	46.9		74	-27.05	peak
4804.000	37.41	0.08	37.4		54	-16.51	AVG
7206.000	41.63	2.21	43.8		74	-30.16	peak
7206.000	32.95	2.21	35.1	6	54	-18.84	AVG
Remark:	na Factor + Cabl	aloss Pro	amplifier				
UT Name	Active Nois Headphone	se Cancelling	Wireless	Mode	el Name	DG-BHP	Ч
emperature	22.3 ℃			Relat	ive Humidity	59.5%	
ressure	960hPa			Test V	Voltage	Normal	/oltage
est Mode	Mode 1			Anter	nna Polarity	Vertical	
Frequency	Meter Reading	Factor	Emissio	n Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	(dB)	Value Type
4804.000	46.47	0.08	46.5	55	74	-27.45	peak
	37.71	0.08	37.7	79	54	-16.21	AVG
4804.000	41.45	2.21	43.6	6	74	-30.34	peak
4804.000 7206.000	41.45						11/0
	32.85	2.21	35.0)6	54	-18.94	AVG

RESULT: Pass



EUT Name		Active Nois Headphon	se Cancelling es	g Wireless	Mode	el Name		DG-BH	PH
Temperature		22.3 ℃			Rela	tive Humid	ity	59.5%	
Pressure		960hPa			Test Voltage			Normal	Voltage
Test Mode		Mode 2			Ante	nna Polarit	y	Horizor	ntal
Frequency	M	eter Reading	Factor	Emissior	n Level	Limits		Margin	Value Type
(MHz)		(dBµV)	(dB) (dBµV		//m)	(dBµV/m)		(dB)	value Type
4880.000		45.32	0.14	45.4	-6	74		-28.54	peak
4880.000		38.41	0.14	38.5	5	54		-15.45	AVG
7320.000		41.69	2.36	44.0	5	74		-29.95	peak
7320.000		33.52	2.36	35.8	8	54		-18.12	AVG
Remark:									
Factor = Ante	nna F	actor + Cab	le Loss – Pre	e-amplifier.					
								-	
EUT Name		Active Nois Headphon	se Cancellino es	g Wireless	Mode	el Name		DG-BH	PH
Temperature		22.3 ℃			Rela	tive Humid	ity	59.5%	
Pressure		960hPa	3		Test	Voltage		Normal	Voltage
Test Mode		Mode 2			Ante	nna Polarit	y	Vertical	
		During				1.1			
Frequency		r Reading	Factor	Emission Le		Limits		argin	Value Type
(MHz)		dBµV)	(dB)	(dBµV/m))	(dBµV/m)	```	dB)	pook
4880.000		45.65	0.14	45.79		74		8.21	peak AVG
4880.000		37.28	0.14	37.42		54		6.58	_
7320.000		40.41	2.36	42.77		74		1.23	peak AVG
7320.000		33.17	2.36	35.53		54	-1	8.47	AVG
Remark:									
	a Fac	tor + Cable	Loss – Pre-a	mplifier					
$ a \cup - A \cup = =$									

RESULT: Pass



EUT Name		Active Noise Headphone	e Cancelling V s	Vireless	Mode	I Name	DG-BHPI	Н
Temperature		22.3 ℃			Relati	ve Humidity	59.5%	
Pressure		960hPa			Test Voltage		Normal V	'oltage
Test Mode		Mode 3			Anten	na Polarity	Horizonta	al
Frequency	Ν	Meter Reading	Factor	Emissio	Emission Level Limits		Margin	Value Type
(MHz)		(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	value Type
4960.000		46.32	0.22	46	.54	74	-27.46	peak
4960.000		38.45	0.22	38	.67	54	-15.33	AVG
7440.000		41.21	2.64	43	.85	74	-30.15	peak
7440.000		32.58	2.64	35	.22	54	-18.78	AVG
Remark:								
Factor = Anter	nna	Factor + Cabl	le Loss – Pre-a	amplifier.				
EUT Name			e Cancelling V	Vireless	Mode	I Name	DG-BHPI	Н
		Headphone	-		Relative Humidity		59.5%	
Temperature		22.3℃	-		Relati	ve Humidity	59.5%	
Temperature Pressure						ve Humidity /oltage	59.5% Normal V	'oltage
•		22.3°C			Test V			oltage
Pressure Test Mode		22.3℃ 960hPa Mode 3			Test V Anten	/oltage ina Polarity	Normal V Vertical	′oltage
Pressure Test Mode Frequency		22.3℃ 960hPa Mode 3	Factor	Emissio	Test V Anten	Voltage Ina Polarity	Normal V Vertical	'oltage Value Type
Pressure Test Mode Frequency (MHz)		22.3℃ 960hPa Mode 3 Meter Reading (dBµV)	Factor (dB)	(dBµ	Test V Anten on Level	/oltage na Polarity Limits (dBµV/m)	Normal V Vertical Margin (dB)	- Value Type
Pressure Test Mode Frequency (MHz) 4960.000		22.3℃ 960hPa Mode 3 Meter Reading (dBµV) 46.44	Factor (dB) 0.22	(dBµ 46	Test V Anten on Level	Voltage na Polarity Limits (dBµV/m) 74	Normal V Vertical Margin (dB) -27.34	- Value Type peak
Pressure Test Mode Frequency (MHz) 4960.000 4960.000		22.3℃ 960hPa Mode 3 Meter Reading (dBµV) 46.44 38.76	Factor (dB) 0.22 0.22	(dBµ 46 38	Test V Anten Dn Level IV/m) .66 .98	/oltage ma Polarity Limits (dBµV/m) 74 54	Normal V Vertical Margin (dB) -27.34 -15.02	- Value Type peak AVG
Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000		22.3℃ 960hPa Mode 3 Meter Reading (dBµV) 46.44 38.76 41.23	Factor (dB) 0.22 0.22 2.64	(dBµ 46 38 43	Test V Anten on Level V/m) .66 .98 .87	Voltage Ina Polarity Limits (dBµV/m) 74 54 74	Normal V Vertical Margin (dB) -27.34 -15.02 -30.13	Value Type peak AVG peak
Pressure Test Mode Frequency (MHz) 4960.000 4960.000		22.3℃ 960hPa Mode 3 Meter Reading (dBµV) 46.44 38.76	Factor (dB) 0.22 0.22	(dBµ 46 38 43	Test V Anten Dn Level IV/m) .66 .98	/oltage ma Polarity Limits (dBµV/m) 74 54	Normal V Vertical Margin (dB) -27.34 -15.02	- Value Type peak AVG
Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000		22.3℃ 960hPa Mode 3 Meter Reading (dBµV) 46.44 38.76 41.23	Factor (dB) 0.22 0.22 2.64	(dBµ 46 38 43	Test V Anten on Level V/m) .66 .98 .87	Voltage na Polarity Limits (dBµV/m) 74 54 74	Normal V Vertical Margin (dB) -27.34 -15.02 -30.13	Value Type peak AVG peak
Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000		22.3℃ 960hPa Mode 3 Meter Reading (dBµV) 46.44 38.76 41.23	Factor (dB) 0.22 0.22 2.64	(dBµ 46 38 43	Test V Anten on Level V/m) .66 .98 .87	Voltage na Polarity Limits (dBµV/m) 74 54 74	Normal V Vertical Margin (dB) -27.34 -15.02 -30.13	Value Type peak AVG peak

RESULT: Pass



EUT Name		Active Noise Cancelling Wireles Headphones			Model Name		DG-BHPH	
Temperature	22.3 ℃	22.3 ℃			Relative Humidity			
Pressure	960hPa	960hPa			Test Voltage		/oltage	
Test Mode	Mode 4			Anter	nna Polarity	Horizont	al	
Frequency	Meter Reading	Factor			Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	value Type	
4804.000	46.69	0.08	46.7	77	74	-27.23	peak	
4804.000	37.32	0.08	37.		54	-16.6	AVG	
7206.000	42.54	2.21	44.7		74	-29.25	peak	
7206.000	32.18	2.21	34.3	39	54	-19.61	AVG	
Remark:					11			
Factor = Anter	nna Factor + Cab	le Loss – Pre-	amplifier.					
EUT Name	Active Nois Headphone	se Cancelling		Mode	el Name	DG-BHP	ΡH	
EUT Name Femperature		se Cancelling			el Name ive Humidity	DG-BHP 59.5%	ΡH	
	Headphone	se Cancelling		Relat				
Temperature	Headphone 22.3℃	se Cancelling		Relat Test	ive Humidity	59.5%		
Temperature Pressure Test Mode	Headphone 22.3℃ 960hPa Mode 1	se Cancelling	Wireless	Relat Test Anter	ive Humidity Voltage nna Polarity	59.5% Normal Vertical		
Temperature Pressure Test Mode Frequency	Headphone 22.3°C 960hPa Mode 1 Meter Reading	se Cancelling es Factor	Emissio	Relat	ive Humidity Voltage nna Polarity Limits	59.5% Normal Vertical Margin		
Temperature Pressure Test Mode Frequency (MHz)	Headphone 22.3℃ 960hPa Mode 1 Meter Reading (dBµV)	Se Cancelling Se Cancelling Factor (dB)	Emissio	Relat Test Anter n Level //m)	ive Humidity Voltage nna Polarity Limits (dBµV/m)	59.5% Normal V Vertical Margin (dB)	Voltage Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4804.000	Headphone 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.47	Se Cancelling ES Factor (dB) 0.08	Emissio (dBµ\ 46.5	Relat Test Anter n Level //m)	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	59.5% Normal V Vertical Margin (dB) -27.45	Voltage Value Type	
Temperature Pressure Test Mode Frequency (MHz)	Headphone 22.3℃ 960hPa Mode 1 Meter Reading (dBµV)	Se Cancelling Se Cancelling Factor (dB)	Emissio	Relat Test Anter n Level //m)	ive Humidity Voltage nna Polarity Limits (dBµV/m)	59.5% Normal V Vertical Margin (dB)	Voltage Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4804.000	Headphone 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.47	Se Cancelling ES Factor (dB) 0.08	Emissio (dBµ\ 46.5	Relat Test Anter n Level //m) 55 66	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	59.5% Normal V Vertical Margin (dB) -27.45	Voltage Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Headphone 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.47 37.58	Factor (dB) 0.08 0.08	Emissio (dBµ\ 46.5	Relat Test Anter n Level //m) 55 66 62	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	59.5% Normal V Vertical Margin (dB) -27.45 -16.34	Voltage Value Type peak AVG	
Femperature Pressure Fest Mode Frequency (MHz) 4804.000 4804.000 7206.000	Headphone 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.47 37.58 41.41	Factor (dB) 0.08 2.21	Emissio (dBµ\ 46. 37. 43.	Relat Test Anter n Level //m) 55 66 62	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	59.5% Normal V Vertical Margin (dB) -27.45 -16.34 -30.38	Voltage Value Type peak AVG peak	
Feessure Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Headphone 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.47 37.58 41.41	Factor (dB) 0.08 2.21	Emissio (dBµ\ 46. 37. 43.	Relat Test Anter n Level //m) 55 66 62	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	59.5% Normal V Vertical Margin (dB) -27.45 -16.34 -30.38	Voltage Value Type peak AVG peak	
Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000 7206.000 Remark:	Headphone 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.47 37.58 41.41	Factor (dB) 0.08 0.08 2.21 2.21	Emissio (dBµ\ 46.5 37.6 43.6 34.8	Relat Test Anter n Level //m) 55 66 62	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	59.5% Normal V Vertical Margin (dB) -27.45 -16.34 -30.38	Voltage Value Type peak AVG peak	

RESULT: Pass



EUT Name		Active Nois Headphone	se Cancelling es	g Wireless	Mode	el Name		DG-BH	IPH
Temperature	emperature 22		22.3 °C			tive Humidi	ty	59.5%	
Pressure		960hPa			Test Voltage			Norma	l Voltage
Test Mode		Mode 5			Antenna Polarity		у	Horizo	ntal
Frequency	M	eter Reading	Factor	Emissio	n Level	Limits		Margin	Value Type
(MHz)		(dBµV)	(dB) (dBµV		//m)	(dBµV/m)		(dB)	value Type
4880.000		45.52	0.14	45.6	6	74		-28.34	peak
4880.000		38.41	0.14	38.5	55	54		-15.45	AVG
7320.000		42.36	2.36	44.7	2	74		-29.28	peak
7320.000		33.46	2.36	35.8	32	54		-18.18	AVG
Remark:									
Factor = Ante	nna F	actor + Cab	le Loss – Pre	-amplifier.					
EUT Name		Active Nois Headphon	se Cancelling es	g Wireless	Mode	el Name		DG-BH	IPH
Temperature		22.3 ℃			Relat	tive Humidi	ty	59.5%	
Pressure	essure 960hPa		 2		Test	Voltage		Norma	l Voltage
Test Mode		Mode 2			Ante	nna Polarit	у	Vertica	l
Frequency	Moto	r Reading	Factor	Emission L	aval	Limits	ΝΛ-	argin	
(MHz)		dBµV)	(dB)	(dBµV/m		(dBµV/m)		dB)	Value Type
4880.000	-	45.59	0.14	45.73	/	(αδμν/π) 74		8.27	peak
4880.000		45.59 37.48	0.14	37.62		54		6.38	AVG
7320.000		41.25	2.36	43.61		74		0.39	peak
1020.000		32.46	2.36	34.82		54		9.18	AVG
7320 000			2.00	04.02		JT	-1	0.10	/
7320.000									
7320.000 Remark: Factor = Antenn				mplifier					

RESULT: Pass



EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.47	0.22	46.69	74	-27.31	peak
4960.000	38.85	0.22	39.07	54	-14.93	AVG
7440.000	41.51	2.64	44.15	74	-29.85	peak
7440.000	32.46	2.64	35.1	54	-18.9	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

BμV) (dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
			(ub)	
6.23 0.22	46.45	74	-27.55	peak
8.51 0.22	38.73	54	-15.27	AVG
1.42 2.64	44.06	74	-29.94	peak
2.85 2.64	35.49	54	-18.51	AVG
	8.51 0.22 1.42 2.64	8.51 0.22 38.73 1.42 2.64 44.06	8.51 0.22 38.73 54 1.42 2.64 44.06 74	8.51 0.22 38.73 54 -15.27 1.42 2.64 44.06 74 -29.94

RESULT: Pass


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

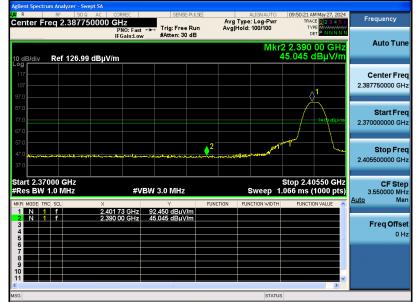

Test Graph for Average Measurement

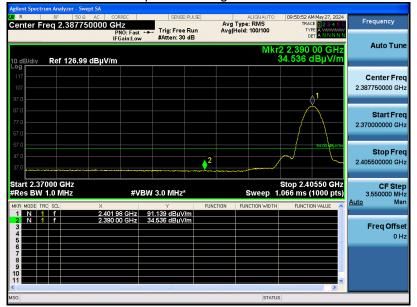


RESULT: Pass



EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

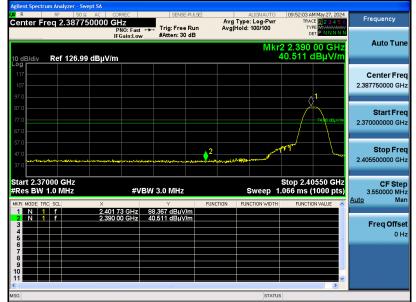

Test Graph for Average Measurement




RESULT: Pass




	-		
EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

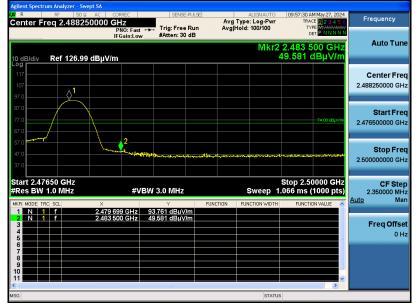

Test Graph for Average Measurement

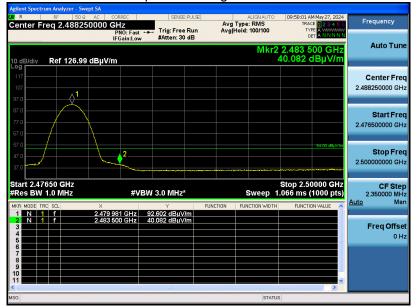


RESULT: Pass



EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

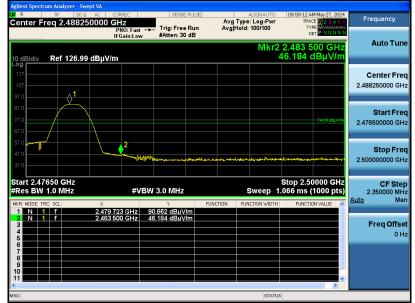

Test Graph for Average Measurement




RESULT: Pass




EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

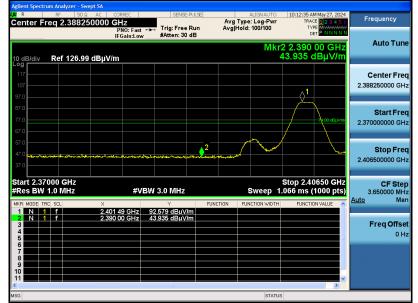

Test Graph for Average Measurement

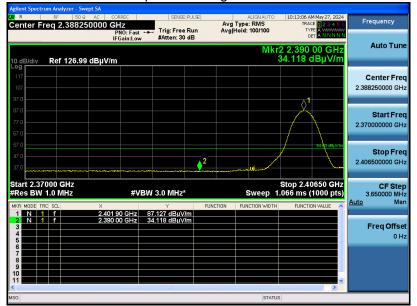


RESULT: Pass




EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

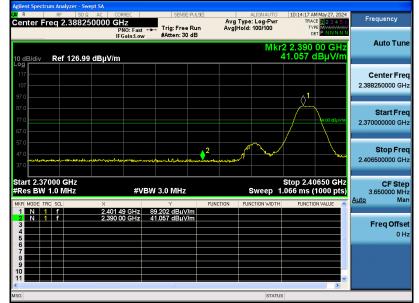

Test Graph for Average Measurement

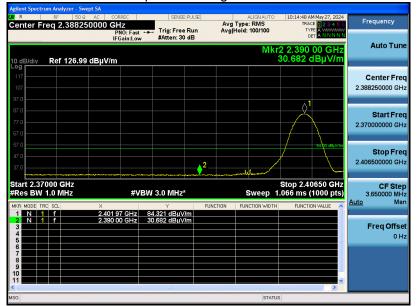


RESULT: Pass




EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

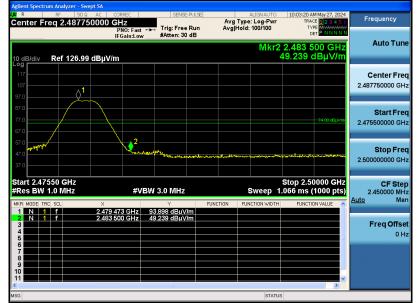

Test Graph for Average Measurement

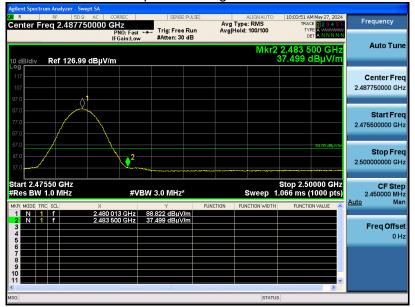


RESULT: Pass




EUT Name	Active Noise Cancelling Wireless Headphones	Model Name	DG-BHPH
Temperature	22.3 ℃	Relative Humidity	59.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

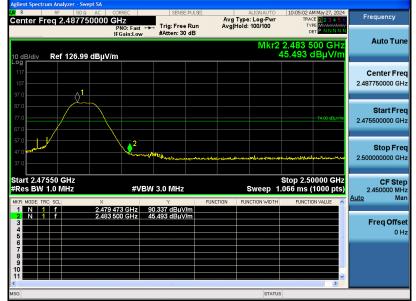

Test Graph for Average Measurement

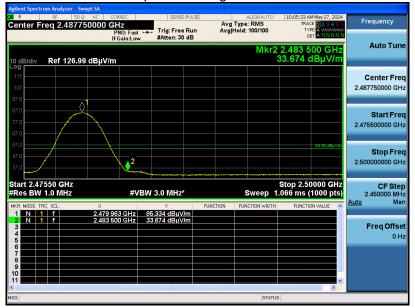

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Francisco	Maximum RF	Line Voltage
Frequency	Q.P. (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

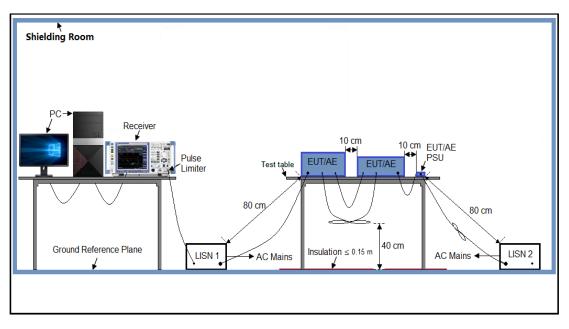



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results



de	Mode 1				LISN Line		Hot Side	`
de	wode i					;	HOT SIDE	3
80	evel [dBµV]							
70			 					¦
60			· · · · · · ·	, , ,	·			<u>i</u>
50				!				
40								
30				İ				i il
20	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	munnhente	a avere and a second	The second s				
10		minint		X			X	
0			 					
-10				i				
	150k 300k 400	0k 600k 80	Ok 1M	2M		6M 8M 10M	2	20M 30M
				Frequency [H	2]			
XXX	MES agc_fin							
		DECIT	: "agc	fin				
			. auc	<i>T T H</i>				
М	EASUREMENT	102021	·	•				
	24/5/25 16:							
		24	Transd		Margin	Detector	Line	PE
	024/5/25 16:	24			Margin dB	Detector	Line	PE
)24/5/25 16: Frequency MHz	24 Level dBµV	Transd dB	Limit dBµV	dB			
	024/5/25 16: Frequency MHz 0.250000	24 Level dBµV 21.40	Transd dB 6.1	Limit dBµV 62	dB 40.4	QP	L1	GND
	024/5/25 16: Frequency MHz 0.250000 0.794000	24 Level dBµV 21.40 20.30	Transd dB 6.1 6.2	Limit dBµV 62 56	dB 40.4 35.7	QP QP	L1 L1	GND GND
	024/5/25 16: Frequency MHz 0.250000	24 Level dBµV 21.40	Transd dB 6.1	Limit dBµV 62	dB 40.4	QP	L1	GND
	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000	24 Level dBµV 21.40 20.30 21.00	Transd dB 6.1 6.2 6.2	Limit dBµV 62 56 56	dB 40.4 35.7 35.0	QP QP QP	L1 L1 L1	GND GND GND
	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000	24 Level dBµV 21.40 20.30 21.00 13.30	Transd dB 6.1 6.2 6.2 6.3	Limit dBµV 62 56 56 56	dB 40.4 35.7 35.0 42.7	QP QP QP QP	L1 L1 L1 L1	GND GND GND GND
	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80	Transd dB 6.1 6.2 6.2 6.3 6.3	Limit dBµV 62 56 56 56 56	dB 40.4 35.7 35.0 42.7 46.2	QP QP QP QP QP	L1 L1 L1 L1 L1	GND GND GND GND GND
20	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90	Transd dB 6.1 6.2 6.2 6.3 6.3 6.8	Limit dBµV 62 56 56 56 60	dB 40.4 35.7 35.0 42.7 46.2	QP QP QP QP QP	L1 L1 L1 L1 L1	GND GND GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT	Transd dB 6.1 6.2 6.2 6.3 6.3 6.8	Limit dBµV 62 56 56 56 60	dB 40.4 35.7 35.0 42.7 46.2	QP QP QP QP QP	L1 L1 L1 L1 L1	GND GND GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT	24 Level dBμV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_	Limit dBµV 62 56 56 56 60 fin2 "	dB 40.4 35.7 35.0 42.7 46.2 43.1	QP QP QP QP QP	L1 L1 L1 L1 L1 L1	GND GND GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16:	24 Level dBμV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_	Limit dBµV 62 56 56 56 60 fin2 "	dB 40.4 35.7 35.0 42.7 46.2 43.1	QP QP QP QP QP	L1 L1 L1 L1 L1 L1	GND GND GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16: Frequency MHz	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24 Level dBµV	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB	Limit dBµV 62 56 56 56 60 fin2" Limit dBµV	dB 40.4 35.7 35.0 42.7 46.2 43.1 Margin dB	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1	GND GND GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16: Frequency MHz 0.358000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24 Level dBµV 16.30	Transd dB 6.1 6.2 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB 6.1	Limit dBµV 62 56 56 56 60 fin2" Limit dBµV 49	dB 40.4 35.7 35.0 42.7 46.2 43.1 Margin dB 32.5	QP QP QP QP QP Detector	L1 L1 L1 L1 L1 L1 L1	GND GND GND GND GND PE GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16: Frequency MHz 0.358000 0.778000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24 Level dBµV 16.30 19.10	Transd dB 6.1 6.2 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2	Limit dBµV 62 56 56 56 60 fin2" Limit dBµV 49 46	dB 40.4 35.7 35.0 42.7 46.2 43.1 Margin dB 32.5 26.9	QP QP QP QP QP QP AV	L1 L1 L1 L1 L1 L1 L1 L1 L1	GND GND GND GND GND PE GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16: Frequency MHz 0.358000 0.778000 1.390000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24 Level dBµV 16.30 19.10 14.90	Transd dB 6.1 6.2 6.2 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2 6.2	Limit dBµV 62 56 56 56 60 fin2" Limit dBµV 49 46 46	dB 40.4 35.7 35.0 42.7 46.2 43.1 Margin dB 32.5 26.9 31.1	QP QP QP QP QP QP AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1	GND GND GND GND GND PE GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16: Frequency MHz 0.358000 0.778000 1.390000 2.202000	24 Level dBμV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24 Level dBμV 16.30 19.10 14.90 10.60	Transd dB 6.1 6.2 6.2 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2 6.2 6.2 6.3	Limit dBµV 62 56 56 56 60 fin2" Limit dBµV 49 46 46 46	dB 40.4 35.7 35.0 42.7 46.2 43.1 Margin dB 32.5 26.9 31.1 35.4	QP QP QP QP QP QP AV AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1 L1	GND GND GND GND GND GND GND GND GND GND
20 M	024/5/25 16: Frequency MHz 0.250000 0.794000 1.234000 2.566000 4.426000 12.530000 EASUREMENT 024/5/25 16: Frequency MHz 0.358000 0.778000 1.390000	24 Level dBµV 21.40 20.30 21.00 13.30 9.80 16.90 RESULT 24 Level dBµV 16.30 19.10 14.90	Transd dB 6.1 6.2 6.2 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2 6.2	Limit dBµV 62 56 56 56 60 fin2" Limit dBµV 49 46 46	dB 40.4 35.7 35.0 42.7 46.2 43.1 Margin dB 32.5 26.9 31.1	QP QP QP QP QP QP AV AV AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1	GND GND GND GND GND PE GND GND GND



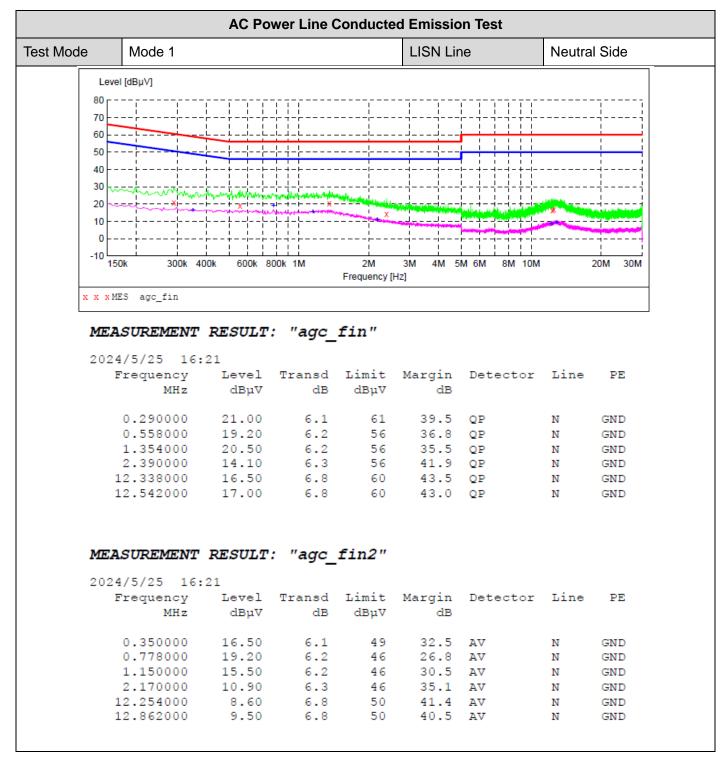

RESULT: PASS



Report No.: AGC15705240544FR01 Page 70 of 70

Appendix I: Photographs of Test Setup Refer to the Report No.: AGC15705240544AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC15705240544AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.