



# RF TEST REPORT



Report No.: Q191022S004-FCC-R

Supersede Report No.: N/A

Applicant	Medtrum Technologies Inc.		
Product Name	Transmitter		
Model No.	MD1026		
Serial No.	N/A		
Test Standard	FCC Part 15.247, ANSI C63.10: 2013		
Test Date	Nov. 20 to Dec. 26, 2019		
Issue Date	Feb. 18, 2020		
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Equipment complied with the specification	<input checked="" type="checkbox"/>		
Equipment did not comply with the specification	<input type="checkbox"/>		
			
Aaron Liang Test Engineer		David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only			

Issued by:

**BUREAU VERITAS (SHENZHEN) CONSUMER PRODUCTS SERVICE CO., LTD**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	Q191022S004-FCC-R
Page	3 of 33

This page has been left blank intentionally.

# CONTENTS

<b>1. REPORT REVISION HISTORY .....</b>	<b>5</b>
<b>2. CUSTOMER INFORMATION .....</b>	<b>5</b>
<b>3. TEST SITE INFORMATION.....</b>	<b>6</b>
<b>4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....</b>	<b>7</b>
<b>5. TEST SUMMARY .....</b>	<b>8</b>
<b>6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....</b>	<b>9</b>
6.1 ANTENNA REQUIREMENT .....	9
6.2 DTS (6 DB) CHANNEL BANDWIDTH.....	10
6.3 MAXIMUM OUTPUT POWER.....	12
6.4 POWER SPECTRAL DENSITY.....	14
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS.....	16
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	19
6.7 RADIATED EMISSIONS & RESTRICTED BAND.....	21
<b>ANNEX A. TEST INSTRUMENT .....</b>	<b>28</b>
<b>ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>	<b>30</b>
<b>ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF SIMILARITY.....</b>	<b>33</b>

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
Q191022S004-FCC-R	NONE	Original	Feb. 18, 2020

## 2. Customer information

Applicant Name	Medtrum Technologies Inc.
Applicant Add	7F , Building 8, No.200 Niudun Road, Shanghai 201203, China
Manufacturer	Medtrum Technologies Inc.
Manufacturer Add	7F , Building 8, No.200 Niudun Road, Shanghai 201203, China

### 3. Test site information

Test Lab A:

Lab performing tests	BUREAU VERITAS (SHENZHEN) CONSUMER PRODUCTS SERVICE CO., LTD
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	EZ-EMC(ver.lcp-03A1)

Test Lab B:

Lab performing tests	Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch Laboratories
Lab Address	No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China
FCC Test Site No.	749762
IC Test Site No.	5936A-1
Test Software	ADT_Radiated_V7.6.15.9.2

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

## 4. Equipment under Test (EUT) Information

Description of EUT:	Transmitter
Main Model:	MD1026
Serial Model:	N/A
Date EUT received:	Nov. 19, 2019
Test Date(s):	Nov. 20 to Dec. 26, 2019
Equipment Category :	DTS
Antenna Gain:	BLE: 1.6dBi
Antenna Type:	Ceramic antenna
Type of Modulation:	BLE: GFSK
RF Operating Frequency (ies):	BLE: 2402-2480 MHz
Max. Output Power:	3.02dBm
Number of Channels:	BLE: 40CH
Port:	Please refer to user's manual
Trade Name :	Medtrum
Input Power:	Battery: 3.7V
FCC ID:	2AARU-MD1026

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	N/A
§15.205, §15.209, §15.247(d)	Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band-Edge & Unwanted Emissions into Restricted Frequency Bands and Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 1 antenna:


A permanently attached Ceramic antenna for BLE, the gain is 1.6dBi for BLE.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 DTS (6 dB) Channel Bandwidth

Temperature	22°C
Relative Humidity	56%
Atmospheric Pressure	1018mbar
Test date :	Dec. 16, 2019
Tested By :	Aaron Liang

Spec	Item	Requirement	Applicable
§ 15.247(a)(2)	a)	6dB BW ≥ 500kHz;	<input checked="" type="checkbox"/>
RSS Gen(4.6.1)	b)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v05r02, 8.1 DTS bandwidth <u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW = 100 kHz.</li> <li>- Set the video bandwidth (VBW) ≥ 3 RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> </ul> <p>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A


Test Plot     Yes (See below)                       N/A

## 6dB Bandwidth measurement result

### Test Data

CH	Frequency (MHz)	6dB Bandwidth (kHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
Low	2402	0.672	0.5	PASS
Mid	2440	0.668	0.5	PASS
High	2480	0.644	0.5	PASS

### Test Plots

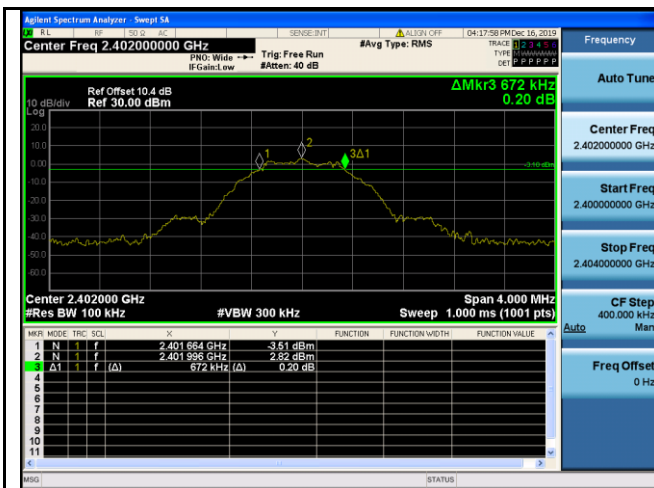

6dB Bandwidth - Low CH 2402



6dB Bandwidth - Mid CH 2440




6dB Bandwidth - High CH 2480

### 6.3 Maximum Output Power

Temperature	22°C
Relative Humidity	56%
Atmospheric Pressure	1018mbar
Test date :	Dec. 16, 2019
Tested By :	Aaron Liang

**Requirement(s):**

Spec	Item	Requirement	Applicable
§15.247(b) (3),RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $<50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq 1$ Watt	<input checked="" type="checkbox"/>

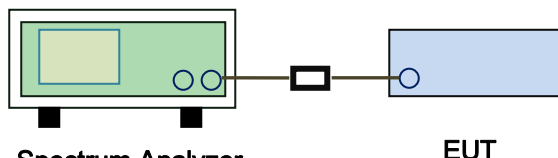Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
------------	--

Test Procedure	<p>558074 D01 DTS MEAS Guidance v05r02, 9.1.2 Integrated band power method Maximum output power measurement procedure</p> <ol style="list-style-type: none"> <li>Set the RBW <math>\geq</math> DTS bandwidth.</li> <li>Set VBW <math>\geq 3 \times</math> RBW.</li> <li>Set span <math>\geq 3 \times</math> RBW</li> <li>Sweep time = auto couple.</li> <li>Detector = peak.</li> <li>Trace mode = max hold.</li> <li>Allow trace to fully stabilize.</li> <li>Use peak marker function to determine the peak amplitude level.</li> </ol>
----------------	---

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data  Yes  N/A  
 Test Plot  Yes (See below)  N/A

### Output Power measurement result


#### Test Data

CH	Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (W)	Average Power (dBm)	Result
Low	2402	3.00	2.00	1	3.00	Pass
Mid	2440	2.42	1.75	1	2.42	Pass
High	2480	1.46	1.40	1	1.15	Pass


#### Test Plots

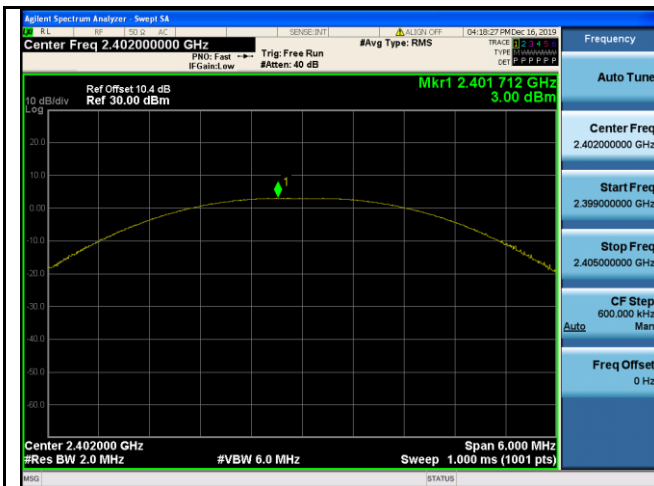

PK Output power - Low CH 2402

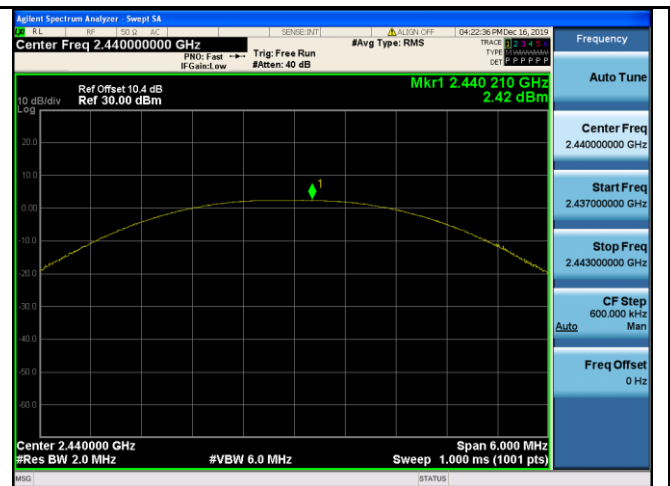


PK Output power - Mid CH 2440

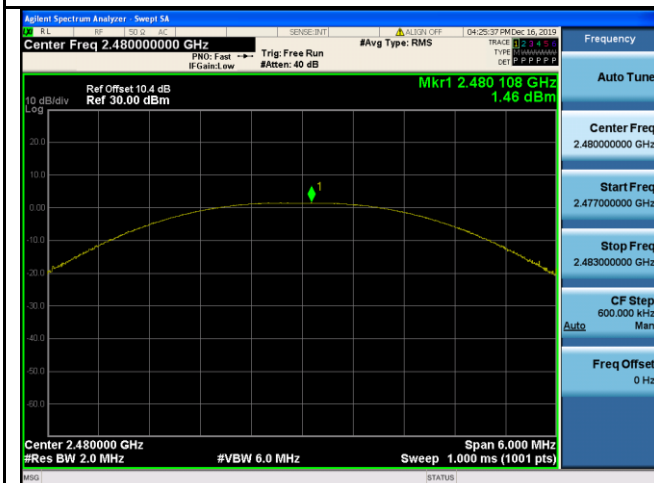

PK Output power - High CH 2480

## 6.4 Power Spectral Density

Temperature	22°C
Relative Humidity	56%
Atmospheric Pressure	1018mbar
Test date :	Dec. 16, 2019
Tested By :	Aaron Liang

Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v05r02, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set analyzer center frequency to DTS channel center frequency.</li> <li>- b) Set the span to 1.5 times the DTS bandwidth.</li> <li>- c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- e) Detector = peak.</li> <li>- f) Sweep time = auto couple.</li> <li>- g) Trace mode = max hold.</li> <li>- h) Allow trace to fully stabilize.</li> <li>- i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data     Yes                       N/A  
 Test Plot     Yes (See below)                       N/A

### Power Spectral Density measurement result


#### Test Data

Type	CH	Freq (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
PSD	Low	2402	-9.813	8	Pass
	Mid	2440	-10.627	8	Pass
	High	2480	-11.489	8	Pass


#### Test Plots

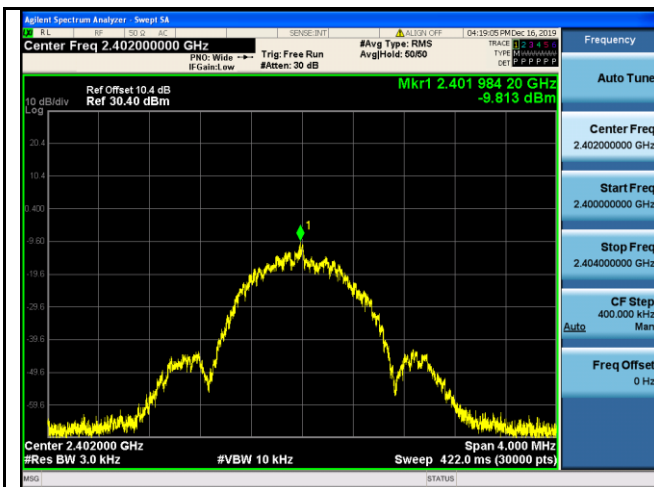

PSD - Low CH 2402

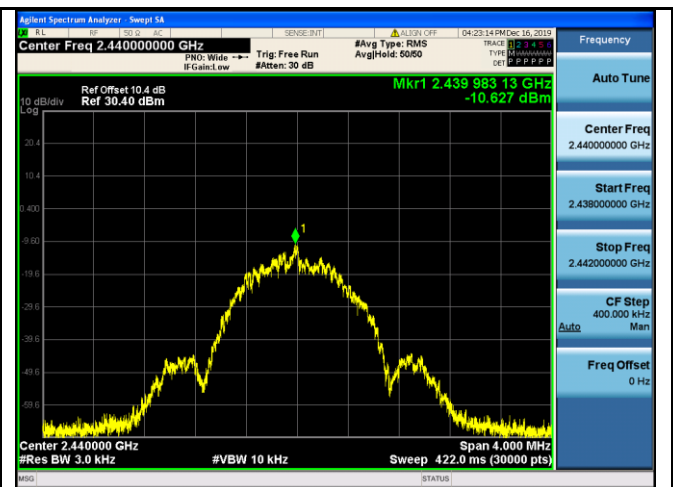

PSD - Mid CH 2440

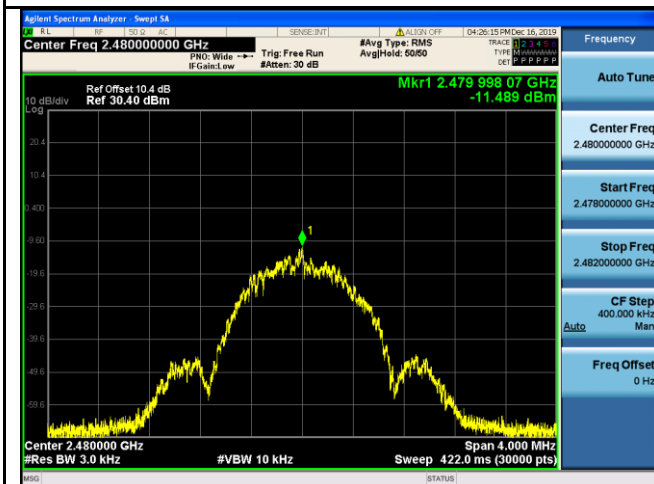


PSD - High CH 2480

## 6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1021mbar
Test date :	Dec. 24, 2019
Tested By :	Aaron Liang

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

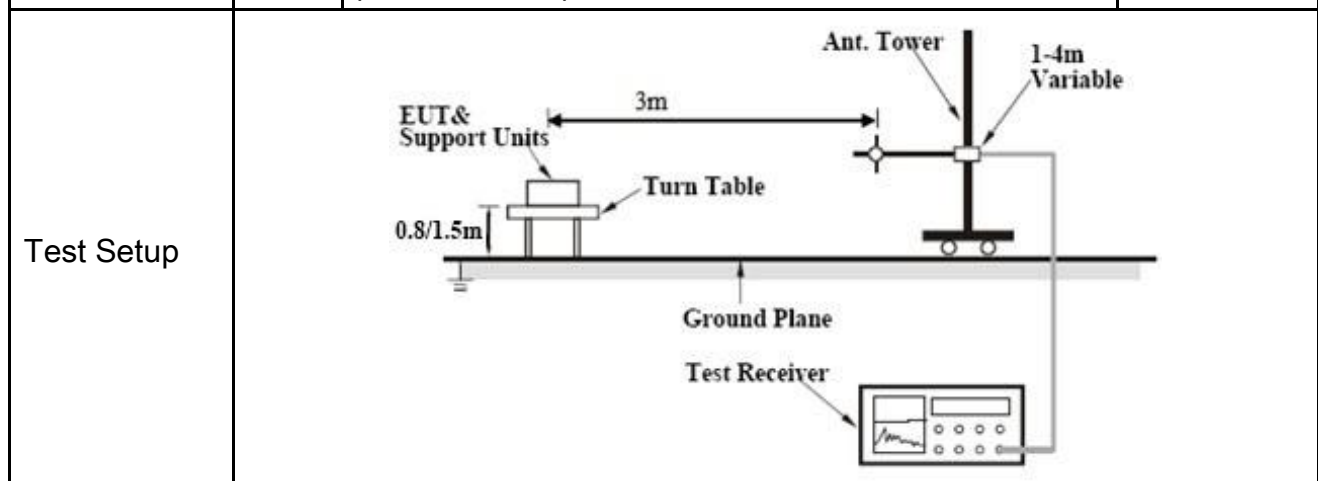

Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> </ul>
----------------	---




	<ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:             <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A


### Test Plots

#### Band Edge measurement result

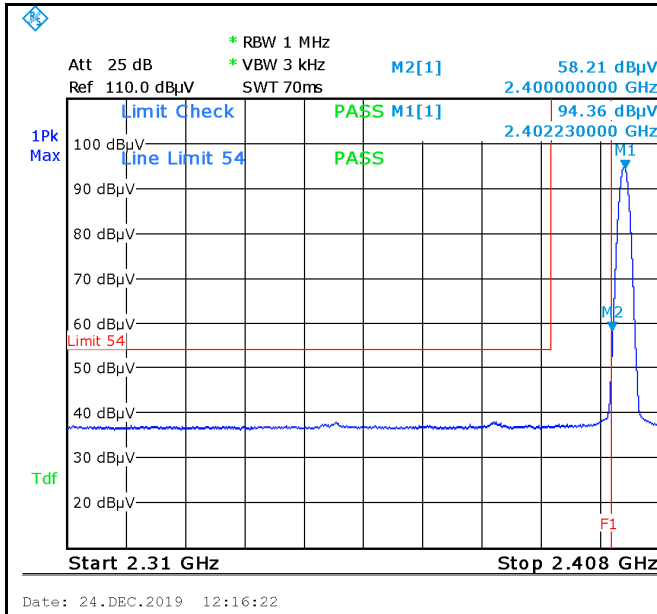


Band Edge, Left Side-AV

Note: F1 is frequency 2390MHz

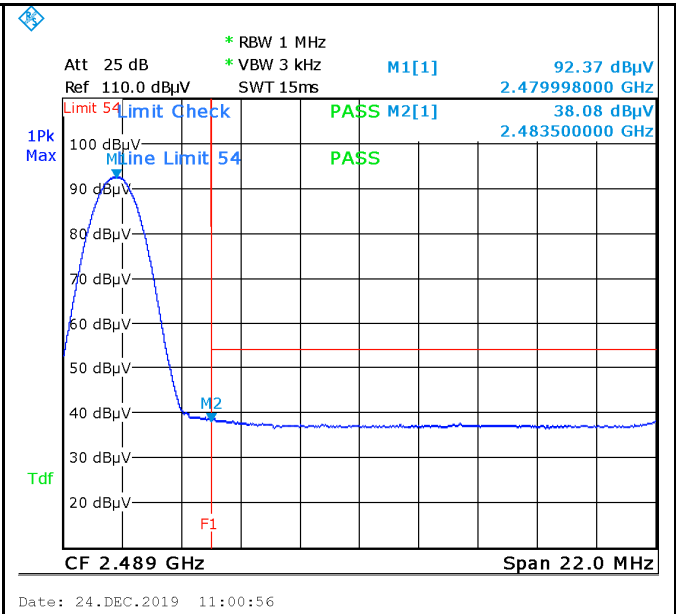


Band Edge, Right Side (Peak)

Note: F1 is frequency 2483.5MHz

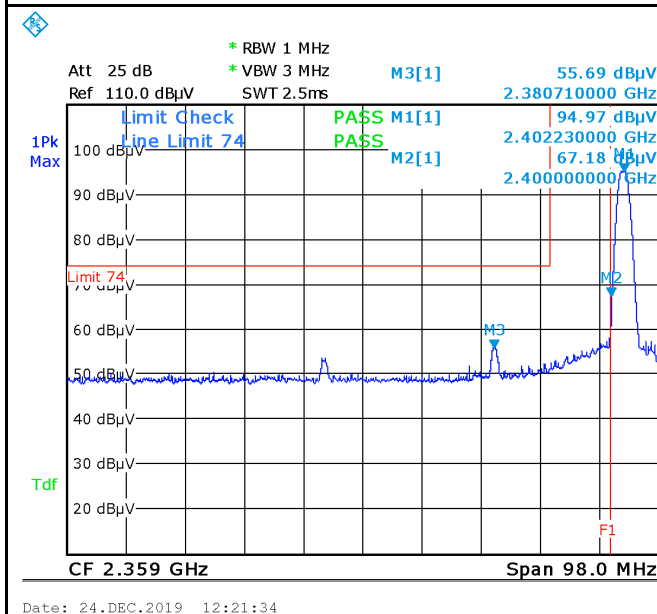

Band Edge, Left Side-AV

Note: F1 is frequency 2483.5MHz

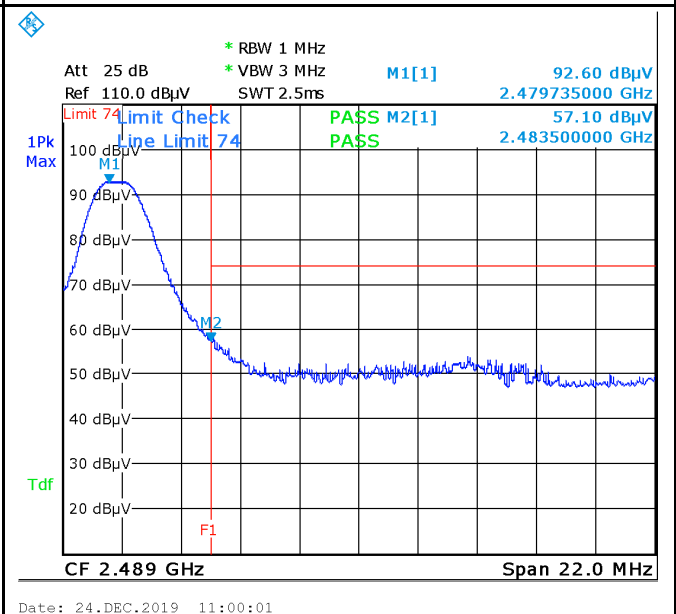

Band Edge, Right Side-(Peak)

Note: F1 is frequency 2483.5MHz


Note: Both Horizontal and vertical polarities were investigated.

## 6.6 AC Power Line Conducted Emissions

Temperature	--
Relative Humidity	--
Atmospheric Pressure	--
Test date :	--
Tested By :	--

### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☐														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

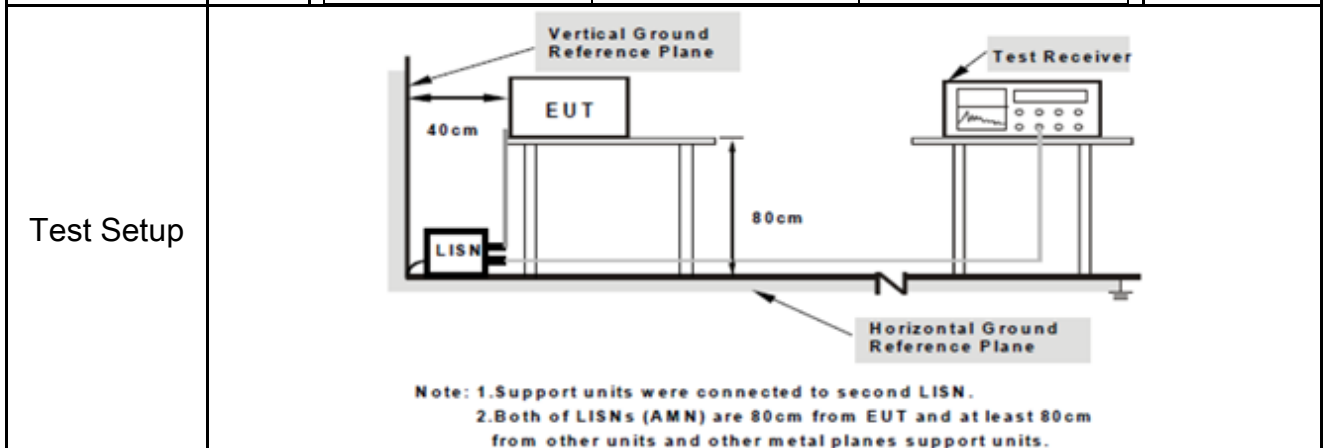

Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>
-----------	---

	<p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	<b>The EUT was powered by battery</b>
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail <input checked="" type="checkbox"/> N/A

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

## 6.7 Radiated Emissions & Restricted Band

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1021mbar
Test date :	Dec. 24, 2019
Tested By :	Aaron Liang

### Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.247(d), RSS210 (A8.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (µV/m)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
	Frequency range (MHz)	Field Strength (µV/m)																	
	0.009~0.490	2400/F(KHz)																	
0.490~1.705	24000/F(KHz)																		
1.705~30.0	30																		
30 – 88	100																		
88 – 216	150																		
216 960	200																		
Above 960	500																		
b)	<p>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required</p> <p><input checked="" type="checkbox"/> 20 dB down      <input type="checkbox"/> 30 dB down</p>	<input checked="" type="checkbox"/>																	
c)	<p>or restricted band, emission must also comply with the radiated emission limits specified in 15.209</p>	<input checked="" type="checkbox"/>																	
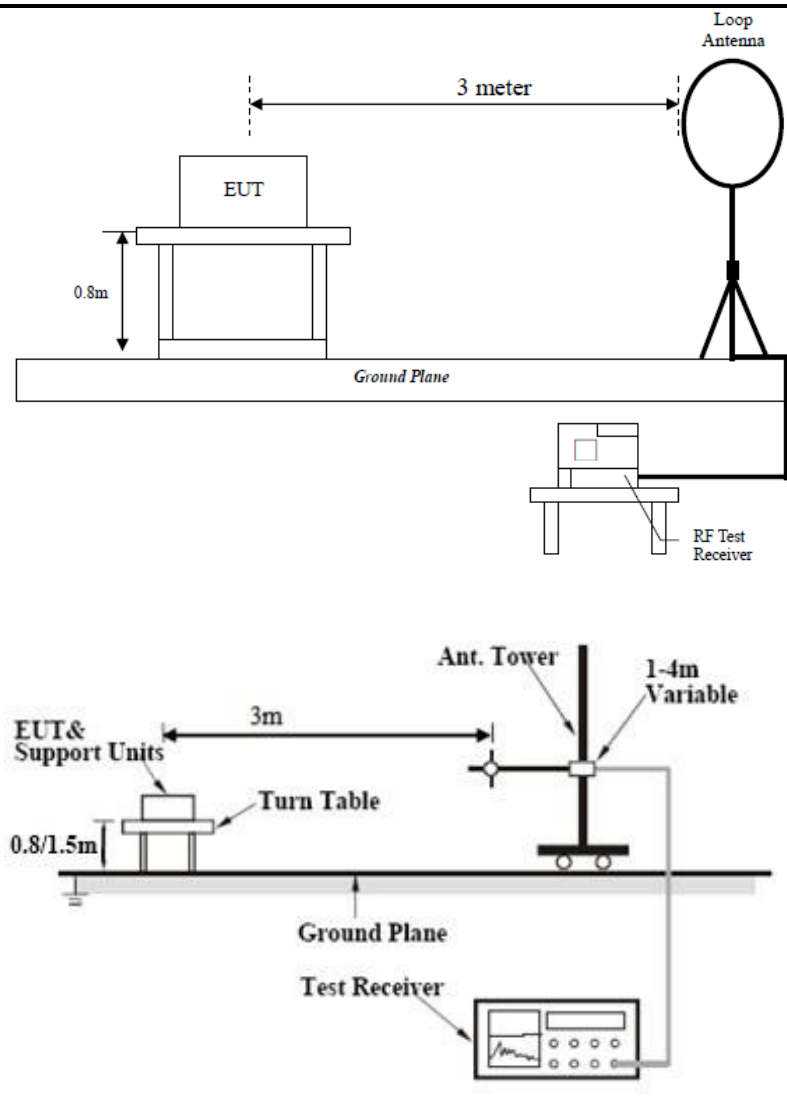
<p>Test Setup</p>	
<p>Procedure</p>	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> </ol>

	<p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes       N/A  
 Test Plot     Yes (See below)     N/A

**Test Result:**

<b>Test Mode:</b>	Transmitting Mode
-------------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

**30MHz -1GHz**

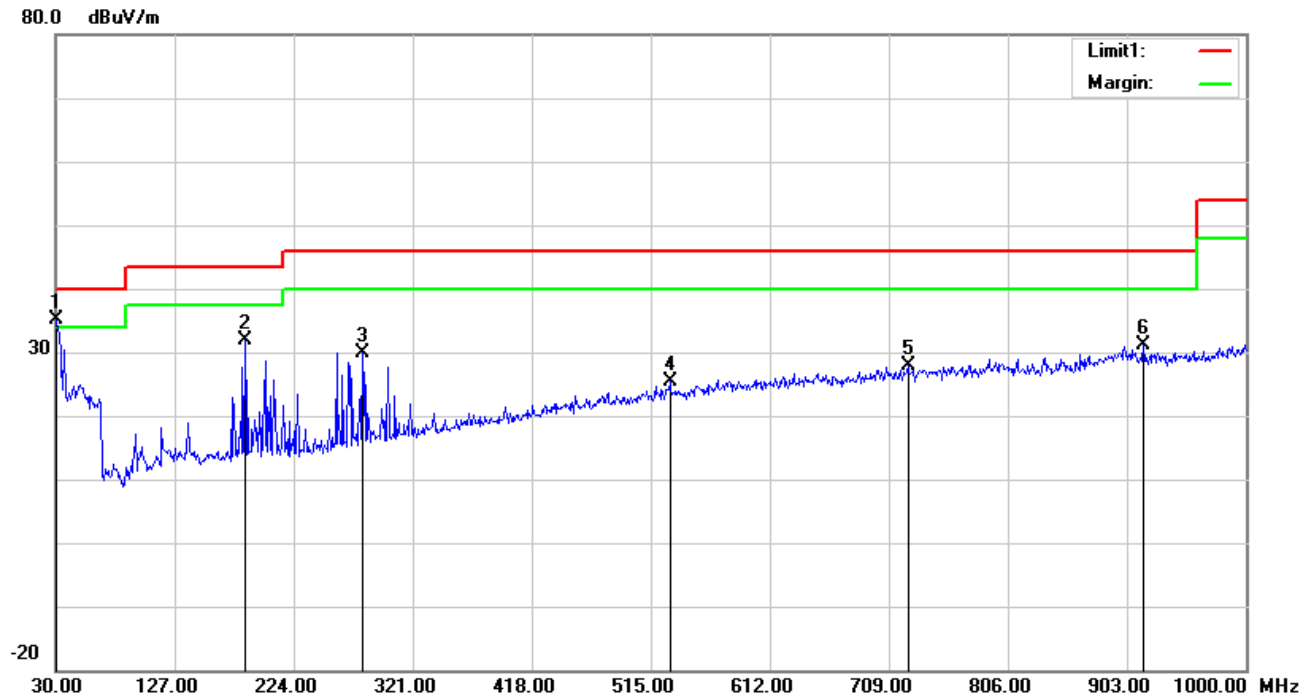


*Test Data*

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	30.9700	37.68	19.48	22.27	0.13	35.02	40.00	-4.98	100	277
2	H	184.2300	41.44	11.31	22.28	1.48	31.95	43.50	-11.55	100	283
3	H	280.2600	37.22	13.23	22.29	1.68	29.84	46.00	-16.16	100	158
4	H	530.5200	25.58	19.22	21.74	2.22	25.28	46.00	-20.72	100	115
5	H	724.5200	25.15	21.60	21.31	2.44	27.88	46.00	-18.12	100	16
6	H	916.5800	25.70	23.57	20.85	2.67	31.09	46.00	-14.91	100	86



### 30MHz -1GHz

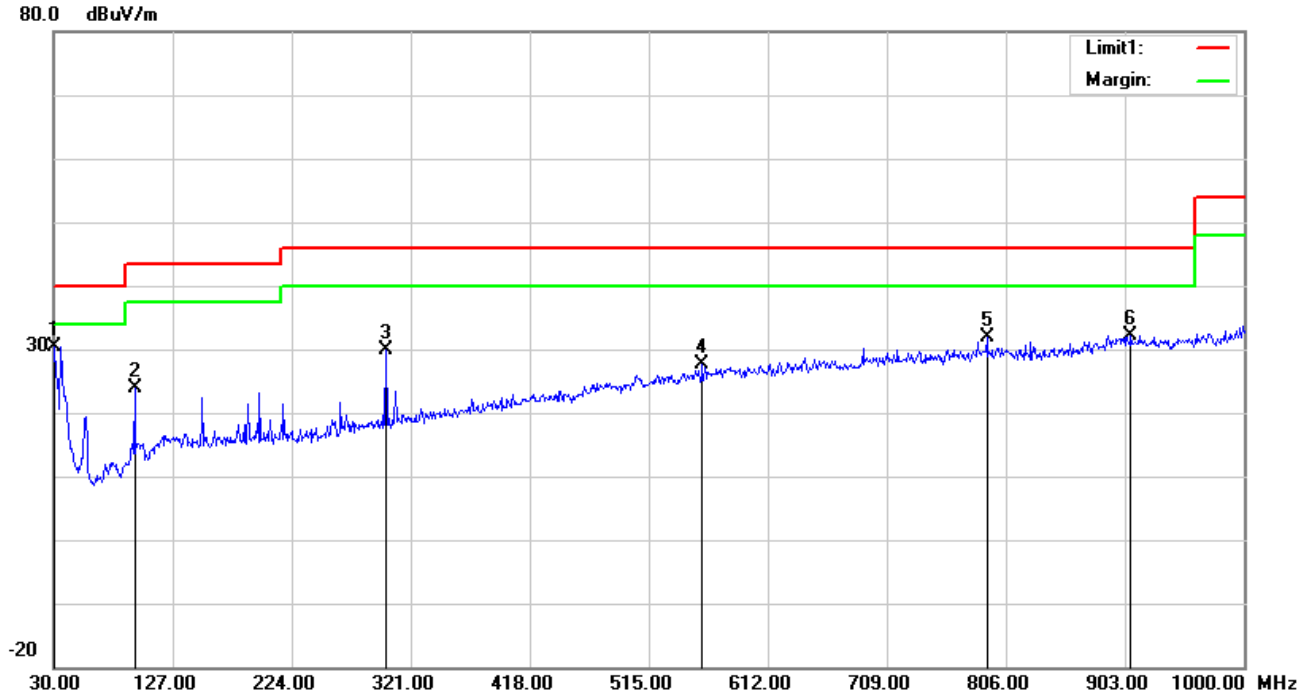

#### Test Data

#### Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	30.9700	33.09	19.48	22.27	0.13	30.43	40.00	-9.57	100	204
2	V	95.9600	37.19	8.30	22.32	0.79	23.96	43.50	-19.54	100	313
3	V	300.6300	36.85	13.71	22.29	1.72	29.99	46.00	-16.01	100	45
4	V	558.6500	27.34	19.58	21.68	2.28	27.52	46.00	-18.48	100	38
5	V	790.4800	28.37	22.11	21.17	2.54	31.85	46.00	-14.15	100	238
6	V	907.8500	26.51	23.74	20.87	2.66	32.04	46.00	-13.96	100	280

**Above 1GHz**

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

**Low Channel (2402 MHz)**

**Vertical**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	DETECTOR (PK/AV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (MM)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
4804	51.08	PK	74	-22.92	163	109	54.83	-3.75
4804	43.42	AV	54	-10.58	163	109	47.17	-3.75

**Horizontal**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	DETECTOR (PK/AV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (MM)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
4804	57.56	PK	74	-16.44	132	289	61.31	-3.75
4804	48.17	AV	54	-5.83	132	289	51.92	-3.75

**Middle Channel (2440 MHz)**

**Vertical**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	DETECTOR (PK/AV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (MM)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
4880	57.32	PK	74	-16.68	153	44	61.28	-3.96
4880	47.36	AV	54	-6.64	153	44	51.32	-3.96
7320	58.23	PK	74	-16.44	165	117	61.31	-3.96
7320	46.38	AV	54	-5.83	165	117	51.92	-3.96

**Horizontal**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	DETECTOR (PK/AV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (MM)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
4880	58.36	PK	74	-15.64	134	173	62.32	-3.96
4880	46.13	AV	54	-7.87	134	173	50.09	-3.96
9760	57.80	PK	74	-16.20	164	77	61.76	-3.96
9760	44.50	AV	54	-9.50	164	77	48.46	-3.96

### High Channel (2480 MHz)

#### Vertical

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	DETECTOR (PK/AV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (MM)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
4960	58.72	PK	74	-15.28	155	88	62.47	-3.75
4960	45.38	AV	54	-8.62	155	88	49.13	-3.75

#### Horizontal

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	DETECTOR (PK/AV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (MM)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
4960	62.16	PK	74	-11.84	143	90	65.91	-3.75
4960	45.64	AV	54	-8.36	143	90	49.39	-3.75

#### Note:

- 1, The testing has been conformed to  $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above only show the worst case.

## Annex A. TEST INSTRUMENT

Instrument	Manufacturer	Model	Serial #	Cal Date	Cal Due
<b>AC Line Conducted Emissions</b>					
EMI Test	Rohde&Schwarz	ESCS30	8471241027	Apr. 04, 19	Apr. 03, 20
Artificial Mains Network	SCHWARZBECK	8127	8127713	Mar. 28, 19	Mar. 27, 20
ISN	Com-Power	ISN T800	34373	Mar. 28, 19	Mar. 27, 20
Test software	EZ-EMC	ICP-03A1	N/A	N/A	N/A
<b>RF conducted test</b>					
Wireless	R&S	CMW270	1201.0002K7	Dec. 18, 19	Dec. 17, 20
MXA VEXTOR	Agilent	n5182a	MY50140530	Mar. 28, 19	Mar. 27, 20
MXA signal	Agilent	n9020a	MY49100060	Mar. 28, 19	Mar. 27, 20
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 28, 19	Mar. 27, 20
Signal	Agilent	E4421B	US40051152	Dec. 18, 19	Dec. 17, 20
DC Power	Agilent	E3640A	MY40004013	Mar. 28, 19	Mar. 27, 20
Programmable	Hongjin	HYC-TH-	DG-180746	Mar. 28, 19	Mar. 27, 20
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 20, 19	Mar. 19, 20
<b>Radiated Emissions</b>					
EMI Test	Rohde&Schwarz	ESL6	1300.5001K0	Apr. 04, 19	Apr. 03, 20
Bilog Antenna	Sunol Sciences	JB6	A110712	Apr. 08, 19	Apr. 07, 20
Active Antenna	CMO-POWER	AL-130	121031	Mar. 27, 19	Mar. 26, 20
Signal Amplifier	HP	8447E	443008	Mar. 28, 19	Mar. 27, 20
3m Semi-anechoic	SAEMC	9m*6m*6m	N/A	Oct. 18, 18	Oct. 17, 21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A
Spectrum	Agilent	E4446A	MY46180622	May 08, 19	May 07, 20
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 28, 19	Mar. 27, 20
Horn Antenna	COM-POWER	HAH-118	71259	Mar. 22, 19	Mar. 21, 20
Horn Antenna	COM-POWER	HAH-118	71283	Mar. 20, 19	Mar. 19, 20
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA917014	Jun. 30, 19	Jun. 29, 20


Test Report No.	Q191022S004-FCC-R
Page	29 of 33

SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA917024	Jun. 30, 19	Jun. 29, 20
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Mar. 28, 19	Mar. 27, 20
AMPLIFIER	Emc Instruments Corporation	Emc012645	980077	Jan. 04, 19	Jan. 03, 20


## Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex B.i. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .

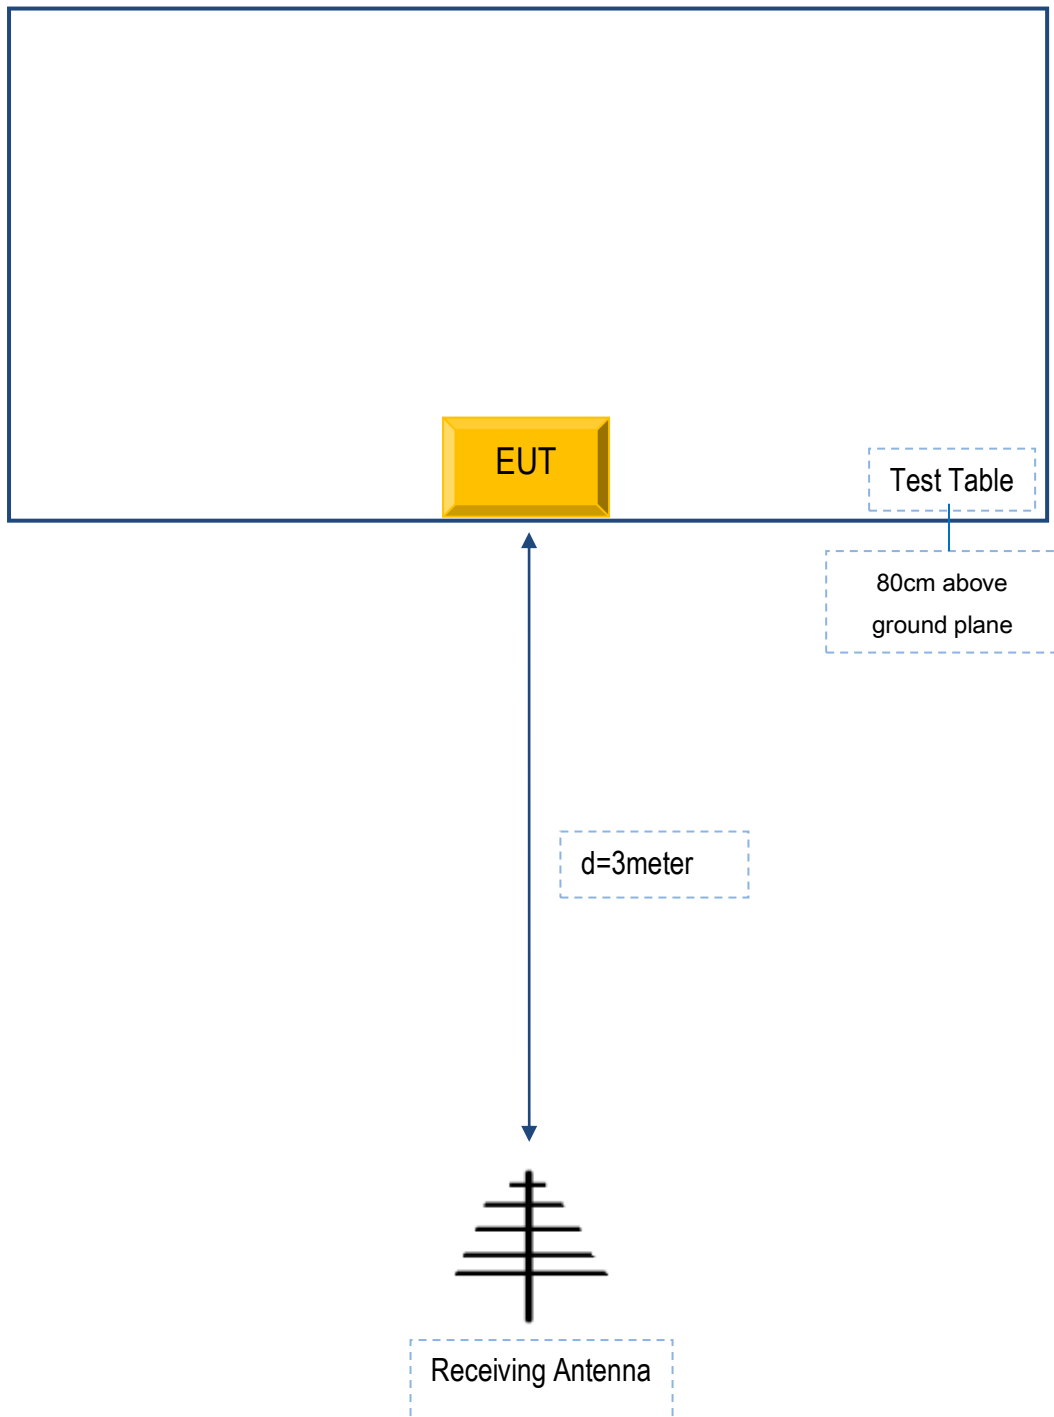

**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

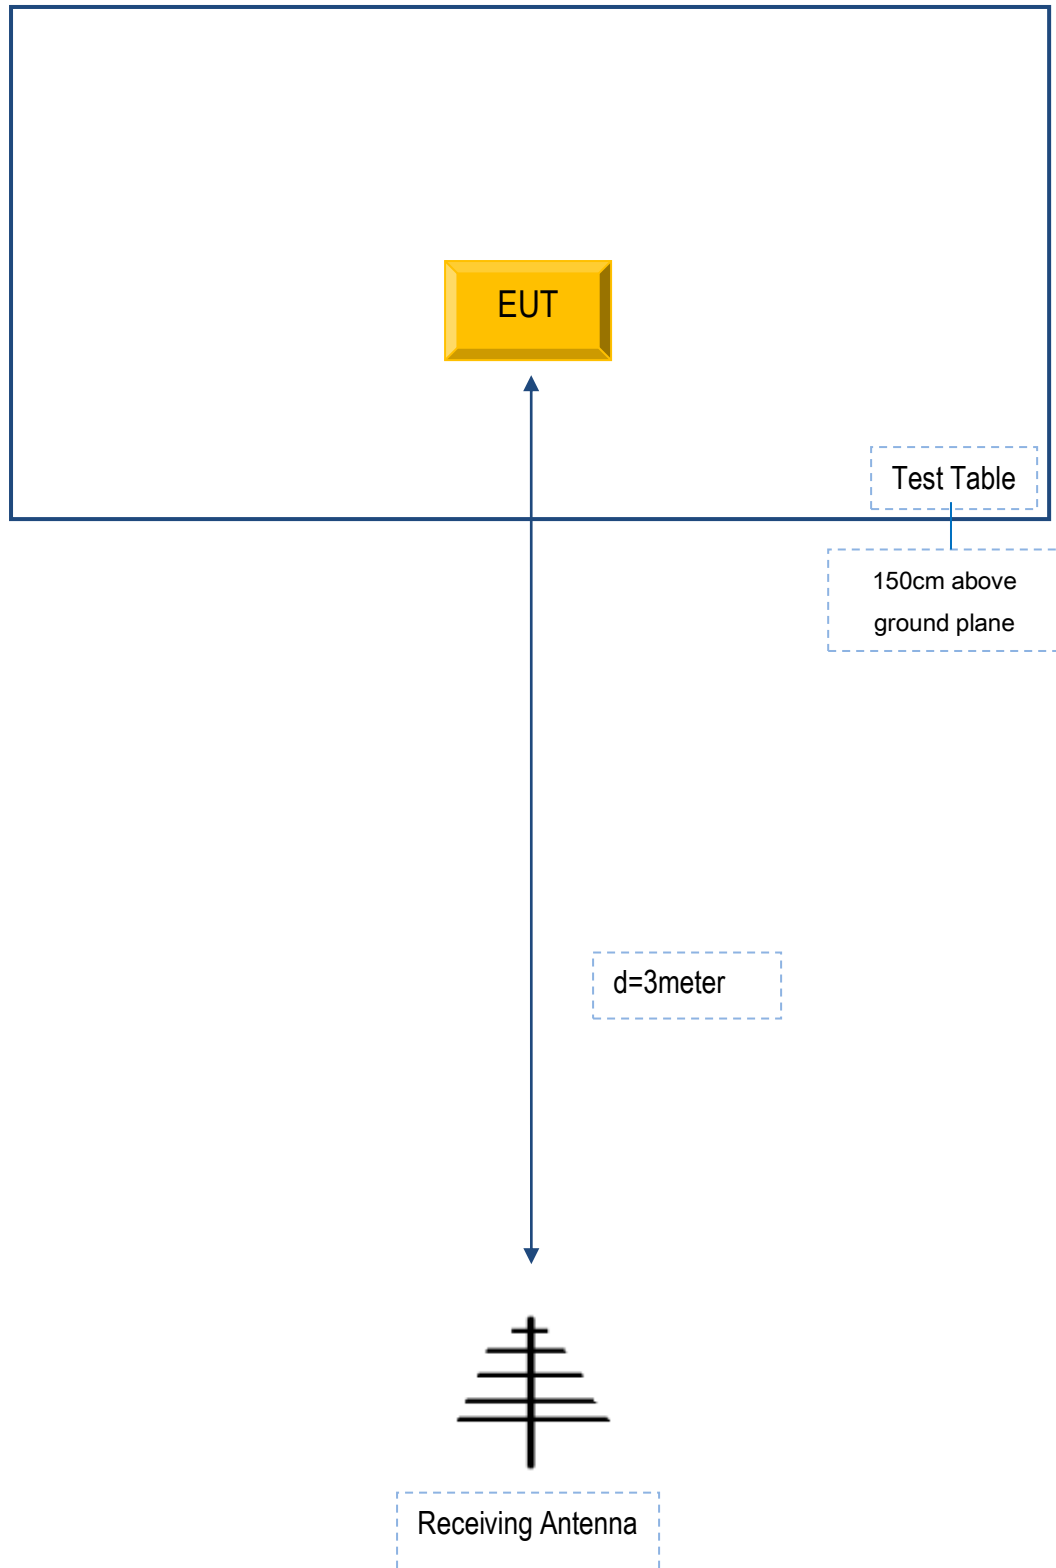

**Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

**Supporting Equipment:**

Manufacturer	Equipment Description	Model	Serial No
-	-	-	-
-	-	-	-

**Supporting Cable:**

Cable type	Shield Type	Ferrite Core	Length	Serial No
-	-	-	-	-



Test Report No.	Q191022S004-FCC-R
Page	33 of 33

**Annex C. User Manual / Block Diagram / Schematics / Partlist/  
DECLARATION OF SIMILARITY**

Please see the attachment